


## FEATURES

- **Low Power: 10 mW**
- **Unipolar or Bipolar Operation**
- **Settling Time: 10  $\mu$ s to 0.003%**
- **15-Bit Linearity and Monotonicity: -40°C to 85°C**
- **Programmable Reset to Mid-Scale or Zero-Scale**
- **Double-Buffered Data Inputs**

- **Process Control**
- **Closed-Loop Servo-Control**
- **Motor Control**
- **Data Acquisition Systems**
- **DAC-Per-Pin Programmers**

The DAC7634 is a 16-bit, quad voltage output, digital-to-analog converter with specified 15-bit monotonic performance over the specified temperature range. It accepts 24-bit serial input data, has double-buffered DAC input logic (allowing simultaneous update of all DACs), and provides a serial data output for daisy-chaining multiple DACs. Programmable asynchronous reset clears all registers to a mid-scale code of 8000<sub>H</sub> or to a zero-scale of 0000<sub>H</sub>. The DAC7634 can operate from a single 5-V supply or from 5-V and -5 V supplies.

Low power and small size per DAC make the DAC7634 ideal for automatic test equipment, DAC-per-pin programmers, data acquisition systems, and closed-loop servo-control. The DAC7634 is available in a 48-lead SSOP package and offers specifications over the  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  temperature range.

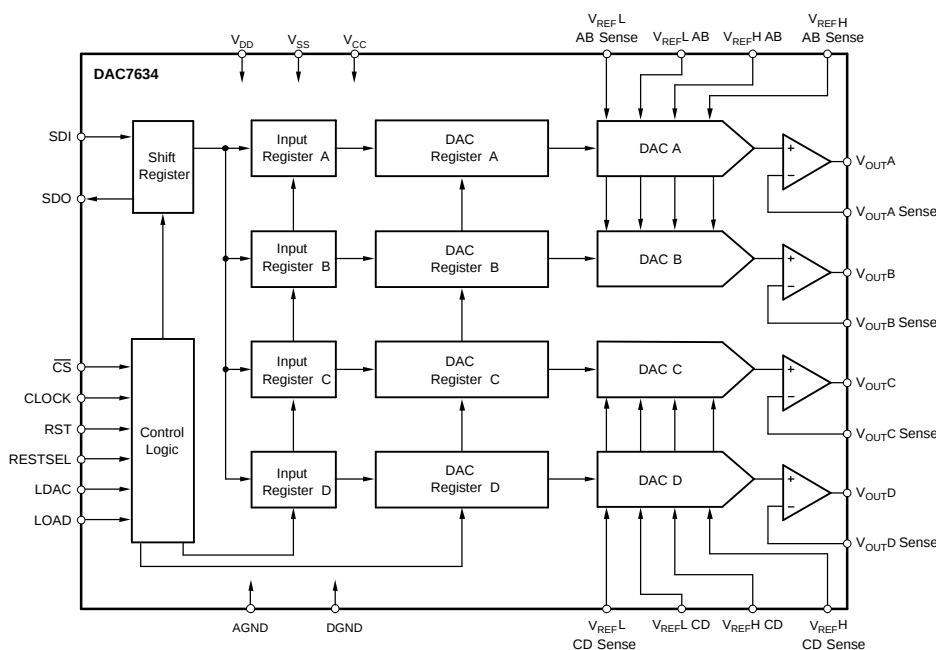

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

|           |                                   | UNIT                            |
|-----------|-----------------------------------|---------------------------------|
|           | $V_{CC}$ and $V_{DD}$ to $V_{SS}$ | –0.3 V to 11 V                  |
|           | $V_{CC}$ and $V_{DD}$ to GND      | –0.3 V to 5.5 V                 |
|           | $V_{REFL}$ to $V_{SS}$            | –0.3 V to ( $V_{CC} - V_{SS}$ ) |
|           | $V_{CC}$ to $V_{REFH}$            | –0.3 V to ( $V_{CC} - V_{SS}$ ) |
|           | $V_{REFH}$ to $V_{REFL}$          | –0.3 V to ( $V_{CC} - V_{SS}$ ) |
|           | Digital input voltage to GND      | –0.3 V to $V_{DD} + 0.3$ V      |
|           | Digital output voltage to GND     | –0.3 V to $V_{DD} + 0.3$ V      |
| $T_J$     | Maximum junction temperature      | 150°C                           |
| $T_A$     | Operating temperature range       | –40°C to 85°C                   |
| $T_{stg}$ | Storage temperature range         | –65°C to 125°C                  |
|           | Lead temperature (solder, 10s)    | 300°C                           |

(1) Stresses above those listed under "absolute maximum ratings" may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may affect device reliability.

## SPECIFICATIONS

At  $T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{SS} = -5$  V,  $V_{REFH} = 2.5$  V, and  $V_{REFL} = -2.5$  V, unless otherwise noted

| PARAMETER                                          | TEST CONDITIONS             | DAC7634E |     |     | DAC7634EB |     |     | UNIT   |
|----------------------------------------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                                                    |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| ACCURACY                                           |                             |          |     |     |           |     |     |        |
| Linearity error                                    |                             |          | ±3  | ±4  |           | ±2  | ±3  | LSB    |
| Linearity match                                    |                             |          | ±4  |     |           | ±2  |     | LSB    |
| Differential linearity error                       |                             |          | ±2  | ±3  |           | ±1  | ±2  | LSB    |
| Monotonicity, T <sub>MIN</sub> to T <sub>MAX</sub> |                             | 14       |     |     | 15        |     |     | Bits   |
| Bipolar zero error                                 |                             |          | ±1  | ±2  |           | ±1  | ±2  | mV     |
| Bipolar zero error drift                           |                             |          | 5   | 10  |           | 5   | 10  | ppm/°C |
| Full-scale error                                   |                             |          | ±1  | ±2  |           | ±1  | ±2  | mV     |
| Full-scale error drift                             |                             |          | 5   | 10  |           | 5   | 10  | ppm/°C |
| Bipolar zero matching                              | Channel-to-channel matching |          | ±1  | ±2  |           | ±1  | ±2  | mV     |
| Full-scale matching                                | Channel-to-channel matching |          | ±1  | ±2  |           | ±1  | ±2  | mV     |
| Power supply rejection ratio (PSRR)                | At full scale               |          | 10  | 100 |           | 10  | 100 | ppm/V  |

**SPECIFICATIONS (continued)**

At  $T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{SS} = -5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ , and  $V_{REFL} = -2.5\text{ V}$ , unless otherwise noted

| PARAMETER                    | TEST CONDITIONS                                                                                          | DAC7634E                   |                          |       | DAC7634EB                  |                          |       | UNIT                         |
|------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------|--------------------------|-------|----------------------------|--------------------------|-------|------------------------------|
|                              |                                                                                                          | MIN                        | TYP                      | MAX   | MIN                        | TYP                      | MAX   |                              |
| ANALOG INPUT                 |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| Voltage output               | $V_{\text{REF}} = -2.5\text{ V}$ , $R_{\text{L}} = 10\text{ k}\Omega$ ,<br>$V_{\text{SS}} = -5\text{ V}$ | $V_{\text{REFL}}$          | $V_{\text{REFH}}$        |       | $V_{\text{REFL}}$          | $V_{\text{REFH}}$        |       | V                            |
| Output current               |                                                                                                          | -1.25                      | 1.25                     |       | 1.25                       | 1.25                     |       | mA                           |
| Maximum load capacitance     | No oscillation                                                                                           | 500                        |                          |       | 500                        |                          |       | pF                           |
| Short-circuit current        |                                                                                                          | -10, 30                    |                          |       | -10, +30                   |                          |       | mA                           |
| Short-circuit duration       | GND or $V_{\text{CC}}$ or $V_{\text{SS}}$                                                                | Indefinite                 |                          |       | Indefinite                 |                          |       |                              |
| REFERENCE INPUT              |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| Ref high input voltage range |                                                                                                          | $V_{\text{REFL}} + 1.25$   | 2.5                      |       | $V_{\text{REFL}} + 1.25$   | 2.5                      |       | V                            |
| Ref low input voltage range  |                                                                                                          | -2.5                       | $V_{\text{REFH}} - 1.25$ |       | -2.5                       | $V_{\text{REFH}} - 1.25$ |       | V                            |
| Ref high input current       |                                                                                                          | 500                        |                          |       | 500                        |                          |       | $\mu\text{A}$                |
| Ref low input current        |                                                                                                          | -500                       |                          |       | -500                       |                          |       | $\mu\text{A}$                |
| DYNAMIC PERFORMANCE          |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| Settling time                | To $\pm 0.003\%$ , 5-V output step                                                                       | 8                          |                          | 10    | 8                          |                          | 10    | $\mu\text{s}$                |
| Channel-to-channel crosstalk | See Figure 5                                                                                             | 0.5                        |                          |       | 0.5                        |                          |       | LSB                          |
| Digital feedthrough          |                                                                                                          | 2                          |                          |       | 2                          |                          |       | nV-s                         |
| Output noise voltage         | $f = 10\text{ kHz}$                                                                                      | 60                         |                          |       | 60                         |                          |       | $\text{nV}/\sqrt{\text{Hz}}$ |
| DAC glitch                   | 7FFF <sub>H</sub> to 8000 <sub>H</sub> or<br>8000 <sub>H</sub> to 7FFF <sub>H</sub>                      | 40                         |                          |       | 40                         |                          |       | nV-s                         |
| DIGITAL INPUT                |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| $V_{\text{IH}}$              |                                                                                                          | $0.7 \times V_{\text{DD}}$ |                          |       | $0.7 \times V_{\text{DD}}$ |                          |       | V                            |
| $V_{\text{IL}}$              |                                                                                                          | $0.3 \times V_{\text{DD}}$ |                          |       | $0.3 \times V_{\text{DD}}$ |                          |       | V                            |
| $I_{\text{IH}}$              |                                                                                                          | $\pm 10$                   |                          |       | $\pm 10$                   |                          |       | $\mu\text{A}$                |
| $I_{\text{IL}}$              |                                                                                                          | $\pm 10$                   |                          |       | $\pm 10$                   |                          |       | $\mu\text{A}$                |
| DIGITAL OUTPUT               |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| $V_{\text{OH}}$              | $I_{\text{OH}} = -0.8\text{ mA}$                                                                         | 3.6                        | 4.5                      |       | 3.6                        | 4.5                      |       | V                            |
| $V_{\text{OL}}$              | $I_{\text{OL}} = 1.6\text{ mA}$                                                                          |                            | 0.3                      | 0.4   |                            | 0.3                      | 0.4   | V                            |
| POWER SUPPLY                 |                                                                                                          |                            |                          |       |                            |                          |       |                              |
| $V_{\text{DD}}$              |                                                                                                          | 4.75                       | 5.0                      | 5.25  | 4.75                       | 5.0                      | 5.25  | V                            |
| $V_{\text{CC}}$              |                                                                                                          | 4.75                       | 5.0                      | 5.25  | 4.75                       | 5.0                      | 5.25  | V                            |
| $V_{\text{SS}}$              |                                                                                                          | -5.25                      | -5.0                     | -4.75 | -5.25                      | -5.0                     | -4.75 | V                            |
| $I_{\text{CC}}$              |                                                                                                          | 1.5                        |                          |       | 1.5                        |                          |       | mA                           |
| $I_{\text{DD}}$              |                                                                                                          | 50                         |                          |       | 50                         |                          |       | $\mu\text{A}$                |
| $I_{\text{SS}}$              |                                                                                                          | -2.3                       | -1.5                     |       | -2.3                       | -1.5                     |       | mA                           |
| Power                        |                                                                                                          | 15                         |                          | 20    | 15                         |                          | 20    | mW                           |

**SPECIFICATIONS**


At  $T_A = T_{MIN}$  to  $T_{MAX}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{SS} = 0\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ , and  $V_{REFL} = 0\text{ V}$ , unless otherwise noted

| PARAMETER                                          | TEST CONDITIONS                                                                     | DAC7634E                   |            |                            | DAC7634EB                  |            |                            | UNIT   |
|----------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------|------------|----------------------------|----------------------------|------------|----------------------------|--------|
|                                                    |                                                                                     | MIN                        | TYP        | MAX                        | MIN                        | TYP        | MAX                        |        |
| ACCURACY                                           |                                                                                     |                            |            |                            |                            |            |                            |        |
| Linearity error <sup>(1)</sup>                     |                                                                                     |                            | ±3         | ±4                         |                            | ±2         | ±3                         | LSB    |
| Linearity match                                    |                                                                                     |                            | ±4         |                            |                            | ±2         |                            | LSB    |
| Differential linearity error                       |                                                                                     |                            | ±2         | ±3                         |                            | ±1         | ±2                         | LSB    |
| Monotonicity, T <sub>MIN</sub> to T <sub>MAX</sub> |                                                                                     | 14                         |            |                            | 15                         |            |                            | Bits   |
| Zero-scale error                                   |                                                                                     |                            | ±1         | ±2                         |                            | ±1         | ±2                         | mV     |
| Zero-scale error drift                             |                                                                                     |                            | 5          | 10                         |                            | 5          | 10                         | ppm/°C |
| Full-scale error                                   |                                                                                     |                            | ±1         | ±2                         |                            | ±1         | ±2                         | mV     |
| Full-scale error drift                             |                                                                                     |                            | 5          | 10                         |                            | 5          | 10                         | ppm/°C |
| Zero-scale matching                                | Channel-to-channel matching                                                         |                            | ±1         | ±2                         |                            | ±1         | ±2                         | mV     |
| Full-scale matching                                | Channel-to-channel matching                                                         |                            | ±1         | ±2                         |                            | ±1         | ±2                         | mV     |
| Power supply rejection ratio (PSRR)                | At full scale                                                                       |                            | 10         | 100                        |                            | 10         | 100                        | ppm/V  |
| ANALOG INPUT                                       |                                                                                     |                            |            |                            |                            |            |                            |        |
| Voltage output                                     | V <sub>REFL</sub> = 0 V, V <sub>SS</sub> = 0 V,<br>R <sub>L</sub> = 10 kΩ           | 0                          |            | V <sub>REFH</sub>          | 0                          |            | V <sub>REFH</sub>          | V      |
| Output current                                     |                                                                                     | – 1.25                     |            | 1.25                       | –1.25                      |            | 1.25                       | mA     |
| Maximum load capacitance                           | No oscillation                                                                      |                            | 500        |                            |                            | 500        |                            | pF     |
| Short-circuit current                              |                                                                                     |                            | ±30        |                            |                            | ±30        |                            | mA     |
| Short-circuit duration                             | GND or V <sub>CC</sub>                                                              |                            | Indefinite |                            |                            | Indefinite |                            |        |
| REFERENCE INPUT                                    |                                                                                     |                            |            |                            |                            |            |                            |        |
| Ref high input voltage range                       |                                                                                     | V <sub>REFL</sub><br>+1.25 |            | 2.5                        | V <sub>REFL</sub><br>+1.25 |            | 2.5                        | V      |
| Ref low input voltage range                        |                                                                                     | 0                          |            | V <sub>REFH</sub><br>–1.25 | 0                          |            | V <sub>REFH</sub><br>–1.25 | V      |
| Ref high input current                             |                                                                                     |                            | 250        |                            |                            | 250        |                            | μA     |
| Ref low input current                              |                                                                                     |                            | –250       |                            |                            | –250       |                            | μA     |
| DYNAMIC PERFORMANCE                                |                                                                                     |                            |            |                            |                            |            |                            |        |
| Settling time                                      | To ±0.003%, 2.5-V output step                                                       |                            | 8          | 10                         |                            | 8          | 10                         | μs     |
| Channel-to-channel crosstalk                       | See Figure 6                                                                        |                            | 0.5        |                            |                            | 0.5        |                            | LSB    |
| Digital feedthrough                                |                                                                                     |                            | 2          |                            |                            | 2          |                            | nV-s   |
| Output noise voltage                               | f = 10 kHz                                                                          |                            | 60         |                            |                            | 60         |                            | nV/√Hz |
| DAC glitch                                         | 7FFF <sub>H</sub> to 8000 <sub>H</sub> or<br>8000 <sub>H</sub> to 7FFF <sub>H</sub> |                            | 40         |                            |                            | 40         |                            | nV-s   |
| DIGITAL INPUT                                      |                                                                                     |                            |            |                            |                            |            |                            |        |
| V <sub>IH</sub>                                    |                                                                                     | 0.7 × V <sub>DD</sub>      |            |                            | 0.7 × V <sub>DD</sub>      |            |                            | V      |
| V <sub>IL</sub>                                    |                                                                                     | 0.3 × V <sub>DD</sub>      |            |                            | 0.3 × V <sub>DD</sub>      |            |                            | V      |
| I <sub>IH</sub>                                    |                                                                                     | ±10                        |            |                            | ±10                        |            |                            | μA     |
| I <sub>IL</sub>                                    |                                                                                     | ±10                        |            |                            | ±10                        |            |                            | μA     |
| DIGITAL OUTPUT                                     |                                                                                     |                            |            |                            |                            |            |                            |        |
| V <sub>OH</sub>                                    | I <sub>OH</sub> = –0.8 mA                                                           | 3.6                        | 4.5        |                            | 3.6                        | 4.5        |                            | V      |
| V <sub>OL</sub>                                    | I <sub>OL</sub> = 1.6 mA                                                            |                            | 0.3        | 0.4                        |                            | 0.3        | 0.4                        | V      |
| POWER SUPPLY                                       |                                                                                     |                            |            |                            |                            |            |                            |        |
| V <sub>DD</sub>                                    |                                                                                     | 4.75                       | 5.0        | 5.25                       | 4.75                       | 5.0        | 5.25                       | V      |
| V <sub>CC</sub>                                    |                                                                                     | 4.75                       | 5.0        | 5.25                       | 4.75                       | 5.0        | 5.25                       | V      |
| V <sub>SS</sub>                                    |                                                                                     | 0                          | 0          | 0                          | 0                          | 0          | 0                          | V      |
| I <sub>CC</sub>                                    |                                                                                     |                            | 1.5        | 2                          |                            | 1.5        | 2                          | mA     |
| I <sub>DD</sub>                                    |                                                                                     |                            | 50         |                            |                            | 50         |                            | μA     |
| Power                                              |                                                                                     |                            | 7.5        | 10                         |                            | 7.5        | 10                         | mW     |

(1) If  $V_{SS} = 0\text{ V}$  specification applies at Code 0040<sub>H</sub> and above due to possible negative zero-scale error.

**PIN DESCRIPTIONS**

| PIN | NAME                     | DESCRIPTION                                                                                                                                                                                            | PIN | NAME                       | DESCRIPTION                                                                            |
|-----|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----------------------------|----------------------------------------------------------------------------------------|
| 1   | NC                       | No connection                                                                                                                                                                                          | 25  | V <sub>CC</sub>            | Analog +5-V power supply                                                               |
| 2   | NC                       | No connection                                                                                                                                                                                          | 26  | V <sub>CC</sub>            | Analog +5-V power supply                                                               |
| 3   | SDI                      | Serial data input                                                                                                                                                                                      | 27  | AGND                       | Analog ground                                                                          |
| 4   | DGND                     | Digital ground                                                                                                                                                                                         | 28  | AGND                       | Analog ground                                                                          |
| 5   | CLK                      | Data clock input                                                                                                                                                                                       | 29  | V <sub>SS</sub>            | Analog +5-V power supply or 0-V single supply                                          |
| 6   | DGND                     | Digital ground                                                                                                                                                                                         | 30  | V <sub>SS</sub>            | Analog +5-V power supply or 0-V single supply                                          |
| 7   | LDAC                     | DAC register load control, rising edge triggered                                                                                                                                                       | 31  | V <sub>OUTD</sub>          | DAC D output voltage                                                                   |
| 8   | DGND                     | Digital ground                                                                                                                                                                                         | 32  | V <sub>OUTD</sub> Sense    | DAC D's output amplifier inverting input. Used to close feedback loop at load.         |
| 9   | $\overline{\text{LOAD}}$ | DAC input register load control, active low                                                                                                                                                            | 33  | V <sub>REFL</sub> CD Sense | DAC C and D reference low sense input                                                  |
| 10  | DGND                     | Digital ground                                                                                                                                                                                         | 34  | V <sub>REFL</sub> CD       | DAC C and D reference low input                                                        |
| 11  | $\overline{\text{CS}}$   | Chip select, active low                                                                                                                                                                                | 35  | V <sub>REFH</sub> CD       | DAC C and D reference high input                                                       |
| 12  | DGND                     | Digital ground                                                                                                                                                                                         | 36  | V <sub>REFH</sub> CD Sense | DAC C and D reference high sense input                                                 |
| 13  | SDO                      | Serial data output                                                                                                                                                                                     | 37  | V <sub>OUTC</sub>          | DAC C output voltage                                                                   |
| 14  | DGND                     | Digital ground                                                                                                                                                                                         | 38  | V <sub>OUTC</sub> Sense    | DAC C's output amplifier inverting input. Used to close the feedback loop at the load. |
| 15  | RSTSEL                   | Reset Select. Determines the action of RST. If HIGH, a RST common sets the DAC registers to mid-scale (8000 <sub>h</sub> ). If LOW, a RST command sets the DAC registers to zero (0000 <sub>h</sub> ). | 39  | V <sub>OUTB</sub>          | DAC B output voltage                                                                   |
| 16  | DGND                     | Digital ground                                                                                                                                                                                         | 40  | V <sub>OUTB</sub> Sense    | DAC B's output amplifier inverting input. Used to close the feedback loop at the load. |
| 17  | RST                      | Reset, rising edge triggered. Depending on the state of RSTSEL, the DAC registers are set to either mid-scale or zero.                                                                                 | 41  | V <sub>REFH</sub> AB Sense | DAC A and B reference high sense input                                                 |
| 18  | DGND                     | Digital ground                                                                                                                                                                                         | 42  | V <sub>REFH</sub> AB       | DAC A and B reference high input                                                       |
| 19  | NC                       | No connection                                                                                                                                                                                          | 43  | V <sub>REFL</sub> AB       | DAC A and B reference low input                                                        |
| 20  | NC                       | No connection                                                                                                                                                                                          | 44  | V <sub>REFL</sub> AB Sense | DAC A and B reference low sense input                                                  |
| 21  | DGND                     | Digital ground                                                                                                                                                                                         | 45  | V <sub>SS</sub>            | Analog –5-V power supply or 0-V single supply                                          |
| 22  | DGND                     | Digital ground                                                                                                                                                                                         | 46  | AGND                       | Analog ground                                                                          |
| 23  | V <sub>DD</sub>          | Digital 5-V power supply                                                                                                                                                                               | 47  | V <sub>OUTA</sub>          | DAC A output voltage                                                                   |
| 24  | V <sub>DD</sub>          | Digital 5-V power supply                                                                                                                                                                               | 48  | V <sub>OUTA</sub> Sense    | DAC A's output amplifier inverting input. Used to close the feedback loop at the load. |

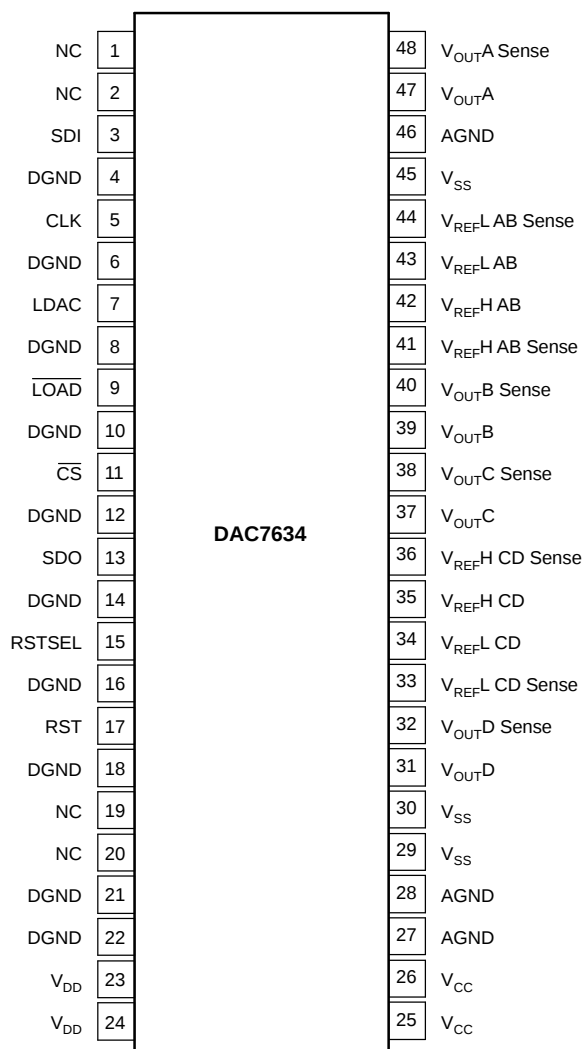**PIN CONFIGURATION**

# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0$ V

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{REFH} = 2.5$  V,  $V_{REFL} = 0$  V, representative unit, unless otherwise specified.

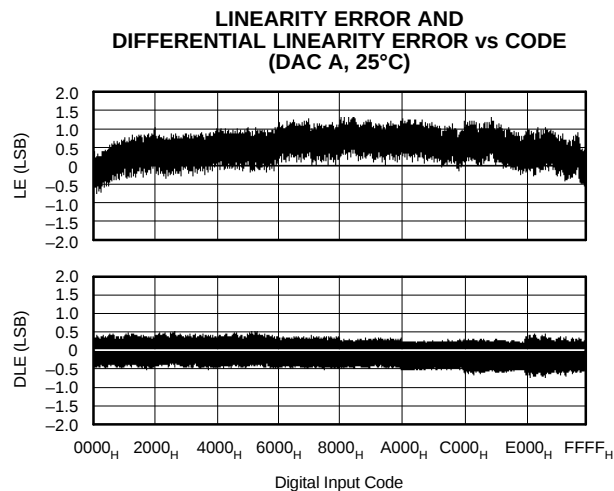


Figure 1.

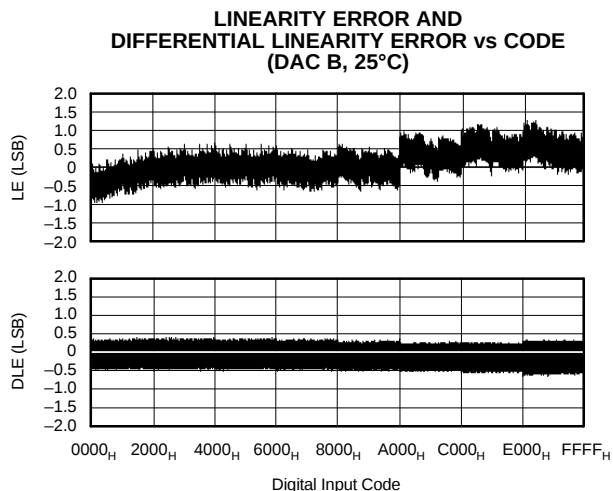


Figure 2.

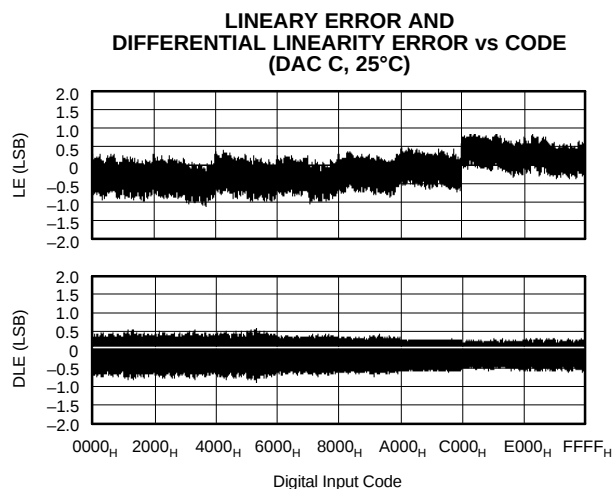


Figure 3.

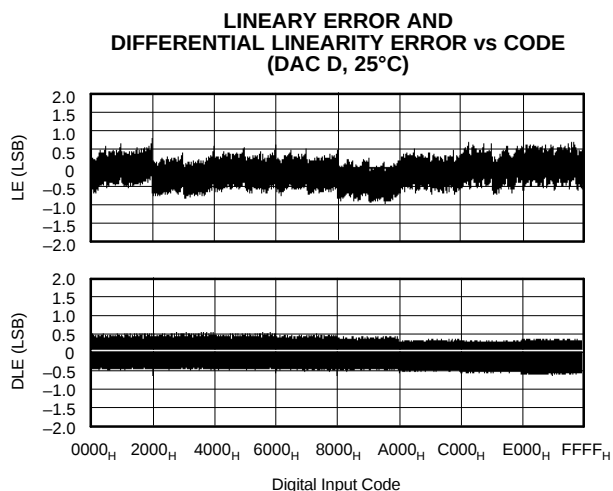


Figure 4.

### TYPICAL PERFORMANCE CURVES: $V_{SS} = 0$ V (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{REFH} = 2.5$  V,  $V_{REFL} = 0$  V, representative unit, unless otherwise specified.

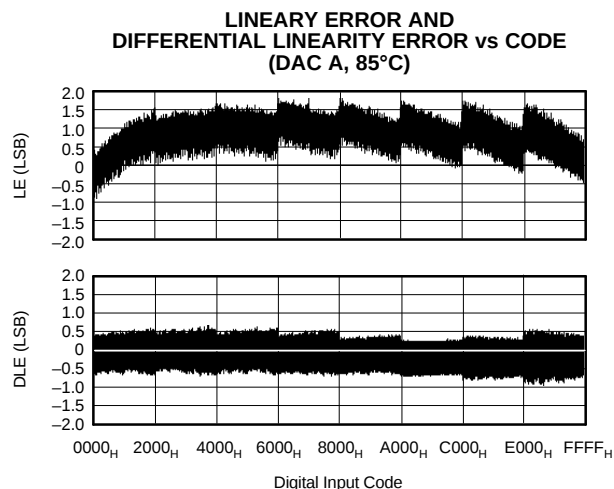


Figure 5.

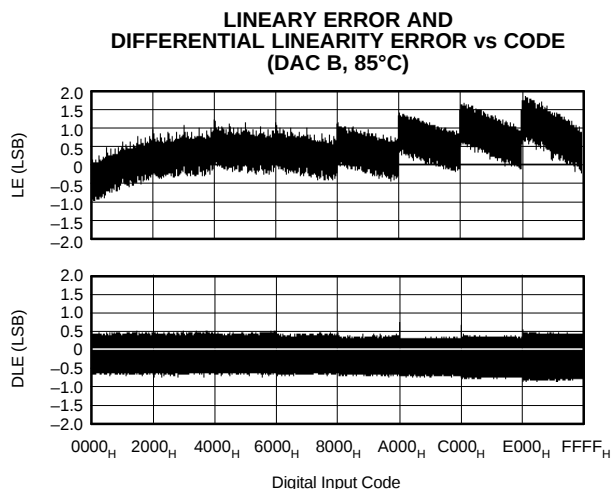


Figure 6.

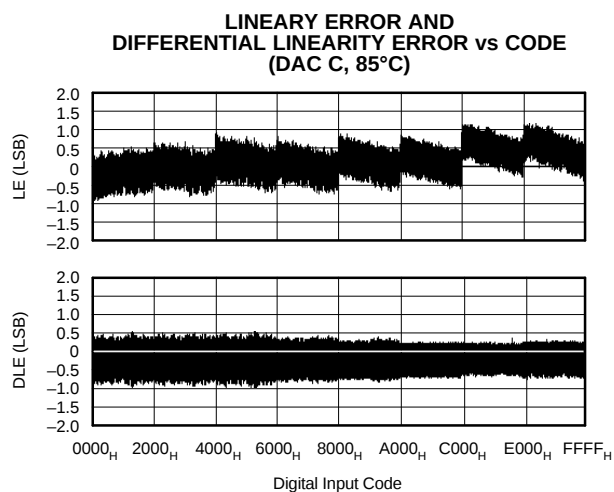


Figure 7.

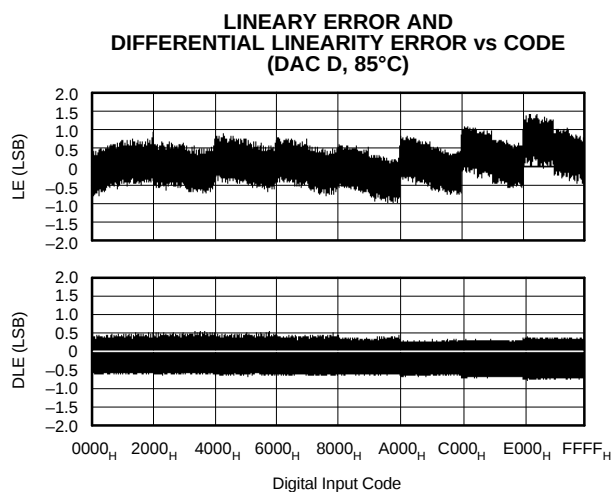


Figure 8.

# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0$ V (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{REFH} = 2.5$  V,  $V_{REFL} = 0$  V, representative unit, unless otherwise specified.

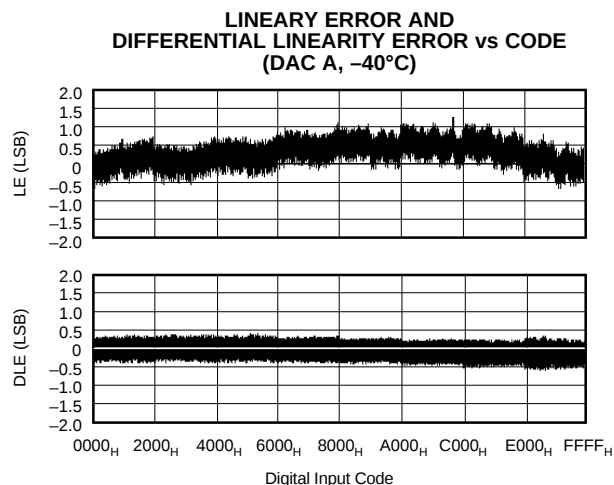


Figure 9.

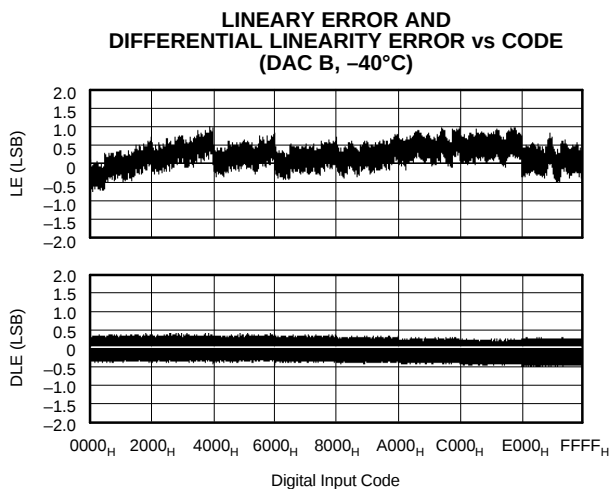


Figure 10.

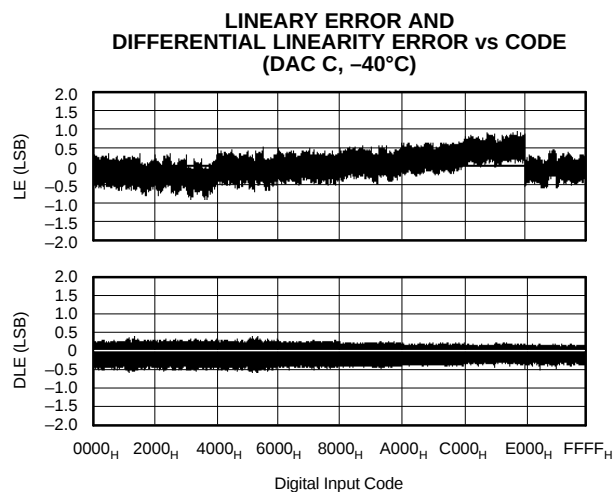


Figure 11.

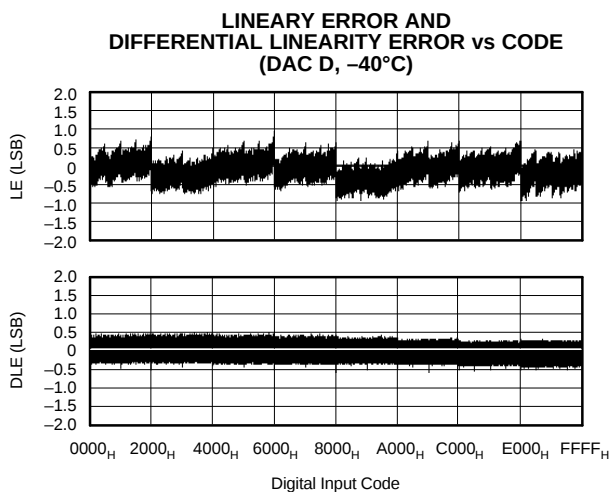


Figure 12.

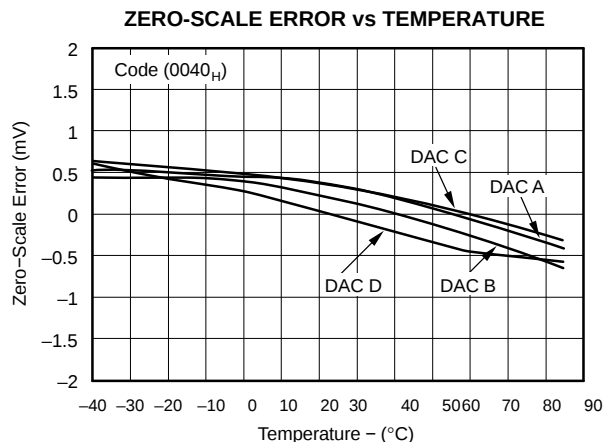


Figure 13.

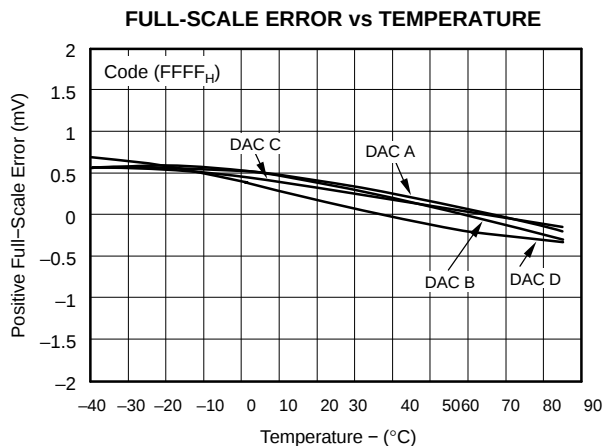


Figure 14.

**TYPICAL PERFORMANCE CURVES:  $V_{SS} = 0$  V (continued)**

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{REFH} = 2.5$  V,  $V_{REFL} = 0$  V, representative unit, unless otherwise specified.

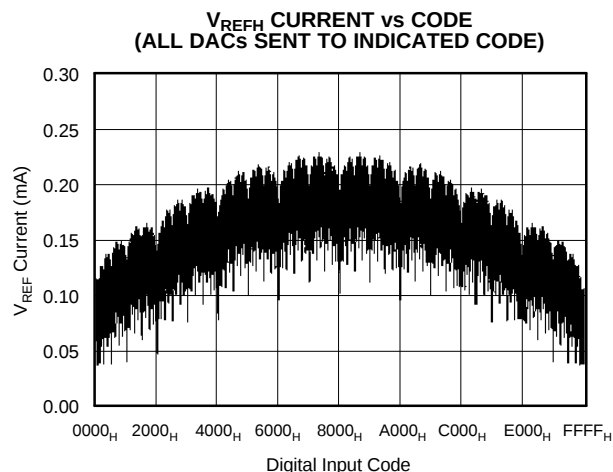


Figure 15.

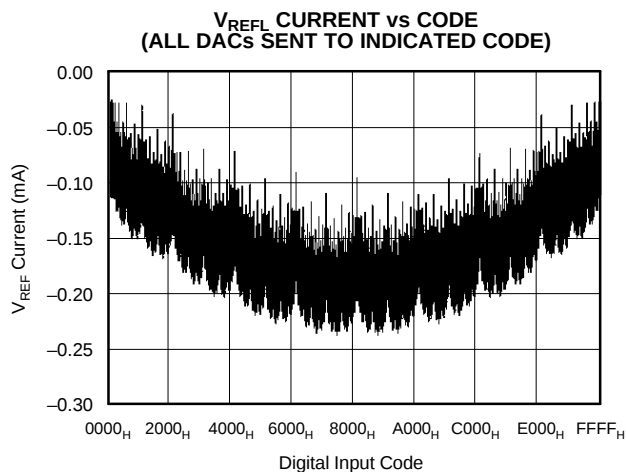


Figure 16.

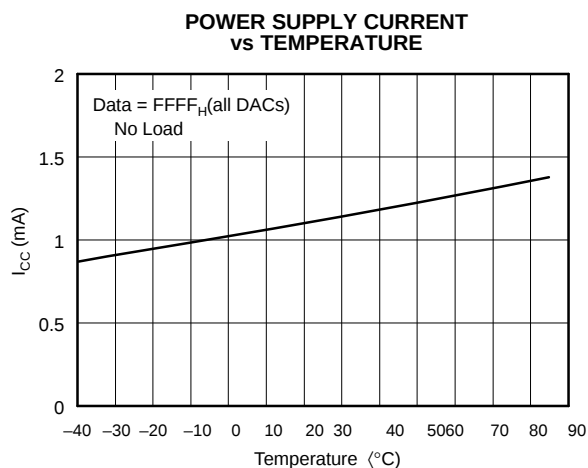


Figure 17.

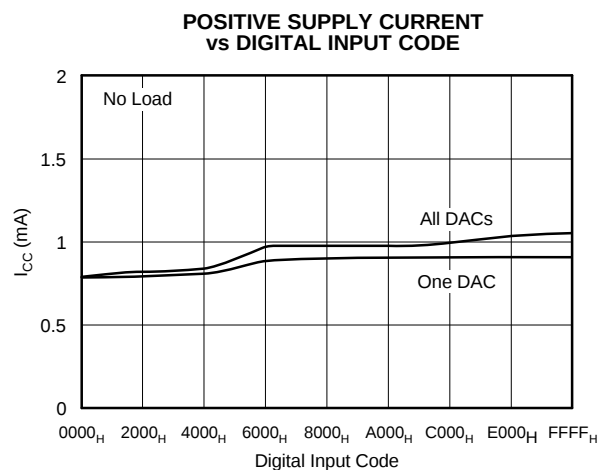


Figure 18.

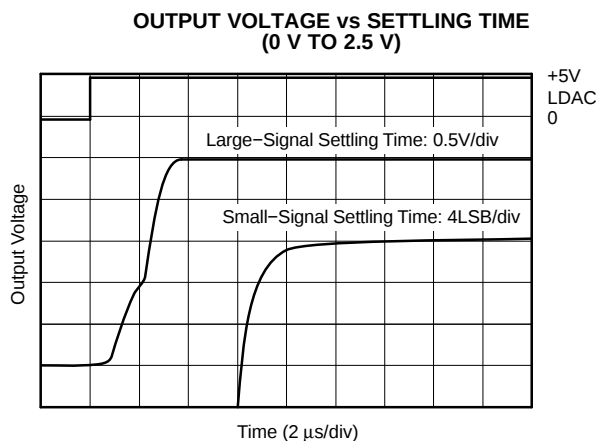


Figure 19.

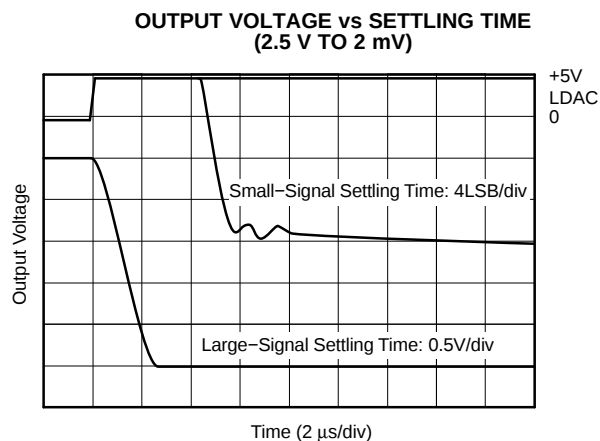


Figure 20.

# TYPICAL PERFORMANCE CURVES: $V_{SS} = 0$ V (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5$  V,  $V_{REFH} = 2.5$  V,  $V_{REFL} = 0$  V, representative unit, unless otherwise specified.

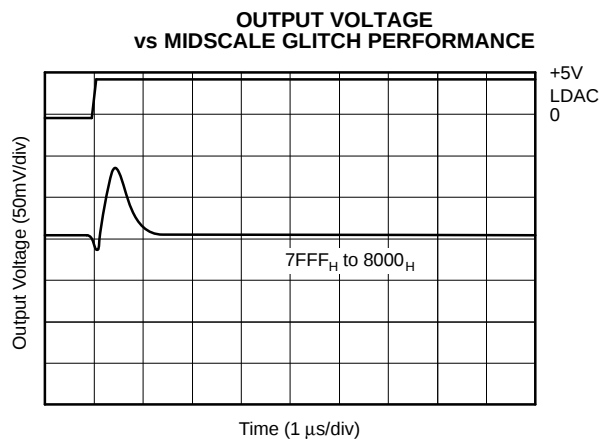


Figure 21.

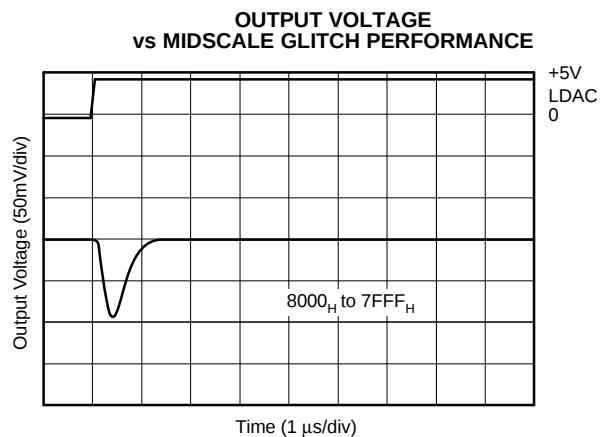


Figure 22.

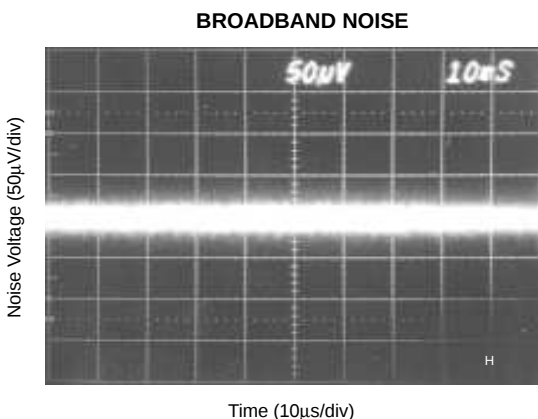


Figure 23.

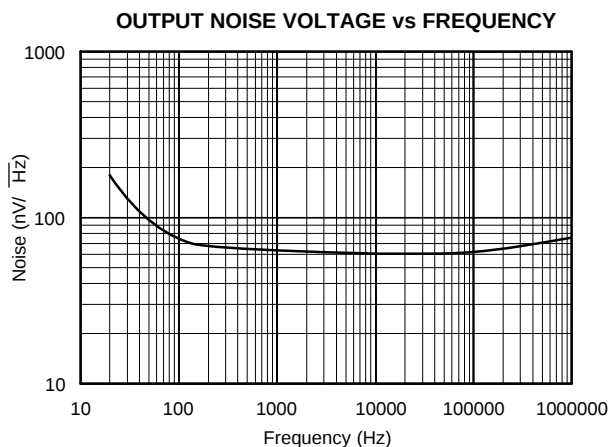


Figure 24.

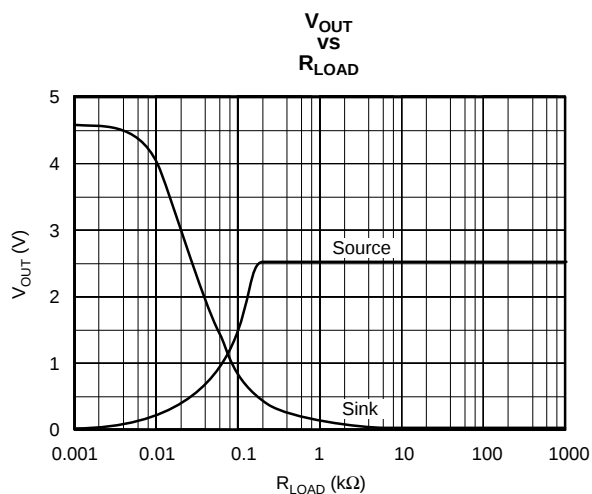


Figure 25.

### TYPICAL PERFORMANCE CURVES: $V_{SS} = -5\text{ V}$

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ ,  $V_{REFL} = 0\text{ V}$ , representative unit, unless otherwise specified.

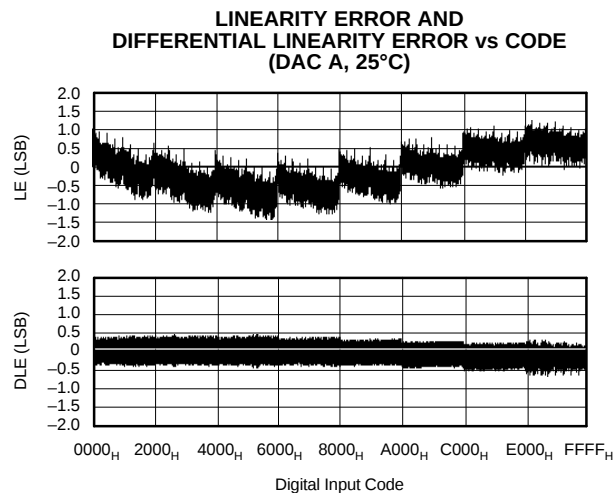


Figure 26.

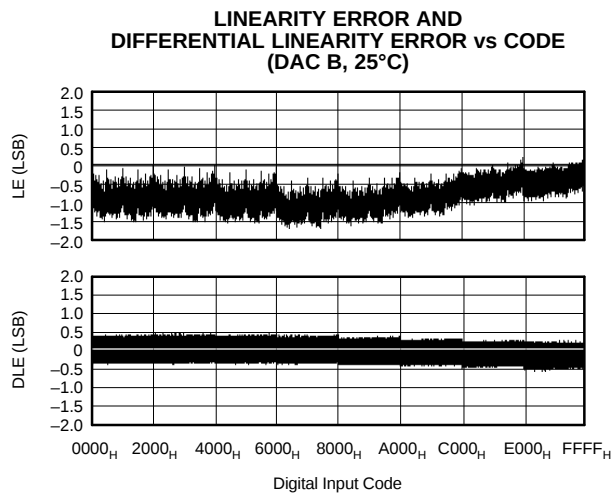


Figure 27.

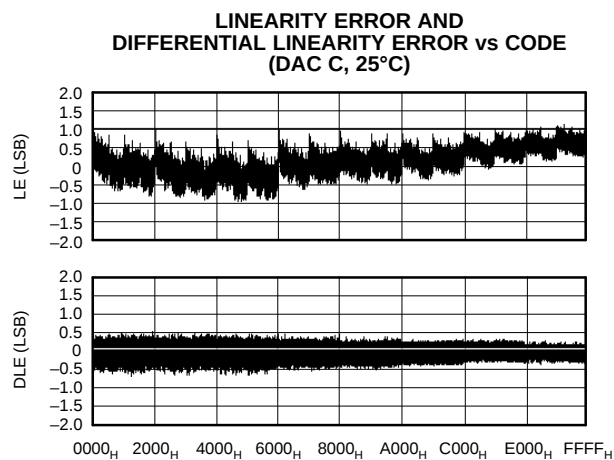


Figure 28.

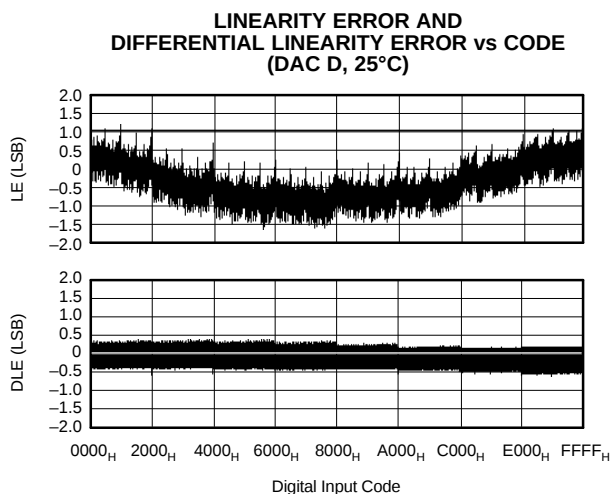


Figure 29.

# TYPICAL PERFORMANCE CURVES: $V_{SS} = -5\text{ V}$ (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ ,  $V_{REFL} = 0\text{ V}$ , representative unit, unless otherwise specified.

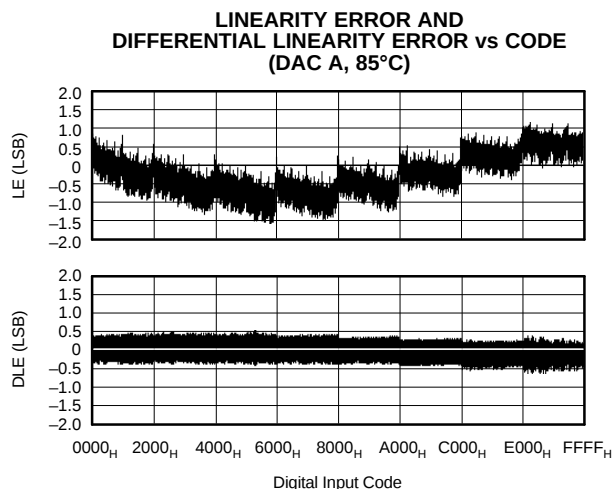


Figure 30.

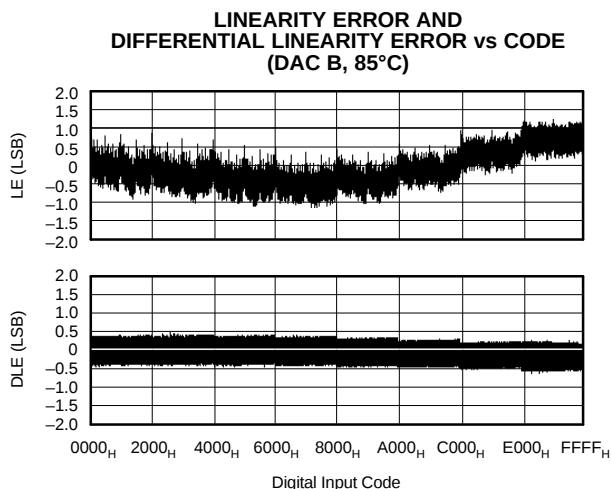


Figure 31.

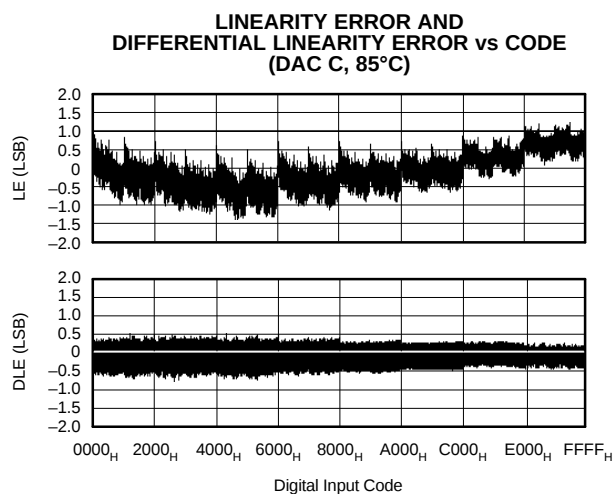


Figure 32.

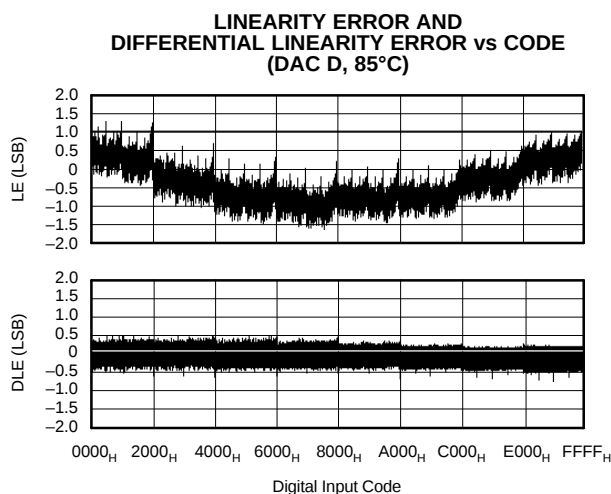


Figure 33.

### TYPICAL PERFORMANCE CURVES: $V_{SS} = -5\text{ V}$ (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ ,  $V_{REFL} = 0\text{ V}$ , representative unit, unless otherwise specified.

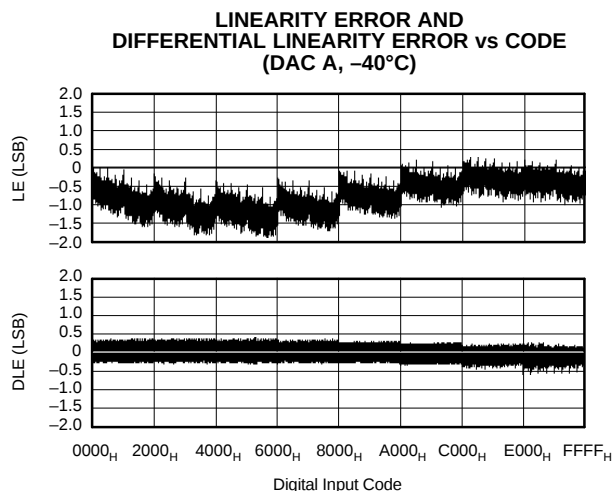


Figure 34.

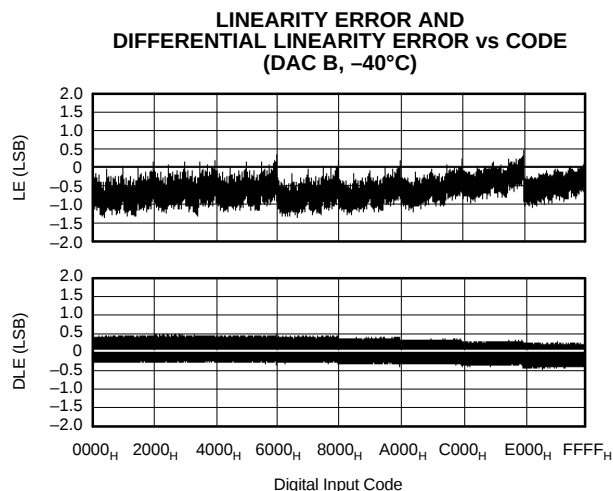


Figure 35.

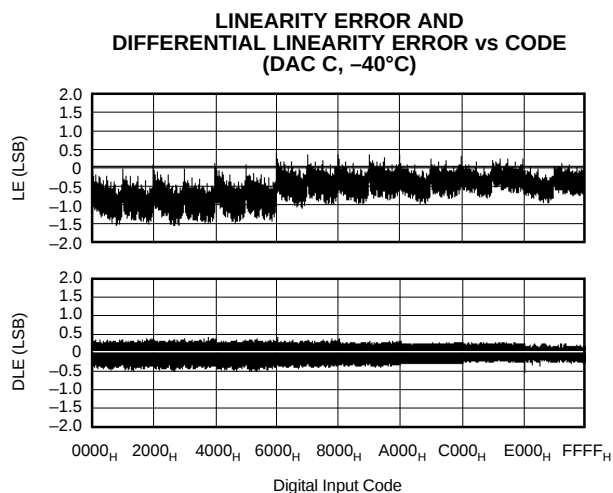


Figure 36.


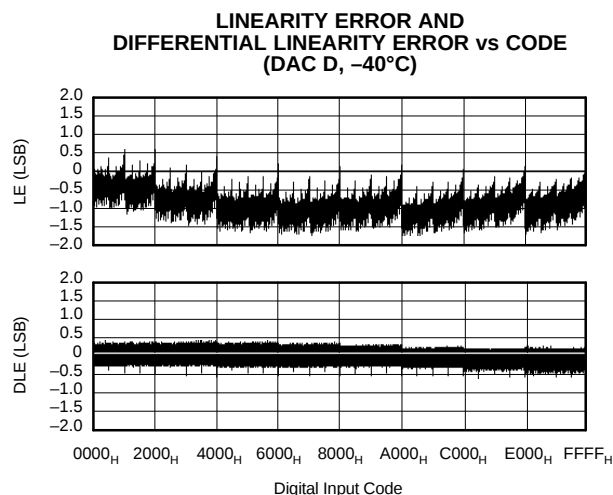



Figure 37.

**TYPICAL PERFORMANCE CURVES:  $V_{SS} = -5\text{ V}$  (continued)**


At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ ,  $V_{REFL} = 0\text{ V}$ , representative unit, unless otherwise specified.

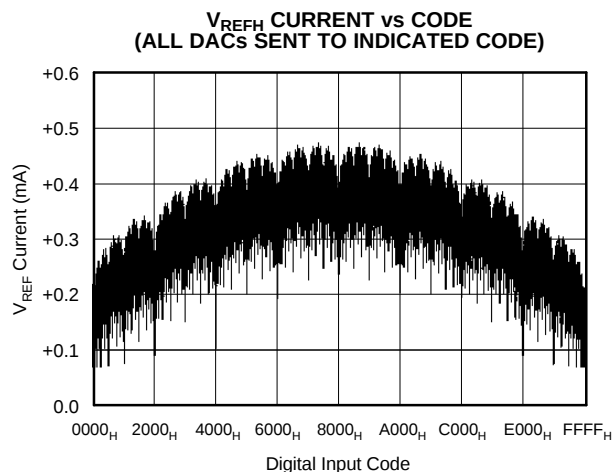


**Figure 38.**

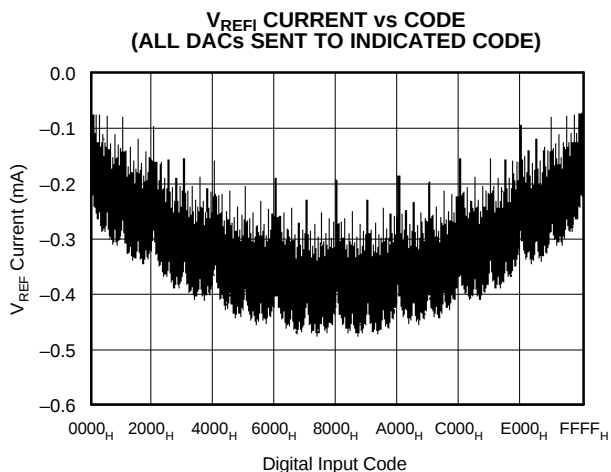


**Figure 39.**

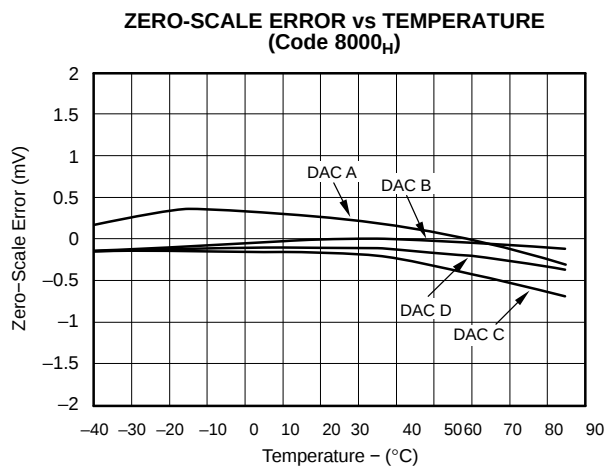


**Figure 40.**

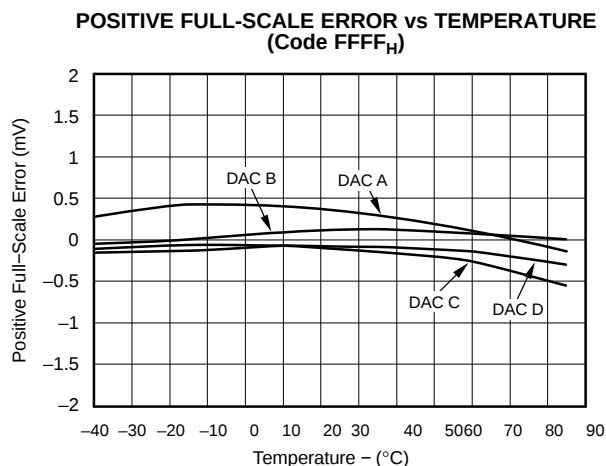

**Figure 41.**

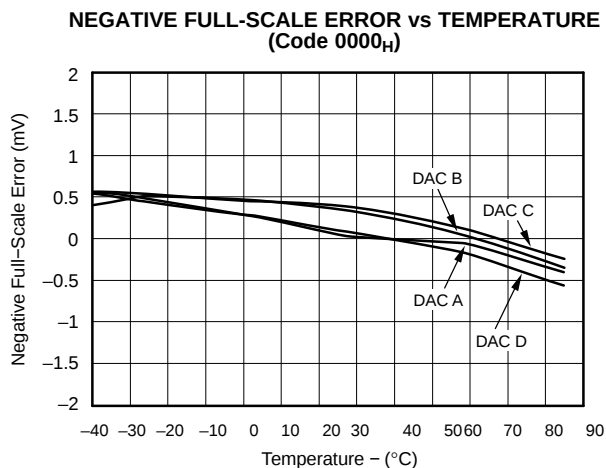

**Figure 42.**

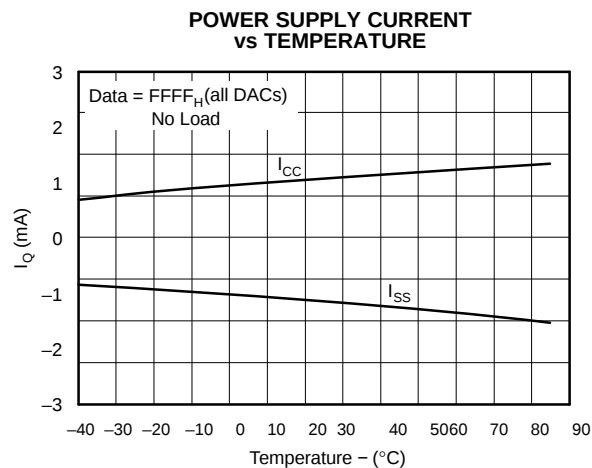

**Figure 43.**

### TYPICAL PERFORMANCE CURVES: $V_{SS} = -5\text{ V}$ (continued)

At  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = V_{CC} = 5\text{ V}$ ,  $V_{REFH} = 2.5\text{ V}$ ,  $V_{REFL} = 0\text{ V}$ , representative unit, unless otherwise specified.

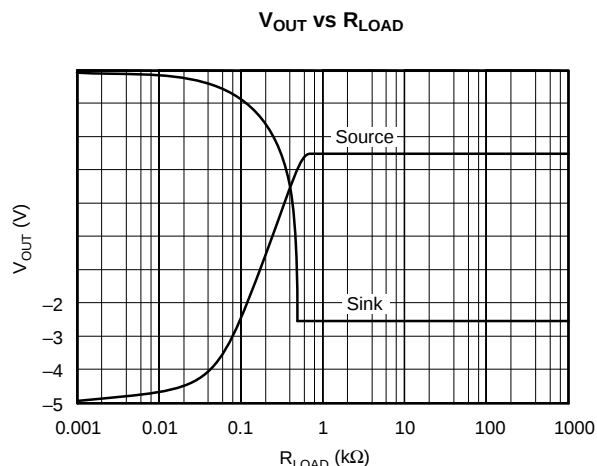


Figure 44.

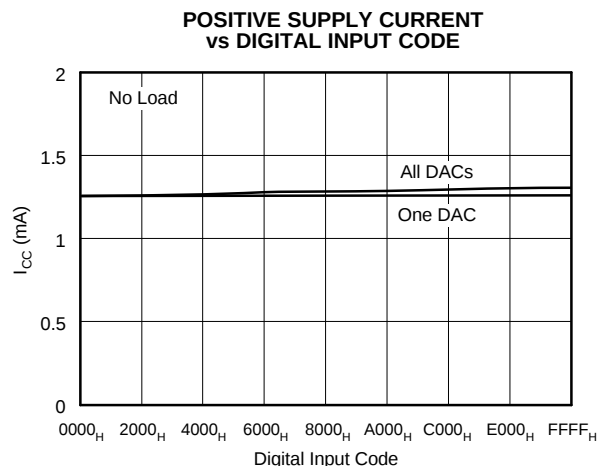


Figure 45.

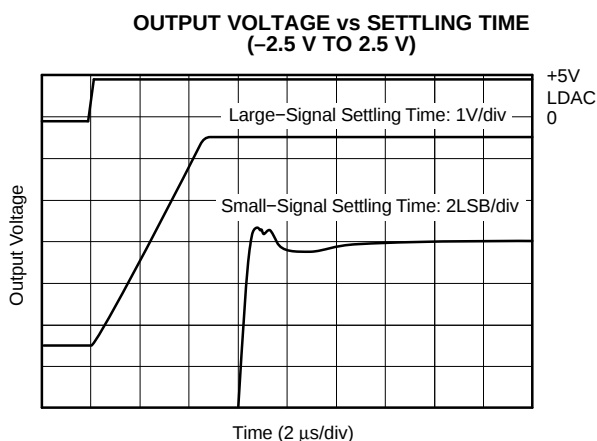


Figure 46.

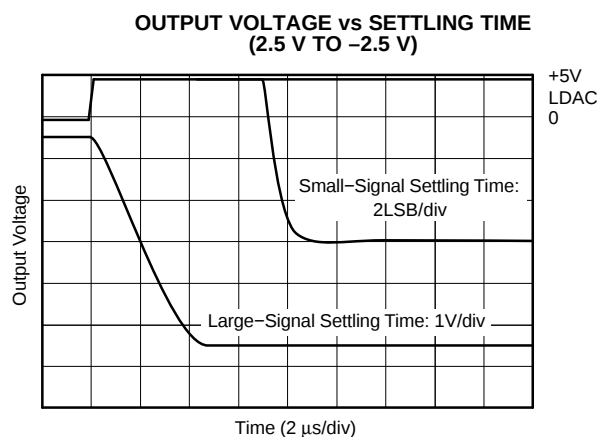


Figure 47.


## THEORY OF OPERATION

The DAC7634 is a quad voltage output, 16-bit digital-to-analog converter (DAC). The architecture is an R-2R ladder configuration with the three MSBs segmented, followed by an operational amplifier that serves as a buffer. Each DAC has its own R-2R ladder network, segmented MSBs, and output operational amplifier, as shown in Figure 48. The minimum voltage output (zero-scale) and maximum voltage output (full-scale) are set by the external voltage references ( $V_{REFL}$  and  $V_{REFH}$ , respectively).

The digital input is a 24-bit serial word that contains a 2-bit address code for selecting one of four DACs, a quick load bit, five unused bits, and the 16-bit DAC code (MSB first). The converters can be powered from either a single 5-V supply or a dual  $\pm 5\text{-V}$  supply. The device offers a reset function which immediately sets all DAC output voltages and DAC registers to mid-scale code  $8000_H$  or to zero-scale, code  $0000_H$ . See Figure 49 and Figure 50 for the basic operation of the DAC7634.

[illegible]

### Figure 49. Basic Single-Supply Operation of the DAC7634

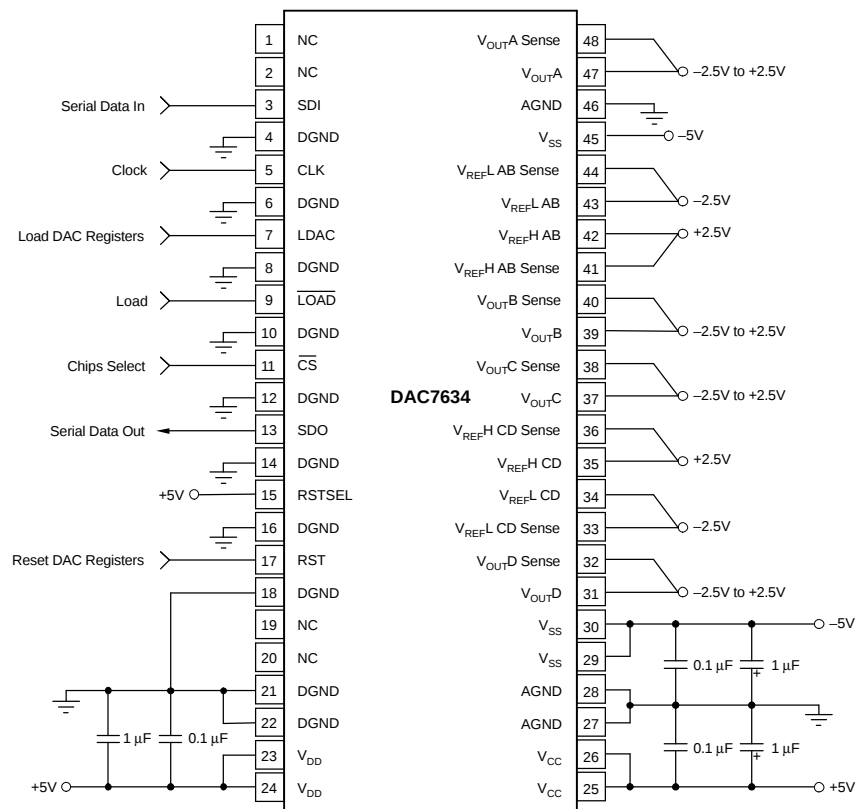

NC = No Connection

**Figure 50. Basic Dual-Supply Operation of the DAC7634**


## ANALOG OUTPUTS

When  $V_{SS} = -5V$  (dual supply operation), the output amplifier can swing to within 2.25 V of the supply rails, specified over the  $-40^{\circ}C$  to  $85^{\circ}C$  temperature range. When  $V_{SS} = 0V$  (single-supply operation), and with  $R_{LOAD}$  also connected to ground, the output can swing to ground. Care must also be taken when measuring the zero-scale error when  $V_{SS} = 0V$ . Because the output voltage cannot swing below ground, the output voltage may not change for the first few digital input codes (0000<sub>H</sub>, 0001<sub>H</sub>, 0002<sub>H</sub>, etc.) if the output amplifier has a negative offset. At the negative limit of  $-2mV$ , the first specified output starts at code 0040<sub>H</sub>.

Due to the high accuracy of these D/A converters, system design problems such as grounding and contact resistance become important. A 16-bit

converter with a 2.5 V full-scale range has a 1-LSB value of 38  $\mu V$ . With a load current of 1 mA, series wiring and connector resistance of only 40 m $\Omega$  ( $R_{W2}$ ) causes a voltage drop of 40  $\mu V$ , as shown in [Figure 51](#). To understand what this means in terms of a system layout, the resistivity of a typical 1-ounce copper-clad printed-circuit board is 1.2 m $\Omega$  per square. For a 1-mA load, a 10-mil wide printed-circuit conductor 600 mil long results in a voltage drop of 30  $\mu V$ .

The DAC7634 offers a force and sense output configuration for the high open-loop gain output amplifier. This feature allows the loop around the output amplifier to be closed at the load (as shown in [Figure 51](#)), thus ensuring an accurate output voltage.

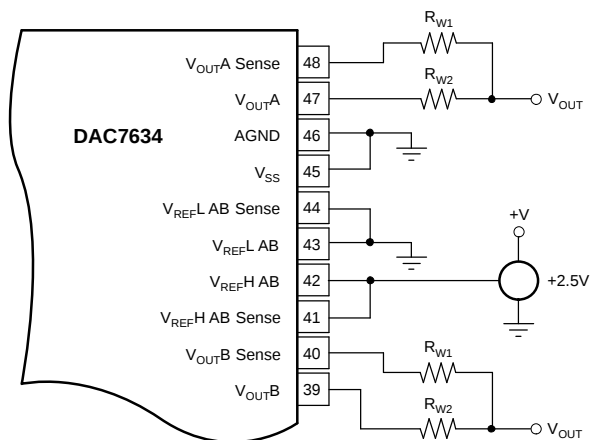


**Figure 51. Analog Output Closed-Loop Configuration(1/2 DAC7634)**  
( $R_W$  Represents Wiring Resistances)

## REFERENCE INPUTS


The reference inputs,  $V_{REF-L}$  and  $V_{REF-H}$ , can be any voltage between  $V_{SS} + 2.5\text{ V}$  and  $V_{CC} - 2.5\text{ V}$ , provided that  $V_{REF-H}$  is at least 1.25 V greater than

$V_{REF-L}$ . The minimum output of each DAC is equal to  $V_{REF-L}$  plus a small offset voltage (essentially, the offset of the output operational amp). The maximum output is equal to  $V_{REF-H}$  plus a similar offset voltage. Note that  $V_{SS}$  (the negative power supply) must either be connected to ground or must be in the range of  $-4.75\text{ V}$  to  $-5.25\text{ V}$ . The voltage on  $V_{SS}$  sets several bias points within the converter. If  $V_{SS}$  is not in one of these two configurations, the bias values may be in error and proper operation of the device is not specified.

The current into the  $V_{REF-H}$  input and out of  $V_{REF-L}$  depends on the DAC output voltages, and can vary from a few microamps to approximately 0.5 mA. The reference input appears as a varying load to the reference. If the reference can sink or source the required current, a reference buffer is not required. The DAC7634 features a reference drive and sense connection such that the internal errors caused by the changing reference current and the circuit impedances can be minimized. Figure 52 through Figure 60 show different reference configurations, and the effect on the linearity and differential linearity.

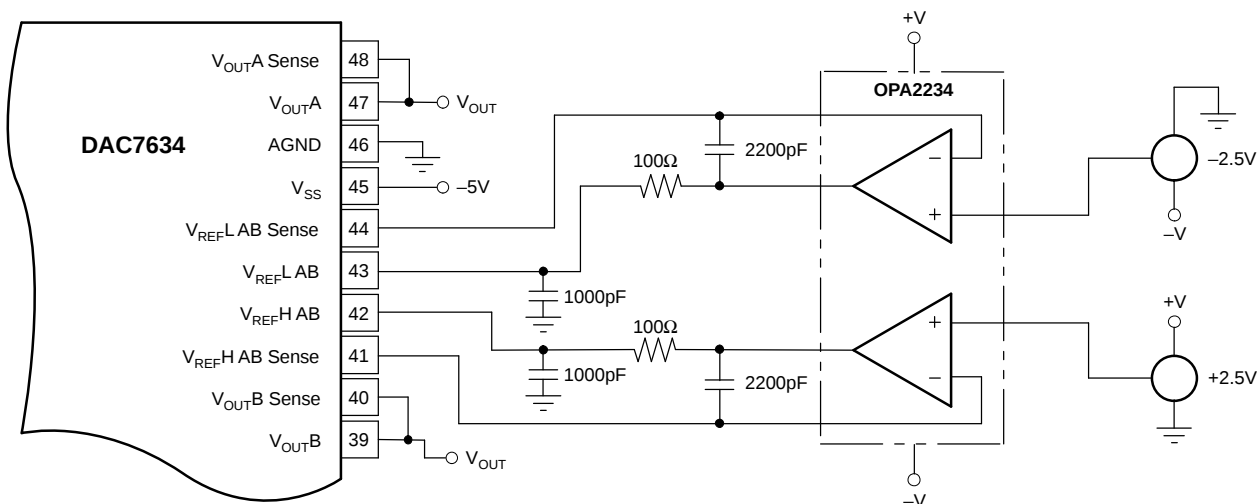


**Figure 52. Dual Supply Configuration-Buffered References, Used for Dual Supply Performance**

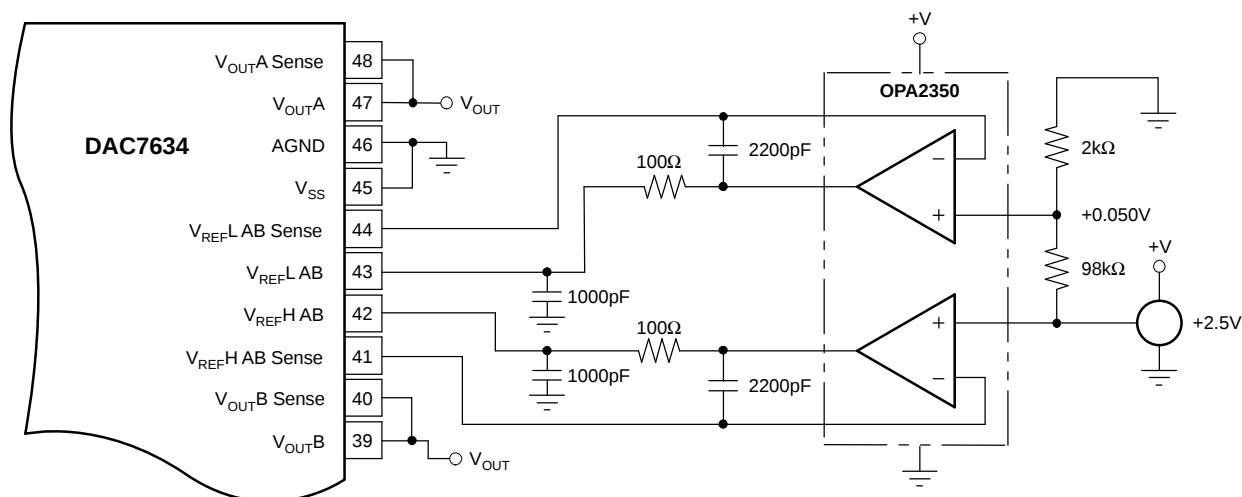


NOTE:  $V_{REFL}$  has been chosen to be 50 mV to allow for current sinking voltage drops across the 100- $\Omega$  resistor and the output stage of the buffer operational amplifier.


**Figure 53. Single-Supply Buffered Reference With a Reference Low of 50 mV (1/2 DAC7634)**

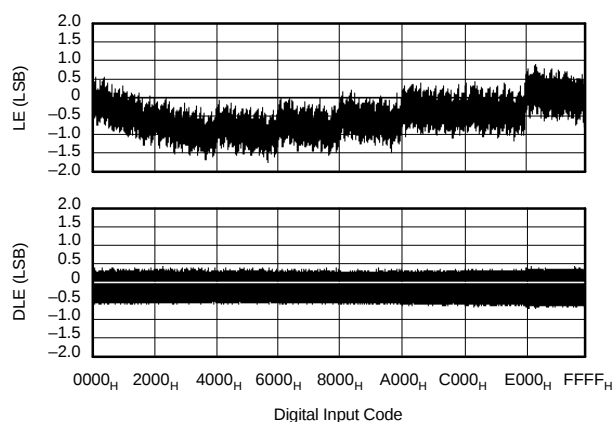

**Figure 54. Integral Linearity and Differential Linearity Error Curves for Figure 53**

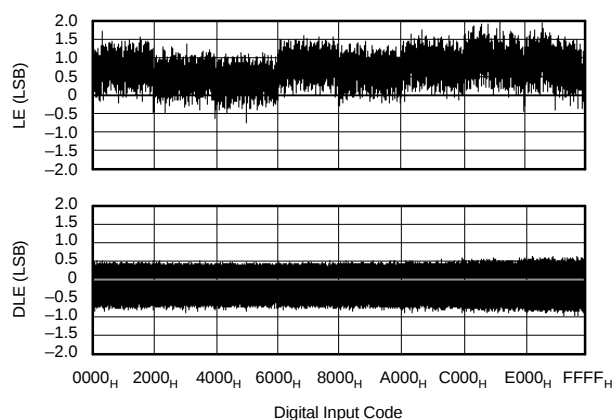

**Figure 55. Integral Linearity and Differential Linearity Error Curves for Figure 56**

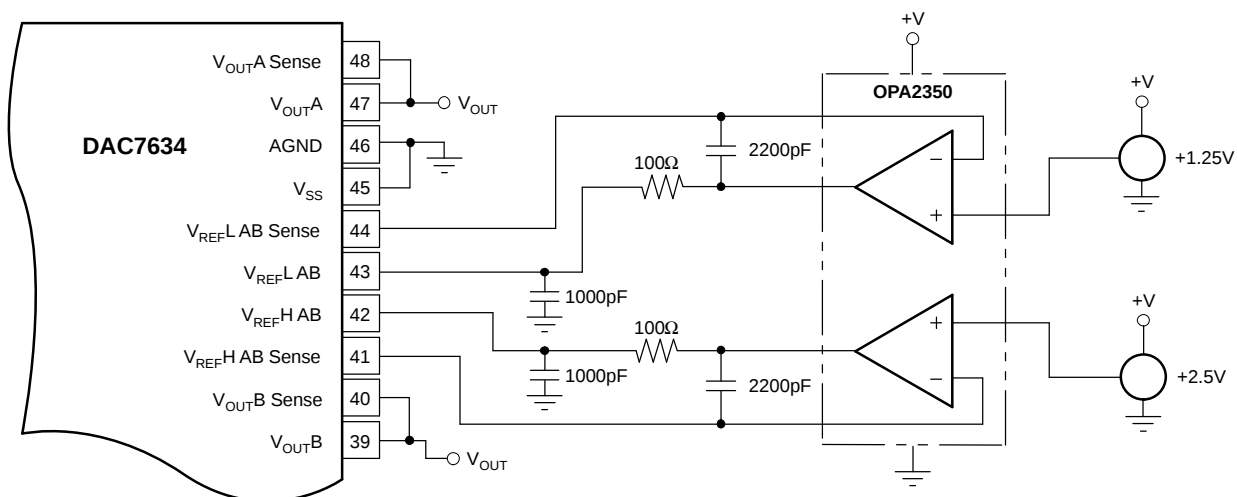

**Figure 56. Single-Supply Buffered Reference With  $V_{REFL} = 1.25$  V and  $V_{REFH} = 2.5$  V (1/2 DAC7634)**

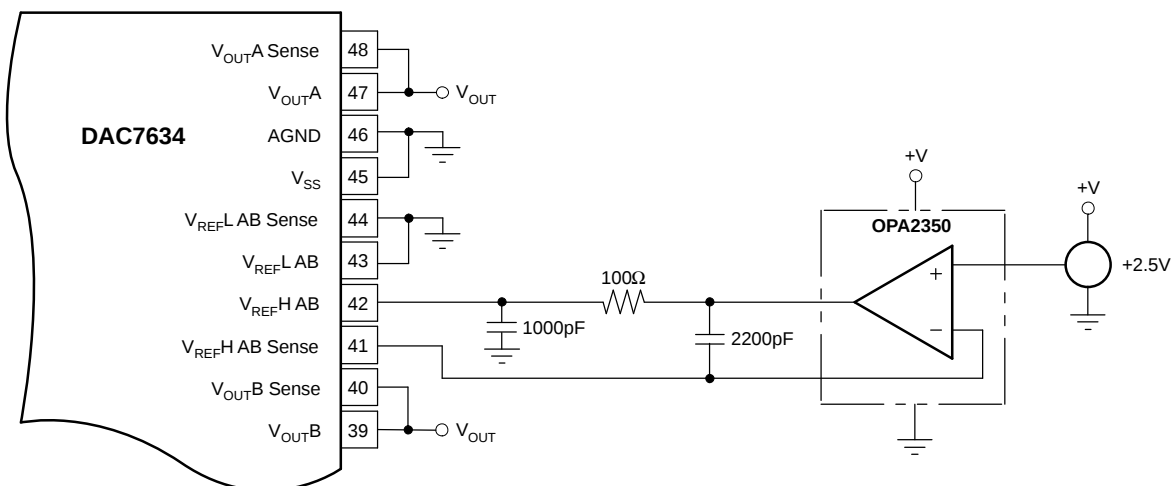


Figure 57. Single-Supply Buffered  $V_{REFH}$  (1/2 DAC7634)

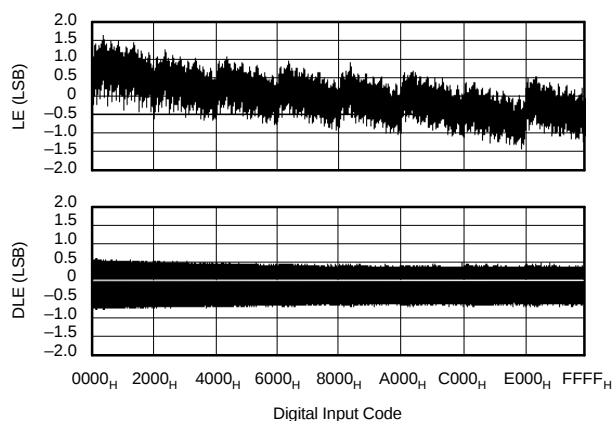


Figure 58. Linearity and Differential Linearity Error Curves for Figure 57

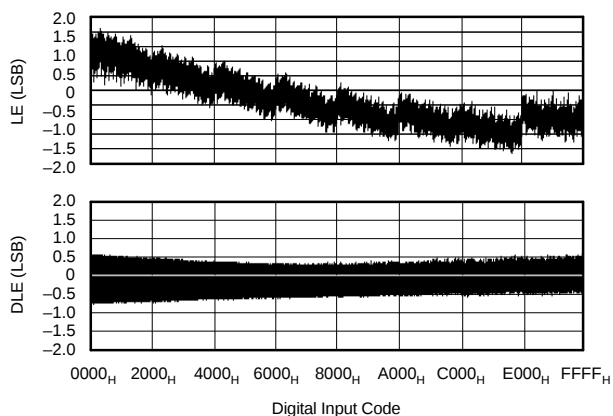


Figure 59. Linearity and Differential Linearity Error Curves for Figure 60

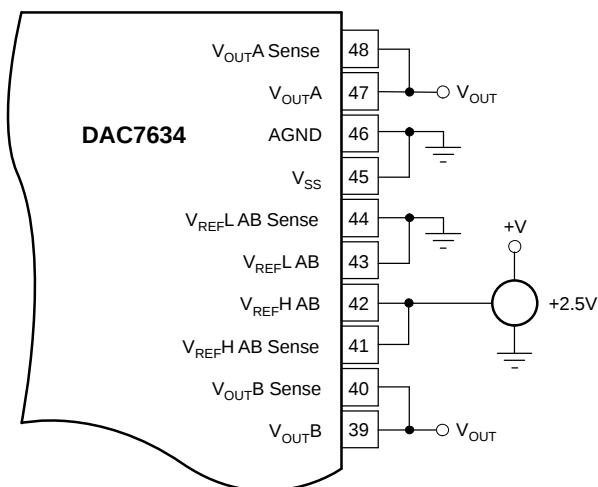


Figure 60. Low Cost Single-Supply Configuration

## DIGITAL INTERFACE

Table 1 shows the basic control logic for the DAC7634. The interface consists of a signal data clock (CLK) input, serial data (SDI), DAC input register load control signal ( $\overline{\text{LOAD}}$ ), and DAC register load control signal (LDAC). In addition, a chip select ( $\overline{\text{CS}}$ ) input is available to enable serial communication when there are multiple serial devices. An asynchronous reset (RST) input, by the rising edge, is provided to simplify start-up conditions, periodic resets, or emergency resets to a known state, depending on the status of the reset select (RSTSEL) signal.

The DAC code, quick load control, and address are provided via a 24-bit serial interface (see Figure 15). The first two bits select the input register that is updated when  $\overline{\text{LOAD}}$  goes LOW. The third bit is a *Quick Load* bit such that if HIGH, the code in the shift register is loaded into ALL DAC's input register when  $\overline{\text{LOAD}}$  signal goes LOW. If the *Quick Load* bit is LOW, the content of shift register is loaded only to the DAC input register that is addressed. The *Quick Load* bit is followed by five unused bits. The last sixteen bits (MSB first) are the DAC code.

## SERIAL DATA INPUT

| B23 | B22 | B21           | B20 | B19 | B18 | B17 | B16 | B15 | B14 | B13 | B12 | B11 | B10 | B9 | B8 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
|-----|-----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|----|----|----|----|
| A1  | A0  | QUICK<br>LOAD | X   | X   | X   | X   | X   | D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |

Table 1. DAC7634 Logic Truth Table<sup>(1)</sup>

| A1 | A0 | $\overline{\text{CS}}$ | RST | RSTSEL | LDAC | $\overline{\text{LOAD}}$ | INPUT<br>REGISTER | DAC<br>REGISTER   | MODE              | DAC |
|----|----|------------------------|-----|--------|------|--------------------------|-------------------|-------------------|-------------------|-----|
| L  | L  | L                      | H   | X      | X    | L                        | Write             | Hold              | Write Input       | A   |
| L  | H  | L                      | H   | X      | X    | L                        | Write             | Hold              | Write Input       | B   |
| H  | L  | L                      | H   | X      | X    | L                        | Write             | Hold              | Write Input       | C   |
| H  | H  | L                      | H   | X      | X    | L                        | Write             | Hold              | Write Input       | D   |
| X  | X  | H                      | H   | X      | ↑    | H                        | Hold              | Write             | Update            | All |
| X  | X  | H                      | H   | X      | H    | H                        | Hold              | Hold              | Hold              | All |
| X  | X  | X                      | ↑   | L      | X    | X                        | Reset to Zero     | Reset to Zero     | Reset to Zero     | All |
| X  | X  | X                      | ↑   | H      | X    | X                        | Reset to Midscale | Reset to Midscale | Reset to Midscale | All |

- (1) If the DAC7634 is the only device on the serial bus, the  $\overline{\text{CS}}$  pin can be connected to DGND permanently, which enables the shift register all the time. In this case, only the CLK operates the serial shift register and all other functions listed in Table 1 should be followed as shown. The DAC updates on the rising edge of LDAC.

The internal DAC register is edge-triggered and not level-triggered. When the LDAC signal is transitioned from LOW to HIGH, the digital word currently in the DAC input register is latched. The first set of registers (the DAC input registers) are level-triggered via the  $\overline{\text{LOAD}}$  signal. This double-buffered architecture has been designed so that new data can be entered for each DAC without disturbing the analog outputs. When the new data has been entered into the device, all of the DAC outputs can be updated simultaneously by the rising edge of LDAC. Additionally, it allows the DAC input registers to be written to at any point, then the DAC output voltages can be synchronously changed via a trigger signal (LDAC).

Note that  $\overline{\text{CS}}$  and CLK are combined with an OR

gate, which controls the serial-to-parallel shift register. These two inputs are completely interchangeable. In addition, care must be taken with the state of CLK when  $\overline{\text{CS}}$  rises at the end of a serial transfer. If CLK is LOW when  $\overline{\text{CS}}$  rises, the OR gate provides a rising edge to the shift register, shifting the internal data one additional bit. The result will be incorrect data and possible selection of the wrong input register(s). If both  $\overline{\text{CS}}$  and CLK are used,  $\overline{\text{CS}}$  should rise only when CLK is HIGH. If not, then either  $\overline{\text{CS}}$  or CLK can be used to operate the shift register. See Table 2 for more information.

## SERIAL-DATA OUTPUT

Table 2. Serial Shift Register Truth Table

| $\overline{CS}^{(1)}$ | CLK <sup>(1)</sup> | $\overline{LOAD}$ | RST              | SERIAL SHIFT REGISTER |
|-----------------------|--------------------|-------------------|------------------|-----------------------|
| H <sup>(2)</sup>      | X <sup>(3)</sup>   | H                 | H                | No Change             |
| L <sup>(4)</sup>      | L                  | H                 | H                | No Change             |
| L                     | ↑ <sup>(5)</sup>   | H                 | H                | Advanced One Bit      |
| ↑                     | L                  | H                 | H                | Advanced One Bit      |
| H <sup>(6)</sup>      | X                  | L <sup>(7)</sup>  | H                | No Change             |
| H <sup>(6)</sup>      | X                  | H                 | ↑ <sup>(8)</sup> | No Change             |

- (1)  $\overline{CS}$  and CLK are interchangeable.
- (2) H = Logic HIGH
- (3) X = Don't Care
- (4) L = Logic LOW
- (5) Positive logic transition
- (6) A HIGH value is suggested in order to avoid a *false clock* from advancing the shift register and changing the shift register.
- (7) If data is clocked into the serial register while  $\overline{LOAD}$  is LOW, the selected DAC register changes as the shift register bits *flow* through A1 and A0. This corrupts the data in each DAC register that has been erroneously selected.
- (8) Rising edge of RST causes no change in the contents of the serial shift register.

The Serial-Data Output (SDO) is the internal shift register's output. For DAC7634, the SDO is a driven output and does not require an external pull-up. Any number of DAC7634s can be daisy-chained by connecting the SDO pin of one device to the SDI pin of the following device in the chain, as shown in [Figure 61](#).

### DIGITAL TIMING

[Figure 62](#) and [Table 3](#) provide detailed timing for the digital interface of the DAC7634.

### DIGITAL INPUT CODING

The DAC7634 input data is in straight binary format. The output voltage is given by [Equation 1](#).

Where N is the digital input code. This equation does not include the effects of offset (zero-scale) or gain (full-scale) errors.


$$V_{OUT} = V_{REF}^L + \frac{(V_{REF}^H - V_{REF}^L) \times N}{65,536} \quad (1)$$

### DIGITALLY-PROGRAMMABLE CURRENT


### SOURCE

The DAC7634 offers a unique set of features that allows a wide range of flexibility in designing applications circuits such as programmable current sources. The DAC7634 offers both a differential reference input, as well as an open-loop configuration around the output amplifier. The open-loop configuration around the output amplifier allows a transistor to be placed within the loop to implement a digitally- programmable, unidirectional current source. The availability of a differential reference allows programmability for both the full-scale and zero-scale currents. The output current is calculated as:


$$I_{OUT} = \left[ \left( \frac{V_{REF}^H - V_{REF}^L}{R_{SENSE}} \right) \times \left( \frac{N}{65,536} \right) \right] + (V_{REF}^L / R_{SENSE}) \quad (2)$$

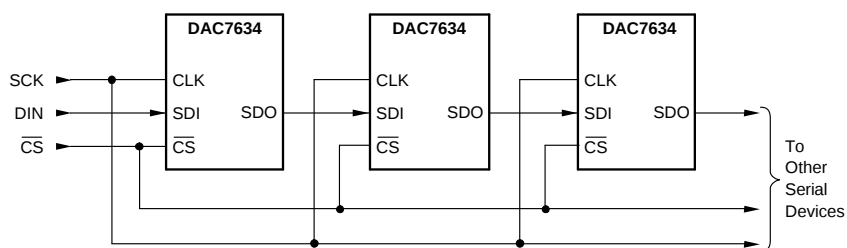


**Figure 61. Daisy-Chaining DAC7634**

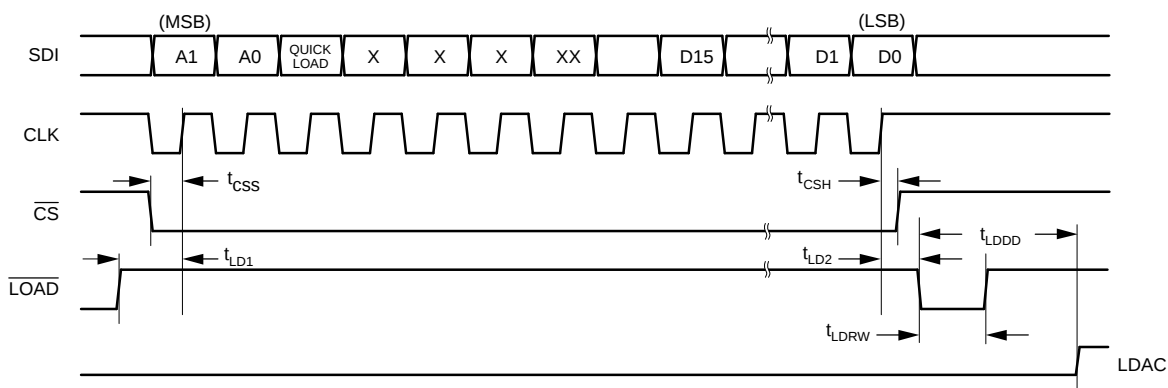

**Figure 62. Serial Interface Timing**

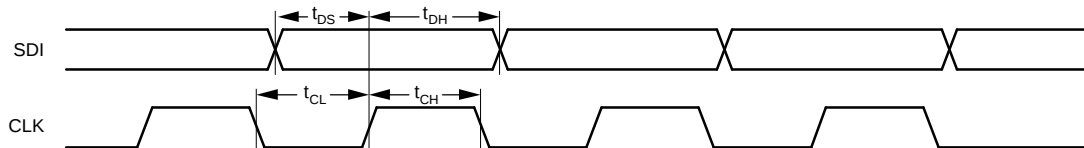

**Figure 63. Data and Clock Timing**

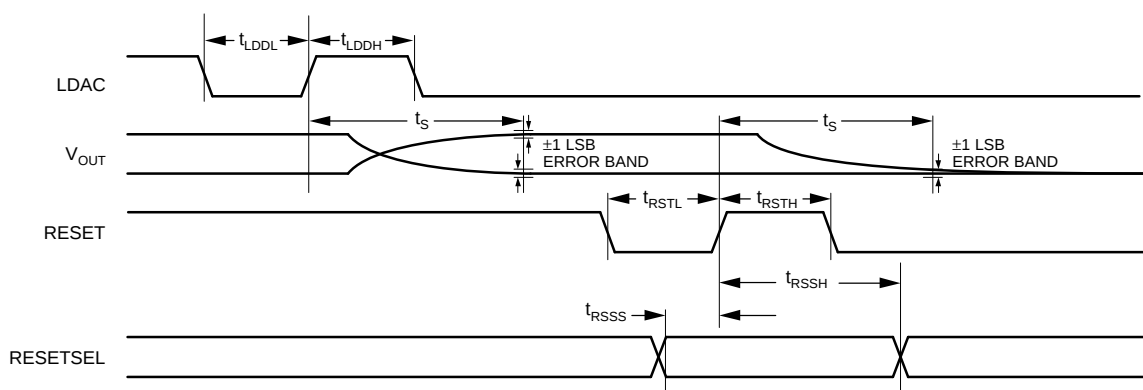

**Figure 64. Reset and Output Timing**

**Table 3. Timing Specifications ( $T_A = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ )**

| SYMBOL     | DESCRIPTION                            | MIN | UNITS         |
|------------|----------------------------------------|-----|---------------|
| $t_{DS}$   | Data Valid to CLK Rising               | 10  | ns            |
| $t_{DH}$   | Data Held Valid after CLK Rises        | 20  | ns            |
| $t_{CH}$   | CLK HIGH                               | 25  | ns            |
| $t_{CL}$   | CLK LOW                                | 25  | ns            |
| $t_{CSS}$  | $\overline{CS}$ LOW to CLK Rising      | 15  | ns            |
| $t_{CSH}$  | CLK HIGH to $\overline{CS}$ Rising     | 0   | ns            |
| $t_{LD1}$  | $\overline{LOAD}$ HIGH to CLK Rising   | 10  | ns            |
| $t_{LD2}$  | CLK Rising to $\overline{LOAD}$ LOW    | 30  | ns            |
| $t_{LDRW}$ | $\overline{LOAD}$ LOW Time             | 30  | ns            |
| $t_{LDDL}$ | LDAC LOW Time                          | 100 | ns            |
| $t_{LDDH}$ | LDAC HIGH Time                         | 150 | ns            |
| $t_{LDDD}$ | LDAC Rising from $\overline{LOAD}$ LOW | 40  | ns            |
| $t_{RSSS}$ | RESETSEL Valid to RESET HIGH           | 0   | ns            |
| $t_{RSSH}$ | RESET HIGH to RESETSEL Not Valid       | 100 | ns            |
| $t_{RSTL}$ | RESET LOW Time                         | 10  | ns            |
| $t_{RSTH}$ | RESET HIGH Time                        | 10  | ns            |
| $t_S$      | Settling Time                          | 10  | $\mu\text{s}$ |

Figure 65 shows a DAC7634 in a 4-mA to 20-mA current output configuration. The output current can be determined by Equation 3:

$$I_{OUT} = \left[ \left( \frac{2.5 \text{ V} - 0.5 \text{ V}}{125 \Omega} \right) \times \left( \frac{N}{65,536} \right) \right] + \left( \frac{0.5 \text{ V}}{125 \Omega} \right) \quad (3)$$

At full-scale, the output current is 16 mA, plus the 4 mA, for the zero current. At zero scale, the output current is the offset current of 4 mA ( $0.5 \text{ V}/125 \Omega$ ).

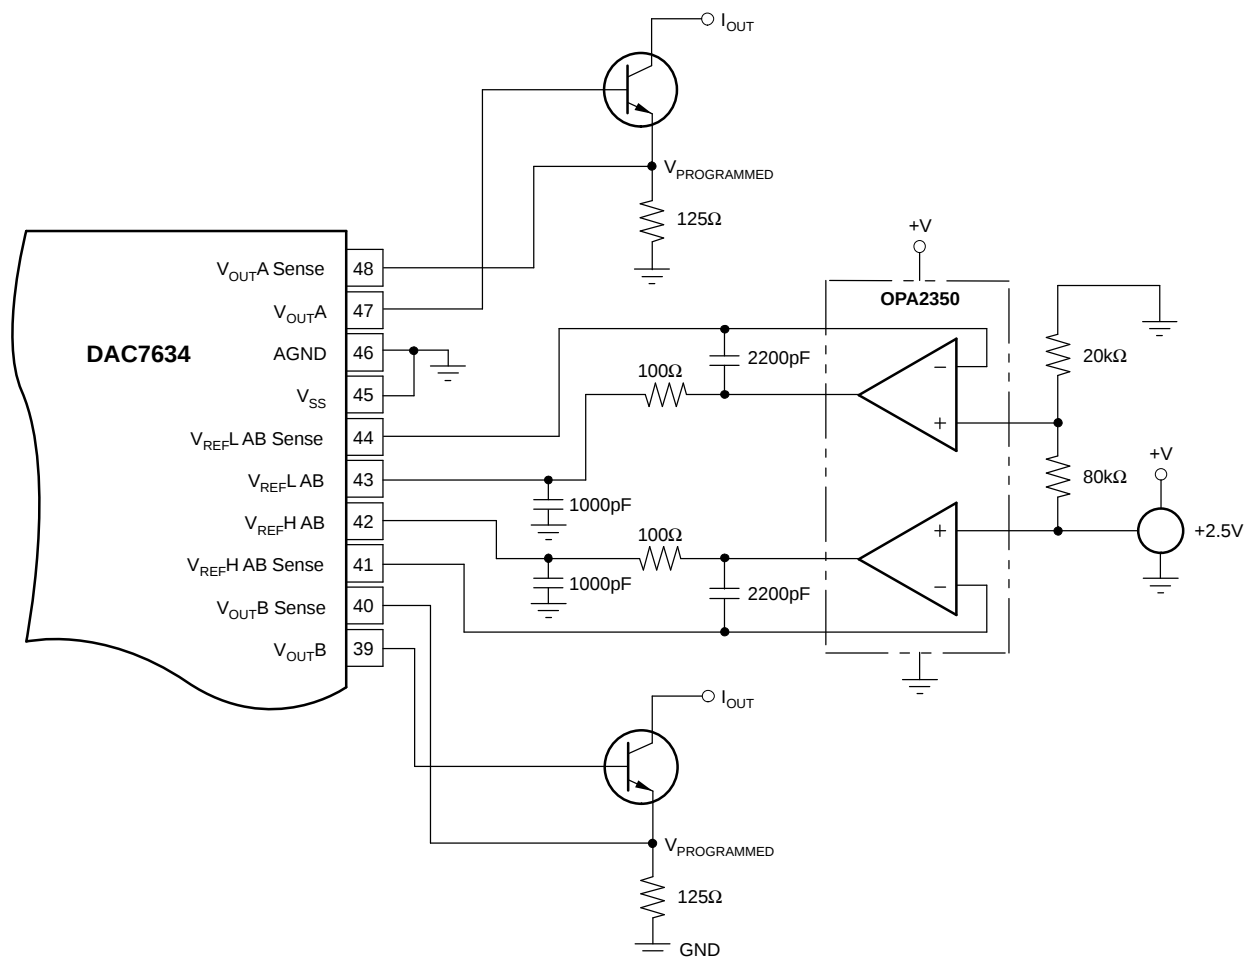


Figure 65. 4 mA to 20 mA Digitally Controlled Current Source (1/2 DAC7634)

## PACKAGING INFORMATION

| Orderable part number       | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">DAC7634E</a>    | Active        | Production           | SSOP (DL)   48 | 25   TUBE             | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E<br>B       |
| DAC7634E.A                  | Active        | Production           | SSOP (DL)   48 | 25   TUBE             | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E<br>B       |
| <a href="#">DAC7634E/1K</a> | Active        | Production           | SSOP (DL)   48 | 1000   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E<br>B       |
| DAC7634E/1K.A               | Active        | Production           | SSOP (DL)   48 | 1000   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E<br>B       |
| <a href="#">DAC7634EB</a>   | Active        | Production           | SSOP (DL)   48 | 25   TUBE             | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E            |
| DAC7634EB.A                 | Active        | Production           | SSOP (DL)   48 | 25   TUBE             | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E            |
| DAC7634EBG4                 | Active        | Production           | SSOP (DL)   48 | 25   TUBE             | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | DAC7634E            |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| DAC7634E/1K | SSOP         | DL              | 48   | 1000 | 330.0              | 32.4               | 11.35   | 16.2    | 3.1     | 16.0    | 32.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| DAC7634E/1K | SSOP         | DL              | 48   | 1000 | 356.0       | 356.0      | 53.0        |

## TUBE




\*All dimensions are nominal

| Device      | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| DAC7634E    | DL           | SSOP         | 48   | 25  | 473.7  | 14.24  | 5110   | 7.87   |
| DAC7634E.A  | DL           | SSOP         | 48   | 25  | 473.7  | 14.24  | 5110   | 7.87   |
| DAC7634EB   | DL           | SSOP         | 48   | 25  | 473.7  | 14.24  | 5110   | 7.87   |
| DAC7634EB.A | DL           | SSOP         | 48   | 25  | 473.7  | 14.24  | 5110   | 7.87   |
| DAC7634EBG4 | DL           | SSOP         | 48   | 25  | 473.7  | 14.24  | 5110   | 7.87   |

DL (R-PDSO-G48)

PLASTIC SMALL-OUTLINE PACKAGE

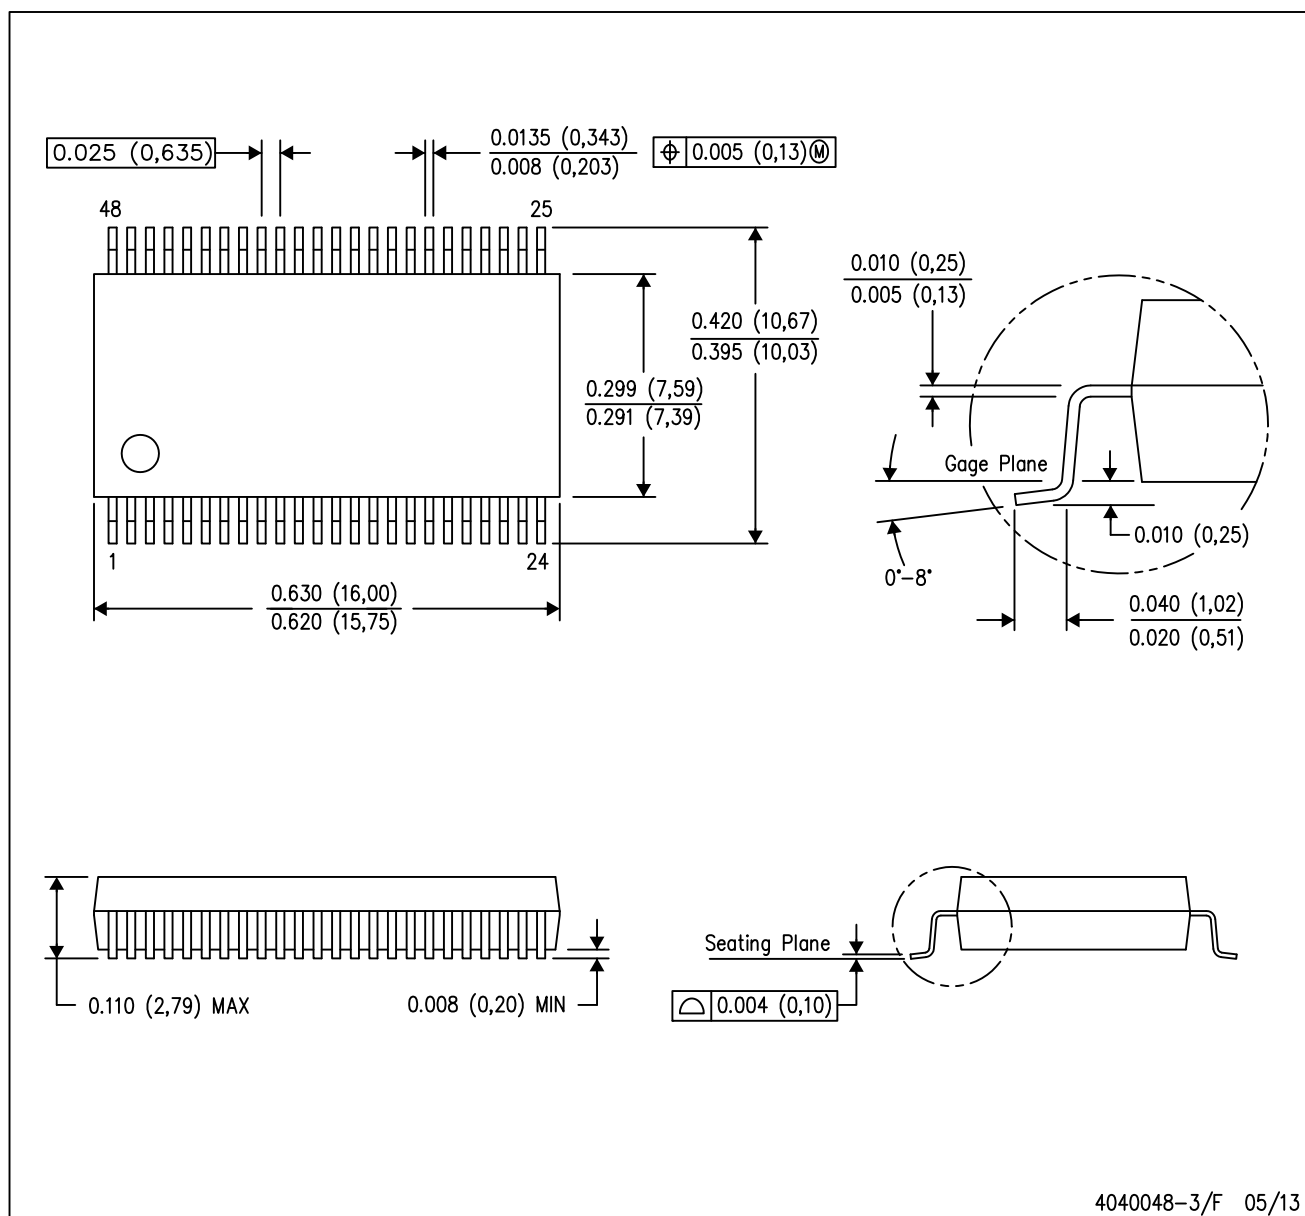

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - D. Falls within JEDEC MO-118

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated