

## HD3SS213 5.4Gbps DisplayPort 1.2a 2:1 和 1:2 差动开关

### 1 特性

- 符合 DisplayPort 1.2 电气标准
- 2:1 和 1:2 切换最高支持 5.4Gbps 的数据速率
- 支持 HPD 切换
- 支持 AUX 和 DDC 切换
- 3dB 差动带宽宽达 5.4GHz 以上
- 出色的动态特性 (2.7GHz 时) :
  - 串扰 = -50dB
  - 隔离 = -25dB
  - 插入损耗 = -1.5dB
  - 回损 = -13dB
  - 最大位间偏差 = 5ps
- $V_{DD}$  工作范围 : 3.3V±10%
- 封装选项 :
  - 5mm × 5mm, 50 引脚 nFBGA
- 输出使能 (OE) 引脚禁用开关以省电
- HD3SS213 < 10mW (待机功耗 < 30μW 此时, OE = L)

### 2 应用

- PC 和笔记本电脑
- 平板电脑
- 联网外设和打印机

### 3 说明


HD3SS213 器件是一款高速无源开关, 能够在应用中两个完整 DisplayPort 4 通道端口从两个源之一一切切换到一个目标位置。它还将一个源切换到两个接收器之一。对于 DisplayPort 应用, HD3SS213 支持 ZEQ 封装中辅助 (AUX)、显示数据通道 (DDC) 和热插拔检测 (HPD) 信号的切换。

一个典型应用是主板, 该主板包含两个需要驱动一个 DisplayPort 接收器的 GPU。GPU 由  $Dx\_SEL$  引脚选择。另一个应用是一个源需要在两个接收器之间切换, 例如一个侧面连接器和一个扩展坞连接器。此切换操作由  $Dx\_SEL$  和  $AUX\_SEL$  引脚控制。HD3SS213 在 -40°C 至 105°C 的完全工业温度范围内由一个电压为 3.3 V 的单电源供电运行。

#### 器件信息<sup>(1)</sup>

| 器件型号     | 封装         | 封装尺寸 (标称值)      |
|----------|------------|-----------------|
| HD3SS213 | nFBGA (50) | 5.00mm x 5.00mm |

(1) 要了解所有可用封装, 请见数据表末尾的可订购产品附录。

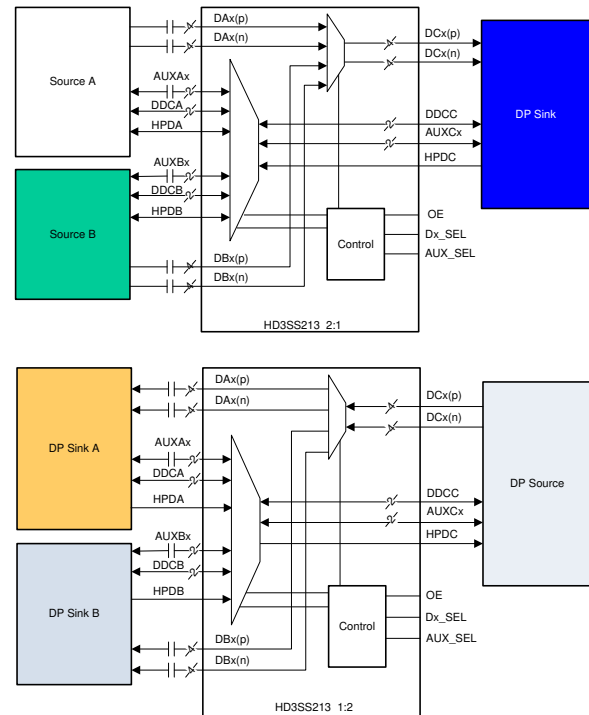

Copyright © 2016, Texas Instruments Incorporated

#### HD3SS213 应用方框图



## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | <b>7.3 Feature Description</b> .....                             | <b>11</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | <b>7.4 Device Functional Modes</b> .....                         | <b>11</b> |
| <b>3 说明</b> .....                              | <b>1</b>  | <b>8 Application and Implementation</b> .....                    | <b>12</b> |
| <b>4 Revision History</b> .....                | <b>2</b>  | 8.1 Application Information.....                                 | 12        |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b>  | 8.2 Typical Applications.....                                    | 13        |
| <b>6 Specifications</b> .....                  | <b>5</b>  | <b>9 Layout</b> .....                                            | <b>16</b> |
| 6.1 Absolute Maximum Ratings.....              | 5         | 9.1 Layout Guidelines.....                                       | 16        |
| 6.2 ESD Ratings.....                           | 5         | 9.2 Layout Example.....                                          | 17        |
| 6.3 Recommended Operating Conditions.....      | 5         | <b>10 Device and Documentation Support</b> .....                 | <b>18</b> |
| 6.4 Thermal Information.....                   | 6         | 10.1 接收文档更新通知.....                                               | 18        |
| 6.5 Electrical Characteristics.....            | 6         | 10.2 支持资源.....                                                   | 18        |
| 6.6 Timing Requirements.....                   | 7         | 10.3 Trademarks.....                                             | 18        |
| 6.7 Typical Characteristics.....               | 9         | 10.4 静电放电警告.....                                                 | 18        |
| <b>7 Detailed Description</b> .....            | <b>10</b> | 10.5 术语表.....                                                    | 18        |
| 7.1 Overview.....                              | 10        | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>18</b> |
| 7.2 Functional Block Diagram.....              | 10        |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

| <b>Changes from Revision B (December 2016) to Revision C (January 2021)</b>                                                                       | <b>Page</b> |
|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • 注：采用 MicroStar Jr. BGA 封装的器件采用层压 nFBGA 封装进行了重新设计。这种 nFBGA 封装提供了类似于数据表中的电气性能。该封装占用空间也类似于 MicroStar Jr. BGA。将在整个数据表中更新全新封装标识符来代替已停止使用的封装标识符。..... | 1           |
| • 将 u*jr BGA 更改为 nFBGA.....                                                                                                                       | 1           |
| • Changed ZQE to ZXH.....                                                                                                                         | 3           |
| • Changed u*jr ZQE to nFBGA ZXH. Updated thermal data.....                                                                                        | 6           |
| • Changed u*jr BGA to nFBGA.....                                                                                                                  | 10          |

| <b>Changes from Revision A (September 2013) to Revision B (December 2016)</b>          | <b>Page</b> |
|----------------------------------------------------------------------------------------|-------------|
| • 添加了器件信息表、ESD 等级表、特性说明部分、器件功能模式部分、应用和实施部分、电源相关建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分..... | 1           |
| • Added A2 to J4 row in <i>Pin Functions</i> table.....                                | 3           |

| <b>Changes from Revision * (September 2013) to Revision A (September 2013)</b> | <b>Page</b> |
|--------------------------------------------------------------------------------|-------------|
| • Deleted Ordering Information.....                                            | 3           |

## 5 Pin Configuration and Functions

|   | 1       | 2       | 3        | 4      | 5        | 6       | 7        | 8        | 9       |
|---|---------|---------|----------|--------|----------|---------|----------|----------|---------|
| A | Dx_SEL  | VDD     |          | DA0(n) | DA1(n)   | DA2(n)  |          | DA3(p)   | DA3(n)  |
| B | DC0(n)  | DC0(p)  | GND      | DA0(p) | DA1(p)   | DA2(p)  | OE       | DB0(p)   | DB0(n)  |
| C |         | AUX_SEL |          |        |          |         |          | GND      |         |
| D | DC1(n)  | DC1(p)  |          |        |          |         |          | DB1(p)   | DB1(n)  |
| E | DC2(n)  | DC2(p)  |          |        |          |         |          | DB2(p)   | DB2(n)  |
| F | DC3(n)  | DC3(p)  |          |        |          |         |          | DB3(p)   | DB3(n)  |
| G |         | GND     |          |        |          |         |          | GND      |         |
| H | AUXC(n) | AUXC(p) | HPDB     | GND    | DDCCLK_B | AUXB(p) | GND      | DDCCLK_A | AUXA(p) |
| J | HPDC    | HPDA    | DDCCLK_C | VDD    | DDCDAT_B | AUXB(n) | DDCDAT_C | DDCDAT_A | AUXA(n) |

### nFBGA 50-Pin ZXH Package Top View

表 5-1. Pin Functions

| PIN       |                     | TYPE <sup>(1)</sup> | DESCRIPTION <sup>(2)</sup>                                   |
|-----------|---------------------|---------------------|--------------------------------------------------------------|
| NO.       | NAME                |                     |                                                              |
| H9,<br>J9 | AUXA(p),<br>AUXA(n) | I/O                 | Port A AUX positive signal<br>Port A AUX negative signal     |
| H6,<br>J6 | AUXB(p),<br>AUXB(n) | I/O                 | Port B AUX positive signal<br>Port B AUX negative signal     |
| H2,<br>H1 | AUXC(p),<br>AUXC(n) | I/O                 | Port C AUX positive signal<br>Port C AUX negative signal     |
| C2        | AUX_SEL             | I                   | AUX/DDC selection control pin in conjunction with Dx_SEL Pin |

表 5-1. Pin Functions (continued)

| PIN                       |                       | TYPE <sup>(1)</sup> | DESCRIPTION <sup>(2)</sup>                                                                       |
|---------------------------|-----------------------|---------------------|--------------------------------------------------------------------------------------------------|
| NO.                       | NAME                  |                     |                                                                                                  |
| NA                        | CADA/B/C              | I/O                 | Port A/B/C cable activity detect                                                                 |
| B4,<br>A4                 | DA0(p),<br>DA0(n)     | I/O                 | Port A, Channel 0, High speed positive signal<br>Port A, Channel 0, High speed negative signal   |
| B5,<br>A5                 | DA1(p),<br>DA1(n)     | I/O                 | Port A, Channel 1, High speed positive signal<br>Port A, Channel 1, High speed negative signal   |
| B6,<br>A6                 | DA2(p),<br>DA2(n)     | I/O                 | Port A, Channel 2, High speed positive signal<br>Port A, Channel 2, High speed negative signal   |
| A8,<br>A9                 | DA3(p),<br>DA3(n)     | I/O                 | Port A, Channel 3, High speed positive signal<br>Port A, Channel 3, High speed negative signal   |
| B8,<br>B9                 | DB0(p),<br>DB0(n)     | I/O                 | Port B, Channel 0, High speed positive signal<br>Port B, Channel 0, High speed negative signal   |
| D8,<br>D9                 | DB1(p),<br>DB1(n)     | I/O                 | Port B, Channel 1, High speed positive signal<br>Port B, Channel 1, High speed negative signal   |
| E8,<br>E9                 | DB2(p),<br>DB2(n)     | I/O                 | Port B, Channel 2, High speed positive signal<br>Port B, Channel 2, High speed negative signal   |
| F8,<br>F9                 | DB3(p),<br>DB3(n)     | I/O                 | Port B, Channel 3, High speed positive signal<br>Port B, Channel 3, High speed negative signal   |
| B2,<br>B1                 | DC0(p),<br>DC0(n)     | I/O                 | Port C, Channel 0, High speed positive signal<br>Port C, Channel 0, High speed negative signal   |
| D2,<br>D1                 | DC1(p),<br>DC1(n)     | I/O                 | Port C, Channel 1, High speed positive signal<br>Port C, Channel 1, High speed negative signal   |
| E2,<br>E1                 | DC2(p),<br>DC2(n)     | I/O                 | Port C, Channel 2, High speed positive signal<br>Port C, Channel 2, High speed negative signal   |
| F2,<br>F1                 | DC3(p),<br>DC3(n)     | I/O                 | Port C, Channel 3, High speed positive signal<br>Port C, Channel 3, High speed negative signal   |
| H8,<br>J8                 | DDCCLK_A,<br>DDCDAT_A | I/O                 | Port A DDC clock signal<br>Port A DDC data signal                                                |
| H5,<br>J5                 | DDCCLK_B,<br>DDCDAT_B | I/O                 | Port B DDC clock signal<br>Port B DDC data signal                                                |
| J3,<br>J7                 | DDCCLK_C,<br>DDCDAT_C | I/O                 | Port C DDC clock signal<br>Port C DDC data signal                                                |
| A1                        | Dx_SEL                | I                   | High speed port selection control pins                                                           |
| B3, C8, G2,<br>G8, H4, H7 | GND                   | S                   | Ground                                                                                           |
| J2                        | HPDA                  | I/O                 | Port A hot plug detect                                                                           |
| H3                        | HPDB                  | I/O                 | Port B hot plug detect                                                                           |
| J1                        | HPDC                  | I/O                 | Port C hot plug detect                                                                           |
| B7                        | OE                    | I                   | Output enable:<br>OE = V <sub>IH</sub> : Normal operation<br>OE = V <sub>IL</sub> : Standby mode |
| A2,<br>J4                 | VDD                   | S                   | 3.3-V positive power supply voltage                                                              |

(1) I = Input, O = Output, S = Supply

(2) The high speed data ports incorporate 20-k $\Omega$  pulldown resistors that are switched in when a port is not selected and switched out when the port is selected.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                                         |                  | MIN                       | MAX            | UNIT |
|-----------------------------------------|------------------|---------------------------|----------------|------|
| Supply voltage, $V_{DD}$ <sup>(2)</sup> |                  | - 0.5                     | 4              | V    |
| Voltage                                 | Differential I/O | - 0.5                     | 4              | V    |
|                                         | Control pin      | - 0.5                     | $V_{DD} + 0.5$ |      |
| Continuous power dissipation            |                  | See <a href="#">§ 6.4</a> |                |      |
| Operating free-air temperature, $T_A$   |                  | - 40                      | 105            | °C   |
| Storage temperature, $T_{stg}$          |                  |                           | 150            | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to network ground terminal.

### 6.2 ESD Ratings

|                                     |                                                                                | VALUE | UNIT |
|-------------------------------------|--------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|                                     | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

Typical values for all parameters are at  $V_{CC} = 3.3$  V and  $T_A = 25^\circ\text{C}$  (unless otherwise noted). All temperature limits are specified by design.

| PARAMETER       |                                        | TEST CONDITIONS                                                                                    | MIN                                | NOM        | MAX                                | UNIT          |
|-----------------|----------------------------------------|----------------------------------------------------------------------------------------------------|------------------------------------|------------|------------------------------------|---------------|
| $V_{DD}$        | Supply voltage                         |                                                                                                    | 3                                  | 3.3        | 3.6                                | V             |
| $V_{IH}$        | Input high voltage                     | Control pins and signal pins (Dx_SEL, AUX_SEL, OE, HPDx)                                           | 2                                  |            | $V_{DD}$                           | V             |
| $V_{IM}$        | Input mid level voltage                | AUX_SEL pin                                                                                        | $\frac{V_{DD}}{2} - 300\text{ mV}$ | $V_{DD}/2$ | $\frac{V_{DD}}{2} + 300\text{ mV}$ | V             |
| $V_{IL}$        | Input low voltage                      | Control pins and signal pins (Dx_SEL, AUX_SEL, OE, HPDx)                                           | - 0.1                              |            | 0.8                                | V             |
| $V_{I/O\_Diff}$ | Differential voltage (Dx, AUXx)        | Switch I/O differential voltage                                                                    | 0                                  |            | 1.8                                | $V_{PP}$      |
| $V_{I/O\_CM}$   | Dx switching I/O common-mode voltage   | Switch I/O common-mode voltage                                                                     | 0                                  |            | 2                                  | V             |
|                 | AUXx switching I/O common-mode voltage | Switch I/O common-mode voltage                                                                     | 0                                  |            | 3.6                                | V             |
| $I_{IH}$        | Input high current (Dx_SEL, AUX_SEL)   | $V_{DD} = 3.6\text{ V}, V_{IN} = V_{DD}$                                                           |                                    |            | 1                                  | $\mu\text{A}$ |
| $I_{IM}$        | Input mid level current (AUX_SEL)      | $V_{DD} = 3.6\text{ V}, V_{IN} = V_{DD}/2$                                                         |                                    |            | 1                                  | $\mu\text{A}$ |
| $I_{IL}$        | Input low current (Dx_SEL, AUX_SEL)    | $V_{DD} = 3.6\text{ V}, V_{IN} = \text{GND}$                                                       |                                    |            | 1                                  | $\mu\text{A}$ |
| $I_{LK}$        | Leakage current (Dx_SEL, AUX_SEL)      | $V_{DD} = 3.3\text{ V}, V_I = 2\text{ V}, \text{OE} = 3.3\text{ V}$                                |                                    |            | 1                                  | $\mu\text{A}$ |
|                 | Leakage current (HPDx)                 | $V_{DD} = 3.3\text{ V}, V_I = 2\text{ V}, \text{OE} = 3.3\text{ V}, \text{Dx\_SEL} = 3.3\text{ V}$ |                                    |            | 1                                  | $\mu\text{A}$ |
|                 |                                        | $V_{DD} = 3.3\text{ V}, V_I = 2\text{ V}, \text{OE} = 3.3\text{ V}, \text{Dx\_SEL} = \text{GND}$   |                                    |            | 1                                  |               |

Typical values for all parameters are at  $V_{CC} = 3.3\text{ V}$  and  $T_A = 25^\circ\text{C}$  (unless otherwise noted). All temperature limits are specified by design.

| PARAMETER                                                             | TEST CONDITIONS                                                                                | MIN | NOM | MAX | UNIT          |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----|-----|-----|---------------|
| $I_{off}$ Device shut down current                                    | $V_{DD} = 3.6\text{ V}$ , OE = GND                                                             |     |     | 2.5 | $\mu\text{A}$ |
| $I_{DD}$ Supply current                                               | $V_{DD} = 3.6\text{ V}$ ,<br>DX_SEL or AUX_SEL = $V_{DD}$ or GND                               |     | 0.6 | 1   | mA            |
| <b>DA, DB, DC HIGH SPEED SIGNAL PATH</b>                              |                                                                                                |     |     |     |               |
| $C_{ON}$ Outputs ON capacitance                                       | $V_I = 0\text{ V}$ , outputs open, switch ON                                                   |     | 1.5 |     | pF            |
| $C_{OFF}$ Outputs OFF capacitance                                     | $V_I = 0\text{ V}$ , outputs open, switch OFF                                                  |     | 1   |     | pF            |
| $R_{ON}$ ON resistance                                                | $V_{DD} = 3.3\text{ V}$ , $V_{CM} = 0.5\text{ V}$ to $1.5\text{ V}$ ,<br>$I_O = -40\text{ mA}$ |     | 8   | 12  | $\Omega$      |
| $\Delta R_{ON}$ ON resistance match between pairs of the same channel | $V_{DD} = 3.3\text{ V}$ , $0.5\text{ V} \leq V_I \leq 1.2\text{ V}$ ,<br>$I_O = -40\text{ mA}$ |     |     | 1.5 | $\Omega$      |
| $R_{FLAT\_ON}$ ON resistance flatness,<br>$R_{ON(max)} - R_{ON(min)}$ | $V_{DD} = 3.3\text{ V}$ , $0.5\text{ V} \leq V_I \leq 1.2\text{ V}$                            |     | 1.3 |     | $\Omega$      |
| <b>AUXx, DDC SIGNAL PATH</b>                                          |                                                                                                |     |     |     |               |
| $C_{ON}$ Outputs ON capacitance                                       | $V_I = 0\text{ V}$ , outputs open, switch ON                                                   |     | 9   |     | pF            |
| $C_{OFF}$ Outputs OFF capacitance                                     | $V_I = 0\text{ V}$ , outputs open, switch OFF                                                  |     | 3   |     | pF            |
| $R_{ON(AUX)}$ ON resistance                                           | $V_{DD} = 3.3\text{ V}$ , $V_{CM} = 0\text{ V} - V_{DD}$ , $I_O = -8\text{ mA}$                |     | 6   | 10  | $\Omega$      |
| $R_{ON(DDC)}$ ON resistance on DDC channel                            | $V_{DD} = 3.3\text{ V}$ , $V_{CM} = 0.4\text{ V}$ , $I_O = -3\text{ mA}$                       |     | 20  | 30  | $\Omega$      |

## 6.4 Thermal Information

| THERMAL METRIC                                                    |  | HD3SS213    | UNIT               |
|-------------------------------------------------------------------|--|-------------|--------------------|
|                                                                   |  | nFBGA (ZXH) |                    |
|                                                                   |  | 50 PIN      |                    |
| $R_{\theta JA}$ Junction-to-ambient thermal resistance            |  | 72.9        | $^\circ\text{C/W}$ |
| $R_{\theta JC(top)}$ Junction-to-case (top) thermal resistance    |  | 35.9        | $^\circ\text{C/W}$ |
| $R_{\theta JB}$ Junction-to-board thermal resistance              |  | 43.1        | $^\circ\text{C/W}$ |
| $\psi_{JT}$ Junction-to-top characterization parameter            |  | 1.6         | $^\circ\text{C/W}$ |
| $\psi_{JB}$ Junction-to-board characterization parameter          |  | 42.9        | $^\circ\text{C/W}$ |
| $R_{\theta JC(bot)}$ Junction-to-case (bottom) thermal resistance |  | —           | $^\circ\text{C/W}$ |

## 6.5 Electrical Characteristics

over recommended operating conditions;  $R_L$  and  $R_{SC} = 50\ \Omega$  (unless otherwise noted)<sup>(1)</sup>

| PARAMETER                               | TEST CONDITIONS | MIN | TYP  | MAX | UNIT |
|-----------------------------------------|-----------------|-----|------|-----|------|
| $R_L$ Dx differential return loss       | 1.35 GHz        |     | -17  |     | dB   |
|                                         | 2.7 GHz         |     | -13  |     |      |
| $X_{TALK}$ Dx differential crosstalk    | 2.7 GHz         |     | -50  |     | dB   |
| $O_{IRR}$ Dx differential off-isolation | 2.7 GHz         |     | -25  |     | dB   |
| $I_L$ Dx differential insertion loss    | f = 1.35 GHz    |     | -1   |     | dB   |
|                                         | f = 2.7 GHz     |     | -1.5 |     |      |
| AUX - 3-dB bandwidth                    |                 |     | 360  |     | MHz  |

- (1) For return loss, crosstalk, off-isolation, and insertion loss values, the data was collected on a Rogers material board with minimum length traces on the input and output of the device under test.

## 6.6 Timing Requirements

over recommended operating conditions;  $R_L$  and  $R_{SC} = 50\ \Omega$  (unless otherwise noted)

| PARAMETER                                                   | TEST CONDITIONS                               | MIN | TYP | MAX | UNIT    |
|-------------------------------------------------------------|-----------------------------------------------|-----|-----|-----|---------|
| $t_{PD}$ Switch propagation delay                           | $R_{SC}$ and $R_L = 50\ \Omega$ , see 图 6-2   |     |     | 100 | ps      |
| $T_{on}$ Dx_SEL/AUX_SEL-to-switch Ton (Data, AUX and DDC)   | $R_{SC}$ and $R_L = 50\ \Omega$ , see 图 6-1   |     | 0.7 | 1   | $\mu s$ |
| $T_{off}$ Dx_SEL/AUX_SEL-to-switch Toff (Data, AUX and DDC) | $R_{SC}$ and $R_L = 50\ \Omega$ , see 图 6-1   |     | 0.7 | 1   | $\mu s$ |
| $T_{on}$ Dx_SEL/AUX_SEL-to-switch Ton (HPD)                 | $R_L = 50\ \Omega$ , see 图 6-1                |     | 0.7 | 1   | $\mu s$ |
| $T_{off}$ Dx_SEL/AUX_SEL-to-switch Toff (HPD)               | $R_L = 50\ \Omega$ , see 图 6-1                |     | 0.7 | 1   | $\mu s$ |
| $T_{SK(O)}$ Inter-pair output skew (CH-CH)                  | $R_{SC}$ and $R_L = 1\ k\ \Omega$ , see 图 6-2 |     |     | 50  | ps      |
| $T_{SK(b-b)}$ Intra-pair output skew (bit-bit)              | $R_{SC}$ and $R_L = 1\ k\ \Omega$ , see 图 6-2 |     | 1   | 5   | ps      |

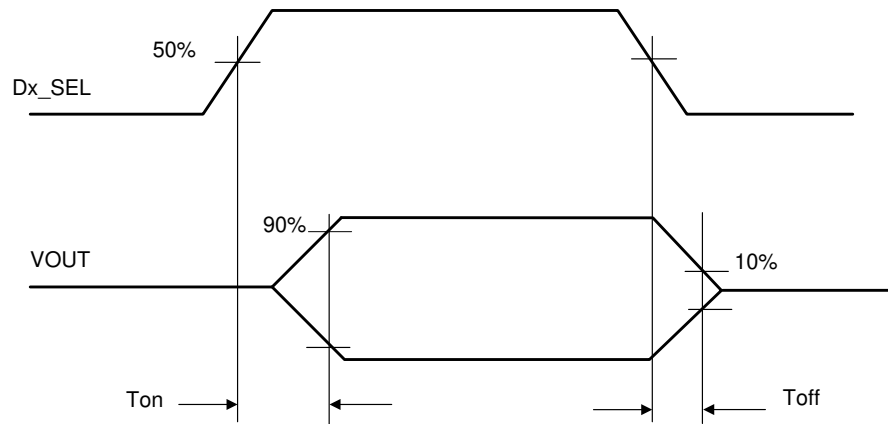
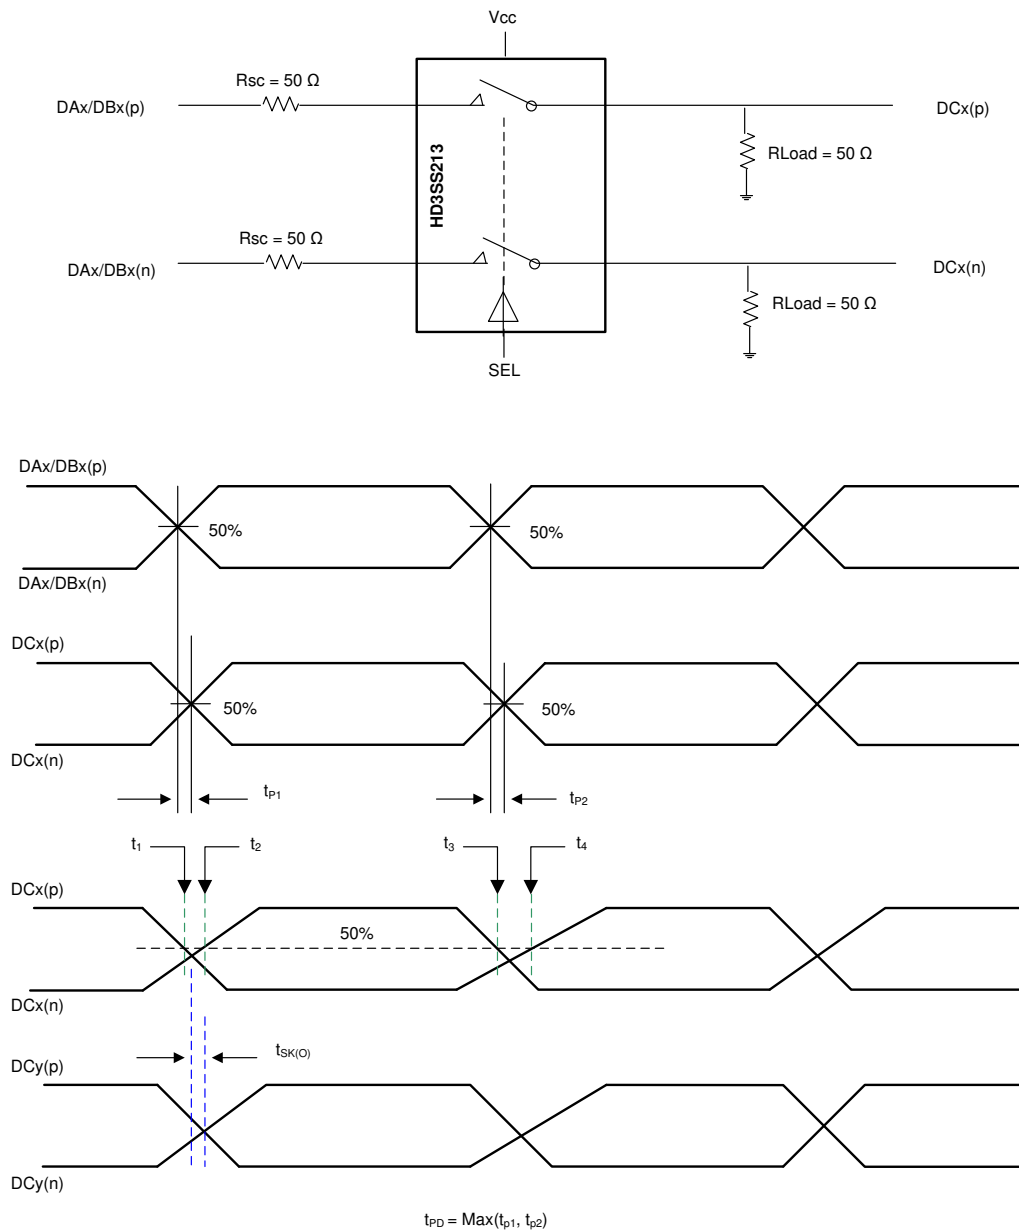


图 6-1. Select to Switch  $T_{on}$  and  $T_{off}$


$$t_{SK(O)} = \text{Difference between } t_{PD} \text{ for any two pairs of outputs}$$

$$t_{SK(b \cdot b)} = 0.5 \times |(t_4 - t_3) + (t_1 - t_2)|$$

Copyright © 2016, Texas Instruments Incorporated

图 6-2. Propagation Delay and Skew



## 6.7 Typical Characteristics

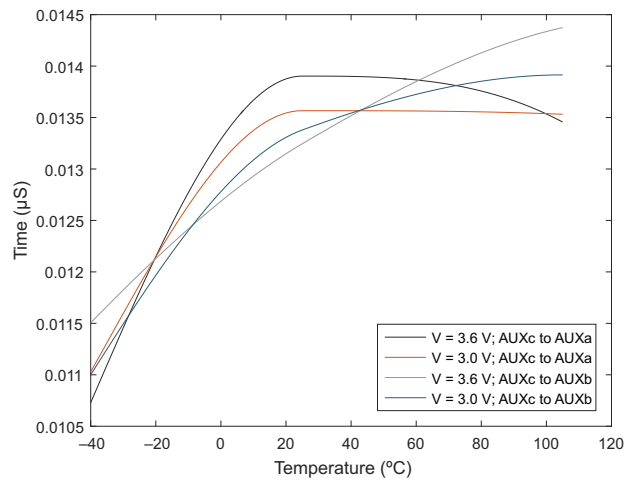


图 6-3. DxSEL to Switch Toff

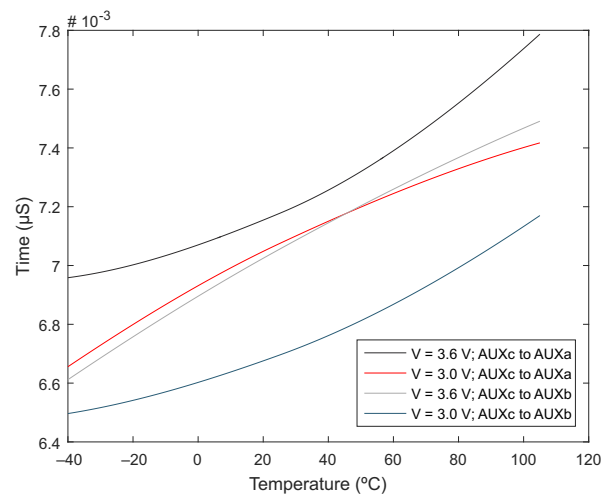


图 6-4. DxSEL to Switch Ton

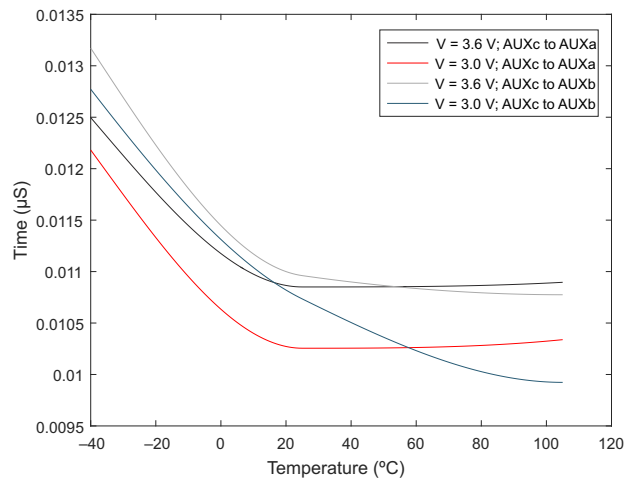


图 6-5. OUTEN to Switch Toff

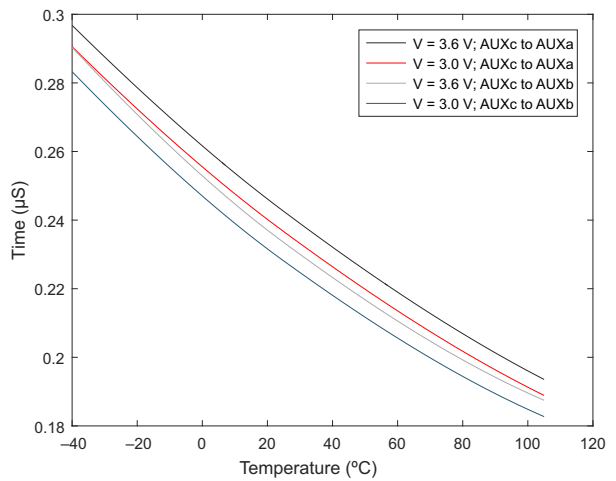


图 6-6. OUTEN to Switch Ton


## 7 Detailed Description

### 7.1 Overview

The HD3SS213 device is a high-speed passive switch offered in an industry standard 50-pin nFBGA package. The device is specified to operate from a single supply voltage of 3.3 V over the industrial temperature range of – 40°C to 105°C. The HD3SS213 is a generic 4-CH high-speed mux/demux type of switch that can be used for routing high-speed signals between two different locations on a circuit board. The HD3SS213 also supports several other high speed data protocols with a differential amplitude of < 1800 mV<sub>PP</sub> and a common-mode voltage of < 2 V, as with USB 3.0 and DisplayPort 1.2. For display port applications, the HD3SS213 also supports switching of both the auxiliary and hot plug detect signals.

The high speed port selection control inputs of the device, Dx\_SEL and AUX\_SEL pins can easily be controlled by available GPIO pins within a system.

### 7.2 Functional Block Diagram

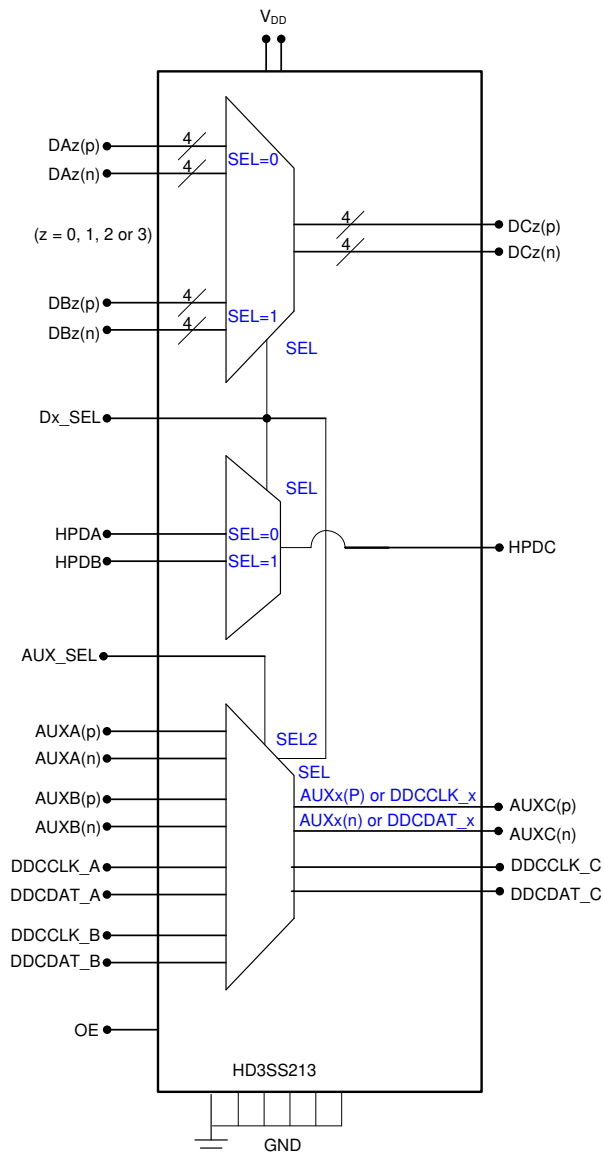

Copyright © 2016, Texas Instruments Incorporated

## 7.3 Feature Description

The HD3SS213 behaves as a two to one or one to two using high bandwidth pass gates (see [节 7.2](#)). The input ports are selected using the AUX\_SEL and Dx\_SEL pins which are shown in [表 7-1](#).

表 7-1. AUX/DDC Switch Control Logic

| CONTROL LINES |        | SWITCHED I/O PINS |              |              |              |              |              |
|---------------|--------|-------------------|--------------|--------------|--------------|--------------|--------------|
| AUX_SEL       | Dx_SEL | AUXA              | AUXB         | AUXC         | DDCA         | DDCB         | DDCC         |
| L             | L      | To/From AUXC      | Z            | To/From AUXA | Z            | Z            | Z            |
| L             | H      | Z                 | To/From AUXC | To/From AUXB | Z            | Z            | Z            |
| H             | L      | Z                 | Z            | To/From DDCA | To/From AUXC | Z            | Z            |
| H             | H      | Z                 | Z            | To/From DDCB | Z            | To/From AUXC | Z            |
| M             | L      | To/From AUXC      | Z            | To/From AUXA | To/From DDCC | Z            | To/From DDCA |
| M             | H      | Z                 | To/From AUXC | To/From AUXB | Z            | To/From DDCC | To/From DDCB |

## 7.4 Device Functional Modes

The HD3SS213 can be operated in normal operation mode or in shut down mode. In normal operation, the inputs ports of the HD3SS213 are routed to the output ports according to [表 7-1](#). In standby mode, the HD3SS213 is disabled to enable power savings with a typical current consumption of 2.5  $\mu$ A. The functional mode is selected through the OE input pin with HIGH for normal operation and LOW for standby.

## 8 Application and Implementation


### 备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

Many interfaces require AC coupling between the source and sink. The 0402 capacitors are the preferred option to provide AC coupling, and the 0603 size capacitors also work. The 0805 size capacitors and C-packs must be avoided. When placing AC coupling capacitors symmetric placement is best. A capacitor value of 0.1  $\mu\text{F}$  is best and the value must be match for the  $\pm$  signal pair. There are several placement options for the AC coupling capacitors. Because the switch requires a bias voltage, the capacitors must only be placed on one side of the switch. If they are placed on both sides of the switch, a biasing voltage must be provided. A few placement options are shown below.


In 图 8-1, the coupling capacitors are placed on the source pair. In this situation, the switch is biased by the sink.

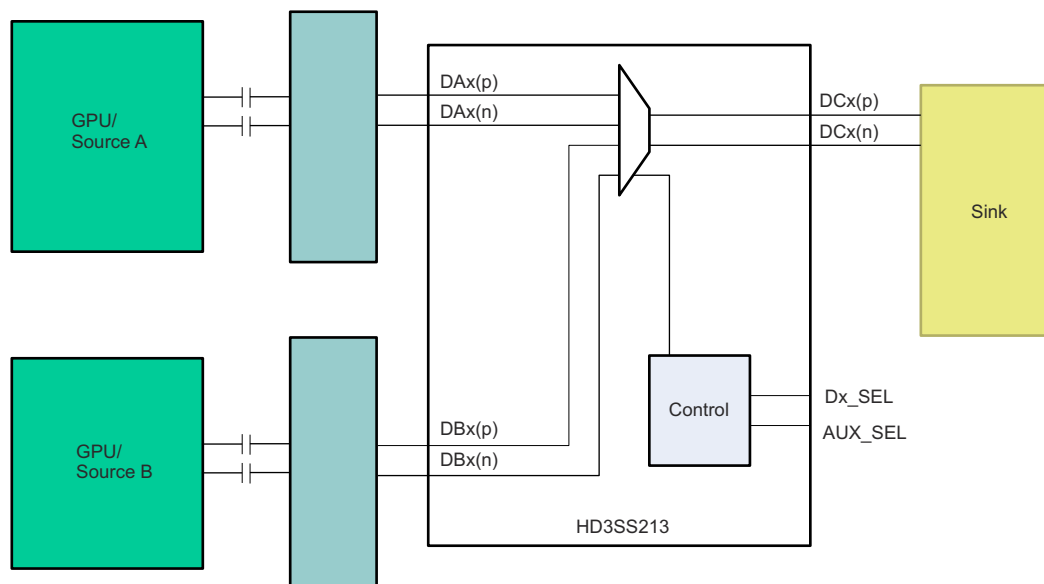

Copyright © 2016, Texas Instruments Incorporated

图 8-1. Source Biased by the Sink

In 图 8-2, the coupling capacitors are placed between the switch and Sink. In this situation, the switch is biased by the Source

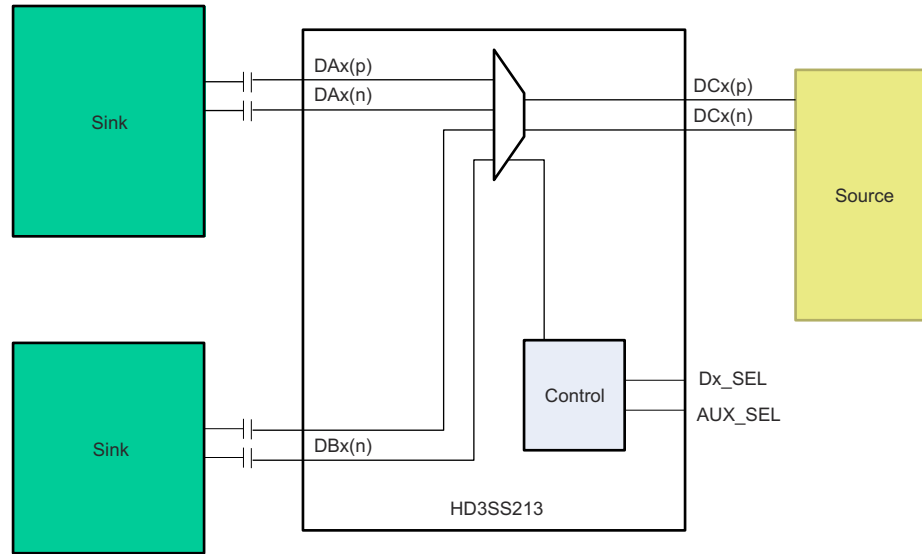


Copyright © 2016, Texas Instruments Incorporated

图 8-2. Switch Biased by the Source

## 8.2 Typical Applications

### 8.2.1 HD3SS213 AUX Channel in 2:1 Application

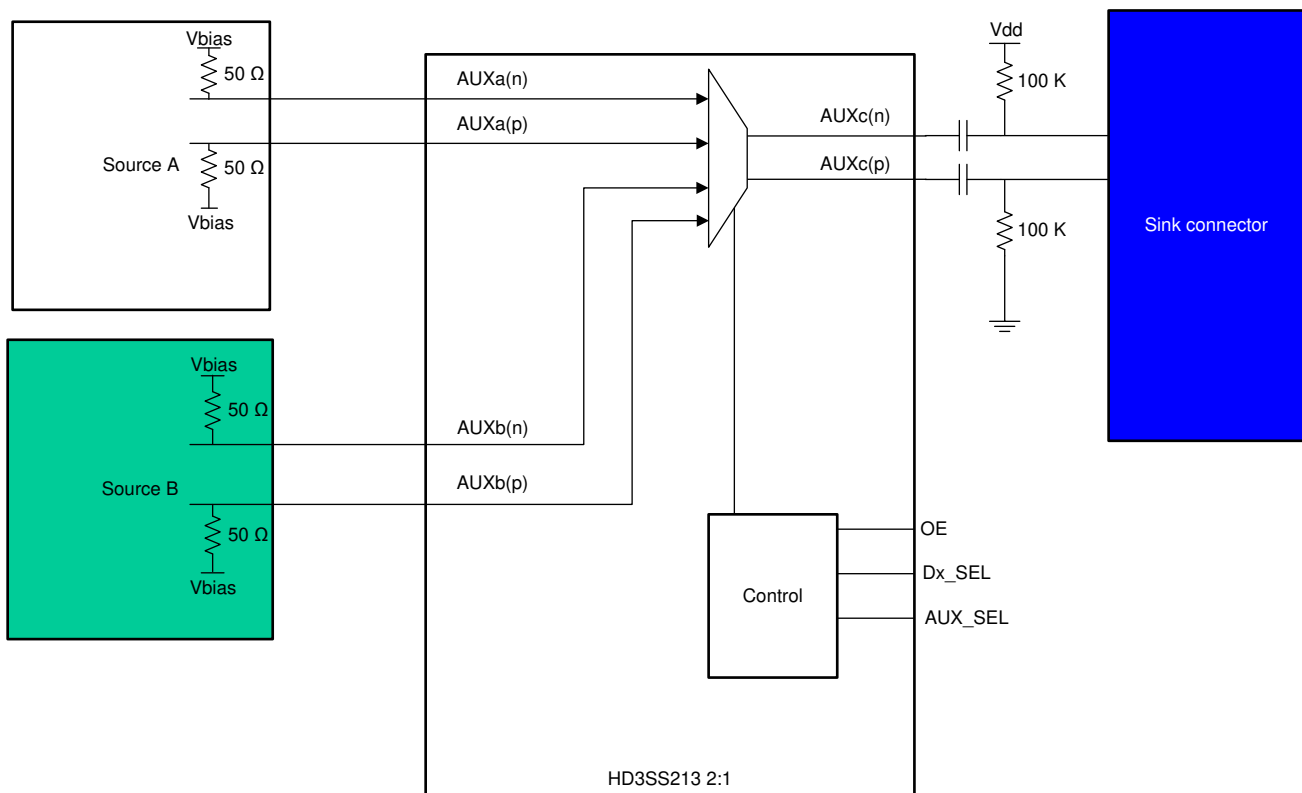

Copyright © 2016, Texas Instruments Incorporated

图 8-3. HD3SS213 AUX Channel in 2:1 Application Schematic

#### 8.2.1.1 Design Requirements

表 8-1 lists the design parameters.

表 8-1. Design Parameters

| PARAMETERS                   | VALUE                         |
|------------------------------|-------------------------------|
| Input voltage                | 3.3 V                         |
| Decoupling capacitors        | 0.1 $\mu$ F                   |
| AC capacitors <sup>(1)</sup> | 75 nF to 200 nF AC capacitors |

(1) DAx, AUXAx, AUXBx and DBx require AC capacitors. N lines require AC capacitors. Alternate mode signals may or may not require AC capacitors.

### 8.2.1.2 Detailed Design Procedure

- Connect VDD and GND pins to the power and ground planes of the printed-circuit board with 0.1- $\mu$ F bypass capacitor
- Use VDD/2 logic level at AUX\_SEL pin
- Use 3.3-V TTL/CMOS logic level at Dx\_SEL to connect DAx to DCx
- Use GND logic level at Dx\_SEL to connect DBx to DCx
- Use controlled-impedance transmission media for all the differential signals
- Ensure the received complimentary signals are with a differential amplitude of <1800 mV<sub>PP</sub> and a common-mode voltage of <2 V

### 8.2.1.3 Application Curves

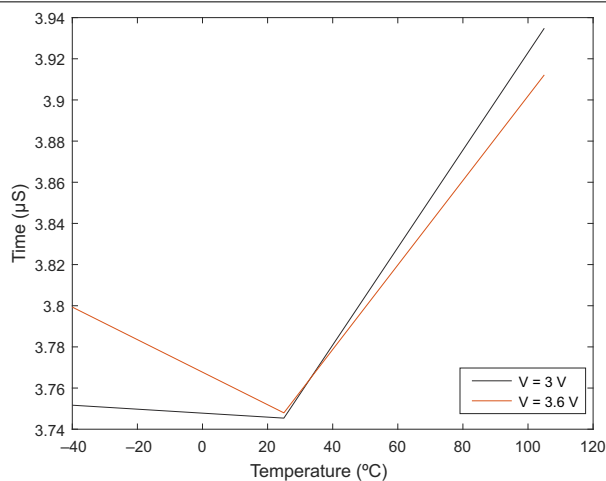
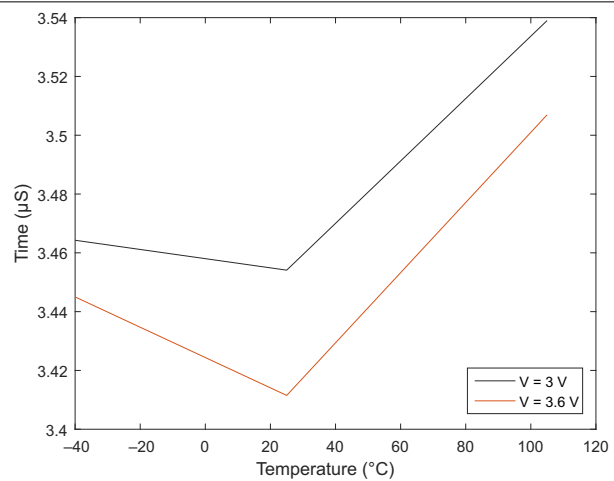
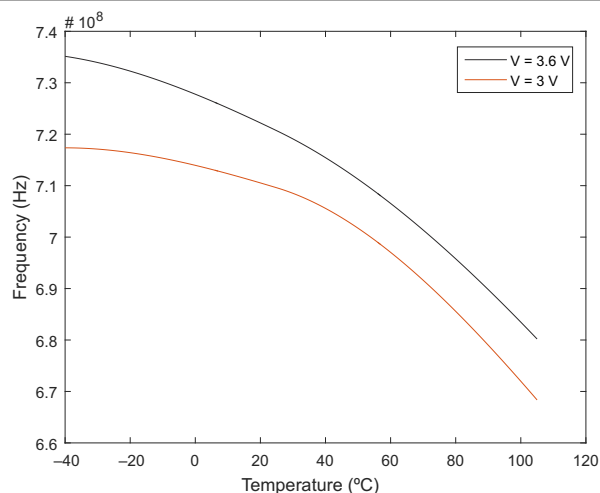
图 8-4. Intra-Pair Skew Ports C to A ( $\mu$ s)图 8-5. Intra-Pair Skew Ports C to B ( $\mu$ s)

图 8-6. Bandwidth Ports AUXc to AUXa

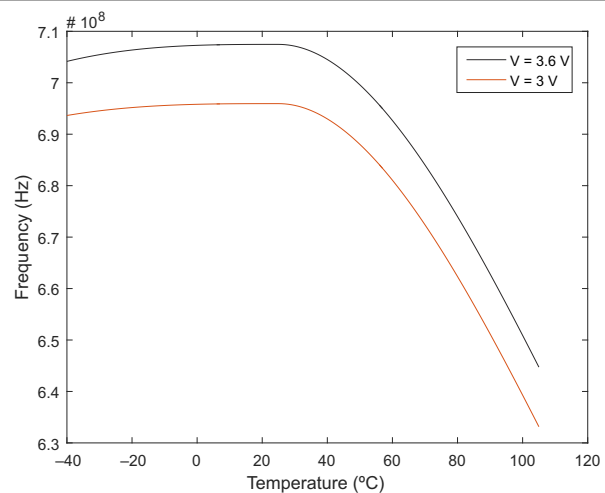


图 8-7. Bandwidth Ports AUXc to AUXb

## 8.2.2 HD3SS213 AUX Channel in 1:2 Application

AUX channel is controlled by AUX\_SEL. This pin configures the switch to route the incoming AUX signal to the outgoing AUX path, when AUX\_SEL = 0 the AUXA channel is routed to AUXC, when AUX\_SEL = 1 the AUXB channel is routed to AUXC.

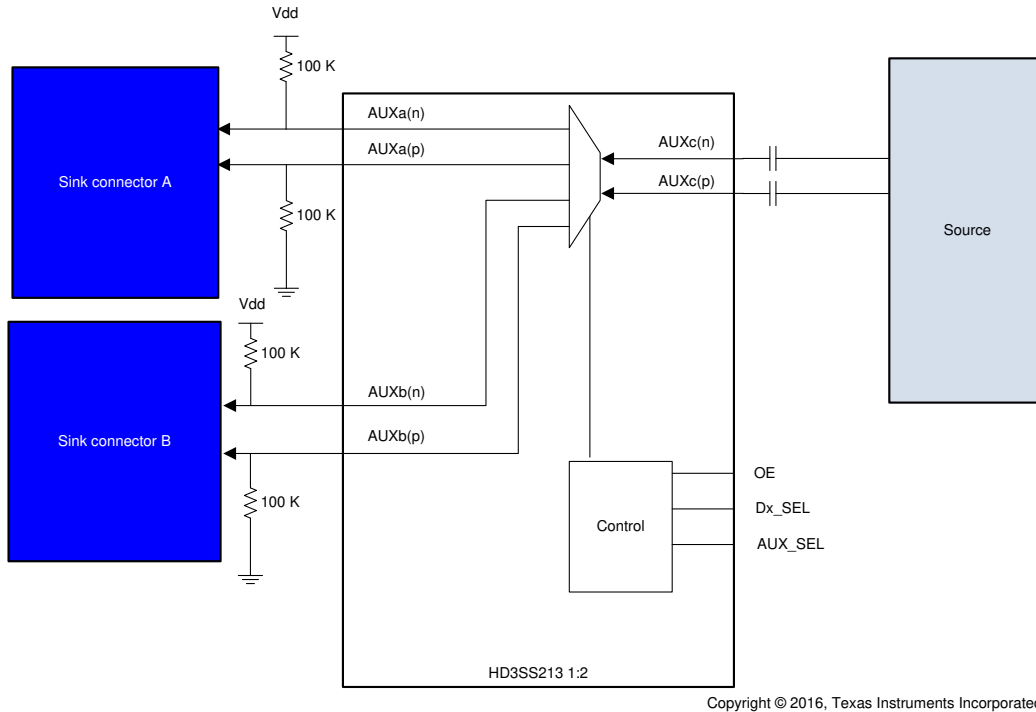


图 8-8. HD3SS213 AUX Channel in 1:2 Application Schematic

## Power Supply Recommendations

The HD3SS213 requires 3.3 V power sources. 3.3-V supply (VDD) must have 0.1-μF bypass capacitors to VSS (ground) for proper operation. TI recommends one capacitor for each power terminal. Place the capacitor as close as possible to the terminal on the device and keep trace length to a minimum. Smaller value capacitors like 0.01 μF are also recommended on the supply terminals.

## 9 Layout

### 9.1 Layout Guidelines

- Routing the high-speed differential signal traces on the top layer avoids the use of vias (and the introduction of their inductances) and allows for clean interconnects from the DisplayPort connectors to the repeater inputs and from the repeater output to the subsequent receiver circuit.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Decoupling capacitors must be placed next to each power terminal on the HD3SS213. Take care to minimize the stub length of the trace connecting the capacitor to the power pin.
- Avoid sharing vias between multiple decoupling capacitors.
- Place vias as close as possible to the decoupling capacitor solder pad.
- Widen VDD and/or GND planes to reduce effect of static and dynamic IR drop.


#### 9.1.1 Differential Traces

Guidelines for routing PCB traces are necessary when trying to maintain signal integrity and lower EMI. Although there seems to be an endless number of precautions, this section provides only a few main recommendations as layout guidance.

1. Reduce intra-pair skew in a differential trace by introducing small meandering corrections at the point of mismatch.
2. Reduce inter-pair skew, caused by component placement and IC pinouts, by making larger meandering correction along the signal path. Use chamfered corners with a length-to-trace width ratio of between 3 and 5. The distance between bends must be 8 to 10 times the trace width.
3. Use 45° bends instead of right-angle (90°) bends. Right-angle bends increase the effective trace width, which changes the differential trace impedance creating large discontinuities. A 45° bend is seen as a smaller discontinuity.
4. When routing around an object, route both traces of a pair in parallel. Splitting the traces changes the line-to-line spacing, thus causing the differential impedance to change and discontinuities to occur.
5. Place passive components within the signal path, such as source-matching resistors or AC coupling capacitors, next to each other. Routing as in case a) creates wider trace spacing than in b). However, the resulting discontinuity is limited to a far narrower area.
6. When routing traces next to a via or between an array of vias, make sure that the via clearance section does not interrupt the path of the return current on the ground plane below.
7. Avoid metal layers and traces underneath or between the pads of the DisplayPort connectors for better impedance matching. Otherwise, they cause the differential impedance to drop below 75  $\Omega$  and fail the board during TDR testing.
8. Use the smallest size possible for signal trace vias and DisplayPort connector pads as they have less impact on the 100  $\Omega$  differential impedance. Large vias and pads can cause the impedance to drop below 85  $\Omega$ .
9. Use solid power and ground planes for 100  $\Omega$  impedance control and minimum power noise.
10. For 100  $\Omega$  differential impedance use the smallest trace spacing possible, which is usually specified by the PCB vendor.
11. Keep the trace length between the DisplayPort connector and the DisplayPort device as short as possible to minimize attenuation.
12. Use good DisplayPort connectors whose impedances meet the specifications.
13. Place bulk capacitors (for example, 10  $\mu$ F) close to power sources, such as voltage regulators or where the power is supplied to the PCB.
14. Place smaller 0.1- $\mu$ F or 0.01- $\mu$ F capacitors at the device.



## 9.2 Layout Example

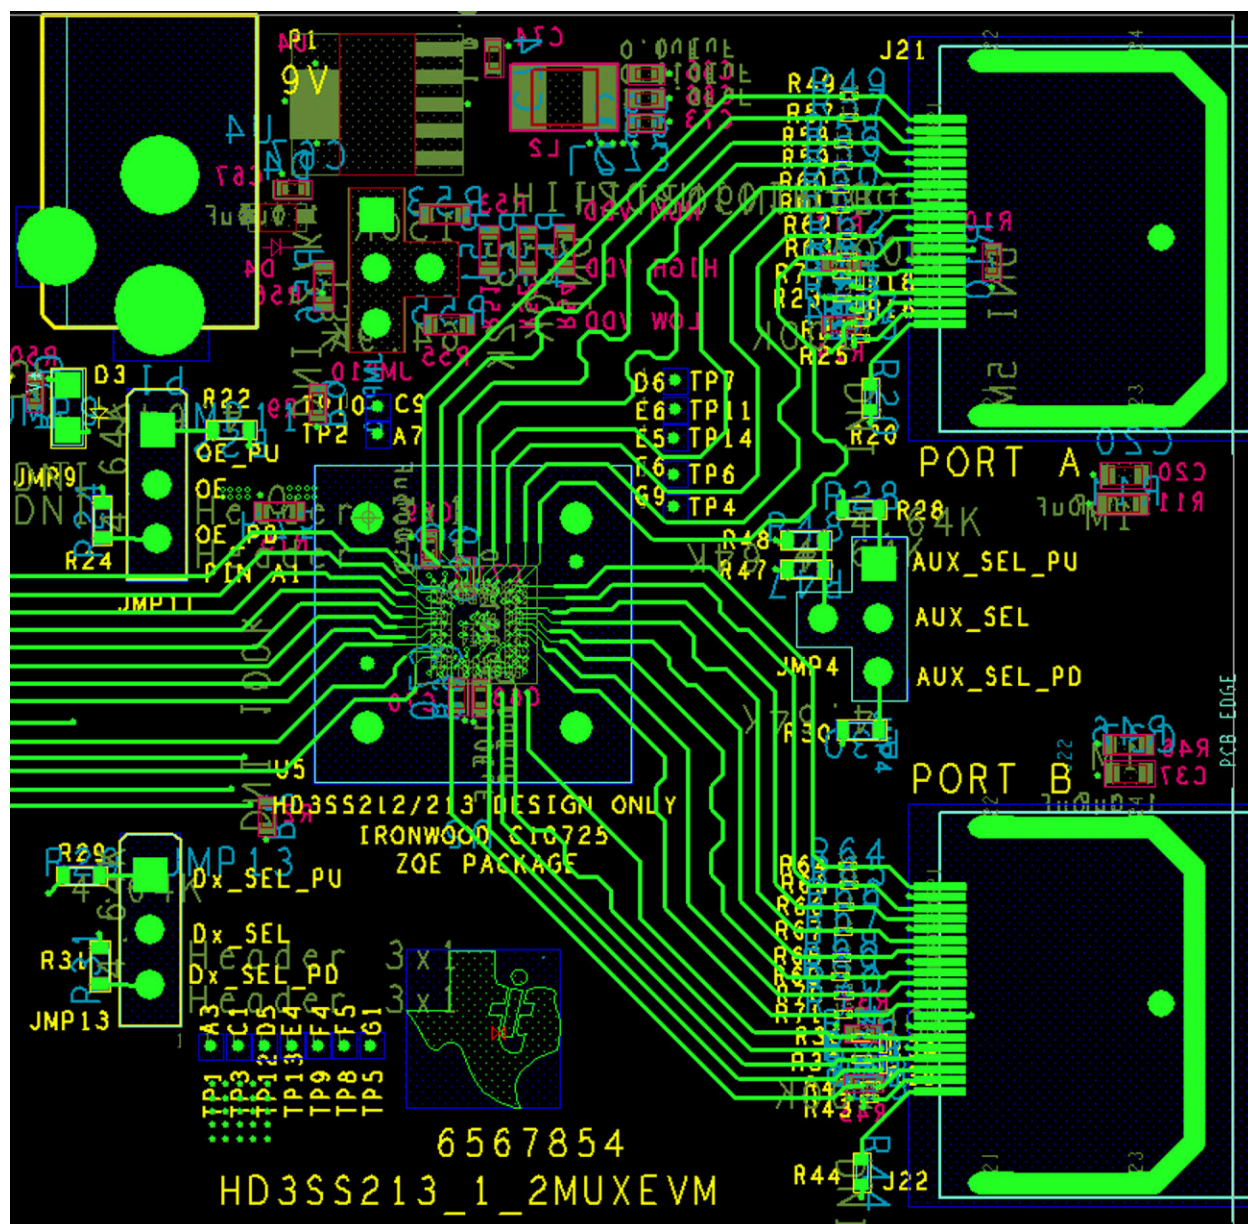

Copyright © 2016, Texas Instruments Incorporated

图 9-1. HD3SS213 Layout Example

## 10 Device and Documentation Support

### 10.1 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](http://ti.com) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 10.2 支持资源

**TI E2E™ 支持论坛** 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

### 10.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 10.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 10.5 术语表

**TI 术语表**      本术语表列出并解释了术语、首字母缩略词和定义。

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">HD3SS213ZXHR</a> | Active        | Production           | NFBGA (ZXH)   50 | 2500   LARGE T&R      | Yes         | SNAGCU                               | Level-3-260C-168 HR               | -40 to 105   | HD3SS213            |
| HD3SS213ZXHR.B               | Active        | Production           | NFBGA (ZXH)   50 | 2500   LARGE T&R      | Yes         | SNAGCU                               | Level-3-260C-168 HR               | -40 to 105   | HD3SS213            |


- <sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).
- <sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- <sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- <sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- <sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- <sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

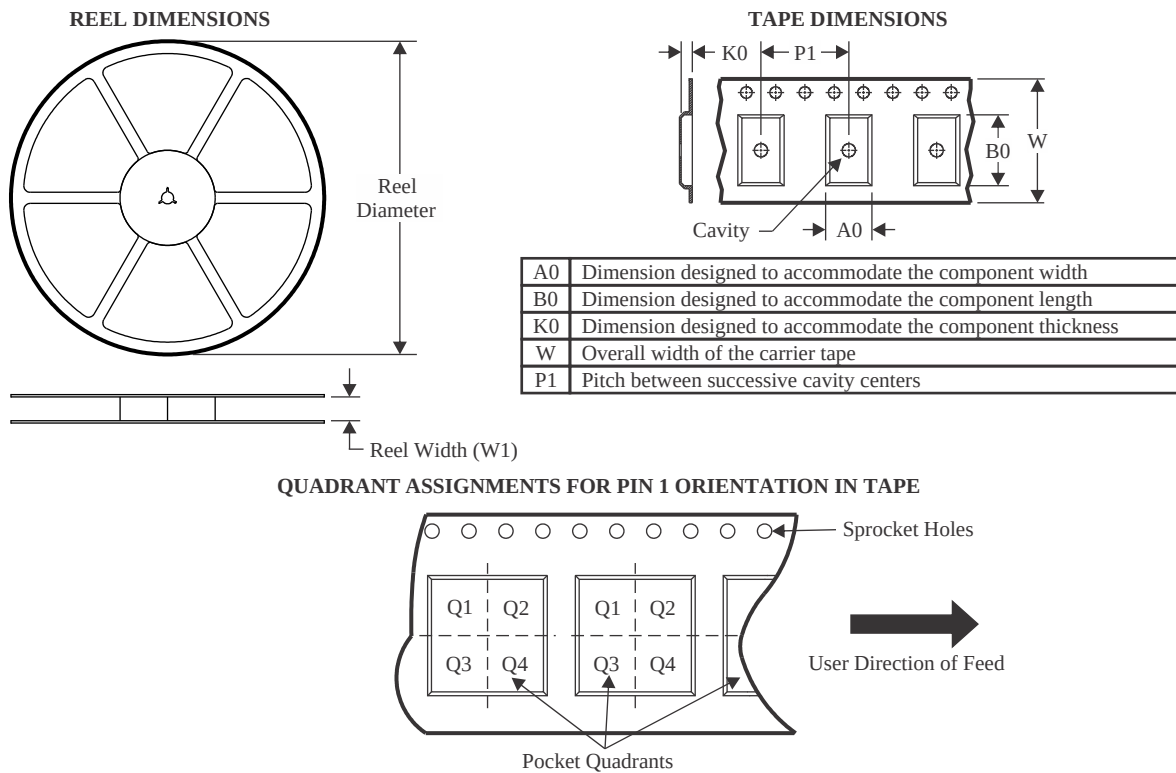

\*All dimensions are nominal


| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| HD3SS213ZXHR | NFBGA        | ZXH             | 50   | 2500 | 330.0              | 12.4               | 5.3     | 5.3     | 1.5     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

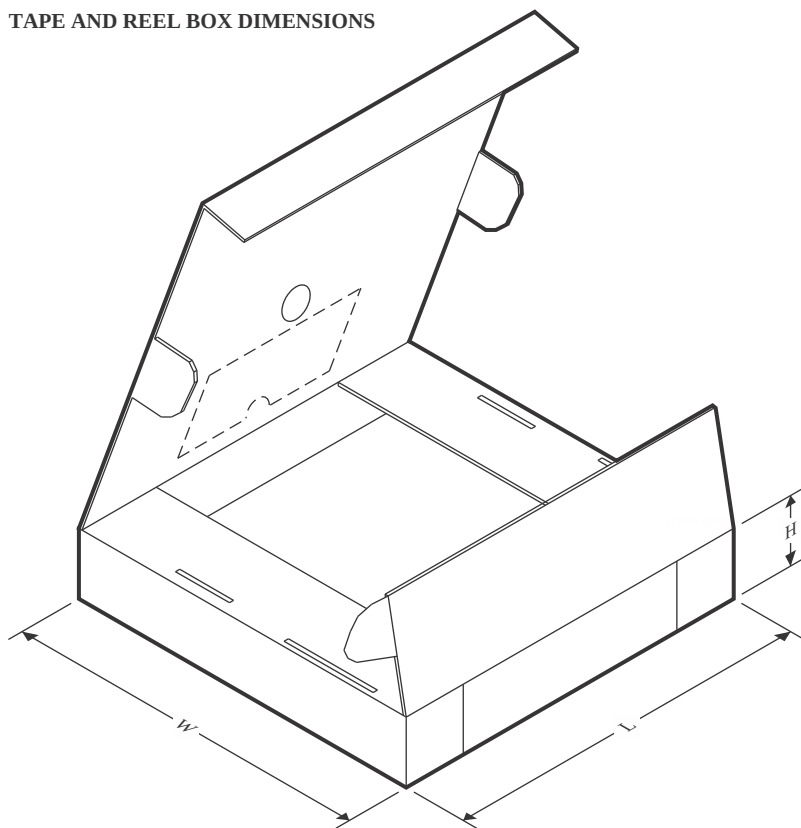

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| HD3SS213ZXHR | NFBGA        | ZXH             | 50   | 2500 | 336.6       | 336.6      | 31.8        |

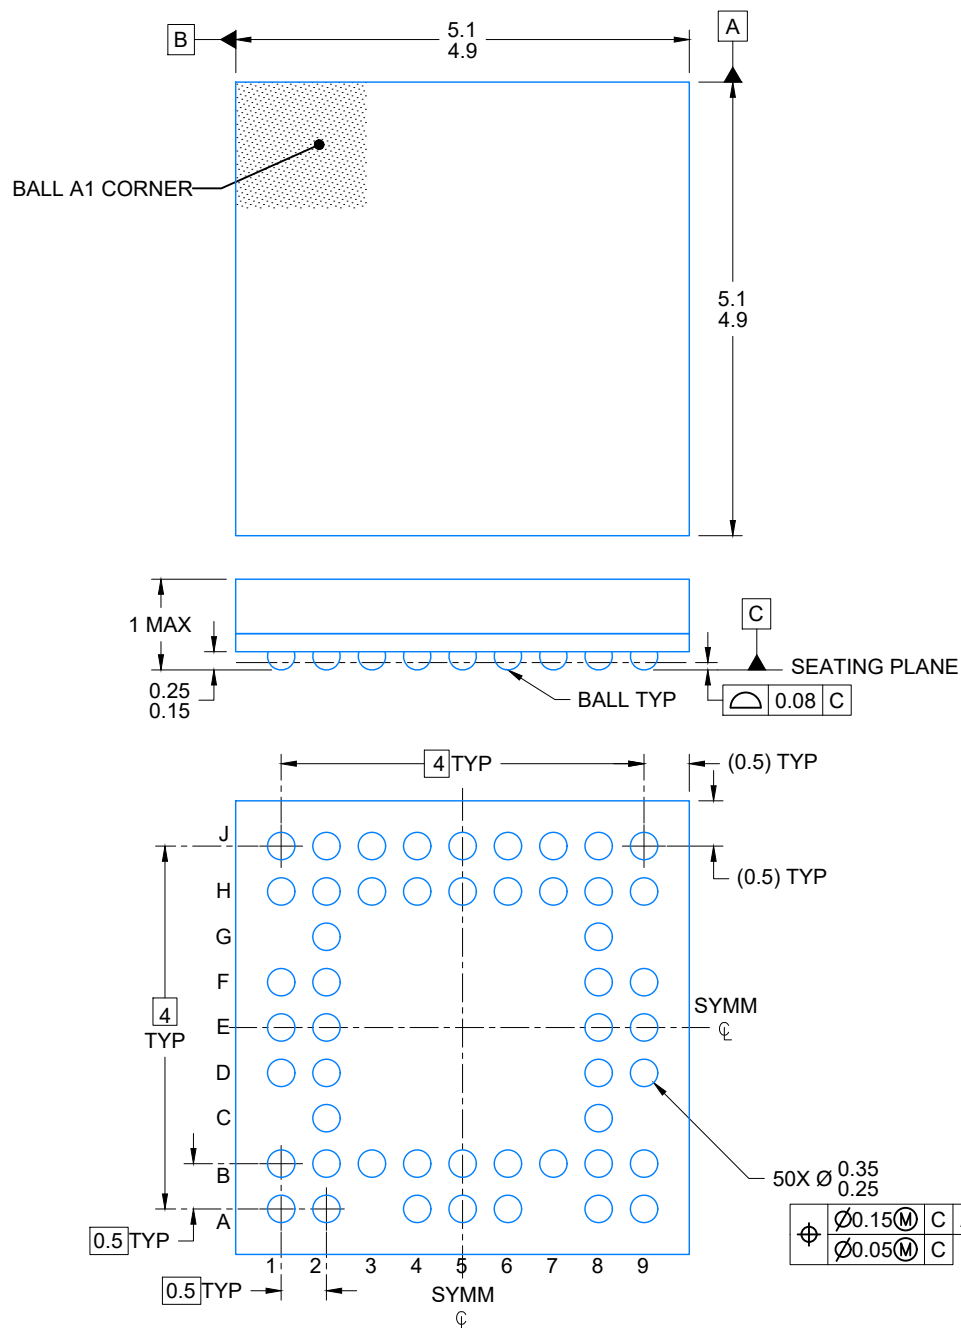


4225134/A 08/2019


## NOTES:

NanoFree is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

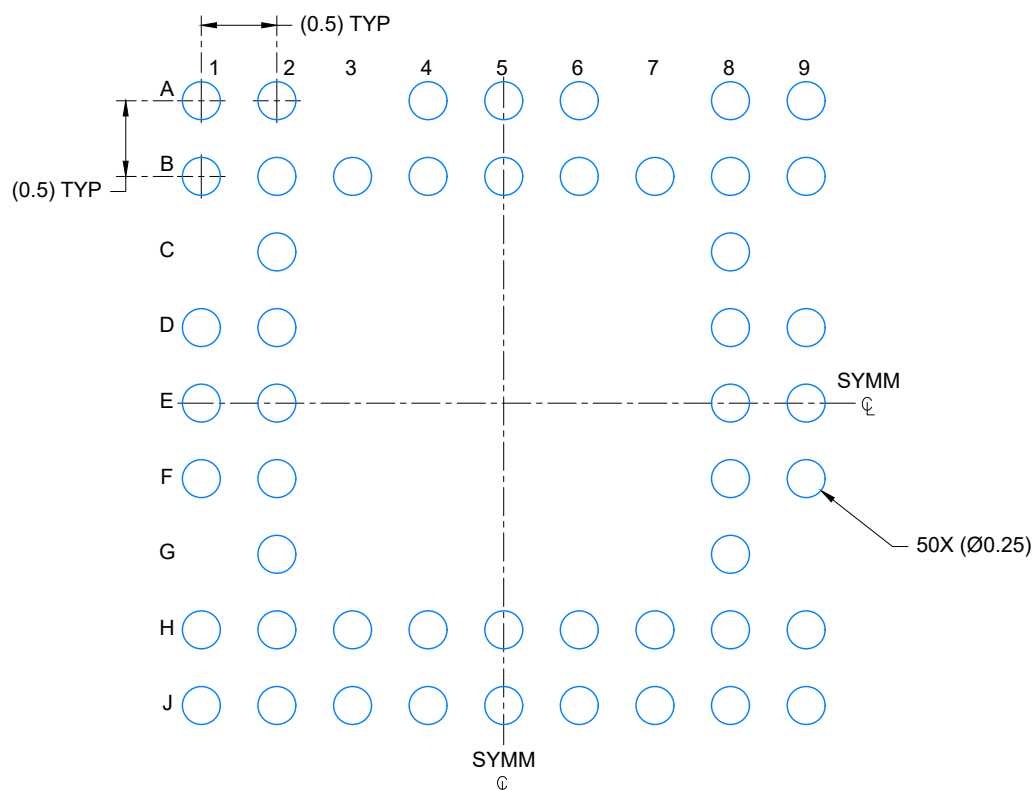

LAND PATTERN EXAMPLE  
SCALE: 20X

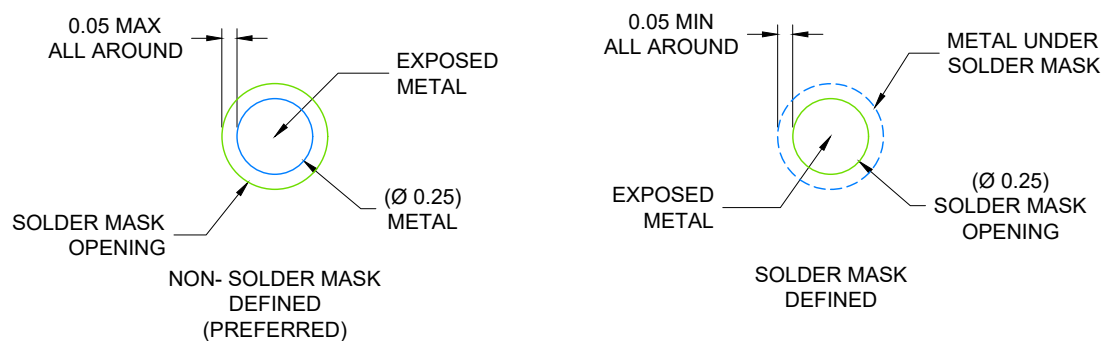


SOLDER MASK DETAILS  
NOT TO SCALE

4225134/A 08/2019

NOTES: (continued)

- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. Refer to Texas Instruments Literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

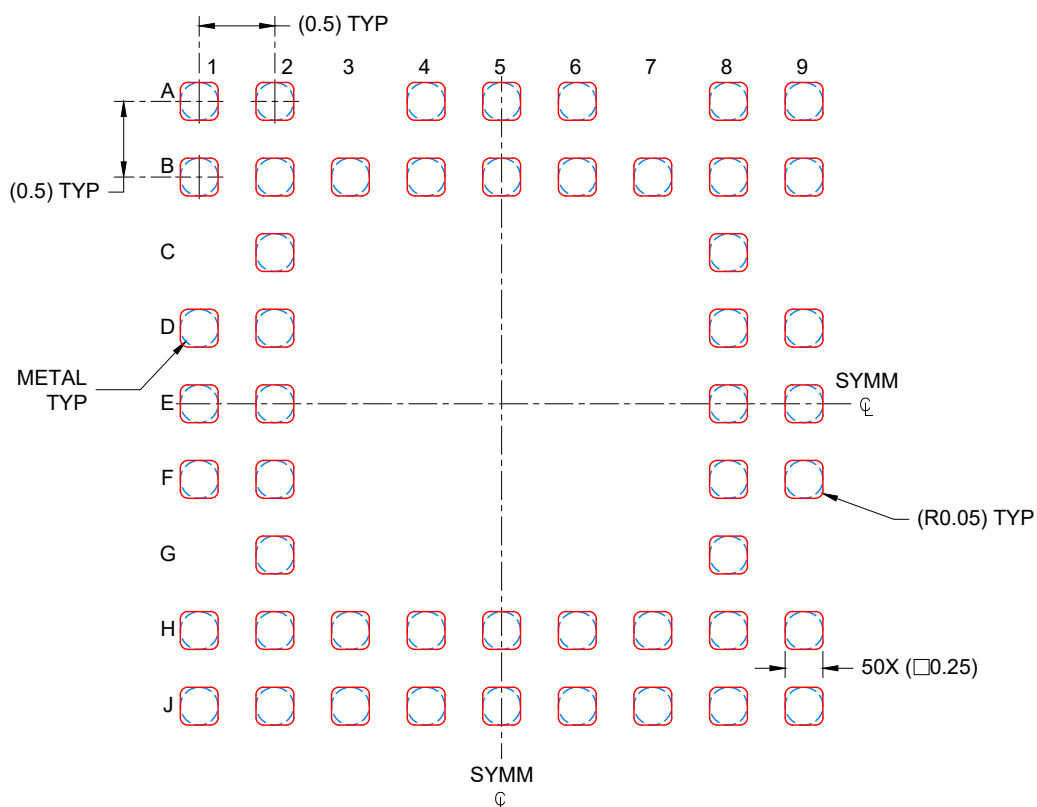

SOLDER PASTE EXAMPLE  
BASED ON 0.100 mm THICK STENCIL  
SCALE: 20X

4225134/A 08/2019

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.



## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司