


# OPA817 800MHz、高精度、单位增益稳定、FET 输入运算放大器

## 1 特性

- 高带宽：
  - 增益带宽积：400MHz
  - 带宽 ( $G = 1V/V$ )：800MHz
  - 大信号带宽 ( $2V_{PP}$ )：250MHz
  - 压摆率：1000V/ $\mu$ s
- 高精度：
  - 输入失调电压：250  $\mu$ V (最大值)
  - 输入失调电压温漂：3.5  $\mu$ V/ $^{\circ}$ C (最大值)
- 输入电压噪声：4.5nV/ $\sqrt{\text{Hz}}$
- 输入偏置电流：2pA
- 低失真 ( $R_L = 100\Omega$ ,  $V_O = 2V_{PP}$ )：
  - 10MHz 时的 HD2、HD3：-86dBc、-100dBc
- 电源电压范围：6V 至 12.6V
- 电源电流：23.5mA
- 关断电流：55 $\mu$ A
- 性能提升至 [OPA656](#)

## 2 应用

- 高速数据采集 (DAQ)
- 有源探头
- 示波器
- 宽带跨阻放大器 (TIA)
- 晶圆扫描设备
- 光学通信模块
- 光时域反射法 (OTDR)
- 测试和测量前端
- 医学和化学分析器

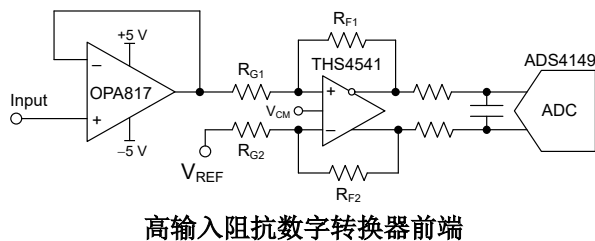

## 3 说明

OPA817 是一款单位增益稳定的电压反馈运算放大器，适用于高速、高精度和宽动态范围的应用。

OPA817 采用低噪声结型栅场效应晶体管 (JFET) 输入级，具有 400MHz 的宽增益带宽和 6V 至 12.6V 的电源电压范围。在高速数字转换器、有源探头和其他测试与测量应用中用作高阻抗缓冲器时，1000V/ $\mu$ s 的快速转换率可实现较宽的大信号带宽和低失真。

OPA817 提供  $\pm 250\mu$ V 的超低输入失调电压和  $\pm 3.5\mu$ V/ $^{\circ}$ C 的失调电压温漂。皮安级输入偏置电流和低输入电压噪声 (4.5nV/ $\sqrt{\text{Hz}}$ ) 相结合，使得 OPA817 十分适合在光学测试和通信设备以及医疗和科学仪器中用作宽带跨阻放大器。


OPA817 采用带有裸露散热垫的 8 引脚 WSON 封装。此器件可在  $-40^{\circ}\text{C}$  至  $+105^{\circ}\text{C}$  的工业温度范围内正常运行。

### 封装信息

器件型号 <sup>(1)</sup>	封装 <sup>(2)</sup>	封装尺寸
OPA817	DTK ( WSON , 8 )	3mm $\times$ 3mm

(1) 请参阅节 4。

(2) 有关更多信息，请参阅节 11。

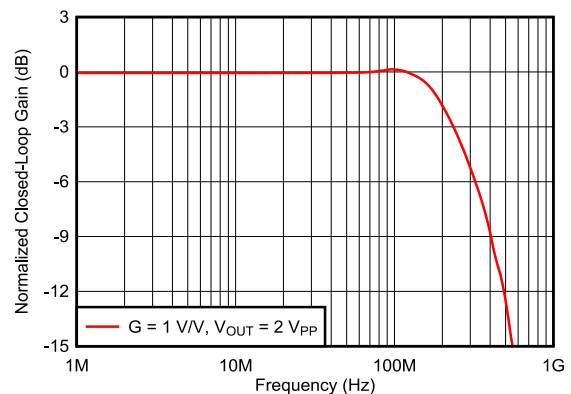

大信号频率响应



## Table of Contents

<b>1 特性</b> .....	<b>1</b>	<b>8 Application and Implementation</b> .....	<b>18</b>
<b>2 应用</b> .....	<b>1</b>	8.1 Application Information.....	18
<b>3 说明</b> .....	<b>1</b>	8.2 Typical Applications.....	19
<b>4 Device Comparison Table</b> .....	<b>3</b>	8.3 Power Supply Recommendations.....	20
<b>5 Pin Configuration and Functions</b> .....	<b>3</b>	8.4 Layout.....	20
<b>6 Specifications</b> .....	<b>4</b>	<b>9 Device and Documentation Support</b> .....	<b>23</b>
6.1 Absolute Maximum Ratings.....	4	9.1 Device Support.....	23
6.2 ESD Ratings.....	4	9.2 Documentation Support.....	23
6.3 Recommended Operating Conditions.....	4	9.3 接收文档更新通知.....	23
6.4 Thermal Information.....	4	9.4 支持资源.....	23
6.5 Electrical Characteristics.....	5	9.5 Trademarks.....	23
6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ .....	8	9.6 静电放电警告.....	23
<b>7 Detailed Description</b> .....	<b>14</b>	9.7 术语表.....	23
7.1 Overview.....	14	<b>10 Revision History</b> .....	<b>23</b>
7.2 Functional Block Diagram.....	14	<b>11 Mechanical, Packaging, and Orderable Information</b> .....	<b>24</b>
7.3 Feature Description.....	15		
7.4 Device Functional Modes.....	16		

## 4 Device Comparison Table

DEVICE	SUPPLY VOLTAGE (V)	BW (MHz)	INPUT	SLEW RATE (V/μs)	VOLTAGE NOISE (nV/√Hz)	MINIMUM STABLE GAIN (V/V)
OPA817	±6.3	400	FET	1000	4.5	1
OPA818	±6.5	2700	FET	1400	2.2	7
OPA657	±5	1600	FET	700	4.8	7
OPA656	±5	230	FET	290	7	1
OPA659	±6	350	FET	2550	8.9	1
OPA858	±2.5	5500	CMOS	2000	2.5	7
THS4631	±15	210	FET	1000	7	1

## 5 Pin Configuration and Functions

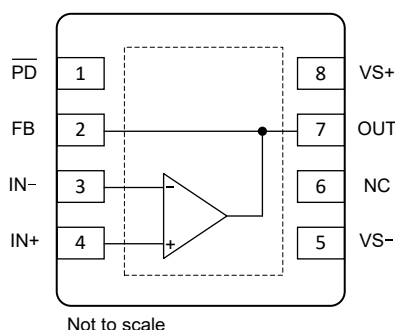


图 5-1. DTK Package, 8-Pin WSON With Thermal Pad (Top View)

表 5-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
FB	2	Output	Feedback resistor connection (optional)
IN –	3	Input	Inverting input
IN+	4	Input	Noninverting input
NC	6	—	No connect (no internal connection to die)
OUT	7	Output	Output of amplifier
PD	1	Input	Power down Low = amplifier disabled, High = amplifier enabled, Internal 2-MΩ pullup allows floating this pin
VS –	5	Power	Negative power supply
VS+	8	Power	Positive power supply
Thermal pad		—	Electrically isolated from the die substrate. The thermal pad can be connected to any potential between the device power supplies. However, best practice is to connect the thermal pad to a heat-spreading plane, typically ground.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
$V_S$	Total supply voltage ( $V_{S+} - V_{S-}$ )		13	V
	Maximum $dV_S/dT$ for supply turn-on and turn-off <sup>(2)</sup>		1	V/ $\mu$ s
$V_I$	Input voltage	$V_{S-}$	$V_{S+}$	V
$V_{ID}$	Differential input voltage		$\pm V_S$	V
$I_I$	Continuous input current		$\pm 10$	mA
$I_O$	Continuous output current <sup>(3)</sup>		$\pm 30$	mA
	Continuous power dissipation	See Thermal Information		
$T_J$	Maximum junction temperature		150	$^{\circ}$ C
$T_A$	Operating free-air temperature	- 40	105	$^{\circ}$ C
$T_{stg}$	Storage temperature	- 65	125	$^{\circ}$ C

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) To keep the edge-triggered ESD absorption devices across the supply pins off, do not exceed this specification.
- (3) Long-term continuous current for electromigration limits.

### 6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	$\pm 2000$	V
		Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 <sup>(2)</sup>	$\pm 1500$	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
$V_{S+} - V_{S-}$	Total supply voltage	6	10	12.6	V
$T_A$	Ambient temperature	- 40	25	105	$^{\circ}$ C

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		OPA817	UNIT
		DTK (WSON)	
		8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	64.9	$^{\circ}$ C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	53.0	$^{\circ}$ C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	32.8	$^{\circ}$ C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	1.3	$^{\circ}$ C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	32.8	$^{\circ}$ C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	9.0	$^{\circ}$ C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 5\text{ V}$ ,  $G = 1\text{ V/V}$ ,  $R_F = 0$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , and input and output referenced to mid-supply (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>AC PERFORMANCE</b>						
SSBW	Small-signal bandwidth	$V_{OUT} = 200\text{ mV}_{PP}$		800		MHz
		$V_{OUT} = 200\text{ mV}_{PP}$ , $G = 2\text{ V/V}$		400		
		$V_{OUT} = 200\text{ mV}_{PP}$ , $G = 5\text{ V/V}$		100		
		$V_{OUT} = 200\text{ mV}_{PP}$ , $G = 10\text{ V/V}$		40		
GBWP	Gain-bandwidth product	$V_{OUT} = 200\text{ mV}_{PP}$ , $G = 100\text{ V/V}$		400		MHz
LSBW	Large-signal bandwidth	$V_{OUT} = 2\text{ V}_{PP}$		250		MHz
		$V_{OUT} = 4\text{ V}_{PP}$		140		
	Bandwidth for 0.1-dB flatness	$V_{OUT} = 2\text{ V}_{PP}$		100		MHz
SR	Slew rate (10% to 90%)	$V_{OUT} = 4 - \text{V step}$		1000		V/ $\mu\text{s}$
	Slew rate (10% to 90%)	$V_{OUT} = 1 - \text{V step}$ , $G = 2\text{ V/V}$		750		
$t_R$ , $t_F$	Rise, fall time	$V_{OUT} = 200 - \text{mV step}$		0.7		ns
	Settling time to 0.1%,	$V_{OUT} = 2 - \text{V step}$		6		ns
	Overshoot and undershoot	$V_{OUT} = 2 - \text{V step}$		8		%
	Output Overdrive recovery time	$V_{OUT} = V_{S-}$ to $V_{S+}$ , $G = 2\text{ V/V}$ ,		15		ns
HD2	Second-order harmonic distortion	$f = 1\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-110		dBc
		$f = 10\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-86		
		$f = 50\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-76		
		$f = 10\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$ , $R_L = 1\text{ k}\Omega$		-97		
HD3	Third-order harmonic distortion	$f = 1\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-120		dBc
		$f = 10\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-100		
		$f = 50\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$		-68		
		$f = 10\text{ MHz}$ , $V_{OUT} = 2\text{ V}_{PP}$ , $R_L = 1\text{ k}\Omega$		-102		
$e_N$	Input voltage noise	$f \geq 200\text{ kHz}$		4.5		nV/ $\sqrt{\text{Hz}}$
	Voltage noise $1/f$ corner frequency			2.6		kHz
	Input current noise			18		fA/ $\sqrt{\text{Hz}}$
<b>DC PERFORMANCE</b>						
$A_{OL}$	Open-loop voltage gain	$V_{OUT} = \pm 1\text{ V}$	78	85		dB
		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$	72			
		$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$	69			
$V_{OS}$	Input-referred offset voltage			50	$\pm 250$	$\mu\text{V}$
		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$			$\pm 500$	
		$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$			$\pm 600$	
	Input offset voltage drift	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$		1	$\pm 3.5$	$\mu\text{V}/^\circ\text{C}$
		$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$		1	$\pm 3.5$	
$I_B$	Input bias current			2	$\pm 20$	pA
		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$			$\pm 1000$	
		$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$			$\pm 1500$	
$I_{OS}$	Input offset current			1	$\pm 20$	pA
		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$			$\pm 500$	
		$T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$			$\pm 750$	

## 6.5 Electrical Characteristics (续)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 5\text{ V}$ ,  $G = 1\text{ V/V}$ ,  $R_F = 0$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , and input and output referenced to mid-supply (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Internal feedback trace resistance	Device turned OFF, OUT to FB pin resistance		0.7		$\Omega$
<b>INPUT</b>						
	Most positive input voltage <sup>(1)</sup>		2.1	2.7		V
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	2.0			
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$	2.0			
	Most negative input voltage <sup>(1)</sup>			-3.9	-3.5	V
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$			-3.4	
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$			-3.4	
CMRR	Common-mode rejection ratio	$V_{CM} = \pm 0.5\text{ V}$	84	110		dB
		$T_A = -40^\circ\text{C to } 85^\circ\text{C}$	83			
		$T_A = -40^\circ\text{C to } 105^\circ\text{C}$	82			
	Input impedance common-mode		60    2.9			$\text{G}\ \Omega \parallel \text{pF}$
	Input capacitance differential mode			0.1		pF
<b>OUTPUT</b>						
$V_{OL}$	Output voltage, low	no-load		-3.9	-3.6	V
		$R_L = 100\ \Omega$		-3.7	-3.4	
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$			-3.3	
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$			-3.2	
$V_{OH}$	Output voltage, high	no-load	3.7	3.9		V
		$R_L = 100\ \Omega$	3.4	3.7		
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	3.3			
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$	3.2			
	Linear output drive (sourcing/sinking)	$V_{OUT} = \pm 1\text{ V}$ , $\Delta V_{OS} < 2\text{ mV}$	$\pm 58$	80		mA
		$T_A = -40\text{ to } 85^\circ\text{C}$ , $\Delta V_{OS} < 3\text{ mV}$	$\pm 40$			
		$T_A = -40\text{ to } 105^\circ\text{C}$ , $\Delta V_{OS} < 3\text{ mV}$	$\pm 35$			
	Short-circuit current			$\pm 100$		mA
$Z_O$	Closed loop output Impedance	$f = 100\text{ kHz}$		0.04		$\Omega$
<b>POWER SUPPLY</b>						
$I_Q$	Quiescent current			23.5	24.5	mA
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$			24.7	
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$			24.9	
PSRR+	Power-supply rejection ratio	$\Delta V_{S+} = \pm 0.5\text{ V}$	80	100		dB
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	77			
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$	76			
PSRR-	Power-supply rejection ratio	$\Delta V_{S-} = \pm 0.5\text{ V}$	80	100		dB
		$T_A = -40^\circ\text{C to } +85^\circ\text{C}$	77			
		$T_A = -40^\circ\text{C to } +105^\circ\text{C}$	76			

## 6.5 Electrical Characteristics (续)

at  $T_A \approx 25^\circ\text{C}$ ,  $V_S = \pm 5\text{ V}$ ,  $G = 1\text{ V/V}$ ,  $R_F = 0$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , and input and output referenced to mid-supply (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>POWER DOWN</b>						
	Enable voltage threshold	Specified <i>on</i> above $(V_{S+}) - 1\text{ V}$			4	V
	Disable voltage threshold	Specified <i>off</i> below $(V_{S+}) - 3\text{ V}$	2			V
	Power-down quiescent current	$\overline{\text{PD}} \leq (V_{S+}) - 3\text{ V}$		55	100	$\mu\text{A}$
	Power-down pin bias current in shutdown mode	$\overline{\text{PD}} = 0\text{ V to } (V_{S+}) - 3\text{ V}$		9	12	$\mu\text{A}$
	Power-down pin bias current in active mode	$\overline{\text{PD}} = (V_{S+}) - 1\text{ V to } (V_{S+})$		0.5	1	$\mu\text{A}$
	Turn-on time delay	Time from $\overline{\text{PD}}$ voltage exceeds threshold to $V_{\text{OUT}} = 90\%$ of final value, $V_{\text{IN}} = 1\text{ V}$		0.3		$\mu\text{s}$
	Turn-off time delay	Time from $\overline{\text{PD}}$ voltage reduces below threshold to $I_Q = 10\%$ of active mode value		0.1		$\mu\text{s}$

(1) Input range for CMRR > 77 dB.

## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \approx 25^\circ\text{C}$  (unless otherwise noted)

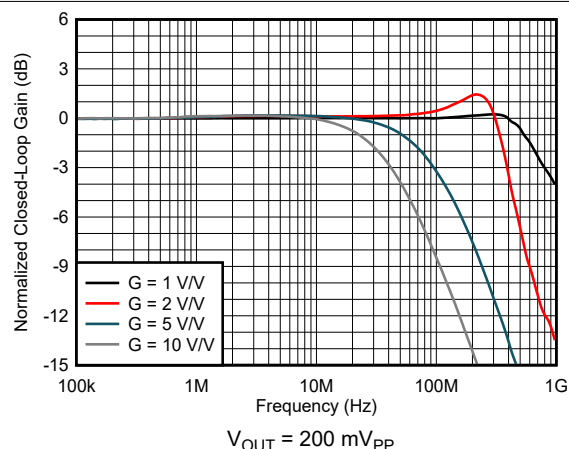


图 6-1. Noninverting Small-Signal Frequency Response

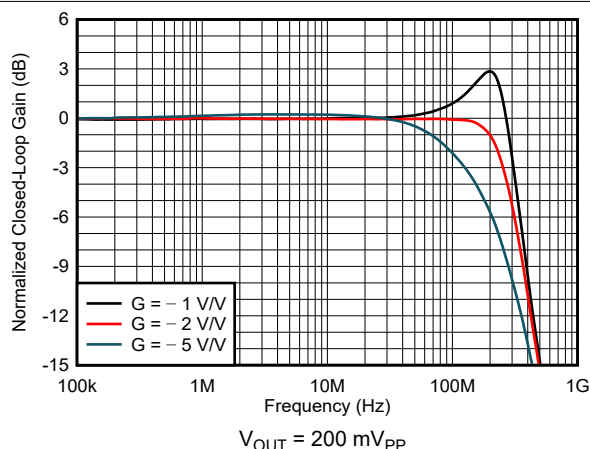


图 6-2. Inverting Small-Signal Frequency Response

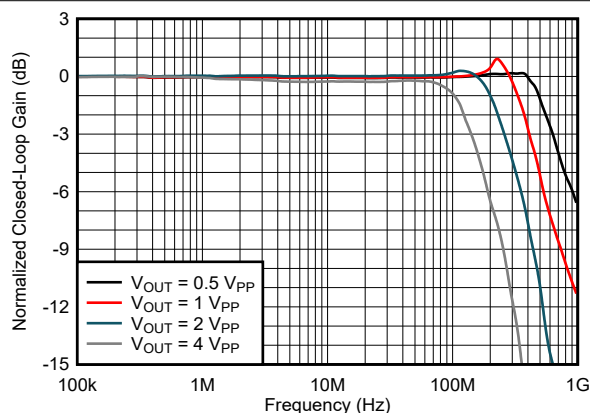


图 6-3. Noninverting Large-Signal Frequency Response

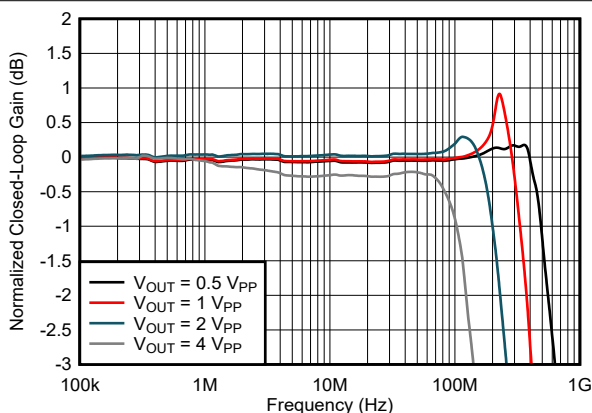


图 6-4. Gain Flatness vs Frequency

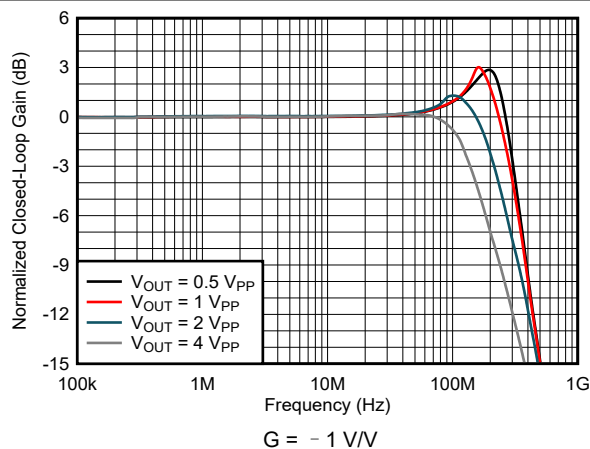


图 6-5. Inverting Large-Signal Frequency Response

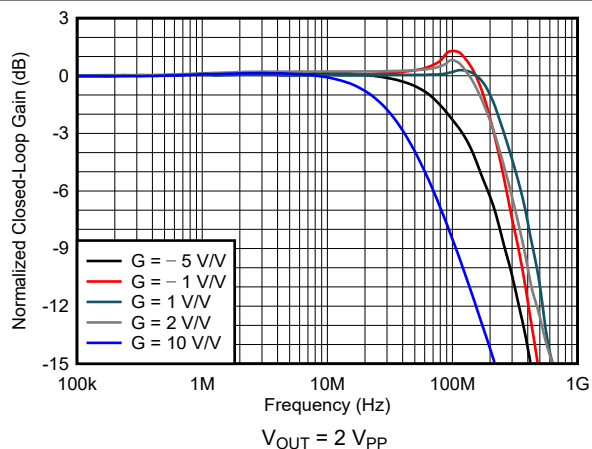


图 6-6. Large-Signal Frequency Response Over Gain



## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \cong 25^\circ\text{C}$  (unless otherwise noted)

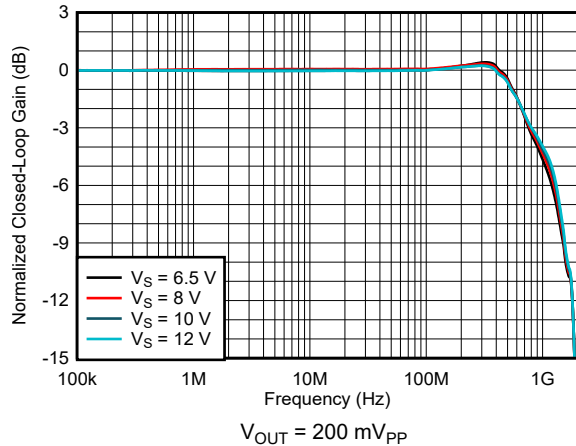


图 6-7. Noninverting Small-Signal Frequency Response Over Supply

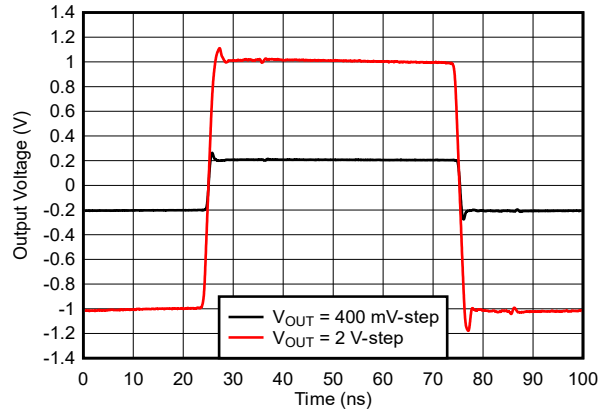


图 6-8. Noninverting Large-Signal Pulse Response

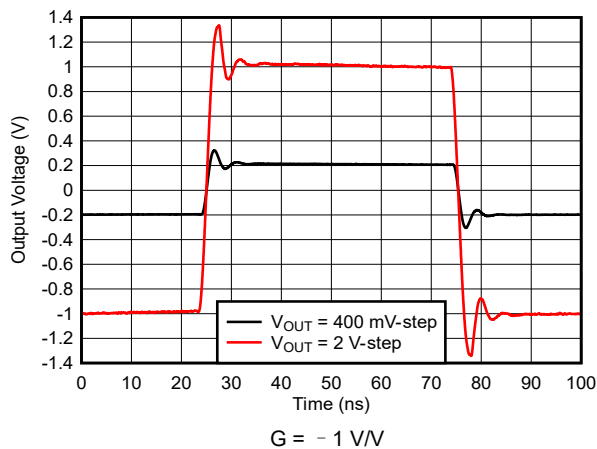


图 6-9. Inverting Large-Signal Pulse Response

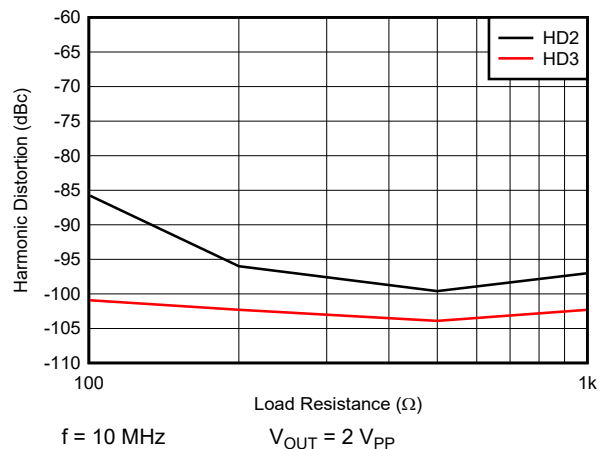


图 6-10. Harmonic Distortion vs Load Resistance

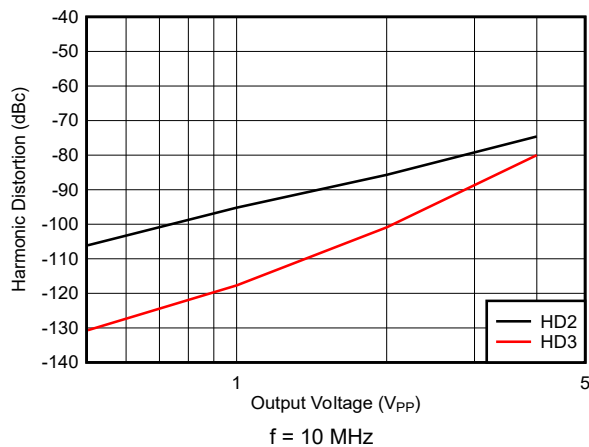


图 6-11. Harmonic Distortion vs Output Voltage

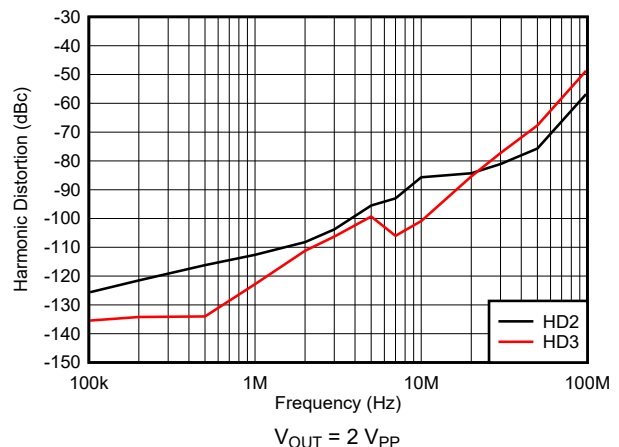


图 6-12. Harmonic Distortion vs Frequency

## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \approx 25^\circ\text{C}$  (unless otherwise noted)

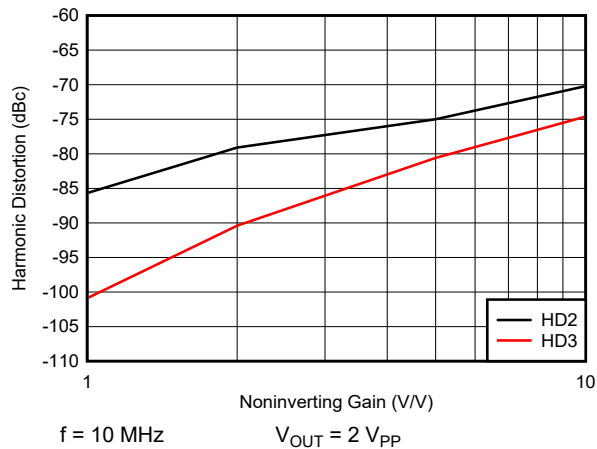


图 6-13. Harmonic Distortion vs Noninverting Gain

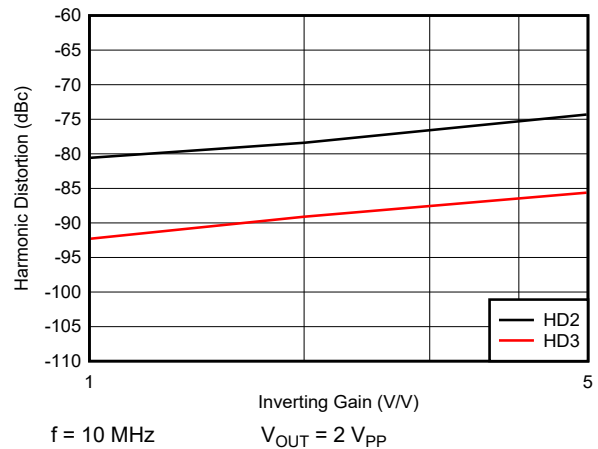


图 6-14. Harmonic Distortion vs Inverting Gain

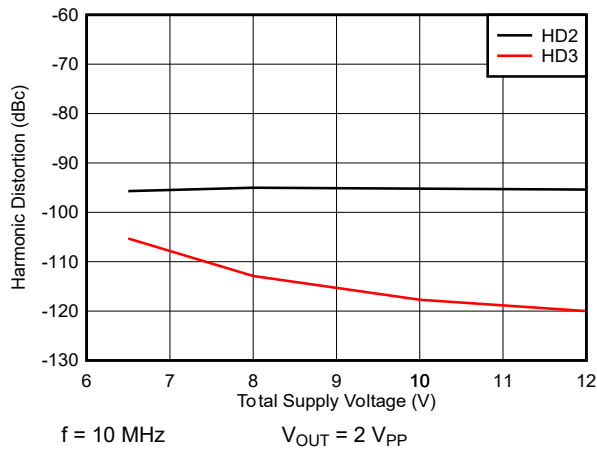


图 6-15. Harmonic Distortion vs Supply Voltage

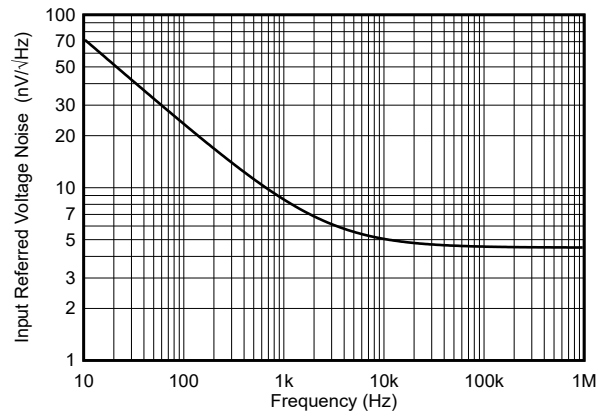


图 6-16. Voltage Noise Density vs Frequency

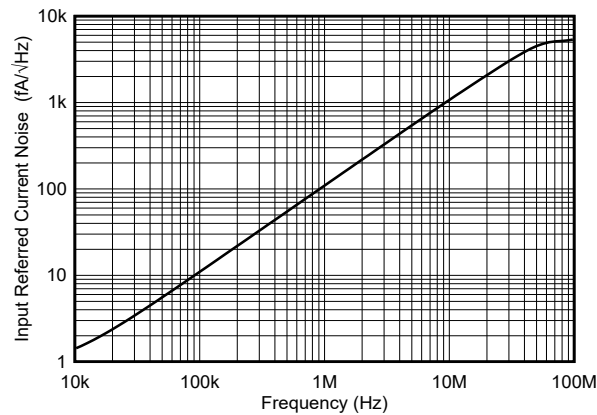


图 6-17. Current Noise Density vs Frequency

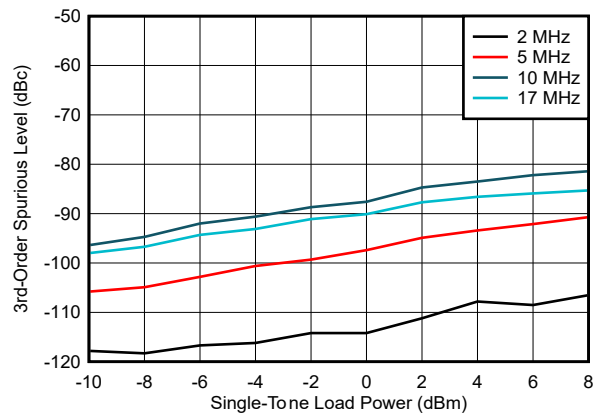


图 6-18. Intermodulation Distortion vs Load Power

## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \approx 25^\circ\text{C}$  (unless otherwise noted)

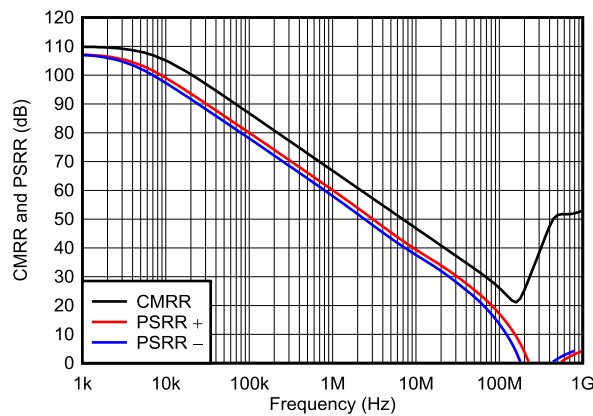


图 6-19. Common-Mode and Power-Supply Rejection Ratio vs Frequency

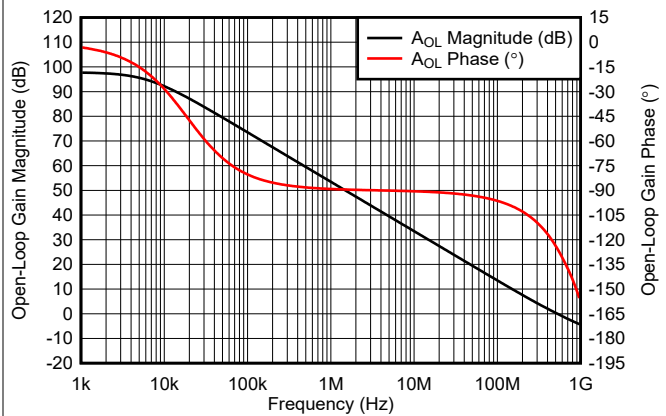


图 6-20. Open-Loop Gain Magnitude and Phase vs Frequency

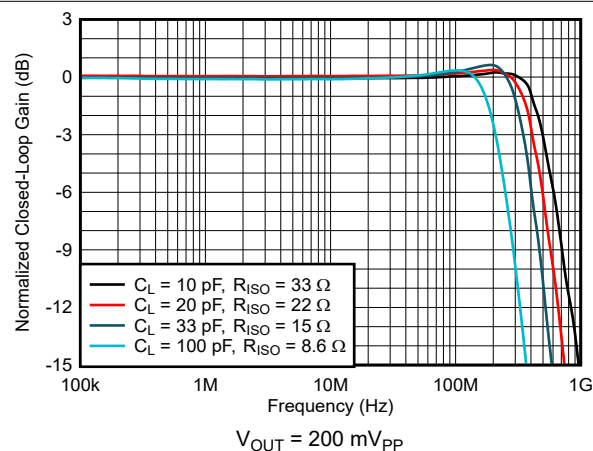


图 6-21. Frequency Response vs Capacitive Load

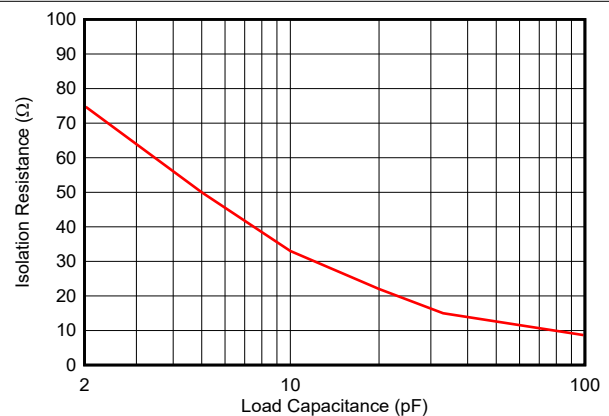


图 6-22. Recommended Isolation Resistor vs Capacitive Load

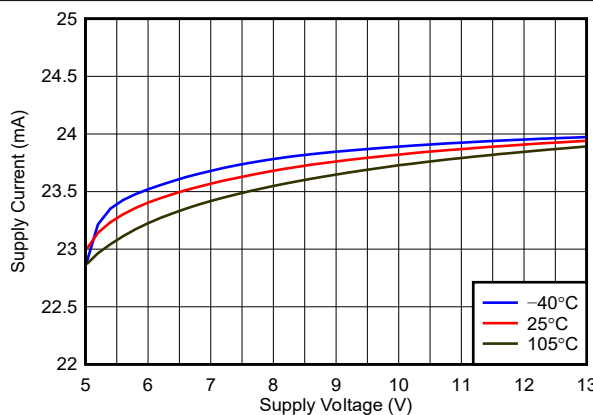


图 6-23. Quiescent Current vs Voltage Supply Over Temperature

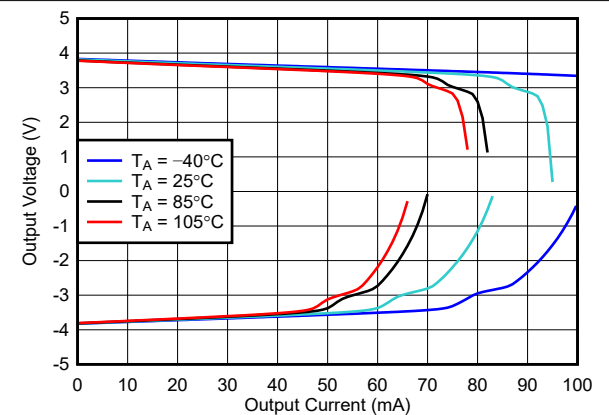


图 6-24. Output Voltage vs Output Current Over Temperature

## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \cong 25^\circ\text{C}$  (unless otherwise noted)

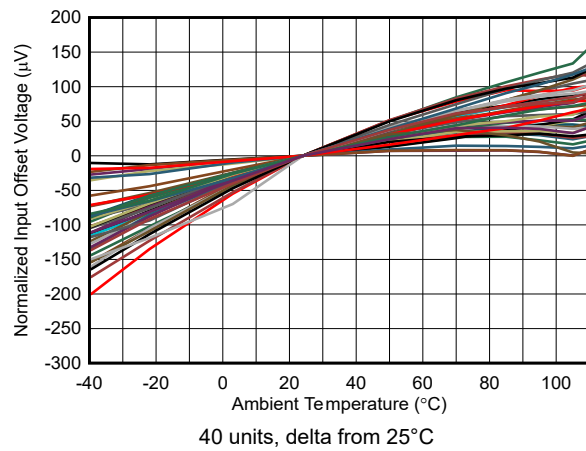


图 6-25. Input Offset Voltage vs Temperature

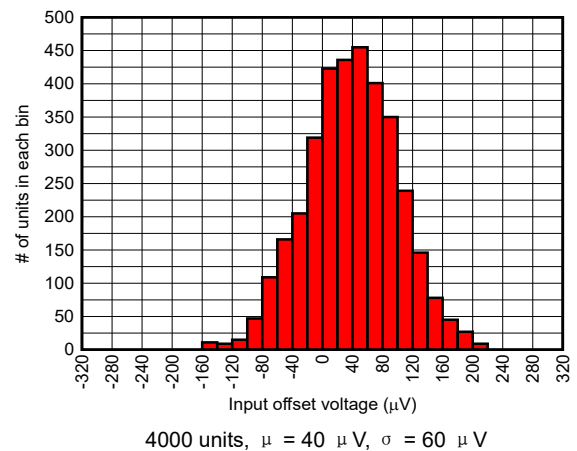


图 6-26. Input Offset Voltage Histogram

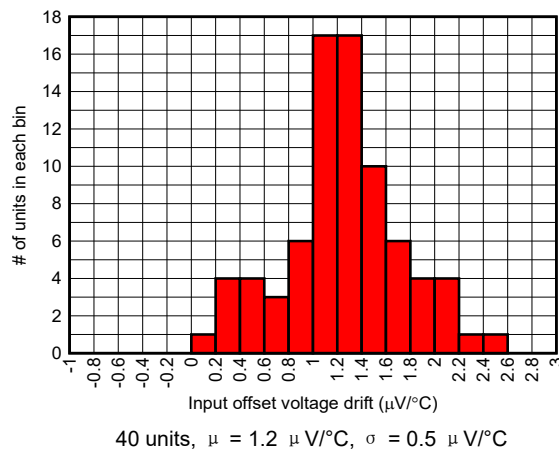


图 6-27. Input Offset Voltage Drift Histogram

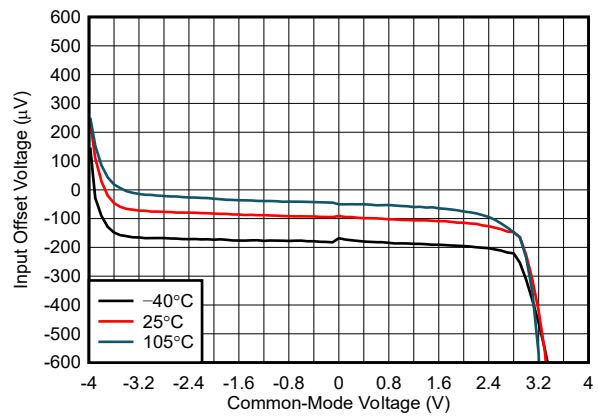


图 6-28. Input Offset Voltage vs Common-Mode Voltage Over Temperature

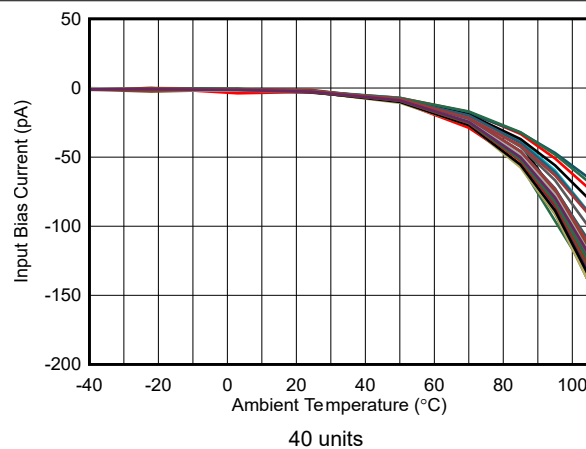


图 6-29. Input Bias Current vs Temperature

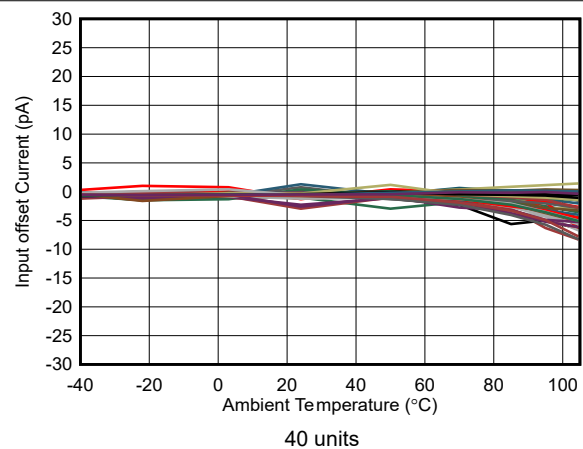


图 6-30. Input Offset Current vs Temperature

## 6.6 Typical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at  $G = 1\text{ V/V}$ ,  $R_F = 0\ \Omega$ ,  $R_F = 250\ \Omega$  for other gains,  $R_L = 100\ \Omega$ , input and output referenced to mid-supply, and  $T_A \approx 25^\circ\text{C}$  (unless otherwise noted)

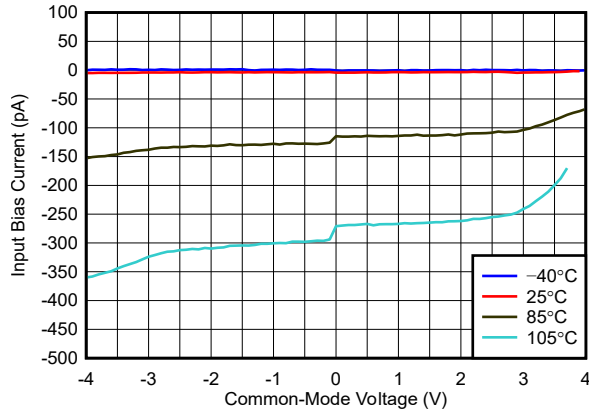


图 6-31. Input Bias Current vs Common-Mode Voltage Over Temperature

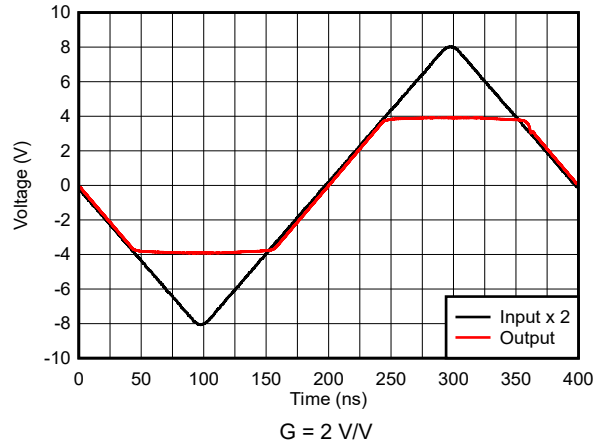


图 6-32. Noninverting Output Overdrive Recovery

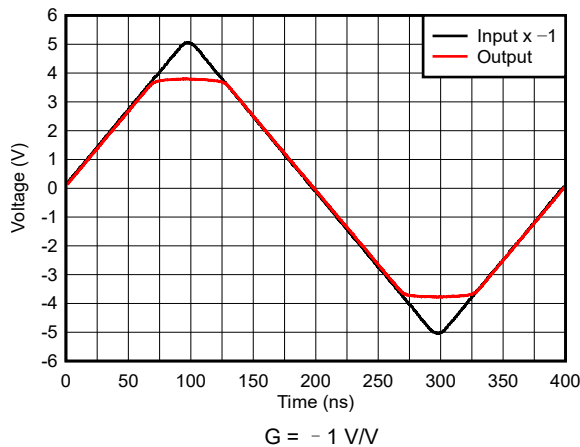


图 6-33. Inverting Output Overdrive Recovery

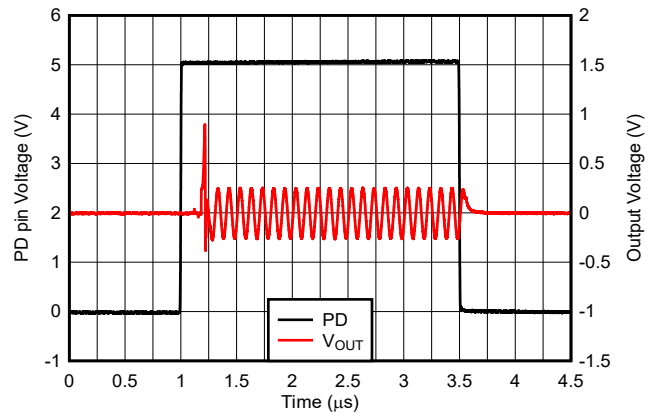


图 6-34. Turn-On and Turn-Off Waveform

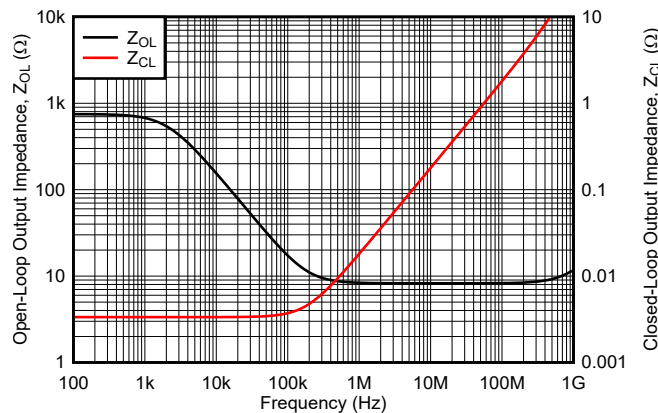


图 6-35. Open-Loop and Closed-Loop Output Impedance vs Frequency

## 7 Detailed Description

### 7.1 Overview

The OPA817 is a high-voltage, unity-gain-stable, 400-MHz gain-bandwidth product (GBWP), voltage-feedback operational amplifier (op amp) featuring a 4.5-nV/√Hz, low-noise, JFET input stage. The low offset voltage (250 μV maximum), offset voltage drift (3.5 μV/°C maximum), and unity gain bandwidth of 800 MHz makes this device an excellent choice for high-input-impedance, high-speed, data-acquisition front-ends. The high voltage capability combined with 1000 V/μs slew rate enables applications needing wide output swings (9 V<sub>PP</sub> at V<sub>S</sub> = 12 V) for high-frequency signals such as those often found in medical instrumentation, optical front-end, test, and measurement applications. The low noise JFET input with pico-amperes of bias current makes the device attractive in high-gain TIA applications and in test and measurement front-ends. OPA817 also features a power-down mode that disables the core amplifier for power savings.

The OPA817 is built using TI's proprietary high-voltage, high-speed, complementary bipolar SiGe process.

### 7.2 Functional Block Diagram

The OPA817 is a conventional voltage feedback op amp with two high-impedance inputs and a low-impedance output. 图 7-1 and 图 7-2 shows two standard amplifier configuration examples that are supported for this device. The reference voltage (V<sub>REF</sub>) level shifts the dc operating point for each configuration, which is typically set to mid-supply in single-supply operation. V<sub>REF</sub> is typically set to ground in split-supply applications.

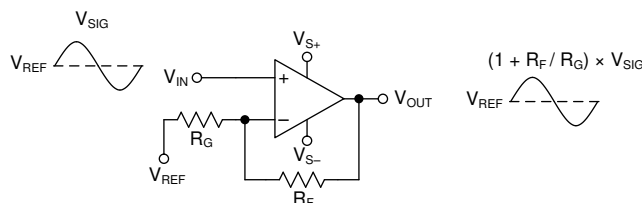


图 7-1. Noninverting Amplifier

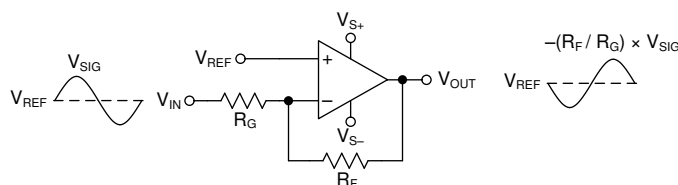
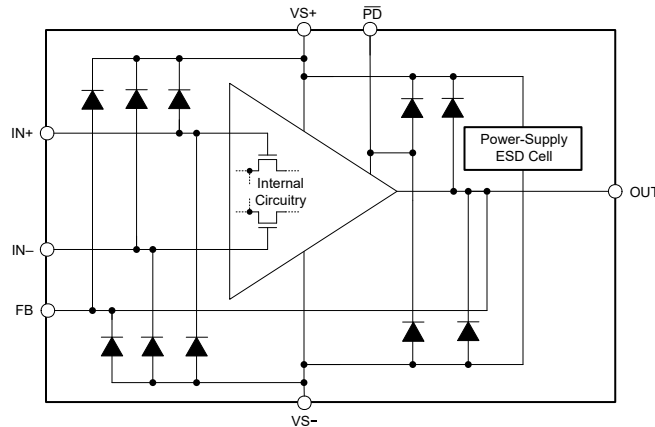


图 7-2. Inverting Amplifier

## 7.3 Feature Description

### 7.3.1 Input and ESD Protection

The OPA817 is built using a very high-speed complementary bipolar process. The internal junction breakdown voltages are relatively low for these very small geometry devices. These breakdowns are reflected in the [Absolute Maximum Ratings](#). As [图 7-3](#) shows, all device pins are protected with internal ESD protection diodes to the power supplies.

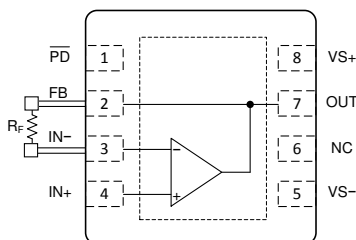


**图 7-3. Internal ESD Protection**

The diodes provide moderate protection to input overdrive voltages beyond the supplies as well. The protection diodes can typically support a 10-mA continuous current. Where higher currents are possible (for example, in systems with  $\pm 12$ -V supply parts driving into the OPA817), add current limiting series resistors in series with the two inputs to limit the current. Keep these resistor values as low as possible because high values degrade both noise performance and frequency response. There are no back-to-back ESD diodes between  $V_{IN+}$  and  $V_{IN-}$ . As a result, the differential input voltage between  $V_{IN+}$  and  $V_{IN-}$  is entirely absorbed by the  $V_{GS}$  of the input JFET differential pair and must not exceed the voltage ratings shown in the [Absolute Maximum Ratings](#).

### 7.3.2 Feedback Pin

For high-speed analog design, minimizing parasitic capacitances and inductances is critical to get the best performance from a high-speed amplifier such as the OPA817. Parasitic capacitance and inductance are especially detrimental in the feedback path and at the inverting input, and result in undesired poles and zeroes in the feedback that can result in reduced phase margin or instability. Techniques used to correct this phase margin reduction often result in reduced application bandwidth. To keep system engineers from making these tradeoff choices and to simplify the PCB layout, OPA817 features an FB pin on the same side as the inverting input pin ( $IN-$ ). [图 7-4](#) shows how this feature allows for a very short feedback resistor ( $R_F$ ) connection between the FB and the  $IN-$  pin, which minimizes parasitic capacitance and inductance with minimal PCB design effort. Internally the FB pin is connected to OUT pin through metal routing on the silicon. Because of the fixed metal sizing of this connection, the FB pin has limited current carrying capability. Therefore, the specifications in the [Absolute Maximum Ratings](#) section must be adhered to for continuous operation. For applications requiring high accuracy, the metal routing resistance from OUT to FB can be considered and added to  $R_F$  to set the desired gain. For more information, see [节 6.5](#).

图 7-4.  $R_F$  Connection Between FB and IN - Pins

### 7.3.3 FET-Input Architecture With Wide Gain-Bandwidth Product

图 7-5 shows the open-loop gain and phase response of the OPA817. The GBWP of an op amp is measured in the 20-dB/decade constant slope region of the  $A_{OL}$  magnitude plot. The open-loop gain of 60 dB for the OPA817 is along this 20-dB/decade slope, and the corresponding frequency intercept is at 400 kHz. Converting 60 dB to linear units (1000 V/V) and multiplying by the 400-kHz frequency intercept gives a GBWP of 400 MHz for the OPA817. The  $A_{OL}$  Bode plot shows that the second pole in the  $A_{OL}$  response occurs after  $A_{OL}$  magnitude drops to less than 0 dB (1 V/V). The location of second pole results in phase change of less than  $180^\circ$  at 0 dB  $A_{OL}$ , indicating that the amplifier is stable in a gain of 1 V/V. Amplifiers such as the OPA817 that are JFET-input, low noise and unity-gain stable can be used as high-input-impedance buffers and gain stages with minimal degradation in SNR. The device has 800 MHz of SSBW in a gain-of-1-V/V configuration with a phase margin of approximately  $55^\circ$ .

The low input offset voltage and offset voltage drift of OPA817 makes the device an excellent amplifier for high-precision, high-input-impedance, wideband, data-acquisition-system front-ends. 图 8-2 shows that the system benefits from the low noise JFET input stage with pico-amperes of input bias current to achieve higher precision at 1-M $\Omega$  input impedance setting and higher SNR at 50- $\Omega$  input impedance setting simultaneously in a typical data-acquisition front-end circuit.

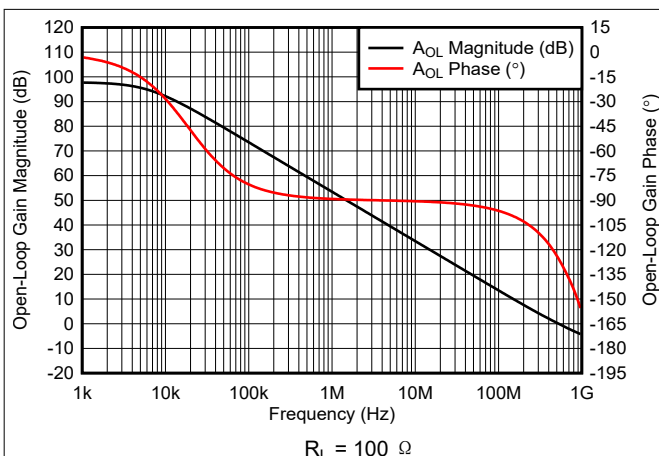


图 7-5. Open-Loop Gain Magnitude and Phase vs Frequency

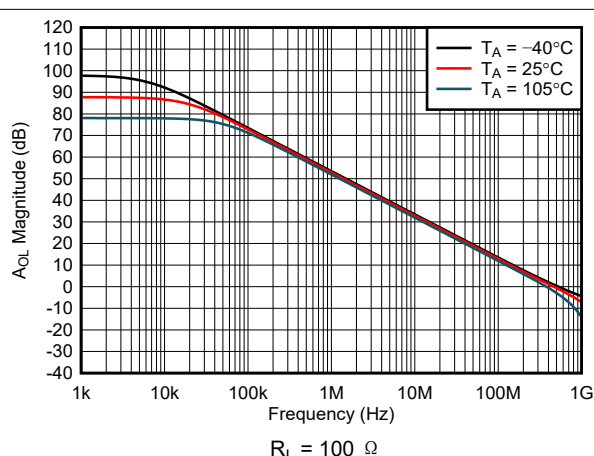


图 7-6. Open-Loop Gain Magnitude vs Temperature

## 7.4 Device Functional Modes

### 7.4.1 Power-Down ( $\overline{PD}$ ) Pin

The OPA817 includes a power-down mode for low-power or standby operation and only consumes 55  $\mu$ A (typical) of current when placed in power-down mode. Low-power systems that are only active for small periods of time benefit from this feature. The OPA817 transitions from low-power mode to active-mode in 300 ns (typical). For power-down pin control thresholds, see also 节 6.5. An internal pull-up resistor of 2-M $\Omega$  provides a weak pull-up to  $V_{S+}$  if  $\overline{PD}$  is left unconnected. Use an external 1-nF capacitor to  $V_{S+}$  to avoid external noise



coupling and false triggering. If the power-down mode is not used in an application, then connect the  $\overline{\text{PD}}$  pin to  $V_{S+}$ .

## 8 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 8.1 Application Information

#### 8.1.1 Wideband, High-Input-Impedance DAQ Front End

The OPA817 features a unique combination of high GBWP, low-input voltage noise, and the dc precision of a trimmed JFET-input stage to provide a high input impedance for a voltage-feedback amplifier. 图 8-2 shows how the very high GBWP of 400 MHz and high large signal bandwidth of 250 MHz can be used to either deliver wide signal bandwidths at high gains or to extend the achievable bandwidth or gain in typical high-speed, high-input impedance data acquisition front-end applications. To achieve the full performance of the OPA817, careful attention to the printed circuit board (PCB) layout and component selection is required as discussed in the following sections of this data sheet. OPA817 also features a wider supply range thereby enabling a wider common-mode input range to support higher input signal swings.

图 8-1 shows the noninverting gain of +2 V/V circuit used as the basis for most of the *Typical Characteristics*. Most of the curves were characterized using signal sources with 50- $\Omega$  driving impedance, and with measurement equipment presenting a 50- $\Omega$  load impedance. As 图 8-1 shows, the 49.9- $\Omega$  shunt resistor at the  $V_{IN}$  terminal matches the source impedance of the test generator, while the 49.9- $\Omega$  series resistor at the  $V_O$  terminal provides a matching resistor for the measurement equipment load. Generally, data sheet voltage swing specifications are at the output pin ( $V_O$  in 图 8-1) while output power specifications are at the matched 50- $\Omega$  load. As shown in 图 8-1, the total 100- $\Omega$  load at the output combined with the 250- $\Omega$  total feedback network load presents the OPA817 with an effective output load of 83.3  $\Omega$  for the circuit.

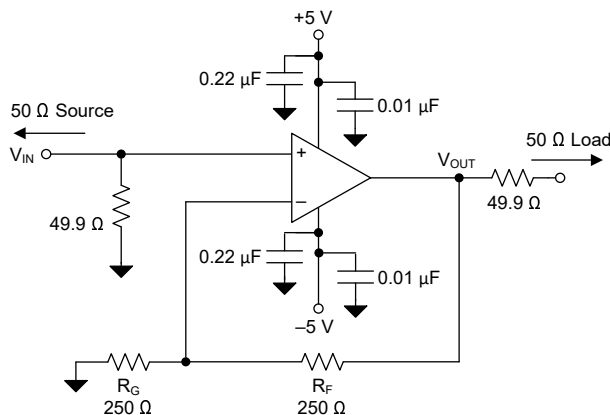


图 8-1. Noninverting  $G = +2$  V/V Configuration and Test Circuit

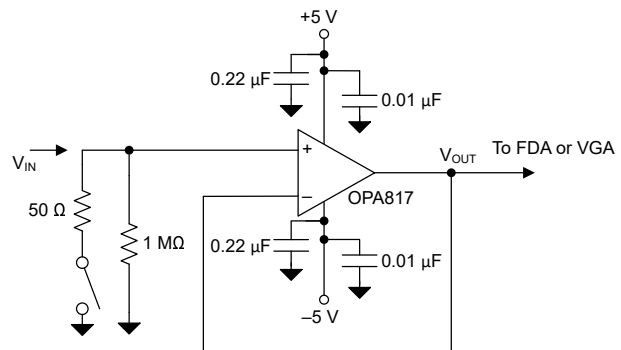


图 8-2. High Input Impedance DAQ Front-End

Voltage-feedback operational amplifiers, unlike current feedback amplifiers, can use a wide range of resistor values to set the gain. As 图 8-1 shows, always keep the parallel combination of  $R_F \parallel R_G$  to a lower value to retain a controlled frequency response for the noninverting voltage amplifier. In the noninverting configuration, the parallel combination of  $R_F \parallel R_G$  forms a pole with the parasitic input capacitance at the inverting node of the OPA817 (including layout parasitic capacitance). For best performance, ensure that this pole is at a frequency greater than the closed-loop bandwidth for the OPA817.

## 8.2 Typical Applications

### 8.2.1 High-Input-Impedance, 200-MHz, Digitizer Front-End Amplifier Design

The OPA817 offers a wide large-signal bandwidth, high-slew rate along with high-input impedance making this device an excellent choice for data-acquisition systems. The trimmed dc precision of the OPA817 enables direct use of the device as a front-end amplifier where low offset and offset voltage drift is needed.

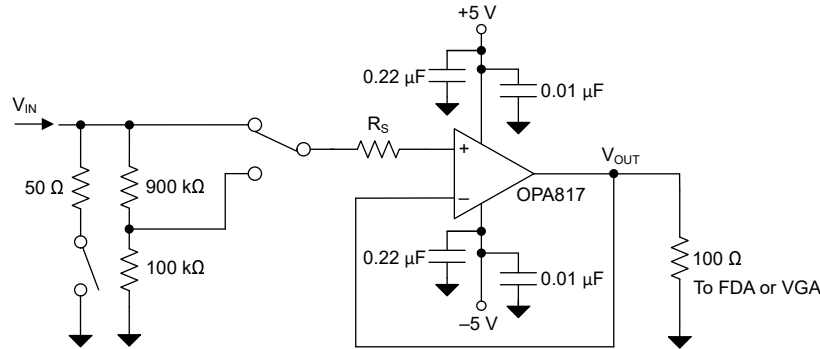


图 8-3. High-Input-Impedance, 200MHz, Digitizer Front-End Amplifier

#### 8.2.1.1 Design Requirements

表 8-1 lists the design requirements for a high-input-impedance, 200-MHz, digitizer front-end amplifier.

表 8-1. Design Requirements

SPECIFICATION	VALUE
Input impedance	1 M $\Omega$ / 50 $\Omega$
Input range (1 M $\Omega$ / 50 $\Omega$ )	20 V <sub>PP</sub> / 2 V <sub>PP</sub>
Offset drift	3.5 $\mu$ V/ $^{\circ}$ C maximum
Noise at highest resolution (50 $\Omega$ Input)	80 $\mu$ V <sub>RMS</sub>

#### 8.2.1.2 Detailed Design Procedure

- **Input Impedance:** The JFET-input stage of the OPA817 offers gigaohms of input impedance, and therefore enables the front-end to be terminated with a 1-M $\Omega$  resistor while achieving excellent precision. A 50- $\Omega$  resistance can also be switched in offering matched termination for high-frequency signals. The OPA817, therefore, enables the designer to use both 1-M $\Omega$  and 50- $\Omega$  termination in the same signal chain.
- **Noise:** The total noise of the front-end amplifier is the function of the voltage and current noise of the OPA817, input termination, and the resistors thermal noise. In 50- $\Omega$  mode, the dominant noise source, however, is contributed by the voltage noise of the OPA817 as a result of noise being integrated over the complete bandwidth. Thus, the total RMS noise of the front-end amplifier is approximately equal to the voltage noise of OPA817 over 200 MHz.

The specified input referred voltage noise of the OPA817 is 4.5 nV/ $\sqrt{\text{Hz}}$ ; see also 节 6.5. The total integrated RMS noise at the input in a bandwidth of 200 MHz is given by the following equation:

$$E_{\text{NRMS}} = 4.5 \text{ nV}/\sqrt{\text{Hz}} \times \sqrt{(200 \text{ MHz} \times 1.57)} = 80 \mu\text{V}_{\text{RMS}}. \quad (1)$$

The Brickwall correction factor of 1.57 is applied assuming the bandwidth is limited to 200 MHz with a single pole RC-filter before digitizing the signal with the ADC. Detailed calculations can be found at [TI Precision Labs - Op Amps: Noise - Spectral Density](#).

- Optimizing Overshoot:** The OPA817 features an internal slew-boost circuit to deliver fast rise-time in applications needing high slew rates such as when configured as a transimpedance amplifier. For applications where overshoot needs to be limited, the input slew rates can be limited with introducing a series resistance ( $R_S$ ) as shown in 图 8-3. The resistance  $R_S$  forms a low pass filter with the input capacitance of approximately 2.6 pF at the noninverting pin of the OPA817 limiting the input slew rate to the amplifier. 图 8-4 shows how limiting the input slew rate to the amplifier results in good overshoot performance, and 图 8-5 shows how this achieves a small signal and large signal bandwidth of 200 MHz.

### 8.2.1.3 Application Curves

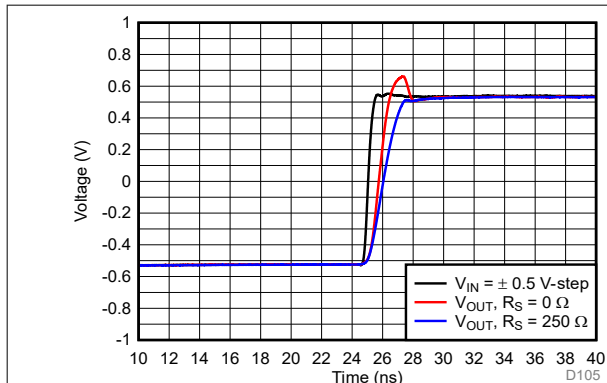


图 8-4. Step Response of Digitizer Front-End

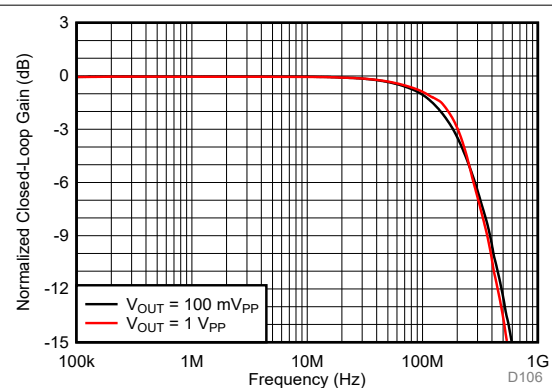


图 8-5. Frequency Response for  $R_S = 250 \Omega$

## 8.3 Power Supply Recommendations

The OPA817 is intended to operate on supplies ranging from 6 V to 12.6 V. OPA817 supports single-supply, split, balanced, and unbalanced bipolar supplies. When operating at supplies below 8 V, consideration must be given to the input common-mode range of the amplifier. Under these supply conditions, the common-mode must be biased appropriately for linear operation. Thus, the limit to lower supply voltage operation is the usable input voltage range for the JFET-input stage.

## 8.4 Layout

### 8.4.1 Layout Guidelines

Achieving optimized performance with a high-frequency amplifier such as the OPA817 requires careful attention to board layout parasitics and external component types. Recommendations that optimize performance include the following:

- Minimize parasitic capacitance to any ac ground for all of the signal I/O pins.** Parasitic capacitance on the output and inverting input pins can cause instability. On the noninverting input, parasitic capacitance can react with the source impedance to cause unintentional bandlimiting. Ground and power metal planes act as one of the plates of a capacitor while the signal trace metal acts as the other separated by PCB dielectric. To reduce this unwanted capacitance, take care to minimize the routing of the feedback network. A plane cutout around and underneath the inverting input pin on all ground and power planes is recommended. Otherwise, ensure that ground and power planes are unbroken elsewhere on the board.

2. **Minimize the distance (less than 0.25-in) from the power-supply pins to high-frequency decoupling capacitors.** Use high quality, 100-pF to 0.1-μF, C0G and NPO-type decoupling capacitors with voltage ratings at least three times greater than the amplifiers maximum power supplies to maintain a low-impedance path to the amplifiers power-supply pins across the amplifiers gain bandwidth specification. At the device pins, do not allow the ground and power plane layout to be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. Use larger (2.2-μF to 6.8-μF) decoupling capacitors, effective at lower frequency, on the supply pins. Place these capacitors further from the device and share the capacitors among several devices in the same area of the PCB.
3. **Careful selection and placement of external components preserves the high frequency performance of the OPA817.** Use low-reactance resistors. Surface-mount resistors work best and allow a tighter overall layout. Never use wirewound type resistors in a high frequency application. The output pin and inverting input pin are the most sensitive to parasitic capacitance; therefore, always position the feedback and series output resistor, if any, as close as possible to the inverting input and the output pin, respectively. Place other network components, such as noninverting input termination resistors, close to the package. Even with a low parasitic capacitance at the noninverting input, high external resistor values can create significant time constants that can degrade performance. When OPA817 is configured as a conventional voltage amplifier, keep the resistor values as low as possible and consistent with the load driving considerations. Decrease the resistor values to keep the resistor noise terms low and minimizes the effect of the parasitic capacitance. However, lower resistor values increase the dynamic power consumption because  $R_F$  and  $R_G$  become part of the output load network of the amplifier.
4. **Heat dissipation is important for a high voltage device like the OPA817.** For good thermal relief, connect the thermal pad to a heat-spreading plane that is preferably on the same layer as the OPA817, or connected by as many vias as possible if the plane is on a different layer. Have at least one heat-spreading plane on the same layer as the OPA817 that makes direct connection to the thermal pad with wide metal for good thermal conduction when operating at high ambient temperatures. If more than one heat-spreading plane is available, then connect the heat-spreading planes by a number of vias to further improve the thermal conduction.

#### 8.4.1.1 Thermal Considerations

The OPA817 does not require a heat sink or airflow in most applications. The maximum allowed junction temperature sets the maximum allowed internal power dissipation as described in the following paragraph. Do not allow the maximum junction temperature to exceed 150°C.

Operating junction temperature ( $T_J$ ) is given by  $T_A + P_D \times R_{\theta JA}$ . The total internal power dissipation ( $P_D$ ) is the sum of quiescent power ( $P_{DQ}$ ) and additional power dissipated in the output stage ( $P_{DL}$ ) to deliver load power. Quiescent power is the specified no-load supply current times the total supply voltage across the part.  $P_{DL}$  depends on the required output signal and load, but for a grounded resistive load,  $P_{DL}$  is at a maximum when the output is fixed at a voltage equal to 1/2 of either supply voltage (for balanced bipolar supplies). Under this condition  $P_{DL} = V_S^2 / (4 \times R_L)$  where  $R_L$  includes feedback network loading.

The power in the output stage and not into the load determines internal power dissipation.

As a worst-case example, compute the maximum  $T_J$  using the OPA817 in the circuit of [图 8-1](#) operating at the maximum specified ambient temperature of +105°C and driving a grounded 100-Ω load.


$$P_D = 10 \text{ V} \times 23.5 \text{ mA} + 5^2 / (4 \times (100 \text{ } \Omega \parallel 500 \text{ } \Omega)) \cong 310 \text{ mW}$$



$$\text{Maximum } T_J = 105^\circ\text{C} + (0.310 \text{ W} \times 64.9^\circ\text{C/W}) = 125.1^\circ\text{C}.$$

All actual applications operate at lower internal power and junction temperature.

### 8.4.2 Layout Example

Representative schematic

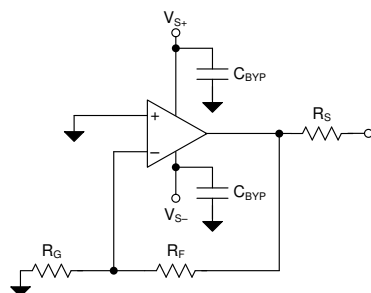

-  Ground and power plane exist on inner layers.
-  Ground and power plane removed from inner layers. Ground fill on outer layers also removed.

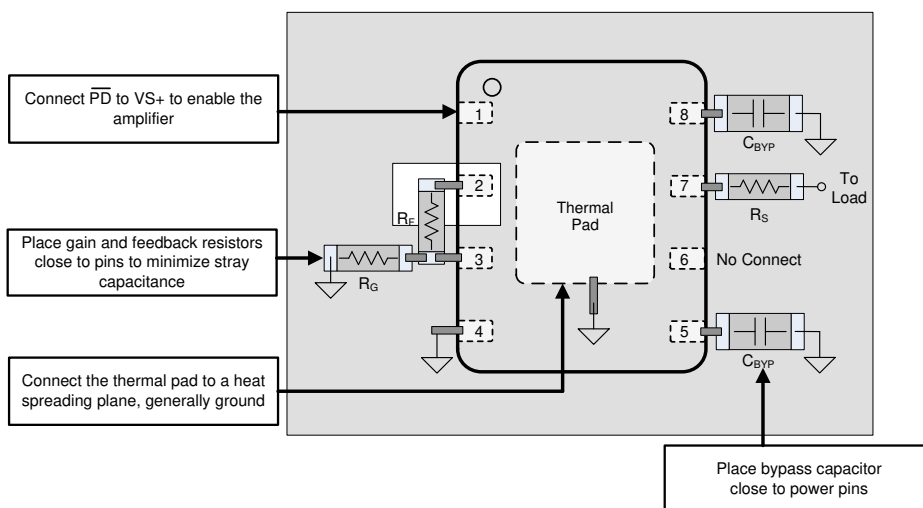


图 8-6. Layout Recommendation

## 9 Device and Documentation Support

### 9.1 Device Support

#### 9.1.1 Development Support

- Texas Instruments, [Wide Bandwidth Optical Front-end Reference Design](#)

### 9.2 Documentation Support

#### 9.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [OPA817EVM User's Guide](#)
- Texas Instruments, [Transimpedance Considerations for High-Speed Amplifiers](#) application report
- Texas Instruments, [Maximizing the Dynamic Range of Analog TIA Front-End](#) technical brief
- Texas Instruments, [What You Need To Know About Transimpedance Amplifiers - Part 1](#)
- Texas Instruments, [What You Need To Know About Transimpedance Amplifiers - Part 2](#)
- Texas Instruments, [Training Video: How to Design Transimpedance Amplifier Circuits](#)
- Texas Instruments, [Training Video: High-Speed Transimpedance Amplifier Design Flow](#)

### 9.3 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 9.4 支持资源

**TI E2E™ 中文支持论坛** 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

### 9.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 9.6 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 9.7 术语表

**TI 术语表**      本术语表列出并解释了术语、首字母缩略词和定义。

## 10 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision A (December 2022) to Revision B (December 2024)	Page
• Changed PD pin description to fix incorrect high and low settings.....	3

**Changes from Revision \* (July 2022) to Revision A (December 2022)****Page**

- 将数据表的状态从 预告信息 更改为 量产数据 ..... [1](#)

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">OPA817DTKR</a>	Active	Production	WSO (DTK)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	817
OPA817DTKR.B	Active	Production	WSO (DTK)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	817

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA817DTKR	WSO	DTK	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA817DTKR	WS0N	DTK	8	3000	367.0	367.0	35.0

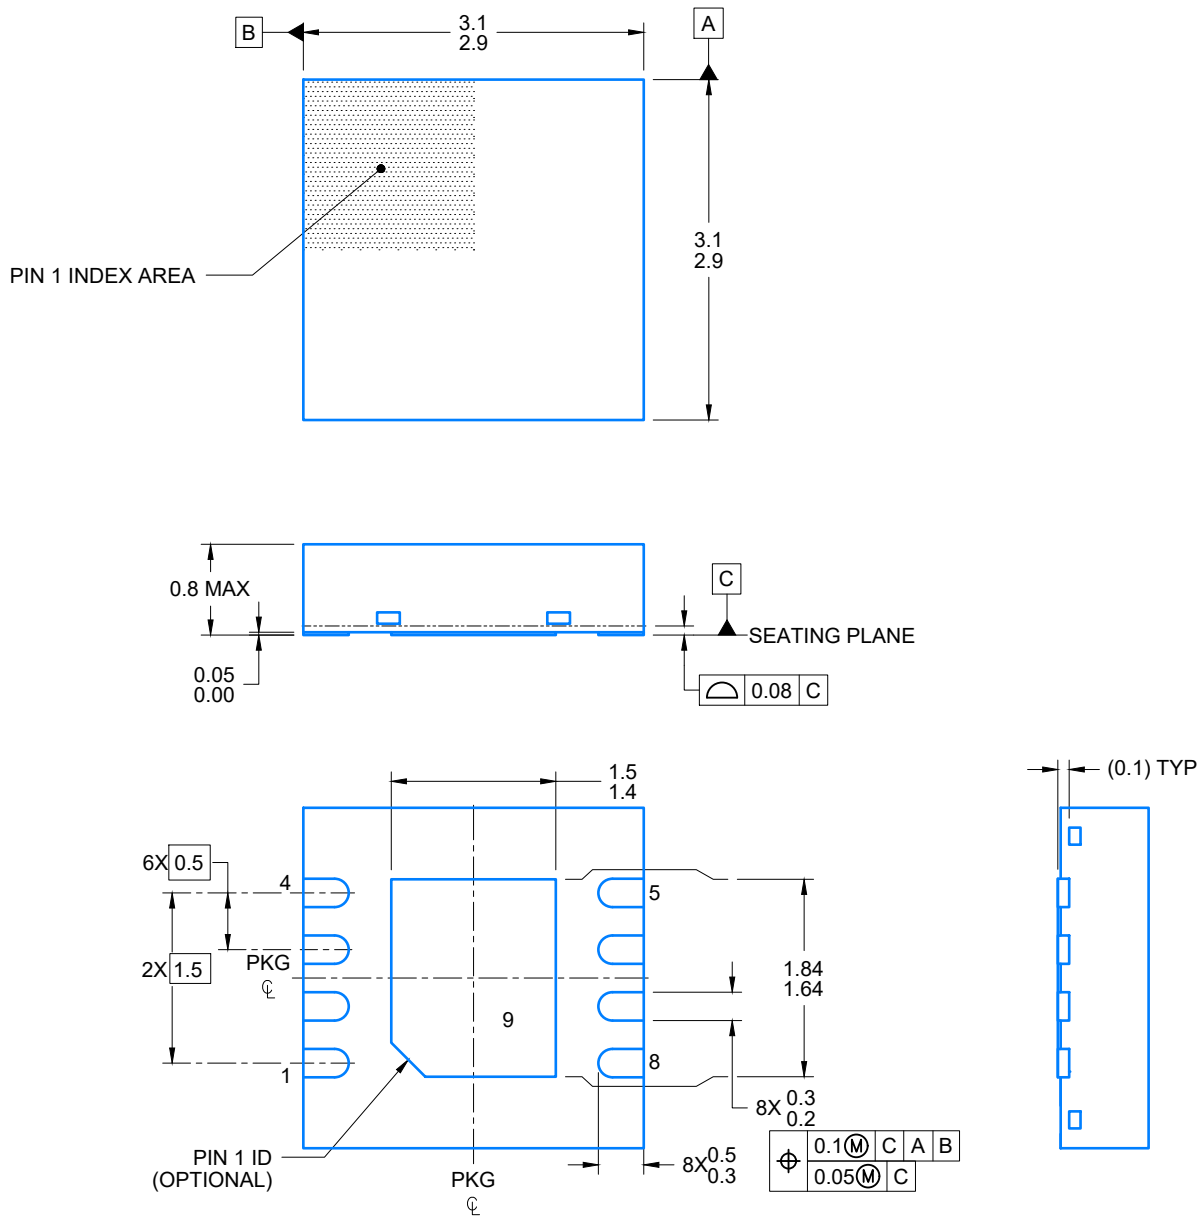


4224357 / B 05/2025

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

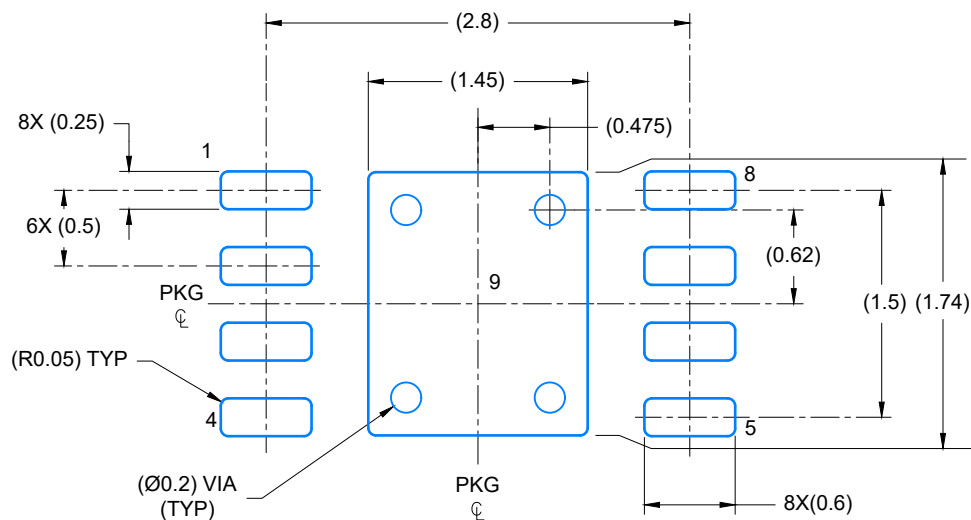

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 20X

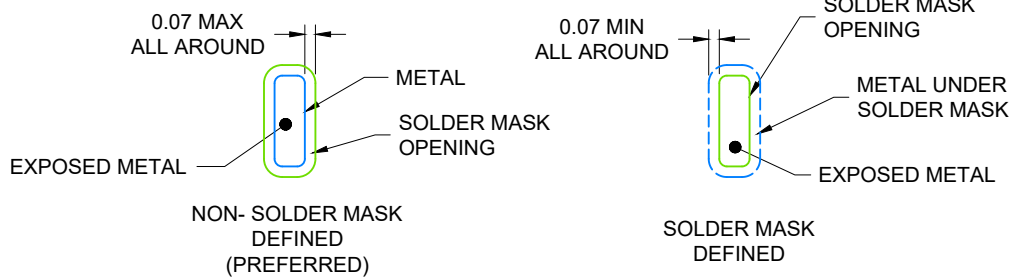


SOLDER MASK DETAILS

4224357 / B 05/2025

NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)) .
4. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

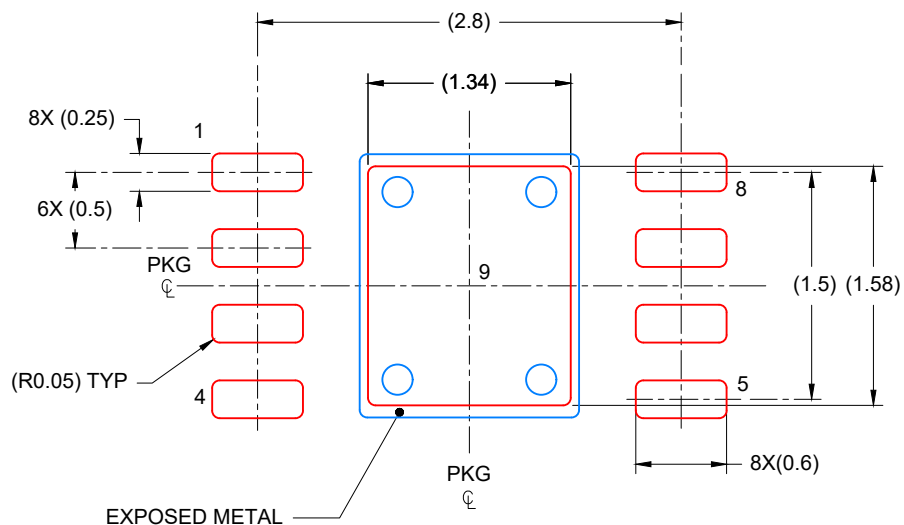

**SOLDER PASTE EXAMPLE**  
 BASED ON 0.125 mm THICK STENCIL  
 PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
 PADS 9: 84%  
 SCALE: 20X

4224357 / B 05/2025

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations..

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月