



# DAC5670-SP 14-Bit 2.4-GSPS Digital-to-Analog Converter (DAC)

## 1 Features

- 14-Bit Resolution
- 2.4-GSPS Max Update Rate DAC
- Dual Differential Input Ports
  - Even/Odd Demultiplexed Data
  - Maximum 1.2 GSPS Each Port, 2.4 GSPS Total
  - Dual 14-Bit Inputs + 1 Reference Bit
  - DDR Output Clock
  - DLL Optimized Clock Timing Synchronized to Reference Bit
  - LVDS and HyperTransport™ Voltage Level Compatible
  - Internal 100-Ω Terminations for Data and Reference Bit Inputs
- Selectable 2× Interpolation With  $F_s / 2$  Mixing
- Differential Scalable Current Outputs: 5 to 30 mA
- On-Chip 1.2-V Reference
- 3.3-V Analog Supply Operation
- Power Dissipation: 2 W
- 192-Ball CBGA (GEM) Package
- QML-V Qualified, SMD 5962-07247
- Military Temperature Range (–55°C to 125°C  $T_{case}$ )

## 2 Applications

- Test and Measurement: Arbitrary Waveform Generator
- Communications
- Engineering evaluation (/EM) samples are available

- (1) These units are intended for engineering evaluation only. They are processed to a non-compliant flow (that is, no burn-in, and so forth) and are tested to a temperature rating of 25°C only. These units are not suitable for qualification, production, radiation testing, or flight use. Parts are not warranted for performance over the full MIL specified temperature range of –55°C to 125°C or operating life.

## 3 Description

The DAC5670 is a 14-bit 2.4-GSPS DAC with dual demultiplexed differential input ports. The DAC5670 is clocked at the DAC sample rate and the two input ports run at a maximum of 1.2 GSPS. An additional reference bit input sequence is used to adjust the output clock delay to the data source, optimizing the internal data latching clock relative to this reference bit with a delay lock loop (DLL). Alternatively, the DLL may be bypassed and the timing interface managed by controlling DATA setup and hold timing to DLYCLK.

The DAC5670 can also accept data up to 1.2 GSPS using only the A input port. In the single port modes, options include: repeating the input sample (A\_ONLY mode), 2× interpolation by zero stuff (A\_ONLY\_ZS mode), or 2× interpolation by repeating and inverting the input sample (A\_ONLY\_INV). These modes are used to double the input sample rate up to 2.4 GSPS.


The DAC5670 operates with a single 3- to 3.6-V supply voltage. Power dissipation is 2 W at maximum operating conditions. The DAC5670 provides a nominal full-scale differential current-output of 20 mA, supporting both single-ended and differential applications. An on-chip 1.2-V temperature-compensated bandgap reference and control amplifier allows the user to adjust the full-scale output current from the nominal 20 mA to as low as 5 mA or as high as 30 mA.

### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
DAC5670-SP	CBGA (192)	19.00 mm × 19.00 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

### Simplified Schematic

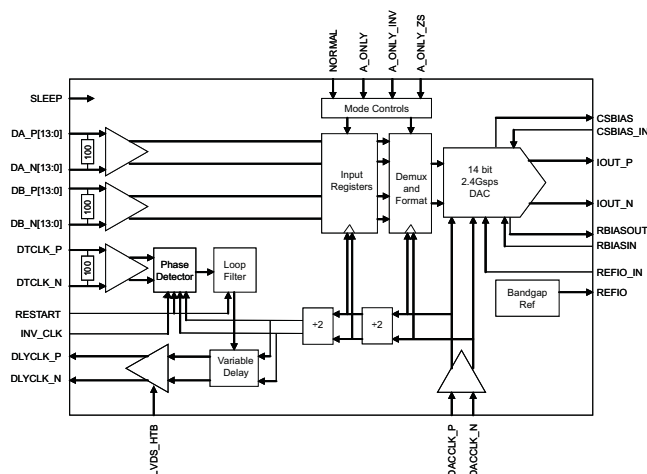

## Table of Contents

<b>1 Features</b> .....	<b>1</b>	8.1 Overview .....	15
<b>2 Applications</b> .....	<b>1</b>	8.2 Functional Block Diagram .....	15
<b>3 Description</b> .....	<b>1</b>	8.3 Feature Description .....	15
<b>4 Revision History</b> .....	<b>2</b>	8.4 Device Functional Modes .....	24
<b>5 Description (continued)</b> .....	<b>3</b>	<b>9 Application and Implementation</b> .....	<b>26</b>
<b>6 Pin Configuration and Functions</b> .....	<b>3</b>	9.1 Application Information .....	26
<b>7 Specifications</b> .....	<b>8</b>	9.2 Typical Application .....	26
7.1 Absolute Maximum Ratings .....	8	<b>10 Power Supply Recommendations</b> .....	<b>28</b>
7.2 Handling Ratings .....	8	<b>11 Layout</b> .....	<b>28</b>
7.3 Recommended Operating Conditions .....	8	11.1 Layout Guidelines .....	28
7.4 Thermal Information .....	9	11.2 Layout Example .....	28
7.5 DC Electrical Characteristics .....	9	<b>12 Device and Documentation Support</b> .....	<b>29</b>
7.6 AC Electrical Characteristics .....	10	12.1 Device Support .....	29
7.7 Digital Electrical Characteristics .....	11	12.2 Trademarks .....	29
7.8 Timing Requirements .....	11	12.3 Electrostatic Discharge Caution .....	29
7.9 Typical Characteristics .....	13	12.4 Glossary .....	29
<b>8 Detailed Description</b> .....	<b>15</b>	<b>13 Mechanical, Packaging, and Orderable Information</b> .....	<b>30</b>

## 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision E (December 2013) to Revision F	Page
• Added <i>Handling Ratings</i> table, <i>Feature Description</i> section, <i>Device Functional Modes</i> , <i>Application and Implementation</i> section, <i>Power Supply Recommendations</i> section, <i>Layout</i> section, <i>Device and Documentation Support</i> section, and <i>Mechanical, Packaging, and Orderable Information</i> section .....	1
• Corrected Setup/Hold Data to DLYCLK values to be frequency independent .....	11
• Updated <i>DLL Usage</i> section .....	17

Changes from Revision D (May 2013) to Revision E	Page
• Added /EM bullet to <i>Applications</i> section .....	1
• Deleted Available Options table .....	3

## 5 Description (continued)

The output current can be directly fed to the load with no additional external output buffer required. The device has been specifically designed for a differential transformer-coupled output with a 50-Ω doubly-terminated load.

The DAC5670 is available in a 192-ball CBGA package. The device is characterized for operation over the military temperature range (–55°C to 125°C  $T_{case}$ ).

## 6 Pin Configuration and Functions

**Ball Grid Array  
192 Pins**

	A	B	C	D	E	F	G	H	J	K	L	M	N	P
1		DB9_P	DB9_N	DB7_N	DB7_P	DB3_N	DB3_P	DB4_N	DB4_P	DB1_P	DB1_N	DB0_P	DB0_N	
2	DB10_N	GND	DB8_P	DB8_N	DB5_N	DB5_P	AVDD	AVDD	DB2_P	DB2_N	AVDD	GND	GND	CSCAP_IN
3	DB10_P	GND	AVDD	DB6_P	AVDD	GND	GND	GND	GND	AVDD	REFIO	AVDD	GND	CSCAP
4	DB12_P	DB11_P	AVDD	DB6_N	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	REFIO_IN	AVDD	AVDD	RBIAS_IN
5	DB12_N	DB11_N	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	GND	RBIAS_OUT
6	DLYCLK_N	DB13_N	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	IOUT_N	GND	
7	DLYCLK_P	DB13_P	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	IOUT_P	GND	GND
8	DTCLK_N	DA0_P	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	GND	GND	GND
9	DTCLK_P	DA0_N	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	GND	GND	LVDS_HTB
10	DA2_N	DA1_P	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	A_ONLY	AVDD
11	DA2_P	DA1_N	DA7_N	DA6_N	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	GND	GND		SLEEP
12	DA3_N	GND	DA7_P	DA6_P	AVDD	GND	GND	GND	GND	AVDD	INV_CLK	RESTART		A_ONLY_INV
13	DA3_P	GND	DA5_P	DA5_N	DA9_N	DA9_P	DA11_N	DA11_P	DA13_P	DA13_N	AVDD	GND	A_ONLY_Z	M_NORMAL
14		DA4_P	DA4_N	DA8_N	DA8_P	DA10_N	DA10_P	DA12_N	DA12_P	DACCLK_P	DACCLK_N		GND	

**Pin Functions**

PIN		TYPE	DESCRIPTION
NAME	NO.		
DACCLK_P	K14	I	External clock, sample clock for the DAC
DACCLK_N	L14	I	Complementary external clock, sample clock for the DAC
DLYCLK_P	A7	O	DDR-type data clock to data source
DLYCLK_N	A6	O	DDR-type data clock to data source complementary signal
DTCLK_P	A9	I	Input data toggling reference bit
DTCLK_N	A8	I	Input data toggling reference bit, complementary signal

**DAC5670-SP**

SGLS386F – JANUARY 2009–REVISED OCTOBER 2014

[www.ti.com](http://www.ti.com)
**Pin Functions (continued)**

PIN		TYPE	DESCRIPTION
NAME	NO.		
DA_P[13]	J13	I	Port A data bit 13 (MSB)
DA_N[13]	K13	I	Port A data bit 13 complement (MSB)
DA_P[12]	J14	I	Port A data bit 12
DA_N[12]	H14	I	Port A data bit 12 complement
DA_P[11]	H13	I	Port A data bit 11
DA_N[11]	G13	I	Port A data bit 11 complement
DA_P[10]	G14	I	Port A data bit 10
DA_N[10]	F14	I	Port A data bit 10 complement
DA_P[9]	F13	I	Port A data bit 9
DA_N[9]	E13	I	Port A data bit 9 complement
DA_P[8]	E14	I	Port A data bit 8
DA_N[8]	D14	I	Port A data bit 8 complement
DA_P[7]	C12	I	Port A data bit 7
DA_N[7]	C11	I	Port A data bit 7 complement
DA_P[6]	D12	I	Port A data bit 6
DA_N[6]	D11	I	Port A data bit 6 complement
DA_P[5]	C13	I	Port A data bit 5
DA_N[5]	D13	I	Port A data bit 5 complement
DA_P[4]	B14	I	Port A data bit 4
DA_N[4]	C14	I	Port A data bit 4 complement
DA_P[3]	A13	I	Port A data bit 3
DA_N[3]	A12	I	Port A data bit 3 complement
DA_P[2]	A11	I	Port A data bit 2
DA_N[2]	A10	I	Port A data bit 2 complement
DA_P[1]	B10	I	Port A data bit 1
DA_N[1]	B11	I	Port A data bit 1 complement
DA_P[0]	B8	I	Port A data bit 0 (LSB)
DA_N[0]	B9	I	Port A data bit 0 complement (LSB)
DB_P[13]	B7		Port B data bit 13 (MSB)
DB_N[13]	B6	I	Port B data bit 13 complement (MSB)
DB_P[12]	A4	I	Port B data bit 12
DB_N[12]	A5	I	Port B data bit 12 complement
DB_P[11]	B4	I	Port B data bit 11
DB_N[11]	B5	I	Port B data bit 11 complement
DB_P[10]	A3	I	Port B data bit 10
DB_N[10]	A2	I	Port B data bit 10 complement
DB_P[9]	B1	I	Port B data bit 9
DB_N[9]	C1	I	Port B data bit 9 complement
DB_P[8]	C2	I	Port B data bit 8
DB_N[8]	D2	I	Port B data bit 8 complement
DB_P[7]	E1	I	Port B data bit 7
DB_N[7]	D1	I	Port B data bit 7 complement
DB_P[6]	D3	I	Port B data bit 6
DB_N[6]	D4	I	Port B data bit 6 complement
DB_P[5]	F2	I	Port B data bit 5
DB_N[5]	E2	I	Port B data bit 5 complement

### Pin Functions (continued)

PIN		TYPE	DESCRIPTION
NAME	NO.		
DB_P[4]	J1	I	Port B data bit 4
DB_N[4]	H1	I	Port B data bit 4 complement
DB_P[3]	G1	I	Port B data bit 3
DB_N[3]	F1	I	Port B data bit 3 complement
DB_P[2]	J2	I	Port B data bit 2
DB_N[2]	K2	I	Port B data bit 2 complement
DB_P[1]	K1	I	Port B data bit 1
DB_N[1]	L1	I	Port B data bit 1 complement
DB_P[0]	M1	I	Port B data bit 0 (LSB)
DB_N[0]	N1	I	Port B data bit 0 complement (LSB)
IOUT_P	M7	O	DAC current output. Full scale when all input bits are set 1.
IOUT_N	M6	O	DAC complementary current output. Full scale when all input bits are 0.
RBIASOUT	P5	O	Rbias resistor current output
RBIASIN	P4	I	Rbias resistor sense input
CSCAP	P3	O	Current source bias voltage
CSCAP_IN	P2	I	Current source bias voltage sense input
REFIO	L3	O	Bandgap reference output
REFIO_IN	L4	I	Bandgap reference sense input
RESTART	M12	I	Resets DLL when high. Low for DLL operation. High for using external setup/hold timing.
LVDS_HTB	P9	I	DLYCLK_P/N control, LVDS mode when high, ht mode when low
INV_CLK	L12	I	Inverts the DLL target clocking relationship when high. Low for normal DLL operation. See <a href="#">DLL Usage</a> .
SLEEP	P11	I	Active-high sleep
NORMAL	P13	I	High for {a0,b0,a1,b1,a2,b2, ...} normal mode
A_ONLY	N10	I	High for {a0,a0,a1,a1,a2,a2, ...} A_only mode
A_ONLY_INV	P12	I	High for {a0,-a0, a1,-a1,a2,-a2, ...} A_only_inv mode
A_ONLY_ZS	N13	I	High for {a0,0,a1,0,a2,0, ...} A_only_zs mode

## DAC5670-SP

SGLS386F – JANUARY 2009–REVISED OCTOBER 2014

[www.ti.com](http://www.ti.com)

### Pin Assignments (Top View)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
<b>A</b>		DB10_N	DB10_P	DB12_P	DB12_N	DLYCLK_N	DLYCLK_P	DTCLK_N	DTCLK_P	DA2_N	DA2_P	DA3_N	DA3_P	
<b>B</b>	DB9_P	GND	GND	DB11_P	DB11_N	DB13_N	DB13_P	DA0_P	DA0_N	DA1_P	DA1_N	GND	GND	DA4_P
<b>C</b>	DB9_N	DB8_P	AVDD	AVDD	AVDD	GND	GND	GND	GND	AVDD	DA7_N	DA7_P	DA5_P	DA4_N
<b>D</b>	DB7_N	DB8_N	DB6_P	DB6_N	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	DA6_N	DA6_P	DA5_N	DA8_N
<b>E</b>	DB7_P	DB5_N	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	DA9_N	DA8_P
<b>F</b>	DB3_N	DB5_P	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	GND	DA9_P	DA10_N
<b>G</b>	DB3_P	AVDD	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	GND	DA11_N	DA10_P
<b>H</b>	DB4_N	AVDD	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	GND	DA11_P	DA12_N
<b>J</b>	DB4_P	DB2_P	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	GND	DA13_P	DA12_P
<b>K</b>	DB1_P	DB2_N	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	DA13_N	Dacclk_P
<b>L</b>	DB1_N	AVDD	REFIO	REFIO_IN	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	GND	Inv_clk	AVDD	Dacclk_N
<b>M</b>	DB0_P	GND	AVDD	AVDD	AVDD	IOUT_N	IOUT_P	GND	GND	AVDD	GND	Restart	GND	
<b>N</b>	DB0_N	GND	GND	AVDD	GND	GND	GND	GND	GND	A_only			A_only_z	GND
<b>P</b>		CSCap_IN	CSCap	RBIAS_IN	RBIAS_OUT		GND	GND	LVDS_htb	AVDD	Sleep	A_only_inv	M_Normal	

**Pin Assignments (Bottom View)**

	A	B	C	D	E	F	G	H	J	K	L	M	N	P
1		DB9_P	DB9_N	DB7_N	DB7_P	DB3_N	DB3_P	DB4_N	DB4_P	DB1_P	DB1_N	DB0_P	DB0_N	
2	DB10_N	GND	DB8_P	DB8_N	DB5_N	DB5_P	AVDD	AVDD	DB2_P	DB2_N	AVDD	GND	GND	CSCap_IN
3	DB10_P	GND	AVDD	DB6_P	AVDD	GND	GND	GND	GND	AVDD	REFIO	AVDD	GND	CSCap
4	DB12_P	DB11_P	AVDD	DB6_N	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	REFIO_IN	AVDD	AVDD	RBIAS_IN
5	DB12_N	DB11_N	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	GND	RBIAS_OUT
6	DLYCLK_N	DB13_N	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	IOOUT_N	GND	
7	DLYCLK_P	DB13_P	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	IOOUT_P	GND	GND
8	DTCLK_N	DA0_P	GND	AVDD	GND	GND	AVDD	AVDD	GND	GND	AVDD	GND	GND	GND
9	DTCLK_P	DA0_N	GND	AVDD	GND	GND	GND	GND	GND	GND	AVDD	GND	GND	LVDS_hb
10	DA2_N	DA1_P	AVDD	AVDD	GND	GND	GND	GND	GND	GND	AVDD	AVDD	A_only	AVDD
11	DA2_P	DA1_N	DA7_N	DA6_N	AVDD	AVDD	AVDD	AVDD	AVDD	AVDD	GND	GND		Sleep
12	DA3_N	GND	DA7_P	DA6_P	AVDD	GND	GND	GND	GND	AVDD	Inv_clk	Restart		A_only_inv
13	DA3_P	GND	DA5_P	DA5_N	DA9_N	DA9_P	DA11_N	DA11_P	DA13_P	DA13_N	AVDD	GND	A_only_z	M_Normal
14		DA4_P	DA4_N	DA8_N	DA8_P	DA10_N	DA10_P	DA12_N	DA12_P	Dacclk_P	Dacclk_N		GND	

## 7 Specifications

### 7.1 Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Supply voltage	AVDD to GND		5	V
DA_P[13..0], DA_N[13..0], DB_P[13..0], DB_N[13..0]	Measured with respect to GND	−0.3	AV <sub>DD</sub> + 0.3	V
NORMAL, A_ONLY, A_ONLY_INV, A_ONLY_ZS	Measured with respect to GND	−0.3	AV <sub>DD</sub> + 0.3	V
DTCLK_P, DTCLK_N, DACCLK_P, DACCLK_N	Measured with respect to GND	−0.3	AV <sub>DD</sub> + 0.3	V
LVDS_HTB, INV_CLK, RESTART	Measured with respect to GND	−0.3	AV <sub>DD</sub> + 0.3	V
IOUT_P, IOUT_N	Measured with respect to GND	AV <sub>DD</sub> − 0.5	AV <sub>DD</sub> + 1.5	V
CSCAP_IN, REFIO_IN, RBIAS_IN	Measured with respect to GND	−0.3	AV <sub>DD</sub> + 0.3	V
Peak input current (any input)			20	mA
Maximum junction temperature			150	°C
Lead temperature 1.6 mm (1/16 inch) from the case for 10 s			260	°C

- (1) Stresses above those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>stg</sub>	Storage temperature range		−65	150	°C
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	−250	250	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup>	−250	250	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
<b>GENERAL PARAMETERS</b>					
	Full-scale output current			30	mA
V <sub>REFIO</sub>	Input voltage range	1.14	1.2	1.26	V
AV <sub>DD</sub>	Analog supply voltage	3	3.3	3.6	V
f <sub>DAC</sub>	Output update rate			2.4	GSPS
<b>CMOS INTERFACE (SLEEP, RESTART, INV_CLK, NORMAL, A_ONLY, A_ONLY_INV, A_ONLY_ZS)</b>					
V <sub>IH</sub>	High-level input voltage	2	3		V
V <sub>IL</sub>	Low-level input voltage	0	0	0.8	V
<b>DIFFERENTIAL DATA INTERFACE (DA_P[13:0], DA_N[13:0], DB_P[13:0], DB_N[13:0], DTCLK_P, DTCLK_N)</b>					
V <sub>ITH</sub>	Differential input threshold	−100		100	mV
V <sub>ICOM</sub>	Input common mode	0.6		1.4	V
<b>CLOCK INPUTS (DACCLK_P, DACCLK_N)</b>					
DACCLK_P – DACCLK_N	Clock differential input voltage	200		1000	mV
	Clock duty cycle	40%		60%	
VCLKCM	Clock common mode	1		1.4	V



## 7.4 Thermal Information

THERMAL METRIC		TEST CONDITIONS	TYP	UNIT
R <sub>θJA</sub>	Junction-to-free-air thermal resistance	Non-thermally enhanced JEDEC standard PCB, per JESD-51, 51-3	41.3	°C/W
R <sub>θJC</sub>	Junction-to-case thermal resistance	MIL-STD-883 test method 1012	3.8	

## 7.5 DC Electrical Characteristics

T<sub>C,MIN</sub> = –55°C to T<sub>C,MAX</sub> = 125°C, typical values at 25°C, AVDD = 3 V to 3.6 V, I<sub>OUTFS</sub> = 20 mA (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
Resolution			14			bits
<b>DC ACCURACY</b>						
INL	Integral nonlinearity	T <sub>C,MIN</sub> to T <sub>C,MAX</sub> , f <sub>DAC</sub> = 640 kHz, f <sub>OUT</sub> = 10 kHz	–7.5	±1.5	7.5	LSB
DNL	Differential nonlinearity		–0.98	±0.8	1.75	
Monotonicity			14			bits
<b>ANALOG OUTPUT</b>						
Offset error		Mid-code offset	–0.45	±0.09	0.45	%FSR
Gain error		With external reference	–6.0	±1.6	6	%FSR
Gain error		With internal reference	–6.0	±1.6	6	%FSR
Output compliance range		I <sub>O(FS)</sub> = 20 mA, AVDD = 3.15 to 3.45 V	AVDD – 0.5		AVDD + 0.5	V
Output resistance				300 <sup>(2)</sup>		kΩ
Output capacitance		IOUT_P and IOUT_N single ended		13.7 <sup>(2)</sup>		pF
<b>REFERENCE OUTPUT</b>						
Reference voltage			1.14	1.2	1.26	V
Reference output current				100		nA
<b>REFERENCE INPUT</b>						
Input resistance				1 <sup>(2)</sup>		MΩ
Small-signal bandwidth				1.4		MHz
Input capacitance				3.2 <sup>(2)</sup>		pF
<b>TEMPERATURE COEFFICIENTS</b>						
Offset drift				75		ppm of FSR/°C
Gain drift		With external reference		75		ppm of FSR/°C
Gain drift		With internal reference		75		ppm of FSR/°C
Reference voltage drift				35		ppm/°C
<b>POWER SUPPLY</b>						
I <sub>AVDD</sub>	Analog supply current	f <sub>DAC</sub> = 2.4 GHz, NORMAL input mode		560	650	mA
I <sub>AVDD</sub>	Sleep mode, AVDD supply current	Sleep mode (SLEEP pin high)		150	180	mA
P	Power dissipation	f <sub>DAC</sub> = 2.4 GHz, NORMAL input mode		1800	2350	mW
PSRR	Power-supply rejection ratio	AVDD = 3.15 to 3.45 V		0.4	1.3	%FSR/V

(1) Typicals are characterization values at 25°C and AVDD = 3.3 V. These parameters are characterized, but not production tested.

(2) Specified by design.

**DAC5670-SP**

SGLS386F – JANUARY 2009–REVISED OCTOBER 2014

[www.ti.com](http://www.ti.com)
**7.6 AC Electrical Characteristics**
 $T_{C,MIN} = -55^{\circ}\text{C}$  to  $T_{C,MAX} = 125^{\circ}\text{C}$ , typical values at  $25^{\circ}\text{C}$ ,  $AVDD = 3$  to  $3.6\text{ V}$ ,  $I_{OUTFS} = 20\text{ mA}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
<b>ANALOG OUTPUT</b>						
$t_{s(DAC)}$	Output setting time to 0.1%	Mid-scale transition		3.5		ns
$t_{pd}$	Output propagation delay			7 DACCLK + 1.5 ns		
$t_{r(IOUT)}$	Output rise time, 10% to 90%			280		ps
$t_{f(IOUT)}$	Output fall time, 90% to 10%			280		ps
<b>AC PERFORMANCE</b>						
SFDR	Spurious-free dynamic range	$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 100\text{ MHz}$ , Dual-port mode, 0 dBFS	46	55		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 200\text{ MHz}$ , Dual-port mode, 0 dBFS		51		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 300\text{ MHz}$ , Dual-port mode, 0 dBFS	31	36		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, 0 dBFS	35	43		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, -6 dBFS		47		
SNR	Signal-to-noise ratio	$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 100\text{ MHz}$ , Dual-port mode, 0 dBFS	58	60		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 200\text{ MHz}$ , Dual-port mode, 0 dBFS		60		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 300\text{ MHz}$ , Dual-port mode, 0 dBFS	56	62		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, 0 dBFS	51	58		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, -6 dBFS		52		
THD	Total harmonic distortion	$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 100\text{ MHz}$ , Dual-port mode, 0 dBFS	45	52		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 200\text{ MHz}$ , Dual-port mode, 0 dBFS		50		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 300\text{ MHz}$ , Dual-port mode, 0 dBFS	31	36		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, 0 dBFS	35	46		
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 500\text{ MHz}$ , Dual-port mode, -6 dBFS		44		
IMD3	Third-order two-tone intermodulation	$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 99\text{ MHz}$ and $102\text{ MHz}$ , Each tone at -6 dBFS, Dual-port mode.		70		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 200\text{ MHz}$ and $202\text{ MHz}$ , Each tone at -6 dBFS, Dual-port mode.		68		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 253\text{ MHz}$ and $257\text{ MHz}$ , Each tone at -6 dBFS, Dual-port mode.	47	57		dBc
		$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 299\text{ MHz}$ and $302\text{ MHz}$ , Each tone at -6 dBFS, Dual-port mode.	35	55		dBc
IMD	Four-tone intermodulation	$f_{DAC} = 2.4\text{ GSPS}$ , $f_{OUT} = 298\text{ MHz}$ , $299\text{ MHz}$ , $300\text{ MHz}$ , and $301\text{ MHz}$ , Each tone at -12 dBFS, Dual-port mode.	47	62.5		dBc

 (1) Typicals are characterization values at  $25^{\circ}\text{C}$  and  $AVDD = 3.3\text{ V}$ . These parameters are characterized, but not production tested.

## 7.7 Digital Electrical Characteristics

$T_{C,MIN} = -55^{\circ}C$  to  $T_{C,MAX} = 125^{\circ}C$ , typical values at  $25^{\circ}C$ ,  $AVDD = 3$  to  $3.6$  V,  $I_{outFS} = 20$  mA (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP <sup>(1)</sup>	MAX	UNIT
<b>CMOS INTERFACE (SLEEP, RESTART, INV_CLK, NORMAL, A_ONLY, A_ONLY_INV, A_ONLY_ZS)</b>					
$I_{IH}$	High-level input current		0.2	10	$\mu A$
$I_{IL}$	Low-level input current	-10	-0.2		$\mu A$
	Input capacitance		2.5 <sup>(2)</sup>		pF
<b>DIFFERENTIAL DATA INTERFACE (DA_P[13:0], DA_N[13:0], DB_P[13:0], DB_N[13:0], DTCLK_P, DTCLK_N)</b>					
$Z_T$	Internal termination impedance	80	100	125	$\Omega$
$C_i$	Input capacitance		2.6 <sup>(2)</sup>		pF


(1) Typicals are characterization values at  $25^{\circ}C$  and  $AVDD = 3.3$  V. These parameters are characterized, but not production tested.

(2) Specified by design.

## 7.8 Timing Requirements

		MIN	TYP	MAX	UNIT
<b>DIFFERENTIAL DATA INTERFACE (DA_P[13:0], DA_N[13:0], DB_P[13:0], DB_N[13:0] EXTERNAL TIMING WITH DLL IN RESTART) (See Figure 2)</b>					
$t_{setup}$	Data setup to DLYCLK <sup>(1)</sup>	RESTART = 1, DLYCLK 20-pF load See Figure 2	4.75		nS
$t_{hold}$	Data hold to DLYCLK <sup>(1)</sup>	RESTART = 1, DLYCLK 20-pF load See Figure 2	-3.5		nS
<b>DLL (See Figure 15)</b>					
NegD	DLL min negative delay	RESTART = 0	150		ps
PosD	DLL min positive delay	RESTART = 0	600		ps
$t_{valid}$	CLK/4 internal setup + hold width		160		ps
Fdac		RESTART = 0	1	2.4	GHz

(1) Tested using SNR as pass/fail criteria.

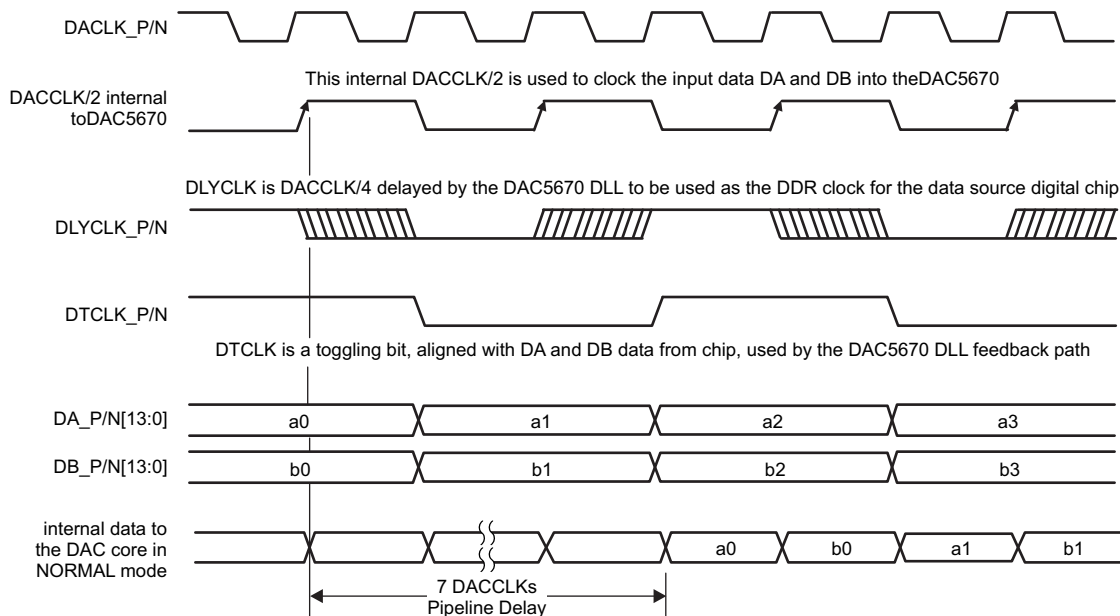


**Figure 1. DLL Input Loop Functional Timing**


# DAC5670-SP

SGLS386F – JANUARY 2009 – REVISED OCTOBER 2014

www.ti.com

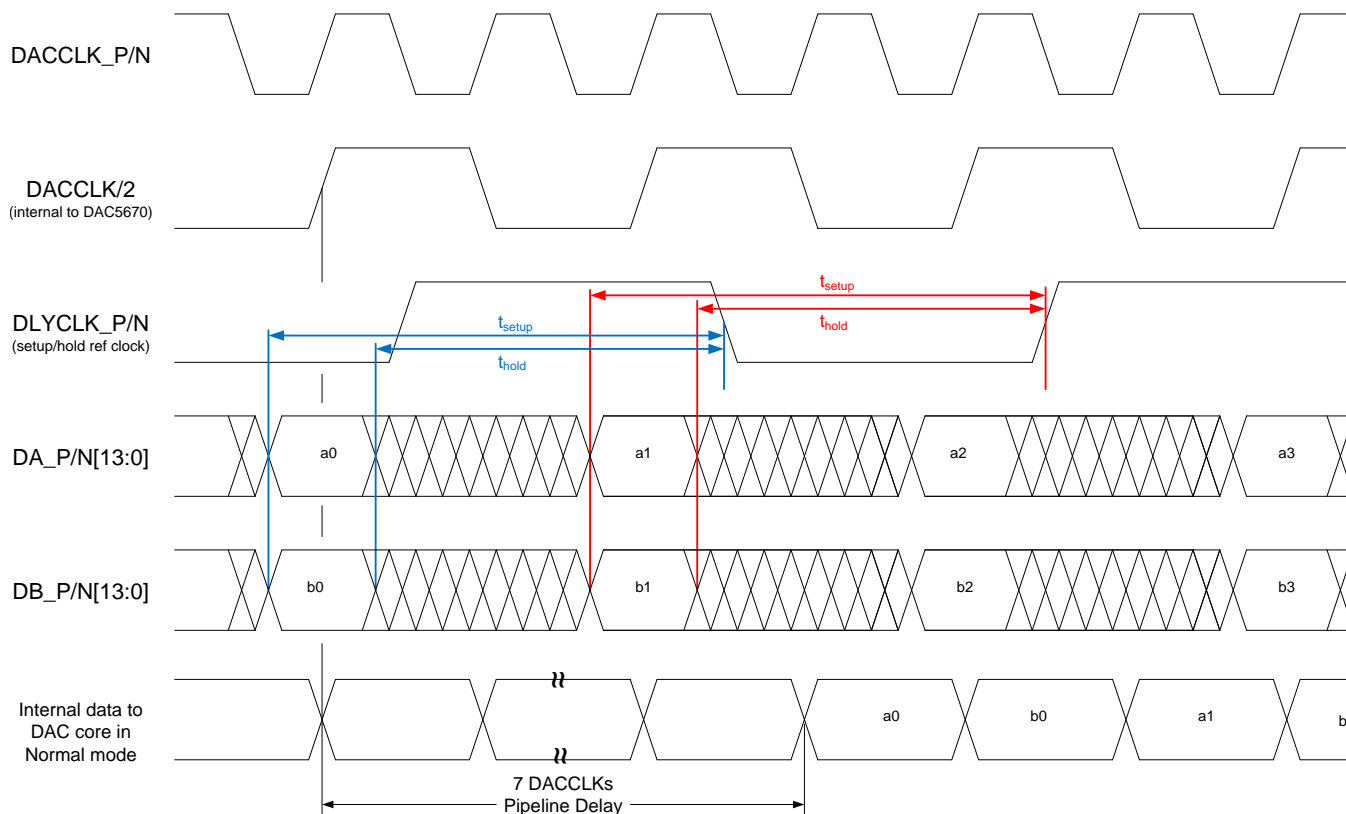


**Figure 2. External Interface Timing With DLL in Restart**

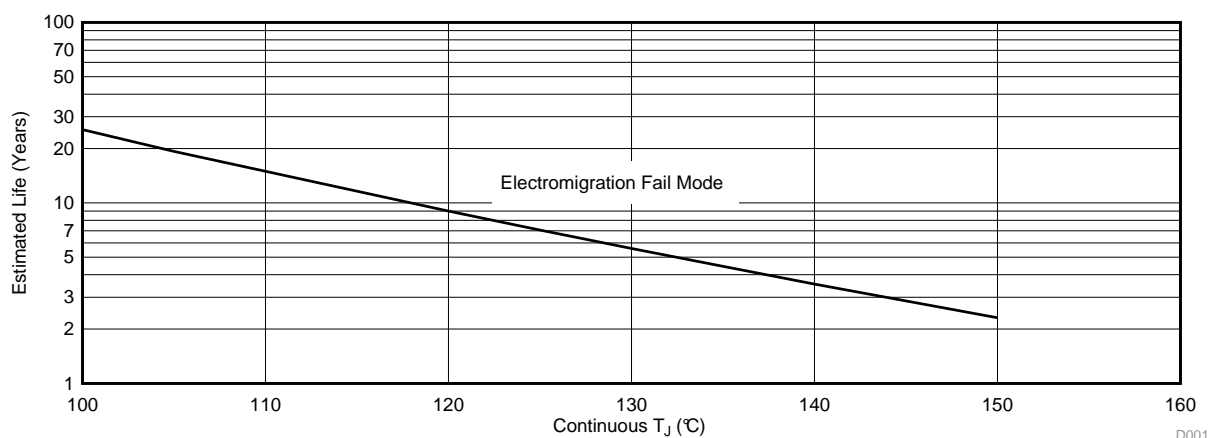


- See data sheet for absolute maximum and minimum recommended operating conditions.
- Silicon operating life design goal is 10 years at 105°C junction temperature (does not include package interconnect life).

**Figure 3. DAC5670-SP – 192/GEM Package Operating Life Derating Chart**


## 7.9 Typical Characteristics

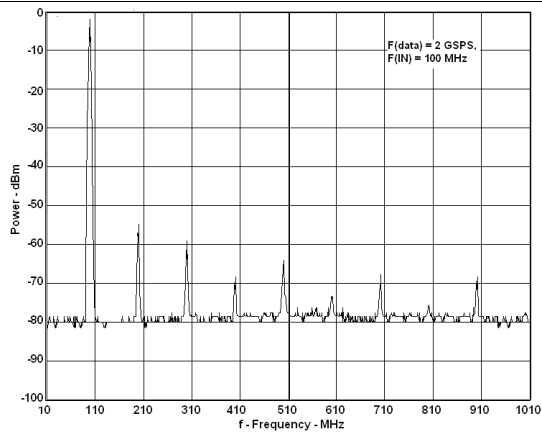


**Figure 4. Single-Tone Spectrum Power vs Frequency**

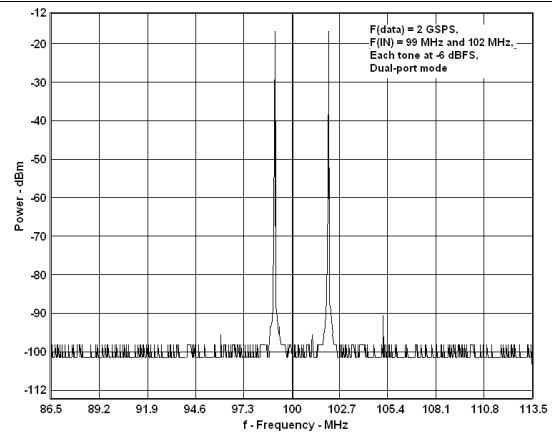


**Figure 5. Two-Tone IMD (Power) vs Frequency**

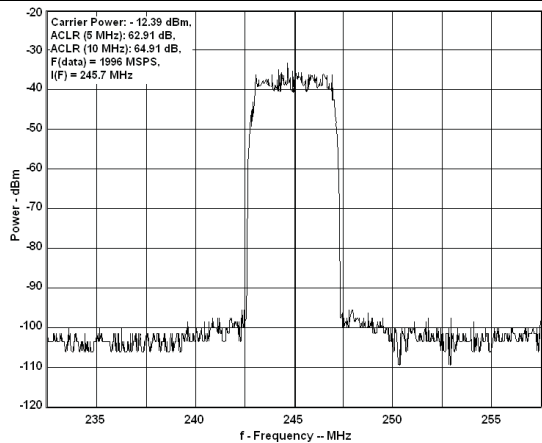


**Figure 6. W-CDMA TM1 Single Carrier Power vs Frequency**

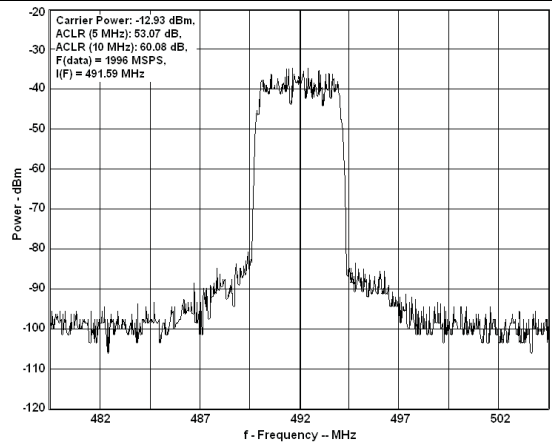

**Figure 7. W-CDMA TM1 Single Carrier Power vs Frequency**

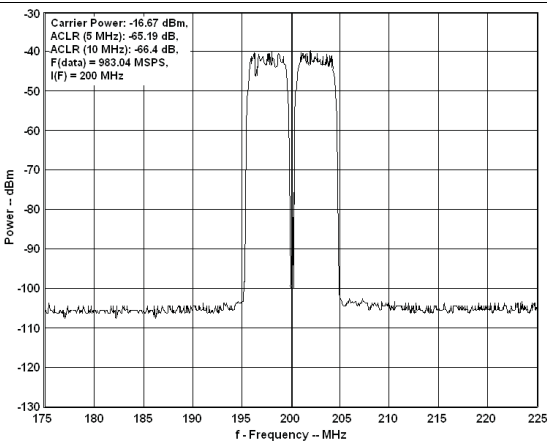

**Figure 8. W-CDMA TM1 Dual Carrier Power vs Frequency**

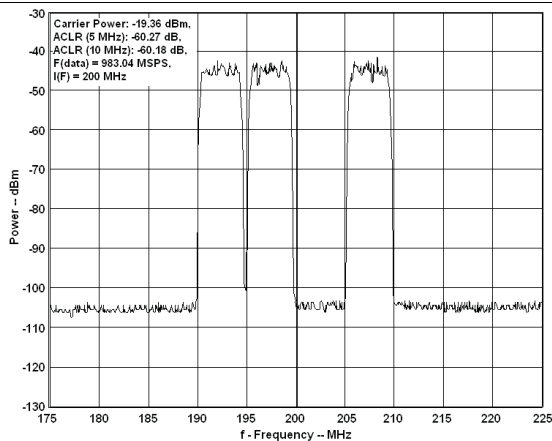

**Figure 9. W-CDMA TM1 Three Carrier Power vs Frequency**

## Typical Characteristics (continued)

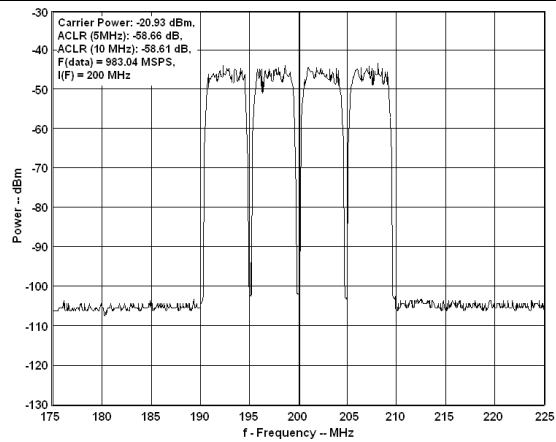


Figure 10. W-CDMA TM1 Four Carrier Power vs Frequency


## 8 Detailed Description

### 8.1 Overview

Figure 26 shows a simplified block diagram of the current steering DAC5670. The DAC5670 consists of a segmented array of NPN-transistor current sinks, capable of delivering a full-scale output current up to 30 mA. Differential current switches direct the current of each current sink to either one of the complementary output nodes IOUT\_P or IOUT\_N. The complementary current output enables differential operation, canceling out common-mode noise sources (digital feed-through, on-chip, and PCB noise), dc offsets, even-order distortion components, and doubling signal output power.

The full-scale output current is set using an external resistor ( $R_{BIAS}$ ) in combination with an on-chip bandgap voltage reference source (1.2 V) and control amplifier. The current ( $I_{BIAS}$ ) through resistor  $R_{BIAS}$  is mirrored internally to provide a full-scale output current equal to  $32 \times I_{BIAS}$ . The full-scale current is adjustable from 30 mA down to 5 mA by using the appropriate bias resistor value.

### 8.2 Functional Block Diagram

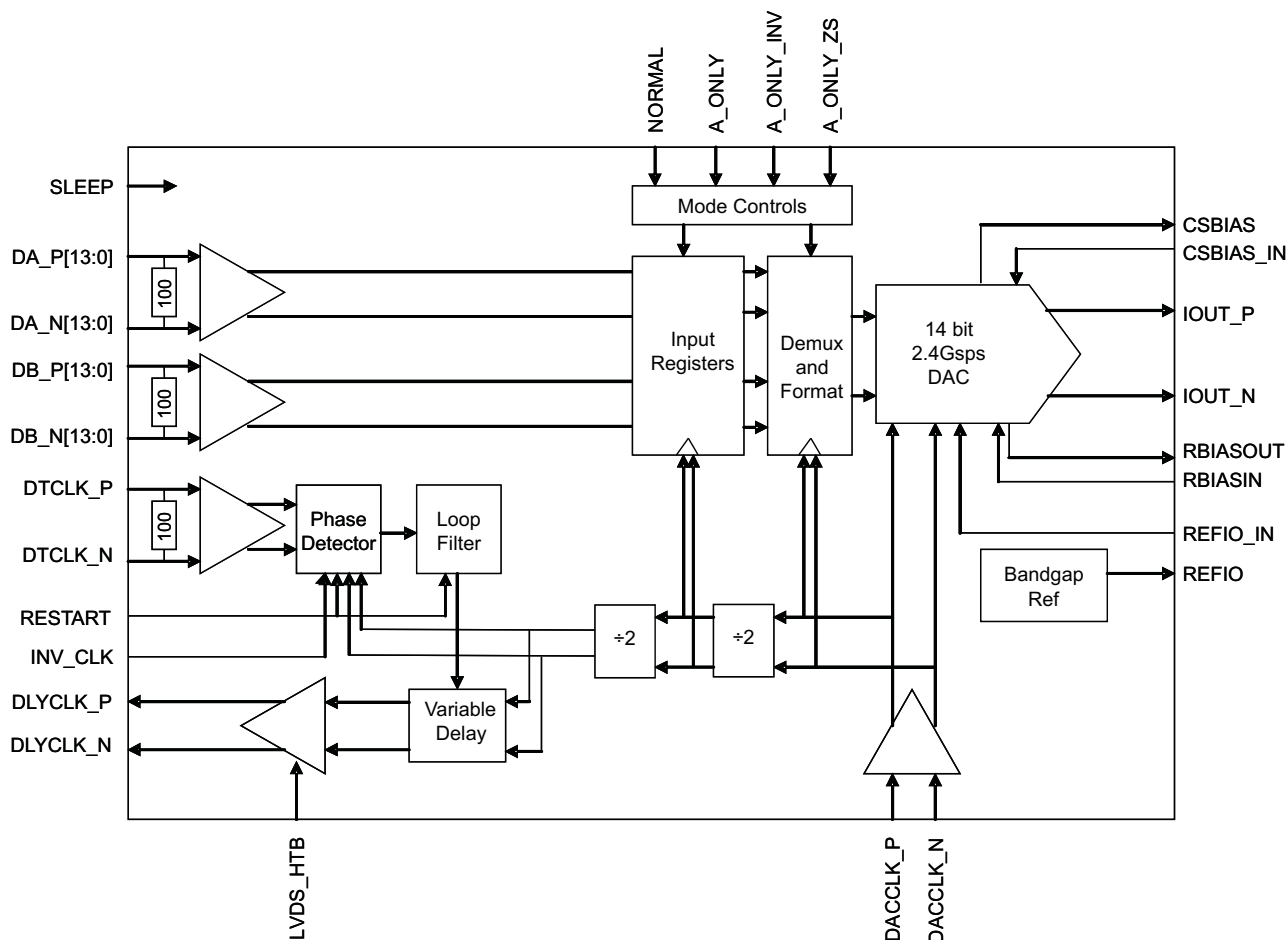


### 8.3 Feature Description

#### 8.3.1 Digital Inputs


The DAC5670 differential inputs are compatible with LVDS and HyperTransport voltage levels.

## Feature Description (continued)

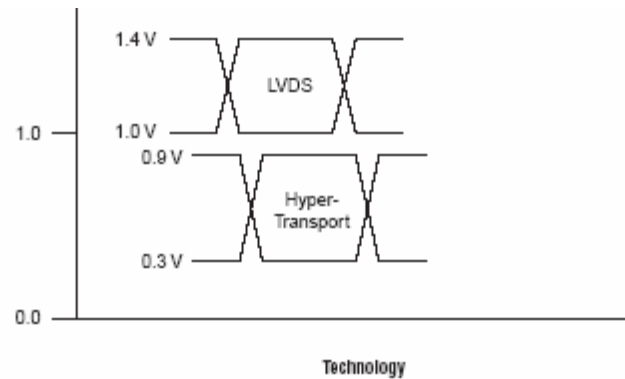

**Figure 11. Digital Input Voltage Options**

The DAC5670 uses low-voltage differential signaling (LVDS and HyperTransport) for the bus input interface. The LVDS and HyperTransport input modes feature a low differential voltage swing. The differential characteristic of LVDS and HyperTransport modes allow for high-speed data transmission with low electromagnetic interference (EMI) levels. [Figure 12](#) shows the equivalent complementary digital input interface for the DAC5670, valid for pins DA\_P[13:0], DA\_N[13:0], DB\_P[13:0], and DB\_N[13:0].

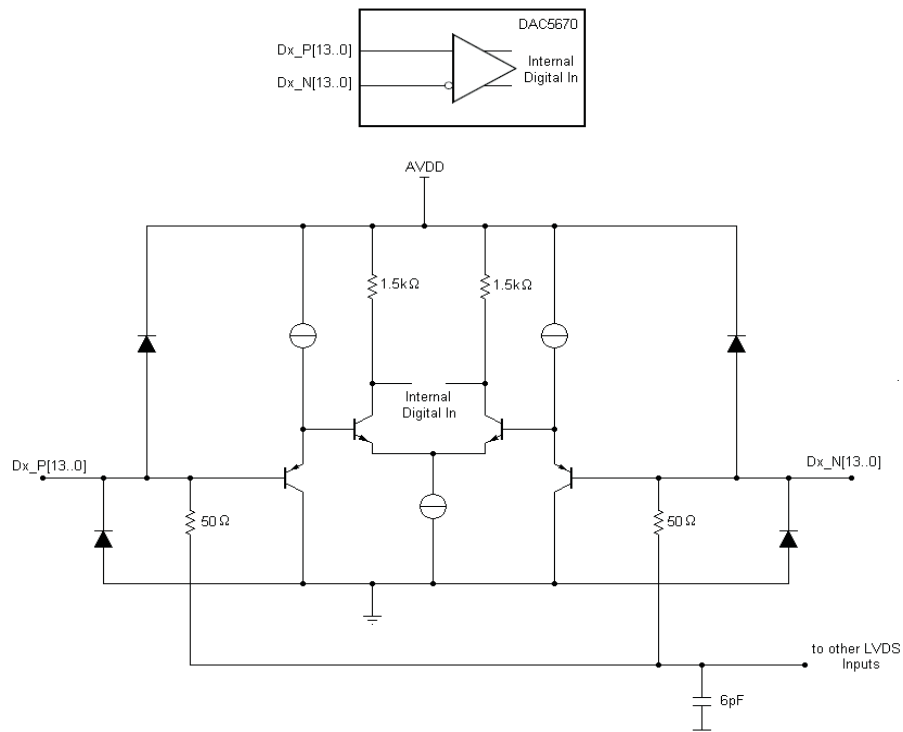

**Figure 12.**

[Figure 13](#) shows a schematic of the equivalent CMOS/TTL-compatible digital inputs of the DAC5670, valid for the following pins: RESTART, LVDS\_HTB, INV\_CLK, SLEEP, NORMAL, A\_ONLY, A\_ONLY\_INV, and A\_ONLY\_ZS.



## Feature Description (continued)

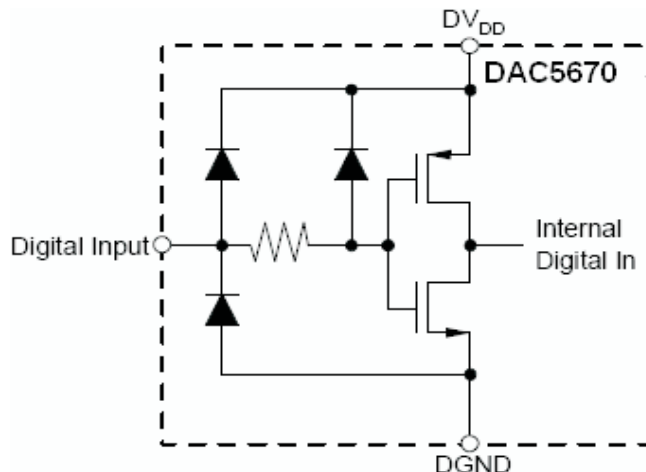


Figure 13.

### 8.3.2 DLL Usage


The DAC5670 is clocked at the DAC sample rate. Each input port runs at a maximum of 1.2 GSPS. The DAC5670 provides an output clock (DLYCLK) at one-half the input port data rate (DACCLK/4), and monitors an additional reference bit (DTCLK). DTCLK is used as a feedback clock to adjust interface timing. To accomplish this, the DAC5670 implements a DLL to help manage the timing interface from external data source. As with all DLLs, there are limitations on the capability of the DLL with respect to the delay chain length, implementation of the phase detector, and the bandwidth of the control loop. The DAC5670 implements a quadrature-based phase detector. This scheme allows for the DLL to provide maximum setup or hold delay margins when quadrature can be reached. Quadrature is reached when the internal CLK / 4 is 90° out of phase with DTCLK. Additionally, as the frequency of operation decreases, the delay line's fixed length limits its ability to change the delay path enough to reach quadrature (see Figure 15). Note that the delay line has asymmetric attributes. The NegD range is smaller than the PosD range. From its nominal (restart) position, it can delay more than it can subtract.

Figure 15 represents the behavior of the phase detector and the delay line with respect to initial positions of the rising edge of DTCLK. There are four distinct quadrants that define the behavior. Each quadrant represents the period of the DDR clock rate (600 MHz in the 2.4 GSPS case) divided by 4. The ideal location has the initial delays of DTCLK (and hence data bits) in quadrant 1. The stable lock point of DLL is at  $T / 4$ , between Q1 and Q2. If DTCLK's initial delay is in quadrants 3 or 4, the INV\_CLK pin can be asserted to improve the ability of DLL to obtain quadrature. This assertion moves the stable quadrature point to the center of  $3T / 4$  vs  $T / 4$  as shown in Figure 15. Essentially, the zones that add delay become zones that subtract delay and vice-versa. The clock phase of CLK / 4 would also invert.


In cases where it is not appropriate to use the DLL to manage the timing interface, it is possible to use fixed setup and hold values for DA and DB signals relative to the generated DLYCLK output when the DLL is held in restart. This is accomplished by asserting RESTART to logic high and using the timing input conditions for external timing interface with DLL in restart in the [DLL Usage](#). When using external setup and hold timing, the user does not need to provide DTCLK. DTCLK should be biased to valid LVDS levels in that case (see Figure 2).

The setup/hold values are non-traditional, as they represent the setup/hold of an input to a generated clock (DLYCLK). Additionally, the setup/hold numbers represent delays that may be longer than the DACCLK or DACCLK/2 periods. To calculate the setup/hold values to the nearest adjacent DLYCLK transition, the user must subtract multiples of DACCLK/2 periods until the setup is less than a DACCLK/2 period. The same amount can be subtracted from the hold time. These new setup/hold values will be frequency dependent.

## Feature Description (continued)

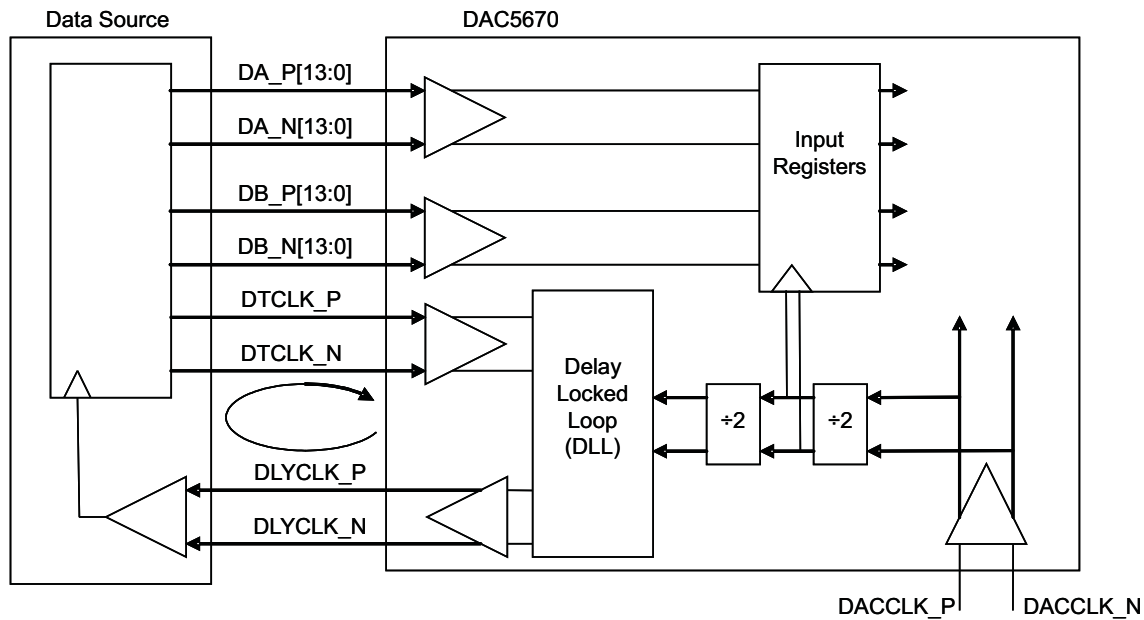

**Figure 14. DLL Input Loop Simplified Block Diagram**

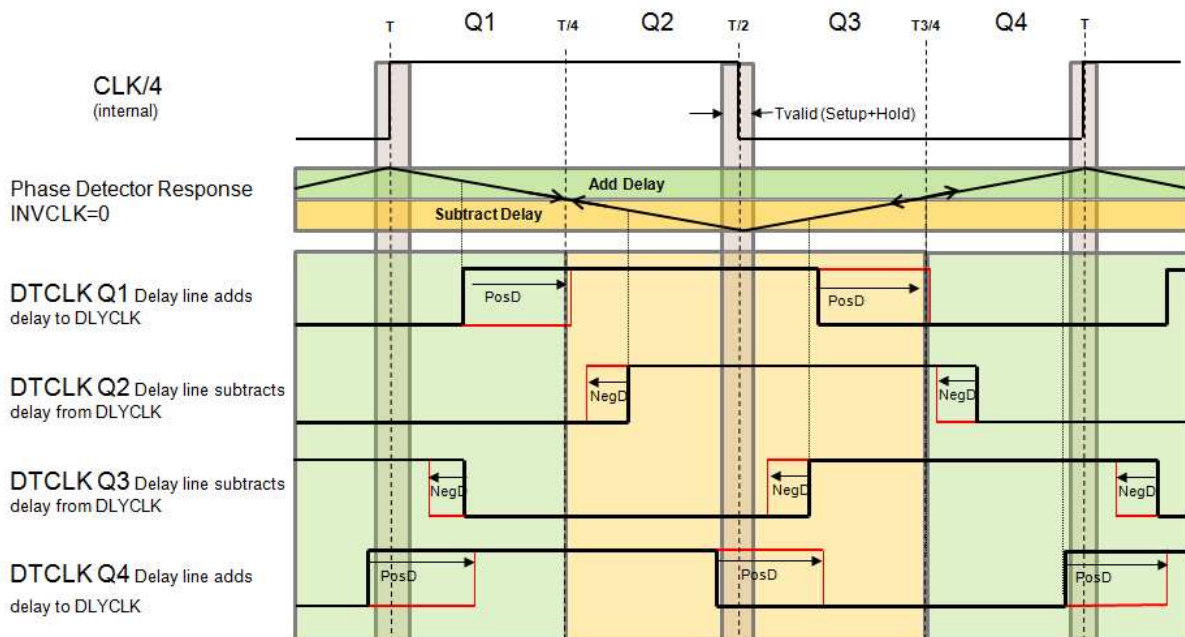

**Figure 15. DLL Phase Detector Behavior**

### 8.3.3 Clock Input

The DAC5670 features differential, LVPECL-compatible clock inputs (DACCLK\_P, DACCLK\_N). [Figure 16](#) shows the equivalent schematic of the clock input buffer. The internal biasing resistors set the input common-mode voltage to  $AVDD / 2$ , while the input resistance is typically 1 k $\Omega$ . A variety of clock sources can be ac-coupled to the device, including a sine wave source (see [Figure 17](#)).

## Feature Description (continued)

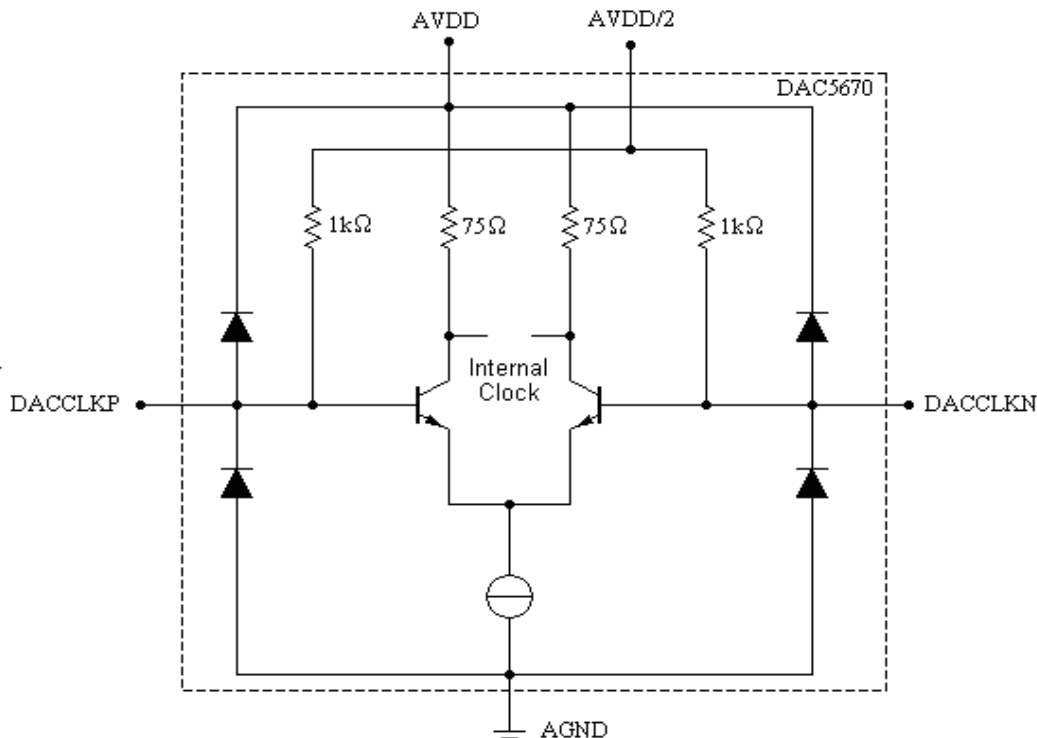


Figure 16. Clock Equivalent Input


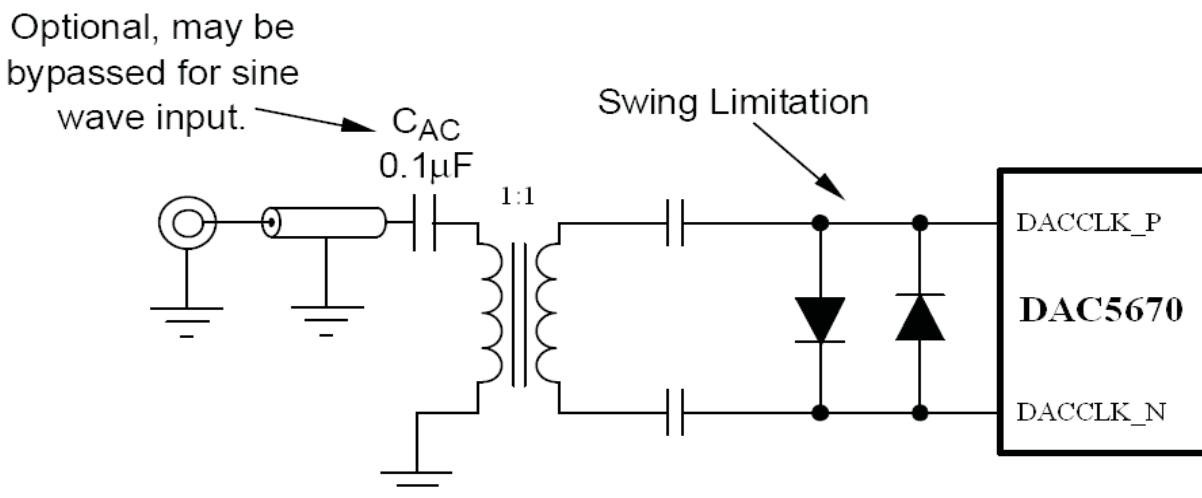



Figure 17. Driving the DAC5670 With a Single-Ended Clock Source Using a Transformer

To obtain the best ac performance, the DAC5670 clock input should be driven with a differential LVPECL or sine wave source as shown in [Figure 18](#) and [Figure 19](#). In this case, set the potential of VTT to the termination voltage required by the driver along with the proper termination resistors ( $R_T$ ). The DAC5670 clock input can also be driven single ended for slower clock rates using TTL/CMOS levels (see [Figure 20](#)).


## Feature Description (continued)

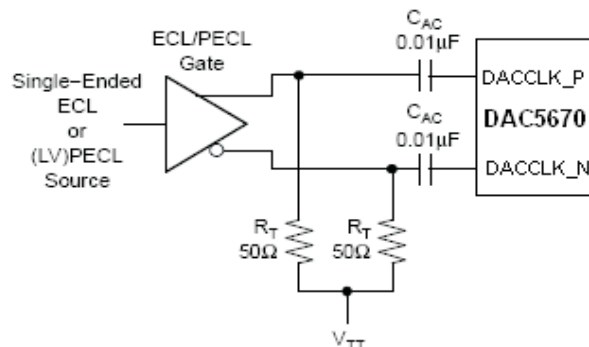

**Figure 18. Driving the DAC5670 With a Single-Ended ECL/PECL Clock Source**

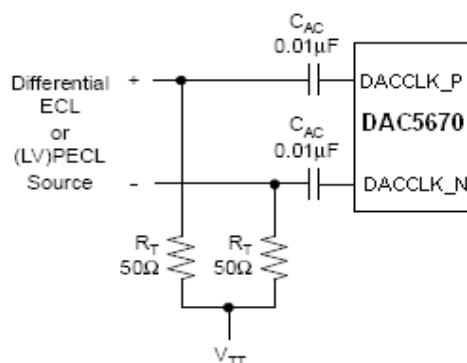

**Figure 19. Driving the DAC5670 With a Differential ECL/PECL Clock Source**

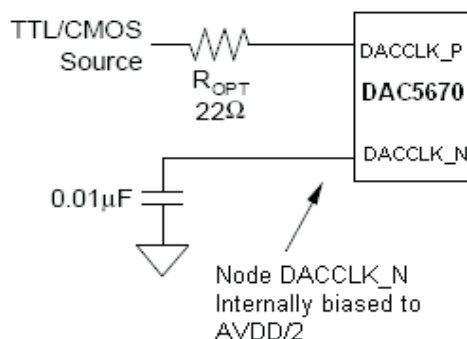

**Figure 20. Driving the DAC5670 With a Single-Ended TTL/CMOS Clock Source**

### 8.3.4 DAC Transfer Function


The DAC5670 has a current sink output. The current flow through IOUT\_P and IOUT\_N is controlled by Dx\_P[13:0] and Dx\_N[13:0]. For ease of use, this data sheet denotes D[13:0] as the logical bit equivalent of Dx\_P[13:0] and its complement Dx\_N[13:0]. The DAC5670 supports straight binary coding with D13 as the MSB and D0 as the LSB. Full-scale current flows through IOUT\_P when all D[13:0] inputs are set high and through IOUT\_N when all D[13:0] inputs are set low. The relationship between IOUT\_P and IOUT\_N can be expressed as [Equation 1](#):

$$I_{OUT\_N} = I_{O(FS)} - I_{OUT\_P} \quad (1)$$

$I_{O(FS)}$  is the full-scale output current sink (5 to 30 mA). Because the output stage is a current sink, the current can only flow from AVDD through the load resistors  $R_L$  into the IOUT\_N and IOUT\_P pins.

## Feature Description (continued)

The output current flow in each pin driving a resistive load can be expressed as shown in [Figure 21](#), [Equation 2](#), and [Equation 3](#).

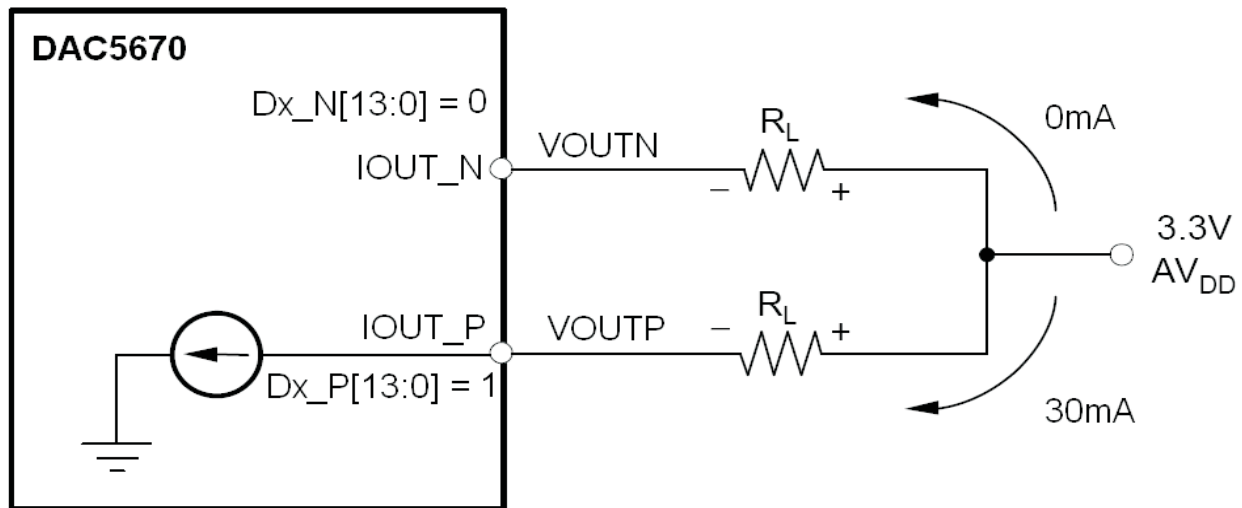

**Figure 21. Relationship Between D[13:0], IOUT\_N and IOUT\_P**

$$IOUT\_N = (IOUT_{(FS)} \times (16383 - CODE)) / 16384 \quad (2)$$

$$IOUT\_P = (IOUT_{(FS)} \times CODE) / 16384$$

where

- CODE is the decimal representation of the DAC input word (3)

This would translate into single-ended voltages at IOUT\_N and IOUT\_P, as shown in [Equation 4](#) and [Equation 5](#):

$$VOUTN = AVDD - IOUT\_N \times R_L \quad (4)$$

$$VOUTP = AVDD - IOUT\_P \times R_L \quad (5)$$

For example, assuming that D[13:0] = 1 and that  $R_L$  is 50  $\Omega$ , the differential voltage between pins IOUT\_N and IOUT\_P can be expressed as shown in [Equation 6](#) through [Equation 8](#) where  $IO_{(FS)} = 20$  mA:

$$VOUTN = 3.3 \text{ V} - 0 \text{ mA} \times 50 \Omega = 3.3 \text{ V} \quad (6)$$

$$VOUTP = 3.3 \text{ V} - 20 \text{ mA} \times 50 \Omega = 2.3 \text{ V} \quad (7)$$


$$V_{DIFF} = VOUTN - VOUTP = 1 \text{ V} \quad (8)$$

If D[13:0] = 0, then IOUT\_P = 0 mA, IOUT\_N = 20 mA, and the differential voltage  $V_{DIFF} = -1$  V.

The output currents and voltages in IOUT\_N and IOUT\_P are complementary. The voltage, when measured differentially, is doubled compared to measuring each output individually. Take care not to exceed the compliance voltages at the IOUT\_N and IOUT\_P pins in order to keep signal distortion low.

## Feature Description (continued)

### 8.3.5 Reference Operation

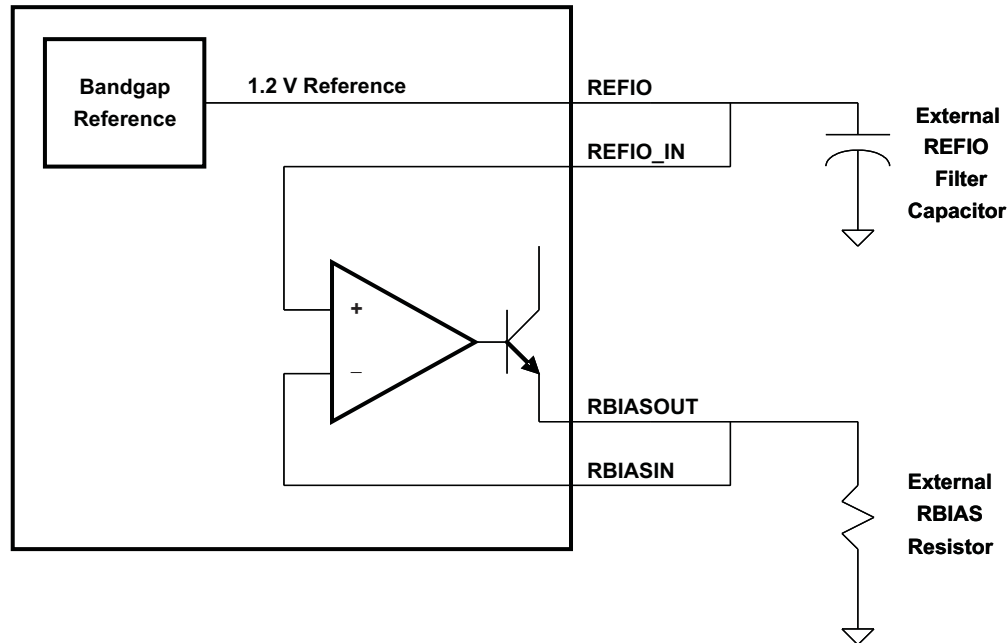

**Figure 22. Reference Circuit**

The DAC5670 comprises a bandgap reference and control amplifier for biasing the full-scale output current. The full-scale output current is set by applying an external resistor  $R_{BIAS}$  to pins RBIASOUT and RBIASIN. The bias current  $I_{BIAS}$  through resistor  $R_{BIAS}$  is defined by the on-chip bandgap reference voltage and control amplifier. The full-scale output current equals  $32\times$  this bias current. The full-scale output current  $I_{OUT_{FS}}$  can thus be expressed as:

$$I_{OUT_{FS}} = 32 \times I_{BIAS} = 32 \times V_{REFIO} / R_{BIAS}$$

where

- $V_{REFIO}$  voltage at terminals REFIO and REFIO\_IN (9)


The bandgap reference voltage delivers an accurate voltage of 1.2 V. Connect an external REFIO filter capacitor of 0.1  $\mu F$  externally to the terminals REFIO and REFIO\_IN for compensation.

The full-scale output current can be adjusted from 30 to 5 mA by varying external resistor  $R_{BIAS}$ .

### 8.3.6 Analog Current Outputs

Figure 23 is a simplified schematic of the current sink array output with corresponding switches. Differential NPN switches direct the current of each individual NPN current sink to either the positive output node, IOUT\_P, or its complementary negative output node, IOUT\_N. The input data presented at the DA\_P[13:0], DA\_N[13:0], DB\_P[13:0], and DB\_N[13:0] is decoded to control the sw\_p(N) and sw\_n(N) current switches.

## Feature Description (continued)

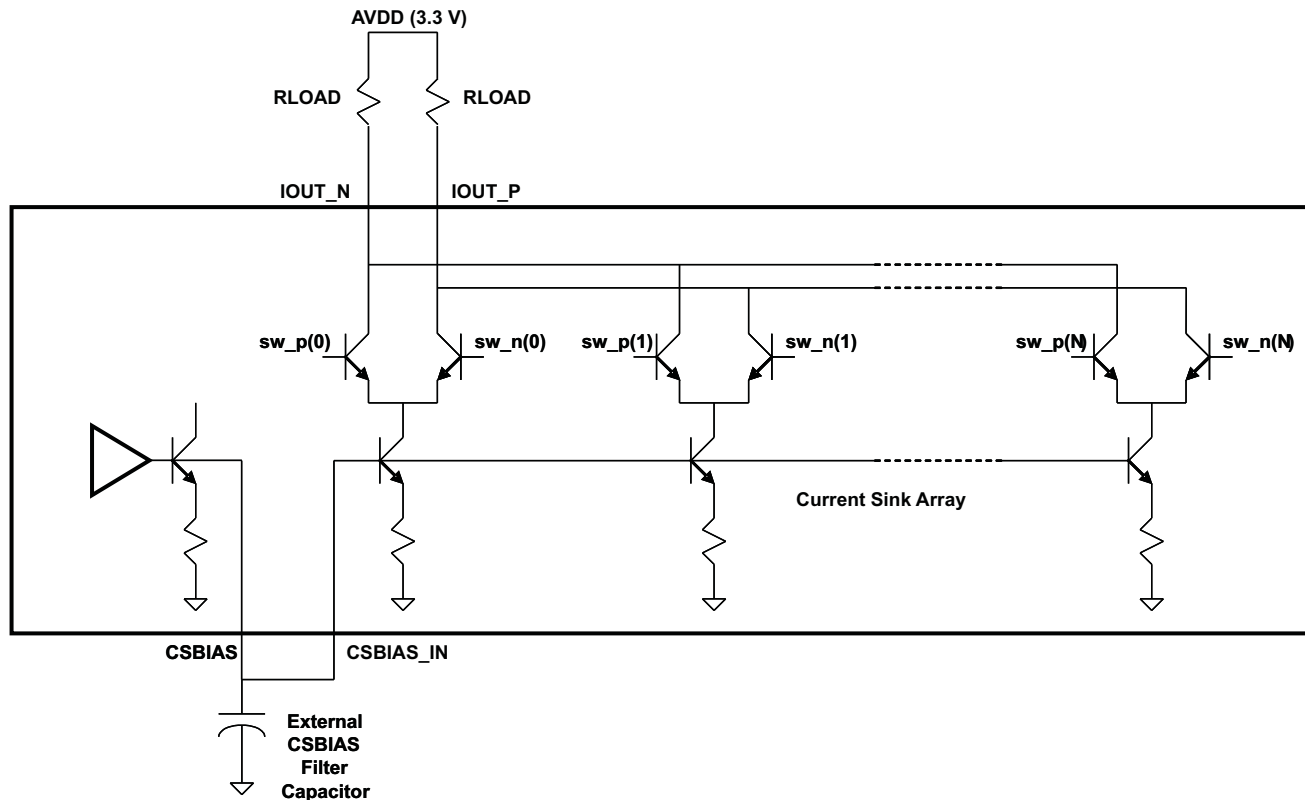


**Figure 23. Current Sink Array**


The external output resistors,  $R_{LOAD}$ , are connected to the positive supply, AVDD.

The DAC5670 can easily be configured to drive a doubly-terminated 50- $\Omega$  cable using a properly selected transformer. [Figure 24](#) and [Figure 25](#) show the 1:1 and 4:1 impedance ratio configuration, respectively. These configurations provide maximum rejection of common-mode noise sources and even-order distortion components, thereby doubling the power of the DAC to the output. The center tap on the primary side of the transformer is terminated to AVDD, enabling a dc current flow for both IOUT\_N and IOUT\_P.

## Feature Description (continued)

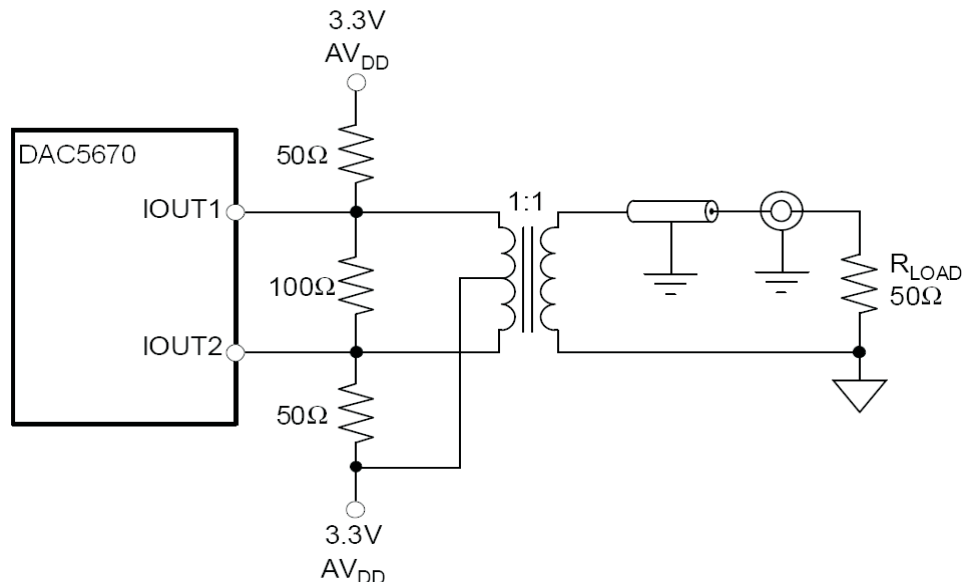

**Figure 24. 1:1 Impedance Ratio**

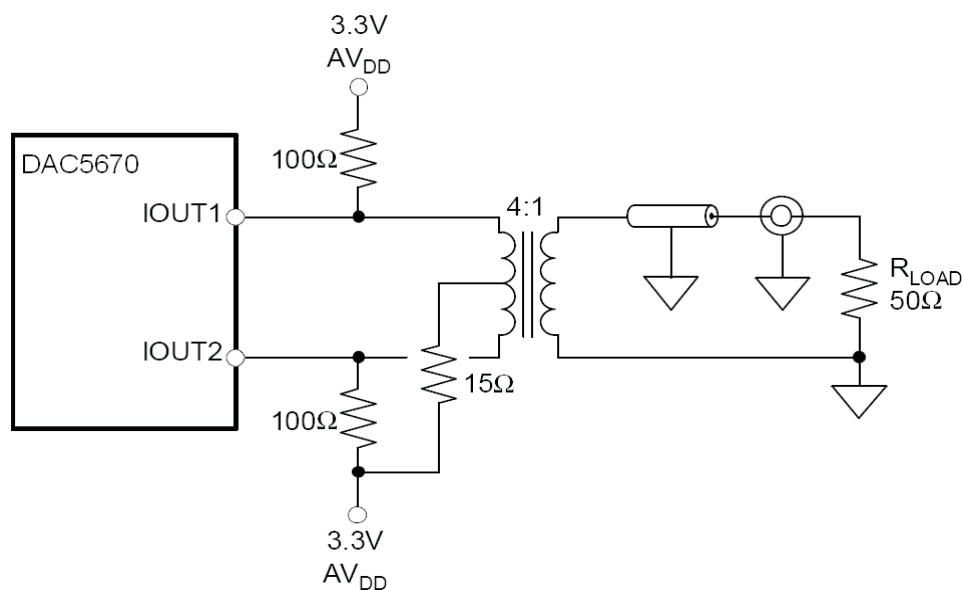

**Figure 25. 4:1 Impedance Ratio**

### 8.3.7 Sleep Mode

When the SLEEP pin is asserted (high), the DAC5670 enters a lower-power mode.

## 8.4 Device Functional Modes

### 8.4.1 Input Format

The DAC5670 has four input modes selected by the four mutually-exclusive configuration pins: NORMAL, A\_ONLY, A\_ONLY\_INV, and A\_ONLY\_ZS. Table 1 lists the input modes, input sample rates, maximum DAC sample rate (CLK input), and resulting DAC output sequence for each configuration. For all configurations, the DLYCLK\_P/N outputs and DTCLK\_P/N inputs are DACCLK\_P/N frequency divided by four.



**Device Functional Modes (continued)**
**Table 1. DAC5670 Input Formats**

NORMAL	A_ONLY	A_ONLY_INV	A_ONLY_ZS	FinA/Fdac	FinB/Fdac	$f_{DAC\ MAX}$ (MHz)	DLYCLK_P/NAND, DTCLK_P/N FREQ (MHz)	DAC OUTPUT SEQUENCE
1	0	0	0	1/2	1/2	2400	Fdac/4	A0, B0, A1, B1, A2, B2, . . .
0	1	0	0	1/2	Off	2400	Fdac/4	A0, A0, A1, A1, A2, A2, . . .
0	0	1	0	1/2	Off	2400	Fdac/4	A0, –A0, A1, –A1, A2, –A2, . . .
0	0	0	1	1/2	Off	2400	Fdac/4	A0, 0, A1, 0, A2, 0, . . .



## Typical Application (continued)

- INV\_CLK as necessary for DLL lock
- SLEEP low
- NORMAL high
- A\_ONLY low
- A\_ONLY\_INV low
- A\_ONLY\_ZS low
- DA\_P[0:13], DA\_N[0:13], DB\_P[0:13], DB\_N[0:13] sourced from pattern generator generating 300-MHz tone with 65536 sample depth
- RBIAS 2 k $\Omega$  to GND

## 9.2.3 Application Curves

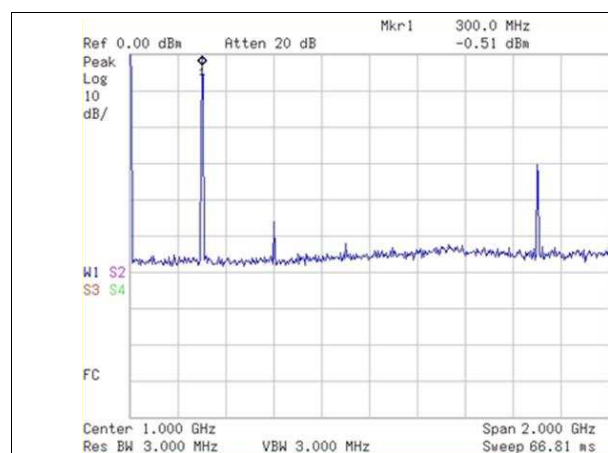


Figure 27. 2-GHz 300-MHz Tone

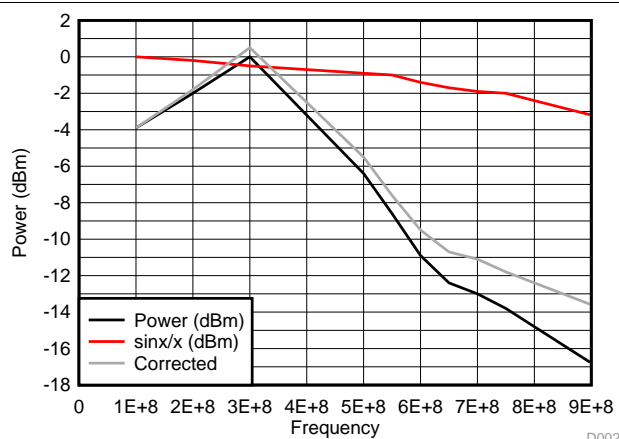


Figure 28. DAC5670 Bandwidth 2 GSPS

## 10 Power Supply Recommendations


The DAC5670 uses a single 3.3-V power supply simplifying design requirements. The power supply should be filtered from any other system noise that may be present. The filtering should pay particular attention to frequencies of interest for output.

## 11 Layout

### 11.1 Layout Guidelines

- DAC output termination should be placed as close as possible to outputs.
- Keep routing for RBIAS short.
- Decoupling capacitors should be placed as close as possible to supply pins.
- Digital differential inputs must be 50  $\Omega$  to ground loosely coupled, or 100- $\Omega$  differential tightly coupled.
- Digital differential inputs must be length matched.

### 11.2 Layout Example

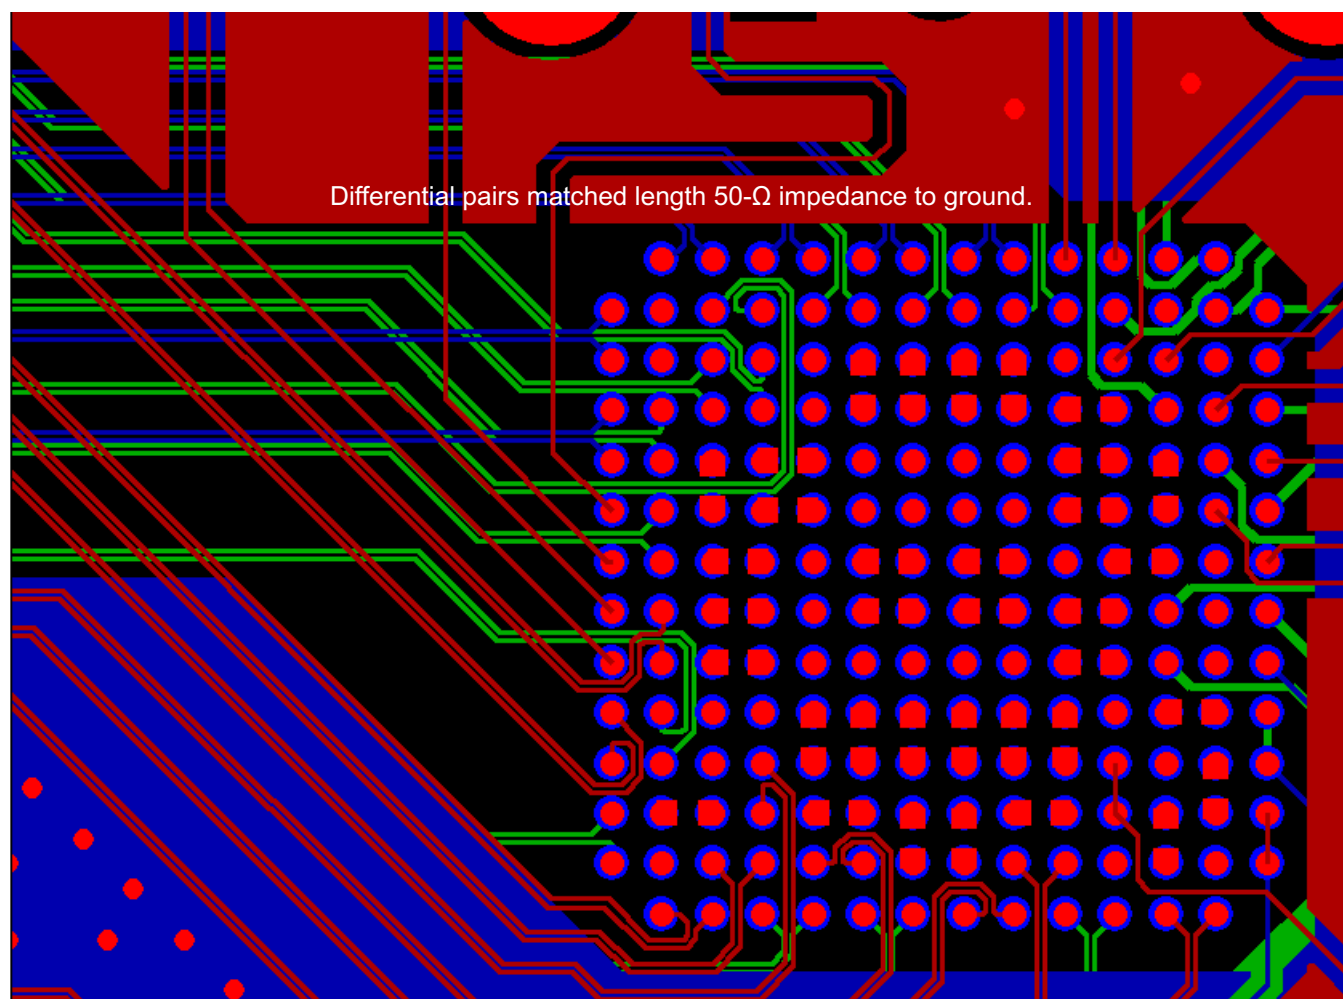

## 12 Device and Documentation Support

### 12.1 Device Support

#### 12.1.1 Device Nomenclature

##### 12.1.1.1 Definitions of Specifications and Terminology

**Differential Nonlinearity (DNL)** Defined as the variation in analog output associated with an ideal 1 LSB change in the digital input code.

**Gain Drift** Defined as the maximum change in gain, in terms of ppm of full-scale range (FSR) per °C, from the value at 25°C to values over the full operating temperature range.

**Gain Error** Defined as the percentage error in the ratio between the measured full-scale output current and the value of the ideal full-scale output ( $32 \times V_{REFIO} / R_{BIAS}$ ). A  $V_{REFIO}$  of 1.2 V is used to measure the gain error with an external reference voltage applied. With an internal reference, this error includes the deviation of  $V_{REFIO}$  (internal bandgap reference voltage) from the typical value of 1.2 V.

**Integral Nonlinearity (INL)** Defined as the maximum deviation of the actual analog output from the ideal output, determined by a straight line drawn from zero scale to full scale.

**Intermodulation Distortion (IMD3, IMD)** The two-tone IMD3 or four-tone IMD is defined as the ratio (in dBc) of the worst third-order (or higher) intermodulation distortion product of either fundamental output tone.

**Offset Drift** Defined as the maximum change in dc offset, in terms of ppm of full-scale range (FSR) per °C, from the value at 25°C to values over the full operating temperature range.

**Offset Error** Defined as the percentage error in the ratio of the differential output current ( $I_{OUT\_P} - I_{OUT\_N}$ ) to half of the full-scale output current for input code 8192.

**Output Compliance Range** Defined as the minimum and maximum allowable voltage at the output of the current-output DAC. Exceeding this limit may result in reduced reliability of the device or adversely affecting distortion performance.

**Power Supply Rejection Ratio (PSSR)** Defined as the percentage error in the ratio of the delta  $I_{OUT}$  and delta supply voltage normalized with respect to the ideal  $I_{OUT}$  current.

**Reference Voltage Drift** Defined as the maximum change of the reference voltage in ppm per °C from the value at ambient (25°C) to values over the full operating temperature range.

**Spurious Free Dynamic Range (SFDR)** Defined as the difference (in dBc) between the peak amplitude of the output signal and the peak spurious signal.

**Signal-to-Noise Ratio (SNR)** Defined as the ratio of the RMS value of the fundamental output signal to the RMS sum of all other spectral components below the Nyquist frequency, including noise, but excluding the first six harmonics and dc.

**Total Harmonic Distortion (THD)** Defined as the ratio of the RMS sum of the first six harmonic components to the RMS value of the fundamental output signal.

### 12.2 Trademarks

HyperTransport is a trademark of HyperTransport Technology Consortium.  
All other trademarks are the property of their respective owners.

### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.4 Glossary

[SLYZ022](#) — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## **13 Mechanical, Packaging, and Orderable Information**

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">5962-0724701VXA</a>	Active	Production	CBGA (GEM)   192	1   JEDEC TRAY (5+1)	No	SNPB	N/A for Pkg Type	-55 to 125	5962- 0724701VXA DAC5670MGEM-V
<a href="#">DAC5670MGEM/EM</a>	Active	Production	CBGA (GEM)   192	1   TUBE	No	SNPB	N/A for Pkg Type	25 to 25	DAC5670MGEM/EM EVAL ONLY

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

GEM (S-CBGA-N192)

CERAMIC BALL GRID ARRAY

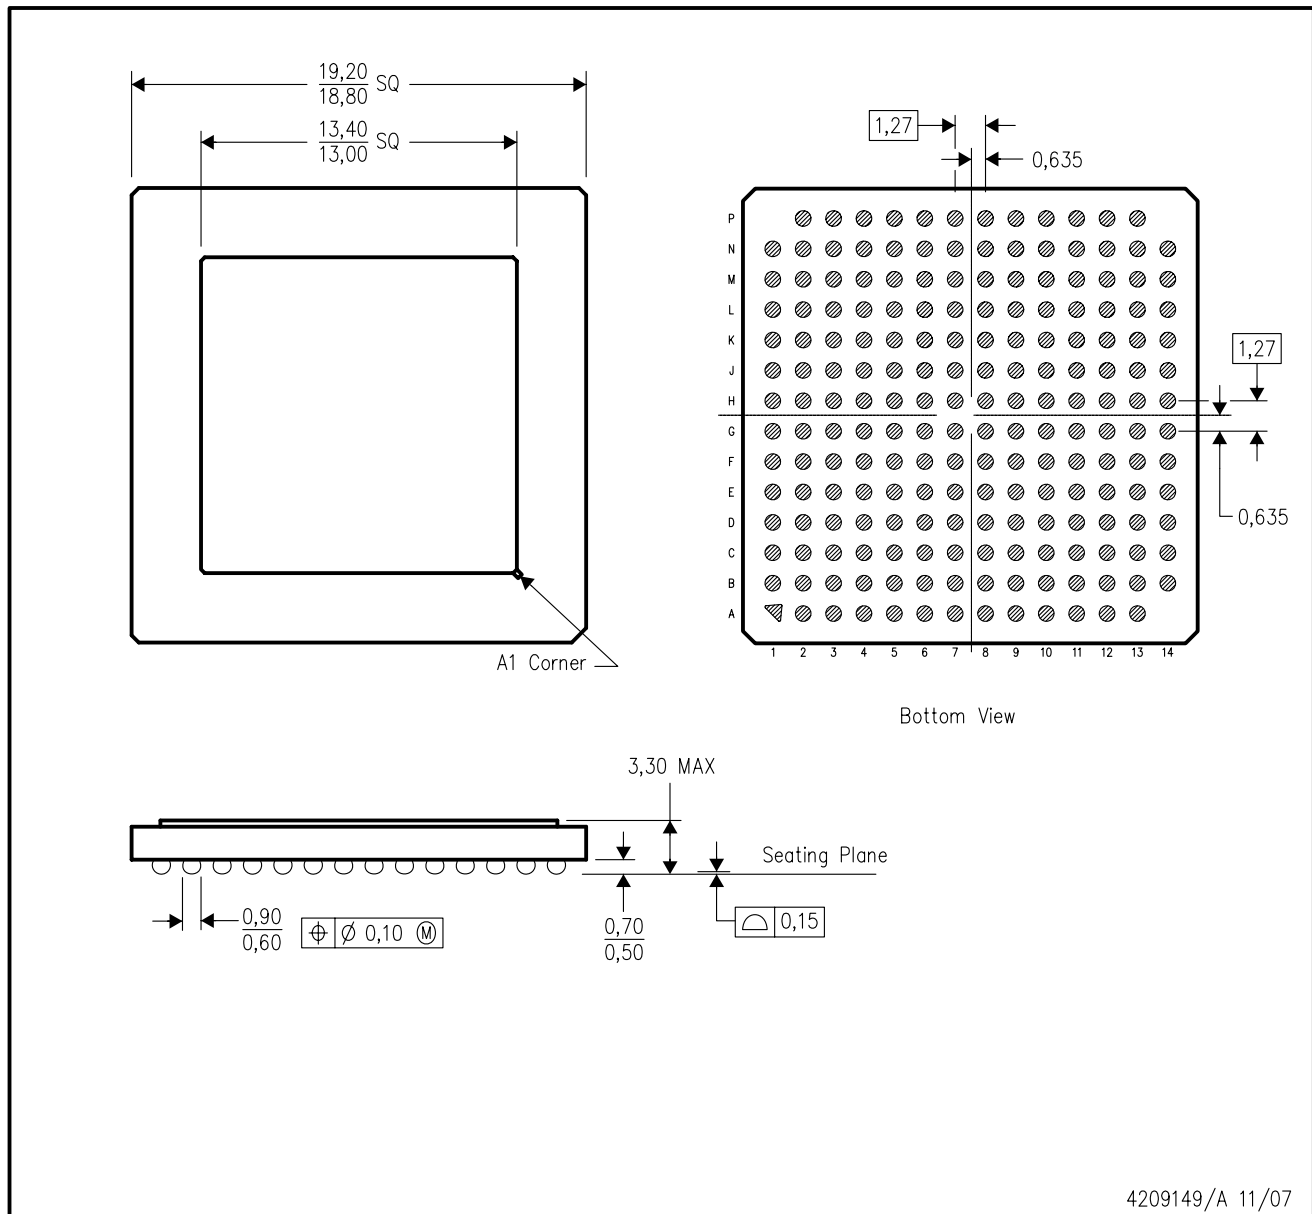

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Metal Lid Hermetic Package.
  - D. Falls within JEDEC MO-156



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025