

# ESD752 and ESD762 采用 SOT-23 和 SOT-323/SC-70 封装且具有 5.7A 8/20 $\mu$ s 浪涌保护的 24V、双通道 ESD 保护二极管

## 1 特性

- 强大的浪涌保护：
  - IEC 61000-4-5 (8/20 $\mu$ s) : 5.7 A 或 2.5 A
- IEC 61000-4-2 4 级 ESD 保护：
  - $\pm 30$ kV 或  $\pm 20$ kV 接触放电
  - $\pm 30$ kV 或  $\pm 20$ kV 气隙放电
- 24V 工作电压
- 双向 ESD 保护
- 双通道器件通过单个元件提供全面的 ESD 和浪涌保护
- 低钳位电压可保护下游元件
- I/O 电容 = 3pF 或 1.7pF (典型值)
- SOT-23 (DBZ) 小型、标准、通用封装
- SOT-323/SC-70 (DCK) 超小、标准、节省空间的通用封装
- 引线式封装，用于自动光学检测 (AOI)

## 2 应用

- USB 电力传输 (USB-PD)：
  - VBUS 保护
  - IO 保护 (耐受 VBUS 短路)
- 工业控制网络：
  - 智能配电系统 (SDS)
  - DeviceNet IEC 62026-3
  - CANopen - CiA 301/302-2 和 EN 50325-4
  - 4/20mA 电路
  - PLC 浪涌保护
  - ADC 浪涌保护

## 3 说明

ESD752 and ESD762 是用于 USB 电力传输 (USB-PD) 和工业接口的双向 ESD 保护二极管。ESD752 and ESD762 旨在耗散达到或超出 IEC 61000-4-2 4 级标准所规定最大电平 ( $\pm 30$ kV 或  $\pm 20$ kV 接触和  $\pm 30$ kV 或  $\pm 20$ kV 气隙) 的接触式 ESD。低动态电阻和低钳位电压支持针对瞬态事件提供系统级保护。这种保护至关重要，因为工业系统对鲁棒性和可靠性的要求很高。


这些器件具有每通道低 IO 电容和提供两条 IO 线路的引脚排列，可防止因静电放电 (ESD) 和其他瞬变造成损坏。ESD752 的  $I_{PP} = 5.7A$  (8/20 $\mu$ s 浪涌波形) 能力使其适用于保护 USB VBUS 和工业 I/O 线路免受瞬态浪涌事件的影响。此外，ESD752 和 ESD762 的 3pF 或 1.7pF 线路电容适用于保护 USB 电力传输的低速信号和工业应用的 IO 信号。

ESD752 and ESD762 采用两种引线式封装，可轻松实现直通式布线。

### 封装信息<sup>(1)</sup>

| 器件型号   | 封装                     | 封装尺寸 (标称值)             |
|--------|------------------------|------------------------|
| ESD752 | DCK (SOT-323/SC-70, 3) | 2.00mm $\times$ 1.25mm |
|        | DBZ (SOT-23, 3)        | 2.92mm $\times$ 1.30mm |
| ESD762 | DBZ (SOT-23, 3)        | 2.92mm $\times$ 1.30mm |

(1) 如需了解所有可用封装，请参阅产品说明书末尾的可订购产品附录。

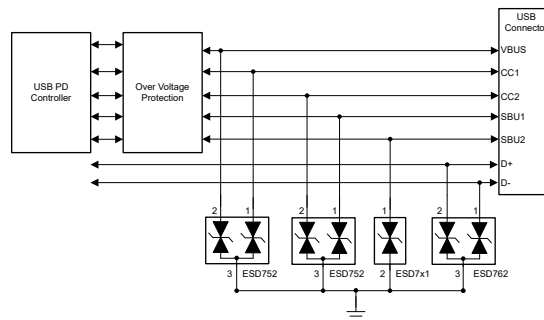

USB Power Delivery Application

### USB 电力传输典型应用



## Table of Contents

|                                                |          |                                                                  |           |
|------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b> | 7.4 Device Functional Modes.....                                 | <b>9</b>  |
| <b>2 应用</b> .....                              | <b>1</b> | <b>8 Application and Implementation</b> .....                    | <b>10</b> |
| <b>3 说明</b> .....                              | <b>1</b> | 8.1 Application Information.....                                 | 10        |
| <b>4 Revision History</b> .....                | <b>2</b> | 8.2 Typical Application.....                                     | 10        |
| <b>5 Pin Configuration and Functions</b> ..... | <b>3</b> | <b>9 Power Supply Recommendations</b> .....                      | <b>12</b> |
| <b>6 Specifications</b> .....                  | <b>4</b> | <b>10 Layout</b> .....                                           | <b>13</b> |
| 6.1 Absolute Maximum Ratings.....              | 4        | 10.1 Layout Guidelines.....                                      | 13        |
| 6.2 ESD Ratings—JEDEC Specification.....       | 4        | 10.2 Layout Example.....                                         | 13        |
| 6.3 ESD Ratings—IEC Specification.....         | 4        | <b>11 Device and Documentation Support</b> .....                 | <b>14</b> |
| 6.4 Recommended Operating Conditions.....      | 4        | 11.1 Documentation Support.....                                  | 14        |
| 6.5 Thermal Information.....                   | 4        | 11.2 接收文档更新通知.....                                               | 14        |
| 6.6 Electrical Characteristics.....            | 5        | 11.3 支持资源.....                                                   | 14        |
| 6.7 Typical Characteristics - ESD752.....      | 6        | 11.4 Trademarks.....                                             | 14        |
| 6.8 Typical Characteristics - ESD762.....      | 7        | 11.5 Electrostatic Discharge Caution.....                        | 14        |
| <b>7 Detailed Description</b> .....            | <b>8</b> | 11.6 术语表.....                                                    | 14        |
| 7.1 Overview.....                              | 8        | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>14</b> |
| 7.2 Functional Block Diagram.....              | 8        |                                                                  |           |
| 7.3 Feature Description.....                   | 8        |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

| <b>Changes from Revision A (August 2022) to Revision B (November 2022)</b> | <b>Page</b> |
|----------------------------------------------------------------------------|-------------|
| • 在数据表添加了 ESD762 规格。.....                                                  | <b>1</b>    |
| • Added the <i>Application Curves</i> section.....                         | <b>12</b>   |
| <b>Changes from Revision * (May 2022) to Revision A (August 2022)</b>      | <b>Page</b> |
| • 将数据表的状态从 预告信息 更改为 量产数据 .....                                             | <b>1</b>    |

## 5 Pin Configuration and Functions

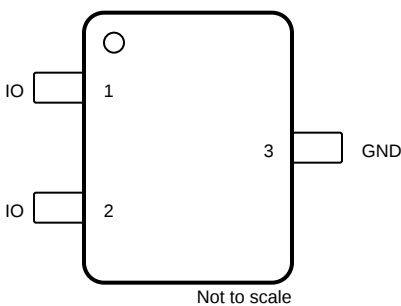


图 5-1. DCK and DBZ Package,  
 3-Pin SOT-323 / SC-70 and SOT-23  
 (Top View)

表 5-1. Pin Functions

| PIN  |      | TYPE <sup>(1)</sup> | DESCRIPTION        |
|------|------|---------------------|--------------------|
| NAME | NO.  |                     |                    |
| IO   | 1, 2 | I/O                 | ESD protected IO   |
| GND  | 3    | G                   | Connect to ground. |

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

| PARAMETER        |                                                          | DEVICE | MIN | MAX | UNIT |
|------------------|----------------------------------------------------------|--------|-----|-----|------|
| P <sub>pp</sub>  | IEC 61000-4-5 Power (t <sub>p</sub> = 8/20 μs) at 25°C   | ESD752 |     | 210 | W    |
|                  | IEC 61000-4-5 Power (t <sub>p</sub> = 8/20 μs) at 25°C   | ESD762 |     | 90  | W    |
| I <sub>pp</sub>  | IEC 61000-4-5 current (t <sub>p</sub> = 8/20 μs) at 25°C | ESD752 |     | 5.7 | A    |
|                  | IEC 61000-4-5 current (t <sub>p</sub> = 8/20 μs) at 25°C | ESD762 |     | 2.5 | A    |
| T <sub>A</sub>   | Operating free-air temperature                           |        | -55 | 150 | °C   |
| T <sub>J</sub>   | Junction temperature                                     |        | -55 | 150 | °C   |
| T <sub>stg</sub> | Storage temperature                                      |        | -65 | 155 | °C   |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

### 6.2 ESD Ratings—JEDEC Specification

| PARAMETER          |                         | TEST CONDITION                                                            | VALUE  | UNIT |
|--------------------|-------------------------|---------------------------------------------------------------------------|--------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>         | ± 2500 | V    |
|                    |                         | Charged device model (CDM), per JEDEC specification JS-002 <sup>(2)</sup> | ± 1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 ESD Ratings—IEC Specification

over T<sub>A</sub> = 25°C (unless otherwise noted)

| PARAMETER          |                         | TEST CONDITION                            | DEVICE | VALUE  | UNIT |
|--------------------|-------------------------|-------------------------------------------|--------|--------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | IEC 61000-4-2 Contact Discharge, all pins | ESD752 | ±30000 | V    |
|                    |                         |                                           | ESD762 | ±20000 | V    |
|                    |                         | IEC 61000-4-2 Air Discharge, all pins     | ESD752 | ±30000 | V    |
|                    |                         |                                           | ESD762 | ±20000 | V    |

### 6.4 Recommended Operating Conditions

| PARAMETER       |                                | MIN | NOM | MAX | UNIT |
|-----------------|--------------------------------|-----|-----|-----|------|
| V <sub>IN</sub> | Input voltage                  | -24 |     | 24  | V    |
| T <sub>A</sub>  | Operating free-air temperature | -55 |     | 150 | °C   |

### 6.5 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | ESD752       |                       | ESD762       | UNIT |
|-------------------------------|----------------------------------------------|--------------|-----------------------|--------------|------|
|                               |                                              | DBZ (SOT-23) | DCK (SOT-323 / SC-70) | DBZ (SOT-23) |      |
|                               |                                              | 3 PINS       | 3 PINS                | 3 PINS       |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 291.5        | 283.0                 | 325.3        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 147.1        | 164.1                 | 178.8        | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 131.1        | 105.1                 | 165.5        | °C/W |
| Ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 32.0         | 67.1                  | 52.4         | °C/W |
| Ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 130.2        | 104.4                 | 164.4        | °C/W |

## 6.5 Thermal Information (continued)

| THERMAL METRIC <sup>(1)</sup> |                                              | ESD752       |                       | ESD762       | UNIT |
|-------------------------------|----------------------------------------------|--------------|-----------------------|--------------|------|
|                               |                                              | DBZ (SOT-23) | DCK (SOT-323 / SC-70) | DBZ (SOT-23) |      |
|                               |                                              | 3 PINS       | 3 PINS                | 3 PINS       |      |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A          | N/A                   | N/A          | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.


## 6.6 Electrical Characteristics

over  $T_A = 25^\circ\text{C}$  (unless otherwise noted)<sup>(1)</sup>

| PARAMETER   |                                               | TEST CONDITIONS                                                            | DEVICE | MIN    | TYP  | MAX    | UNIT     |
|-------------|-----------------------------------------------|----------------------------------------------------------------------------|--------|--------|------|--------|----------|
| $V_{RWM}$   | Reverse stand-off voltage                     |                                                                            |        | - 24   |      | 24     | V        |
| $V_{BRF}$   | Forward breakdown voltage <sup>(2)</sup>      | $I_{IO} = 10\text{ mA}$ , IO to GND                                        |        | 25.5   |      | 35.5   | V        |
| $V_{BRR}$   | Reverse breakdown voltage <sup>(2)</sup>      | $I_{IO} = -10\text{ mA}$ , IO to GND                                       |        | - 35.5 |      | - 25.5 | V        |
| $V_{CLAMP}$ | Clamping voltage <sup>(3)</sup>               | $I_{PP} = 5.7\text{ A}$ , $t_p = 8/20\text{ }\mu\text{s}$ , IO to GND      | ESD752 |        | 37   |        | V        |
|             |                                               | $I_{PP} = 2.5\text{ A}$ , $t_p = 8/20\text{ }\mu\text{s}$ , from IO to GND | ESD762 |        | 36   |        | V        |
| $V_{CLAMP}$ | Clamping voltage <sup>(4)</sup>               | $I_{PP} = 16\text{ A}$ , TLP, IO to GND or GND to IO                       | ESD752 |        | 35   |        | V        |
|             |                                               |                                                                            | ESD762 |        | 38   |        | V        |
| $V_{Hold}$  | Holding voltage after snapback <sup>(5)</sup> | TLP                                                                        | ESD752 |        | 30   |        | V        |
|             |                                               |                                                                            | ESD762 |        | 30   |        | V        |
| $I_{LEAK}$  | Leakage current                               | $V_{IO} = \pm 24\text{ V}$ , IO to GND                                     |        | -50    | 5    | 50     | nA       |
| $R_{DYN}$   | Dynamic resistance <sup>(4)</sup>             | IO to GND and GND to IO                                                    | ESD752 |        | 0.35 |        | $\Omega$ |
|             |                                               |                                                                            | ESD762 |        | 0.57 |        | $\Omega$ |
| $C_L$       | Line capacitance <sup>(6)</sup>               | $V_{IO} = 0\text{ V}$ , $f = 1\text{ MHz}$ , $V_{pp} = 30\text{ mV}$       | ESD752 |        | 3    | 5      | pF       |
|             |                                               |                                                                            | ESD762 |        | 1.7  | 2.8    | pF       |


- (1) Measurements made on each IO channel.  
(2)  $V_{BRF}$  and  $V_{BRR}$  are defined as the voltage when  $\pm 10\text{ mA}$  is applied in the positive or negative direction respectively, before the device latches into the snapback state.  
(3) Device stressed with  $8/20\text{ }\mu\text{s}$  exponential decay waveform according to IEC 61000-4-5.  
(4) Non-repetitive current pulse, Transmission Line Pulse (TLP); square pulse; ANSI / ESD STM5.5.1-2008  
(5)  $V_{HOLD}$  is defined as the lowest voltage on the TLP plot once the trigger threshold is reached and the device snapbacks and begins clamping the voltage.  
(6) Measured from IO to GND on each channel.

## 6.7 Typical Characteristics - ESD752

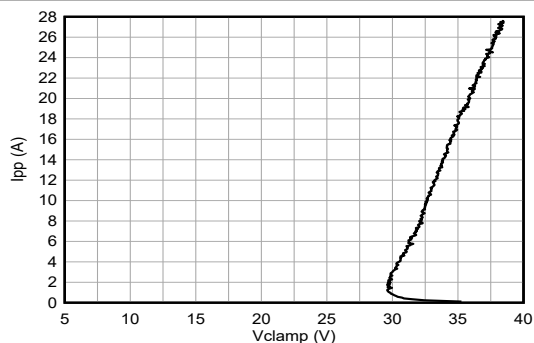

$t_p = 100$  ns, Transmission Line Pulse (TLP)

图 6-1. Positive TLP Curve

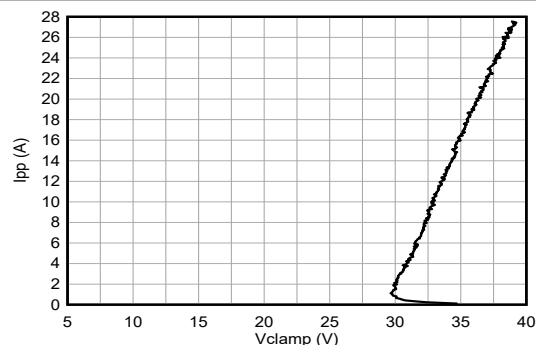

$t_p = 100$  ns, Transmission Line Pulse (TLP)

图 6-2. Negative TLP Curve

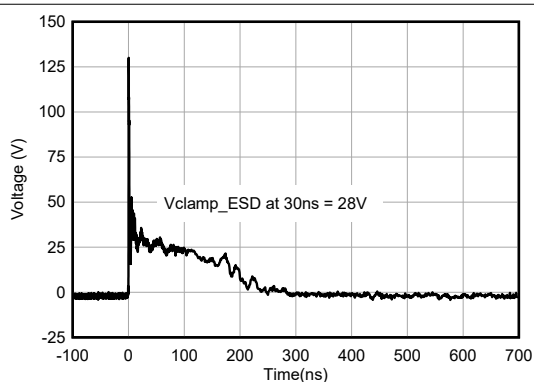


图 6-3. +8-kV Clamped IEC Waveform

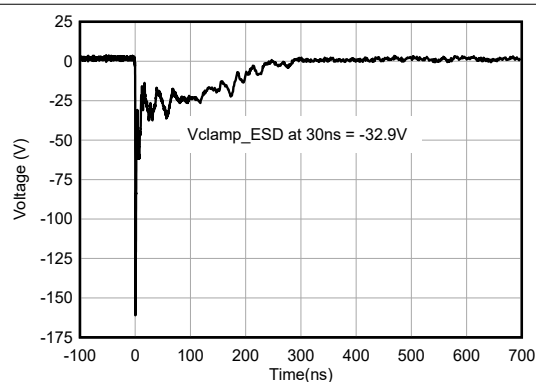


图 6-4. -8-kV Clamped IEC Waveform

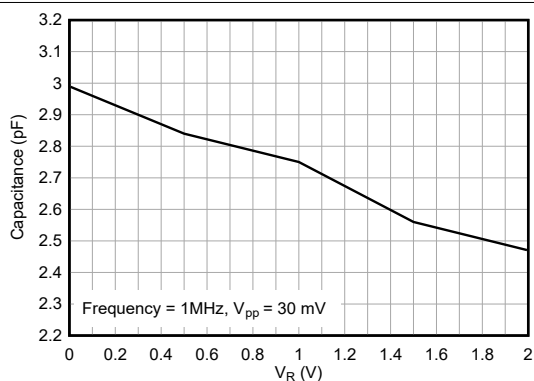


图 6-5. Capacitance vs. Bias Voltage

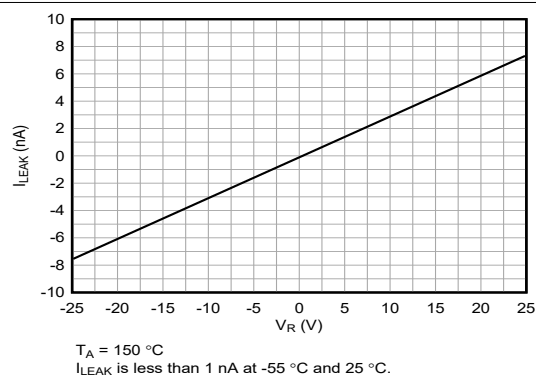


图 6-6. Leakage Current vs. Bias Voltage Across Temperature

## 6.7 Typical Characteristics - ESD752 (continued)

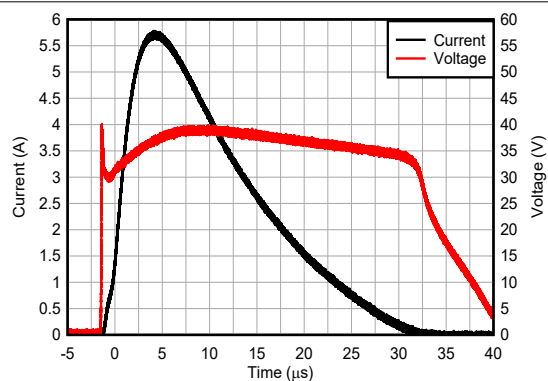


图 6-7. 8/20 μs Surge Response at 5.7 A

## 6.8 Typical Characteristics - ESD762

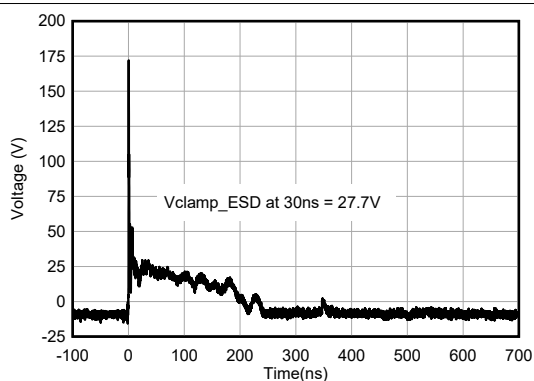


图 6-8. +8-kV Clamped IEC Waveform

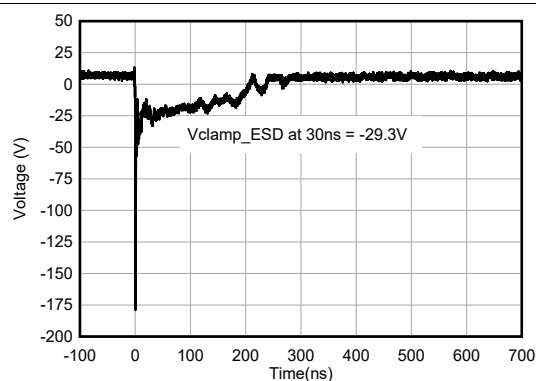


图 6-9. -8-kV Clamped IEC Waveform


## 7 Detailed Description

### 7.1 Overview

The ESD752 and ESD762 are dual-channel ESD TVS diodes in SOT-23 and SOT-323 (SC-70) leaded packages which are convenient for automatic optical inspection. This product offers IEC 61000-4-2  $\pm 30$ -kV or  $\pm 20$ -kV air-gap,  $\pm 30$ -kV or  $\pm 20$ -kV contact ESD protection respectively, and has a clamp circuit with a back-to-back TVS diode for bidirectional signal support.

A typical application of this product is the ESD protection for USB-PD slower speed signals (CC1, CC2, SBU1, SBU2, D+, and D-). The  $I_{PP} = 5.7$  A (8/20  $\mu$ s surge waveform) capability of the ESD752 makes it suitable for protecting VBUS. The ESD752 device is also a good fit for protecting industrial IOs requiring 5.7 A or less of surge current protection. The 3 pF or 1.7 pF line capacitance of these ESD protection diodes are suitable for USB-PD slower speed signals and industrial IO applications.

### 7.2 Functional Block Diagram

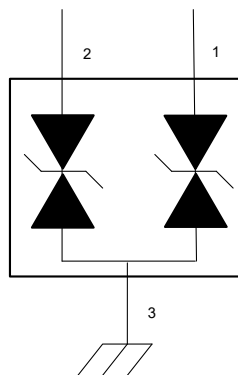

### 7.3 Feature Description

The ESD752 and ESD762 are bidirectional TVS diodes with a high ESD protection level. This device protects the circuit from ESD strikes up to  $\pm 30$ -kV or  $\pm 20$ -kV contact and  $\pm 30$ -kV or  $\pm 20$ -kV air-gap respectively as specified in the IEC 61000-4-2 standard. The ESD752 and ESD762 can also handle up to 5.7 A or 2.5 A of surge current (IEC 61000-4-5 8/20  $\mu$ s) respectively. The I/O capacitance of 3 pF or 1.7 pF (typical) are suitable for USB power delivery slower speed signals and industrial applications. These clamping devices have a small dynamic resistance, which makes the clamping voltage low when the device is actively protecting other circuits.

For example, the ESD752 clamping voltage is only 37 V when the device is taking 5.7 A transient current. The breakdown is bidirectional so these protection devices are a good fit for applications requiring positive and negative polarity protection. Low leakage allows these diodes to conserve power when working below the  $V_{RWM}$ . The temperature range of  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$  makes this ESD device work at extensive temperatures in most environments. The leaded SOT-23 and SOT-323 (SC-70) packages are good for applications requiring automatic optical inspection (AOI).

#### 7.3.1 Temperature Range

These devices are qualified to operate from  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ .

#### 7.3.2 IEC 61000-4-5 Surge Protection

The IO pins can withstand surge events up to 5.7 A and 2.5 A (8/20  $\mu$ s waveform) for the ESD752 and ESD762 respectively. An ESD-surge clamp diverts this current to ground.

#### 7.3.3 IO Capacitance

The capacitance between the I/O pins is 3 pF and 1.7 pF for the ESD752 and ESD762 respectively. These capacitances are suitable for USB power delivery slower speed signals and industrial applications.

### 7.3.4 Dynamic Resistance

The IO pins feature an ESD clamp that has a low  $R_{DYN}$  of 0.35  $\Omega$  for the ESD752 device, and 0.57  $\Omega$  for the ESD762 device, which prevents system damage during ESD events.

### 7.3.5 DC Breakdown Voltage

The DC breakdown voltage between the IO pins is a minimum of  $\pm 25.5$  V. This protects sensitive equipment is protected from surges above the reverse standoff voltage of  $\pm 24$  V.

### 7.3.6 Ultra Low Leakage Current

The IO pins feature an ultra-low leakage current of 50 nA (maximum) with a bias of  $\pm 24$  V.

### 7.3.7 Clamping Voltage

The IO pins feature an ESD clamp that is capable of clamping the voltage to 37 V ( $I_{PP} = 5.7$  A for 8/20  $\mu$ s surge waveform), 35 V ( $I_{PP} = 16$  A for TLP), 36 V ( $I_{PP} = 2.5$  A for 8/20  $\mu$ s surge waveform), and 38 V ( $I_{PP} = 16$  A for TLP) for the ESD752 and ESD762, respectively.

### 7.3.8 Industry Standard Leaded Packages

These devices feature industry standard SOT-23 (DBZ) and SC-70 (DCK) leaded packages for automatic optical inspection (AOI).

## 7.4 Device Functional Modes

The ESD752 and ESD762 are dual channel passive clamp devices that have low leakage during normal operation when the voltage between IO and GND is below  $V_{RWM}$ , and activate when the voltage between IO and GND goes above  $V_{BR}$ . During IEC 61000-4-2 ESD events, transient voltages as high as  $\pm 30$  kV can be clamped on either channel. When the voltages on the protected lines fall below the  $V_{HOLD}$ , the device reverts back to the low leakage passive state.

## 8 Application and Implementation


### 备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 8.1 Application Information

The ESD752 and ESD762 are dual channel TVS diodes which are used to provide a path to ground for dissipating ESD events on USB-PD or industrial IO signal lines. As the current from the ESD passes through the TVS, only a small voltage drop is present across the diode. This is the voltage presented to the protected IC. The low  $R_{DYN}$  of the triggered TVS holds this voltage ( $V_{CLAMP}$ ) to a safe level for the protected IC.

### 8.2 Typical Application

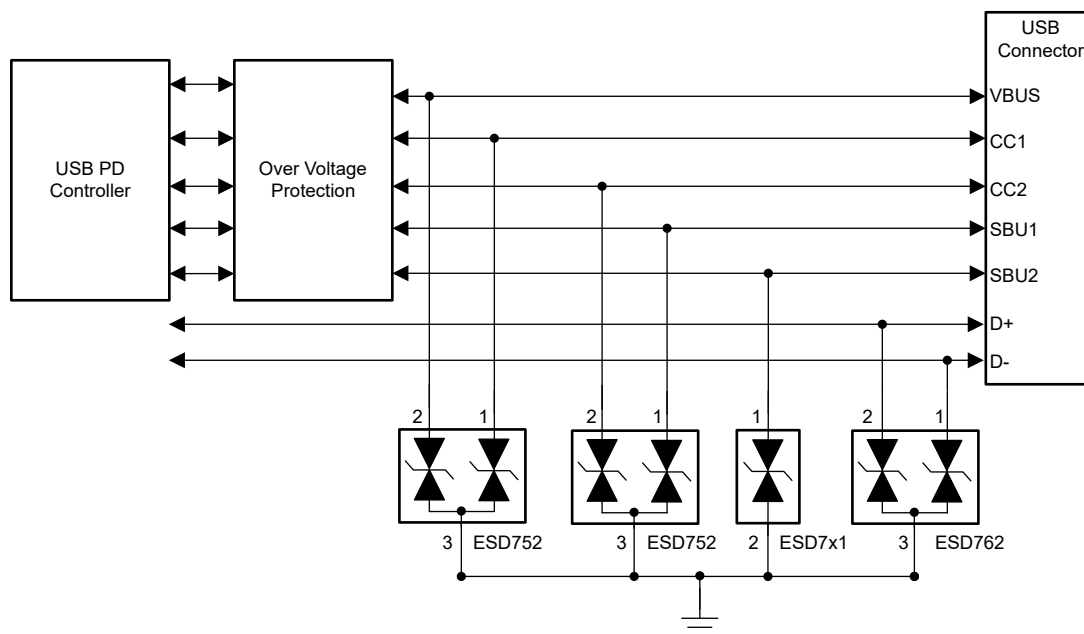

USB Power Delivery Application

图 8-1. USB Power Delivery Typical Application

#### 8.2.1 Design Requirements

For this design example, the ESD752 and ESD762 are used to provide ESD protection on a USB-PD connector. 表 8-1 lists the known design parameters for this application.

表 8-1. Design Parameters for the USB Power Delivery Typical Application

| Design Parameter                | Value         |
|---------------------------------|---------------|
| Diode configuration             | Bidirectional |
| VBUS Voltage                    | + 20 V        |
| $V_{IO}$ signal range           | + 3.3 V       |
| $V_{RWM}$                       | $\pm 24$ V    |
| Short to VBUS event on $V_{IO}$ | $\pm 20$ V    |

**表 8-1. Design Parameters for the USB Power Delivery Typical Application (continued)**

| Design Parameter | Value          |
|------------------|----------------|
| Data rate        | Up to 480 Mbps |

### 8.2.2 Detailed Design Procedure

The ESD752 and ESD762 has a  $V_{RWM}$  of  $\pm 24$  V to prevent the diode from being damaged during a short event that can occur when one of the USB-PD slower speed lines (CC1, CC2, SBU1, SBU2, D+, and D-) is shorted to VBUS. The bidirectional characteristic protects both positive and negative polarity. The low 1.7 pF capacitance of the ESD762 device enables data rates up to 480 Mbps, which allows the designer to meet the requirements for the D+ and D- signals. The ESD752 has an  $I_{PP} = 5.7$  A (8/20  $\mu$ s) surge current capability making it suitable for protecting the VBUS power rail.

### 8.2.3 Application Curves

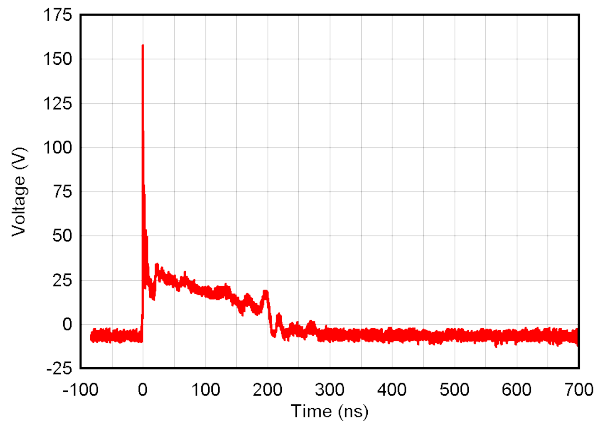


图 8-2. +8-kV Clamped IEC Waveform

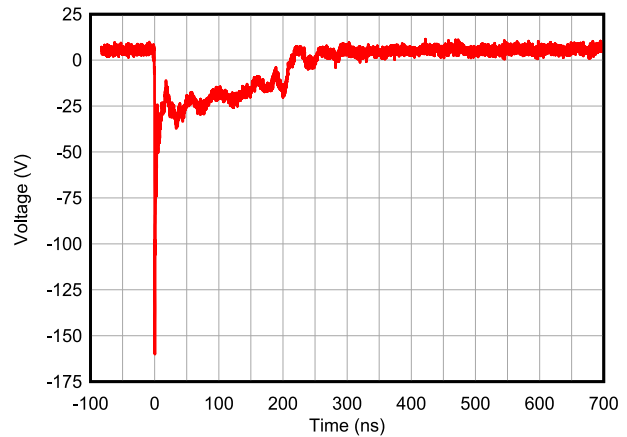


图 8-3. -8-kV Clamped IEC Waveform

## 9 Power Supply Recommendations

These are passive TVS diode-based ESD protection devices; therefore, there is no requirement to power it. Ensure that the maximum voltage specifications for each pin are not violated.

## 10 Layout

### 10.1 Layout Guidelines

- The optimum placement of the device is as close to the connector as possible.
  - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures.
  - The PCB designer must minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.
- Route the protected traces as straight as possible.
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible.
  - Electric fields tend to build up on corners, increasing EMI coupling.
- If pin 3 is connected to ground, use a thick and short trace for this return path.

### 10.2 Layout Example

This is a typical example of a dual channel IO routing.

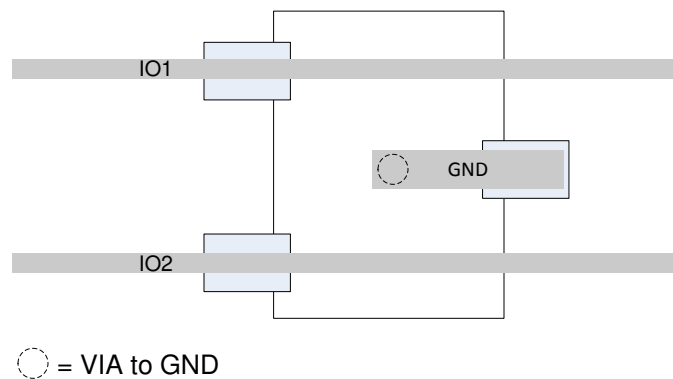


图 10-1. Routing with DBZ and DCK Package

## 11 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

### 11.1 Documentation Support

#### 11.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [ESD Layout Guide user's guide](#)
- Texas Instruments, [ESD and Surge Protection for USB Interfaces application note](#)
- Texas Instruments, [ESD Protection Diodes EVM user's guide](#)
- Texas Instruments, [Generic ESD Evaluation Module user's guide](#)
- Texas Instruments, [Reading and Understanding an ESD Protection data sheet](#)

### 11.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://www.ti.com) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 11.3 支持资源

TI E2E™ [支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

### 11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 11.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number      | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|----------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">ESD752DBZR</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   JUMBO T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 150   | 2RP8                |
| ESD752DBZR.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   JUMBO T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 150   | 2RP8                |
| <a href="#">ESD752DCKR</a> | Active        | Production           | SC70 (DCK)   3   | 3000   JUMBO T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -55 to 150   | 1MP                 |
| ESD752DCKR.B               | Active        | Production           | SC70 (DCK)   3   | 3000   JUMBO T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -55 to 150   | 1MP                 |
| <a href="#">ESD762DBZR</a> | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 150   | 2RK8                |
| ESD762DBZR.B               | Active        | Production           | SOT-23 (DBZ)   3 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -55 to 150   | 2RK8                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ESD752DBZR | SOT-23       | DBZ             | 3    | 3000 | 180.0              | 8.4                | 2.9     | 3.35    | 1.35    | 4.0     | 8.0    | Q3            |
| ESD752DCKR | SC70         | DCK             | 3    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| ESD762DBZR | SOT-23       | DBZ             | 3    | 3000 | 180.0              | 8.4                | 2.9     | 3.35    | 1.35    | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| ESD752DBZR | SOT-23       | DBZ             | 3    | 3000 | 210.0       | 185.0      | 35.0        |
| ESD752DCKR | SC70         | DCK             | 3    | 3000 | 180.0       | 180.0      | 18.0        |
| ESD762DBZR | SOT-23       | DBZ             | 3    | 3000 | 210.0       | 185.0      | 35.0        |




# EXAMPLE BOARD LAYOUT


DCK0003A

SOT-SC70 - 1.1 max height

SMALL OUTLINE TRANSISTOR SC70

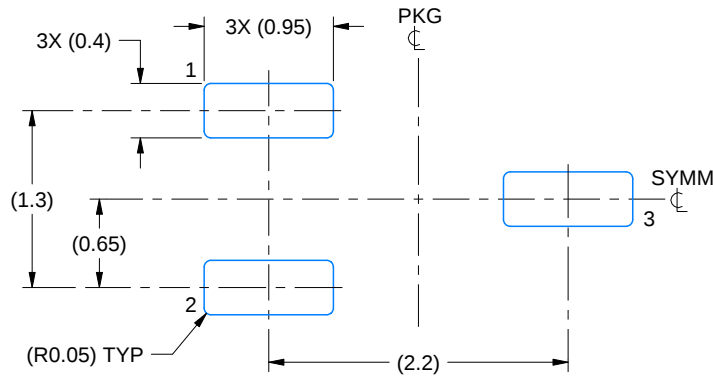

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

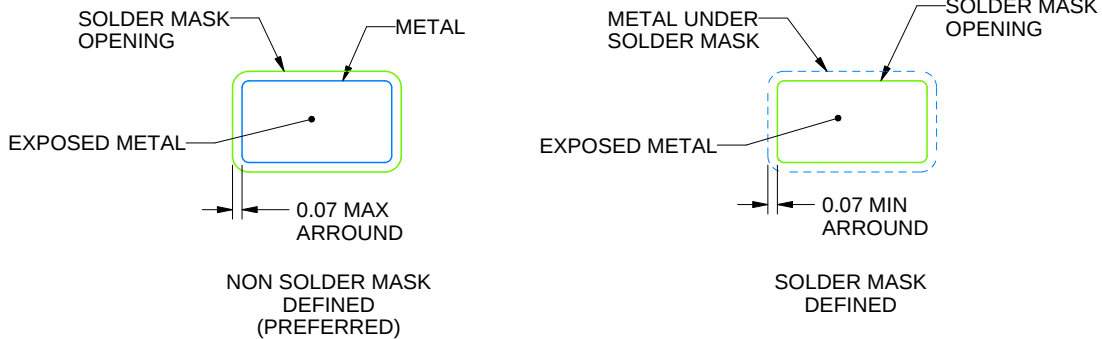

SOLDER MASK DETAILS

4220745/F 11/2024

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DCK0003A

SOT-SC70 - 1.1 max height

SMALL OUTLINE TRANSISTOR SC70

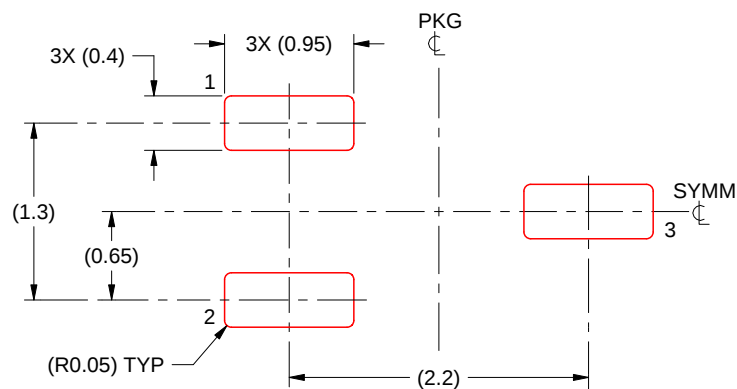

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:18X


4220745/F 11/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

**DBZ0003A****PACKAGE OUTLINE****SOT-23 - 1.12 mm max height**

SMALL OUTLINE TRANSISTOR

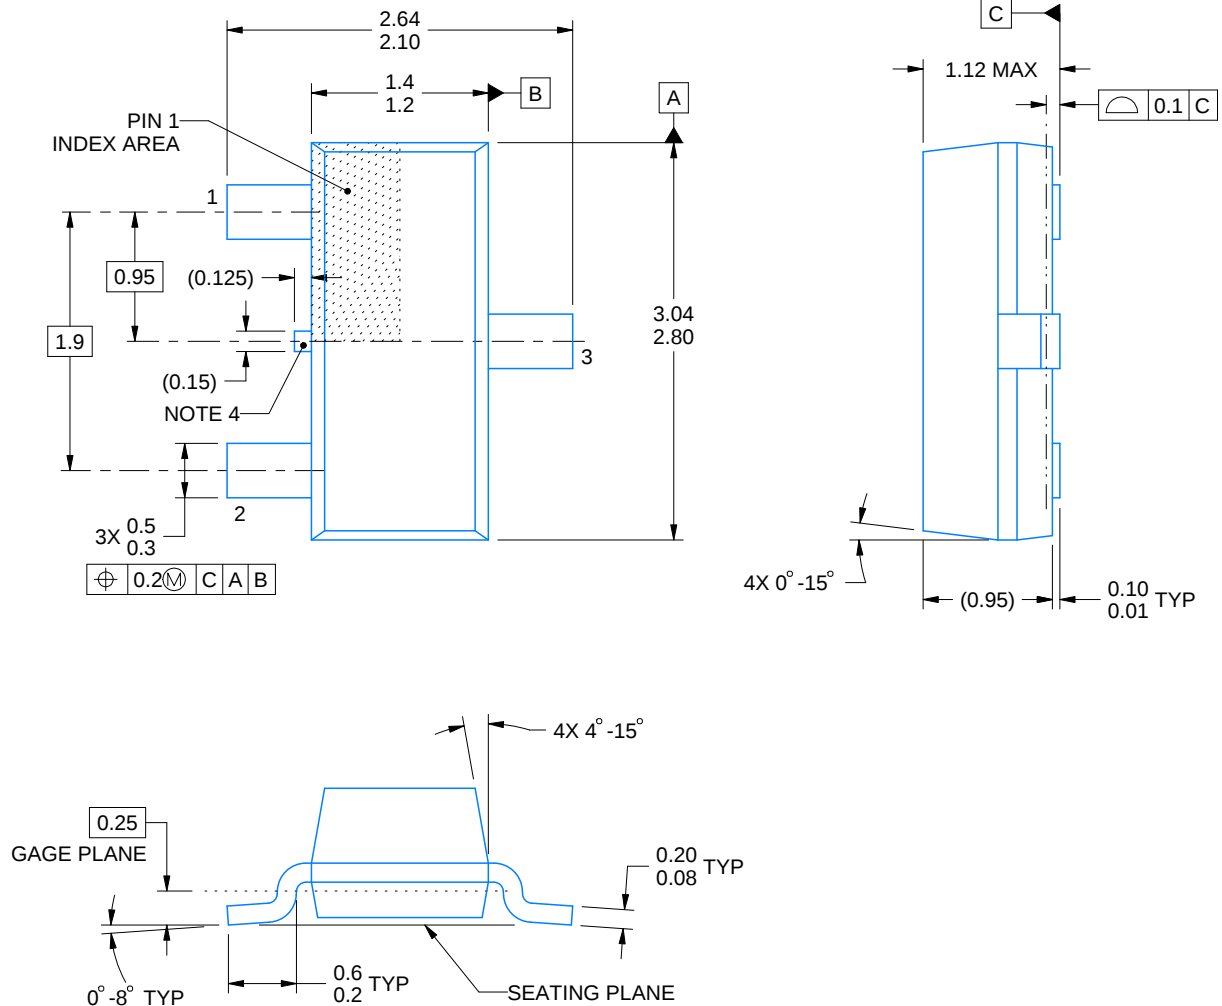

4214838/F 08/2024

**NOTES:**

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC registration TO-236, except minimum foot length.
4. Support pin may differ or may not be present.
5. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side




# EXAMPLE STENCIL DESIGN

DBZ0003A

SOT-23 - 1.12 mm max height

SMALL OUTLINE TRANSISTOR

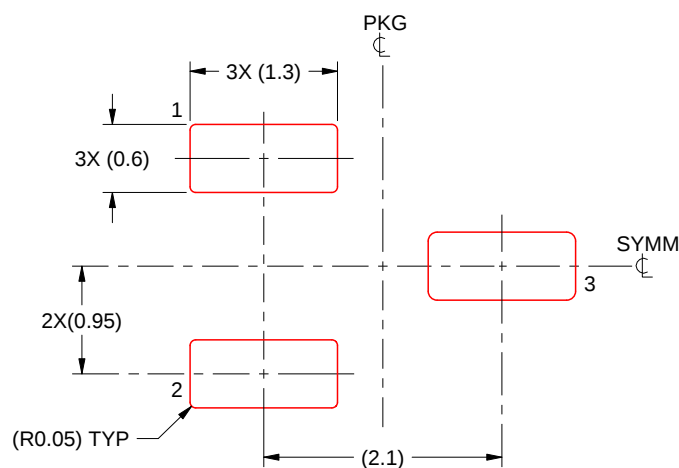

SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:15X

4214838/F 08/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司