

## 具有精密基准电压的 TLV40x1 小尺寸、低功耗比较器

### 1 特性

- 宽电源电压范围：1.6V 至 5.5V
- 精密基准：0.2V、0.5V 和 1.2V
- 3.2V 的固定阈值
- 基准精度
  - 25°C 时为 0.5%
  - 工作温度范围内精度为 1%
- 低静态电流：2μA
- 传播延迟：360ns
- 推挽和开漏输出选项
- 已知启动条件
- 同相和反相输入选项
- 精密迟滞
- 温度范围：-40°C 至 +125°C
- 封装：
  - 0.73mm × 0.73mm DSBGA (4 凸点)
  - SOT-23 (5 引脚)

### 2 应用

- 自诊断
- 锂离子电池监测
- 电池管理和保护
- 电流和电压感应
- 模拟前端
- 电源管理
- 负载点稳压器
- 直流/直流和交流/直流电源
- 系统控制和监测

### 3 说明

TLV40x1 器件是具有精密基准和快速响应功能的低功耗、高精度比较器。这些比较器采用 0.73mm × 0.73mm 超小型 DSBGA 封装，使得 TLV40x1 适用于空间关键型设计，例如要求低功耗和对工作条件变化作出快速响应的便携式或电池供电设计。


经过出厂校准的基准和精密迟滞相结合，使得 TLV40x1 非常适合在必须将慢速输入信号转换为纯净数字输出的严苛、嘈杂环境中进行电压和电流监测。同样地，输入端的短时毛刺脉冲也得以抑制，可确保稳定的输出运行，不会引起误触发。

TLV40x1 提供多种配置，从而使系统设计人员可实现他们所需的输出响应。例如，TLV4021 和 TLV4041 具有同相输入，而 TLV4031 和 TLV4051 具有反相输入。此外，TLV4021 和 TLV4031 具有开漏输出级，而 TLV4041 和 TLV4051 具有推挽式输出级。最后，TLV40x1 系列中的每款比较器都提供 0.2V、0.5V 或 1.2V 精密基准。

#### 器件信息

| 器件型号                                    | 封装 (1)     | 封装尺寸 (标称值)      |
|-----------------------------------------|------------|-----------------|
| TLV4021、<br>TLV4031、<br>TLV4041、TLV4051 | DSBGA (4)  | 0.73mm × 0.73mm |
| TLV4041、TLV4051                         | SOT-23 (5) | 2.9mm × 1.6mm   |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

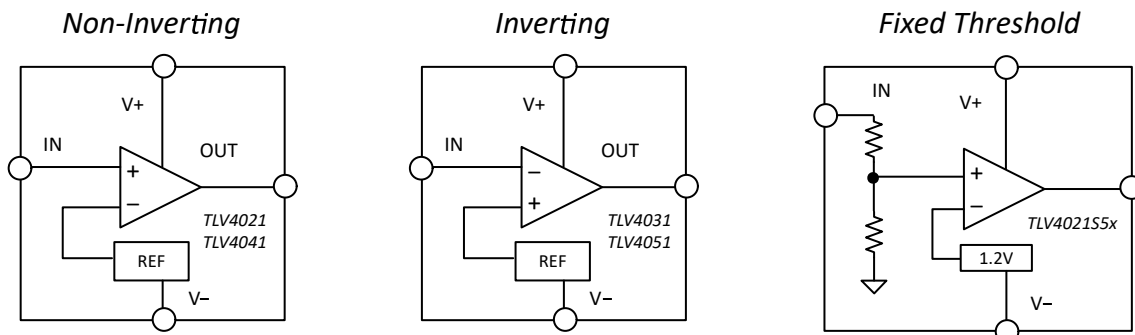


TLV40x1 配置



表 3-1. TLV40x1 真值表

| 器件        | 输入配置 | Reference | 输出类型 |
|-----------|------|-----------|------|
| TLV4021R1 | 同相   | 1.2V      | 开漏   |
| TLV4041R1 |      |           | 推挽   |
| TLV4041R5 |      | 0.5V      | 推挽   |
| TLV4021R2 |      | 0.2V      | 开漏   |
| TLV4041R2 |      |           | 推挽   |
| TLV4031R1 | 反相   | 1.2V      | 开漏   |
| TLV4051R1 |      |           | 推挽   |
| TLV4051R5 |      | 0.5V      | 推挽   |
| TLV4031R2 |      | 0.2V      | 开漏   |
| TLV4051R2 |      |           | 推挽   |

| 器件         | 输入配置 | 固定阈值 | 输出类型 |
|------------|------|------|------|
| TLV4021S5x | 同相   | 3.2V | 开漏   |

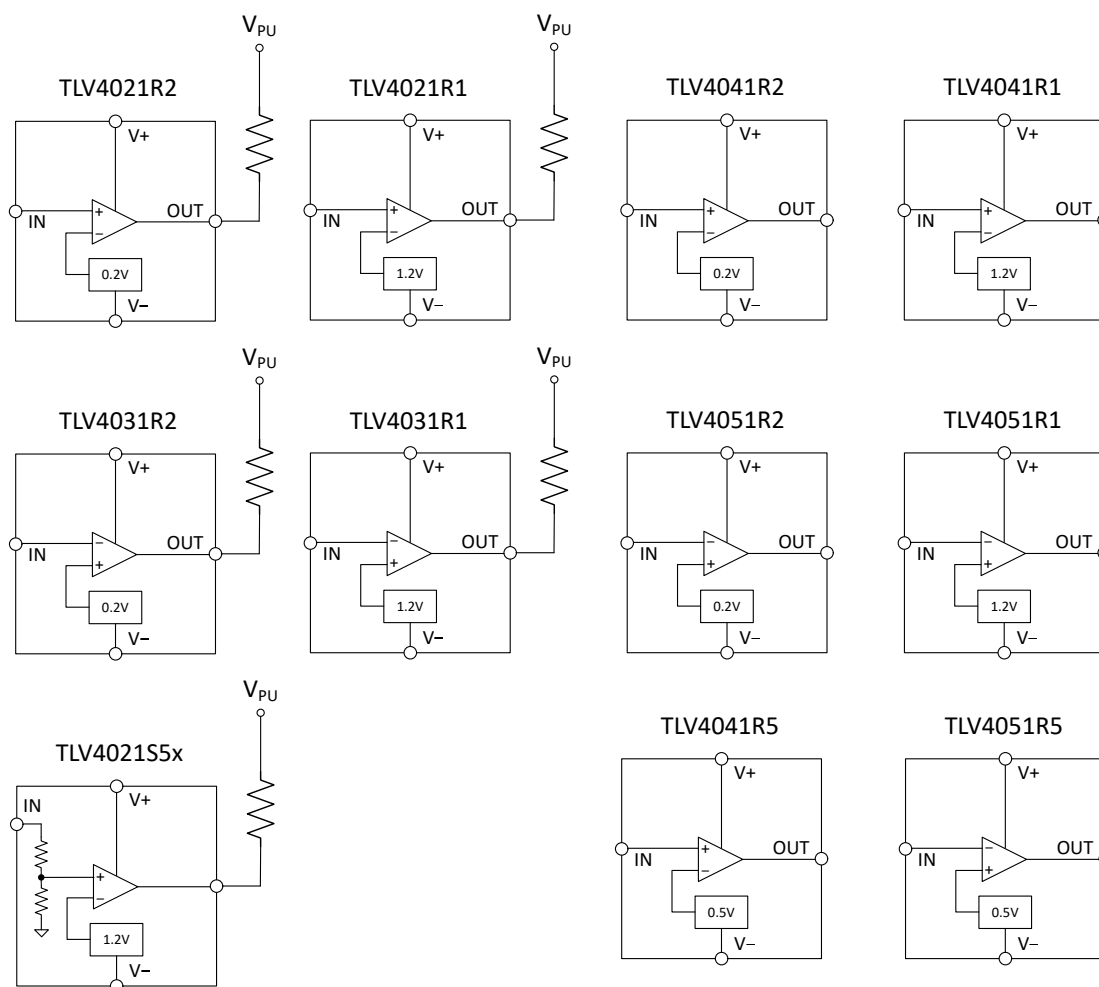

## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | 8.4 Device Functional Modes.....                                 | <b>16</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | <b>9 Application and Implementation</b> .....                    | <b>19</b> |
| <b>3 说明</b> .....                              | <b>1</b>  | 9.1 Application Information.....                                 | 19        |
| <b>4 Revision History</b> .....                | <b>3</b>  | 9.2 Typical Application.....                                     | 21        |
| <b>5 Pin Configuration and Functions</b> ..... | <b>4</b>  | 9.3 What to Do and What Not to Do.....                           | 23        |
| <b>6 Specifications</b> .....                  | <b>5</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>24</b> |
| 6.1 Absolute Maximum Ratings.....              | 5         | <b>11 Layout</b> .....                                           | <b>24</b> |
| 6.2 ESD Ratings.....                           | 5         | 11.1 Layout Guidelines.....                                      | 24        |
| 6.3 Recommended Operating Conditions.....      | 5         | 11.2 Layout Example.....                                         | 24        |
| 6.4 Thermal Information.....                   | 5         | <b>12 Device and Documentation Support</b> .....                 | <b>25</b> |
| 6.5 Electrical Characteristics.....            | 6         | 12.1 接收文档更新通知.....                                               | 25        |
| 6.6 Switching Characteristics.....             | 7         | 12.2 支持资源.....                                                   | 25        |
| <b>7 Typical Characteristics</b> .....         | <b>8</b>  | 12.3 Trademarks.....                                             | 25        |
| <b>8 Detailed Description</b> .....            | <b>14</b> | 12.4 静电放电警告.....                                                 | 25        |
| 8.1 Overview.....                              | 14        | 12.5 术语表.....                                                    | 25        |
| 8.2 Functional Block Diagram.....              | 15        | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>25</b> |
| 8.3 Feature Description.....                   | 16        |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

|                                                                          |             |
|--------------------------------------------------------------------------|-------------|
| <b>Changes from Revision B (June 2020) to Revision C (December 2021)</b> | <b>Page</b> |
| • 更新了整个文档中的表格、图和交叉参考的编号格式.....                                           | 1           |
| • 通篇添加了 TLV4021S5x.....                                                  | 1           |
| <b>Changes from Revision A (May 2019) to Revision B (March 2020)</b>     | <b>Page</b> |
| • 添加了具有 0.5V 基准电压的 SOT-23 封装选项.....                                      | 1           |
| • 更改了配置图和 TLV40x1 真值表.....                                               | 1           |
| • 添加了整个 TLV40x1 系列的配置图.....                                              | 1           |
| <b>Changes from Revision * (October 2018) to Revision A (May 2019)</b>   | <b>Page</b> |
| • 将“产品预发布”更改为“量产数据”.....                                                 | 1           |

## 5 Pin Configuration and Functions




图 5-1. YKA Package  
4-Bump DSBGA  
Top View

表 5-1. DSBGA Package Pin Functions

| PIN  |        | I/O | DESCRIPTION                                                                         |
|------|--------|-----|-------------------------------------------------------------------------------------|
| NAME | NUMBER |     |                                                                                     |
| OUT  | A1     | O   | Comparator output: OUT is push-pull on TLV4041/4051 and open-drain on TLV4021/4031  |
| V+   | B1     | P   | Positive (highest) power supply                                                     |
| V-   | B2     | P   | Negative (lowest) power supply                                                      |
| IN   | A2     | I   | Comparator input: IN is non-Inverting on TLV4021/4041 and inverting on TLV4031/4051 |

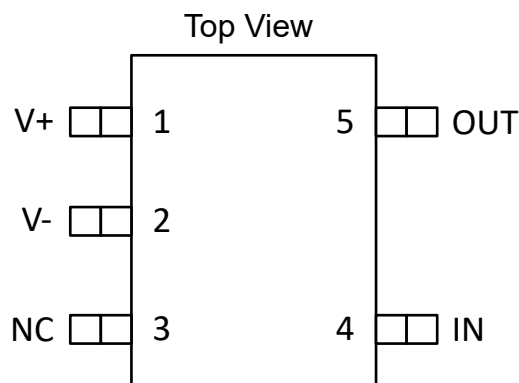


图 5-2. SOT-23 Package  
5-pin  
Top View

表 5-2. SOT-23 Pin Functions

| PIN  |        | I/O | DESCRIPTION                                                                                                         |
|------|--------|-----|---------------------------------------------------------------------------------------------------------------------|
| NAME | NUMBER |     |                                                                                                                     |
| V+   | 1      | P   | Positive (highest) power supply                                                                                     |
| V-   | 2      | P   | Negative (lowest) power supply                                                                                      |
| NC   | 3      | x   | No connect; this pin is not internally connected to the die. It can be grounded if that is preferred in the system. |
| IN   | 4      | I   | Comparator input: IN is inverting on TLV4031/4051                                                                   |
| OUT  | 5      | O   | Comparator output: OUT is push-pull on TLV4041/4051                                                                 |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                               |                  | MIN   | MAX          | UNIT |
|-----------------------------------------------|------------------|-------|--------------|------|
| Supply voltage: $V_S = (V+) - (V-)$           |                  | - 0.3 | 6            | V    |
| Input voltage (IN) from $(V-)$ <sup>(2)</sup> |                  | - 0.3 | 6            | V    |
| Input Current (IN) <sup>(2)</sup>             |                  |       | ±10          | mA   |
| Output voltage (OUT) from $(V-)$              | TLV4021, TLV4031 | - 0.3 | 6            | V    |
|                                               | TLV4041, TLV4051 | - 0.3 | $(V+) + 0.3$ | V    |
| Output short-circuit duration <sup>(3)</sup>  |                  |       | 10           | s    |
| Junction temperature, $T_J$                   |                  |       | 150          | °C   |
| Storage temperature, $T_{stg}$                |                  | - 65  | 150          | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to  $(V-)$ . Input signals that can swing more than 0.3 V below  $(V-)$  must be current-limited to 10 mA or less.  
In addition, IN can be greater than  $(V+)$  and OUT as long as it is within the - 0.3 V to 6 V range. Input signals that can swing beyond this range must be current-limited to 10 mA or less.
- (3) Short-circuit to ground.

### 6.2 ESD Ratings

|             |                         |                                                                                | VALUE | UNIT |
|-------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|             |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                     | MIN  | MAX | UNIT |
|-------------------------------------|------|-----|------|
| Supply voltage: $V_S = (V+) - (V-)$ | 1.6  | 5.5 | V    |
| Ambient temperature, $T_A$          | - 40 | 125 | °C   |

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TLV40x1     |              | UNIT |
|-------------------------------|----------------------------------------------|-------------|--------------|------|
|                               |                                              | YKA (DSBGA) | SOT-23 (DBV) |      |
|                               |                                              | 4 BUMPS     | 5 PINS       |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 205.5       | 181.7        | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 1.8         | 101.1        | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 75.3        | 52.0         | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 0.9         | 28.2         | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 74.7        | 51.6         | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A         | N/A          | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

$V_S = 1.8\text{ V}$  to  $5\text{ V}$ , typical values are at  $T_A = 25^\circ\text{C}$ .

| PARAMETER                       |                                                         | TEST CONDITIONS                                                                                         |            | MIN    | TYP   | MAX    | UNIT |
|---------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------|--------|-------|--------|------|
| V <sub>IT+</sub>                | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1R1  | 1.194  | 1.2   | 1.206  | V    |
|                                 | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 1.188  |       | 1.212  |      |
| V <sub>IT-</sub>                | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   |            | 1.174  | 1.18  | 1.186  |      |
|                                 | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 1.168  |       | 1.192  |      |
| V <sub>IT+</sub>                | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1R2  | 0.197  | 0.2   | 0.203  | V    |
|                                 | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 0.196  |       | 0.204  |      |
| V <sub>IT-</sub>                | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   |            | 0.177  | 0.18  | 0.183  |      |
|                                 | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 0.176  |       | 0.184  |      |
| V <sub>IT+</sub>                | Positive-going input threshold voltage (TLV40x1R5 only) | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1R5  | 0.495  | 0.5   | 0.505  | V    |
|                                 | Positive-going input threshold voltage (TLV40x1R5 only) | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 0.49   |       | 0.51   | V    |
| V <sub>IT-</sub>                | Negative-going input threshold voltage (TLV40x1R5 only) | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   |            | 0.4752 | 0.48  | 0.4848 | V    |
|                                 | Negative-going input threshold voltage (TLV40x1R5 only) | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 0.4704 |       | 0.4896 | V    |
| V <sub>IT+</sub>                | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV4021S5x | 3.238  | 3.254 | 3.270  | V    |
|                                 | Positive-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 3.221  |       | 3.287  | V    |
| V <sub>IT-</sub>                | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   |            | 3.184  | 3.2   | 3.216  | V    |
|                                 | Negative-going input threshold voltage                  | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = -40°C to +125°C                                        |            | 3.168  |       | 3.232  | V    |
| V <sub>HYS</sub> <sup>(2)</sup> | Input hysteresis voltage                                | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1Ry  |        | 20    |        | mV   |
| V <sub>HYS</sub>                | Input hysteresis voltage (TLV40x1R5 only)               | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1R5  |        | 20    |        | mV   |
| V <sub>HYS</sub> <sup>(2)</sup> | Input hysteresis voltage                                | V <sub>S</sub> = 1.8 V and 5 V, T <sub>A</sub> = 25°C                                                   | TLV40x1S5x |        | 54    |        | mV   |
| V <sub>IN</sub>                 | Input voltage range                                     | T <sub>A</sub> = -40°C to +125°C                                                                        |            | V –    |       | 5.5    | V    |
| I <sub>BIAS</sub>               | Input bias current                                      | Over V <sub>IN</sub> range                                                                              |            |        | 10    |        | pA   |
| I <sub>BIAS</sub>               | Input bias current (TLV4021S5x only)                    | I <sub>N</sub> = 3.3 V                                                                                  |            |        | 1.65  |        | µA   |
| V <sub>OL</sub>                 | Voltage output swing from (V –)                         | I <sub>SINK</sub> = 200 µA, OUT asserted low, V <sub>S</sub> = 5 V, T <sub>A</sub> = -40°C to +125°C    |            |        |       | 100    | mV   |
|                                 |                                                         | I <sub>SINK</sub> = 3 mA, OUT asserted low, V <sub>S</sub> = 5 V, T <sub>A</sub> = -40°C to +125°C      |            |        |       | 400    | mV   |
| V <sub>OH</sub>                 | Voltage output swing from (V+) (TLV4041/4051 only)      | I <sub>SOURCE</sub> = 200 µA, OUT asserted high, V <sub>S</sub> = 5 V, T <sub>A</sub> = -40°C to +125°C |            |        |       | 100    | mV   |
|                                 |                                                         | I <sub>SOURCE</sub> = 3 mA, OUT asserted high, V <sub>S</sub> = 5 V, T <sub>A</sub> = -40°C to +125°C   |            |        |       | 400    | mV   |
| I <sub>O-LKG</sub>              | Open-drain output leakage current (TLV4021/4031 only)   | V <sub>S</sub> = 5 V, OUT asserted high V <sub>PULLUP</sub> = (V+), T <sub>A</sub> = 25°C               |            |        | 20    |        | pA   |
| I <sub>SC</sub>                 | Short-circuit current                                   | V <sub>S</sub> = 5 V, sinking, T <sub>A</sub> = 25°C                                                    |            |        | 55    |        | mA   |
| I <sub>SC</sub>                 | Short-circuit current                                   | V <sub>S</sub> = 5 V, sourcing, T <sub>A</sub> = 25°C (TLV4041/4051 only)                               |            |        | 50    |        | mA   |

## 6.5 Electrical Characteristics (continued)

$V_S = 1.8\text{ V}$  to  $5\text{ V}$ , typical values are at  $T_A = 25^\circ\text{C}$ .

| PARAMETER       |                        | TEST CONDITIONS                                                                               | MIN | TYP  | MAX | UNIT          |
|-----------------|------------------------|-----------------------------------------------------------------------------------------------|-----|------|-----|---------------|
| $I_Q$           | Quiescent current      | No load, $T_A = 25^\circ\text{C}$ , Output Low, $V_S = 1.8\text{ V}$                          |     | 2    | 3.5 | $\mu\text{A}$ |
|                 |                        | No load, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ , Output Low, $V_S = 1.8\text{ V}$ |     |      | 5   | $\mu\text{A}$ |
| $V_{POR}^{(1)}$ | Power-on reset voltage |                                                                                               |     | 1.45 |     | V             |

- (1) See Section 7.4.1 (Power ON Reset) for more details.  
(2) See Section 7.4.3 (Switching Thresholds and Hysteresis) for more details.

## 6.6 Switching Characteristics

Typical values are at  $T_A = 25^\circ\text{C}$ ,  $V_S = 3.3\text{ V}$ ,  $C_L = 15\text{ pF}$ ; Input overdrive =  $100\text{ mV}$  for TLV40x1Ry & 5% for TLV4021S5x,  $R_P = 4.99\text{ k}\Omega$  for open-drain options (unless otherwise noted).

| PARAMETER |                                                                    | TEST CONDITIONS                         | MIN | TYP | MAX | UNIT          |
|-----------|--------------------------------------------------------------------|-----------------------------------------|-----|-----|-----|---------------|
| $t_{PHL}$ | Propagation delay, high-to-low <sup>(1)</sup>                      | Midpoint of input to midpoint of output |     | 360 |     | ns            |
| $t_{PLH}$ | Propagation delay, low-to-high <sup>(1)</sup>                      | Midpoint of input to midpoint of output |     | 360 |     | ns            |
| $t_{PHL}$ | Propagation delay, high-to-low <sup>(1)</sup><br>(TLV4021S5x only) | Midpoint of input to midpoint of output |     | 2   |     | $\mu\text{s}$ |
| $t_{PLH}$ | Propagation delay, low-to-high <sup>(1)</sup><br>(TLV4021S5x only) | Midpoint of input to midpoint of output |     | 2   |     | $\mu\text{s}$ |
| $t_R$     | Rise time<br>(TLV4041/4051 only)                                   | 20% to 80%                              |     | 10  |     | ns            |
| $t_F$     | Fall time                                                          | 20% to 80%                              |     | 10  |     | ns            |
| $t_{ON}$  | Power-up time <sup>(2)</sup>                                       |                                         |     | 500 |     | $\mu\text{s}$ |

- (1) High-to-low and low-to-high refers to the transition at the input.  
(2) During power on cycle,  $V_S$  must exceed  $1.6\text{ V}$  for  $t_{ON}$  before the output will reflect the condition on the input. Prior to  $t_{ON}$  elapsing, the output is controlled by the POR circuit.

## 7 Typical Characteristics

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

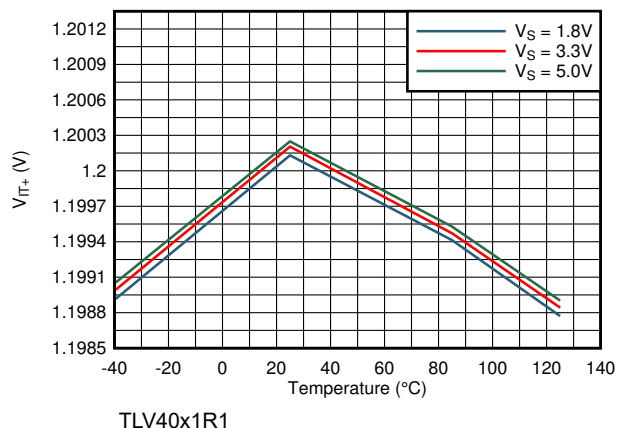


图 7-1. Positive Threshold vs Temperature

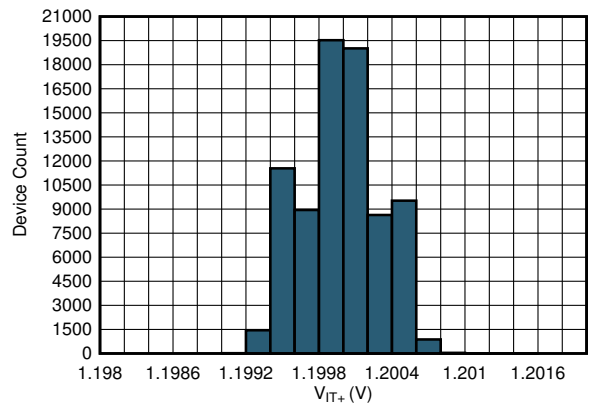


图 7-2. Positive Threshold Histogram

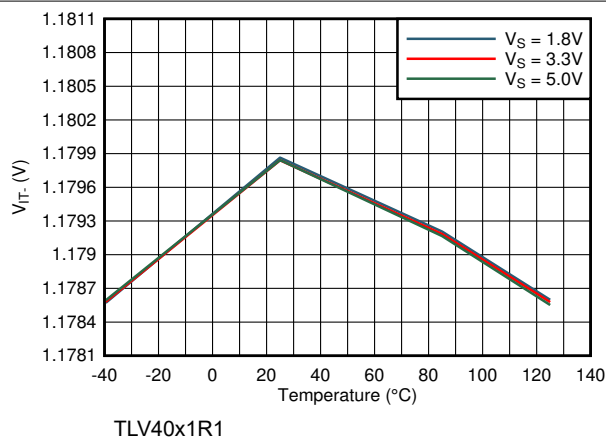


图 7-3. Negative Threshold vs Temperature

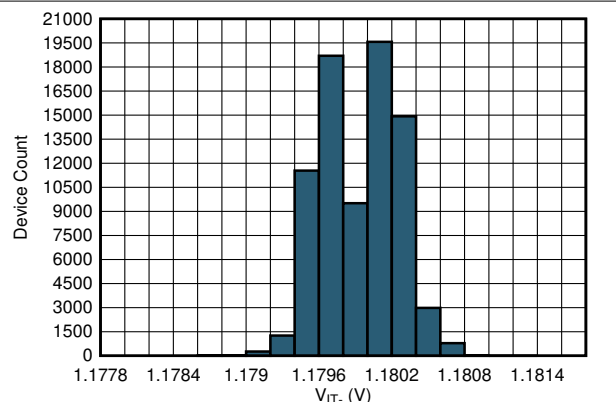


图 7-4. Negative Threshold Histogram

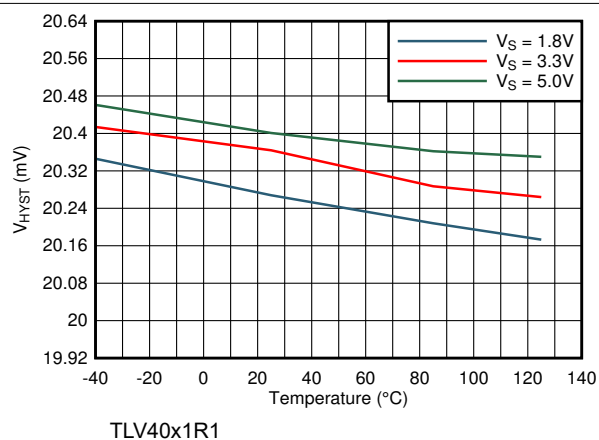


图 7-5. Hysteresis vs Temperature

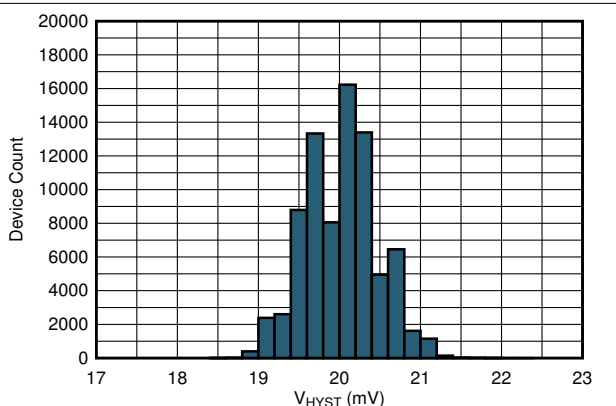


图 7-6. Hysteresis Histogram



## 7 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

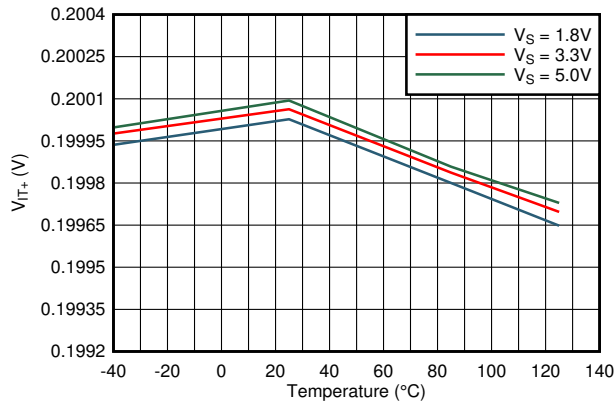


图 7-7. Positive Threshold vs Temperature

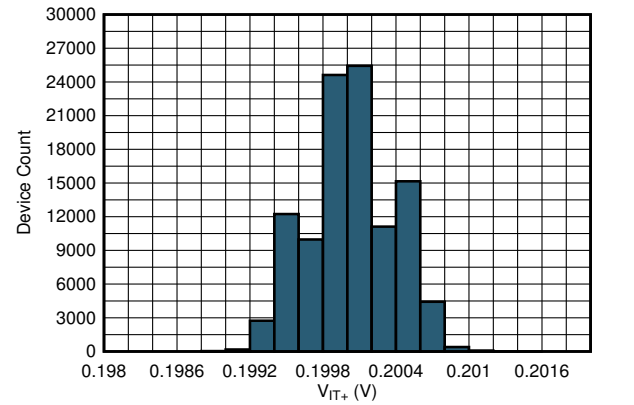


图 7-8. Positive Threshold Histogram

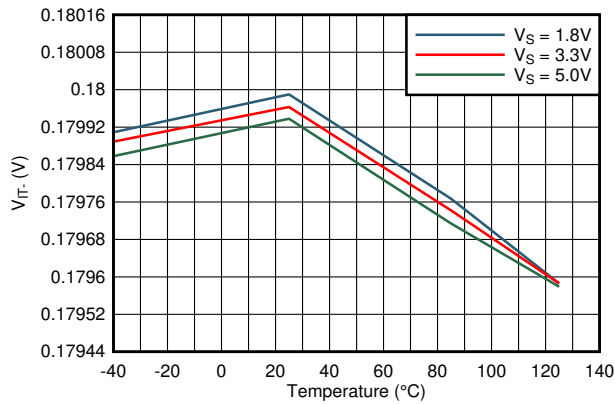


图 7-9. Negative Threshold vs Temperature

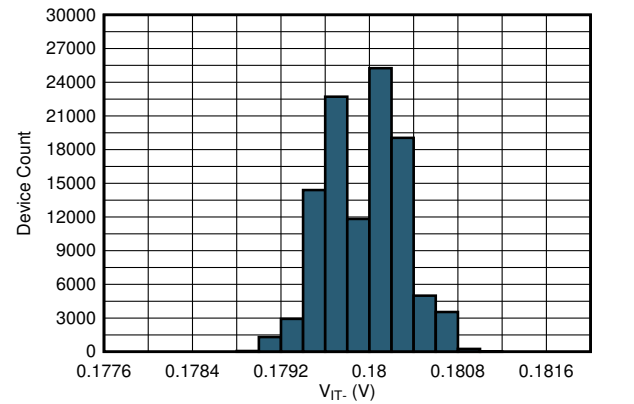


图 7-10. Negative Threshold Histogram

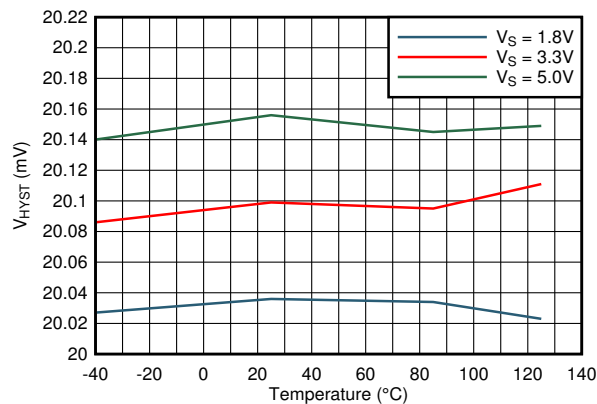


图 7-11. Hysteresis vs Temperature


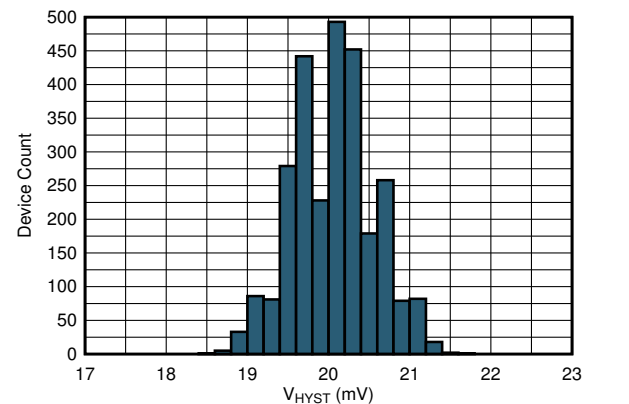


图 7-12. Hysteresis Histogram


## 7 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

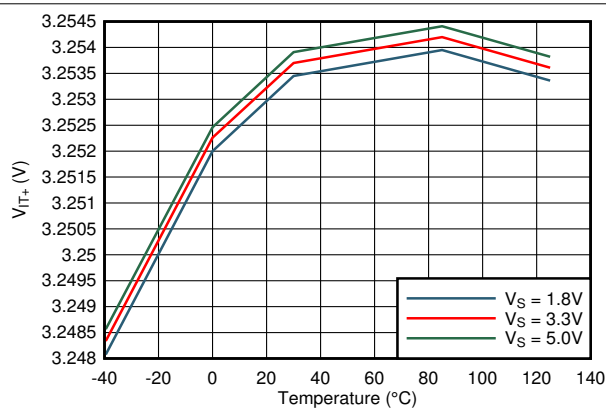


TLV4021S5x

图 7-13. Positive Threshold vs Temperature

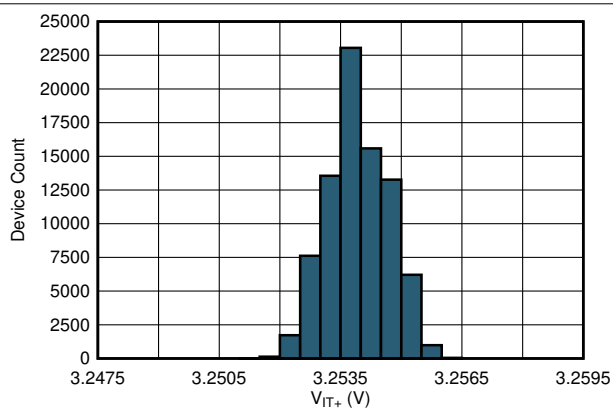


TLV4021S5x

图 7-14. Positive Threshold Histogram

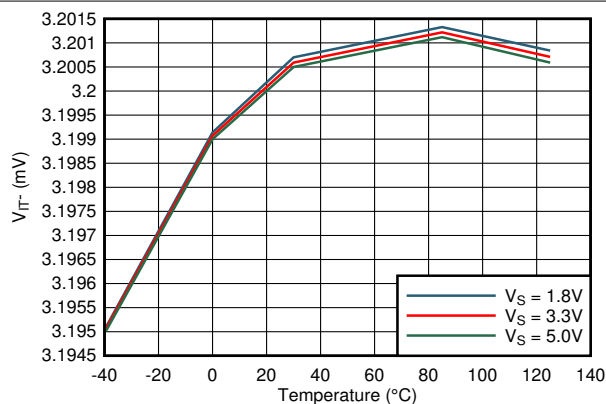


TLV4021S5x

图 7-15. Negative Threshold vs Temperature

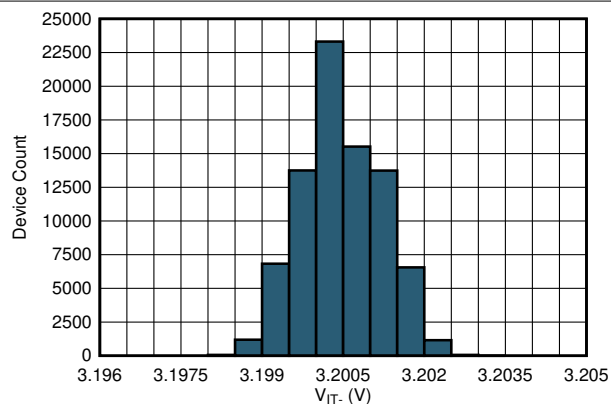


TLV4021S5x

图 7-16. Negative Threshold Histogram

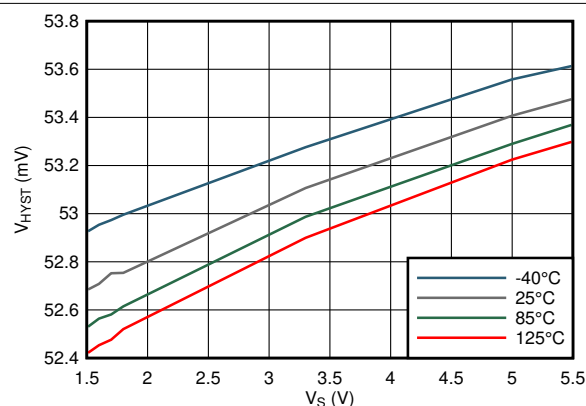

TLV4021S5x

图 7-17. Hysteresis vs Supply Voltage

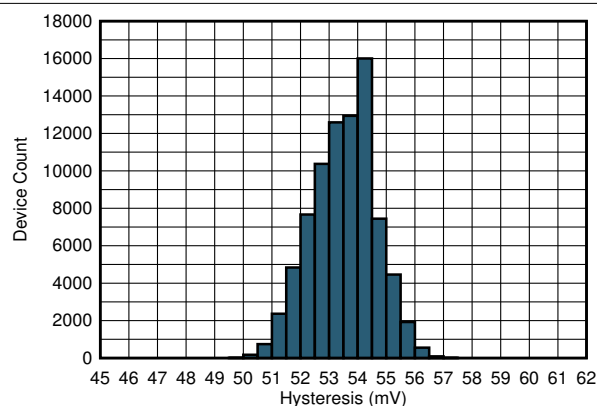


TLV4021S5x

图 7-18. Hysteresis Histogram

## 7 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

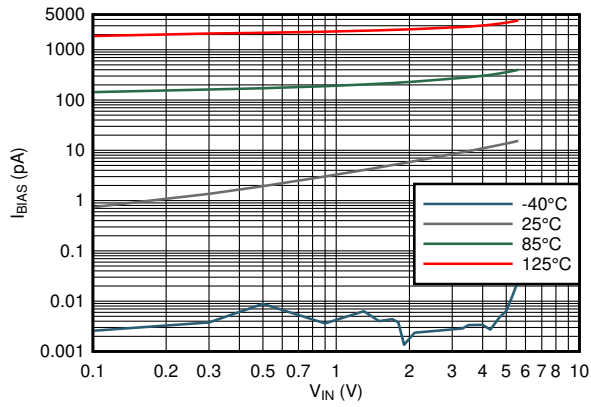

$V_S = 1.8\text{ V to } 5\text{ V}$

TLV40x1Ry

图 7-19. Bias Current vs Common Mode Voltage



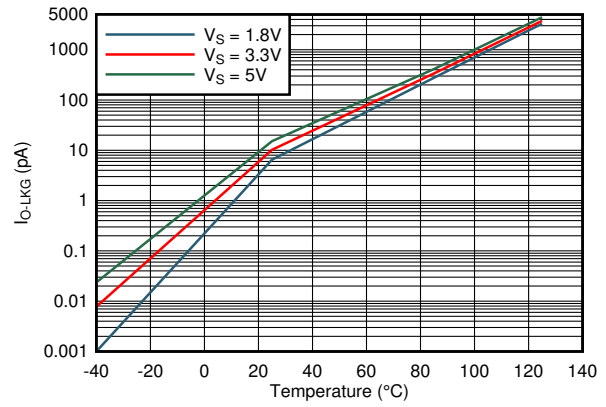


图 7-20. Output Current Leakage vs Temperature

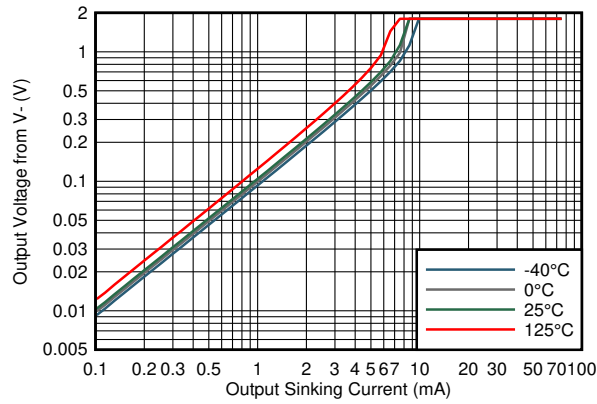


$V_S = 1.8\text{ V}$

图 7-21. Output Voltage vs Output Sinking Current

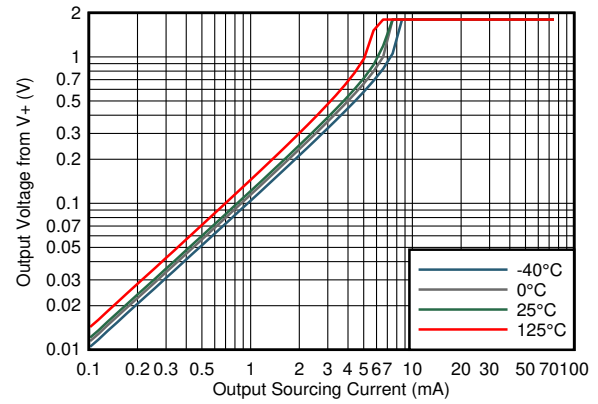


$V_S = 1.8\text{ V}$

图 7-22. Output Voltage vs Output Sourcing Current

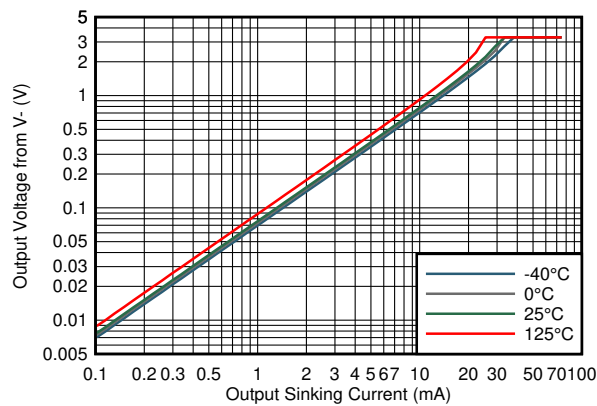

$V_S = 3.3\text{ V}$

图 7-23. Output Voltage vs Output Sinking Current

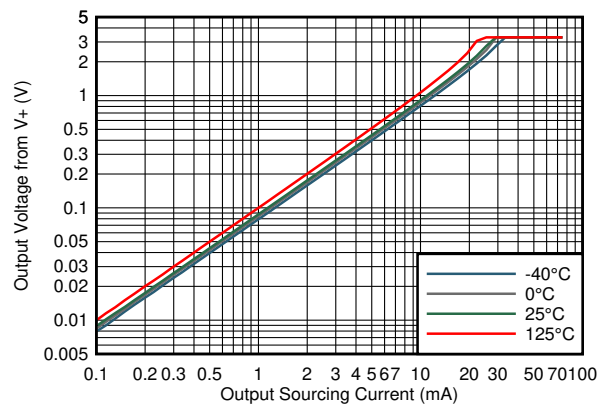


$V_S = 3.3\text{ V}$

图 7-24. Output Voltage vs Output Sourcing Current


## 7 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

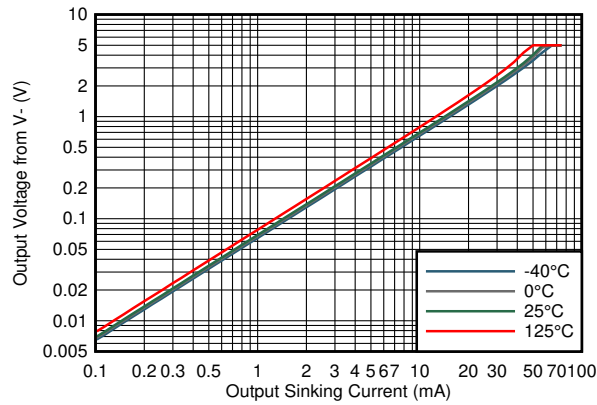

$V_S = 5\text{ V}$

图 7-25. Output Voltage vs Output Sinking Current

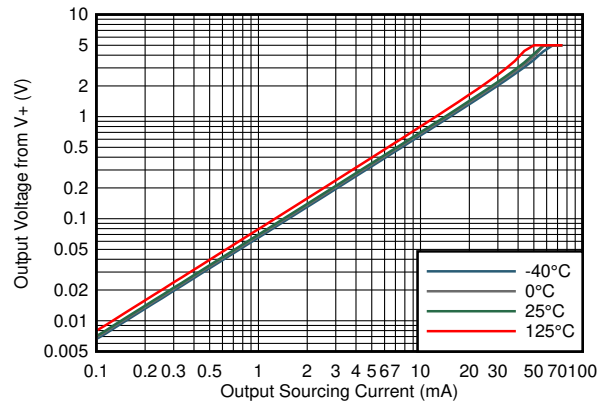

$V_S = 5\text{ V}$

图 7-26. Output Voltage vs Output Sourcing Current


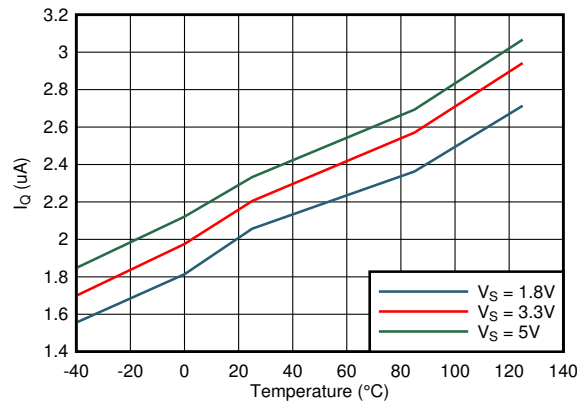



图 7-27. Supply Current vs Temperature

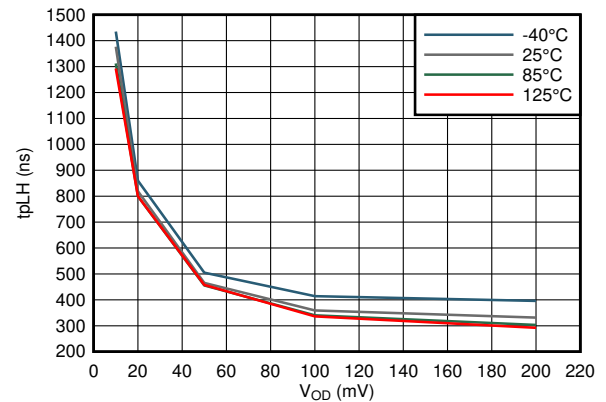

$V_S = 1.8\text{ V to } 5\text{ V}$

TLV40x1R2


图 7-28. Propagation Delay Low-High vs Input Overdrive

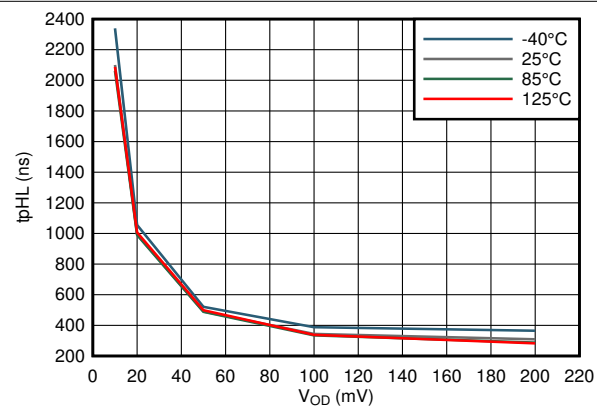

$V_S = 1.8\text{ V to } 5\text{ V}$

TLV40x1R2

图 7-29. Propagation Delay High-Low vs Input Overdrive

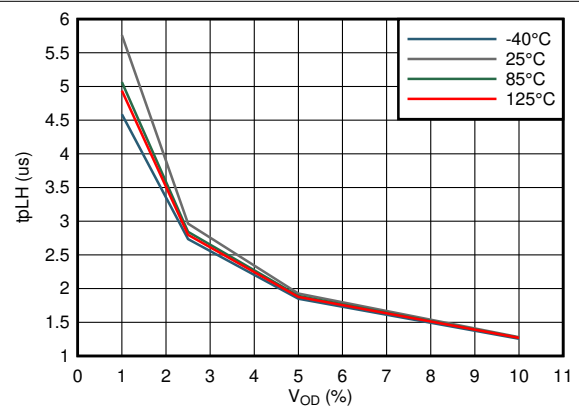


$V_S = 1.8\text{ V to } 5\text{ V}$

TLV4021Sx5

图 7-30. Propagation Delay Low-High vs Input Overdrive

## 7 Typical Characteristics (continued)

at  $T_J = 25^\circ\text{C}$  and  $V_S = 3.3\text{ V}$  (unless otherwise noted)

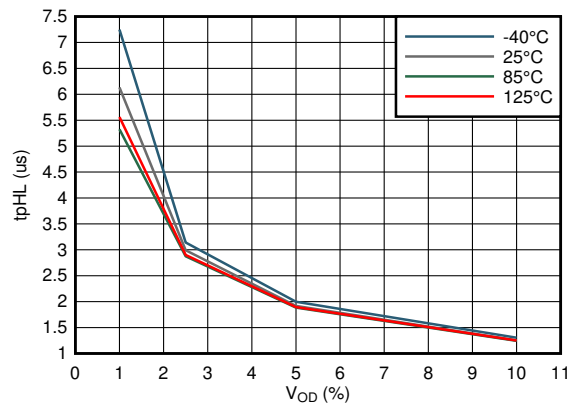

$V_S = 1.8\text{V to } 5\text{V}$

TLV4021Sx5

图 7-31. Propagation Delay High-Low vs Input Overdrive

## 8 Detailed Description

### 8.1 Overview

The TLV40x1 devices are low-power comparators that are well suited for compact, low-current, precision voltage detection applications. With high-accuracy, switching thresholds options of 0.2V, 0.5 V, 1.2V, and 3.2V, 2uA of quiescent current, and propagation delay of 450ns and 2us, the TLV40x1 comparator family enables power conscious systems to monitor and respond quickly to fault conditions.


The TLV40x1Ry comparators assert the output signal as shown in 表 8-1.  $V_{IT+}$  represents the positive-going input threshold that causes the comparator output to change state, while  $V_{IT-}$  represents the negative-going input threshold that causes the output to change state. Since  $V_{IT+}$  and  $V_{IT-}$  are factory trimmed and warranted over temperature, the TLV40x1 is equally suited for undervoltage and overvoltage applications. In order to monitor any voltage above the internal reference voltage, an external resistor divider network is required.

The TLV4021S5x functions similar to the TLV40x1Ry comparators except the resistor divider is internal to the device. Having the resistor divider internal to the device allows the TLV4021S5x to have switching thresholds higher than the internal reference voltage of 1.2V without any external components.

表 8-1. TLV40x1 Truth Table

| DEVICE                              | ( $V_{IT+}$ , $V_{IT-}$ )                 | OUTPUT TOPOLOGY | INPUT VOLTAGE  | OUTPUT LOGIC LEVEL    |
|-------------------------------------|-------------------------------------------|-----------------|----------------|-----------------------|
| TLV4021R2<br>TLV4021R1              | 0.2V, 0.18V<br>1.2V, 1.18V                | Open-Drain      | $IN > V_{IT+}$ | Output high impedance |
|                                     |                                           |                 | $IN < V_{IT-}$ | Output asserted low   |
| TLV4041R2<br>TLV4041R5<br>TLV4041R1 | 0.2V, 0.18V<br>0.5V, 0.48V<br>1.2V, 1.18V | Push-Pull       | $IN > V_{IT+}$ | Output asserted high  |
|                                     |                                           |                 | $IN < V_{IT-}$ | Output asserted low   |
| TLV4031R2<br>TLV4031R1              | 0.2V, 0.18V<br>1.2V, 1.18V                | Open-Drain      | $IN > V_{IT+}$ | Output asserted low   |
|                                     |                                           |                 | $IN < V_{IT-}$ | Output high impedance |
| TLV4051R2<br>TLV4051R5<br>TLV4051R1 | 0.2V, 0.18V<br>0.5V, 0.48V<br>1.2V, 1.18V | Push-Pull       | $IN > V_{IT+}$ | Output asserted low   |
|                                     |                                           |                 | $IN < V_{IT-}$ | Output asserted high  |
| TLV4021S5x                          | 3.254V, 3.2V                              | Open-Drain      | $IN > V_{IT+}$ | Output high impedance |
|                                     |                                           |                 | $IN < V_{IT-}$ | Output asserted low   |

## 8.2 Functional Block Diagram

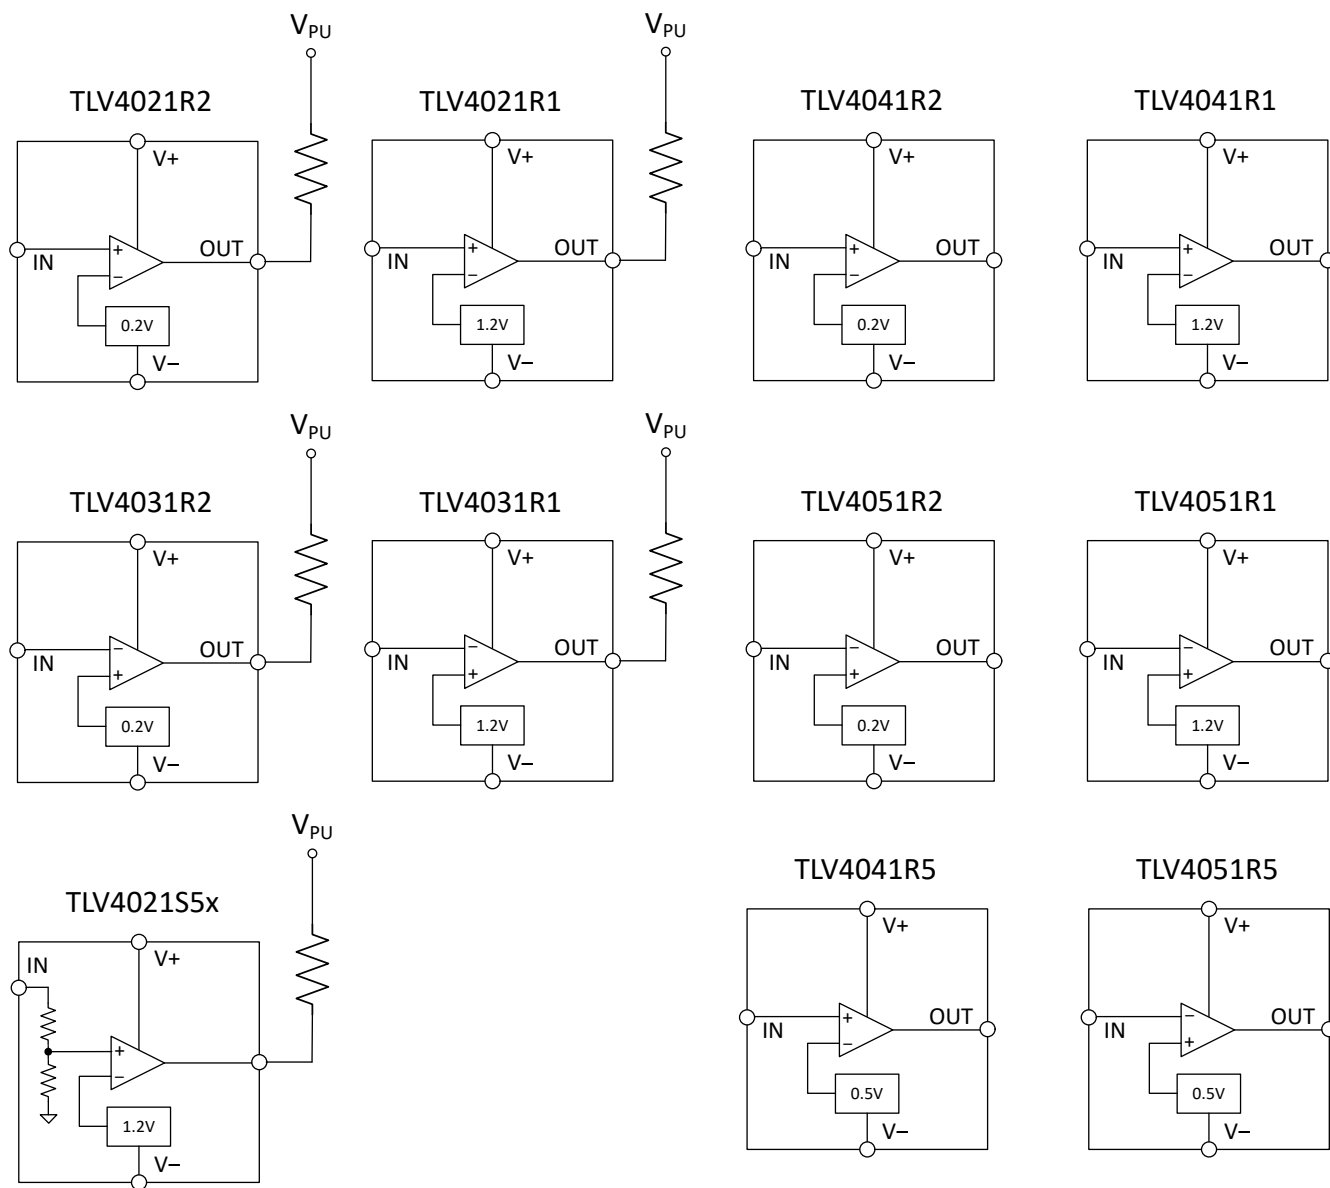

### 8.3 Feature Description

The TLV40x1 is a family of 4-pin, precision, low-power comparators with precision switching thresholds. The TLV40x1 comparators feature a rail-to-rail input stage with factory programmed switching thresholds for both rising and falling input waveforms. The comparator family also supports open-drain and push-pull output configurations as well as non-inverting and inverting inputs.

### 8.4 Device Functional Modes

#### 8.4.1 Power ON Reset (POR)

The TLV40x1 comparators have a Power-on-Reset (POR) circuit which provides system designers a known start-up condition for the output of the comparators. When the power supply ( $V_S$ ) is ramping up or ramping down, the POR circuit will be active when  $V_S$  is below  $V_{POR}$ . For the TLV4021 and TLV4031, the POR circuit will force the output to High-Z, and for the TLV4041 and TLV4051, the POR circuit will hold the output low at ( $V_-$ ). When  $V_S$  is greater than, or equal to, the minimum recommended operating voltage, the comparator output reflects the state of the input (IN).

The following pictures represent how the TLV40x1 outputs respond for  $V_S$  rising and falling. For the comparators with open-drain outputs (TLV4021/4031), IN is connected to ( $V_-$ ) to highlight the transition from POR circuit control to standard comparator operation where the output reflects the input condition. Note how the output goes low when  $V_S$  reaches 1.45V. Likewise, for the comparators with push-pull outputs (TLV4041/4051), the input is connected to ( $V_+$ ). Note how the output goes high when  $V_S$  reaches 1.45V.

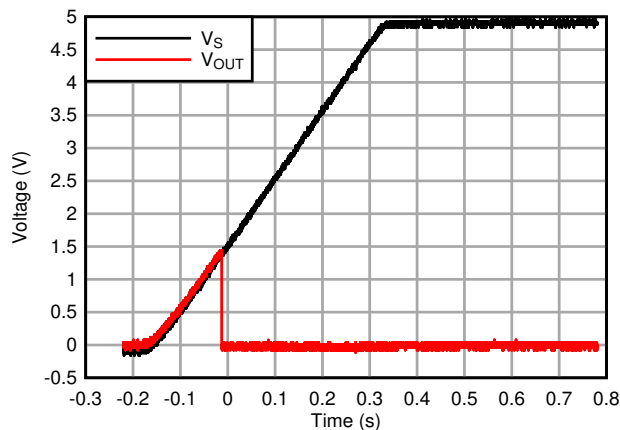


图 8-1. TLV4021/4031 Output for  $V_S$  Rising

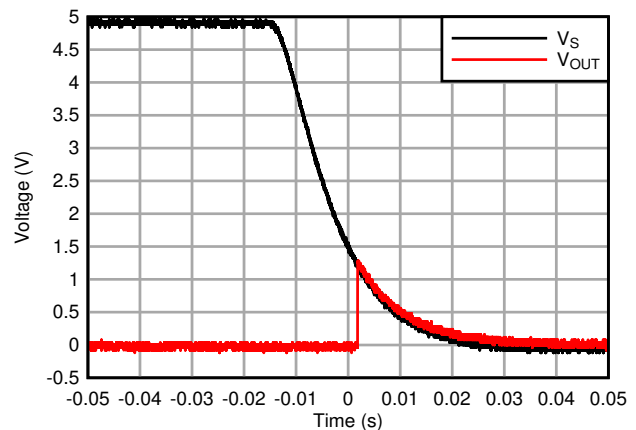


图 8-2. TLV4021/4031 Output for  $V_S$  Falling

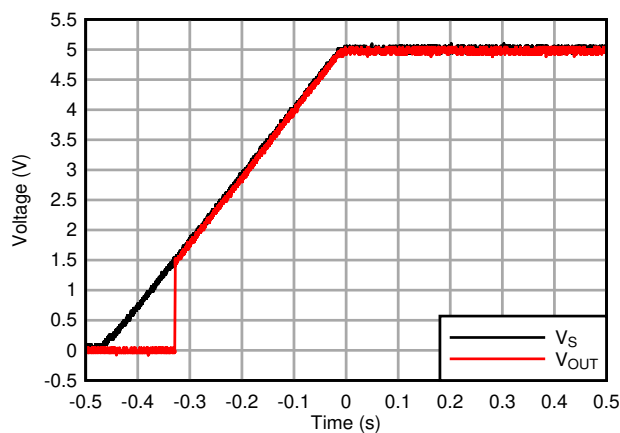


图 8-3. TLV4041/4051 Output for  $V_S$  Rising

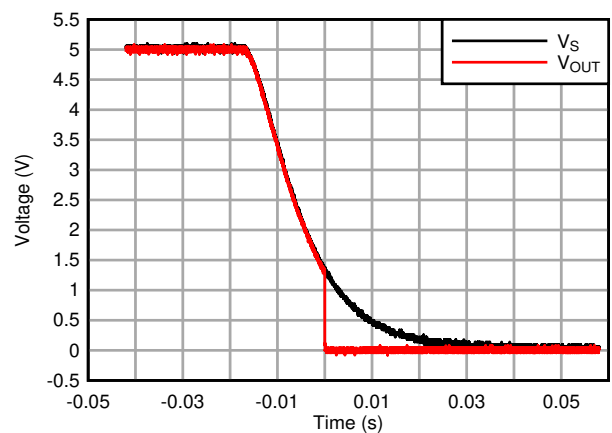


图 8-4. TLV4041/4051 Output for  $V_S$  Falling



### 8.4.2 Input (IN)

The TLV40x1 comparators have two inputs: one external input (IN) and one internal input that is connected to the integrated voltage reference. The comparator rising threshold is trimmed to the reference voltage ( $V_{IT+}$ ) while the falling threshold is trimmed to ( $V_{IT-}$ ). Since the rising and falling thresholds are both trimmed and warranted in the Electrical Characteristics Table, the TLV40x1 is equally suited for undervoltage and overvoltage detection. The difference between ( $V_{IT+}$ ) and ( $V_{IT-}$ ) is referred to as the comparator hysteresis and is 20 mV for TLV40x1Ry and 54 mV for TLV4021S5x. The integrated hysteresis makes the TLV40x1 less sensitive to supply-rail noise and provides stable operation in noisy environments without having to add external positive feedback to create hysteresis.

The comparator input (IN) is able to swing 5.5 V above ( $V_-$ ) regardless of the device supply voltage. This includes the instance when no supply voltage is applied to the comparator ( $V_S = 0$  V). As a result, the TLV40x1 is referred to as fault tolerant, meaning it maintains the same high input impedance when  $V_S$  is unpowered or ramping up. While not required in most cases, in order to reduce sensitivity to transients and layout parasitics for extremely noisy applications, place a 1 nF to 100 nF bypass capacitor at the comparator input.

For the TLV40x1Ry comparators, the input bias current is typically 10 pA for input voltages between ( $V_-$ ) and ( $V_+$ ) and the value typically doubles for every 10°C temperature increase. The comparator input is protected from voltages below ( $V_-$ ) by an internal diode connected to ( $V_-$ ). As the input voltage goes below ( $V_-$ ), the protection diode becomes forward biased and begins to conduct causing the input bias current to increase exponentially. A series resistor is recommended to limit the input current when sources have signal content that is less than ( $V_-$ ).

For the TLV4021S5x, the input bias current is limited by the internal resistor divider with typical impedance of 2M ohms.

### 8.4.3 Switching Thresholds and Hysteresis ( $V_{HYS}$ )

The TLV40x1 transfer curve is shown in 图 8-5.

- $V_{IT+}$  represents the positive-going input threshold that causes the comparator output to change from a logic low state to a logic high state.
- $V_{IT-}$  represents the negative-going input threshold that causes the comparator output to change from a logic high state to a logic low state.
- $V_{HYS}$  represents the difference between  $V_{IT+}$  and  $V_{IT-}$  and is 20 mV for TLV40x1Ry and 54 mV for TLV4021S5x.

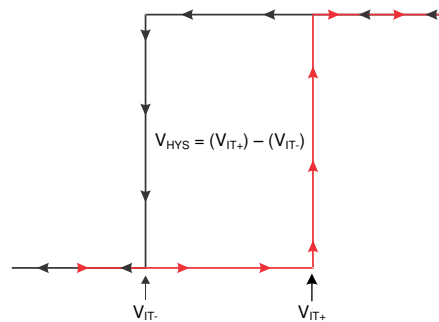


图 8-5. Transfer Curve

$V_{IT+}$  and  $V_{IT-}$  have mV's of variation over temperature. The significant portion of the variation of these parameters is a result of the internal bandgap voltage from which  $V_{IT+}$  and  $V_{IT-}$  are derived. The following hysteresis histograms demonstrate the performance of the TLV40x1 hysteresis circuitry. Since the bandgap reference is used to set  $V_{IT+}$  and  $V_{IT-}$ , each of these parameters have a tendency to error (track) in the same direction. For example, if  $V_{IT+}$  has a positive 0.5% error,  $V_{IT-}$  would have a tendency to have a similar positive percentage error. As a result, the variation of hysteresis will never be equal to the difference of the highest  $V_{IT+}$  value of its range and the lowest  $V_{IT-}$  value of its range.

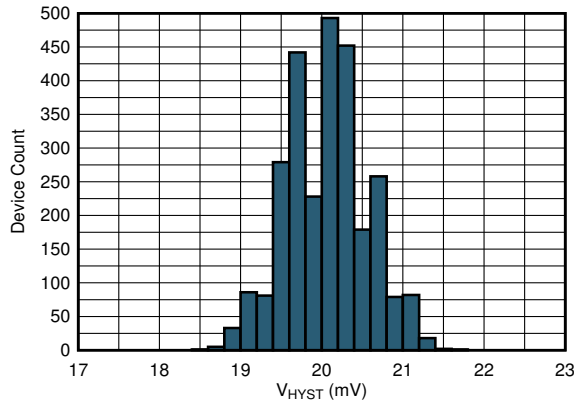


图 8-6.  $V_{HYST}$  Histogram (TLV40x1R2,  $V_S=5V$ )

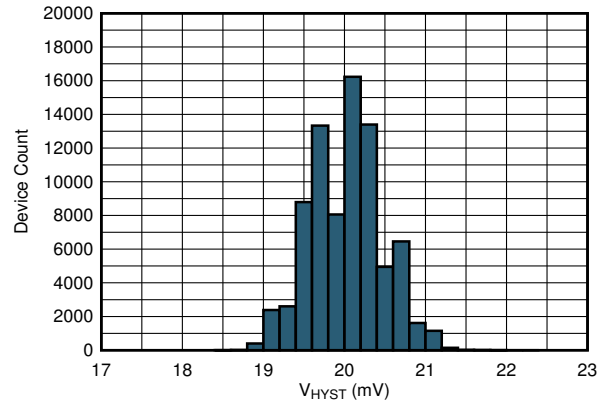


图 8-7.  $V_{HYST}$  Histogram (TLV40x1R1,  $V_S=5V$ )

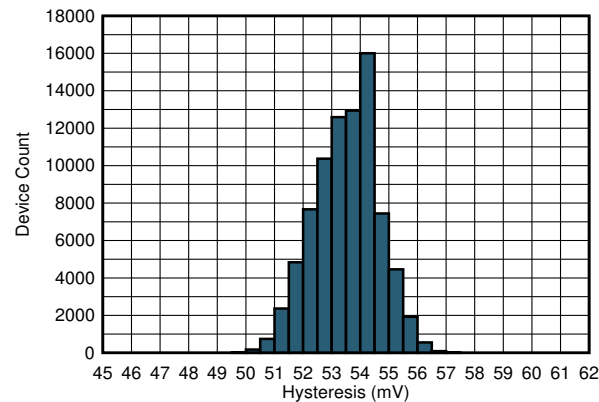


图 8-8.  $V_{HYST}$  Histogram (TLV40x1S5,  $V_S=5V$ )

#### 8.4.4 Output (OUT)

The TLV4041 and TLV4051 feature a push-pull output stage which eliminates the need for an external pull-up resistor while providing a low impedance output driver. Likewise, the TLV4021 and TLV4031 feature an open-drain output stage which enables the output logic levels to be pulled-up to an external source as high as 5.5 V independent of the supply voltage.

In a typical TLV40x1 application, OUT is connected to an enable input of a processor or a voltage regulator such as a dc-dc converter or low-dropout regulator (LDO). The open-drain output versions (TLV4021/4031) are used if the power supply of the comparator is different than the supply voltage of the device being controlled. In this usage case, a pull-up resistor holds OUT high when the comparator output goes high impedance. The correct interface-voltage level is provided (also known as level-shifting) by connecting the pull-up resistor on OUT to the appropriate voltage rail. The TLV4021/4031 output can be pulled up to 5.5 V, independent of the device supply voltage ( $V_S$ ). However, if level-shifting is not required, the push-pull output versions (TLV4041/4051) should be utilized in order to eliminate the need for the pull-up resistor.

## 9 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 9.1 Application Information

The TLV40x1 is a 4-pin, low-power comparator with a precision, integrated reference. The comparators in this family are well suited for monitoring voltages and currents in portable, battery powered devices.

#### 9.1.1 Monitoring (V+)

Many applications monitor the same rail that is powering the comparator. In these applications the resistor divider is simply connected to the (V+) rail.

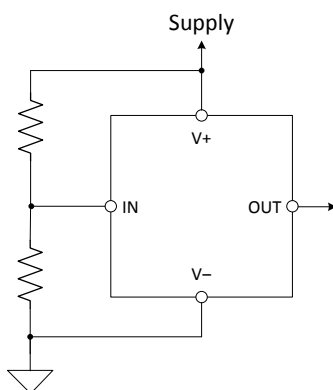


图 9-1. Supply Monitoring

### 9.1.2 Monitoring a Voltage Other than (V+)

Some applications monitor rails other than the one that is powering the comparator. In these applications the resistor divider used to set the desired threshold is connected to the rail that is being monitored.

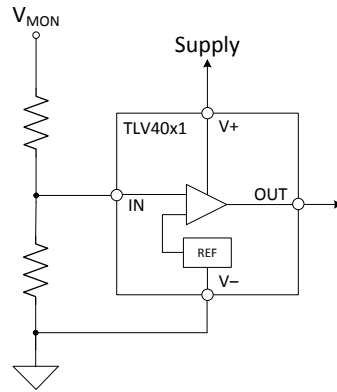


图 9-2. Monitoring a Voltage Other than the Supply

The TLV40x1Ry can monitor a voltage greater than the maximum (V+) with the use of an external resistor divider network. Likewise, the TLV40x1 can monitor voltages as low as the internal reference voltage (0.2 V, 0.5 V, or 1.2 V). The TLV40x1Ry also has the advantage of being able to monitor high impedance sources since the input bias current of the input (IN) is low. This provides an advantage over voltage supervisors that can only monitor the voltage rail that is powering them. Supervisors configured in this fashion have limitations in source impedance and minimum sensing voltage.

### 9.1.3 V<sub>PULLUP</sub> to a Voltage Other than (V+)

For applications where the output of the comparator needs to interface with a reset/enable pin that operates from a different supply voltage, the open-drain comparators (TLV4021/4031) should be selected. In these usage cases, the output can be pulled up to any voltage that is lower than 5.5V (independent of (V+)). This technique is commonly referred to as "level-shifting."

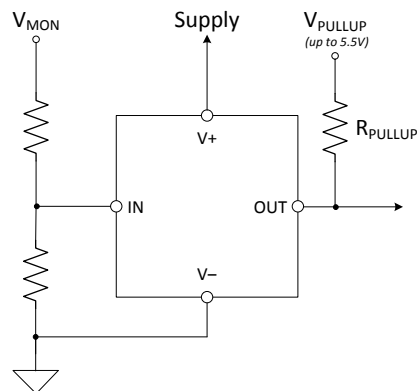


图 9-3. Level-Shifting

## 9.2 Typical Application

### 9.2.1 Under-Voltage Detection

Under-voltage detection is frequently required in battery-powered, portable electronics to alert the system that a battery voltage has dropped below the usable voltage level. 图 9-4 shows a simple under-voltage detection circuit using the TLV4041R1 which is a non-inverting comparator with an integrated 1.2 V reference and a push-pull output stage. The non-inverting TLV4041 option was selected in this example since the micro-controller required an active low signal when an undervoltage level occurs. However, if an active high signal was required, the TLV4051 option with an inverting input stage would be utilized.

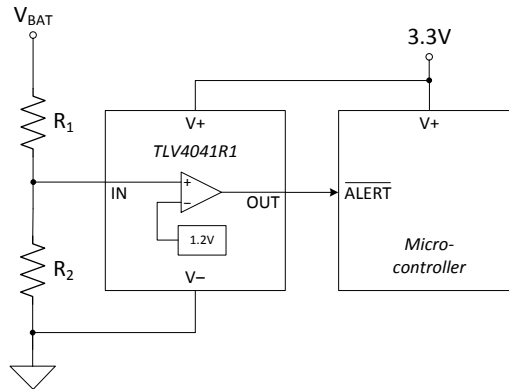


图 9-4. Under-Voltage Detection

#### 9.2.1.1 Design Requirements

For this design, follow these design requirements:

- Operate from 3.3 V power supply that powers the microcontroller.
- Under-voltage alert is active low.
- Logic low output when  $V_{BAT}$  is less than 2.0V.

#### 9.2.1.2 Detailed Design Procedure

Configure the circuit as shown in 图 9-4. Connect (V+) to 3.3 V which also powers the micro-controller. Resistors  $R_1$  and  $R_2$  create the under-voltage alert level of 2.0 V. When the battery voltage sags down to 2.0 V, the resistor divider voltage crosses the ( $V_{IT-}$ ) threshold of the TLV4041R1. This causes the comparator output to transition from a logic high to a logic low. The push-pull option of the TLV40x1 family is selected since the comparator operating voltage is shared with the microcontroller which is receiving the under-voltage alert signal. The TLV4041 option with the 1.2 V internal reference is selected because it is the closest internal reference option that is less than the critical under-voltage level of 2.0 V. Choosing the internal reference option that is closest to the critical under-voltage level minimizes the resistor divider ratio which optimizes the accuracy of the circuit. Error at the falling edge threshold of ( $V_{IT-}$ ) is amplified by the inverse of the resistor divider ratio. So minimizing the resistor divider ratio is a way of optimizing voltage monitoring accuracy.

方程式 1 是 derived from the analysis of 图 9-4.

$$V_{IT-} = \frac{R_2}{R_1 + R_2} \times V_{BAT} \quad (1)$$

where

- $R_1$  and  $R_2$  are the resistor values for the resistor divider connected to IN
- $V_{BAT}$  is the voltage source that is being monitored for an undervoltage condition.
- $V_{IT-}$  is the falling edge threshold where the comparator output changes state from high to low

Rearranging 方程式 1 and solving for  $R_1$  yields 方程式 2.

$$R_1 = \frac{(V_{BAT} - V_{IT-})}{V_{IT-}} \times R_2 \quad (2)$$

For the specific undervoltage detection of 2.0 V using the TLV4041R1, the following results are calculated.

$$R_1 = \frac{(2.0 - 1.18)}{1.18} \times 1M = 695 \text{ k}\Omega \quad (3)$$

where

- $R_2$  is set to 1 M  $\Omega$
- $V_{BAT}$  is set to 2.0 V
- $V_{IT-}$  is set to 1.18 V

Choose  $R_{TOTAL}$  ( $R_1 + R_2$ ) such that the current through the divider is at least 100 times higher than the input bias current ( $I_{BIAS}$ ). The resistors can have high values to minimize current consumption in the circuit without adding significant error to the resistive divider.

### 9.2.1.3 Application Curve

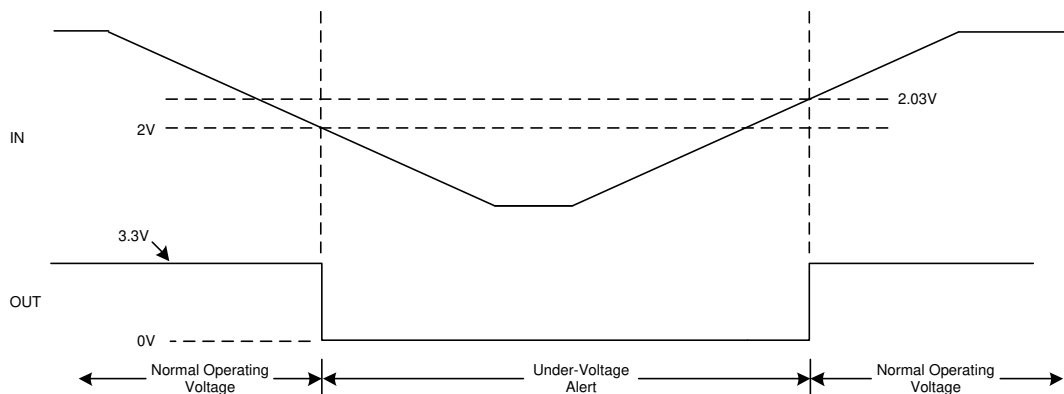


图 9-5. Under-Voltage Detection

## 9.2.2 Additional Application Information

### 9.2.2.1 Pull-up Resistor Selection

For the TLV4021 (open-drain output versions of the TLV40x1 family), care should be taken in selecting the pull-up resistor ( $R_{PU}$ ) value to ensure proper output voltage levels. First, consider the required output high logic level requirement of the logic device that is being driven by the comparator when calculating the maximum  $R_{PU}$  value. When in a logic high output state, the output impedance of the comparator is very high but there is a finite amount of leakage current that needs to be accounted for. Use  $I_{O-LKG}$  from the EC Table and the  $V_{IH}$  minimum from the logic device being driven to determine  $R_{PU}$  maximum using [方程式 4](#).

$$R_{PU(max)} = \frac{(V_{PU} - V_{IH(min)})}{I_{O-LKG}} \quad (4)$$

Next, determine the minimum value for  $R_{PU}$  by using the  $V_{IL}$  maximum from the logic device being driven. In order for the comparator output to be recognized as a logic low,  $V_{IL}$  maximum is used to determine the upper boundary of the comparator's  $V_{OL}$ .  $V_{OL}$  maximum for the comparator is available in the EC Table for specific sink current levels and can also be found from the  $V_{OUT}$  versus  $I_{SINK}$  curve in the Typical Application curves. A good design practice is to choose a value for  $V_{OL}$  maximum that is 1/2 the value of  $V_{IL}$  maximum for the input logic device. The corresponding sink current and  $V_{OL}$  maximum value will be needed to calculate the minimum  $R_{PU}$ . This method will ensure enough noise margin for the logic low level. With  $V_{OL}$  maximum determined and the corresponding  $I_{SINK}$  obtained, the minimum  $R_{PU}$  value is calculated with [方程式 5](#).

$$R_{PU(min)} = \frac{(V_{PU} - V_{OL(max)})}{I_{SINK}} \quad (5)$$

Since the range of possible  $R_{PU}$  values is large, a value between 5 k $\Omega$  and 100 k $\Omega$  is generally recommended. A smaller  $R_{PU}$  value provides faster output transition time and better noise immunity, while a larger  $R_{PU}$  value consumes less power when in a logic low output state.

### 9.2.2.2 Input Supply Capacitor

Although an input capacitor is not required for stability, for good analog design practice, connect a 100 nF low equivalent series resistance (ESR) capacitor from (V+) to (V-).

### 9.2.2.3 Sense Capacitor

Although not required in most cases, for extremely noisy applications, place a 1 nF to 100 nF bypass capacitor from the comparator input (IN) to the (V-) for good analog design practice. This capacitor placement reduces device sensitivity to transients.

## 9.3 What to Do and What Not to Do

Do connect a 100 nF decoupling capacitor from (V+) to (V-) for best system performance.

If the monitored voltage is noisy, do connect a decoupling capacitor from the comparator input (IN) to (V-).

Don't use resistors for the voltage divider that cause the current through them to be less than 100 times the input current of the comparator without also accounting for the impact on accuracy.

Don't use a pull-up resistor that is too small because the larger current sunk by the output may exceed the desired low-level output voltage ( $V_{OL}$ ).

## 10 Power Supply Recommendations

These devices operate from an input voltage supply range between 1.7 V and 5.5 V.

## 11 Layout

### 11.1 Layout Guidelines

A power supply bypass capacitor of 100 nF is recommended when supply output impedance is high, supply traces are long, or when excessive noise is expected on the supply lines. Bypass capacitors are also recommended when the comparator output drives a long trace or is required to drive a capacitive load. Due to the fast rising and falling edge rates and high-output sink and source capability of the TLV40x1 output stage, higher than normal quiescent current can be drawn from the power supply when the output transitions. Under this circumstance, the system would benefit from a bypass capacitor across the supply pins.

### 11.2 Layout Example

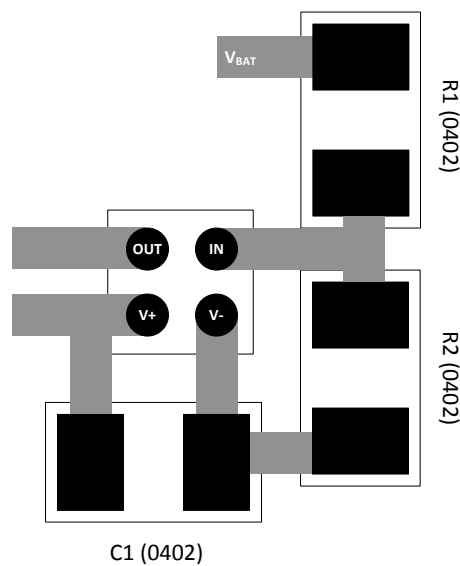


图 11-1. Layout Example



## 12 Device and Documentation Support

### 12.1 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://www.ti.com) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.2 支持资源

[TI E2E™ 支持论坛](#) 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

### 12.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 12.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV4021R1YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | Z                   |
| TLV4021R1YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | Z                   |
| <a href="#">TLV4021R2YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 6                   |
| TLV4021R2YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 6                   |
| <a href="#">TLV4021S5MYKAR</a> | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | Q                   |
| TLV4021S5MYKAR.A               | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | Q                   |
| <a href="#">TLV4021S5YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SAC396   SNAGCU                      | Level-1-260C-UNLIM                | -40 to 125   | O                   |
| TLV4021S5YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SAC396                               | Level-1-260C-UNLIM                | -40 to 125   | O                   |
| <a href="#">TLV4031R1YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 1                   |
| TLV4031R1YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 1                   |
| <a href="#">TLV4031R2YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 7                   |
| TLV4031R2YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 7                   |
| <a href="#">TLV4041R1YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 2                   |
| TLV4041R1YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 2                   |
| <a href="#">TLV4041R2YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 8                   |
| TLV4041R2YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 8                   |
| <a href="#">TLV4041R5DBVR</a>  | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 23XT                |
| TLV4041R5DBVR.A                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 23XT                |
| TLV4041R5DBVRG4.A              | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 23XT                |
| <a href="#">TLV4041R5YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | A                   |
| TLV4041R5YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | A                   |
| <a href="#">TLV4051R1YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | C                   |
| TLV4051R1YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | C                   |
| <a href="#">TLV4051R2DBVR</a>  | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3HQT                |
| TLV4051R2DBVR.A                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3HQT                |
| <a href="#">TLV4051R2YKAR</a>  | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 9                   |
| TLV4051R2YKAR.A                | Active        | Production           | DSBGA (YKA)   4  | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 125   | 9                   |
| <a href="#">TLV4051R5DBVR</a>  | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 23ZT                |
| TLV4051R5DBVR.A                | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 23ZT                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION

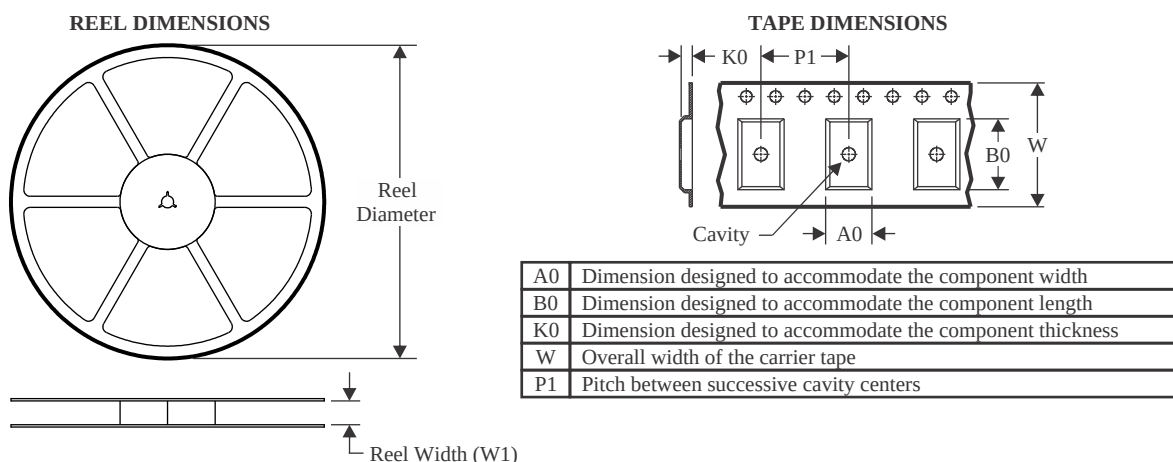


### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

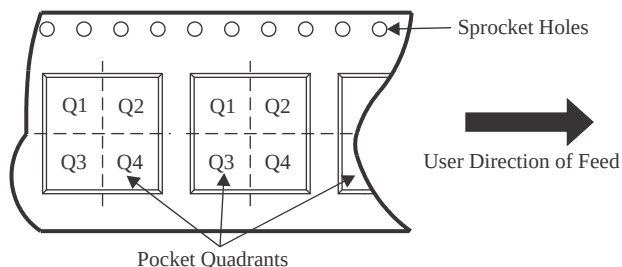

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV4021R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4021R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4021S5MYKAR | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4021S5YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4021S5YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4031R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4031R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4041R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4041R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4041R5DBVR  | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV4041R5YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4051R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4051R2DBVR  | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV4051R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 180.0              | 8.4                | 0.84    | 0.84    | 0.48    | 4.0     | 8.0    | Q1            |
| TLV4051R5DBVR  | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS

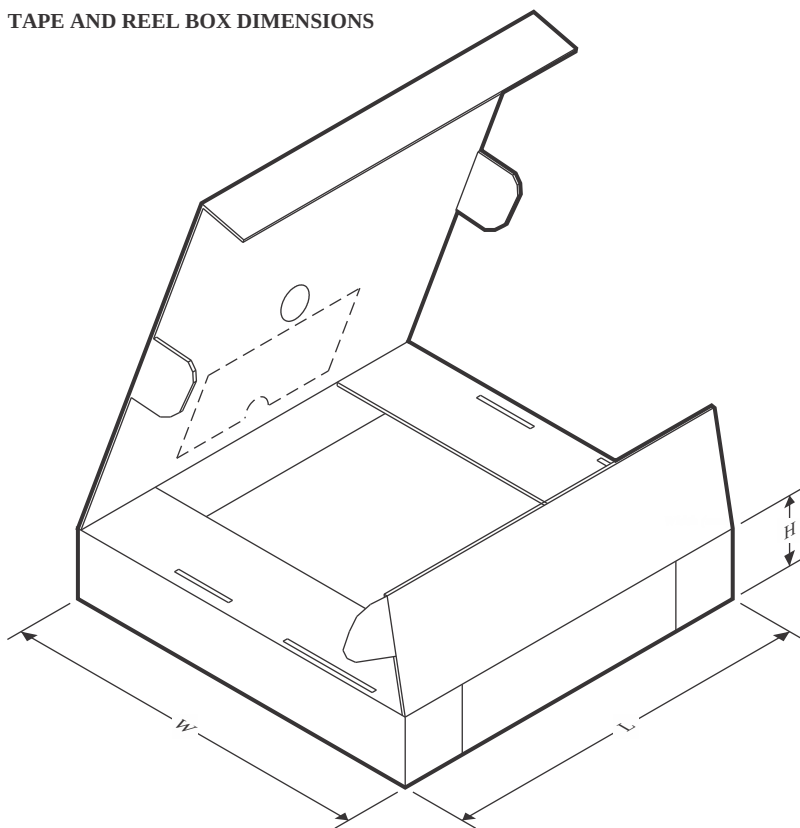

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV4021R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4021R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4021S5MYKAR | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4021S5YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4021S5YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4031R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4031R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4041R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4041R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4041R5DBVR  | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TLV4041R5YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4051R1YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4051R2DBVR  | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TLV4051R2YKAR  | DSBGA        | YKA             | 4    | 3000 | 182.0       | 182.0      | 20.0        |
| TLV4051R5DBVR  | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |



## SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

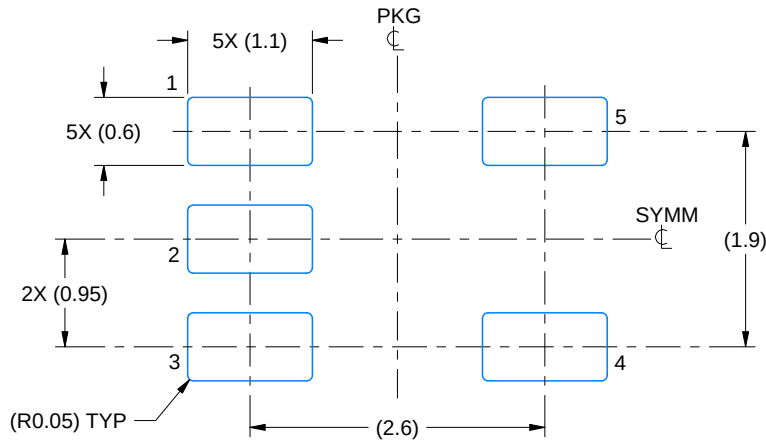

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

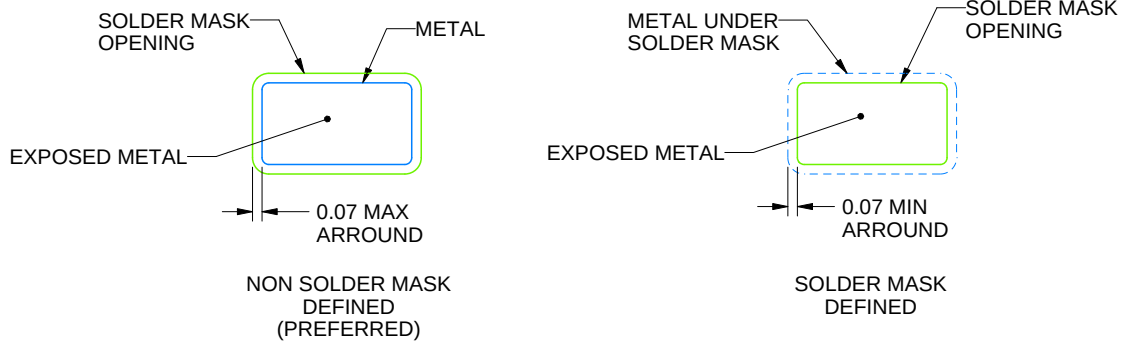

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

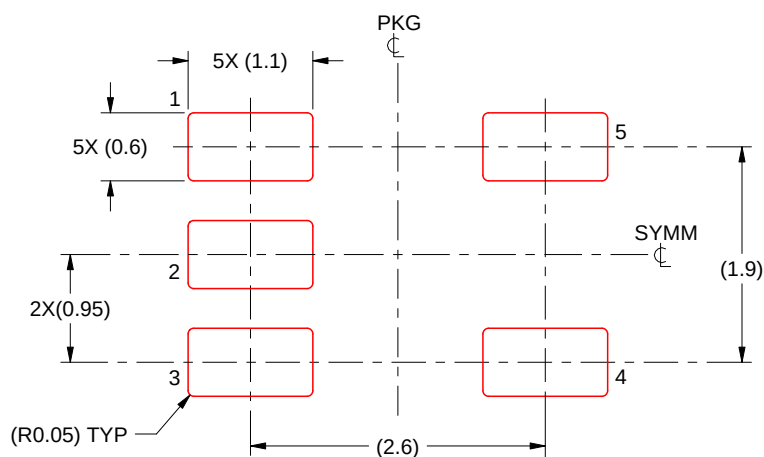

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.






YKA0004



## PACKAGE OUTLINE

DSBGA - 0.4 mm max height

DIE SIZE BALL GRID ARRAY

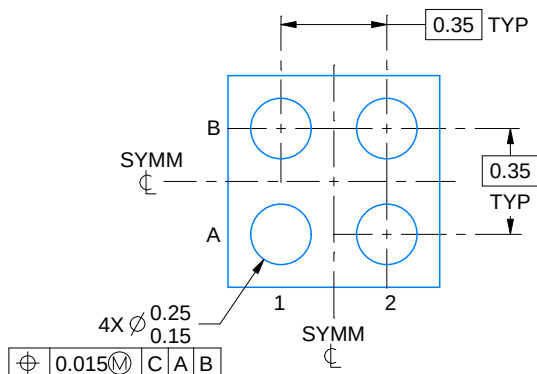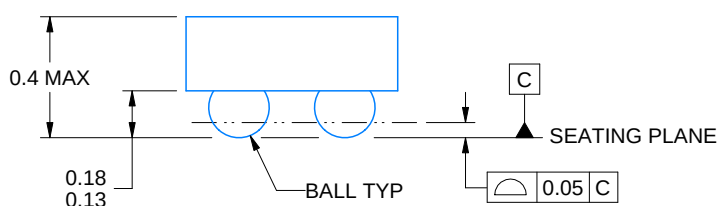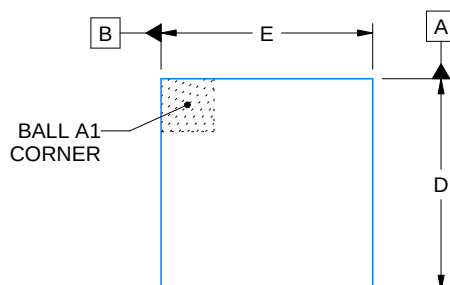

D: Max = 0.76 mm, Min = 0.7 mm

E: Max = 0.76 mm, Min = 0.7 mm

4221909/B 08/2018


## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.


**YKA0004**

**DSBGA - 0.4 mm max height**

## DIE SIZE BALL GRID ARRAY

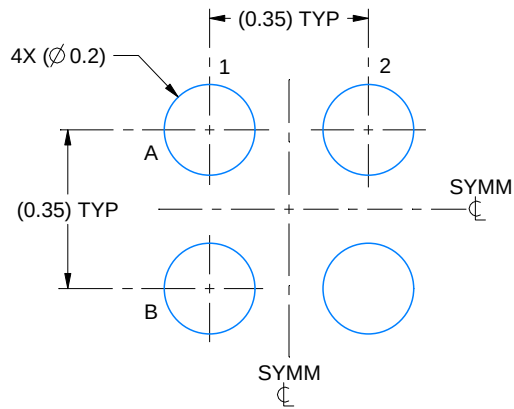

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:60X

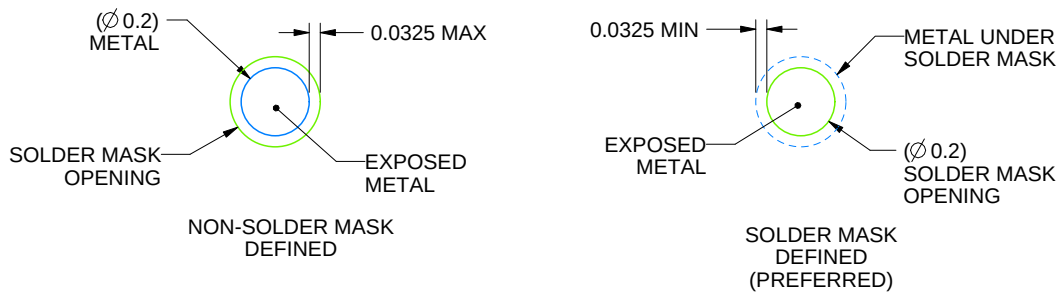

SOLDER MASK DETAILS  
NOT TO SCALE

4221909/B 08/2018

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

## EXAMPLE STENCIL DESIGN

YKA0004

DSBGA - 0.4 mm max height

DIE SIZE BALL GRID ARRAY

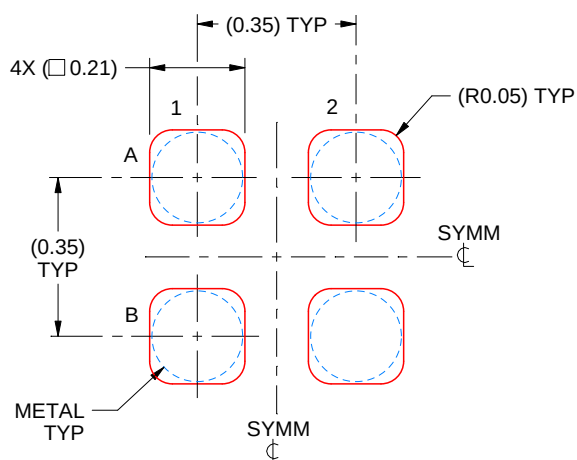

SOLDER PASTE EXAMPLE  
BASED ON 0.075 mm - 0.1 mm THICK STENCIL  
SCALE:60X

4221909/B 08/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司