

# INA310x 具有开漏比较器和基准的 -4V 至 110V、1.3MHz 超精密电流检测放大器

## 1 特性

- 宽共模电压：
  - 工作电压：-4 V 至 +110 V
  - 可承受电压：-20 V 至 +120 V
- 高信号带宽：1.3 MHz
- 压摆率：2.5 V/μs
- 出色的共模抑制比 (CMRR)：160 dB
- 精度
  - 增益误差 (最大值)
    - 版本 A：0.15%，10ppm/°C 漂移
    - 版本 B：0.5%，20ppm/°C 漂移
  - 失调电压 (最大值)
    - 版本 A：±20 μV，±0.25 μV/°C 漂移
    - 版本 B：±150 μV，±1 μV/°C 漂移
- 板载开漏比较器
- 内部比较器电压基准：0.6V
- 传播延迟时间：1 μs
- 比较器锁存功能
- 可用增益：
  - INA310A1、INA310B1：20 V/V
  - INA310A2、INA310B2：50 V/V
  - INA310A3、INA310B3：100 V/V
  - INA310A4、INA310B4：200 V/V
  - INA310A5、INA310B5：500V/V
- 封装选项：VSSOP-8

## 2 应用

- 48V 直流/直流转换器
- 48V 电池管理系统 (BMS)
- 测试和测量
- 宏远程无线电单元 (RRU)
- 48V 机架式服务器
- 48V 商用网络和服务器电源 (PSU)
- 螺线管和传动器

## 3 说明

INA310x 是一款超精密电流检测放大器，可不依赖于具有集成式比较器的电源电压，在 -4V 至 110V 的宽共模范围内测量分流电阻器上的压降。该器件在 20μV (最大值) 的低失调电压、0.15% (最大值) 的小增益误差和 160dB (典型值) 的高直流 CMRR 等特性的综合作用下，可实现高精度电流测量。INA310x 具有 1.3MHz 的高信号带宽，专为高压直流电流测量和快速过流保护等高速应用而设计。

INA310x 包含一个开漏比较器和提供 0.6V 阈值的内部基准。一个外部电阻分压器设定电流跳变点。比较器具有锁存功能，可通过将 RESET 引脚接地 (或悬空) 进入透明状态。


INA310x 由 2.7V 至 20V 的单电源供电，消耗 1.6mA 的电源电流。INA310x 有五个增益选项：20V/V、50V/V、100V/V、200V/V 和 500V/V。这些增益选项可以满足宽动态范围电流检测应用。

INA310x 的额定工作温度范围为 -40°C 至 +125°C，并且采用节省空间的 8 引脚 VSSOP 封装。

### 封装信息<sup>(1)</sup>

器件型号	封装	封装尺寸 (标称值)
INA310A	VSSOP (8)	3.00mm × 3.00mm
INA310B		

(1) 如需了解所有可用封装，请参阅数据表末尾的封装选项附录。

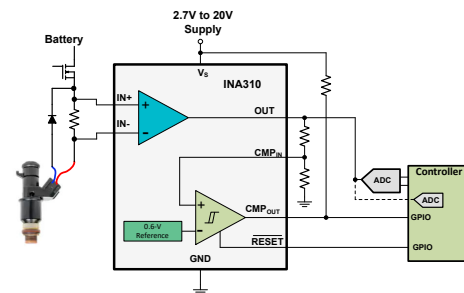

典型应用



## Table of Contents

<b>1 特性</b> .....	<b>1</b>	7.3 Feature Description.....	<b>14</b>
<b>2 应用</b> .....	<b>1</b>	7.4 Device Functional Modes.....	<b>17</b>
<b>3 说明</b> .....	<b>1</b>	<b>8 Application and Implementation</b> .....	<b>21</b>
<b>4 Revision History</b> .....	<b>2</b>	8.1 Application Information.....	<b>21</b>
<b>5 Pin Configuration and Functions</b> .....	<b>3</b>	8.2 Typical Application.....	<b>22</b>
<b>6 Specifications</b> .....	<b>4</b>	8.3 Power Supply Recommendations.....	<b>25</b>
6.1 Absolute Maximum Ratings.....	<b>4</b>	8.4 Layout.....	<b>26</b>
6.2 ESD Ratings.....	<b>4</b>	<b>9 Device and Documentation Support</b> .....	<b>27</b>
6.3 Recommended Operating Conditions.....	<b>4</b>	9.1 Receiving Notification of Documentation Updates....	<b>27</b>
6.4 Thermal Information.....	<b>4</b>	9.2 支持资源.....	<b>27</b>
6.5 Electrical Characteristics.....	<b>5</b>	9.3 Trademarks.....	<b>27</b>
6.6 Typical Characteristics.....	<b>7</b>	9.4 静电放电警告.....	<b>27</b>
<b>7 Detailed Description</b> .....	<b>14</b>	9.5 术语表.....	<b>27</b>
7.1 Overview.....	<b>14</b>	<b>10 Mechanical, Packaging, and Orderable Information</b> .....	<b>27</b>
7.2 Functional Block Diagram.....	<b>14</b>		

## 4 Revision History

DATE	REVISION	NOTES
March 2023	*	Initial release

## 5 Pin Configuration and Functions

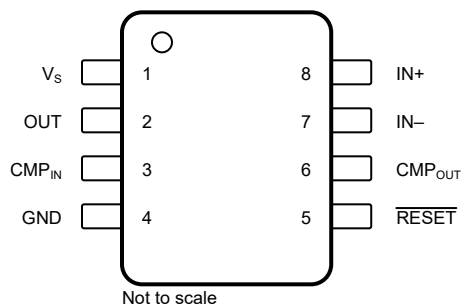


图 5-1. INA310x: DGK Package 8-Pin VSSOP Top View

表 5-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO		
V <sub>S</sub>	1	Power	Power supply, 2.7 V to 20 V
OUT	2	Output	Output voltage
CMP <sub>IN</sub>	3	Input	Comparator input
GND	4	Ground	Ground
RESET	5	Input	Comparator reset pin, active low (Low: Transparent Mode, High: Latch Mode)
CMP <sub>OUT</sub>	6	Output	Comparator output (latch high when RESET = High)
IN <sub>-</sub>	7	Input	Shunt resistor negative sense input. For high-side applications, connect to load side of sense resistor. For low-side applications, connect to ground side of sense resistor.
IN <sub>+</sub>	8	Input	Shunt resistor positive sense input. For high-side applications, connect to bus-voltage side of sense resistor. For low-side applications, connect to load side of sense resistor.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
V <sub>S</sub>	Supply voltage	- 0.3	22	V
V <sub>IN+</sub> , V <sub>IN-</sub>	Analog inputs	Differential (V <sub>IN+</sub> ) - (V <sub>IN-</sub> ) <sup>(2)</sup>	12	V
		V <sub>IN+</sub> , V <sub>IN-</sub> , with respect to GND <sup>(2)</sup>	120	
V <sub>OUT</sub>	Analog output	GND - 0.3	(V <sub>S</sub> ) + 0.3	V
	Comparator reset pin	GND - 0.3	(V <sub>S</sub> ) + 0.3	V
	Comparator analog input	GND - 0.3	MIN of 5.5 or V <sub>S</sub>	V
	Comparator Output	GND - 0.3	22	V
	Input current into any pin		5	mA
T <sub>A</sub>	Operating temperature	- 55	150	°C
T <sub>J</sub>	Junction temperature	- 65	150	°C
T <sub>stg</sub>	Storage temperature	- 65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) V<sub>IN+</sub> and V<sub>IN-</sub> are the voltages at the IN+ and IN- pins, respectively.

### 6.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001, all pins <sup>(1)</sup>	±2000	V
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002, all pins <sup>(2)</sup>	±1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>CM</sub>	Common-mode input range	- 4	48	110	V
V <sub>S</sub>	Operating supply voltage	2.7	5	20	V
V <sub>SENSE</sub>	Differential sense input range	0		V <sub>S</sub> / G	V
T <sub>A</sub>	Operating free-air temperature	- 40		125	°C

### 6.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		INA310x	UNIT
		DGK (VSSOP)	
		8 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	172.2	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	63.5	°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	93.8	°C/W
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	9.8	°C/W
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	92.2	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

at  $T_A = 25^\circ\text{C}$ ,  $V_{\text{SENSE}} = V_{\text{IN}+} - V_{\text{IN}-} = 0.5\text{ V}$  / Gain,  $V_S = 5.0\text{ V}$ ,  $V_{\text{CM}} = V_{\text{IN}-} = 48\text{ V}$ , and  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$  connected from  $\text{CMP}_{\text{out}}$  to  $V_S$ , (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
<b>INPUT</b>						
$V_{\text{CM}}$	Common-mode input range	$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	-4		110	V
CMRR	Common-mode rejection ratio	INA310Ax, $V_{\text{IN}+} = -4\text{ V}$ to $110\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	140	160		dB
		INA310Ax, $f = 50\text{ kHz}$		85		
		INA310Bx, $V_{\text{IN}+} = -4\text{ V}$ to $110\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$	120	140		
		INA310Bx, $f = 50\text{ kHz}$		65		
$V_{\text{OS}}$	Offset voltage, RTI <sup>(1)</sup>	INA310A1		$\pm 30$	$\pm 150$	$\mu\text{V}$
		INA310B1		$\pm 100$	$\pm 500$	
		INA310A2		$\pm 15$	$\pm 80$	
		INA310B2		$\pm 55$	$\pm 300$	
		INA310A3		$\pm 10$	$\pm 50$	
		INA310B3		$\pm 30$	$\pm 250$	
		INA310A4		$\pm 5$	$\pm 30$	
		INA310B4		$\pm 30$	$\pm 200$	
		INA310A5		$\pm 2$	$\pm 20$	
$dV_{\text{OS}}/dT$	Offset drift, RTI	$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ , INA310A1, INA310A2, INA310A3		$\pm 0.05$	$\pm 0.5$	$\mu\text{V}/^\circ\text{C}$
		$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ , INA310A4, INA310A5		$\pm 0.025$	$\pm 0.25$	
		$T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ , INA310Bx		$\pm 0.1$	$\pm 1$	
PSRR	Power-supply rejection ratio, RTI	INA310A1, $2.7\text{ V} \leq V_S \leq 20\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		$\pm 1$	$\pm 8$	$\mu\text{V}/\text{V}$
		INA310A2, INA310A3, $2.7\text{ V} \leq V_S \leq 20\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		$\pm 0.3$	$\pm 3$	
		INA310A4, INA310A5, $2.7\text{ V} \leq V_S \leq 20\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		$\pm 0.1$	$\pm 1$	
		INA310Bx $2.7\text{ V} \leq V_S \leq 20\text{ V}$ , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		$\pm 1.5$	$\pm 10$	
$I_B$	Input bias current	$I_{B+}$ , $I_{B-}$ , $V_{\text{SENSE}} = 0\text{ mV}$	10	20	30	$\mu\text{A}$
<b>OUTPUT</b>						
G	Gain	INA310A1, INA310B1		20		V/V
		INA310A2, INA310B2		50		
		INA310A3, INA310B3		100		
		INA310A4, INA310B4		200		
		INA310A5, INA310B5		500		
$G_{\text{ERR}}$	Gain error	INA310Ax, $\text{GND} + 50\text{ mV} \leq V_{\text{OUT}} \leq V_S - 200\text{ mV}$		$\pm 0.02\%$	$\pm 0.15\%$	$\text{ppm}/^\circ\text{C}$
		INA310Bx, $\text{GND} + 50\text{ mV} \leq V_{\text{OUT}} \leq V_S - 200\text{ mV}$		$\pm 0.07\%$	$\pm 0.5\%$	
		INA310Ax, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		1	10	
		INA310Bx, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		2	20	
$\text{NL}_{\text{ERR}}$	Nonlinearity error	$\text{GND} + 50\text{ mV} \leq V_{\text{OUT}} \leq V_S - 200\text{ mV}$		$\pm 0.01$		%
	Maximum capacitive load	No sustained oscillation, no isolation resistor		500		pF
<b>VOLTAGE OUTPUT</b>						
$V_{\text{SP}}$	Swing to $V_S$ (Power-supply rail)	$R_{\text{LOAD}} = 10\text{ k}\Omega$ to GND, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$		$(V_S) - 70$	$(V_S) - 150$	mV
$V_{\text{SN}}$	Swing to GND	$R_{\text{LOAD}} = 10\text{ k}\Omega$ to GND, $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$ , $V_{\text{SENSE}} = 0\text{ mV}$		$(V_{\text{GND}}) + 5$	$(V_{\text{GND}}) + 20$	mV

at  $T_A = 25^\circ\text{C}$ ,  $V_{\text{SENSE}} = V_{\text{IN}+} - V_{\text{IN}-} = 0.5\text{ V}$  / Gain,  $V_S = 5.0\text{ V}$ ,  $V_{\text{CM}} = V_{\text{IN}-} = 48\text{ V}$ , and  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$  connected from  $\text{CMP}_{\text{out}}$  to  $V_S$ , (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
FREQUENCY RESPONSE						
BW	Bandwidth	INA310A1, INA310B1, C <sub>LOAD</sub> = 5 pF, V <sub>SENSE</sub> = 200mV	1300		kHz	
		INA310A2, INA310B2, C <sub>LOAD</sub> = 5 pF, V <sub>SENSE</sub> = 80mV	1300			
		INA310A3, INA310B3, C <sub>LOAD</sub> = 5 pF, V <sub>SENSE</sub> = 40mV	1000			
		INA310A4, INA310B4, C <sub>LOAD</sub> = 5 pF, V <sub>SENSE</sub> = 20mV	900			
		INA310A5, INA310B5, C <sub>LOAD</sub> = 5 pF, V <sub>SENSE</sub> = 8mV	900			
SR	Slew rate	Rising edge	2.5		V/μs	
t <sub>S</sub>	Settling time	V <sub>OUT</sub> = 4 V ± 0.1 V step, Output settles to 0.5%	10		μs	
		V <sub>OUT</sub> = 4 V ± 0.1 V step, Output settles to 1%	5		μs	
		V <sub>OUT</sub> = 4 V ± 0.1 V step, Output settles to 5%	1		μs	
NOISE						
V <sub>en</sub>	Voltage noise density		50		nV/ √ Hz	
COMPARATOR						
V <sub>THRESHOLD</sub>	Alert threshold	T <sub>A</sub> = 25°C	585	600	615	mV
		T <sub>A</sub> = - 40°C to +125°C	580		620	mV
	Hysteresis	T <sub>A</sub> = 25°C		8		mV
t <sub>P</sub>	Small-signal propagation delay	Comparator input overdrive = 20 mV	1		μs	
	Slew-rate-limited propagation delay	V <sub>OUT</sub> step = 0.5 V to 4.5 V, V <sub>LIMIT</sub> <sup>(3)</sup> = 4 V	1.6		μs	
I <sub>BCMPIN</sub>	Input bias current, CMP <sub>in</sub> PIN	T <sub>A</sub> = 25°C, V <sub>CMPIN</sub> = 0.4 V to 1.2 V	-20	1	20	nA
		T <sub>A</sub> = - 40°C to +125°C, V <sub>CMPIN</sub> = 0.4 V to 1.2 V			250	nA
I <sub>LKG</sub>	High-level leakage current	V <sub>CMPout</sub> = V <sub>S</sub>			1	μA
V <sub>OL</sub>	Low-level output voltage	I <sub>OL</sub> = 2.35 mA			300	mV
		T <sub>A</sub> = - 40°C to +125°C, I <sub>OL</sub> = 2.35 mA			350	mV
V <sub>IH</sub>	RESET High-level input voltage threshold <sup>(2)</sup>	T <sub>A</sub> = - 40°C to +125°C	1.2			V
V <sub>IL</sub>	RESET Low-level input voltage threshold <sup>(2)</sup>	T <sub>A</sub> = - 40°C to +125°C			0.4	V
	Minimum RESET pulse width	T <sub>A</sub> = - 40°C to +125°C	100		200	ns
	RESET propagation delay		250			ns
POWER SUPPLY						
V <sub>S</sub>	Supply voltage range	T <sub>A</sub> = - 40°C to +125°C	2.7		20	V
I <sub>Q</sub>	Quiescent current		1.6		2	mA
		T <sub>A</sub> = - 40°C to +125°C			2.25	mA


(1) RTI = referred-to-input.

(2) The RESET input has an internal 2 M $\Omega$  (typical) pull-down. Leaving RESET open results in a LOW state, with transparent comparator operation.


(3)  $V_{\text{LIMIT}}$  is  $V_{\text{OUT}}$  at the overcurrent threshold set by external resistors.

## 6.6 Typical Characteristics


at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $V_{\text{SENSE}} = V_{\text{IN}+} - V_{\text{IN}-} = 0.5\text{ V / Gain}$ ,  $V_{\text{CM}} = V_{\text{IN}-} = 48\text{ V}$ , and  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$  (unless otherwise noted).

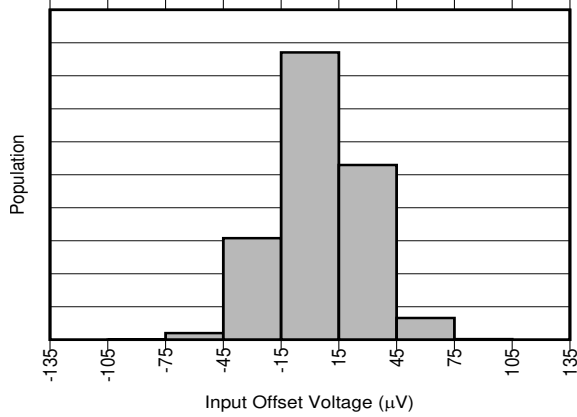


**图 6-1. INA310A1 Input Offset Production Distribution**

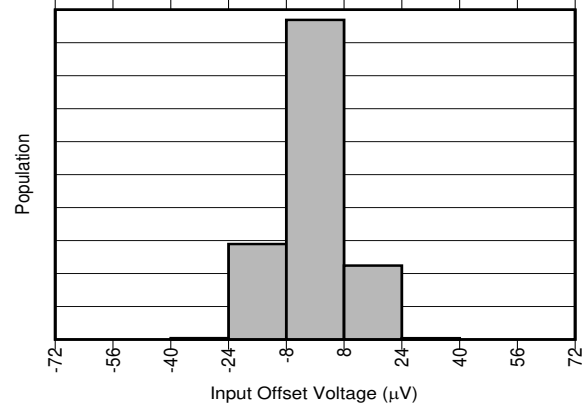


**图 6-2. INA310A2 Input Offset Production Distribution**

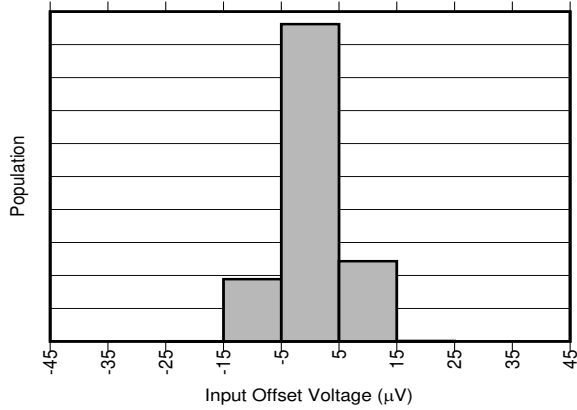


**图 6-3. INA310A3 Input Offset Production Distribution**

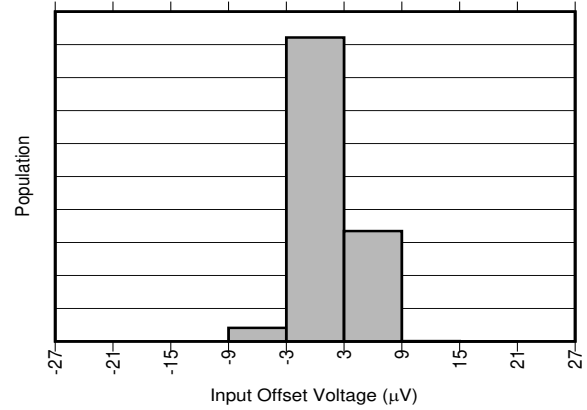

**图 6-4. INA310A4 Input Offset Production Distribution**

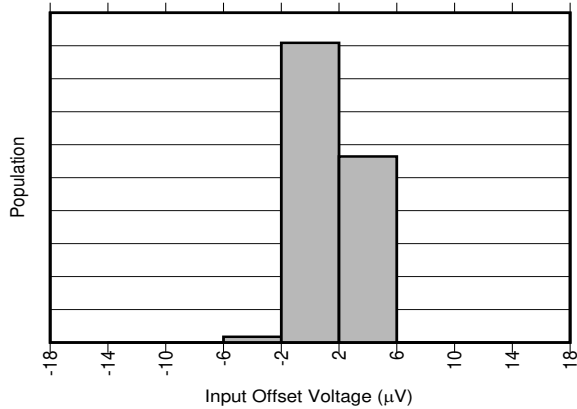

**图 6-5. INA310A5 Input Offset Production Distribution**

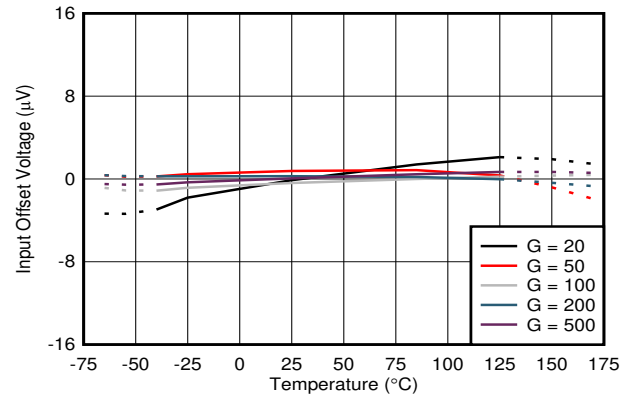

**图 6-6. Input Offset Voltage vs Temperature**

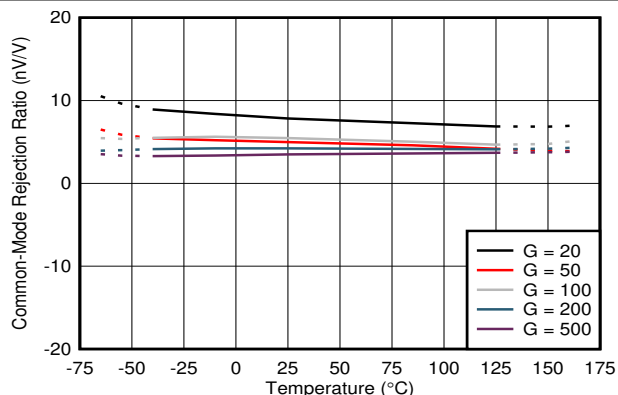


图 6-7. Common-Mode Rejection Ratio vs Temperature

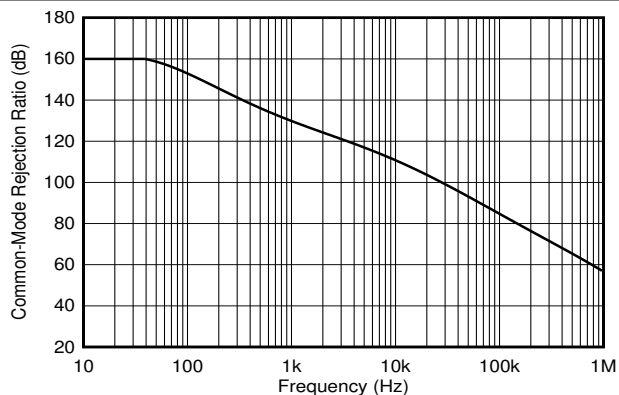


图 6-8. Common-Mode Rejection Ratio vs Frequency

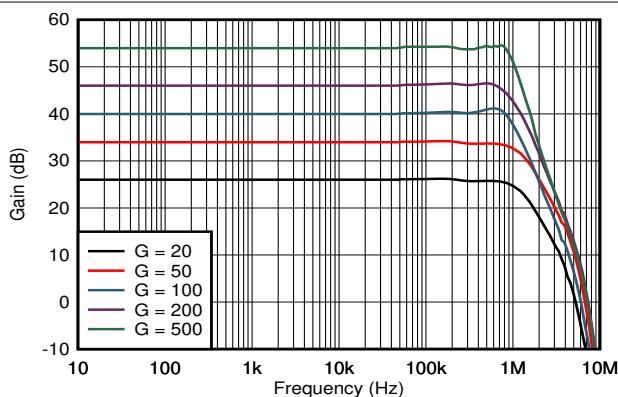


图 6-9. Gain vs Frequency

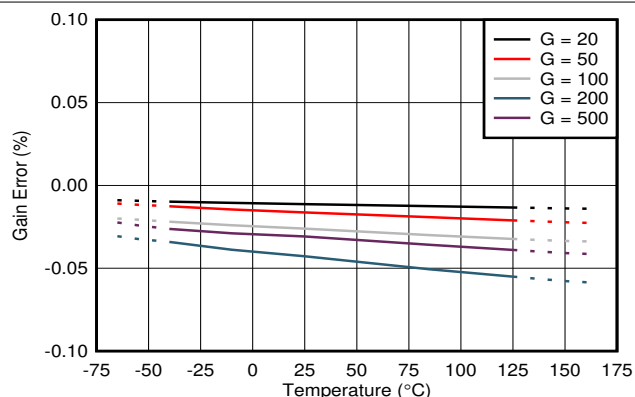


图 6-10. INA310A Gain Error vs Temperature

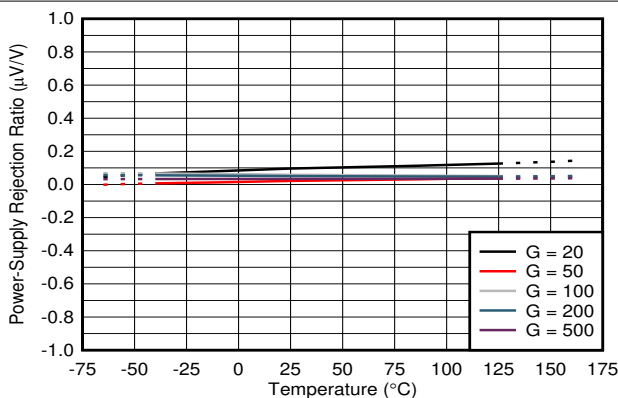


图 6-11. Power-Supply Rejection Ratio vs Temperature



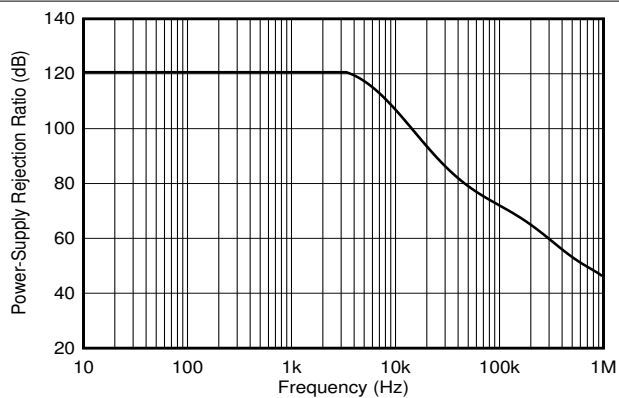


图 6-12. Power-Supply Rejection Ratio vs Frequency




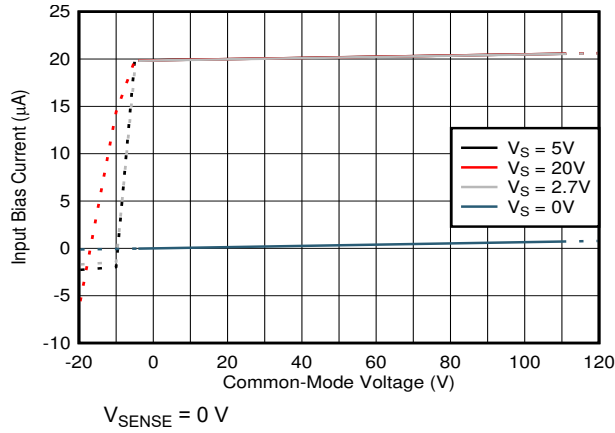


**图 6-13. Input Bias Current vs Common-Mode Voltage**

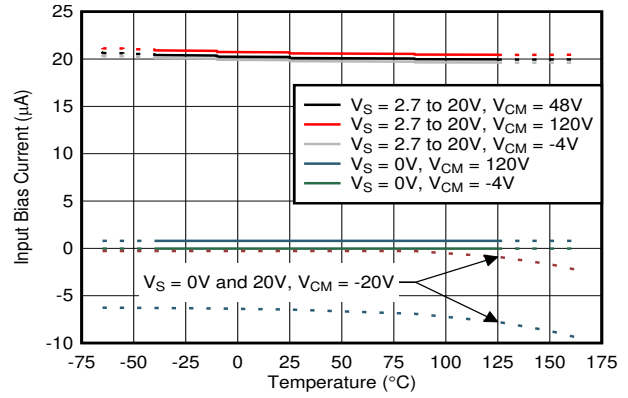


**图 6-14. Input Bias Current vs Temperature**

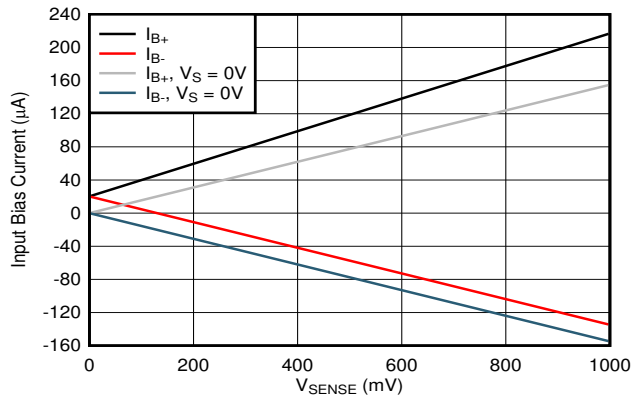


**图 6-15. INA310x1 Input Bias Current vs  $V_{SENSE}$**

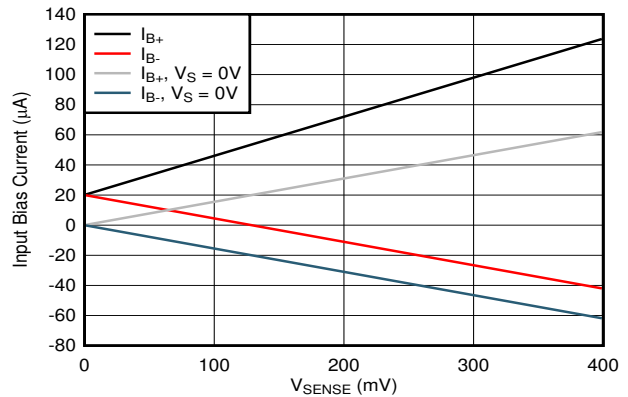

**图 6-16. INA310x2, INA310x3 Input Bias Current vs  $V_{SENSE}$**

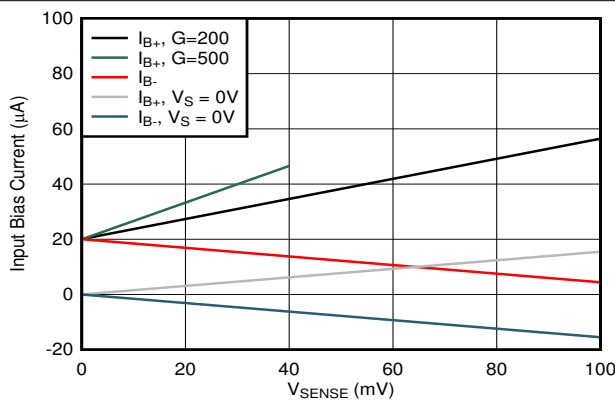

**图 6-17. INA310x4, INA310x5 Input Bias Current vs  $V_{SENSE}$**

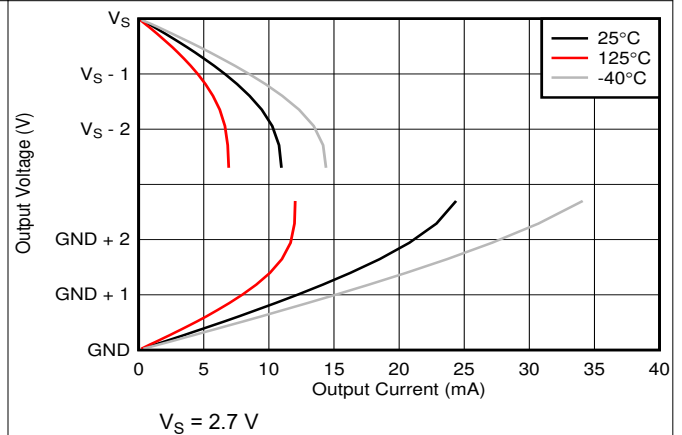

**图 6-18. Output Voltage vs Output Current**

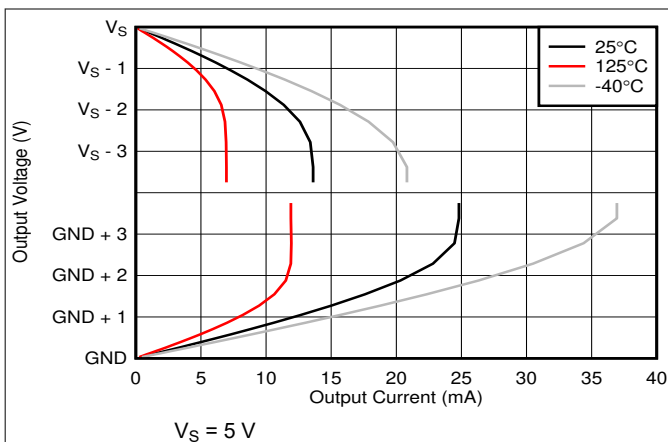


图 6-19. Output Voltage vs Output Current

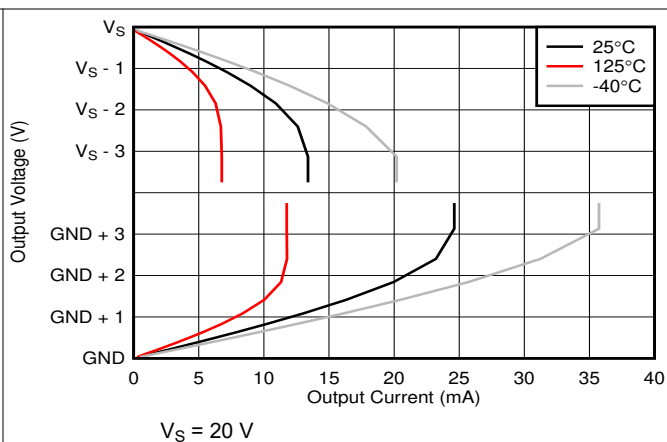


图 6-20. Output Voltage vs Output Current

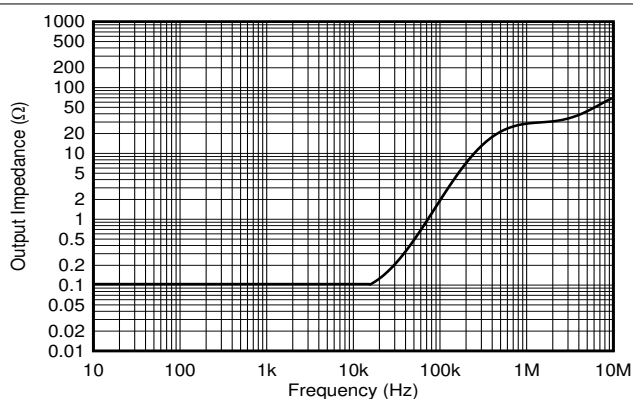


图 6-21. Output Impedance vs Frequency

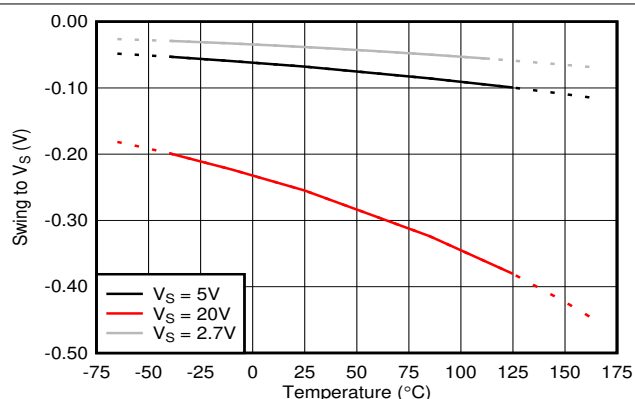


图 6-22. Swing to Supply vs Temperature

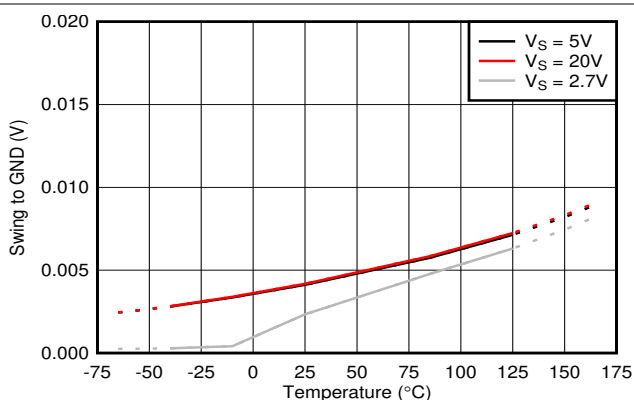


图 6-23. Swing to GND vs Temperature

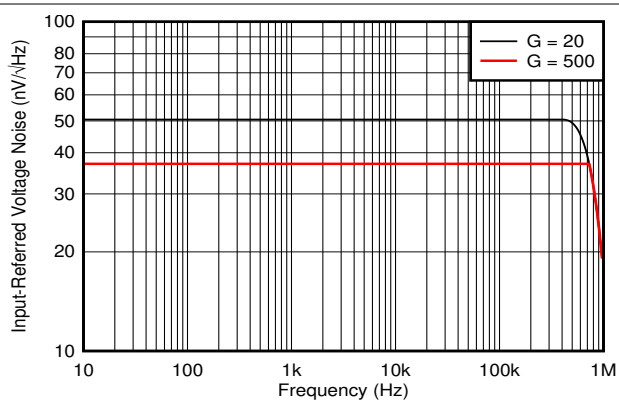


图 6-24. Input Referred Noise vs Frequency

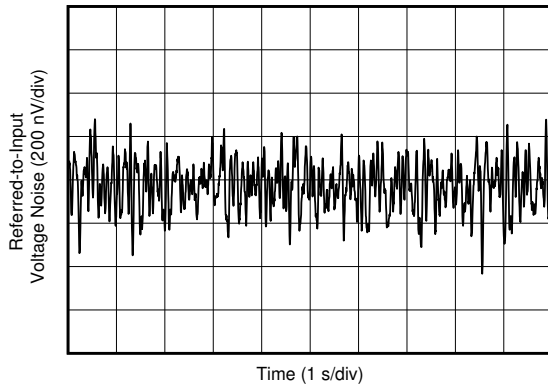


图 6-25. Input Referred Noise

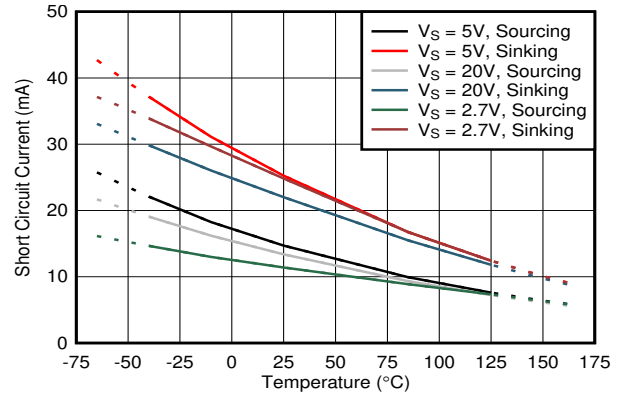


图 6-26. Short-Circuit Current vs Temperature

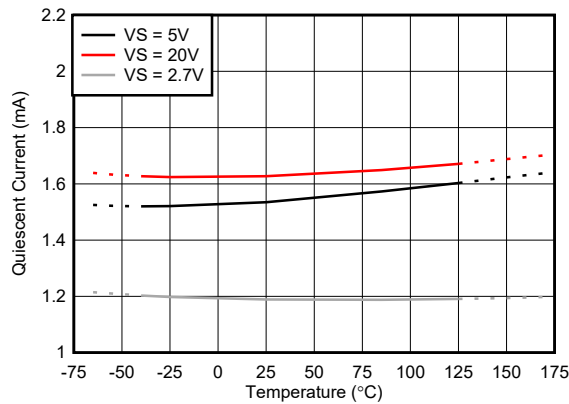


图 6-27. Quiescent Current vs Temperature

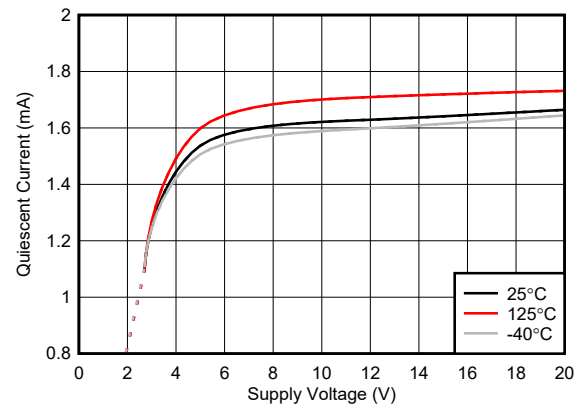


图 6-28. Quiescent Current vs Supply Voltage

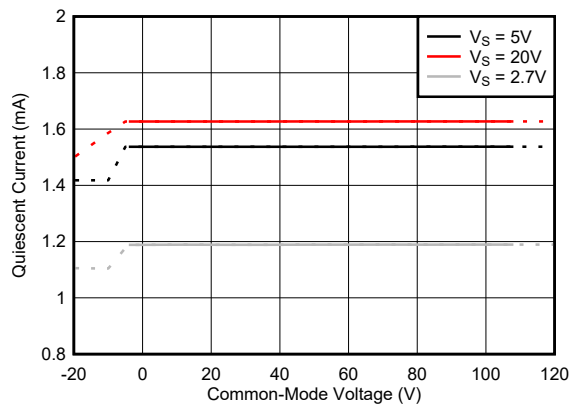


图 6-29. Quiescent Current vs Common-Mode Voltage

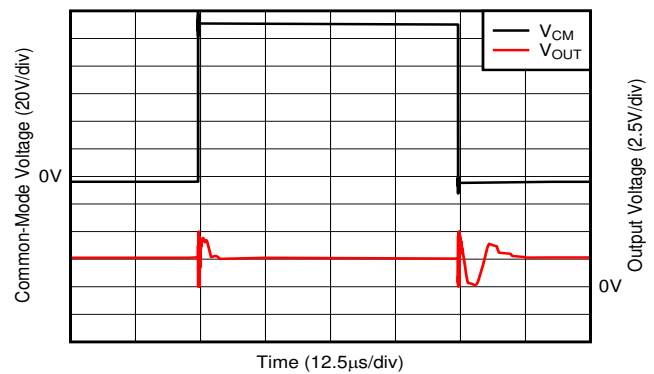


图 6-30. Common-Mode Voltage Fast Transient Pulse

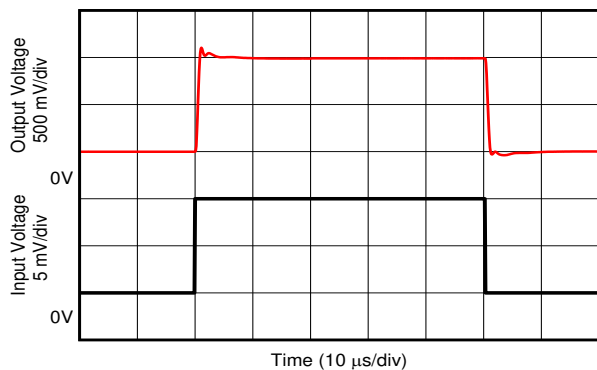


图 6-31. INA310x3 Step Response

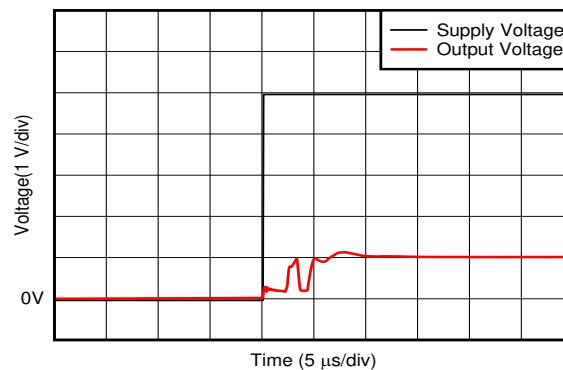


图 6-32. Start-Up Response

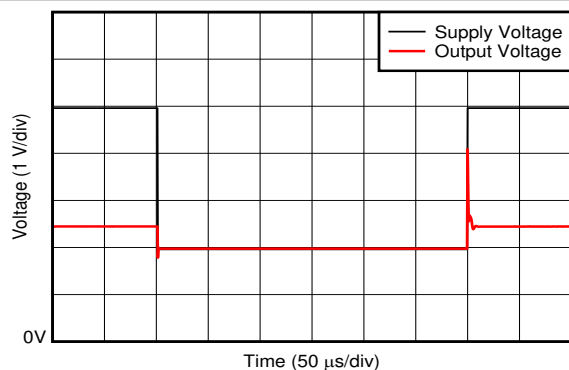


图 6-33. Supply Transient Response

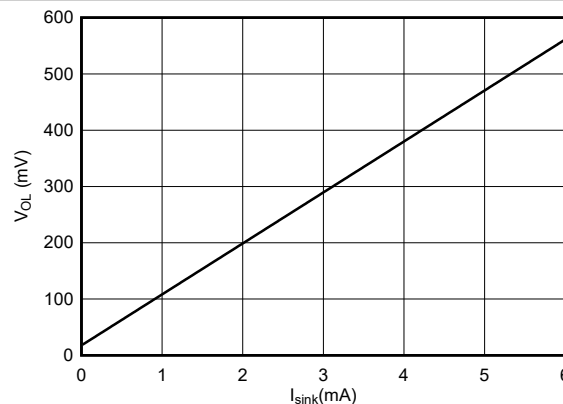


图 6-34. Comparator  $V_{OL}$  vs  $I_{SINK}$

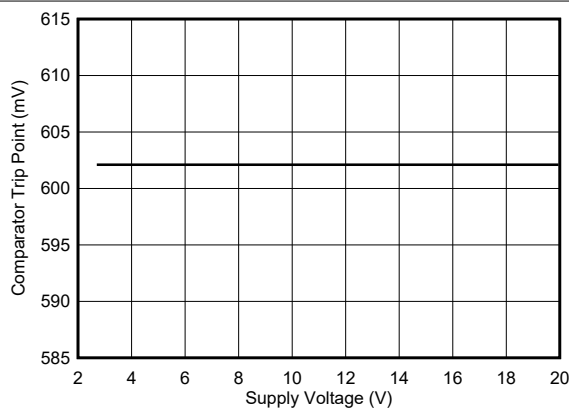


图 6-35. Comparator Trip Point vs Supply Voltage



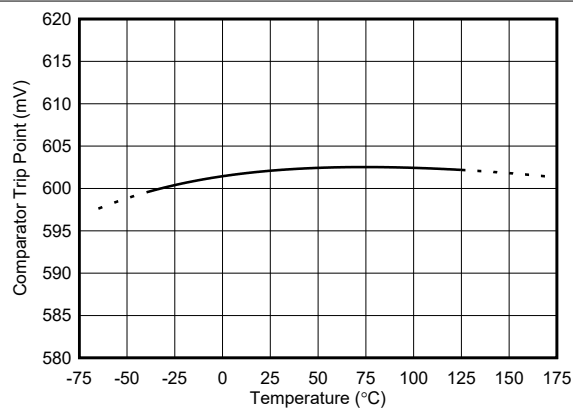



图 6-36. Comparator Trip Point vs Temperature

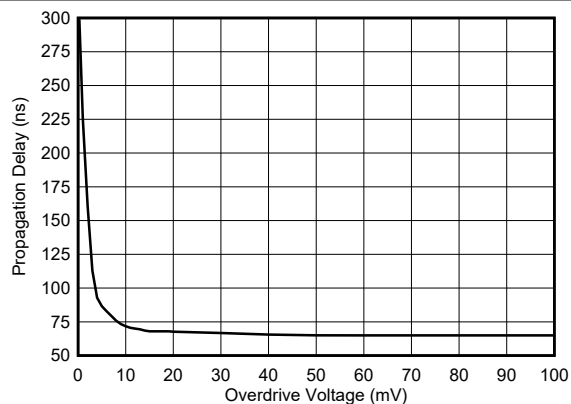


**图 6-37. Comparator Propagation Delay vs Overdrive Voltage**

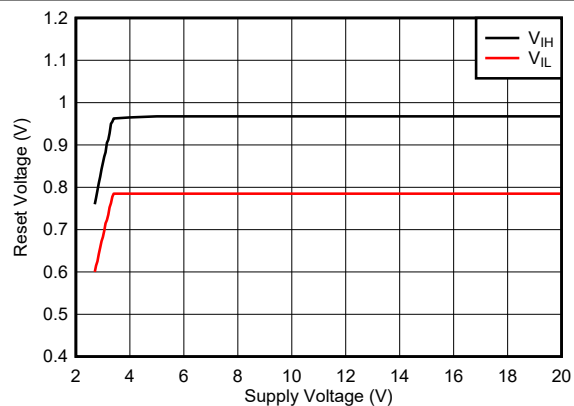

**图 6-38. Comparator Reset Voltage vs Supply Voltage**

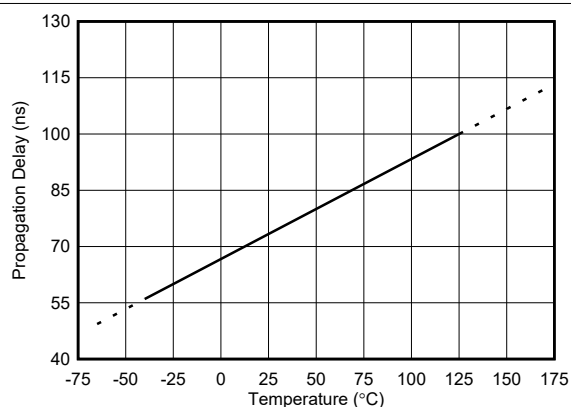

**图 6-39. Comparator Propagation Delay vs Temperature**

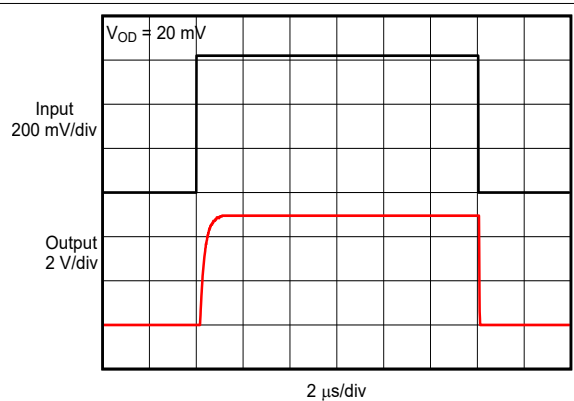


**图 6-40. Comparator Propagation Delay**

## 7 Detailed Description

### 7.1 Overview

The INA310x is a high or low-side high-speed current-sense amplifier that offers a wide common-mode range, precision zero-drift topology, excellent common-mode rejection ratio (CMRR) and fast slew rate. Different gain versions are available to optimize the output dynamic range based on the application. The INA310x is designed using an architecture that enables low input bias current of 20  $\mu\text{A}$  with a specified common-mode voltage range from  $-4\text{ V}$  to  $110\text{ V}$  with signal bandwidths up to  $1.3\text{ MHz}$ . The INA310x incorporates an open-drain comparator and internal reference providing a  $0.6\text{-V}$  threshold. An external resistor divider sets the current trip point. The comparator includes a latching capability, that can be made transparent by grounding (or leaving open) the RESET pin (see the [RESET Function](#) section).

### 7.2 Functional Block Diagram

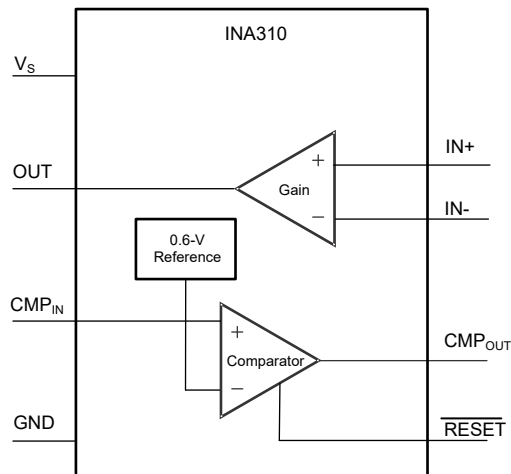

### 7.3 Feature Description

#### 7.3.1 Amplifier Input Common-Mode Signal

The INA310x supports large input common-mode voltages from  $-4\text{ V}$  to  $+110\text{ V}$ . The internal topology of the INA310x enables the common-mode range to not be restricted by the power-supply voltage ( $V_S$ ). Due to this feature, the INA310x can be used for both low-side and high-side current-sensing applications that extend beyond the supply range of  $2.7\text{ V}$  to  $20\text{ V}$ .

#### 7.3.2 Input-Signal Bandwidth

The INA310x is available with several gain options, including  $20\text{ V/V}$ ,  $50\text{ V/V}$ ,  $100\text{ V/V}$ ,  $200\text{ V/V}$ , and  $500\text{ V/V}$ . The unique multistage design enables the amplifier to achieve high bandwidth at all gains. This high bandwidth provides the throughput and fast response that is required for the rapid detection and processing of overcurrent events.

#### 7.3.3 Low Input Bias Current

The INA310x inputs draw a  $20\text{-}\mu\text{A}$  input bias current per pin at a common-mode voltage as high as  $110\text{ V}$ , which enables precision current sensing on applications that require lower current leakage. Unlike many high voltage current sense amplifiers whose input bias currents are proportional to the common-mode voltage, the input bias current of the INA310x remains flat over the entire common-mode voltage range.

#### 7.3.4 Low $V_{\text{SENSE}}$ Operation

The INA310x features high performance operation across the entire valid  $V_{\text{SENSE}}$  range. The zero-drift input architecture of the INA310x provides the low offset voltage and low offset drift needed to measure low  $V_{\text{SENSE}}$  levels accurately across the wide operating temperature of  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ . Low  $V_{\text{SENSE}}$  operation is particularly beneficial when using low ohmic shunts for high current measurements, as power losses across the

shunt are significantly reduced.  $V_{SENSE}$  low level is only limited by the output swing to GND ( $V_{SN}$ ). The minimum  $V_{SENSE}$  is limited to  $V_{SN}$  divided by Gain.

### 7.3.5 Wide Fixed Gain Output

The INA310x maximum gain error is 0.15% at room temperature, with a maximum drift of 10 ppm/°C over the full temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . The INA310x is available in multiple gain options of 20 V/V, 50 V/V, 100 V/V, 200 V/V, and 500 V/V, which the system designer should select based on their desired signal-to-noise ratio and other system requirements, such as the dynamic current range and full-scale output voltage target.

The INA310x closed-loop gain is set by a precision, low-drift internal resistor network. The ratio of these resistors are excellently matched, while the absolute values may vary significantly. TI does not recommend adding additional resistance around the INA310x to change the effective gain because of this variation.

### 7.3.6 Wide Supply Range

The INA310x operates with a wide supply range from 2.7 V to 20 V. While the input voltage range of the INA310x is independent of the supply voltage, the output voltage is bound by the supply voltage applied to the device. The output voltage can range from as low as 20 mV to as high as 200 mV below the supply voltage.

### 7.3.7 Integrated Comparator

The INA310x incorporates an open-drain comparator with an internal reference providing a 0.6-V threshold. The comparator input ( $\text{CMP}_{IN}$ ) can take voltage from 0 V up to 5.5 V or equal to power-supply voltage (if it is lower than 5.5 V). The comparator has a built-in hysteresis of 8 mV (typical). 图 7-1 shows the hysteresis, which is the difference between the rising-edge threshold and the falling-edge threshold. The hysteresis makes stable switching at the comparator output by providing noise immunity at comparator input.

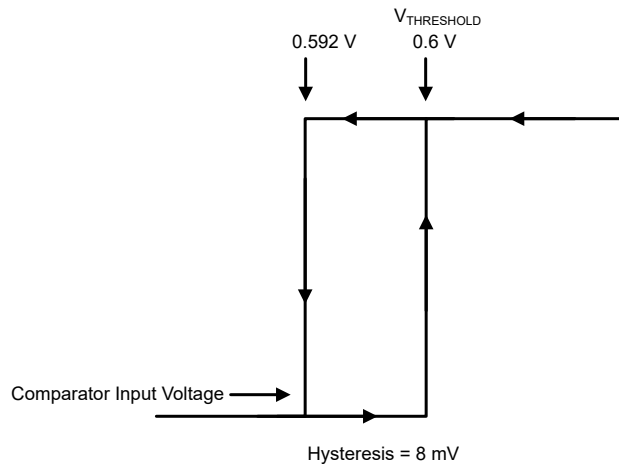


图 7-1. The Comparator Threshold and Hysteresis

The open-drain output of the comparator can be tied to voltage range of 0 to 20 V (independent of power supply) through a pullup resistor. When the voltage at the comparator input ( $\text{CMP}_{IN}$ ) exceeds 0.6 V, the output of the comparator goes high. When the voltage at the comparator input falls below falling-threshold ( $0.6\text{ V} - \text{Hysteresis}$ ), the output of the comparator is pulled low by an internal open-drain transistor.

### 7.3.8 RESET Function

The  $\overline{\text{RESET}}$  function allows the comparator to work in transparent mode or latching mode. 图 7-2 shows the two modes of the  $\overline{\text{RESET}}$  function. When the  $\overline{\text{RESET}}$  pin is left open or connected to GND the comparator functions in a transparent mode. In transparent mode comparator output ( $\text{CMP}_{OUT}$ ) responds as a normal comparator. When the  $\overline{\text{RESET}}$  pin is connected to the supply voltage, the pin operates in latching mode. In the latching mode when the comparator is triggered by the comparator input going higher than 0.6 V, the output of the comparator stays high irrespective of comparator input after. To release the comparator from the latching mode, the  $\overline{\text{RESET}}$

pin must be pulled to GND or released to open. The  $\overline{\text{RESET}}$  pin can take a voltage range from 0 V to the power-supply voltage.

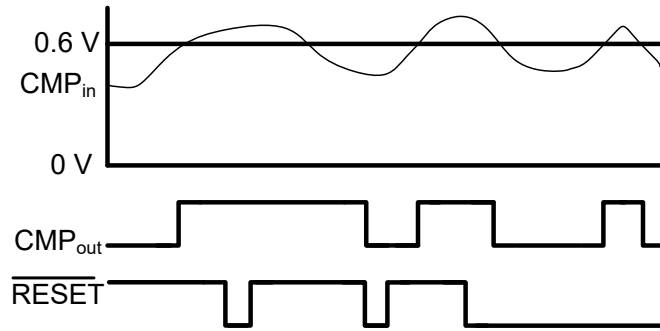


图 7-2. The Comparator  $\overline{\text{RESET}}$  Function

### 7.3.9 Short Propagation Delay

The combination of a high-speed current sense amplifier and a fast comparator provides a short total propagation delay of 1  $\mu\text{s}$ . The sense voltage (across the shunt resistor) propagates through the output where the output is divided down with the resistor divider to the comparator input and then to the comparator output. An external resistor divider at  $V_{\text{OUT}}$  sets overcurrent threshold. The total propagation delay is time taken from when the sense voltage (across the shunt resistor) exceeds the overcurrent threshold to when the comparator output drives high. The short propagation delay makes the INA310x well suited for overcurrent protection in systems sensitive to overcurrent events.

### 7.3.10 Comparator Input Bias Current

The INA310x comparator input has a built-in circuit to protect the input devices in case of large input differential voltage. This circuit results in the input bias current ( $I_{\text{BCMPIN}}$ ) curve against input voltage ( $V_{\text{CMPIN}}$ ) as shown in [图 7-3](#). The  $I_{\text{BCMPIN}}$  reduces with  $V_{\text{CMPIN}}$  from 0 V to 0.4 V,  $I_{\text{BCMPIN}}$  is under 20 nA at 25°C for  $V_{\text{CMPIN}}$  range from 0.4 V to 1.2 V, and  $I_{\text{BCMPIN}}$  increases with  $V_{\text{CMPIN}}$  from 1.8 V to 5.5 V. The nature of  $I_{\text{BCMPIN}}$  does not contribute to the inaccuracy of the comparator alert threshold voltage ( $V_{\text{THRESHOLD}}$ ) significantly because the  $I_{\text{BCMPIN}}$  goes below 20 nA when the input voltage is close to the threshold voltage (0.6 V). Avoid using a high-value resistor for the divider network for better  $V_{\text{THRESHOLD}}$  accuracy. The sum of the two resistors in the divider network as shown in [Overcurrent Threshold Connection](#) is recommended to keep lower than 100 k $\Omega$ .



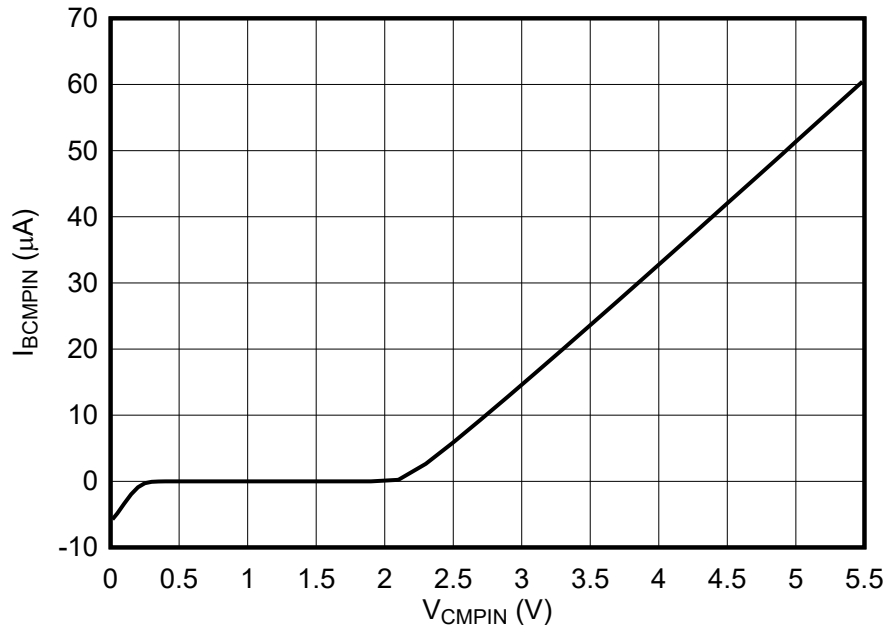


图 7-3. Comparator  $I_{BCMPIN}$  vs  $V_{CMPIN}$

## 7.4 Device Functional Modes

### 7.4.1 Basic Connections

图 7-4 shows a basic circuit connection for INA310x. The INA310x is configurable to allow for unidirectional high-side or low-side, current-sensing operation. The input pins (IN+ and IN-) must be connected as closely as possible with Kelvin connections to the shunt resistor to minimize any resistance in series with the shunt resistance. The [Layout](#) section provides the layout guidelines and a layout example.

Power-supply bypass capacitors are required for stability. Applications with noisy or high-impedance power supplies may require additional decoupling capacitors to reject power-supply noise. Connect bypass capacitors close to the device  $V_S$  pin. The recommended value of a bypass capacitor is  $0.01 \mu F$ .

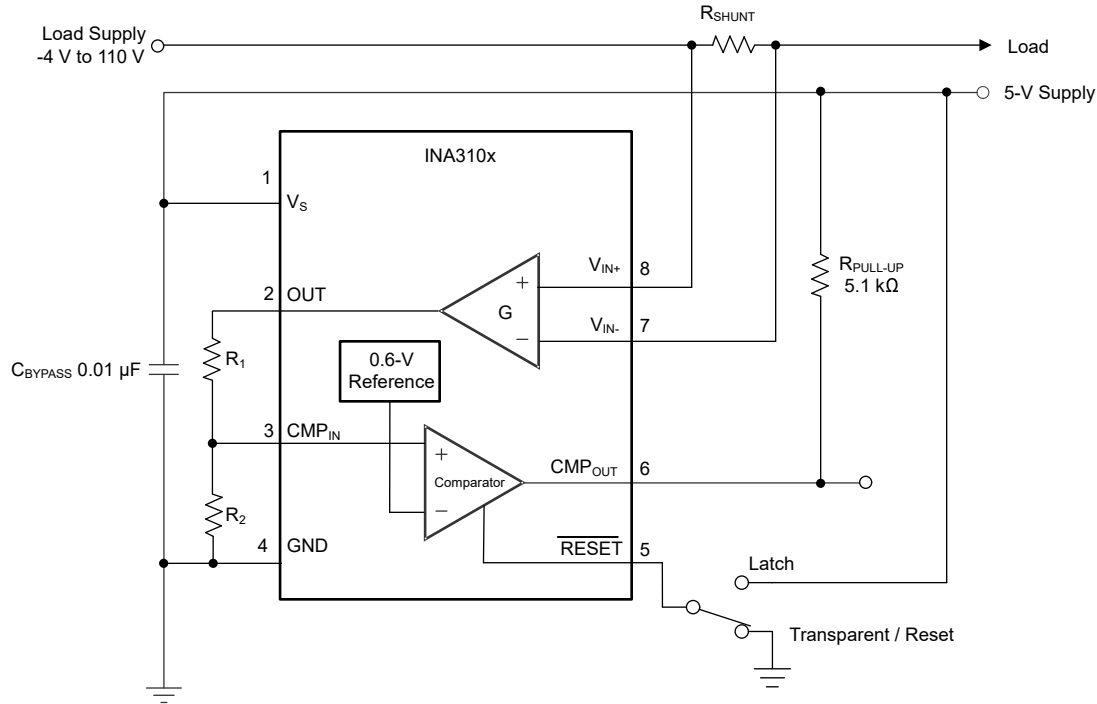


图 7-4. INA310 Basic Connections

#### 7.4.1.1 Overcurrent Threshold Connection

The INA310x comparator in 图 7-4 is configured to provide overcurrent alert signal when the current through  $R_{SHUNT}$  exceeds the overcurrent threshold. OUT voltage times  $R_2$  divided by  $R_1$  and  $R_2$  compared to the internal reference voltage (0.6 V) sets the overcurrent threshold. 方程式 1 shows the relation of the overcurrent threshold with gain,  $R_{SHUNT}$ ,  $R_1$  and  $R_2$ .

$$I_{Sense\_Alert\_Threshold} = \frac{0.6 \times (R_1 + R_2)}{R_2 \times G \times R_{shunt}} \quad (1)$$

$R_1$  and  $R_2$  load OUT, therefore TI recommends to set the sum of these resistors higher than 10k. This helps keep the high swing range at the OUT and lower total supply current. The high value of these resistors will contribute to inaccuracy in comparator alert threshold voltage ( $V_{THRESHOLD}$ ) as mentioned in [Comparator Input Bias Current](#). The [Design Requirements](#) section shows an example of resistors values to set the overcurrent threshold.

## 7.4.2 High-Side Switch Overcurrent Shutdown

The INA310x measures differential voltage developed by current flowing through a current-shunt resistor. 图 7-5 shows the circuit with INA310x used for turning off the high-side switch in case of overcurrent. When the current exceeds overcurrent threshold, the comparator output (CMP<sub>OUT</sub>) signal goes high. This signal from the comparator drives through the Q1 transistor to the gate of the high-side switch, causing the switch to shut down. The Q1 transistor helps isolate CMP<sub>OUT</sub> from the high voltage of the Supply. There are three location options to have shunt resistor to measure unidirectional current. Option 1 and Option 2 are high-side current sensing, and Option 3 is low-side current sensing. Though both are high-side current sensing, Option 1 accounts for the current flowing through the Q1 transistor, and Option 2 does not. The advantages of high-side current sensing are that high-side sensing options do not contribute to ground disturbances and that high-side sensing can detect load shorts. In high-side current sensing, input common-mode is close to the power supply so a current-sensing amplifier with high CMRR and high common-mode is required for high-accuracy measurement. The low-side current sensing does not require a high-voltage, current-sensing amplifier as common mode remains very close to the ground. The disadvantages of low-side current sensing are that low-side sensing options contribute to ground disturbances and that low-side current sensing cannot detect load shorts.

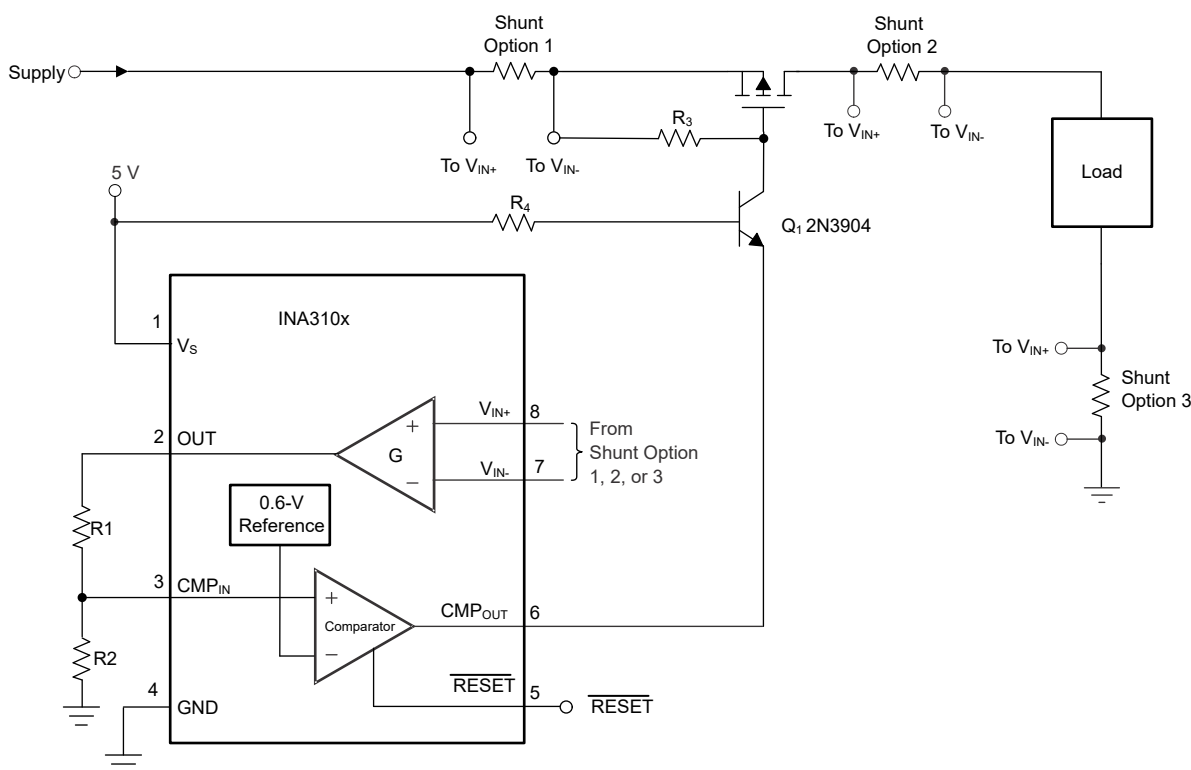


图 7-5. High-Side Switch for Overcurrent Shutdown

### 7.4.3 Bidirectional Overcurrent Comparator

The INA310x can operate only in unidirectional mode, but [Figure 7-6](#) shows that two INA310xs can be configured to provide a bidirectional overcurrent alert signal. The polarity of the differential voltage measured across the shunt resistor is in reverse for one current sense amplifier. Two INA310xs function to cover the opposite current directions, and therefore provide bidirectional overcurrent monitor function.

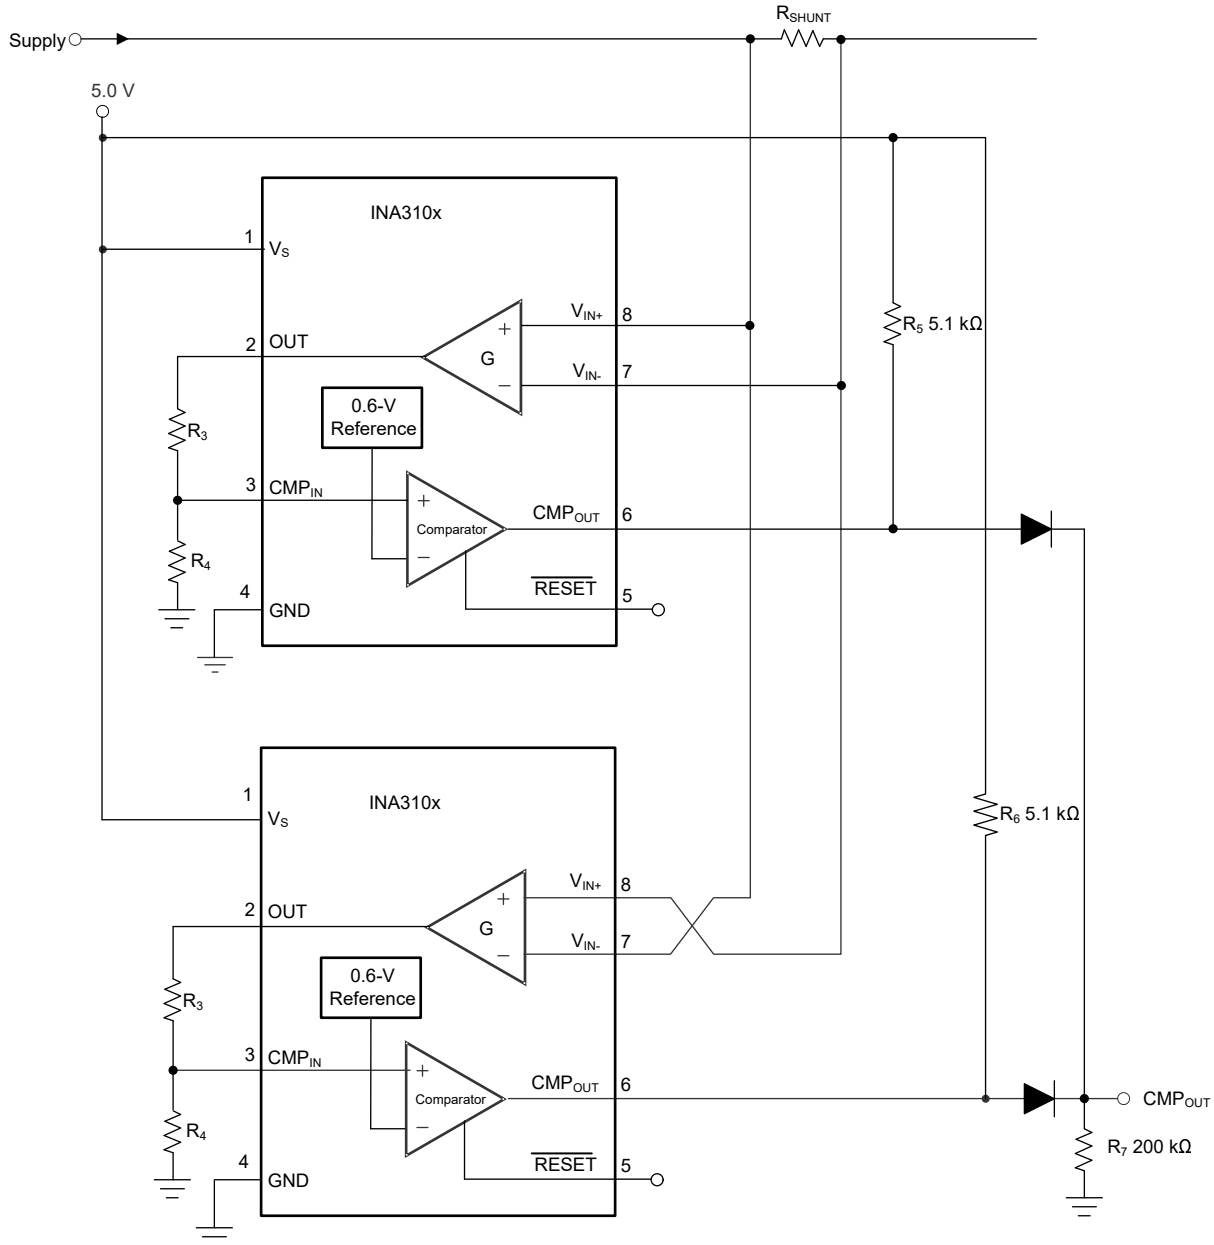


图 7-6. Ground Referenced Output

## 8 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 8.1 Application Information

The INA310x amplifies the voltage developed across a current-sensing resistor as current flows through the resistor to the load. The wide input common-mode voltage range and high common-mode rejection of the INA310x make the device usable over a wide range of voltage rails while still maintaining accurate current measurement.

#### 8.1.1 R<sub>SENSE</sub> and Device Gain Selection

To maximize the accuracy of a current sense amplifier, TI recommends to choose the largest current sense resistor value possible in an application. A larger value sense resistor maximizes the differential input signal for a given amount of current flow and reduces the error contribution of the offset voltage. However, there are practical limits as to how large the current-sense resistor value can be in a given application because of the physical dimensions of the resistor, package construction and maximum power dissipation. 方程式 2 gives the maximum value for the current-sense resistor for a given power dissipation budget:

$$R_{\text{SENSE}} < \frac{PD_{\text{MAX}}}{I_{\text{MAX}}^2} \quad (2)$$

where:

- $PD_{\text{MAX}}$  is the maximum allowable power dissipation in  $R_{\text{SENSE}}$ .
- $I_{\text{MAX}}$  is the maximum current that will flow through  $R_{\text{SENSE}}$ .

An additional limitation on the size of the current sense resistor and device gain is due to the power-supply voltage,  $V_{\text{S}}$ , and device swing-to-rail limitations. To make sure that the current-sense signal is properly passed to the output, both positive and negative output swing limitations must be examined. 方程式 3 provides the maximum values of  $R_{\text{SENSE}}$  and GAIN to keep the device from exceeding the positive swing limitation.

$$I_{\text{MAX}} \times R_{\text{SENSE}} \times \text{GAIN} < V_{\text{SP}} \quad (3)$$

where:

- $I_{\text{MAX}}$  is the maximum current that will flow through  $R_{\text{SENSE}}$ .
- GAIN is the gain of the current-sense amplifier.
- $V_{\text{SP}}$  is the positive output swing as specified in the data sheet.

To avoid positive output swing limitations when selecting the value of  $R_{\text{SENSE}}$ , there is always a trade-off between the value of the sense resistor and the gain of the device under consideration. If the sense resistor selected for the maximum power dissipation is too large, then it is possible to select a lower-gain device to avoid positive swing limitations.

The negative swing limitation places a limit on how small the sense resistor value can be for a given application. 方程式 4 provides the limit on the minimum value of the sense resistor.

$$I_{\text{MIN}} \times R_{\text{SENSE}} \times \text{GAIN} > V_{\text{SN}} \quad (4)$$

where:

- $I_{\text{MIN}}$  is the minimum current that will flow through  $R_{\text{SENSE}}$ .

- GAIN is the gain of the current-sense amplifier.
- $V_{SN}$  is the negative output swing of the device.

表 8-1 shows an example of the different results obtained from using five different gain versions of the INA310x. From the table data, the highest gain device allows a smaller current-shunt resistor and decreased power dissipation in the element.

表 8-1.  $R_{SENSE}$  Selection and Power Dissipation<sup>(1)</sup>

PARAMETER		EQUATION	RESULTS AT $V_S = 5\text{ V}$				
			A1, B1 DEVICES	A2, B2 DEVICES	A3, B3 DEVICES	A4, B4 DEVICES	A5, B5 DEVICES
G	Gain		20 V/V	50 V/V	100 V/V	200 V/V	500 V/V
$V_{DIFF}$	Ideal differential input voltage	$V_{DIFF} = V_{OUT} / G$	250 mV	100 mV	50 mV	25 mV	10mV
$R_{SENSE}$	Current sense resistor value	$R_{SENSE} = V_{DIFF} / I_{MAX}$	25 m $\Omega$	10 m $\Omega$	5 m $\Omega$	2.5 m $\Omega$	1 m $\Omega$
$P_{SENSE}$	Current-sense resistor power dissipation	$R_{SENSE} \times I_{MAX}^2$	2.5 W	1 W	0.5 W	0.25 W	0.1 W

(1) Design example with 10-A full-scale current with maximum output voltage set to 5 V.

## 8.2 Typical Application

The INA310x is a unidirectional, current-sense amplifier capable of measuring currents through a resistive shunt with shunt common-mode voltages from  $-4\text{ V}$  to  $+110\text{ V}$ .

### 8.2.1 Current Sensing in a Solenoid Application

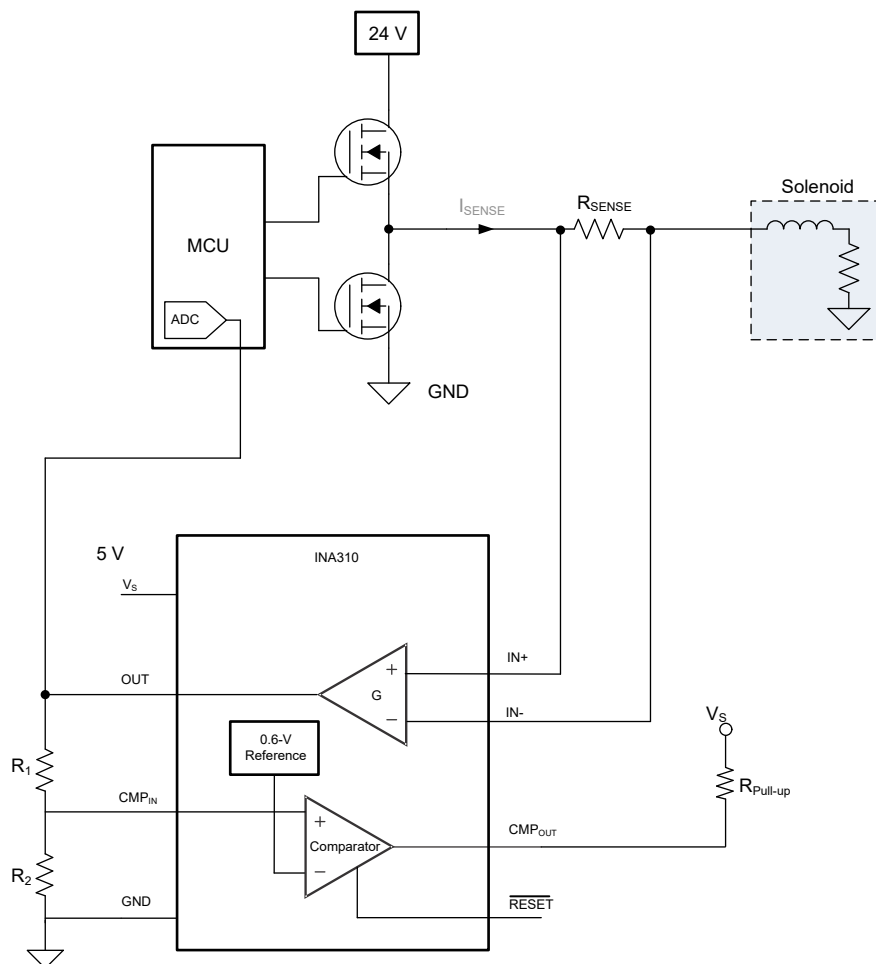


图 8-1. Current Sensing in a Solenoid Application

### 8.2.1.1 Design Requirements

In this example application, the common-mode voltage ranges from 0 V to 24 V. The maximum sense current is 1.5 A, an alert must be indicated if the current exceeds 1.9 A, and a 5 V supply is available for the INA310x. Following the design guidelines from [R<sub>SENSE</sub> and Device Gain Selection](#), a R<sub>SENSE</sub> of 50 mΩ and a gain of 50 V/V are selected to provide good output dynamic range. 表 8-2 lists the design setup for this application.

**表 8-2. Design Parameters**

DESIGN PARAMETERS	EXAMPLE VALUE
Power supply voltage	5 V
Common mode voltage range	0 V to 24 V
Maximum sense current	1.5 A
R <sub>SENSE</sub> resistor	50 mΩ
Gain option	50 V/V
Over-current Threshold	1.9 A
R <sub>1</sub>	69.15 kΩ
R <sub>2</sub>	10 kΩ

### 8.2.1.2 Detailed Design Procedure

The INA310x is designed to measure current in a typical solenoid application. The INA310x measures current across the 50-mΩ shunt that is placed at the output of the half-bridge. The INA310x measures the differential voltage across the shunt resistor, and the signal is internally amplified with a gain of 50 V/V. The output of the INA310x is connected to the analog-to-digital converter (ADC) of an MCU to digitize the current measurements.

R<sub>2</sub> is fixed as 10 kΩ to avoid loading of OUT as recommended in [Overcurrent Threshold Connection](#). R<sub>1</sub> is calculated as 69.15 kΩ using [方程式 1](#).

$$1.9 \text{ A} = \frac{0.6 \text{ V} \times (R_1 + 10 \text{ k}\Omega)}{10 \text{ k}\Omega \times 50 \times 50 \text{ m}\Omega}$$

R<sub>1</sub> (69.15 kΩ) and R<sub>2</sub> (10 kΩ) divides down the output which is an input to the comparator. This sets the overcurrent alert threshold of 1.9 A.

Solenoid loads are highly inductive and are often prone to failure. Solenoids are often used for position control, precise fluid control, and fluid regulation. Measuring real-time current on the solenoid continuously can indicate premature failure of the solenoid, which can lead to a faulty control loop in the system. Measuring high-side current also indicates if there are any ground faults on the solenoid or the FETs that can be damaged in an application. The INA310x, with high bandwidth and slew rate, can be used to detect fast overcurrent conditions to prevent the solenoid damage from short-to-ground faults.

#### 8.2.1.2.1 Overload Recovery With Negative V<sub>SENSE</sub>

The INA310x is a unidirectional current sense amplifier that is meant to operate with a positive differential input voltage (V<sub>SENSE</sub>). If negative V<sub>SENSE</sub> is applied, the device is placed in an overload or saturated condition and requires time to recover after V<sub>SENSE</sub> returns positive. The required overload recovery time increases with more negative V<sub>SENSE</sub>.

### 8.2.1.3 Application Curve

图 8-2 shows the output response of a solenoid.

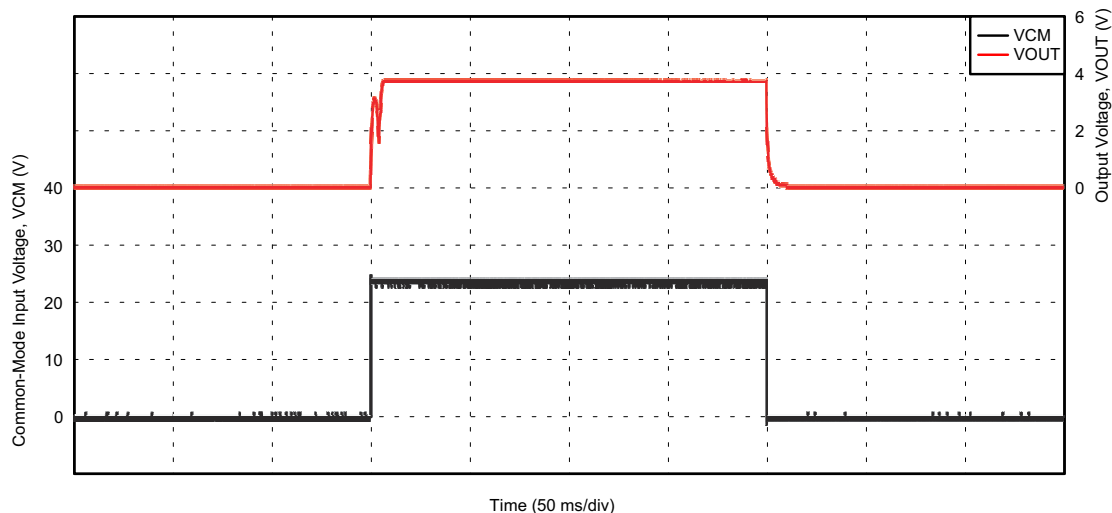


图 8-2. Solenoid Control Current Response

### 8.2.2 Low-Side Switch Overcurrent Shutdown

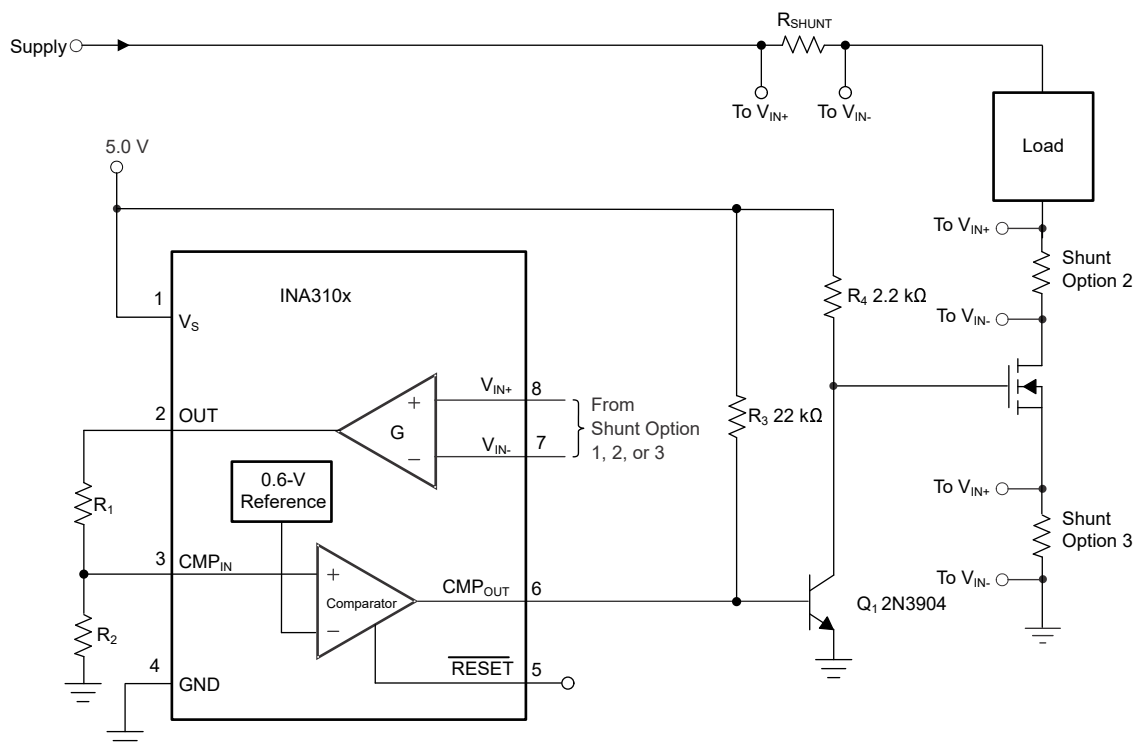


图 8-3. Low-Side Switch Overcurrent Shutdown

#### 8.2.2.1 Design Requirements

The INA310x measures current through a resistive shunt with current flowing in one direction that enables detection of an overcurrent event only when the differential input voltage exceeds the threshold limit. When the current reaches the set limit of the divider of  $R_1$  and  $R_2$ , the output of comparator ( $CMP_{OUT}$ ) transitions high, which turns on  $Q_1$ , pulls the gate of the pass-FET low, and turns off the flow of the current. In this example



application, the common-mode voltage is set at 5 V. The maximum sense current is 1 A, an alert must be indicated if the current exceeds 1.2 A, and a 5 V supply is available for the INA310x. Following the design guidelines from [R<sub>SENSE</sub> and Device Gain Selection](#), a R<sub>SHUNT</sub> of 100 mΩ and a gain of 20 V/V are selected to provide a good output dynamic range. 表 8-3 lists the design setup for this application.

**表 8-3. Design Parameters**

DESIGN PARAMETERS	EXAMPLE VALUE
Power supply voltage	5 V
Common mode voltage range	5 V
Maximum sense current	1 A
R <sub>SENSE</sub> resistor	100 mΩ
Gain option	20 V/V
Over-current Threshold	1.2 A
R <sub>1</sub>	10.2 kΩ
R <sub>2</sub>	3.4 kΩ


### 8.2.2.2 Detailed Design Procedure

图 8-3 shows the basic connections to the INA310x. The inputs terminals (IN+ and IN - ) must be connected to the current sense resistor as close as possible to minimize any resistance in series with the shunt resistor. The INA310x measures current across the 100-mΩ shunt that is placed in series with load. The INA310x measures the differential voltage across the shunt resistor, and the signal is internally amplified with a gain of 20 V/V.

R<sub>1</sub> is fixed as 10.2 kΩ to avoid loading of OUT as recommended in [Overcurrent Threshold Connection](#). R<sub>2</sub> is calculated as 3.4 kΩ using 方程式 1. R<sub>1</sub> (10.2 kΩ) and R<sub>2</sub> (3.4 kΩ) divides down the output which is an input to the comparator. This sets the overcurrent alert threshold of 1.2 A.

### 8.2.2.3 Application Curve

图 8-4 shows the output response the current sense amplifier and the comparator in event of overcurrent.

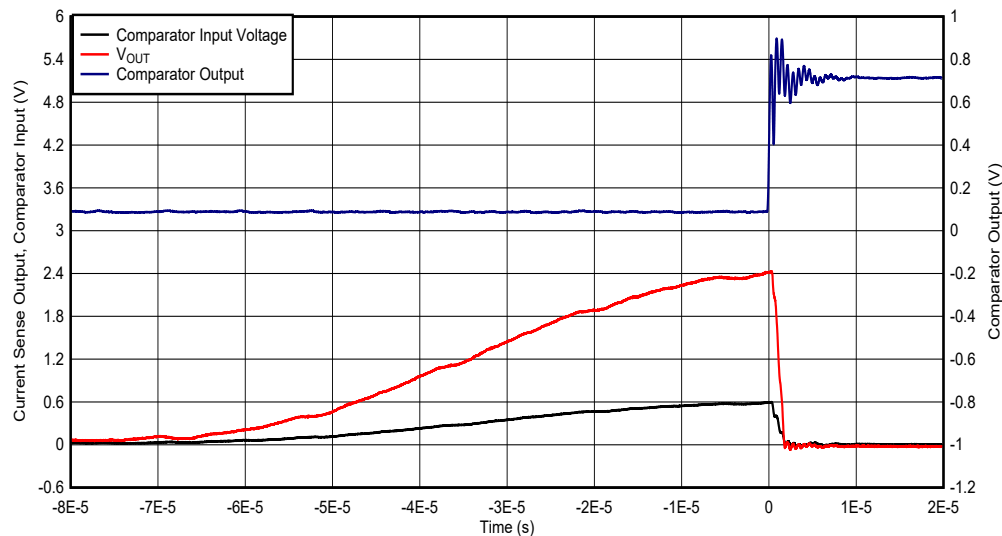

**图 8-4. Low-Side Switch Overcurrent Shutdown Response**

## 8.3 Power Supply Recommendations

The INA310x makes accurate measurements beyond the connected power-supply voltage ( $V_S$ ) because the inputs (IN+ and IN - ) can operate anywhere between - 4 V and 110 V independent of  $V_S$ . For example, with the  $V_S$  power supply equal to 5 V, the common-mode voltage of the measured shunt can be as high as 110 V.

### 8.3.1 Power Supply Decoupling

Place the power-supply bypass capacitor as close to the power-supply and ground pins as possible. TI recommends a bypass capacitor value of  $0.1\ \mu\text{F}$ . Additional decoupling capacitance can be added to compensate for noisy or high-impedance power supplies.

## 8.4 Layout

### 8.4.1 Layout Guidelines

Attention to good layout practices is always recommended.

- Connect the input pins to the sensing resistor using a Kelvin or 4-wire connection. This connection technique makes sure that only the current-sensing resistor impedance is detected between the input pins. Poor routing of the current-sensing resistor commonly results in additional resistance present between the input pins. Given the very low ohmic value of the current resistor, any additional high-current carrying impedance can cause significant measurement errors.
- Place the power-supply bypass capacitor as close to the device power-supply and ground pins as possible. The recommended value of this bypass capacitor is  $0.1\ \mu\text{F}$ . Additional decoupling capacitance can be added to compensate for noisy or high-impedance power supplies.

### 8.4.2 Layout Example

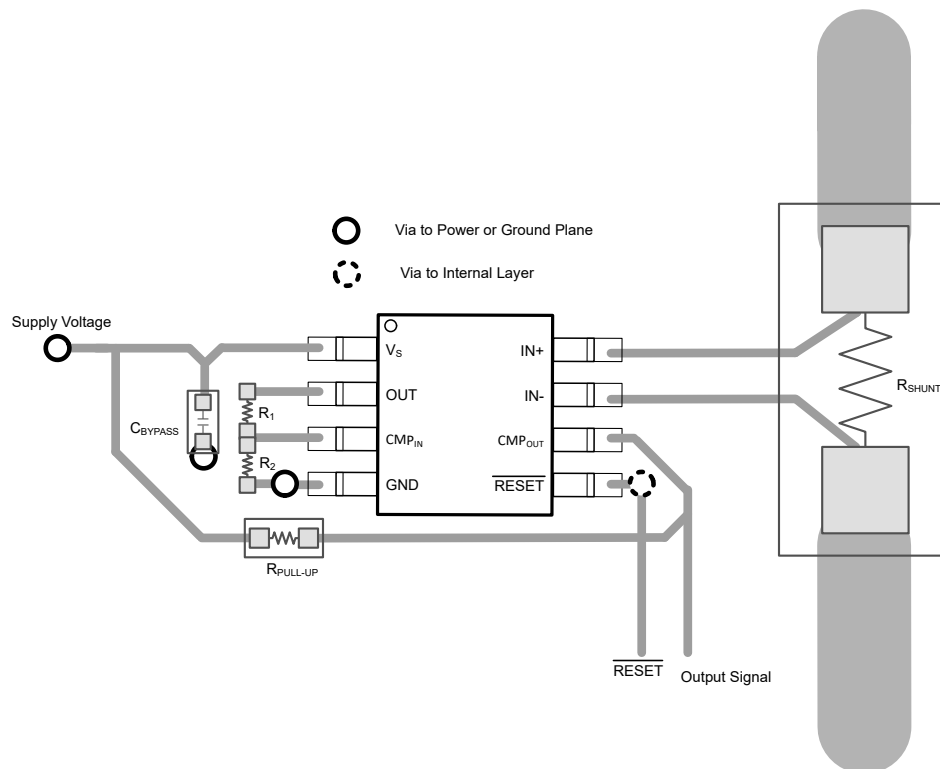


图 8-5. INA310xx Recommended Layout

## 9 Device and Documentation Support

### 9.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 9.2 支持资源

**TI E2E™ 支持论坛**是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

### 9.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 9.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 9.5 术语表

**TI 术语表** 本术语表列出并解释了术语、首字母缩略词和定义。

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">INA310A1IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2OZB
INA310A1IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2OZB
<a href="#">INA310A2IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P1B
INA310A2IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P1B
<a href="#">INA310A3IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P2B
INA310A3IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P2B
<a href="#">INA310A4IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P3B
INA310A4IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P3B
<a href="#">INA310A5IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P4B
INA310A5IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P4B
<a href="#">INA310B1IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P5B
INA310B1IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P5B
<a href="#">INA310B2IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P6B
INA310B2IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P6B
<a href="#">INA310B3IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P7B
INA310B3IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P7B
<a href="#">INA310B4IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P8B
INA310B4IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P8B
<a href="#">INA310B5IDGKR</a>	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P9B
INA310B5IDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2P9B

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF INA310A, INA310B :**

- Automotive : [INA310A-Q1](#), [INA310B-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**DGK0008A****PACKAGE OUTLINE****VSSOP - 1.1 mm max height**

SMALL OUTLINE PACKAGE



4214862/A 04/2023

**NOTES:**

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X



SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.



## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司