

## ISO72x 单通道高速数字隔离器

### 1 特性

- 100Mbps 和 150Mbps 信令速率选项
- 传播延迟为 12ns (典型值)。
- 脉冲偏移为 0.5ns (典型值)。
- 低功耗睡眠模式
- 额定工作电压下的使用寿命典型值为 28 年 (请参阅 [隔离寿命预测](#))
- 高电磁抗扰度 (请参阅应用手册 [ISO72x 数字隔离器电磁抗扰度](#))
- 失效防护输出
- 大多数光隔离器和磁隔离器的直接替代产品
- 由 3.3V 和 5V 电源供电
- -40°C 至 +125°C 工作温度范围
- [安全相关认证](#)：
  - DIN EN IEC 60747-17 (VDE 0884-17)
  - UL 1577 组件认证计划
  - IEC 61010-1、IEC 62368-1 认证

### 2 应用

- [工厂自动化](#)
  - [Modbus](#)
  - [Profibus™](#)
  - [DeviceNet™](#) 数据总线
- [计算机外设接口](#)
- [伺服器控制接口](#)
- [数据采集](#)

### 3 说明

ISO721、ISO721M、ISO722 和 ISO722M 器件是数字隔离器，其逻辑输入和输出缓冲器由二氧化硅 (SiO<sub>2</sub>) 绝缘隔栅进行隔离。该隔离栅可提供符合 VDE 0884-17 标准、高达 4000V<sub>PK</sub> 的电隔离。与隔离式电源一起使用时，这些器件可防止数据总线或者其他电路上的噪声电流进入本地接地并且干扰或损坏敏感电路。

对二进制输入信号进行调理并转换为平衡的信号，然后由隔离层进行差分。跨越该隔离层，差分比较器可接收逻辑转换信息，然后相应地设置或重置触发器和输出电路。电路将跨越隔离层发送定期更新脉冲，以提供适当的直流输出电平。

如果没有接收到该直流刷新脉冲的时间超过 4 μs，则输入被视为未通电或未被主动驱动，失效防护电路会将输出驱动至逻辑高电平状态。

这些器件需要两个 3.3V 和 5V 电源电压或二者的任意组合。通过 3.3V 电源供电时，所有输入均可耐受 5V 电压，所有输出均为 4mA CMOS。

ISO722 和 ISO722M 器件包含一个低电平有效输出使能端，当被驱动至高逻辑电平时，该使能端会将输出置于高阻抗状态并关闭内部偏置电路以节省功耗。

ISO721 和 ISO722 器件具有 TTL 输入阈值，并且在输入端具有噪声滤波器，可防止持续时间高达 2ns 的瞬态脉冲传递到器件的输出端。

ISO721M 和 ISO722M 器件具有 CMOS V<sub>CC</sub>/2 输入阈值，但没有输入噪声滤波器和额外的传播延迟。ISO721M 器件的这些特性还可以实现低抖动运行。


ISO721、ISO721M、ISO722 和 ISO722M 器件的额定工作环境温度范围为 -40°C 至 +125°C。



封装信息

| 器件型号    | 封装 <sup>(1)</sup> | 本体尺寸 (标称值)      | 封装尺寸 <sup>(2)</sup> |
|---------|-------------------|-----------------|---------------------|
| ISO721  | D ( SOIC , 8 )    | 4.90mm × 3.91mm | 4.9mm × 6mm         |
| ISO721M |                   |                 |                     |
| ISO722  |                   |                 |                     |
| ISO722M |                   |                 |                     |

- (1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。  
(2) 封装尺寸 (长 × 宽) 为标称值，并包括引脚 (如适用)。

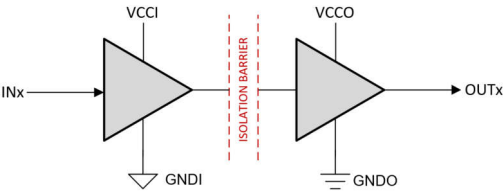

简化版原理图

## Table of Contents

|                                                  |          |                                                                  |           |
|--------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                                | <b>1</b> | 6.17 Typical Characteristics.....                                | <b>15</b> |
| <b>2 应用</b> .....                                | <b>1</b> | <b>7 Parameter Measurement Information</b> .....                 | <b>17</b> |
| <b>3 说明</b> .....                                | <b>1</b> | <b>8 Detailed Description</b> .....                              | <b>20</b> |
| <b>4 Device Comparison Table</b> .....           | <b>3</b> | 8.1 Overview.....                                                | 20        |
| <b>5 Pin Configuration and Functions</b> .....   | <b>4</b> | 8.2 Functional Block Diagram.....                                | 20        |
| <b>6 Specifications</b> .....                    | <b>5</b> | 8.3 Device Functional Modes.....                                 | 21        |
| 6.1 Absolute Maximum Ratings.....                | 5        | <b>9 Application and Implementation</b> .....                    | <b>22</b> |
| 6.2 ESD Ratings.....                             | 5        | 9.1 Application Information.....                                 | 22        |
| 6.3 Recommended Operating Conditions.....        | 5        | 9.2 Typical Application.....                                     | 22        |
| 6.4 Thermal Information.....                     | 6        | 9.3 Power Supply Recommendations.....                            | 25        |
| 6.5 Power Ratings.....                           | 6        | 9.4 Layout.....                                                  | 25        |
| 6.6 Safety Limiting Values.....                  | 6        | <b>10 Device and Documentation Support</b> .....                 | <b>27</b> |
| 6.7 Insulation Specifications.....               | 7        | 10.1 Device Support.....                                         | 27        |
| 6.8 Safety-Related Certifications.....           | 7        | 10.2 Documentation Support.....                                  | 27        |
| 6.9 Electrical Characteristics, 5 V, 3.3 V.....  | 8        | 10.3 接收文档更新通知.....                                               | 27        |
| 6.10 Electrical Characteristics, 5 V.....        | 8        | 10.4 支持资源.....                                                   | 27        |
| 6.11 Switching Characteristics, 3.3 V, 5 V.....  | 9        | 10.5 Trademarks.....                                             | 27        |
| 6.12 Electrical Characteristics, 3.3 V, 5 V..... | 10       | 10.6 静电放电警告.....                                                 | 27        |
| 6.13 Electrical Characteristics, 3.3 V.....      | 11       | 10.7 术语表.....                                                    | 27        |
| 6.14 Switching Characteristics, 3.3 V.....       | 12       | <b>11 Revision History</b> .....                                 | <b>27</b> |
| 6.15 Switching Characteristics, 5 V, 3.3 V.....  | 13       | <b>12 Mechanical, Packaging, and Orderable Information</b> ..... | <b>28</b> |
| 6.16 Switching Characteristics, 5 V.....         | 14       |                                                                  |           |

## 4 Device Comparison Table

| PART NUMBER | SIGNALING RATE | OUTPUT<br>ENABLED | INPUT<br>THRESHOLDS | NOISE<br>FILTER |
|-------------|----------------|-------------------|---------------------|-----------------|
| ISO721      | 100 Mbps       | NO                | TTL                 | YES             |
| ISO721M     | 150 Mbps       | NO                | CMOS                | NO              |
| ISO722      | 100 Mbps       | YES               | TTL                 | YES             |
| ISO722M     | 150 Mbps       | YES               | CMOS                | NO              |

## 5 Pin Configuration and Functions




图 5-1. ISO721 and ISO721M  
D Package 8-Pin SOIC  
Top View

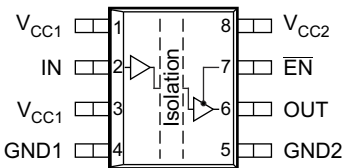


图 5-2. ISO722 and ISO722M  
D Package 8-Pin SOIC  
Top View

图 5-3. I

表 5-1. Pin Functions

| PIN              |         |         | Type <sup>(1)</sup> | DESCRIPTION                                                                                |
|------------------|---------|---------|---------------------|--------------------------------------------------------------------------------------------|
| NAME             | NO.     |         |                     |                                                                                            |
|                  | ISO721x | ISO722x |                     |                                                                                            |
| V <sub>CC1</sub> | 1       | 1       | —                   | Power supply, V <sub>CC1</sub>                                                             |
|                  | 3       | 3       |                     |                                                                                            |
| V <sub>CC2</sub> | 8       | 8       | —                   | Power supply, V <sub>CC2</sub>                                                             |
| IN               | 2       | 2       | I                   | Input                                                                                      |
| OUT              | 6       | 6       | O                   | Output                                                                                     |
| EN               | —       | 7       | I                   | Output enable. OUT is enabled when EN is low or disconnected and disabled when EN is high. |
| GND1             | 4       | 4       | —                   | Ground connection for V <sub>CC1</sub>                                                     |
| GND2             | 5       | 5       | —                   | Ground connection for V <sub>CC2</sub>                                                     |
|                  | 7       |         |                     |                                                                                            |

(1) I = Input; O = Output

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                  |                              |                                     | MIN   | MAX                                  | UNIT |
|------------------|------------------------------|-------------------------------------|-------|--------------------------------------|------|
| V <sub>CC</sub>  | Supply voltage               | V <sub>CC1</sub> , V <sub>CC2</sub> | - 0.5 | 6                                    | V    |
| V <sub>I</sub>   | Input voltage                | IN, OUT, or EN                      | - 0.5 | V <sub>CC</sub> + 0.5 <sup>(2)</sup> | V    |
| I <sub>O</sub>   | Output current               |                                     |       | ±15                                  | mA   |
| T <sub>J</sub>   | Maximum junction temperature |                                     |       | 170                                  | °C   |
| T <sub>stg</sub> | Storage temperature          |                                     | - 65  | 150                                  | °C   |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) Maximum voltage must not exceed 6 V.

### 6.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1000 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

|                     |                                                                                     |         | MIN                   | NOM | MAX                   | UNIT |
|---------------------|-------------------------------------------------------------------------------------|---------|-----------------------|-----|-----------------------|------|
| V <sub>CC</sub>     | Supply voltage <sup>(1)</sup> , V <sub>CC1</sub> , V <sub>CC2</sub>                 |         | 3                     |     | 5.5                   | V    |
| I <sub>OH</sub>     | High-level output current                                                           |         |                       |     | 4                     | mA   |
| I <sub>OL</sub>     | Low-level output current                                                            |         | - 4                   |     |                       | mA   |
| t <sub>ui</sub>     | Input pulse duration                                                                | ISO72x  | 10                    |     |                       | ns   |
|                     |                                                                                     | ISO72xM | 6.67                  |     |                       |      |
| 1 / t <sub>ui</sub> | Signaling rate                                                                      | ISO72x  | 0                     |     | 100                   | Mbps |
|                     |                                                                                     | ISO72xM | 0                     |     | 150                   |      |
| V <sub>IH</sub>     | High-level input voltage (IN, EN)                                                   | ISO72x  | 2                     |     | 5.5                   | V    |
|                     |                                                                                     | IOS72xM | 0.7 x V <sub>CC</sub> |     | V <sub>CC</sub>       |      |
| V <sub>IL</sub>     | Low-level input voltage (IN, EN)                                                    | ISO72x  | 0                     |     | 0.8                   | V    |
|                     |                                                                                     | IOS72xM | 0                     |     | 0.3 x V <sub>CC</sub> |      |
| T <sub>A</sub>      | Ambient temperature                                                                 |         | - 40                  | 25  | 125                   | °C   |
| T <sub>J</sub>      | Junction temperature, see the <a href="#">Thermal Information</a>                   |         |                       |     | 150                   | °C   |
| H                   | External magnetic field intensity per IEC 61000-4-8 and IEC 61000-4-9 certification |         |                       |     | 1000                  | A/m  |

- (1) For the 5-V operation, V<sub>CC1</sub> or V<sub>CC2</sub> is specified from 4.5 V to 5.5 V. For the 3-V operation, V<sub>CC1</sub> or V<sub>CC2</sub> is specified from 3 V to 3.6 V.

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              |              | ISO72x   | UNIT |
|-------------------------------|----------------------------------------------|--------------|----------|------|
|                               |                                              |              | D (SOIC) |      |
|                               |                                              |              | 8 PINS   |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | High-K Board | 114.7    | °C/W |
|                               |                                              | Low-K Board  | 263      |      |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    |              | 63       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         |              | 54.8     | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   |              | 18.9     | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter |              | 54.3     | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance |              | N/A      | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application note.

## 6.5 Power Ratings

$V_{CC1} = V_{CC2} = 5.5\text{ V}$ ,  $T_J = 150^\circ\text{C}$ ,  $C_L = 15\text{ pF}$ , Input a 100-Mbps 50% duty-cycle square wave (unless otherwise noted)

| PARAMETER                               |                   | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------------------------|-------------------|-----------------|-----|-----|-----|------|
| <b>ISO721 AND ISO722 IN D PACKAGE</b>   |                   |                 |     |     |     |      |
| $P_D$                                   | Power dissipation |                 |     |     | 159 | mW   |
| <b>ISO721M AND ISO722M IN D PACKAGE</b> |                   |                 |     |     |     |      |
| $P_D$                                   | Power dissipation |                 |     |     | 195 | mW   |

## 6.6 Safety Limiting Values

Safety limiting intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the I/O can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier, potentially leading to secondary system failures.

| PARAMETER |                                         | TEST CONDITIONS                                                                                                                                 | MIN | TYP | MAX | UNIT |
|-----------|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| $I_S$     | Safety input, output, or supply current | $R_{\theta JA} = 263^\circ\text{C/W}$ , $V_I = 5.5\text{ V}$ , $T_J = 170^\circ\text{C}$ , $T_A = 25^\circ\text{C}$ , see <a href="#">图 9-6</a> |     |     | 100 | mA   |
|           |                                         | $R_{\theta JA} = 263^\circ\text{C/W}$ , $V_I = 3.6\text{ V}$ , $T_J = 170^\circ\text{C}$ , $T_A = 25^\circ\text{C}$ , see <a href="#">图 9-6</a> |     |     | 153 |      |
| $T_S$     | Safety temperature                      |                                                                                                                                                 |     |     | 150 | °C   |

## 6.7 Insulation Specifications

| PARAMETER                                         |                                                      | TEST CONDITIONS                                                                                                                                                                              |           | VALUE             | UNIT            |
|---------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------|-----------------|
| GENERAL                                           |                                                      |                                                                                                                                                                                              |           |                   |                 |
| CLR                                               | External clearance <sup>(1)</sup>                    | Shortest terminal-to-terminal distance through air                                                                                                                                           | D package | 4                 | mm              |
| CPG                                               | External creepage <sup>(1)</sup>                     | Shortest terminal-to-terminal distance across the package surface                                                                                                                            | D package | 4                 | mm              |
| DTI                                               | Distance through the insulation                      | Minimum internal gap (internal clearance)                                                                                                                                                    |           | 0.008             | mm              |
| CTI                                               | Comparative tracking index                           | DIN EN 60112 (VDE 0303-11); IEC 60112                                                                                                                                                        |           | 400               | V               |
|                                                   | Material group                                       |                                                                                                                                                                                              |           | II                |                 |
|                                                   | Overvoltage category                                 | Rated mains voltage ≤ 150 V <sub>RMS</sub>                                                                                                                                                   |           | I-IV              |                 |
|                                                   |                                                      | Rated mains voltage ≤ 300 V <sub>RMS</sub>                                                                                                                                                   |           | I-III             |                 |
| DIN EN IEC 60747-17 (VDE 0884-17): <sup>(2)</sup> |                                                      |                                                                                                                                                                                              |           |                   |                 |
| V <sub>IORM</sub>                                 | Maximum repetitive peak isolation voltage            | AC voltage (bipolar)                                                                                                                                                                         |           | 560               | V <sub>PK</sub> |
| V <sub>IOTM</sub>                                 | Maximum transient isolation voltage                  | V <sub>TEST</sub> = V <sub>IOTM</sub> , t = 60 s (qualification);<br>V <sub>TEST</sub> = 1.2 x V <sub>IOTM</sub> , t= 1 s (100% production)                                                  |           | 4000              | V <sub>PK</sub> |
| q <sub>pd</sub>                                   | Apparent charge <sup>(3)</sup>                       | Method a: After I/O safety test subgroup 2/3.<br>V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 60 s;<br>V <sub>pd</sub> (m) = 1.2 × V <sub>IORM</sub> , t <sub>m</sub> = 10 s,   |           | 672               | V <sub>PK</sub> |
|                                                   |                                                      | Method a: After environmental tests subgroup 1,<br>V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 60 s;<br>V <sub>pd</sub> (m) = 1.3 × V <sub>IORM</sub> , t <sub>m</sub> = 10 s, |           | 896               |                 |
|                                                   |                                                      | Method b1: At routine test (100% production)<br>V <sub>ini</sub> = V <sub>IOTM</sub> , t <sub>ini</sub> = 1 s;<br>V <sub>pd</sub> (m) = 1.5 × V <sub>IORM</sub> , t <sub>m</sub> = 1 s,      |           | 1050              |                 |
| C <sub>IO</sub>                                   | Barrier capacitance, input to output <sup>(4)</sup>  | Vl = 0.4 sin (2 π ft), f = 1 MHz                                                                                                                                                             |           | 1                 | pF              |
| R <sub>IO</sub>                                   | Isolation resistance, input to output <sup>(4)</sup> | V <sub>IO</sub> = 500 V, T <sub>A</sub> = 25°C; all pins on each side of the barrier tied together, creating a two-terminal device                                                           |           | 10 <sup>12</sup>  | Ω               |
|                                                   |                                                      | V <sub>IO</sub> = 500 V, 100°C ≤ T <sub>A</sub> ≤ T <sub>A</sub> max                                                                                                                         |           | 10 <sup>11</sup>  |                 |
|                                                   |                                                      | V <sub>IO</sub> = 500 V at T <sub>S</sub> = 150°C                                                                                                                                            |           | > 10 <sup>9</sup> |                 |
|                                                   | Pollution degree                                     |                                                                                                                                                                                              |           | 2                 |                 |
|                                                   | Climatic category                                    |                                                                                                                                                                                              |           | 40/125/21         |                 |
| UL 1577                                           |                                                      |                                                                                                                                                                                              |           |                   |                 |
| V <sub>ISO</sub>                                  | Withstand isolation voltage                          | V <sub>TEST</sub> = V <sub>ISO</sub> = 2500 V <sub>RMS</sub> , t = 60 s (qualification); VTEST = 1.2 × V <sub>ISO</sub> = 3000 V <sub>RMS</sub> ; t = 1 s (100% production)                  |           | 2500              | VRMS            |

- (1) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.
- (2) This coupler is suitable for *basic electrical insulation* only within the maximum operating ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.
- (3) Apparent charge is electrical discharge caused by a partial discharge (pd).
- (4) All pins on each side of the barrier tied together creating a two-terminal device

## 6.8 Safety-Related Certifications

| VDE                                                            | CSA                                      | UL                                                                 |
|----------------------------------------------------------------|------------------------------------------|--------------------------------------------------------------------|
| Plan to certify according to DIN EN IEC 60747-17 (VDE 0884-17) | Plan to certify according to IEC 62368-1 | Plan to certify according to UL 1577 Component Recognition Program |
| Certificate planned                                            | Certificate planned                      | Certificate planned                                                |

## 6.9 Electrical Characteristics, 5 V, 3.3 V

$V_{CC1}$  at 5 V  $\pm$  10%,  $V_{CC2}$  at 3.3 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER    |                                                | TEST CONDITIONS                                                                             | MIN            | TYP | MAX | UNIT        |
|--------------|------------------------------------------------|---------------------------------------------------------------------------------------------|----------------|-----|-----|-------------|
| $I_{CC1}$    | $V_{CC1}$ supply current                       | Quiescent, $V_I = V_{CC}$ or 0 V, no load                                                   |                | 0.5 | 1   | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                                     |                | 2   | 4   |             |
| $I_{CC2}$    | $V_{CC2}$ supply current                       | ISO722 and ISO722M, Sleep mode, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at $V_{CC}$ |                |     | 150 | $\mu$ A     |
|              |                                                | Quiescent, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at 0 V or ISO721 and ISO721M     |                | 4   | 6.5 | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                                     |                | 5   | 7.5 |             |
| $V_{OH}$     | High-level output voltage                      | $I_{OH} = -4$ mA, See 图 7-1                                                                 | $V_{CC} - 0.4$ | 3   |     | V           |
|              |                                                | $I_{OH} = -20$ $\mu$ A, See 图 7-1                                                           | $V_{CC} - 0.1$ | 3.3 |     |             |
| $V_{OL}$     | Low-level output voltage                       | $I_{OL} = 4$ mA, See 图 7-1                                                                  |                | 0.2 | 0.4 | V           |
|              |                                                | $I_{OL} = 20$ $\mu$ A, See 图 7-1                                                            |                | 0   | 0.1 |             |
| $V_{I(HYS)}$ | Input voltage hysteresis                       |                                                                                             |                | 150 |     | mV          |
| $I_{IH}$     | High-level input current                       | $\overline{EN}$ , IN at 2 V                                                                 |                |     | 10  | $\mu$ A     |
| $I_{IL}$     | Low-level input current                        | $\overline{EN}$ , IN at 0.8 V                                                               | - 10           |     |     | $\mu$ A     |
| $I_{OZ}$     | High-impedance output current, ISO722, ISO722M | $\overline{EN}$ , IN at $V_{CC}$                                                            |                |     | 1   | $\mu$ A     |
| $C_I$        | Input capacitance to ground                    | IN at $V_{CC}$ , $V_I = 0.4 \sin(2\pi ft)$ , $f=2$ MHz                                      |                | 1   |     | pF          |
| CMTI         | Common-mode transient immunity                 | $V_I = V_{CC}$ or 0 V, See 图 7-5                                                            | 25             | 40  |     | kV/ $\mu$ s |

## 6.10 Electrical Characteristics, 5 V

$V_{CC1}$  and  $V_{CC2}$  at 5 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER    |                                                | TEST CONDITIONS                                                                             | MIN            | TYP | MAX | UNIT        |
|--------------|------------------------------------------------|---------------------------------------------------------------------------------------------|----------------|-----|-----|-------------|
| $I_{CC1}$    | $V_{CC1}$ supply current                       | Quiescent, $V_I = V_{CC}$ or 0 V, no load                                                   |                | 0.5 | 1   | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                                     |                | 2   | 4   |             |
| $I_{CC2}$    | $V_{CC2}$ supply current                       | ISO722 and ISO 722M Sleep Mode, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at $V_{CC}$ |                |     | 200 | $\mu$ A     |
|              |                                                | Quiescent, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at 0 V or ISO721 and ISO721M     |                | 8   | 12  | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                                     |                | 10  | 14  |             |
| $V_{OH}$     | High-level output voltage                      | $I_{OH} = -4$ mA, See 图 7-1                                                                 | $V_{CC} - 0.8$ | 4.6 |     | V           |
|              |                                                | $I_{OH} = -20$ $\mu$ A, See 图 7-1                                                           | $V_{CC} - 0.1$ | 5   |     |             |
| $V_{OL}$     | Low-level output voltage                       | $I_{OL} = 4$ mA, See 图 7-1                                                                  |                | 0.2 | 0.4 | V           |
|              |                                                | $I_{OL} = 20$ $\mu$ A, See 图 7-1                                                            |                | 0   | 0.1 |             |
| $V_{I(HYS)}$ | Input voltage hysteresis                       |                                                                                             |                | 150 |     | mV          |
| $I_{IH}$     | High-level input current                       | $\overline{EN}$ , IN at 2 V                                                                 |                |     | 10  | $\mu$ A     |
| $I_{IL}$     | Low-level input current                        | $\overline{EN}$ , IN at 0.8 V                                                               | - 10           |     |     |             |
| $I_{OZ}$     | High-impedance output current, ISO722, ISO722M | $\overline{EN}$ , IN at $V_{CC}$                                                            |                |     | 1   | $\mu$ A     |
| $C_I$        | Input capacitance to ground                    | IN at $V_{CC}$ , $V_I = 0.4 \sin(2\pi ft)$ , $f=2$ MHz                                      |                | 1   |     | pF          |
| CMTI         | Common-mode transient immunity                 | $V_I = V_{CC}$ or 0 V, See 图 7-5                                                            | 25             | 50  |     | kV/ $\mu$ s |



## 6.11 Switching Characteristics, 3.3 V, 5 V

$V_{CC1}$  at 3.3 V  $\pm$  10%,  $V_{CC2}$  at 5 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER                          |                                                                   |                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|------------------------------------|-------------------------------------------------------------------|-------------------|------------------------------------------------------------|-----|-----|-----|------|
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72x            | EN at 0 V,<br>See 图 7-1                                    | 12  | 17  | 30  | ns   |
| t <sub>PHL</sub>                   | Propagation delay , high-to-low-level output                      |                   |                                                            | 12  | 17  | 30  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            | 0.5 |     | 2   | ns   |
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72xM           |                                                            | 10  | 12  | 21  | ns   |
| t <sub>PHL</sub>                   | Propagation delay, high-to-low-level output                       |                   |                                                            | 10  | 12  | 21  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            | 0.5 |     | 1   | ns   |
| t <sub>sk(pp)</sub> <sup>(1)</sup> | Part-to-part skew                                                 |                   |                                                            | 0   |     | 5   | ns   |
| t <sub>r</sub>                     | Output signal rise time                                           |                   | EN at 0 V,<br>See 图 7-1                                    | 2.3 |     |     | ns   |
| t <sub>f</sub>                     | Output signal fall time                                           |                   |                                                            | 2.3 |     |     | ns   |
| t <sub>pHZ</sub>                   | Sleep-mode propagation delay, high-level-to-high-impedance output | ISO722<br>ISO722M | See 图 7-2                                                  | 5.4 | 9   | 15  | ns   |
| t <sub>pZH</sub>                   | Sleep-mode propagation delay, high-impedance-to-high-level output |                   |                                                            | 4.5 | 5   | 15  | μ s  |
| t <sub>pLZ</sub>                   | Sleep-mode propagation delay, low-level-to-high-impedance output  |                   | See 图 7-3                                                  | 5.4 | 9   | 15  | ns   |
| t <sub>pZL</sub>                   | Sleep-mode propagation delay, high-impedance-to-low-level output  |                   |                                                            | 4.5 | 5   | 15  | μ s  |
| t <sub>fs</sub>                    | Failsafe output delay time from input power loss                  |                   | See 图 7-4                                                  | 3   |     |     | μ s  |
| t <sub>jit(pp)</sub>               | Peak-to-peak eye-pattern jitter                                   | ISO72x            | 100-Mbps NRZ data input, See 图 7-6                         | 2   |     | ns  |      |
|                                    |                                                                   |                   | 100-Mbps unrestricted bit run length data input, See 图 7-6 | 3   |     |     |      |
|                                    |                                                                   | ISO72xM           | 150-Mbps NRZ data input, See 图 7-6                         | 1   |     |     |      |
|                                    |                                                                   |                   | 150-Mbps unrestricted bit run length data input, See 图 7-6 | 2   |     |     |      |

(1)  $t_{sk(pp)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## 6.12 Electrical Characteristics, 3.3 V, 5 V

$V_{CC1}$  at 3.3 V  $\pm$  10%,  $V_{CC2}$  at 5 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER    |                                                | TEST CONDITIONS                                                                             | MIN            | TYP | MAX | UNIT        |
|--------------|------------------------------------------------|---------------------------------------------------------------------------------------------|----------------|-----|-----|-------------|
| $I_{CC1}$    | $V_{CC1}$ supply current                       | Quiescent, $V_I = V_{CC}$ or 0 V, no load                                                   |                | 0.3 | 0.6 | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                                     |                | 1   | 2   |             |
| $I_{CC2}$    | $V_{CC2}$ supply current                       | ISO722 and ISO722M, Sleep mode, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at $V_{CC}$ |                |     | 200 | $\mu$ A     |
|              |                                                | Quiescent, $V_I = V_{CC}$ or 0 V, No load, $\overline{EN}$ at 0 V or ISO721 and ISO721M     |                | 8   | 12  | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, No load                                                     |                | 10  | 14  |             |
| $V_{OH}$     | High-level output voltage                      | $I_{OH} = -4$ mA, See 图 7-1                                                                 | $V_{CC} - 0.8$ | 4.6 |     | V           |
|              |                                                | $I_{OH} = -20$ $\mu$ A, See 图 7-1                                                           | $V_{CC} - 0.1$ | 5   |     |             |
| $V_{OL}$     | Low-level output voltage                       | $I_{OL} = 4$ mA, See 图 7-1                                                                  |                | 0.2 | 0.4 | V           |
|              |                                                | $I_{OL} = 20$ $\mu$ A, See 图 7-1                                                            |                | 0   | 0.1 |             |
| $V_{I(HYS)}$ | Input voltage hysteresis                       |                                                                                             |                | 150 |     | mV          |
| $I_{IH}$     | High-level input current                       | $\overline{EN}$ , IN at 2 V                                                                 |                |     | 10  | $\mu$ A     |
| $I_{IL}$     | Low-level input current                        | $\overline{EN}$ , IN at 0.8 V                                                               | - 10           |     |     | $\mu$ A     |
| $I_{OZ}$     | High-impedance output current, ISO722, ISO722M | $\overline{EN}$ , IN at $V_{CC}$                                                            |                |     | 1   | $\mu$ A     |
| $C_I$        | Input capacitance to ground                    | IN at $V_{CC}$ , $V_I = 0.4 \sin(2\pi ft)$ , $f=2$ MHz                                      |                | 1   |     | pF          |
| CMTI         | Common-mode transient immunity                 | $V_I = V_{CC}$ or 0 V, See 图 7-5                                                            | 25             | 40  |     | kV/ $\mu$ s |

## 6.13 Electrical Characteristics, 3.3 V

$V_{CC1}$  and  $V_{CC2}$  at 3.3 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER    |                                                | TEST CONDITIONS                                                               | MIN            | TYP | MAX | UNIT        |
|--------------|------------------------------------------------|-------------------------------------------------------------------------------|----------------|-----|-----|-------------|
| $I_{CC1}$    | $V_{CC1}$ supply current                       | Quiescent, $V_I = V_{CC}$ or 0 V, no load                                     |                | 0.3 | 0.6 | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                       |                | 1   | 2   |             |
| $I_{CC2}$    | $V_{CC2}$ supply current                       | ISO722 and ISO722M Sleep Mode, $V_I = V_{CC}$ or 0 V, No load, EN at $V_{CC}$ |                |     | 150 | $\mu$ A     |
|              |                                                | Quiescent, $V_I = V_{CC}$ or 0 V, No load, EN at 0 V or ISO721 and ISO721M    |                | 4   | 6.5 | mA          |
|              |                                                | 25 Mbps, $V_I = V_{CC}$ or 0 V, no load                                       |                | 5   | 7.5 |             |
| $V_{OH}$     | High-level output voltage                      | $I_{OH} = -4$ mA, See 图 7-1                                                   | $V_{CC} - 0.4$ | 3   |     | V           |
|              |                                                | $I_{OH} = -20$ $\mu$ A, See 图 7-1                                             | $V_{CC} - 0.1$ | 3.3 |     |             |
| $V_{OL}$     | Low-level output voltage                       | $I_{OL} = 4$ mA, See 图 7-1                                                    |                | 0.2 | 0.4 | V           |
|              |                                                | $I_{OL} = 20$ $\mu$ A, See 图 7-1                                              |                | 0   | 0.1 |             |
| $V_{I(HYS)}$ | Input voltage hysteresis                       |                                                                               |                | 150 |     | mV          |
| $I_{IH}$     | High-level input current                       | EN, IN at 2 V                                                                 |                |     | 10  | $\mu$ A     |
| $I_{IL}$     | Low-level input current                        | EN, IN at 0.8 V                                                               | - 10           |     |     | $\mu$ A     |
| $I_{OZ}$     | High-impedance output current, ISO722, ISO722M | EN, IN at $V_{CC}$                                                            |                |     | 1   | $\mu$ A     |
| $C_I$        | Input capacitance to ground                    | IN at VCC, $V_I = 0.4 \sin(2\pi ft)$ , $f=2$ MHz                              |                | 1   |     | pF          |
| CMTI         | Common-mode transient immunity                 | $V_I = V_{CC}$ or 0 V, See 图 7-5                                              | 25             | 40  |     | kV/ $\mu$ s |

## 6.14 Switching Characteristics, 3.3 V

$V_{CC1}$  and  $V_{CC2}$  at 3.3 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER                          |                                                                   |                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|------------------------------------|-------------------------------------------------------------------|-------------------|------------------------------------------------------------|-----|-----|-----|------|
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72x            | EN at 0 V,<br>See 图 7-1                                    | 12  | 20  | 34  | ns   |
| t <sub>PHL</sub>                   | Propagation delay , high-to-low-level output                      |                   |                                                            | 12  | 20  | 34  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 3   | ns   |
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72xM           |                                                            | 10  | 12  | 25  | ns   |
| t <sub>PHL</sub>                   | Propagation delay, high-to-low-level output                       |                   |                                                            | 10  | 12  | 25  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 1   | ns   |
| t <sub>sk(pp)</sub> <sup>(1)</sup> | Part-to-part skew                                                 |                   |                                                            |     | 0   | 5   | ns   |
| t <sub>r</sub>                     | Output signal rise time                                           |                   | EN at 0 V,                                                 |     | 2.3 |     | ns   |
| t <sub>f</sub>                     | Output signal fall time                                           |                   | See 图 7-1                                                  |     | 2.3 |     |      |
| t <sub>pHZ</sub>                   | Sleep-mode propagation delay, high-level-to-high-impedance output | ISO722<br>ISO722M | See 图 7-2                                                  | 7   | 13  | 25  | ns   |
| t <sub>pZH</sub>                   | Sleep-mode propagation delay, high-impedance-to-high-level output |                   |                                                            | 5   | 6   | 15  | μs   |
| t <sub>pLZ</sub>                   | Sleep-mode propagation delay, low-level-to-high-impedance output  |                   | See 图 7-3                                                  | 7   | 13  | 25  | ns   |
| t <sub>pZL</sub>                   | Sleep-mode propagation delay, high-impedance-to-low-level output  |                   |                                                            | 5   | 6   | 15  | μ s  |
| t <sub>fs</sub>                    | Failsafe output delay time from input power loss                  |                   | See 图 7-4                                                  |     | 3   |     | μ s  |
| t <sub>jit(pp)</sub>               | Peak-to-peak eye-pattern jitter                                   | ISO72x            | 100-Mbps NRZ data input, See 图 7-6                         |     | 2   |     | ns   |
|                                    |                                                                   |                   | 100-Mbps unrestricted bit run length data input, See 图 7-6 |     | 3   |     |      |
|                                    |                                                                   | ISO72xM           | 150-Mbps NRZ data input, See 图 7-6                         |     | 1   |     |      |
|                                    |                                                                   |                   | 150-Mbps unrestricted bit run length data input, See 图 7-6 |     | 2   |     |      |

(1)  $t_{sk(pp)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## 6.15 Switching Characteristics, 5 V, 3.3 V

$V_{CC1}$  at 5 V  $\pm$  10%,  $V_{CC2}$  at 3.3 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER                          |                                                                   |                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|------------------------------------|-------------------------------------------------------------------|-------------------|------------------------------------------------------------|-----|-----|-----|------|
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72x            | EN at 0 V,<br>See 图 7-1                                    | 10  | 19  | 30  | ns   |
| t <sub>PHL</sub>                   | Propagation delay , high-to-low-level output                      |                   |                                                            | 10  | 19  | 30  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 3   | ns   |
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72xM           |                                                            | 10  | 12  | 20  | ns   |
| t <sub>PHL</sub>                   | Propagation delay, high-to-low-level output                       |                   |                                                            | 10  | 12  | 20  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 1   | ns   |
| t <sub>sk(pp)</sub> <sup>(1)</sup> | Part-to-part skew                                                 |                   |                                                            |     | 0   | 5   | ns   |
| t <sub>r</sub>                     | Output signal rise time                                           |                   | EN at 0 V,<br>See 图 7-1                                    |     | 2.3 |     | ns   |
| t <sub>f</sub>                     | Output signal fall time                                           |                   |                                                            |     | 2.3 |     | ns   |
| t <sub>pHZ</sub>                   | Sleep-mode propagation delay, high-level-to-high-impedance output | ISO722<br>ISO722M | See 图 7-2                                                  | 7   | 11  | 25  | ns   |
| t <sub>pZH</sub>                   | Sleep-mode propagation delay, high-impedance-to-high-level output |                   |                                                            | 4.5 | 6   | 15  | μ s  |
| t <sub>pLZ</sub>                   | Sleep-mode propagation delay, low-level-to-high-impedance output  |                   | See 图 7-3                                                  | 7   | 13  | 25  | ns   |
| t <sub>pZL</sub>                   | Sleep-mode propagation delay, high-impedance-to-low-level output  |                   |                                                            | 4.5 | 6   | 15  | μ s  |
| t <sub>fs</sub>                    | Failsafe output delay time from input power loss                  |                   | See 图 7-4                                                  |     | 3   |     | μ s  |
| t <sub>jit(pp)</sub>               | Peak-to-peak eye-pattern jitter                                   | ISO72x            | 100-Mbps NRZ data input, See 图 7-6                         |     | 2   |     | ns   |
|                                    |                                                                   |                   | 100-Mbps unrestricted bit run length data input, See 图 7-6 |     | 3   |     |      |
|                                    |                                                                   | ISO72xM           | 150-Mbps NRZ data input, See 图 7-6                         |     | 1   |     |      |
|                                    |                                                                   |                   | 150-Mbps unrestricted bit run length data input, See 图 7-6 |     | 2   |     |      |

(1)  $t_{sk(PP)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## 6.16 Switching Characteristics, 5 V

$V_{CC1}$  and  $V_{CC2}$  at 5 V  $\pm$  10% (over recommended operating conditions unless otherwise noted.)

| PARAMETER                          |                                                                   |                   | TEST CONDITIONS                                            | MIN | TYP | MAX | UNIT |
|------------------------------------|-------------------------------------------------------------------|-------------------|------------------------------------------------------------|-----|-----|-----|------|
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72x            | EN at 0 V,<br>See 图 7-1                                    | 10  | 17  | 24  | ns   |
| t <sub>PHL</sub>                   | Propagation delay, high-to-low-level output                       |                   |                                                            | 10  | 17  | 24  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 2   | ns   |
| t <sub>PLH</sub>                   | Propagation delay, low-to-high-level output                       | ISO72xM           |                                                            | 8   | 10  | 16  | ns   |
| t <sub>PHL</sub>                   | Propagation delay, high-to-low-level output                       |                   |                                                            | 8   | 10  | 16  | ns   |
| t <sub>sk(p)</sub>                 | Pulse skew  t <sub>PHL</sub> - t <sub>PLH</sub>                   |                   |                                                            |     | 0.5 | 1   | ns   |
| t <sub>sk(pp)</sub> <sup>(1)</sup> | Part-to-part skew                                                 |                   |                                                            |     | 0   | 3   | ns   |
| t <sub>r</sub>                     | Output signal rise time                                           |                   | EN at 0 V,<br>See 图 7-1                                    | 2.3 |     |     | ns   |
| t <sub>f</sub>                     | Output signal fall time                                           |                   |                                                            | 2.3 |     |     |      |
| t <sub>pHZ</sub>                   | Sleep-mode propagation delay, high-level-to-high-impedance output | ISO722<br>ISO722M | See 图 7-2                                                  | 6   | 8   | 15  | ns   |
| t <sub>pZH</sub>                   | Sleep-mode propagation delay, high-impedance-to-high-level output |                   |                                                            | 3.5 | 4   | 15  | μ s  |
| t <sub>pLZ</sub>                   | Sleep-mode propagation delay, low-level-to-high-impedance output  |                   | See 图 7-3                                                  | 5.5 | 8   | 15  | ns   |
| t <sub>pZL</sub>                   | Sleep-mode propagation delay, high-impedance-to-low-level output  |                   |                                                            | 4   | 5   | 15  | μ s  |
| t <sub>fs</sub>                    | Failsafe output delay time from input power loss                  |                   | See 图 7-4                                                  | 3   |     |     | μ s  |
| t <sub>jit(PP)</sub>               | Peak-to-peak eye-pattern jitter                                   | ISO72x            | 100-Mbps NRZ data input, See 图 7-6                         | 2   |     |     | ns   |
|                                    |                                                                   |                   | 100-Mbps unrestricted bit run length data input, See 图 7-6 | 3   |     |     |      |
|                                    |                                                                   | ISO72xM           | 150-Mbps NRZ data input, See 图 7-6                         | 1   |     |     |      |
|                                    |                                                                   |                   | 150-Mbps unrestricted bit run length data input, See 图 7-6 | 2   |     |     |      |

(1)  $t_{sk(PP)}$  is the magnitude of the difference in propagation delay times between any specified terminals of two devices when both devices operate with the same supply voltages, at the same temperature, and have identical packages and test circuits.

## 6.17 Typical Characteristics

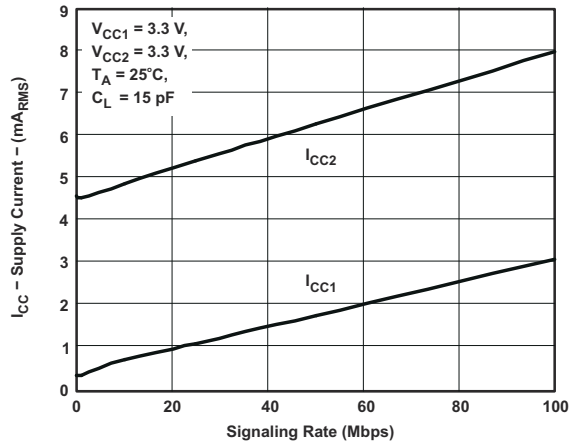


图 6-1. RMS Supply Current vs Signaling Rate

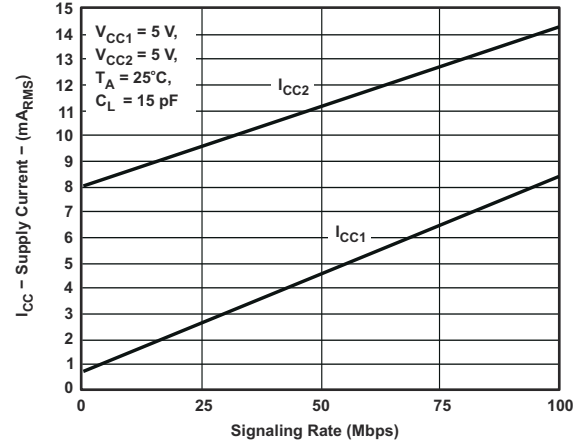


图 6-2. RMS Supply Current vs Signaling Rate

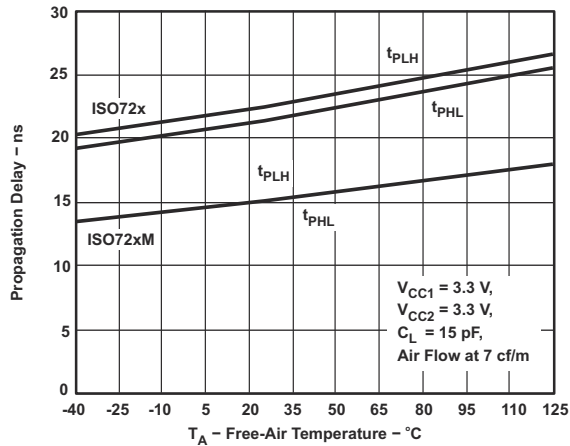


图 6-3. Propagation Delay vs Free-Air Temperature

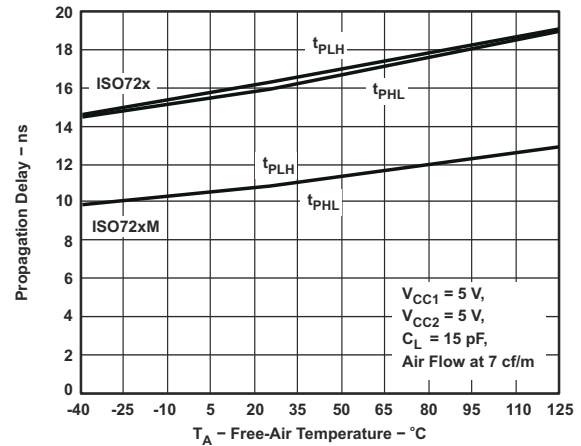


图 6-4. Propagation Delay vs Free-Air Temperature

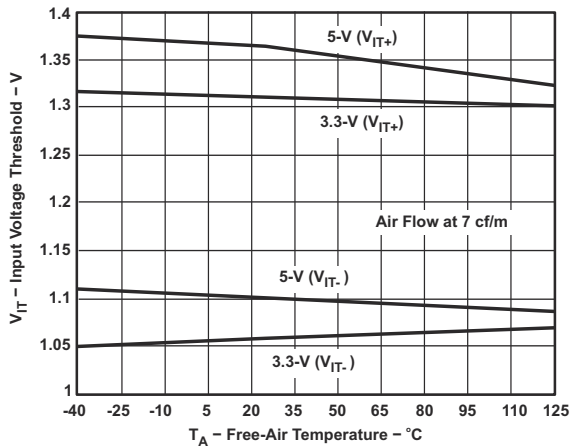


图 6-5. ISO72x Input Threshold Voltage vs Free-Air Temperature

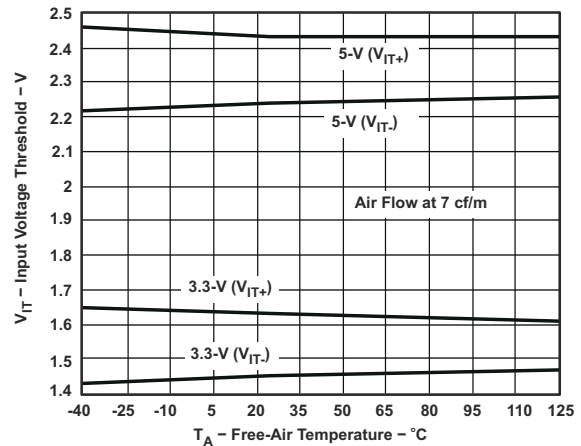


图 6-6. ISO72xM Input Threshold Voltage vs Free-Air Temperature

## 6.17 Typical Characteristics (continued)

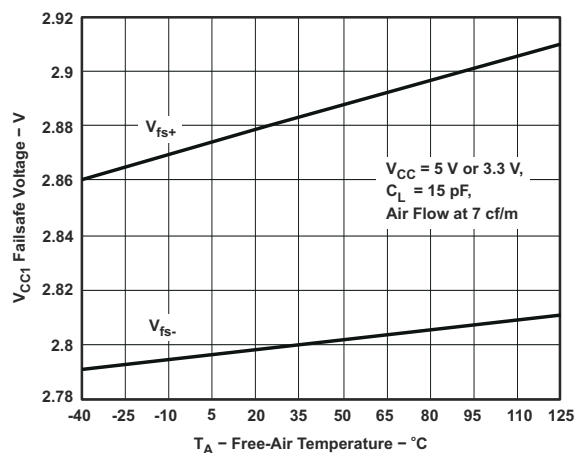
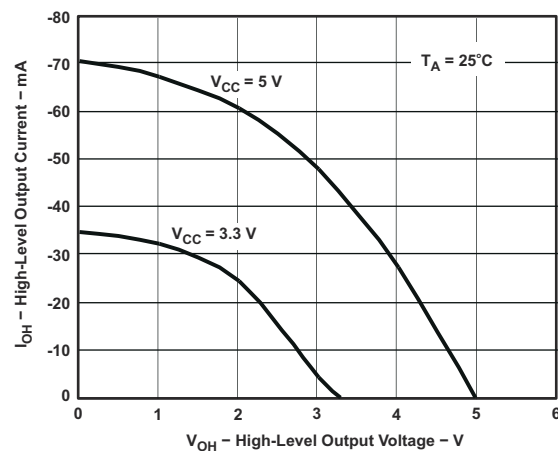
图 6-7. V<sub>CC1</sub> Failsafe Threshold Voltage vs Free-Air Temperature

图 6-8. High-Level Output Current vs High-Level Output Voltage

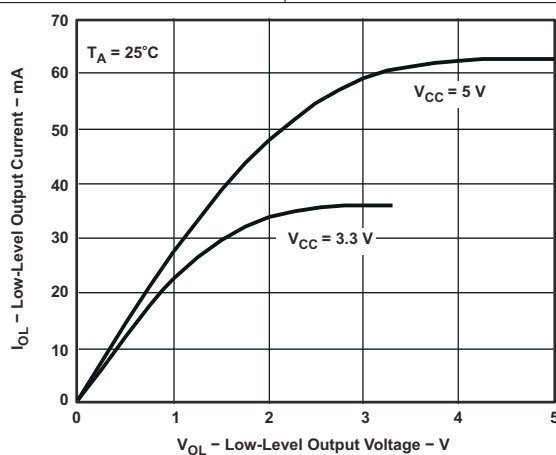


图 6-9. Low-Level Output Current vs Low-Level Output Voltage



## 7 Parameter Measurement Information

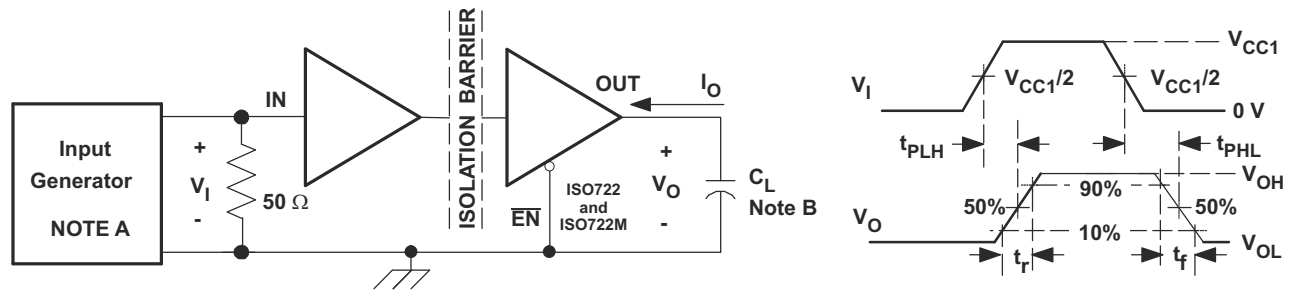


图 7-1. Switching Characteristic Test Circuit and Voltage Waveforms

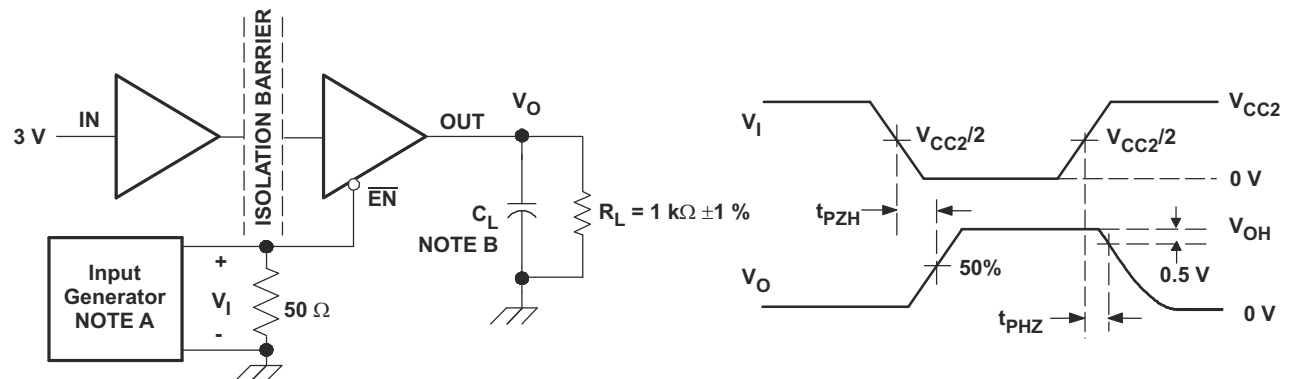


图 7-2. ISO722 Sleep-Mode High-Level Output Test Circuit and Voltage Waveforms

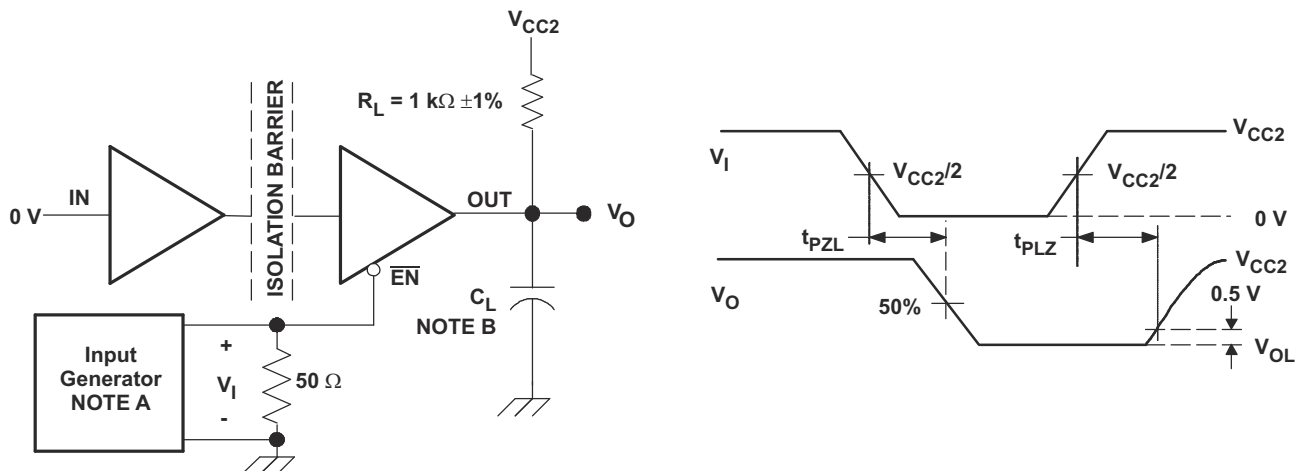


图 7-3. ISO722 Sleep-Mode Low-Level Output Test Circuit and Voltage Waveforms

### 备注

A: The input pulse is supplied by a generator having the following characteristics:

PRR  $\leq$  50 kHz, 50% duty cycle,  $t_r \leq 3$  ns,  $t_f \leq 3$  ns,  $Z_O = 50 \Omega$ .

B:  $C_L = 15$  pF  $\pm$  20% and includes instrumentation and fixture capacitance.

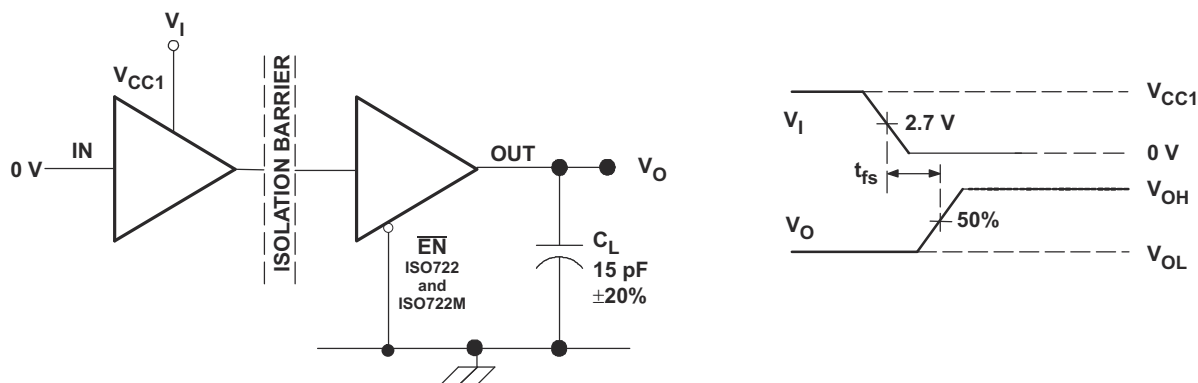


图 7-4. Failsafe Delay Time Test Circuit and Voltage Waveforms


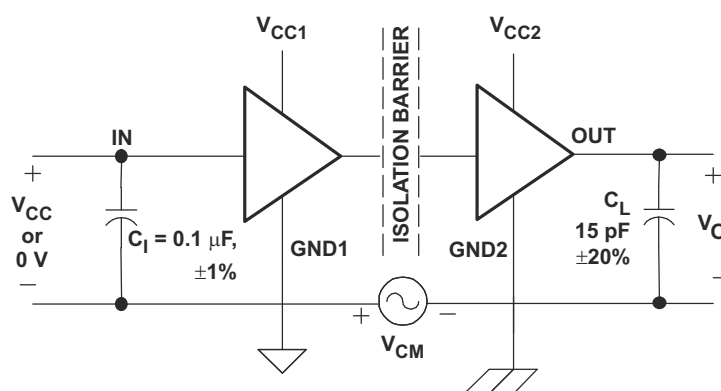


图 7-5. Common-Mode Transient-Immunity Test Circuit and Voltage Waveform

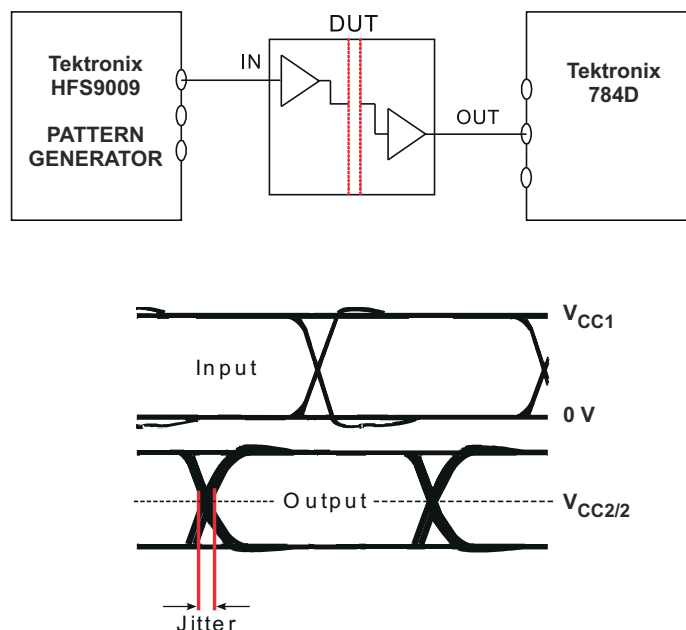

NOTE: Bit pattern run length is  $2^{16} - 1$ . Transition time is 800 ps. NRZ data input has no more than five consecutive 1s or 0s.


**图 7-6. Peak-to-Peak Eye-Pattern Jitter Test Circuit and Voltage Waveform**

## 8 Detailed Description

### 8.1 Overview

The ISO72x family of devices transmit digital data across a silicon dioxide based isolation barrier. The digital input signal (IN) of the device is sampled by a transmitter and at every data edge the transmitter sends a corresponding differential signal across the isolation barrier. When the input signal is static, the refresh logic periodically sends the necessary differential signal from the transmitter. On the other side of the isolation barrier, the receiver converts the differential signal into a single-ended signal which is output on the OUT pin through a buffer. If the receiver does not receive a data or refresh signal, the timeout logic detects the loss of signal or power from the input side and drives the output to the default level.

### 8.2 Functional Block Diagram

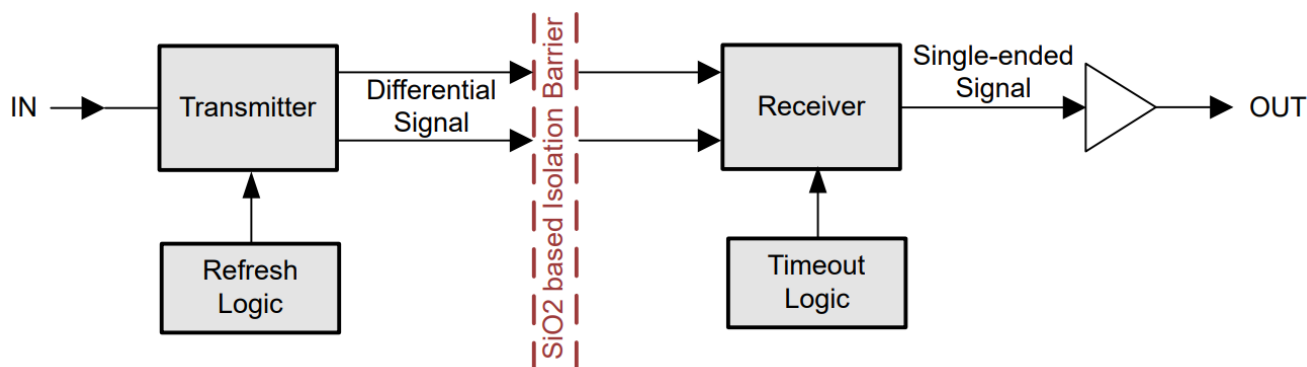

### 8.3 Device Functional Modes

表 8-1 和 表 8-2 list the functional modes for the ISO72x family of devices.

表 8-1. ISO721 Functional Table

| $V_{CC1}$ | $V_{CC2}$ | INPUT (IN) | OUTPUT (OUT) |
|-----------|-----------|------------|--------------|
| PU        | PU        | H          | H            |
|           |           | L          | L            |
|           |           | Open       | H            |
| PD        | PU        | X          | H            |
| X         | PD        | X          | Undetermined |

表 8-2. ISO722 Functional Table

| $V_{CC1}$ | $V_{CC2}$ | INPUT (IN) | OUTPUT ENABLE (EN) | OUTPUT (OUT) |
|-----------|-----------|------------|--------------------|--------------|
| PU        | PU        | H          | L or open          | H            |
|           |           | L          | L or open          | L            |
|           |           | X          | H                  | Z            |
|           |           | Open       | L or open          | H            |
| PD        | PU        | X          | L or open          | H            |
| PD        | PU        | X          | H                  | Z            |
| X         | PD        | X          | X                  | Undetermined |

#### 8.3.1 Device I/O Schematic

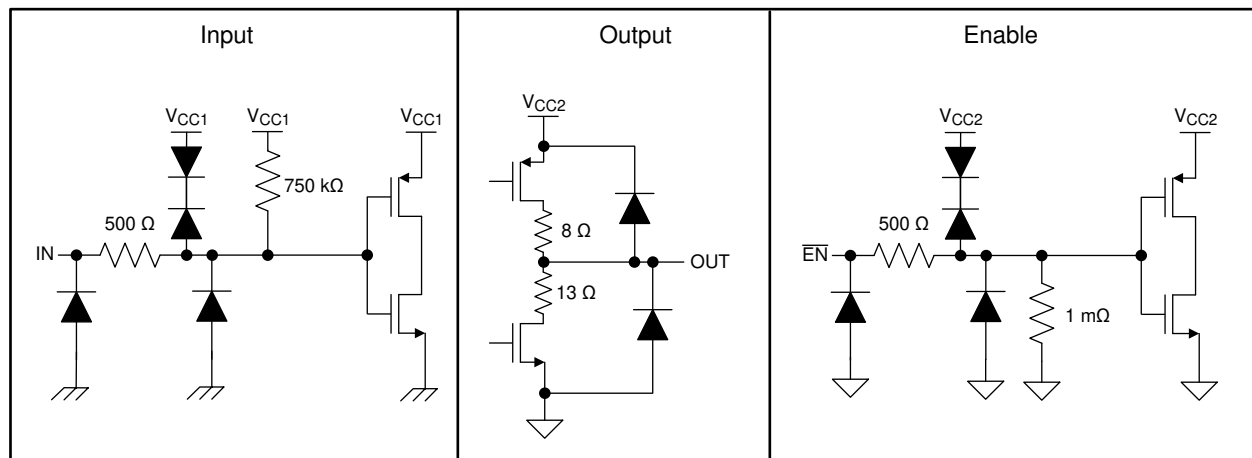


图 8-1. Equivalent Input and Output Schematic Diagrams

## 9 Application and Implementation

### 备注


以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 9.1 Application Information

The ISO72x devices use single-ended TTL or CMOS-logic-switching technology. The supply voltage range of the devices is from 3 V to 5.5 V for both supplies,  $V_{CC1}$  and  $V_{CC2}$ . When designing with digital isolators, because the single-ended design structure, digital isolators do not conform to any specific interface standard and are only intended for isolating single-ended CMOS or TTL digital signal lines. The isolator is typically placed between the data controller ( $\mu C$  or UART), and a data converter or a line transceiver, regardless of the interface type or standard.

### 9.2 Typical Application

The ISO721 device can be used with Texas Instruments' microcontroller, CAN transceiver, transformer driver, and low-dropout voltage regulator to create an Isolated CAN Interface as shown in 图 9-1.

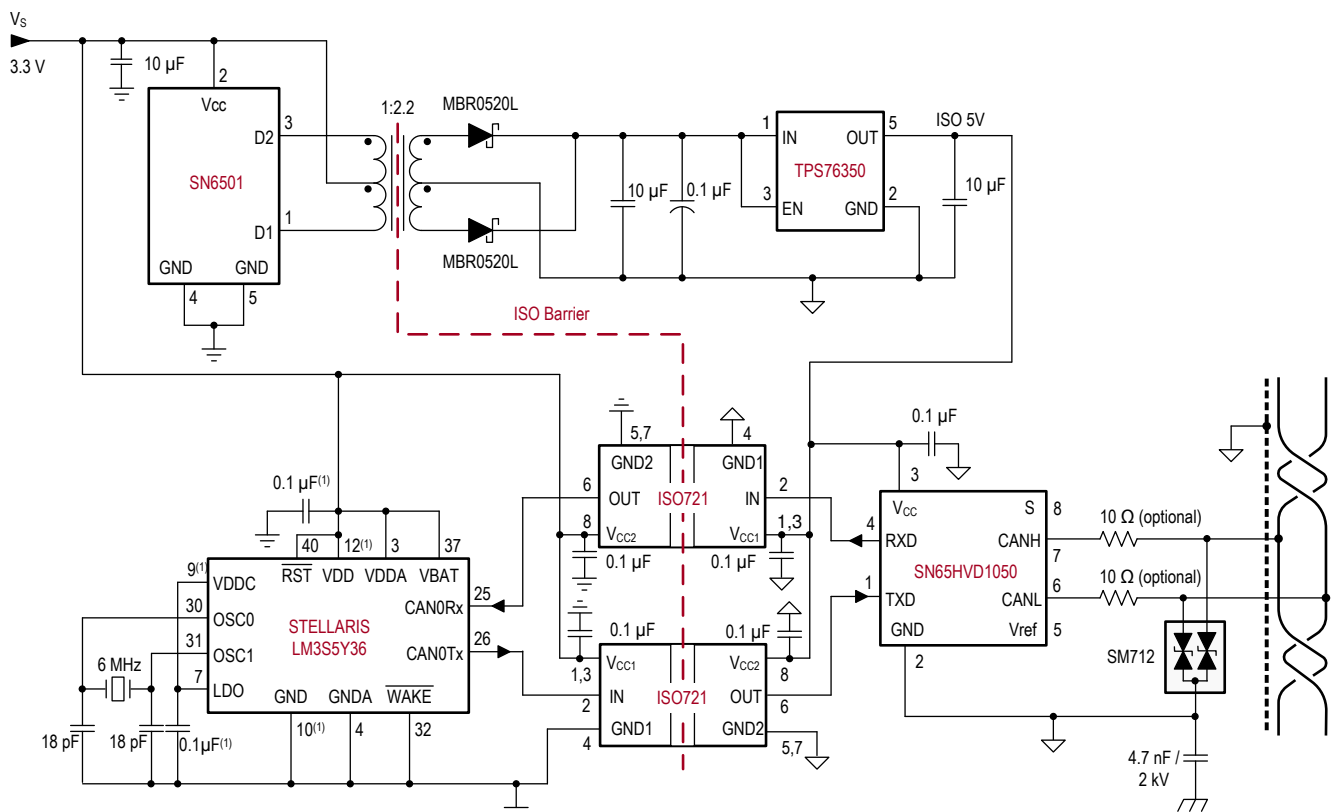

Copyright © 2016, Texas Instruments Incorporated

A. Multiple pins and capacitors omitted for clarity purpose.

图 9-1. Isolated CAN Interface

### 9.2.1 Design Requirements

Unlike optocouplers, which require external components to improve performance, provide bias, or limit current, the ISO72x devices only require two external bypass capacitors to operate.

### 9.2.2 Detailed Design Procedure

图 9-2 shows a typical circuit hook-up for the ISO721 device.

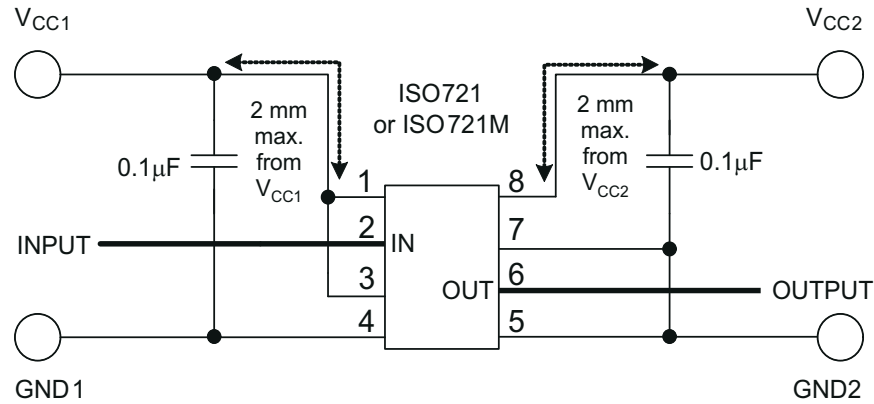


图 9-2. Typical ISO721 Circuit Hook-up

The ISO72x isolators have the same functional pinout as those of most other vendors as shown in 图 9-3, and are often pin-for-pin drop-in replacements. The notable differences in the products are propagation delay, signaling rate, power consumption, and transient protection rating. 表 9-1 is used as a guide for replacing other isolators with the ISO72x family of single-channel isolators.

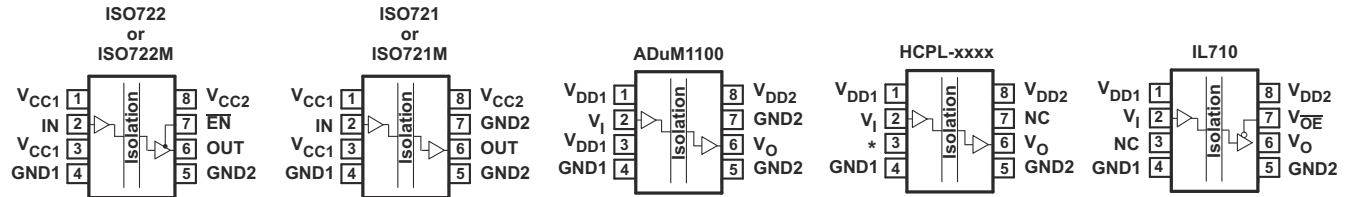


图 9-3. Pin Cross Reference

表 9-1. Cross Reference

| ISOLATOR                    | PIN 1            | PIN 2          | PIN 3                      | PIN 4 | PIN 5 | PIN 6          | PIN 7             |                   | PIN 8            |
|-----------------------------|------------------|----------------|----------------------------|-------|-------|----------------|-------------------|-------------------|------------------|
|                             |                  |                |                            |       |       |                | ISO721 OR ISO721M | ISO722 OR ISO722M |                  |
| ISO721 <sup>(1) (2)</sup>   | V <sub>CC1</sub> | IN             | V <sub>CC1</sub>           | GND1  | GND2  | OUT            | GND2              | EN                | V <sub>CC2</sub> |
| ADuM1100 <sup>(1) (2)</sup> | V <sub>DD1</sub> | V <sub>I</sub> | V <sub>DD1</sub>           | GND1  | GND2  | V <sub>O</sub> | GND2              |                   | V <sub>DD2</sub> |
| HCPL-xxxx                   | V <sub>DD1</sub> | V <sub>I</sub> | *Leave Open <sup>(3)</sup> | GND1  | GND2  | V <sub>O</sub> | NC <sup>(5)</sup> |                   | V <sub>DD2</sub> |
| IL710                       | V <sub>DD1</sub> | V <sub>I</sub> | NC <sup>(4)</sup>          | GND1  | GND2  | V <sub>O</sub> | V <sub>OE</sub>   |                   | V <sub>DD2</sub> |

- (1) Pin 1 must be used as V<sub>CC1</sub>. Pin 3 can also be used as V<sub>CC1</sub> or left open, as long as pin 1 is connected to V<sub>CC1</sub>.
- (2) Pin 5 must be used as GND2. Pin 7 can also be used as GND2 or left open, as long as pin 5 is connected to GND2.
- (3) Pin 3 of the HCPL devices must be left open. This is not a problem when substituting an ISO72x device, because the extra V<sub>CC1</sub> on pin 3 can be left an open circuit as well.
- (4) Pin 3 of the IL710 must not be tied to ground on the circuit board because this shorts the ISO72x V<sub>CC1</sub> to ground. The IL710 pin 3 can only be tied to V<sub>CC</sub> or left open to drop in an ISO72x device.
- (5) An HCPL device pin 7 must be left floating (open) or grounded when an ISO722 or ISO722M device is to be used as a drop-in replacement. If pin 7 of the ISO722 or ISO722M device is placed in a high logic state, the output of the device is disabled.

### 9.2.3 Application Curves

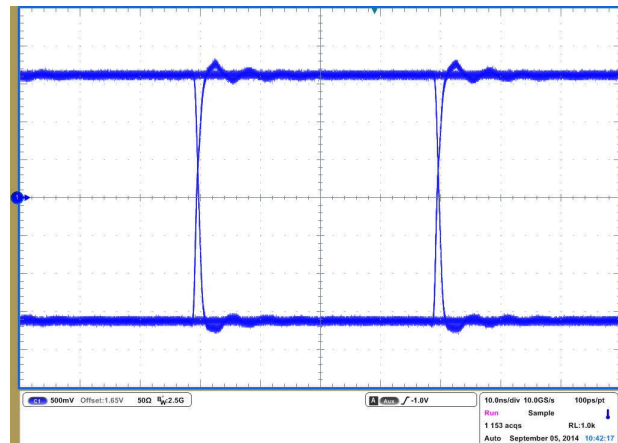


图 9-4. ISO721M Eye Diagram at 25 Mbps, 3.3 V, and 25°C

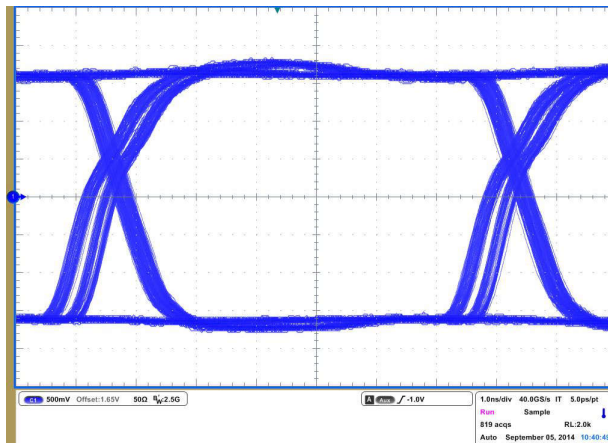


图 9-5. ISO721M Eye Diagram at 150 Mbps, 3.3 V, and 25°C

#### 9.2.3.1 Insulation Characteristics Curves

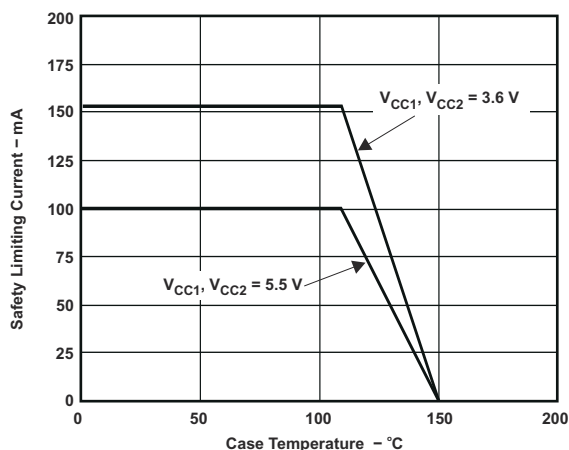


图 9-6. Thermal Derating Curve for Limiting Current per VDE

#### 9.2.3.2 Insulation Lifetime

At maximum working voltage, the isolation barrier of the ISO72x and ISO72xM family of devices has more than 28 years of life.



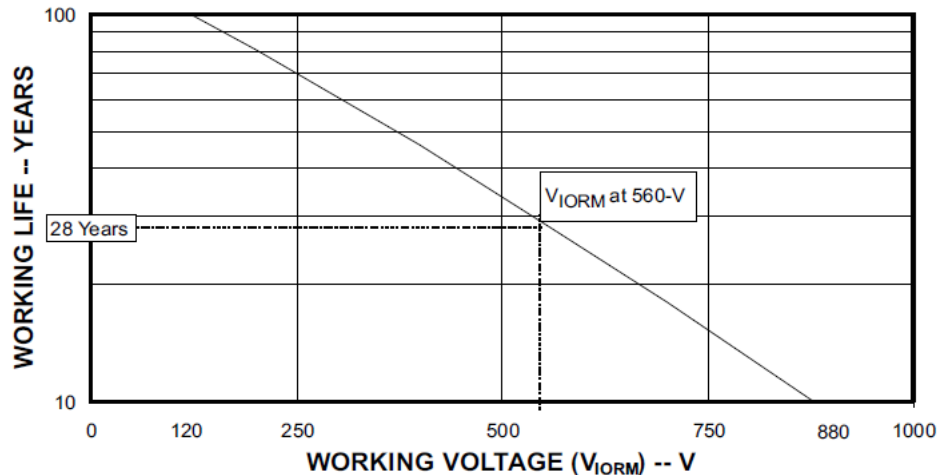


图 9-7. Insulation Lifetime Projection

### 9.3 Power Supply Recommendations

To help provide reliable operation at data rates and supply voltages, a 0.1- $\mu$ F bypass capacitor must be placed at input and output supply pins ( $V_{CC1}$  and  $V_{CC2}$ ). The capacitors must be placed as close to the supply pins as possible. If only a single primary-side power supply is available in an application, isolated power can be generated for the secondary-side with the help of a transformer driver such as Texas Instruments [SN6501](#) device. For such applications, detailed power supply design and transformer selection recommendations are available in the [SN6501 Transformer Driver for Isolated Power Supplies data sheet](#).

### 9.4 Layout

#### 9.4.1 Layout Guidelines

A minimum of four layers is required to accomplish a low EMI PCB design (see 图 9-8). Layer stacking must be in the following order (top-to-bottom): high-speed signal layer, ground plane, power plane and low-frequency signal layer.

- Routing the high-speed traces on the top layer avoids the use of vias (and the introduction of the inductances) and allows for clean interconnects between the isolator and the transmitter and receiver circuits of the data link.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100 pF/in<sup>2</sup>.
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links usually have margin to tolerate discontinuities such as vias.

If an additional supply voltage plane or signal layer is needed, add a second power or ground plane system to the stack to keep the planes symmetrical. This makes the stack mechanically stable and prevents warping. Also the power and ground plane of each power system can be placed closer together, thus increasing the high-frequency bypass capacitance significantly.

For detailed layout recommendations, refer to the [Digital Isolator Design Guide](#).

##### 9.4.1.1 PCB Material

For digital circuit boards operating at less than 150 Mbps, (or rise and fall times greater than 1 ns), and trace lengths of up to 10 inches, use standard FR-4 UL94V-0 printed circuit board. This PCB is preferred over cheaper

alternatives because of lower dielectric losses at high frequencies, less moisture absorption, greater strength and stiffness, and the self-extinguishing flammability-characteristics.

#### 9.4.2 Layout Example

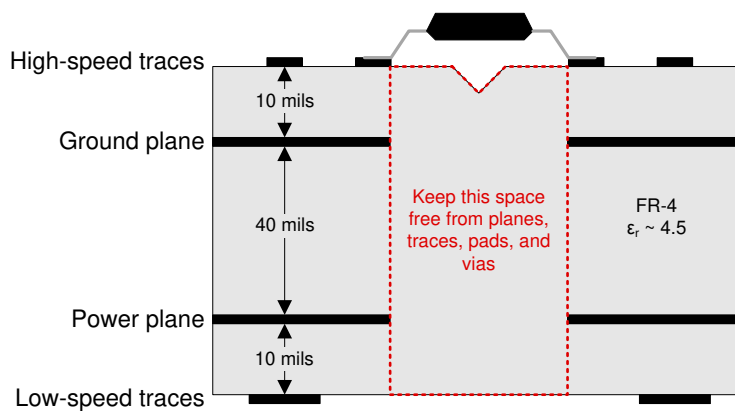


图 9-8. Recommended Layer Stack

## 10 Device and Documentation Support

### 10.1 Device Support

#### 10.1.1 Development Support

For development support, see the following:

- Texas Instruments, [36Vdc-75Vdc Input, 20V @ 4A Output, Active Clamp Forward TI Reference Design](#)
- Texas Instruments, [18Vdc-54Vdc Input, 24V @ 5A Output, Active Clamp Forward TI Reference Design](#)
- Texas Instruments, [36Vdc-75Vdc Input, 6V @ 20A Output, Active Clamp Forward TI Reference Design](#)
- Texas Instruments, [ISO72x IBIS Model](#)

### 10.2 Documentation Support

#### 10.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [Digital Isolator Design Guide](#)
- Texas Instruments, [Isolation Glossary](#)
- Texas Instruments, [Isolated RS-485 Reference Design application report](#)
- Texas Instruments, [ISO721EVM user's guide](#)

### 10.3 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](#) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 10.4 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

### 10.5 Trademarks

Profibus™ is a trademark of Profibus.

DeviceNet™ is a trademark of Open DeviceNet Vendors Association.

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 10.6 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 10.7 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

## 11 Revision History

注：以前版本的页码可能与当前版本的页码不同

### Changes from Revision M (July 2021) to Revision N (February 2025)

Page

- 更新了整个文档中的表格、图和交叉参考的编号格式..... 1

- 通篇将“VDE V 0884-11”更新为“DIN VDE 0884-17” ..... 1

#### Changes from Revision L (October 2015) to Revision M (October 2024)

Page

- 更新了整个文档中的表格、图和交叉参考的编号格式..... 1
- 通篇将引用内容从电容隔离更新为隔离栅..... 1
- Changed the *Power Dissipation* table to *Power Ratings*. Combined the *Package Insulation Characteristics* table, *IEC 60664-1 Ratings Table* table, and *Insulation Characteristics* table in the *Insulation Specifications* table. Changed the *Regulatory Information* table to the *Safety-Related Certifications* table..... 6
- Changed the L(I01) parameter name to external clearance (CLR) and L(I02) to external creepage (CPG). Also changed the input-to-output test voltage ( $V_{PR}$ ) parameter name to apparent charge ( $q_{pd}$ )..... 7
- Changed  $V_{peak}$  to  $V_{PK}$  throughout the data sheet..... 7
- Changed the CSA information in the *Safety-Related Certifications* table..... 7
- Moved the *Insulation Characteristics Curves* section to the *Application Curves* section..... 24
- Changed the name of the *Application Curve* section to *Insulation Lifetime* and moved to the *Application Curves* section..... 24

#### Changes from Revision K (February 2012) to Revision L (September 2015)

Page

- Moved Power Dissipation metric into new table, called *Power Dissipation* ..... 6
- Added header row above " $V_{IORM}$ " row with the text "DIN V VDE V 0884-10 (VDE V 0884-10);2006-12" in the *Insulation Characteristics* table..... 7
- Deleted "per UL" in "Isolation voltage" in the *Insulation Characteristics* table..... 7
- Changed Test Condition "DIN IEC 60112/VDE 0303 Part 1" to "DIN EN 60112 (VDE 0303-11); IEC 60112" in the *Package Insulation Characteristics* table..... 7
- Changed the D-8 MIN value of L(102) from "4.3" to "4" in the *Package Insulation Characteristics* table..... 7
- Deleted bottom row of the *Package Insulation Characteristics* table..... 7
- Moved " $V_{ISO}$ " row to the bottom of the *Insulation Characteristics* table..... 7
- Changed the D-8 MIN value of L(101) from "4.8" to "4" in the *Package Insulation Characteristics* table..... 7
- Added "UL 1577" header row over " $V_{ISO}$ " row in the *Insulation Characteristics* table..... 7

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number     | Status<br>(1) | Material type<br>(2) | Package   Pins | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------|---------------|----------------------|----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">ISO721D</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 125   | ISO721              |
| <a href="#">ISO721DR</a>  | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | ISO721              |
| ISO721DR.A                | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | ISO721              |
| ISO721DR.B                | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   |                     |
| <a href="#">ISO721MDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | IS721M              |
| ISO721MDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | IS721M              |
| ISO721MDR.B               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   |                     |
| <a href="#">ISO722D</a>   | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 125   | ISO722              |
| <a href="#">ISO722DR</a>  | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | ISO722              |
| ISO722DR.A                | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | ISO722              |
| ISO722DR.B                | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   |                     |
| <a href="#">ISO722MD</a>  | Obsolete      | Production           | SOIC (D)   8   | -                     | -           | Call TI                              | Call TI                           | -40 to 125   | IS722M              |
| <a href="#">ISO722MDR</a> | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | IS722M              |
| ISO722MDR.A               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | IS722M              |
| ISO722MDR.B               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   |                     |
| ISO722MDRG4               | Active        | Production           | SOIC (D)   8   | 2500   LARGE T&R      | Yes         | FULL NIPDAU                          | Level-1-260C-UNLIM                | -40 to 125   | IS722M              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

**(6) Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF ISO721, ISO721M, ISO722 :**

- Automotive : [ISO721-Q1](#), [ISO721-Q1](#), [ISO722-Q1](#)
- Enhanced Product : [ISO721M-EP](#)
- Military : [ISO721M](#)

**NOTE: Qualified Version Definitions:**


- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications
- Military - QML certified for Military and Defense Applications

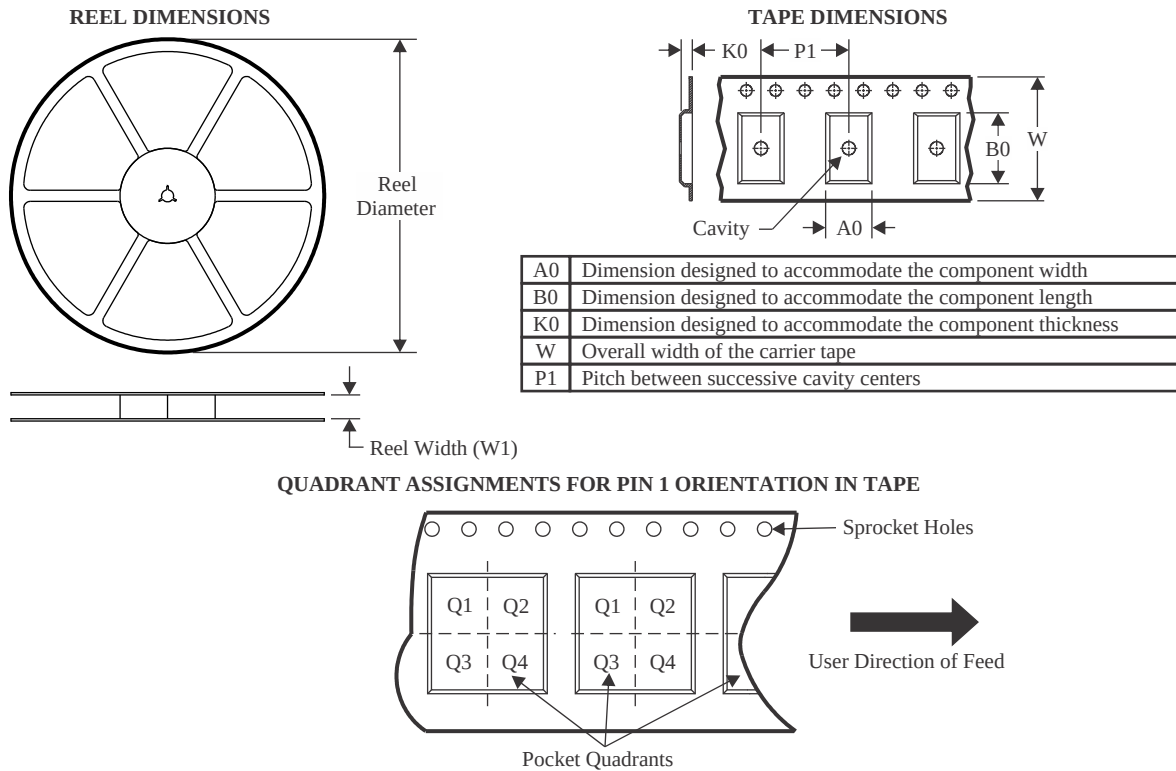**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ISO721DR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| ISO721MDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| ISO722DR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| ISO722MDR | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

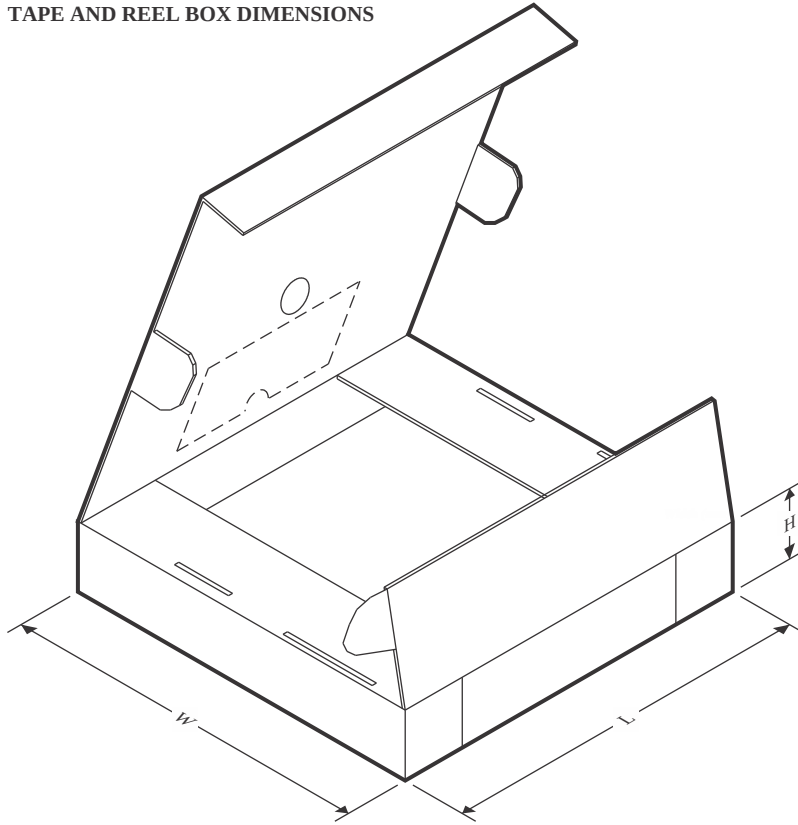

\*All dimensions are nominal

| Device    | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------|--------------|-----------------|------|------|-------------|------------|-------------|
| ISO721DR  | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| ISO721MDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| ISO722DR  | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |
| ISO722MDR | SOIC         | D               | 8    | 2500 | 350.0       | 350.0      | 43.0        |





## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT





1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

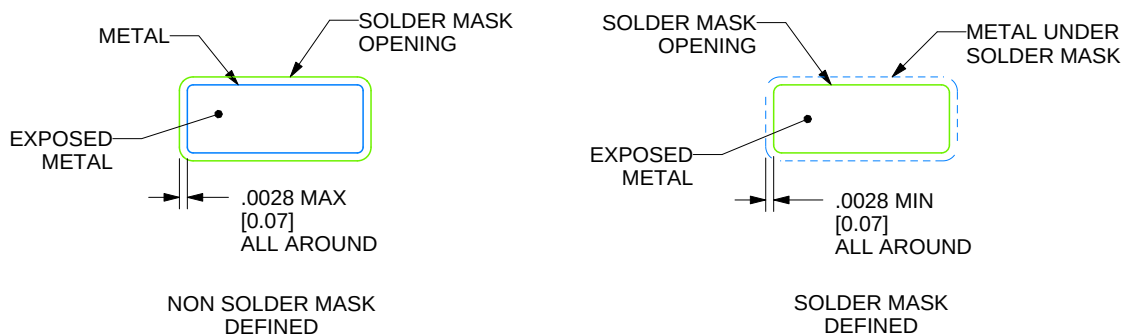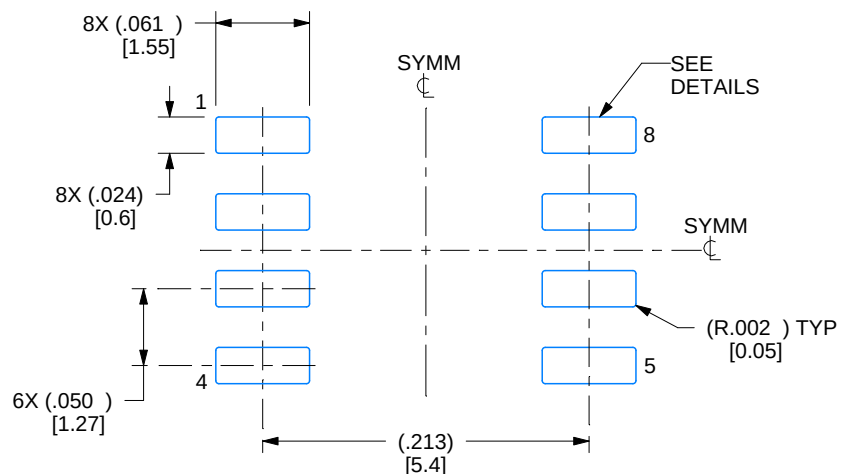

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

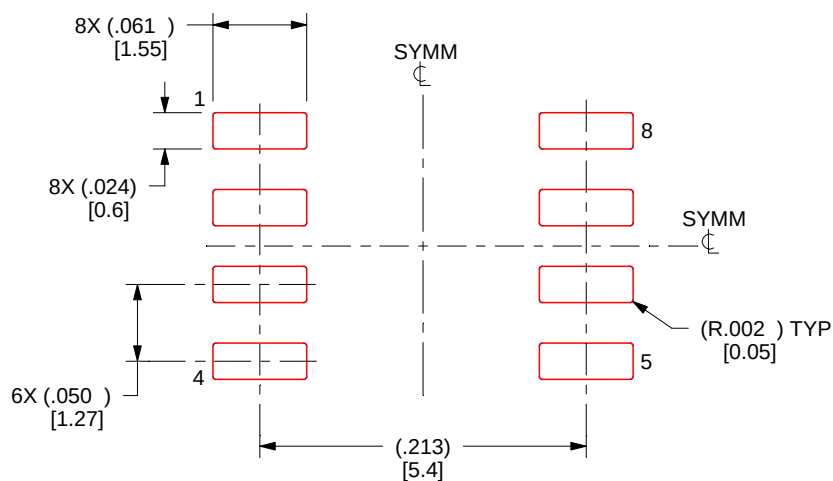

SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司