

TPS22968 双通道、超低电阻负载开关

1 特性

- 集成式双通道负载开关
- 输入电压范围：0.8V 至 5.5V
- VBIAS 电压范围：2.5V 至 5.5V
 - 非常适合 1S 电池配置
- 超低 R_{ON} 电阻
 - $V_{IN} = 5V$ ($V_{BIAS} = 5V$) 时, $R_{ON} = 27m\Omega$
 - $V_{IN} = 3.3V$ ($V_{BIAS} = 5V$) 时, $R_{ON} = 25m\Omega$
 - $V_{IN} = 1.8V$ ($V_{BIAS} = 5V$) 时, $R_{ON} = 25m\Omega$
- 每通道最大 4A 持续开关电流
- 低静态电流
 - $V_{BIAS} = 5V$ 时为 55 μA (两个通道)
 - $V_{BIAS} = 5V$ 时为 55 μA (单通道)
- 低控制输入阈值支持使用 1.2V、1.8V、2.5V、3.3V 逻辑
- 可配置上升时间⁽¹⁾
- 快速输出放电 (QOD)⁽²⁾ (可选)
- 带有散热垫的 SON 14 引脚封装
- ESD 性能经测试符合 JEDEC 标准
 - 2kV 人体放电模式 (HBM) 和 1kV 器件充电模型 (CDM)
- 闩锁性能超出 100mA, 符合 JESD 78 II 类规范的要求
- 通用输入输出 (GPIO) 使能 - 高电平有效
- TPS22968N: 仅限产品预览

(1) 有关 CT 值与上升时间之间的关系, 请参阅 [申请资料](#) 部分

(2) 此特性通过一个 270 Ω 电阻器将开关的输出放电至接地 (GND), 从而防止输出悬空。

2 应用

- Ultrabook™
- 笔记本电脑和上网本
- 平板电脑
- 消费类电子产品
- 机顶盒
- 电信系统

3 说明

TPS22968x 是一款具有受控接通功能的小型、超低 R_{ON} 双通道负载开关。此器件包含两个可在 0.8 至 5.5V 输入电压范围内运行的 N 沟道 MOSFET, 并且每个沟道可支持最大

4A 的持续电流。每个开关由一个导通/关断输入 (ON1 和 ON2) 单独控制, 此输入可与低电压控制信号直接连接。为了能够在开关关闭时快速进行输出放电, TPS22968 中添加了一个 270 Ω 的片上负载电阻器。


TPS22968x 采用小型、节省空间的封装 (DPU), 该封装具有集成式散热垫, 从而支持高功率耗散。该器件在自然通风环境下的额定运行温度范围为 -40 至 +105 $^{\circ}C$ 。

器件信息⁽¹⁾

| 器件型号 | 封装 | 封装尺寸 (标称值) |
|-----------------------|-----------|-----------------|
| TPS22968 TPS22968N | WSON (14) | 3.00mm x 2.00mm |

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

典型应用电路原理图

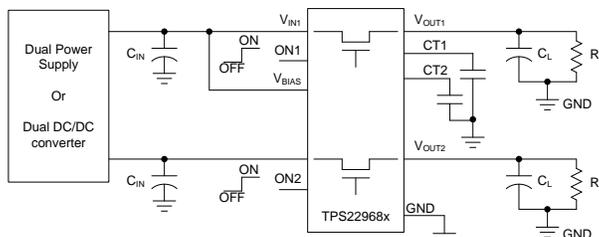

Copyright © 2016, Texas Instruments Incorporated



目录

| | | | | | |
|-----------|--|-----------|-----------|---|-----------|
| 1 | 特性 | 1 | 9.2 | Functional Block Diagram | 15 |
| 2 | 应用 | 1 | 9.3 | Feature Description | 16 |
| 3 | 说明 | 1 | 9.4 | Device Functional Modes | 17 |
| 4 | 修订历史记录 | 2 | 10 | Application and Implementation | 18 |
| 5 | Device Comparison | 4 | 10.1 | Application Information | 18 |
| 6 | Pin Configuration and Functions | 4 | 10.2 | Typical Application | 21 |
| 7 | Specifications | 5 | 11 | Power Supply Recommendations | 24 |
| 7.1 | Absolute Maximum Ratings | 5 | 12 | Layout | 24 |
| 7.2 | ESD Ratings | 5 | 12.1 | Layout Guidelines | 24 |
| 7.3 | Recommended Operating Conditions | 5 | 12.2 | Layout Example | 24 |
| 7.4 | Thermal Information | 5 | 13 | 器件和文档支持 | 25 |
| 7.5 | Electrical Characteristics (V _{BIAS} = 5 V) | 6 | 13.1 | 器件支持 | 25 |
| 7.6 | Electrical Characteristics (V _{BIAS} = 2.5 V) | 7 | 13.2 | 文档支持 | 25 |
| 7.7 | Switching Characteristics | 8 | 13.3 | 相关链接 | 25 |
| 7.8 | Typical DC Characteristics | 8 | 13.4 | 接收文档更新通知 | 25 |
| 7.9 | Typical AC Characteristics | 12 | 13.5 | 社区资源 | 25 |
| 8 | Parameter Measurement Information | 14 | 13.6 | 商标 | 25 |
| 9 | Detailed Description | 15 | 13.7 | 静电放电警告 | 25 |
| 9.1 | Overview | 15 | 13.8 | Glossary | 26 |
| 14 | 机械、封装和可订购信息 | 26 | | | |

4 修订历史记录

| Changes from Revision D (March 2016) to Revision E | Page |
|--|------|
| • 将 QOD 说明从 (仅限 TPS22968) 更改成了 (可选) (在特性部分中) | 1 |
| <hr/> | |
| Changes from Revision E (July 2016) to Revision F | Page |
| • 已更改 Functional Block Diagram | 1 |
| <hr/> | |
| Changes from Revision C (October 2015) to Revision D | Page |
| • Made Changes to Thermal Considerations | 22 |
| <hr/> | |
| Changes from Revision B (June 2015) to Revision C | Page |
| • 更新了 TPS22968N 发行版的信息。 | 1 |
| • Updated “TEST CONDITIONS” for RON. | 6 |
| • Updated “TEST CONDITIONS” for RON. | 7 |
| <hr/> | |
| Changes from Revision A (July 2014) to Revision B | Page |
| • Updated Typical Characteristics graphs. | 8 |
| <hr/> | |
| Changes from Original (January 2014) to Revision A | Page |
| • 已添加 添加了处理额定值表、特性说明部分、器件功能模式、应用和实施部分、电源相关建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分 | 1 |

5 Device Comparison

| DEVICE | Ron (typ) at VIN = 3.3 V, VBIAS = 5 V | QUICK OUTPUT DISCHARGE | MAXIMUM OUTPUT CURRENT | ENABLE |
|-----------|---|------------------------------|------------------------------|-------------|
| TPS22968 | 25 mΩ | Yes | 4 A | Active High |
| TPS22968N | 25 mΩ | No | 4 A | Active High |

6 Pin Configuration and Functions



Pin Functions

| PIN | | I/O | DESCRIPTION |
|-----|-------------|-----|---|
| NO. | NAME | | |
| 1 | VIN1 | I | Switch 1 input. Bypass this input with a ceramic capacitor to GND |
| 2 | | | |
| 3 | ON1 | I | Active-high switch 1 control input. Do not leave floating |
| 4 | VBIAS | I | Bias voltage. Power supply to the device. Recommended voltage range for this pin is 2.5 V to 5.5 V. See the VIN and VBIAS Voltage Range section |
| 5 | ON2 | I | Active-high switch 2 control input. Do not leave floating |
| 6 | VIN2 | I | Switch 2 input. Bypass this input with a ceramic capacitor to GND |
| 7 | | | |
| 8 | VOUT2 | O | Switch 2 output |
| 9 | | | |
| 10 | CT2 | O | Switch 2 slew rate control. Can be left floating |
| 11 | GND | — | Ground |
| 12 | CT1 | O | Switch 1 slew rate control. Can be left floating |
| 13 | VOUT1 | O | Switch 2 output |
| 14 | | | |
| 15 | Thermal Pad | — | Thermal pad (exposed center pad) to alleviate thermal stress. Tie to GND. See the Application Information section for layout guidelines |

7 Specifications

7.1 Absolute Maximum Ratings

 Over operating free-air temperature (unless otherwise noted)⁽¹⁾

| | | MIN | MAX | UNIT ⁽²⁾ |
|---------------------|---|------|-----|---------------------|
| V _{IN1,2} | Input voltage | -0.3 | 6 | V |
| V _{BIAS} | Bias voltage | -0.3 | 6 | V |
| V _{OUT1,2} | Output voltage | -0.3 | 6 | V |
| V _{ON1,2} | ON voltage | -0.3 | 6 | V |
| I _{MAX} | Maximum continuous switch current per channel, T _A = 30 °C | | 4 | A |
| I _{PLS} | Maximum pulsed switch current, pulse < 300 μs, 2% duty cycle | | 6 | A |
| T _J | Maximum junction temperature | | 125 | °C |
| T _{stg} | Storage temperature | -65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to network ground terminal.

7.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|--|-------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 |
| | | Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾ | ±1000 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500-V HBM is possible with the necessary precautions.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250-V CDM is possible with the necessary precautions.

7.3 Recommended Operating Conditions

| | | | MIN | MAX | UNIT |
|------------------------|---|------------------------------------|------------------|-------------------|------|
| V _{IN1,2} | Input voltage | | 0.8 | V _{BIAS} | V |
| V _{BIAS} | Bias voltage | | 2.5 | 5.5 | V |
| V _{ON1,2} | ON voltage | | 0 | 5.5 | V |
| V _{OUT1,2} | Output voltage | | | V _{IN} | V |
| V _{IH, ON1,2} | High-level input voltage, ON1,2 | V _{BIAS} = 2.5 V to 5.5 V | 1.2 | 5.5 | V |
| V _{IL, ON1,2} | Low-level input voltage, ON1,2 | V _{BIAS} = 2.5 V to 5.5 V | 0 | 0.5 | V |
| C _{IN1,2} | Input capacitor | | 1 ⁽¹⁾ | | μF |
| T _A | Operating free-air temperature ⁽²⁾ | | -40 | 105 | °C |

- (1) See the [Application Information](#) section.
- (2) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may have to be derated. Maximum ambient temperature [T_{A(max)}] is dependent on the maximum operating junction temperature [T_{J(max)}], the maximum power dissipation of the device in the application [P_{D(max)}], and the junction-to-ambient thermal resistance of the part/package in the application (R_{θJA}), as given by the following equation: T_{A(max)} = T_{J(max)} - (R_{θJA} × P_{D(max)}).

7.4 Thermal Information

| | THERMAL METRIC ⁽¹⁾ (2) | TPS22968 | UNIT |
|-----------------------|--|------------|------|
| | | DPU (WSON) | |
| | | 14 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 62.5 | °C/W |
| R _{θJC(top)} | Junction-to-case (top) thermal resistance | 70.2 | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | 23.2 | °C/W |
| ψ _{JT} | Junction-to-top characterization parameter | 2.5 | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.
- (2) For thermal estimates of this device based on PCB copper area, see the [TI PCB Thermal Calculator](#).

Thermal Information (continued)

| THERMAL METRIC ⁽¹⁾ ⁽²⁾ | | TPS22968 | UNIT |
|--|--|------------|------|
| | | DPU (WSON) | |
| | | 14 PINS | |
| ψ_{JB} | Junction-to-board characterization parameter | 23.2 | °C/W |
| $R_{\theta JC(bot)}$ | Junction-to-case (bottom) thermal resistance | 9 | °C/W |

7.5 Electrical Characteristics ($V_{BIAS} = 5\text{ V}$)

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40^{\circ}\text{C} \leq T_A \leq +105^{\circ}\text{C}$ (full) and $V_{BIAS} = 5\text{ V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT | | | |
|------------------------------------|---|--|---|---|--|---|------------------|-----|--|----------|
| POWER SUPPLIES AND CURRENTS | | | | | | | | | | |
| I_Q, V_{BIAS} | V_{BIAS} quiescent current (both channels) | $I_{OUT1} = I_{OUT2} = 0, V_{IN1,2} = V_{ON1,2} = V_{BIAS} = 5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | 55 | 70 | | μA | | | |
| | V_{BIAS} quiescent current (single channel) | $I_{OUT1} = I_{OUT2} = 0, V_{ON2} = 0\text{ V}, V_{IN1,2} = V_{ON1} = V_{BIAS} = 5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | 55 | 68 | | μA | | | |
| I_{SD}, V_{BIAS} | V_{BIAS} shutdown current | $V_{ON1,2} = 0\text{ V}, V_{OUT1,2} = 0\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | 1 | 2 | | μA | | | |
| $I_{SD}, V_{IN1,2}$ | $V_{IN1,2}$ shutdown current (per channel) | $V_{ON1,2} = 0\text{ V}, V_{OUT1,2} = 0\text{ V}$ | $V_{IN1,2} = 5\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.5 | 8 | μA | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 10 | | | | |
| | | | $V_{IN1,2} = 3.3\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.1 | 3 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 4 | | | | |
| | | | $V_{IN1,2} = 1.8\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.07 | 2 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 3 | | | | |
| | | | $V_{IN1,2} = 1.2\text{ V}$ | -40°C to $+85^{\circ}\text{C}$ | 0.05 | 1 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 2 | | | | |
| $I_{ON1,2}$ | ON pin input leakage current | $V_{ON} = 5.5\text{ V}$ | -40°C to $+105^{\circ}\text{C}$ | | 0.1 | | μA | | | |
| RESISTANCE CHARACTERISTICS | | | | | | | | | | |
| R_{ON} | On-state resistance | $I_{OUT} = -200\text{ mA}, V_{BIAS} = 5\text{ V}, V_{ON1,2} = 5\text{ V}$ | $V_{IN} = 5\text{ V}$ | 25°C | 27 | 36 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 40 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 42 | | | | |
| | | | $V_{IN} = 3.3\text{ V}$ | 25°C | 25 | 34 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 38 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 40 | | | | |
| | | | $V_{IN} = 1.8\text{ V}$ | 25°C | 25 | 34 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 38 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 40 | | | | |
| | | | $V_{IN} = 1.5\text{ V}$ | 25°C | 25 | 34 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 38 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 40 | | | | |
| | | | $V_{IN} = 1.2\text{ V}$ | 25°C | 25 | 34 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 38 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 40 | | | | |
| | | | $V_{IN} = 0.8\text{ V}$ | 25°C | 25 | 34 | $\text{m}\Omega$ | | | |
| | | | | -40°C to $+85^{\circ}\text{C}$ | | 38 | | | | |
| | | | | -40°C to $+105^{\circ}\text{C}$ | | 40 | | | | |
| | | | $R_{PD}^{(1)}$ | Output pulldown resistance | $V_{IN} = 5\text{ V}, V_{ON} = 0\text{ V}, I_{OUT} = 10\text{ mA}$ | -40°C to $+105^{\circ}\text{C}$ | 270 | 320 | | Ω |

(1) TPS22968 only.

7.6 Electrical Characteristics ($V_{BIAS} = 2.5\text{ V}$)

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40\text{ °C} \leq T_A \leq +105\text{ °C}$ (full) and $V_{BIAS} = 2.5\text{ V}$. Typical values are for $T_A = 25\text{ °C}$ (unless otherwise noted).


| PARAMETER | | TEST CONDITIONS | T_A | MIN | TYP | MAX | UNIT |
|------------------------------------|---|--|-------------------------------------|-------------------------------------|------|-----|------------------|
| POWER SUPPLIES AND CURRENTS | | | | | | | |
| I_Q, V_{BIAS} | V_{BIAS} quiescent current (both channels) | $I_{OUT1} = I_{OUT2} = 0, V_{IN1,2} = V_{ON1,2} = V_{BIAS} = 2.5\text{ V}$ | -40 °C to $+105\text{ °C}$ | 18 | 27 | | μA |
| | V_{BIAS} quiescent current (single channel) | $I_{OUT1} = I_{OUT2} = 0, V_{ON2} = 0\text{ V}, V_{IN1,2} = V_{ON1} = V_{BIAS} = 2.5\text{ V}$ | -40 °C to $+105\text{ °C}$ | 18 | 27 | | μA |
| I_{SD}, V_{BIAS} | V_{BIAS} shutdown current | $V_{ON1,2} = 0\text{ V}, V_{OUT1,2} = 0\text{ V}$ | -40 °C to $+105\text{ °C}$ | 0.5 | 2 | | μA |
| $I_{SD}, V_{IN1,2}$ | $V_{IN1,2}$ shutdown current (per channel) | $V_{ON1,2} = 0\text{ V}, V_{OUT1,2} = 0\text{ V}$ | $V_{IN1,2} = 2.5\text{ V}$ | -40 °C to $+85\text{ °C}$ | 0.1 | 2 | μA |
| | | | | -40 °C to $+105\text{ °C}$ | | 4 | |
| | | | $V_{IN1,2} = 1.8\text{ V}$ | -40 °C to $+85\text{ °C}$ | 0.07 | 2 | |
| | | | | -40 °C to $+105\text{ °C}$ | | 3 | |
| | | | $V_{IN1,2} = 1.2\text{ V}$ | -40 °C to $+85\text{ °C}$ | 0.05 | 1 | |
| | -40 °C to $+105\text{ °C}$ | | 2 | | | | |
| | $V_{IN1,2} = 0.8\text{ V}$ | -40 °C to $+85\text{ °C}$ | 0.04 | 1 | | | |
| | -40 °C to $+105\text{ °C}$ | | 2 | | | | |
| $I_{ON1,2}$ | ON pin input leakage current | $V_{ON} = 5.5\text{ V}$ | -40 °C to $+85\text{ °C}$ | | 0.1 | | μA |
| RESISTANCE CHARACTERISTICS | | | | | | | |
| R_{ON} | On-state resistance | $I_{OUT} = -200\text{ mA}, V_{BIAS} = 2.5\text{ V}$ $V_{ON1,2} = 5\text{ V}$ | $V_{IN} = 2.5\text{ V}$ | 25 $^{\circ}\text{C}$ | 30 | 39 | $\text{m}\Omega$ |
| | | | | -40 °C to $+85\text{ °C}$ | | 44 | |
| | | | | -40 °C to $+105\text{ °C}$ | | 46 | |
| | | | $V_{IN} = 1.8\text{ V}$ | 25 $^{\circ}\text{C}$ | 28 | 36 | $\text{m}\Omega$ |
| | | | | -40 °C to $+85\text{ °C}$ | | 41 | |
| | | | | -40 °C to $+105\text{ °C}$ | | 43 | |
| | | | $V_{IN} = 1.5\text{ V}$ | 25 $^{\circ}\text{C}$ | 28 | 36 | $\text{m}\Omega$ |
| | | | | -40 °C to $+85\text{ °C}$ | | 41 | |
| | | | | -40 °C to $+105\text{ °C}$ | | 43 | |
| | | | $V_{IN} = 1.2\text{ V}$ | 25 $^{\circ}\text{C}$ | 27 | 36 | $\text{m}\Omega$ |
| | | | | -40 °C to $+85\text{ °C}$ | | 41 | |
| | | | | -40 °C to $+105\text{ °C}$ | | 43 | |
| $V_{IN} = 0.8\text{ V}$ | 25 $^{\circ}\text{C}$ | 26 | 35 | $\text{m}\Omega$ | | | |
| | -40 °C to $+85\text{ °C}$ | | 39 | | | | |
| | -40 °C to $+105\text{ °C}$ | | 41 | | | | |
| $R_{PD}^{(1)}$ | Output pulldown resistance | $V_{IN} = 2.5\text{ V}, V_{ON} = 0\text{ V}, I_{OUT} = 10\text{ mA}$ | -40 °C to $+105\text{ °C}$ | 270 | 320 | | Ω |

(1) TPS22968 only.







7.7 Switching Characteristics

| PARAMETER | TEST CONDITION | MIN | TYP | MAX | UNIT |
|---|---|-----|------|-----|---------------|
| $V_{IN} = V_{ON} = V_{BIAS} = 5\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$ (unless otherwise noted) | | | | | |
| t_{ON} Turnon time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 1128 | | μs |
| t_{OFF} Turnoff time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 5 | | |
| t_R V_{OUT} rise time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 1387 | | |
| t_F V_{OUT} fall time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 2 | | |
| t_D ON delay time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 455 | | |
| $V_{IN} = 0.8\text{ V}$, $V_{ON} = V_{BIAS} = 5\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$ (unless otherwise noted) | | | | | |
| t_{ON} Turnon time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 508 | | μs |
| t_{OFF} Turnoff time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 33 | | |
| t_R V_{OUT} rise time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 273 | | |
| t_F V_{OUT} fall time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 2 | | |
| t_D ON delay time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 377 | | |
| $V_{IN} = 2.5\text{ V}$, $V_{ON} = 5\text{ V}$, $V_{BIAS} = 2.5\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$ (unless otherwise noted) | | | | | |
| t_{ON} Turnon time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 1718 | | μs |
| t_{OFF} Turnoff time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 7 | | |
| t_R V_{OUT} rise time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 1701 | | |
| t_F V_{OUT} fall time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 2 | | |
| t_D ON delay time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 859 | | |
| $V_{IN} = 0.8\text{ V}$, $V_{ON} = 5\text{ V}$, $V_{BIAS} = 2.5\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$ (unless otherwise noted) | | | | | |
| t_{ON} Turnon time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 1117 | | μs |
| t_{OFF} Turnoff time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 30 | | |
| t_R V_{OUT} rise time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 651 | | |
| t_F V_{OUT} fall time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 2 | | |
| t_D ON delay time | $R_L = 10\ \Omega$, $C_L = 0.1\ \mu\text{F}$, $C_T = 1000\ \text{pF}$ | | 775 | | |


7.8 Typical DC Characteristics

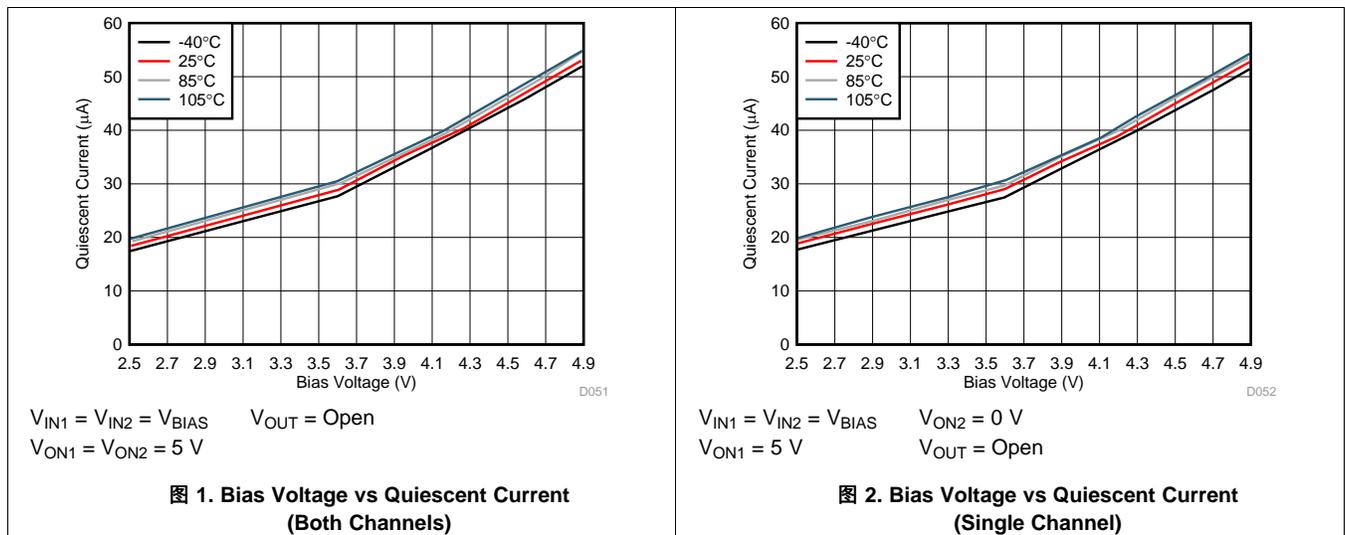







Typical DC Characteristics (接下页)

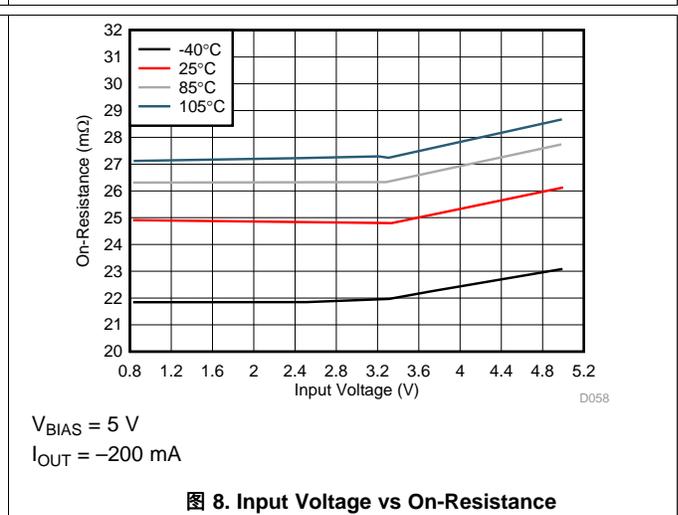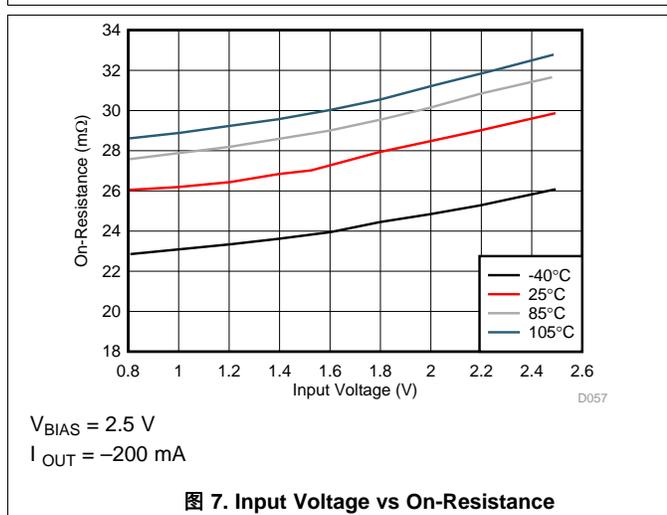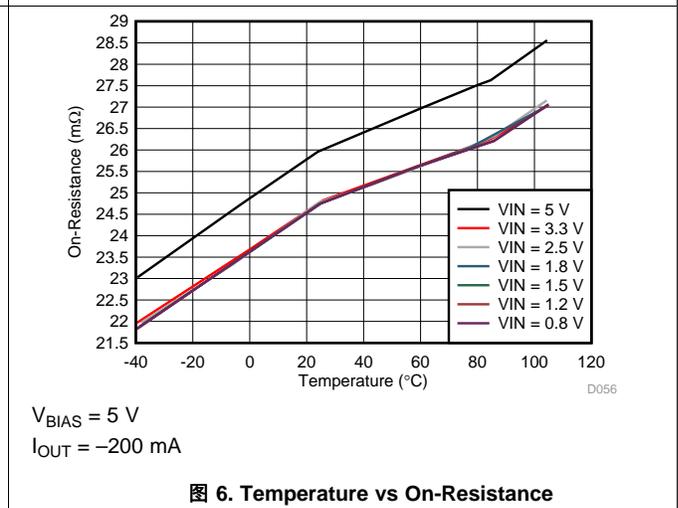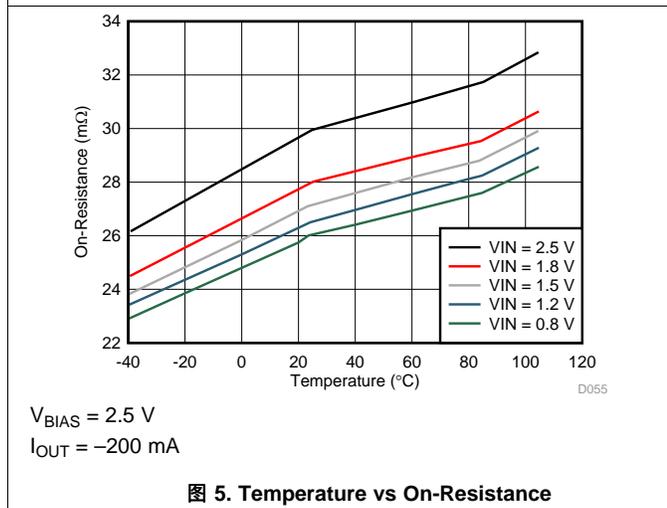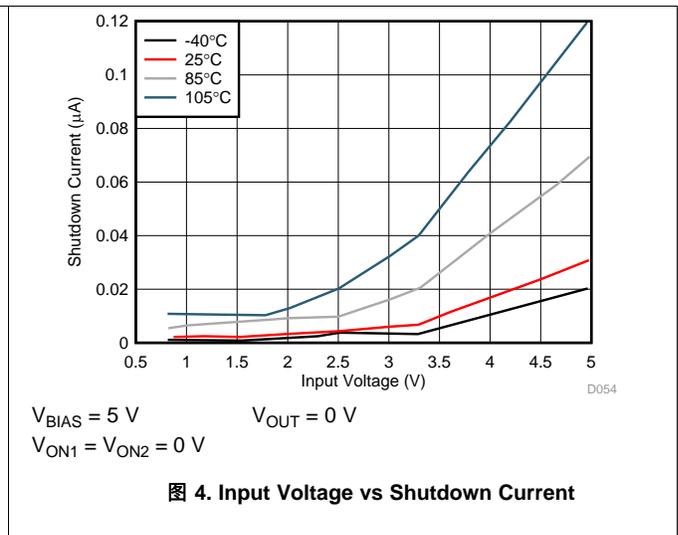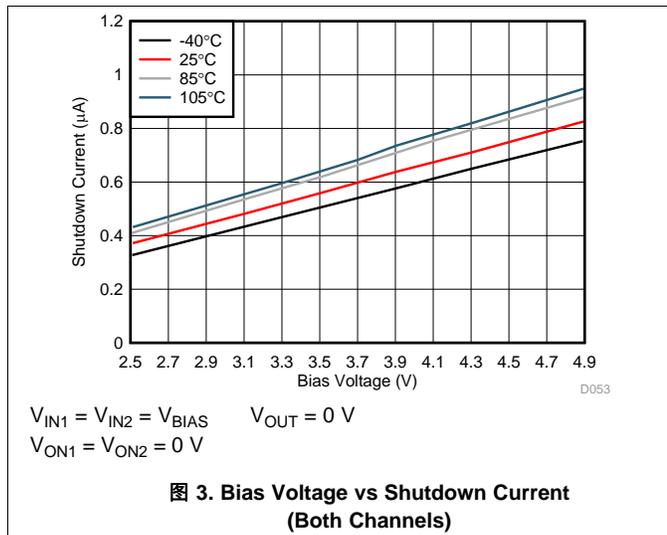

Typical DC Characteristics (接下页)

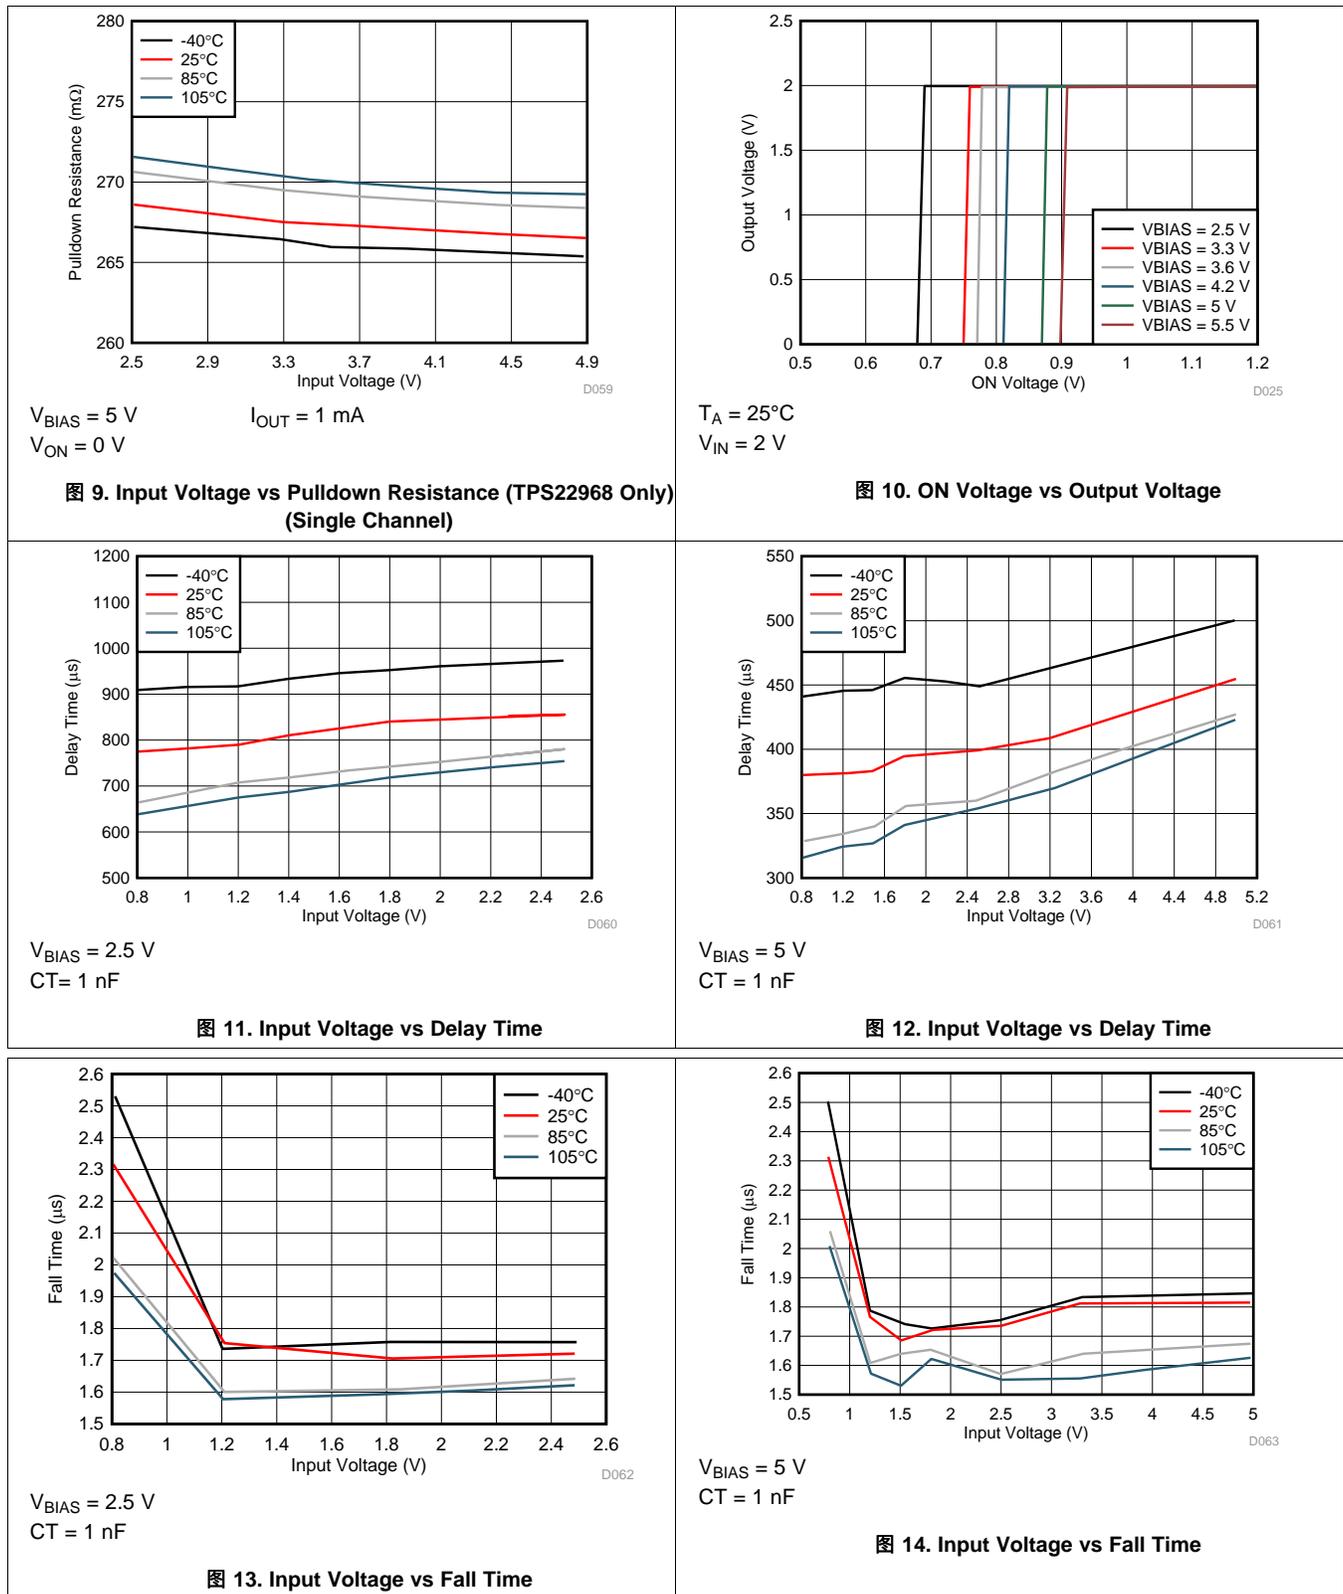

Typical DC Characteristics (接下页)

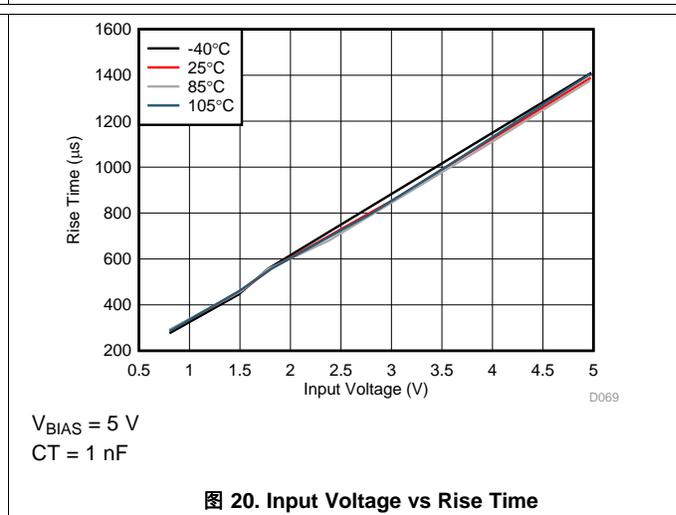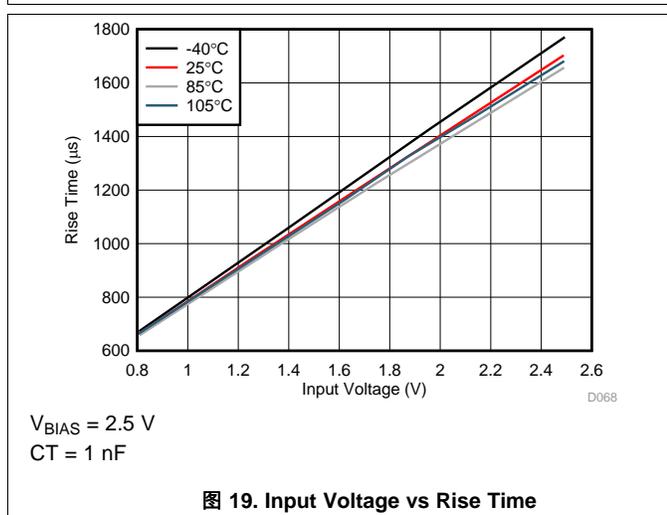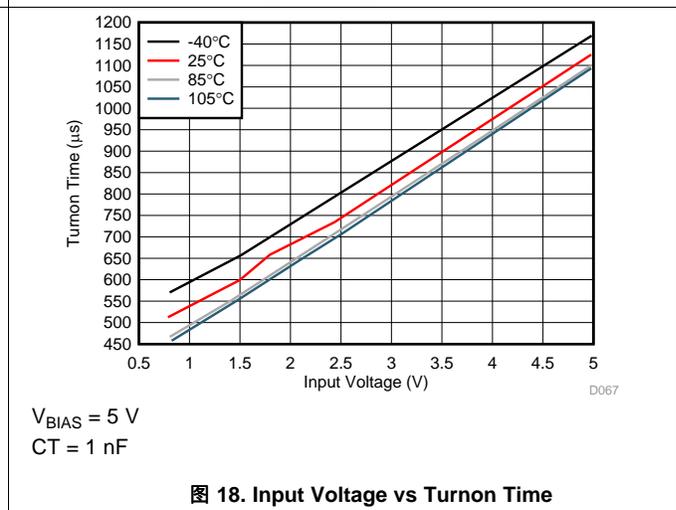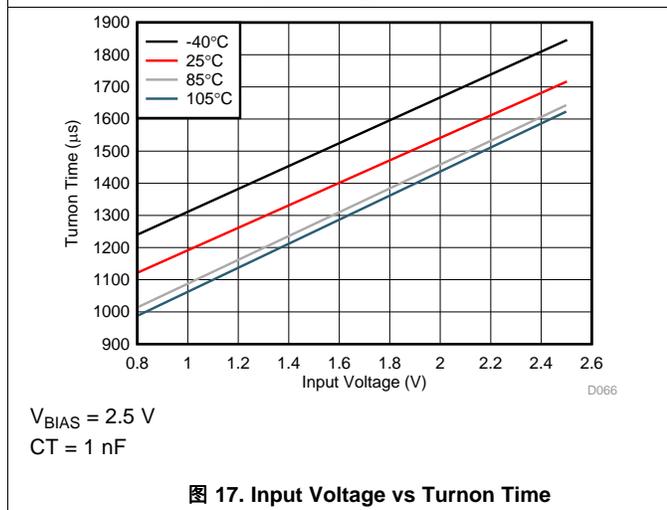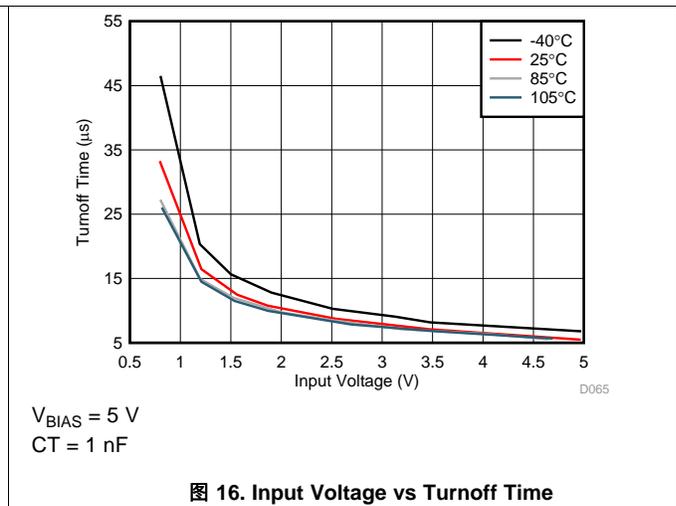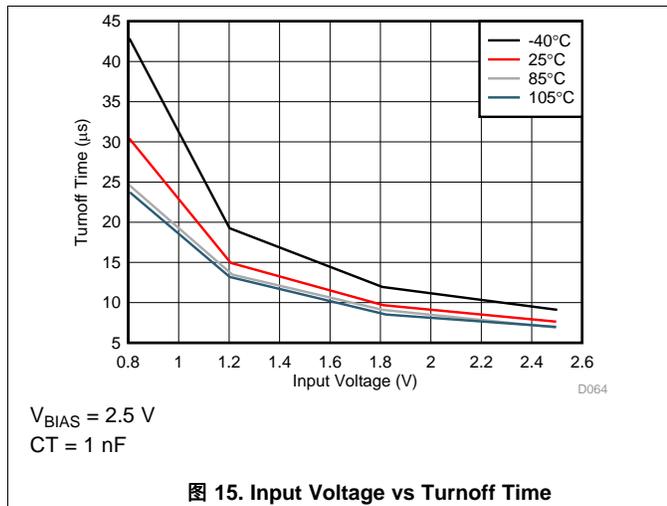

7.9 Typical AC Characteristics

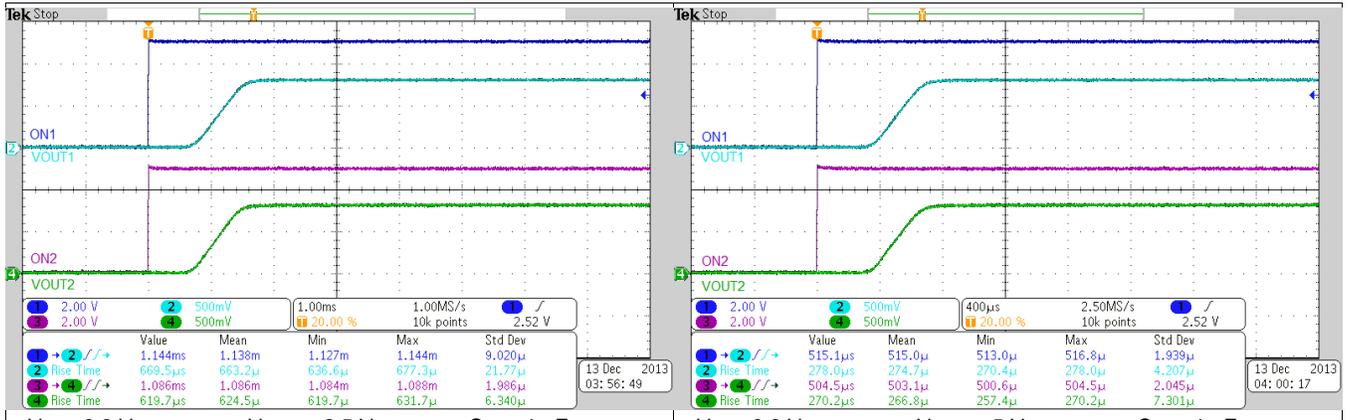


图 21. Turnon Response Time

图 22. Turnon Response Time

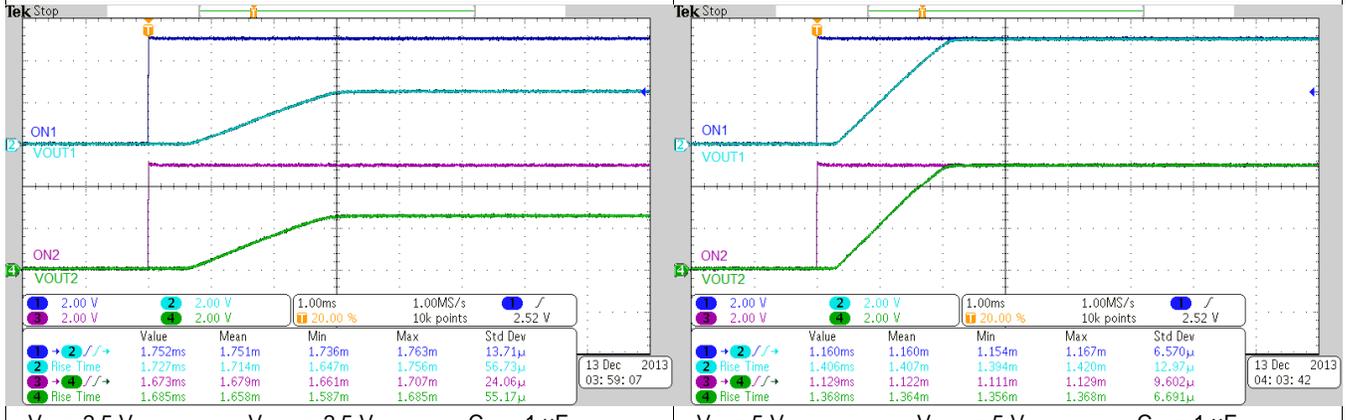


图 23. Turnon Response Time

图 24. Turnon Response Time


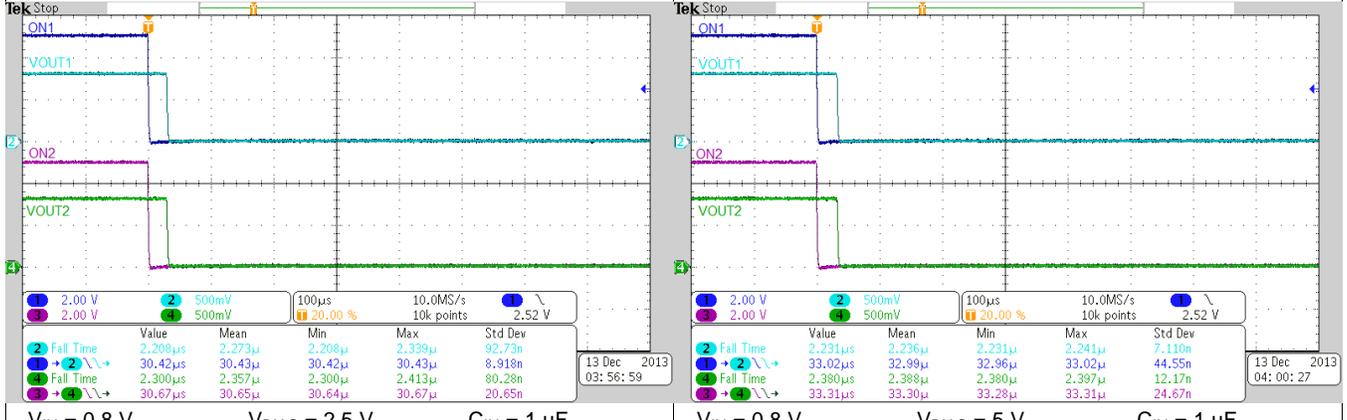



图 25. TurnOff Response Time

图 26. Turnoff Response Time

Typical AC Characteristics (接下页)

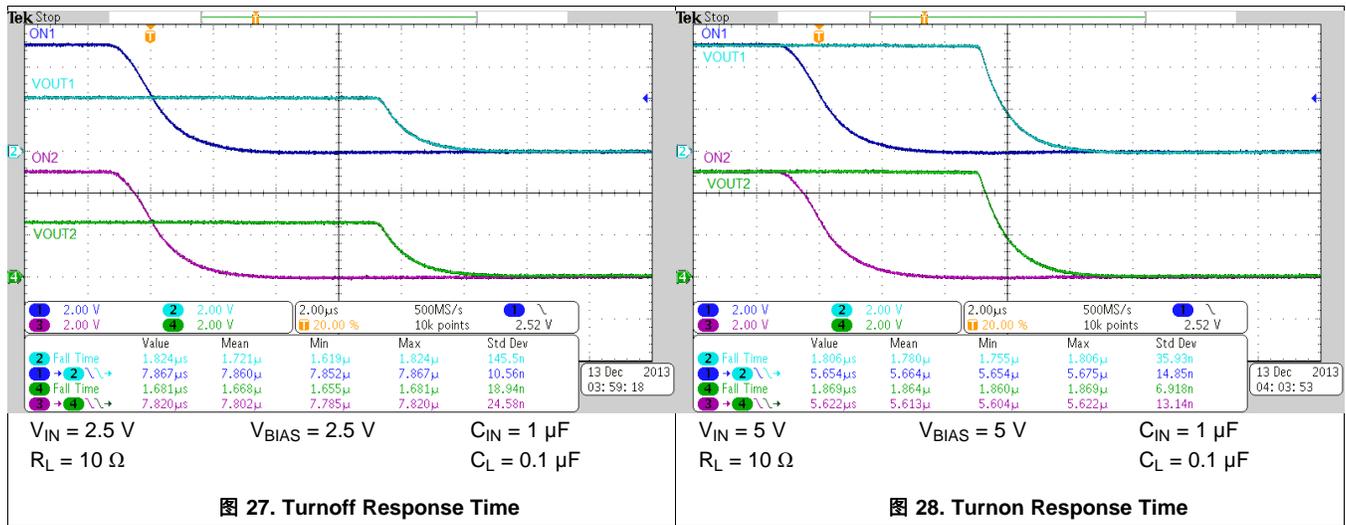


8 Parameter Measurement Information

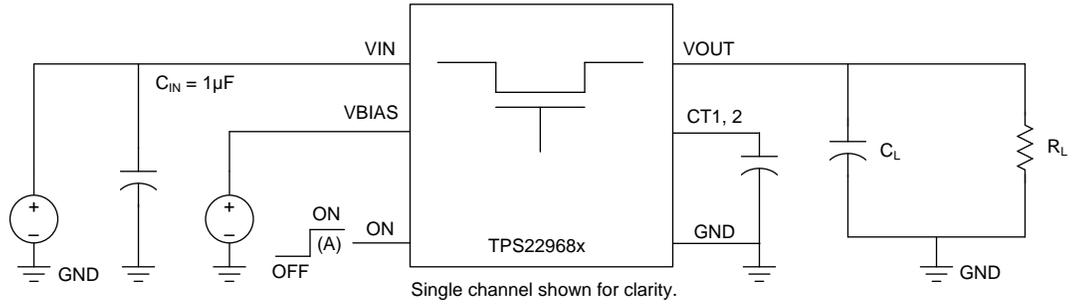

Copyright © 2016, Texas Instruments Incorporated

TEST CIRCUIT

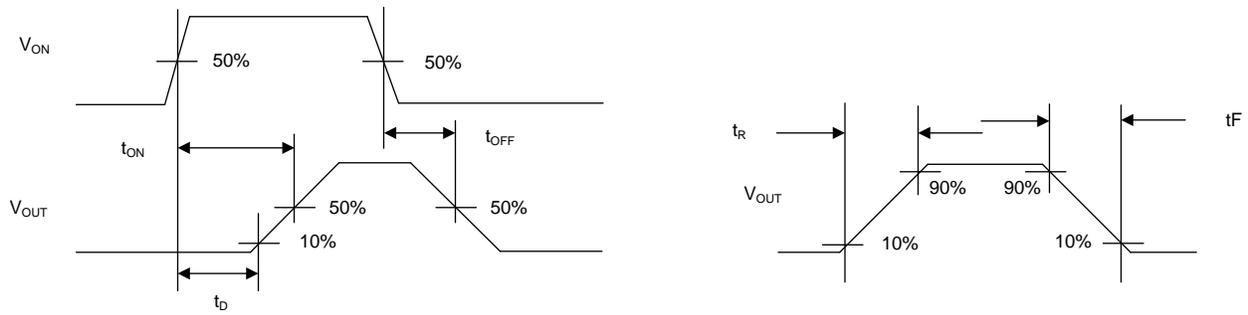

TIMING DIAGRAMS

- A. Rise and fall times of the control signal is 100 ns.

图 29. Test Circuit and Timing Waveforms

9 Detailed Description

9.1 Overview


The TPS22968 is a 5.5-V, 4-A, dual-channel ultra-low R_{ON} load switch with controlled turnon. The device contains two N-channel MOSFETs. Each channel can support a maximum continuous current of 4 A and is controlled by an on and off GPIO-compatible input. The ON pin must be connected and cannot be left floating. The device is designed to control the turnon rate and therefore the inrush current. By controlling the inrush current, power supply sag can be reduced during turnon. The slew rate for each channel is set by connecting a capacitor to GND on the CT pins.

The slew rate is proportional to the capacitor on the CT pin. See the [Adjustable Rise Time](#) section to determine the correct CT value for a desired rise time.

The internal circuitry is powered by the VBIAS pin, which supports voltages from 2.5 V to 5.5 V. This circuitry includes the charge pump, QOD (optional), and control logic. For these internal blocks to function correctly, a voltage between 2.5 V and 5.5 V must be supplied to VBIAS.

When a voltage is supplied to VBIAS, the ON1 pin goes low, and the ON2 pins go low, the QOD turns on. This connects VOUT1 and VOUT2 to GND through an on-chip resistor. The typical pulldown resistance (R_{PD}) is 270 Ω .

9.2 Functional Block Diagram

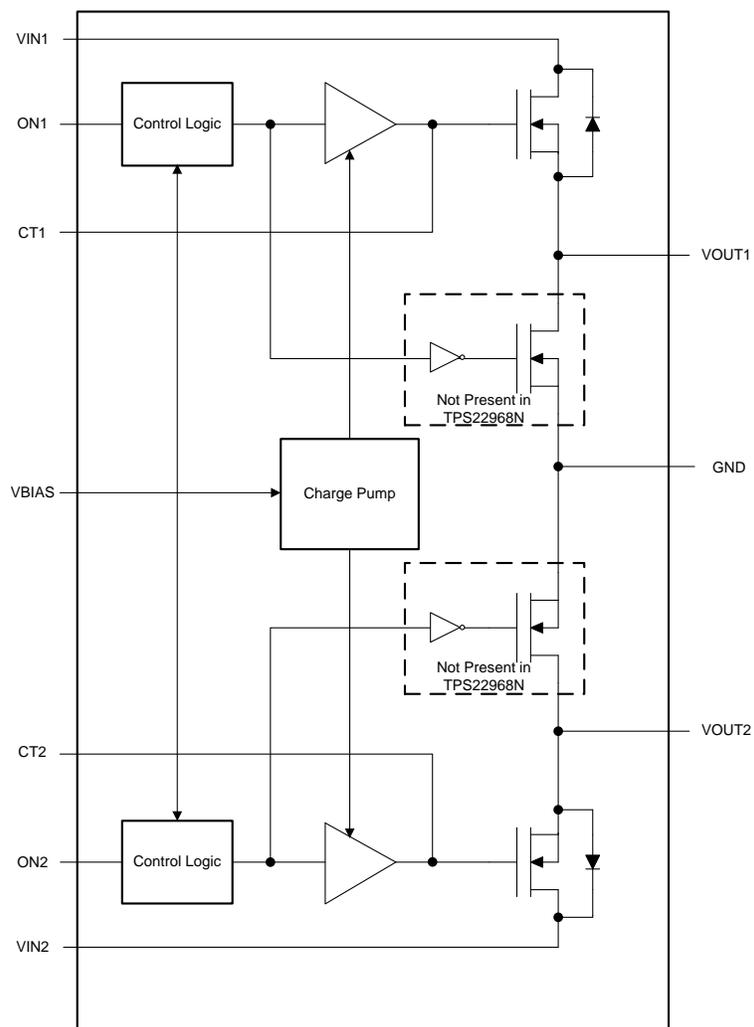

Copyright © 2017, Texas Instruments Incorporated

9.3 Feature Description

9.3.1 ON and OFF Control

The ON pins control the state of the switch. Asserting ON high enables the switch. ON is active high and has a low threshold, making it capable of interfacing with low-voltage signals. The ON pin is compatible with standard GPIO logic threshold. It can be used with any microcontroller with 1.2 V or higher GPIO voltage. This pin cannot be left floating and must be tied either high or low for proper functionality.

9.3.2 Input Capacitor (Optional)

When the switch turns on into a discharged load capacitor or short-circuit, a capacitor must be placed between VIN and GND to limit the voltage drop on the input supply caused by transient inrush currents. A 1- μ F ceramic capacitor (C_{IN}), placed close to the pins, is sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop during high-current application. When switching heavy loads, TI recommends having an input capacitor 10x higher than the output capacitor to avoid excessive voltage drop.

9.3.3 Output Capacitor (Optional)


TI highly recommends a C_{IN} greater than C_L , because of the integrated body diode in the NMOS switch. A C_L greater than C_{IN} can cause the voltage on VOUT to exceed VIN when the system supply is removed. This could result in current flow through the body diode from VOUT to VIN. TI recommends a C_{IN} to C_L ratio of 10 to 1 for minimizing V_{IN} dip caused by inrush currents during startup.

9.3.4 QOD (Optional)

The TPS22968 includes a QOD feature. When the switch is disabled, a discharge resistor is connected between VOUT and GND. This resistor has a typical value of 270 Ω and prevents the output from floating while the switch is disabled.

9.3.5 VIN and VBIAS Voltage Range

For optimal R_{ON} performance, make sure $V_{IN} \leq V_{BIAS}$. The device is still functional if $V_{IN} > V_{BIAS}$, but it exhibits R_{ON} greater than what is listed in the *Electrical Characteristics ($V_{BIAS} = 5 V$)* and *Electrical Characteristics ($V_{BIAS} = 2.5 V$)* table. See [Figure 30](#) for an example of a typical device. Notice the increasing R_{ON} as V_{IN} exceeds V_{BIAS} voltage. Be sure to never exceed the maximum voltage rating for V_{IN} and V_{BIAS} .

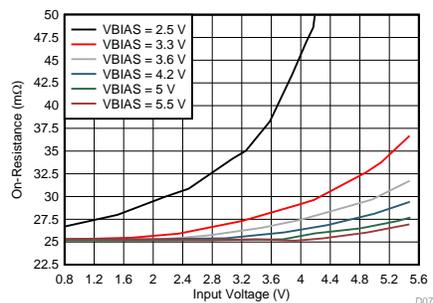

Temperature = 25°C

$I_{OUT} = 200 \text{ mA}$

图 30. On-Resistance vs Input Voltage

Feature Description (接下页)

9.3.6 Adjustable Rise Time

A capacitor to GND on the CT pins sets the slew rate for each channel. The capacitor to GND on the CT pins must be rated for 25 V and above. An approximate formula for the relationship between CT and slew rate with $V_{BIAS} = 5\text{ V}$ is shown in [公式 1](#).

$$SR = 0.32 \times CT + 13.7$$

where

- SR is the slew rate (in $\mu\text{s/V}$)
- CT is the capacitance value on the CT pin (in pF)
- The units for the constant 13.7 is in $\mu\text{s/V}$.

(1)

Rise time can be calculated by multiplying the input voltage by the slew rate. [表 1](#) contains rise time values measured on a typical device.

表 1. Rise Time Table

| CTx (pF) | Typical values at 25°C with a 25-V X7R 10% ceramic capacitor on CT ⁽¹⁾ | | | | | | |
|----------|---|-------------|-------------|-------------|-------------|------------|-------------|
| | VIN = 5 V | VIN = 3.3 V | VIN = 2.5 V | VIN = 1.8 V | VIN = 1.5 V | VIN = 1.2V | VIN = 0.8 V |
| 0 | 65 | 48 | 41 | 35 | 31 | 29 | 24 |
| 220 | 378 | 253 | 197 | 152 | 131 | 111 | 83 |
| 470 | 704 | 474 | 363 | 272 | 234 | 192 | 140 |
| 1000 | 1387 | 931 | 717 | 544 | 449 | 372 | 273 |
| 2200 | 3062 | 2021 | 1536 | 1173 | 991 | 825 | 595 |
| 4700 | 7091 | 4643 | 3547 | 2643 | 2213 | 1828 | 1349 |
| 10000 | 14781 | 9856 | 7330 | 5507 | 4600 | 3841 | 2805 |

(1) RISE TIME (μs) 10% - 90%, $C_L = 0.1\ \mu\text{F}$, $C_{IN} = 1\ \mu\text{F}$, $R_L = 10\ \Omega$, $V_{BIAS} = 5\text{ V}$

9.4 Device Functional Modes

[表 2](#) lists the device function table.

表 2. Functional Table

| ONx | VINx to VOUTx | VOUTx to GND |
|-----|---------------|--------------|
| L | Off | On |
| H | On | Off |

10 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

This section highlights some of the design considerations for implementing this device in various applications. A PSPICE model for this device is also available on the [product page](#) for additional information.

10.1.1 Parallel Configuration

To increase the current capabilities and lower the R_{ON} by approximately 50%, both channels can be placed in parallel as shown in [图 31](#) (parallel configuration). With this configuration, the CT1 and CT2 pins can be tied together to use one capacitor, CT, as shown in [图 31](#). With a single CT capacitor, the rise time is half of the typical rise-time value. Refer to the [表 1](#) for typical timing values.

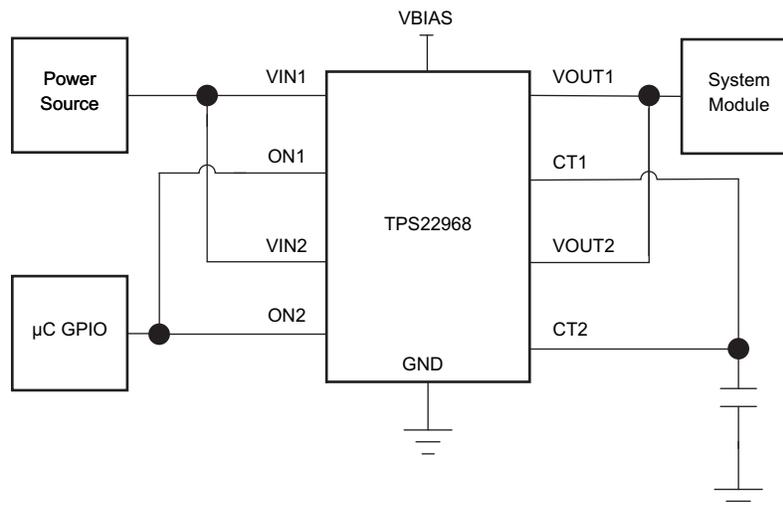


图 31. Parallel Configuration

Application Information (接下页)

10.1.2 Standby Power Reduction

Any end equipment that is powered from the battery has a need to reduce current consumption to keep the battery charged for a longer time. TPS22968 helps to accomplish this by turning off the supply to the modules that are in standby state, and therefore, significantly reduces the leakage current overhead of the standby modules. See [图 32](#).


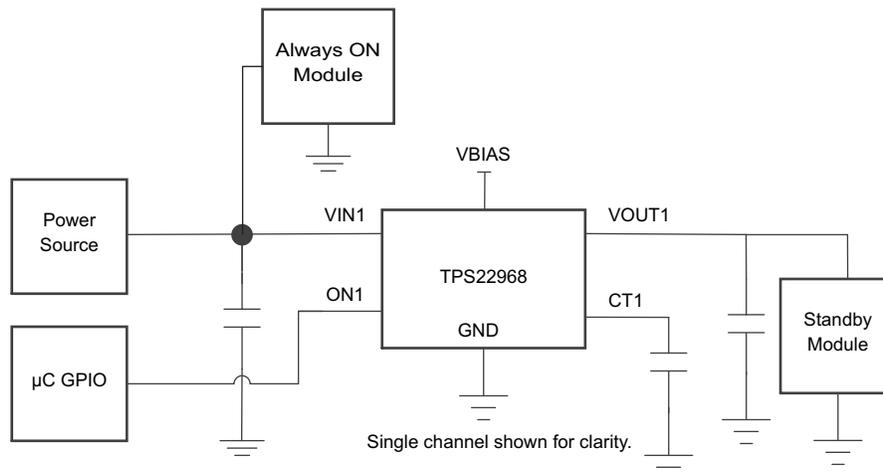


图 32. Standby Power Reduction

10.1.3 Power Supply Sequencing Without a GPIO Input

In many end equipments, there is a need to power up various modules in a predetermined manner. The TPS22968 can solve the problem of power sequencing without adding any complexity to the overall system. See [图 33](#).

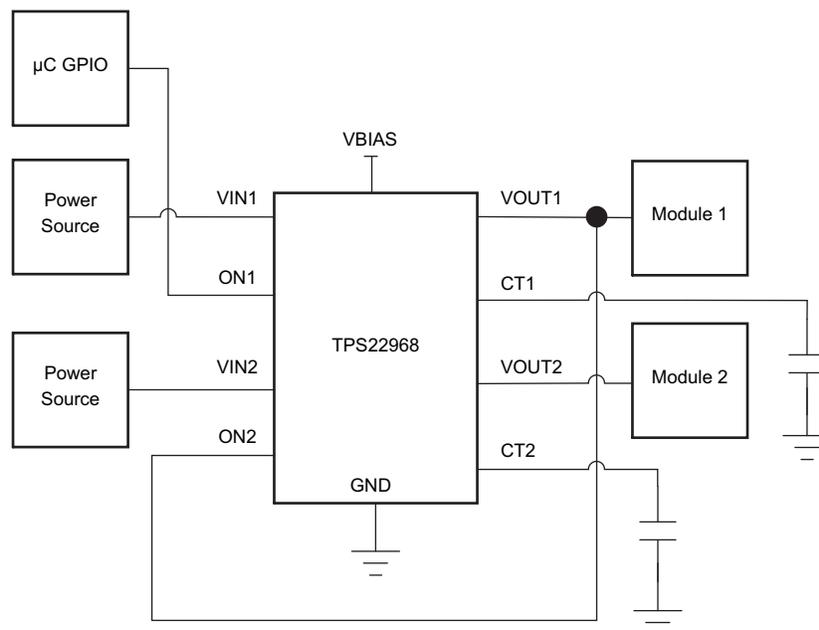

VIN1 must be greater V_{IH} .

图 33. Power Sequencing Without a GPIO Input

Application Information (接下页)

10.1.4 Reverse Current Blocking

In certain applications, it may be desirable to have reverse current blocking. Reverse current blocking prevents current from flowing from the output to the input of the load switch when the device is disabled. With the following configuration, the TPS22968 can be converted into a single-channel switch with reverse current blocking. In this configuration, VIN1 or VIN2 can be used as the input and VIN2 or VIN1 is the output. See [图 34](#).

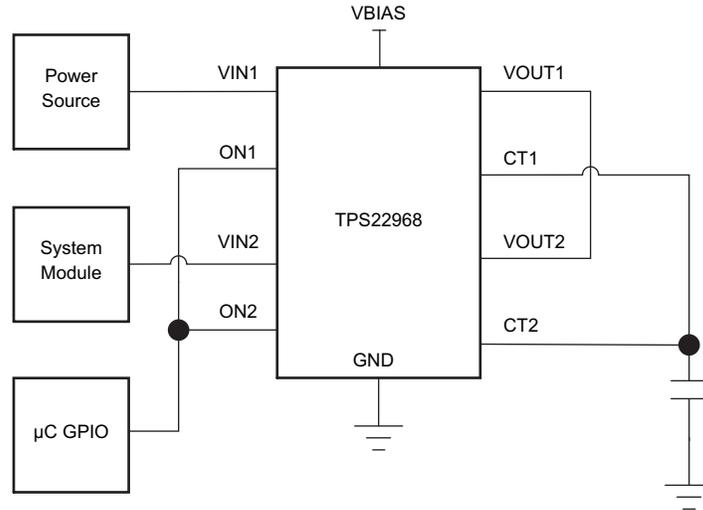


图 34. Reverse Current Blocking

10.2 Typical Application

This application demonstrates how the TPS22968 can be used to power downstream modules with large capacitances. The example in [图 35](#) TPS22968 is powering a 100- μF capacitive output load.

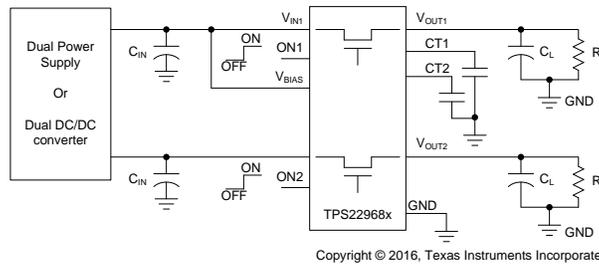


图 35. Typical Application Schematic for Powering a Downstream Module

10.2.1 Design Requirements

For this design example, use the following [表 3](#) as the input parameters.

表 3. Design Parameters

| DESIGN PARAMETER | EXAMPLE VALUE |
|----------------------------------|------------------|
| V_{IN} | 3.3 V |
| V_{BIAS} | 5 V |
| Load current | 4 A |
| Output capacitance (C_L) | 22 μF |
| Allowable inrush current on VOUT | 0.33 A |

10.2.2 Detailed Design Procedure

To begin the design process, the designer must know the following:

- V_{IN} voltage
- V_{BIAS} voltage
- Load current
- Allowable inrush current on VOUT due to C_L capacitor

10.2.2.1 V_{IN} to V_{OUT} Voltage Drop

The V_{IN} to V_{OUT} voltage drop in the device is determined by the R_{ON} of the device and the load current. The R_{ON} of the device depends upon the V_{IN} and V_{BIAS} conditions of the device. Refer to the R_{ON} specification of the device in the [Electrical Characteristics \(\$V_{BIAS} = 5\text{ V}\$ \)](#) and [Electrical Characteristics \(\$V_{BIAS} = 2.5\text{ V}\$ \)](#). After the R_{ON} of the device is determined based upon the V_{IN} and V_{BIAS} conditions, use [公式 2](#) to calculate the V_{IN} to V_{OUT} voltage drop:

$$\Delta V = I_{LOAD} \times R_{ON}$$

where

- ΔV is the voltage drop from V_{IN} to V_{OUT}
 - I_{LOAD} is the load current
 - R_{ON} is the On-resistance of the device for a specific V_{IN} and V_{BIAS} combination
- (2)

An appropriate I_{LOAD} must be chosen such that the I_{MAX} specification of the device is not violated.

10.2.2.2 Inrush Current

To determine how much inrush current is caused by the C_L capacitor, use [公式 3](#).

$$I_{INRUSH} = C_L \times \frac{dV_{OUT}}{dt}$$

where

- I_{INRUSH} is the amount of inrush caused by C_L
- C_L is the capacitance on VOUT
- dt is the time it takes for change in V_{OUT} during the ramp up of VOUT when the device is enabled
- dV_{OUT} is the change in V_{OUT} during the ramp up of VOUT when the device is enabled (3)

The device offers adjustable rise time for VOUT. This feature allows the user to control the inrush current during turnon through the CTx pins. The appropriate rise time can be calculated using the design requirements and the inrush current equation (公式 3). See 公式 4 and 公式 5.

$$330 \text{ mA} = 22 \text{ } \mu\text{F} \times 3.3 \text{ V} / \text{dt} \quad (4)$$

$$\text{dt} = 220 \text{ } \mu\text{s} \quad (5)$$

To ensure an inrush current of less than 330 mA, choose a CT based on 表 1 or 公式 1 value that yields a rise time of more than 220 μs . See the oscilloscope captures in the *Application Curves* for an example of how the CT capacitor can be used to reduce inrush current. See 表 1 for correlation between rise times and CT values.

An appropriate C_L value must be placed on VOUT such that the I_{MAX} and I_{PLS} specifications of the device are not violated.

10.2.2.3 Thermal Considerations

The maximum IC junction temperature must be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation, $P_{\text{D(max)}}$ for a given output current and ambient temperature, use 公式 6.

$$P_{\text{D(MAX)}} = \frac{T_{\text{J(MAX)}} - T_{\text{A}}}{R_{\theta\text{JA}}}$$

where

- $P_{\text{D(max)}}$ is the maximum allowable power dissipation
- $T_{\text{J(max)}}$ is the maximum allowable junction temperature (125°C for the TPS22968)
- T_{A} is the ambient temperature of the device
- $R_{\theta\text{JA}}$ is the junction to air thermal impedance. See the *Thermal Information* table. This parameter is highly dependent upon board layout. (6)

公式 7 到 公式 10 和 公式 11 到 公式 13 show two examples to determine how to use this information correctly:

For $V_{\text{BIAS}} = 5 \text{ V}$, $V_{\text{IN}} = 5 \text{ V}$, the maximum ambient temperature with a 4-A load through each channel can be determined by using 公式 7 到 公式 10:

$$P_{\text{D}} = I^2 \times R \times 2 \text{ (multiplied by 2 because there are two channels)} \quad (7)$$

$$2 \times I^2 \times R = \frac{T_{\text{J(MAX)}} - T_{\text{A}}}{R_{\theta\text{JA}}} \quad (8)$$

$$T_{\text{A}} = T_{\text{J(MAX)}} - R_{\theta\text{JA}} \times 2 \times I^2 \times R \quad (9)$$

$$T_{\text{A}} = 125^\circ\text{C} - 62.5^\circ\text{C/W} \times 2 \times (4 \text{ A})^2 \times 27 \text{ m}\Omega = 71^\circ\text{C} \quad (10)$$

For $V_{\text{BIAS}} = 5 \text{ V}$, $V_{\text{IN}} = 5 \text{ V}$, the maximum continuous current for an ambient temperature of 85°C with the same current flowing through each channel can be determined by using 公式 11 到 公式 13:

$$2 \times I^2 \times R = \frac{T_{\text{J(MAX)}} - T_{\text{A}}}{R_{\theta\text{JA}}} \quad (11)$$

$$I = \sqrt{\frac{T_{J(MAX)} - T_A}{2 \times R \times R_{\theta JA}}} \tag{12}$$

$$I = \sqrt{\frac{125^{\circ}\text{C} - 105^{\circ}\text{C}}{2 \times 27\text{m}\Omega \times 62.5^{\circ}\text{C/W}}} = 3.44 \text{ A per channel} \tag{13}$$

10.2.3 Application Curves

The twp scope captures show the usage of a CT capacitor in conjunction with the device. A higher CT value results in a slower rise and a lower inrush current.

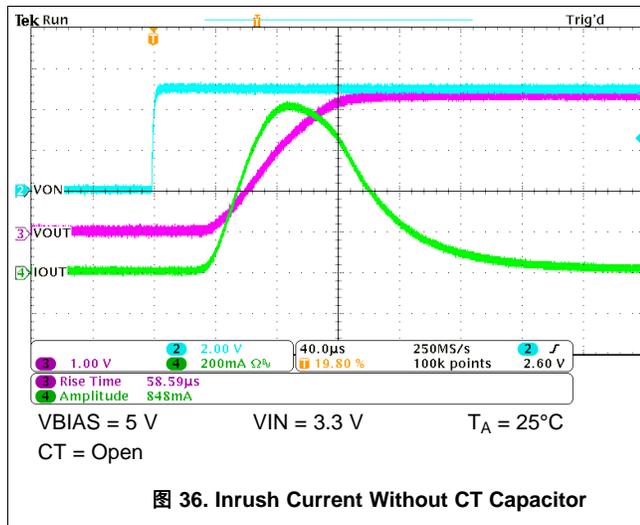


图 36. Inrush Current Without CT Capacitor

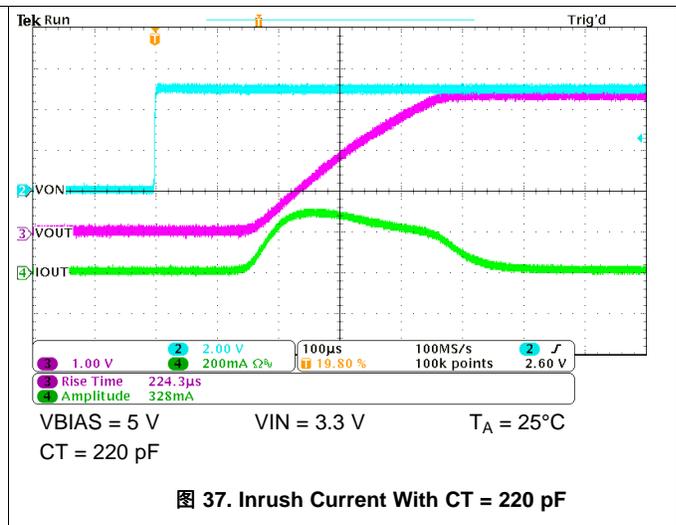


图 37. Inrush Current With CT = 220 pF

11 Power Supply Recommendations


The device is designed to operate from a V_{BIAS} range of 2.5 V to 5.5 V and V_{IN} range of 0.8 V to 5.5 V. This supply must be well regulated and placed as close to the device pin as possible with the recommended 1- μ F bypass capacitor. If the supply is located more than a few inches from the device pins, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10 μ F may be sufficient.

12 Layout

12.1 Layout Guidelines

- V_{IN} and V_{OUT} traces must be as short and wide as possible to accommodate for high current.
- Use vias under the exposed thermal pad for thermal relief for high current operation.
- V_{INx} pins must be bypassed to ground with low-ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 1- μ F ceramic with X5R or X7R dielectric. This capacitor must be placed as close to the device pins as possible.
- V_{OUTx} pins must be bypassed to ground with low-ESR ceramic bypass capacitors. The typical recommended bypass capacitance is one-tenth of the V_{INx} bypass capacitor of X5R or X7R dielectric rating. This capacitor must be placed as close to the device pins as possible.
- The V_{BIAS} pin must be bypassed to ground with low-ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 0.1- μ F ceramic with X5R or X7R dielectric.
- The CTx capacitors must be placed as close to the device pins as possible. The typical recommended CTx capacitance is a capacitor of X5R or X7R dielectric rating with a rating of 25 V or higher.

12.2 Layout Example

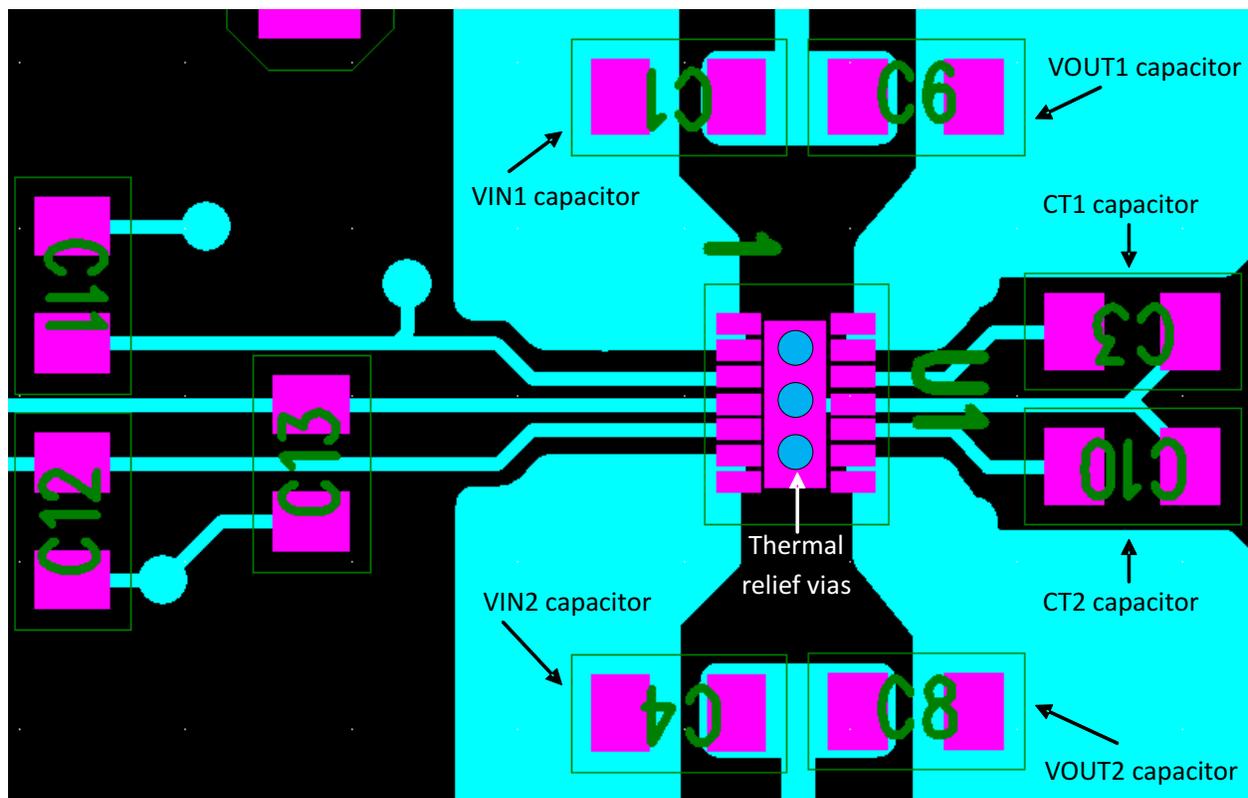

13 器件和文档支持

13.1 器件支持

13.1.1 开发支持

有关 TPS22968 和 TPS22968-Q1 PSpice 瞬态模型，请参阅 [SLVMA29](#)。

有关 TPS22968N 和 TPS22968N-Q1 PSpice 瞬态模型，请参阅 [SLVMBA9](#)。

13.2 文档支持

13.2.1 相关文档

请参阅如下相关文档：

- 《管理浪涌电流》，[SLVA670A](#)
- 《负载开关功耗之静态电流与关断电流》，[SLVA757](#)
- 《TPS22968EVM-007 双路 4A 负载开关》，[SLVUA30](#)
- 《负载开关热效应注意事项》，[SLVUA74](#)
- 《TPS22968/68N-Q1 双通道 5.5V 4A 27mΩ 负载开关 EVM 用户指南》，[SLVUAE2A](#)
- 《TPS22968NEVM 双路 4A 负载开关》，[SLVUAL0](#)

13.3 相关链接

下面的表格列出了快速访问链接。类别包括技术文档、支持与社区资源、工具和软件，以及申请样片或购买产品的快速链接。

表 4. 相关链接

| 器件 | 产品文件夹 | 样片与购买 | 技术文档 | 工具和软件 | 支持和社区 |
|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| TPS22968 | 请单击此处 |
| TPS22968N | 请单击此处 |

13.4 接收文档更新通知

如需接收文档更新通知，请访问 ti.com 上的器件产品文件夹。请单击右上角的通知我 进行注册，即可收到任意产品信息更改每周摘要。有关更改的详细信息，请查看任意已修订文档中包含的修订历史记录。

13.5 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

TI E2E™ 在线社区 [TI 的工程师对工程师 \(E2E\) 社区](#)。此社区的创建目的在于促进工程师之间的协作。在 e2e.ti.com 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

设计支持 [TI 参考设计支持](#) 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

13.6 商标

E2E is a trademark of Texas Instruments.

Ultrabook is a trademark of Intel.

13.7 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

13.8 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 机械、封装和可订购信息

以下页面包括机械、封装和可订购信息。这些信息是指定器件的最新可用数据。这些数据发生变化时，我们可能不会另行通知或修订此文档。如欲获取此产品说明书的浏览器版本，请参阅左侧的导航栏。

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS22968DPUR | Active | Production | WSON (DPU) 14 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUR.A | Active | Production | WSON (DPU) 14 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUR.B | Active | Production | WSON (DPU) 14 | 3000 LARGE T&R | - | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUT | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUT.A | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUTG4 | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968DPUTG4.A | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 105 | RB968 |
| TPS22968NDPUR | Active | Production | WSON (DPU) 14 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | RB968N |
| TPS22968NDPUR.A | Active | Production | WSON (DPU) 14 | 3000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | RB968N |
| TPS22968NDPUT | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | RB968N |
| TPS22968NDPUT.A | Active | Production | WSON (DPU) 14 | 250 SMALL T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 105 | RB968N |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS22968 :

- Automotive : [TPS22968-Q1](#)


NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

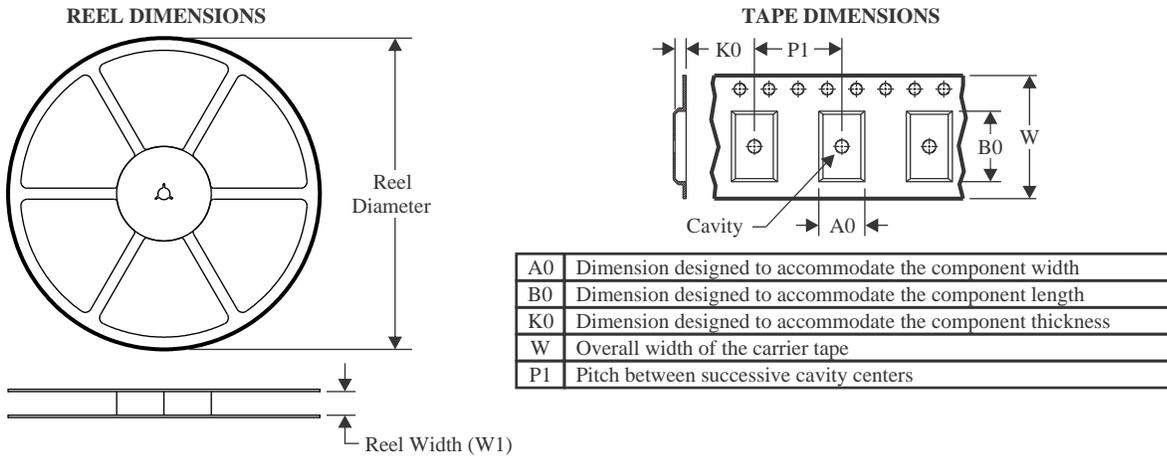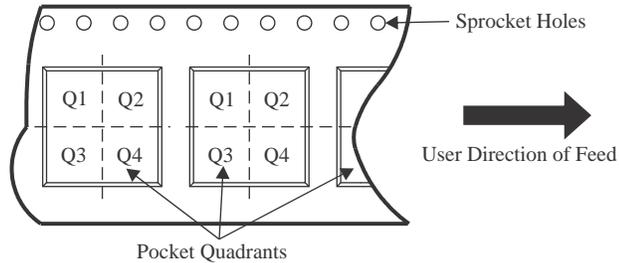TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal
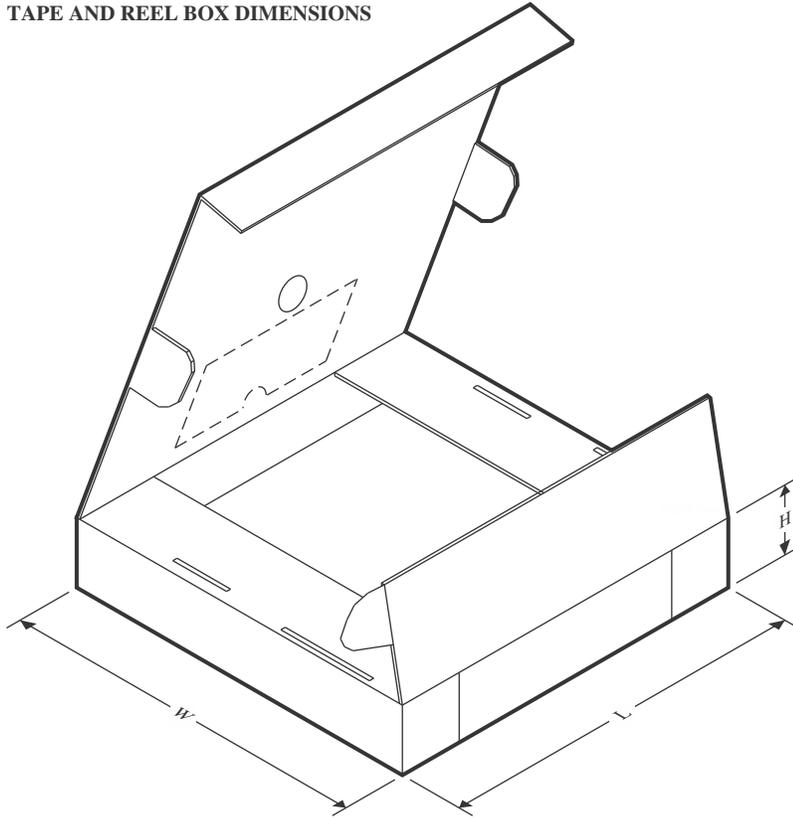
| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS22968DPUR | WSON | DPU | 14 | 3000 | 180.0 | 8.4 | 2.25 | 3.25 | 1.05 | 4.0 | 8.0 | Q1 |
| TPS22968DPUT | WSON | DPU | 14 | 250 | 180.0 | 8.4 | 2.25 | 3.25 | 1.05 | 4.0 | 8.0 | Q1 |
| TPS22968DPUTG4 | WSON | DPU | 14 | 250 | 180.0 | 8.4 | 2.25 | 3.25 | 1.05 | 4.0 | 8.0 | Q1 |
| TPS22968NDPUR | WSON | DPU | 14 | 3000 | 180.0 | 8.4 | 2.25 | 3.25 | 1.05 | 4.0 | 8.0 | Q1 |
| TPS22968NDPUT | WSON | DPU | 14 | 250 | 180.0 | 8.4 | 2.25 | 3.25 | 1.05 | 4.0 | 8.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS22968DPUR | WSON | DPU | 14 | 3000 | 210.0 | 185.0 | 35.0 |
| TPS22968DPUT | WSON | DPU | 14 | 250 | 210.0 | 185.0 | 35.0 |
| TPS22968DPUTG4 | WSON | DPU | 14 | 250 | 210.0 | 185.0 | 35.0 |
| TPS22968NDPUR | WSON | DPU | 14 | 3000 | 182.0 | 182.0 | 20.0 |
| TPS22968NDPUT | WSON | DPU | 14 | 250 | 182.0 | 182.0 | 20.0 |

THERMAL PAD MECHANICAL DATA

DPU (R-PWSON-N14)


PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

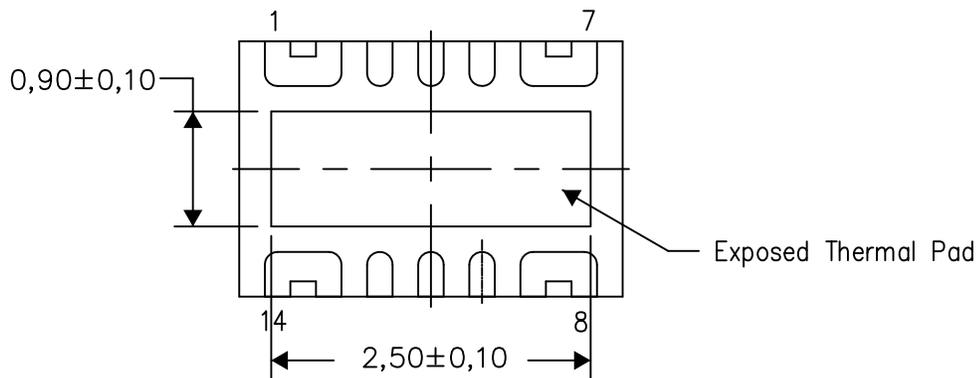

Bottom View


Exposed Thermal Pad Dimensions

4211395/C 04/15

NOTE: All linear dimensions are in millimeters

DPU (R-PWSON-N14)

PLASTIC SMALL OUTLINE NO-LEAD

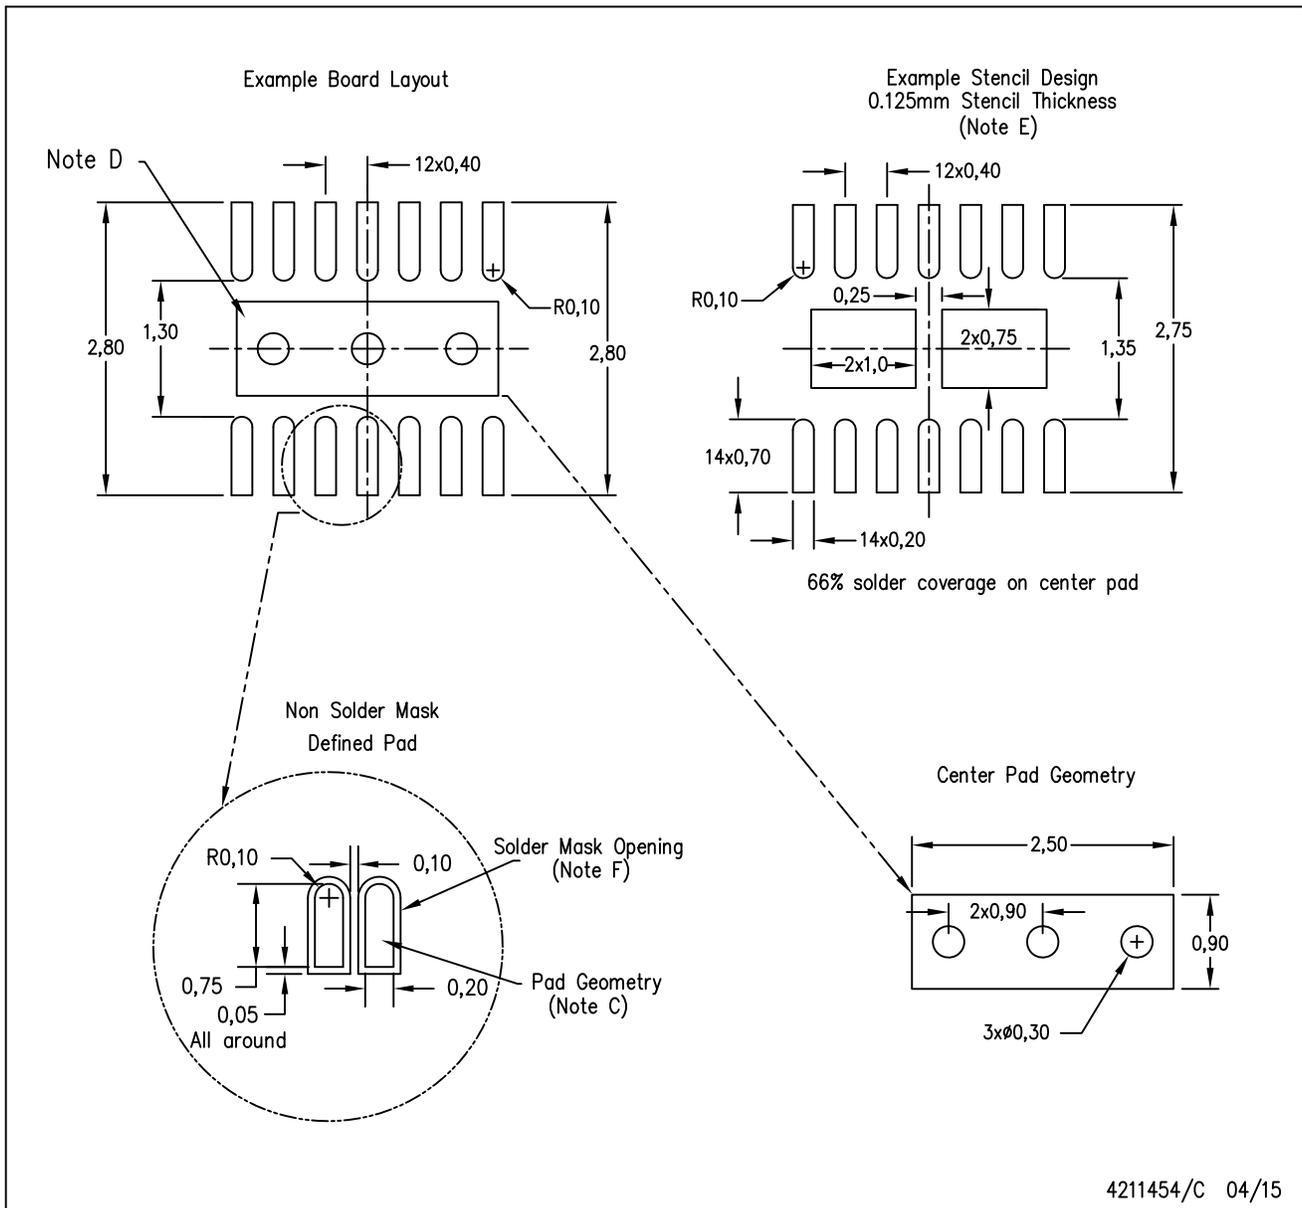

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com <<http://www.ti.com>>.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司