



TPS22969 5.5V, 6A, 4.4mΩ 导通电阻负载开关

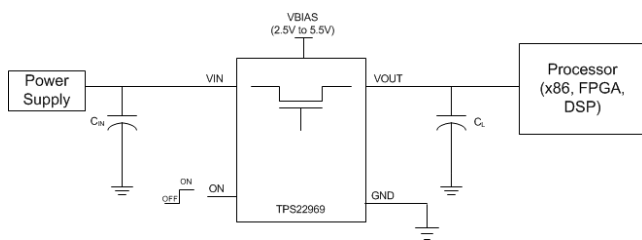
1 特性

- 集成单通道负载开关
- VBIAS 电压范围: 2.5V 至 5.5V
- VIN 电压范围: 0.8V 至 5.5V
- 超低 R_{ON} 电阻
 - V_{IN} = 1.05V (V_{BIAS} = 5V) 时, R_{ON} = 4.4mΩ
- 6A 最大持续开关电流
- 低静态电流 (V_{BIAS} = 5V 时为 20μA (典型值))
- 低关断电流 (V_{BIAS} = 5V 时为 1μA (典型值))
- 低控制输入阈值允许使用 1.2V 或更高通用输入输出 (GPIO) 接口
- V_{BIAS} 和 V_{IN} 范围内的受控和固定转换率
 - V_{IN} = 1.05V (V_{BIAS} = 5V) 时, t_R = 599μs
- 快速输出放电 (QOD)
- 带有散热焊盘的小外形尺寸无引线 (SON) 8 端子封装
- 静电放电 (ESD) 性能经测试符合 JESD 22 规范
 - 2kV 人体模型 (HBM)
 - 1kV 充电器件模型 (CDM)

2 应用范围

- Ultrabook™/笔记本电脑
- 台式个人电脑
- 工业用个人电脑
- Chromebook
- 服务器
- 机顶盒
- 电信系统
- 平板电脑

4 简化电路原理图



典型应用: 驱动用于处理器的高电流内核电源轨

3 说明

TPS22969 是一款小型, 超低 R_{ON}, 单通道负载开关, 此开关具有受控开启功能。此器件包含一个可在 0.8V 至 5.5V 的输入电压范围内运行的 N 通道金属氧化物半导体场效应晶体管 (MOSFET), 并且支持 6A 的最大持续电流。


器件的超低 R_{ON} 和高电流处理能力的组合使得此器件非常适合于驱动具有非常严格压降耐受的处理器的电源轨。器件的受控上升时间大大减少了由大容量负载电容导致的涌入电流, 从而减少或消除了电源损耗。此开关可由 ON 端子单独控制, 此端子能够与微控制器或低压离散逻辑电路生成的低压控制信号直接对接。通过集成一个 224Ω 下拉电阻器, 在开关关闭时实现快速输出放电 (QOD), 此器件进一步减少总体解决方案尺寸。

TPS22969 采用小型 3mm x 3mm SON-8 封装 (DNY)。DNY 封装集成有一个散热焊盘, 此散热焊盘可在高电流和高温应用中实现高功率耗散。器件在自然通风环境下的额定运行温度范围为 -40°C 至 85°C。

器件信息

订货编号	封装	封装尺寸
TPS22969DNY	超薄小外形尺寸封装 (WSON) (8)	3mm x 3mm

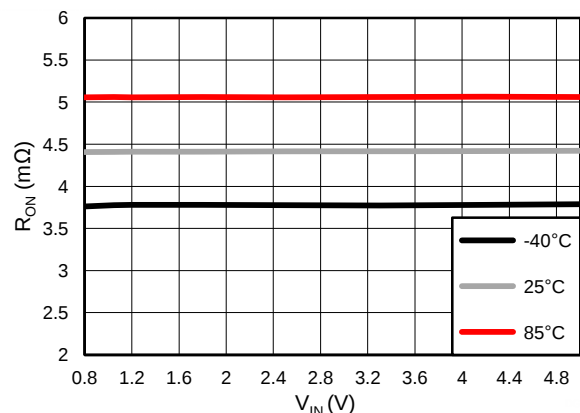R_{ON} 与 V_{IN} 之间的关系 (此时, V_{BIAS} = 5V, I_{OUT} = -200mA)



目录

1	特性	1	8.1	Overview	14
2	应用范围	1	8.2	Functional Block Diagram	14
3	说明	1	8.3	Feature Description	15
4	简化电路原理图	1	9	Applications and Implementation	16
5	修订历史记录	2	9.1	Application Information	16
6	Terminal Configuration and Functions	3	9.2	Typical Application	16
7	Specifications	3	10	Power Supply Recommendations	19
7.1	Absolute Maximum Ratings	3	11	Layout	19
7.2	Handling Ratings	4	11.1	Layout Guidelines	19
7.3	Recommended Operating Conditions	4	11.2	Layout Example	20
7.4	Thermal Information	4	12	器件和文档支持	21
7.5	Electrical Characteristics	5	12.1	Trademarks	21
7.6	Electrical Characteristics	6	12.2	Electrostatic Discharge Caution	21
7.7	Switching Characteristics	7	12.3	Glossary	21
7.8	Typical Characteristics	9	13	机械封装和可订购信息	21
8	Detailed Description	14			


5 修订历史记录

Changes from Original (February 2014) to Revision A

Page

• 完整版的最初发布版本。	1
---------------	---

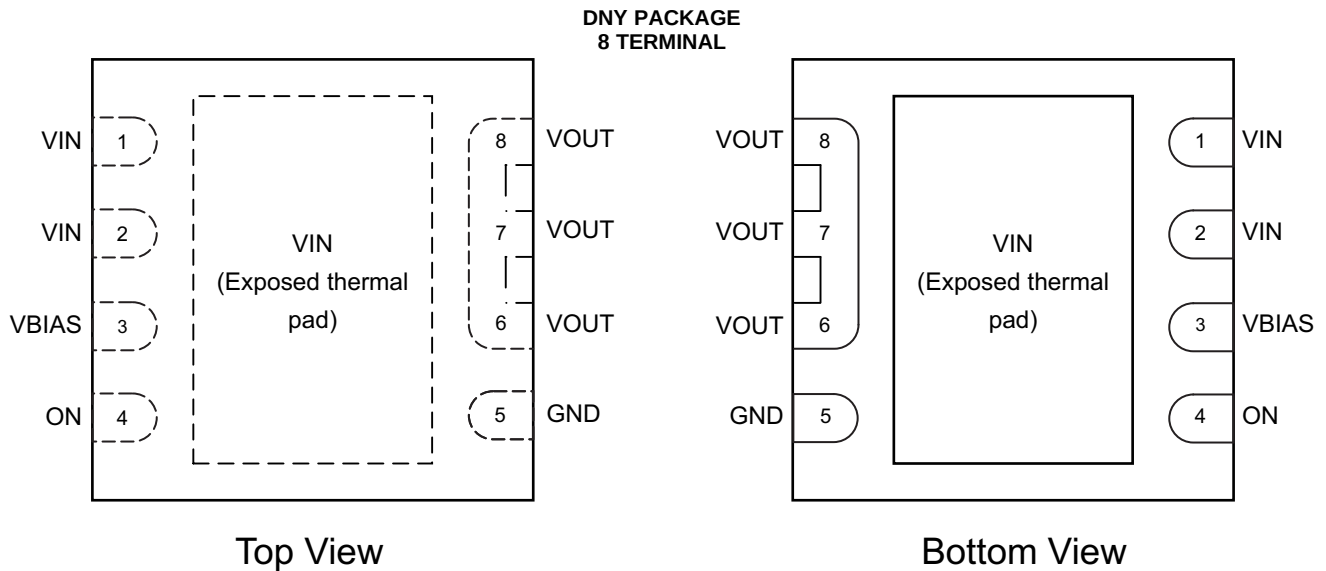6 Terminal Configuration and Functions



Terminal Functions

TERMINAL		I/O	DESCRIPTION
NAME	NO.		
VIN	1, 2	I	Switch input. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.
VIN	Exposed thermal Pad	I	Switch input. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.
VBIAS	3	I	Bias voltage. Power supply to the device.
ON	4	I	Active high switch control input. Do not leave floating.
GND	5	–	Ground.
VOUT	6, 7, 8	O	Switch output. Place ceramic bypass capacitor(s) between this terminal and GND. See the Detailed Description section for more information.

7 Specifications

7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
V _{IN}	Input voltage range	–0.3	6	V
V _{BIAS}	Bias voltage range	–0.3	6	V
V _{OUT}	Output voltage range	–0.3	6	V
V _{ON}	ON terminal voltage range	–0.3	6	V
I _{MAX}	Maximum Continuous Switch Current		6	A
I _{PLS}	Maximum Pulsed Switch Current, pulse < 300-μs, 2% duty cycle		8	A
T _A	Operating free-air temperature range	–40	85	°C
T _J	Maximum junction temperature		125	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

7.2 Handling Ratings

		MIN	MAX	UNIT
T _{STG}	Storage temperature range	–65	150	°C
T _{LEAD}	Maximum lead temperature (10-s soldering time)		300	°C
V _{ESD} ⁽¹⁾	Human-Body Model (HBM) ⁽²⁾		2	kV
	Charged-Device Model (CDM) ⁽³⁾		1	kV

- (1) Electrostatic discharge (ESD) to measure device sensitivity and immunity to damage caused by assembly line electrostatic discharges in to the device.
- (2) Level listed above is the passing level per ANSI, ESDA, and JEDEC JS-001. JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (3) Level listed above is the passing level per EIA-JEDEC JESD22-C101. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V _{IN}	Input voltage range		0.8	V _{BIAS}	V
V _{BIAS}	Bias voltage range		2.5	5.5	V
V _{ON}	ON voltage range		0	5.5	V
V _{OUT}	Output voltage range			V _{IN}	V
V _{IH, ON}	High-level voltage, ON	V _{BIAS} = 2.5V to 5.5V	1.2	5.5	V
V _{IL, ON}	Low-level voltage, ON	V _{BIAS} = 2.5V to 5.5V	0	0.5	V
C _{IN}	Input Capacitor		1 ⁽¹⁾		μF

- (1) Refer to [Detailed Description](#) section.

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TPS22969	UNIT
		DNY 8 TERMINALS	
R _{θJA}	Junction-to-ambient thermal resistance	44.6	°C/W
R _{θJctop}	Junction-to-case (top) thermal resistance	44.4	
R _{θJB}	Junction-to-board thermal resistance	17.6	
ψ _{JT}	Junction-to-top characterization parameter	0.4	
ψ _{JB}	Junction-to-board characterization parameter	17.4	
R _{θJcbot}	Junction-to-case (bottom) thermal resistance	1.1	

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

7.5 Electrical Characteristics

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ (Full) and $V_{\text{BIAS}} = 5.0\text{V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS		T _A	MIN	TYP	MAX	UNIT
CURRENTS AND THRESHOLDS								
I _Q , V _{BIAS}	V _{BIAS} quiescent current	I _{OUT} = 0, V _{IN} = V _{BIAS} , V _{ON} = 5.0V		Full		20.4	26.0	μA
I _{SD} , V _{BIAS}	V _{BIAS} shutdown current	V _{ON} = 0V, V _{OUT} = 0V		Full		1.1	1.5	μA
I _{SD} , V _{IN}	V _{IN} shutdown current	V _{ON} = 0V, V _{OUT} = 0V	V _{IN} = 5.0V	Full		0.1		μA
			V _{IN} = 3.3V			0.1		
			V _{IN} = 1.8V			0.1		
			V _{IN} = 1.05V			0.1		
			V _{IN} = 0.8V			0.1		
I _{ON}	ON terminal leakage current	V _{ON} = 5.5V		Full			0.1	μA
V _{HYS, ON}	ON terminal hysteresis	V _{BIAS} = V _{IN}		25°C		113		mV
RESISTANCE CHARACTERISTICS								
R _{ON}	On-state resistance	I _{OUT} = −200mA, V _{BIAS} = 5.0V	V _{IN} = 5.0V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V _{IN} = 3.3V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V _{IN} = 2.5V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V _{IN} = 1.8V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V _{IN} = 1.05V	25°C		4.4	5.0	mΩ
				Full			5.6	
			V _{IN} = 0.8V	25°C		4.4	5.0	mΩ
				Full			5.6	
			I _{OUT} = −6A, V _{BIAS} = 5.0V	V _{IN} = 1.05V	Full		4.6	5.8 ⁽¹⁾
R _{PD}	Output pulldown resistance	V _{IN} = 5.0V, V _{ON} = 0V, V _{OUT} = 1V		Full		224	233	Ω

(1) Parameter verified by design and characterization, but not tested in production.

7.6 Electrical Characteristics

Unless otherwise noted, the specification in the following table applies over the operating ambient temperature $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$ (Full) and $V_{\text{BIAS}} = 2.5\text{V}$. Typical values are for $T_A = 25^{\circ}\text{C}$ unless otherwise noted.

PARAMETER		TEST CONDITIONS		T _A	MIN	TYP	MAX	UNIT
CURRENTS AND THRESHOLDS								
I _Q , V _{BIAS}	V _{BIAS} quiescent current	I _{OUT} = 0, V _{IN} = V _{BIAS} , V _{ON} = 5.0V		Full		9.9	12.5	μA
I _{SD} , V _{BIAS}	V _{BIAS} shutdown current	V _{ON} = 0V, V _{OUT} = 0V		Full		0.5	0.65	μA
I _{SD} , V _{IN}	V _{IN} shutdown current	V _{ON} = 0V, V _{OUT} = 0V	V _{IN} = 2.5V	Full			0.1	μA
			V _{IN} = 1.8V				0.1	
			V _{IN} = 1.05V				0.1	
			V _{IN} = 0.8V				0.1	
I _{ON}	ON terminal input leakage current	V _{ON} = 5.5V		Full			0.1	μA
V _{HYS} , ON	ON terminal hysteresis	V _{BIAS} = V _{IN}		25°C		83		mV
RESISTANCE CHARACTERISTICS								
R _{ON}	On-state resistance	I _{OUT} = −200mA, V _{BIAS} = 2.5V	V _{IN} =2.5V	25°C		4.7	5.3	mΩ
				Full			6.0	
			V _{IN} =1.8V	25°C		4.6	5.2	mΩ
				Full			5.8	
			V _{IN} =1.05V	25°C		4.5	5.1	mΩ
				Full			5.7	
			V _{IN} = 0.8V	25°C		4.5	5.1	mΩ
				Full			5.7	
R _{PD}	Output pulldown resistance	V _{IN} = 2.5V, V _{ON} = 0V, V _{OUT} = 1V		Full		224	233	Ω


7.7 Switching Characteristics

Refer to the timing test circuit in [Figure 1](#) (unless otherwise noted) for references to external components used for the test condition in the switching characteristics table. Switching characteristics shown below are only valid for the power-up sequence where VIN and VBIAS are already in steady state condition before the ON terminal is asserted high.


PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
V _{IN} = 5V, V _{ON} = V _{BIAS} = 5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	2397		μs	
t _{OFF}	Turn-off time		4			
t _R	V _{OUT} rise time		2663			
t _F	V _{OUT} fall time		2			
t _D	Delay time		1009			
V _{IN} = 1.05V, V _{ON} = V _{BIAS} = 5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	1064		μs	
t _{OFF}	Turn-off time		4			
t _R	V _{OUT} rise time		599			
t _F	V _{OUT} fall time		2			
t _D	Delay time		727			
V _{IN} = 0.8V, V _{ON} = V _{BIAS} = 5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	981		μs	
t _{OFF}	Turn-off time		4			
t _R	V _{OUT} rise time		500			
t _F	V _{OUT} fall time		2			
t _D	Delay time		714			
V _{IN} = 2.5V, V _{ON} = 5V, V _{BIAS} = 2.5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	1576		μs	
t _{OFF}	Turn-off time		8			
t _R	V _{OUT} rise time		1372			
t _F	V _{OUT} fall time		2			
t _D	Delay time		865			
V _{IN} = 1.05V, V _{ON} = 5V, V _{BIAS} = 2.5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	1080		μs	
t _{OFF}	Turn-off time		8			
t _R	V _{OUT} rise time		604			
t _F	V _{OUT} fall time		2			
t _D	Delay time		738			
V _{IN} = 0.8V, V _{ON} = 5V, V _{BIAS} = 2.5V, T _A = 25°C (unless otherwise noted)						
t _{ON}	Turn-on time	R _L = 10Ω, C _L = 0.1μF	994		μs	
t _{OFF}	Turn-off time		8			
t _R	V _{OUT} rise time		502			
t _F	V _{OUT} fall time		2			
t _D	Delay time		723			

TPS22969

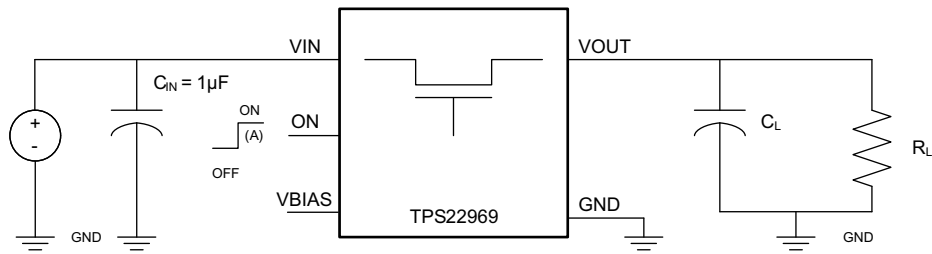ZHCSCB5A – MARCH 2014 – REVISED MARCH 2014

www.ti.com.cn

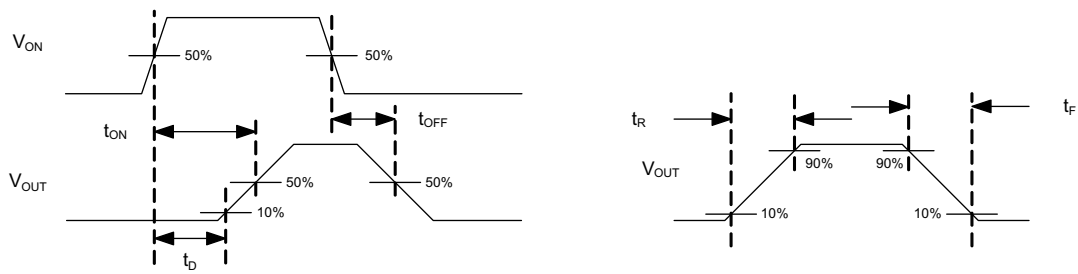
Timing Test Circuit















Timing Waveforms

(A) Rise and fall times of the control signal is 100ns.

Figure 1. Switching Characteristics Measurement Setup and Definitions

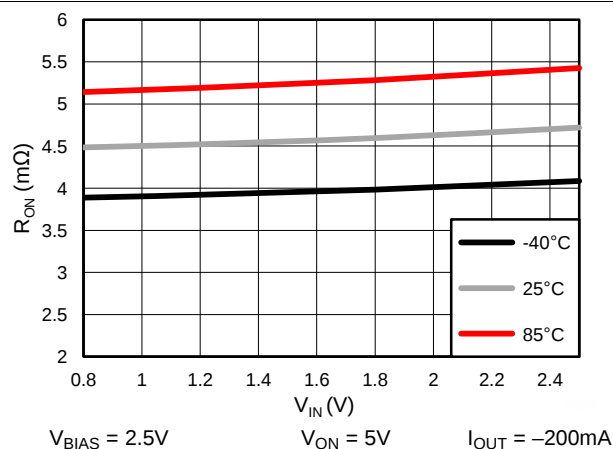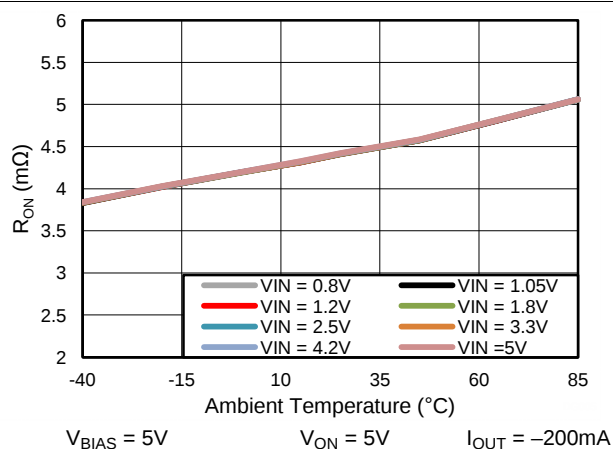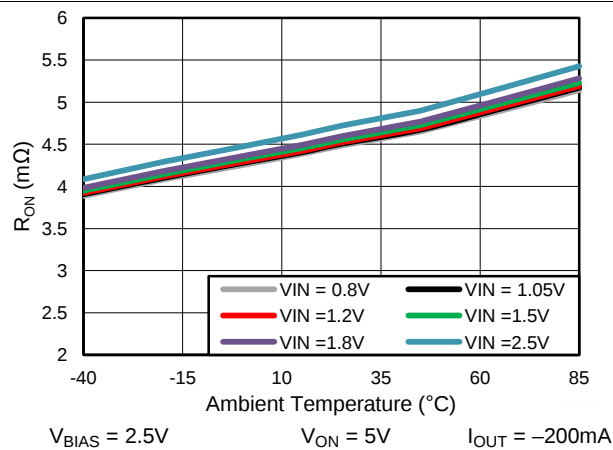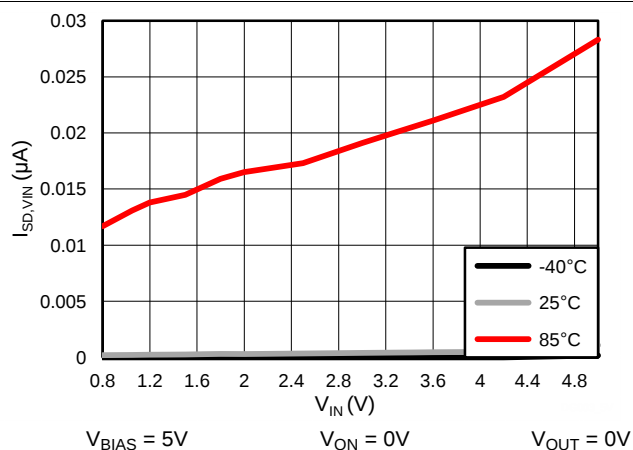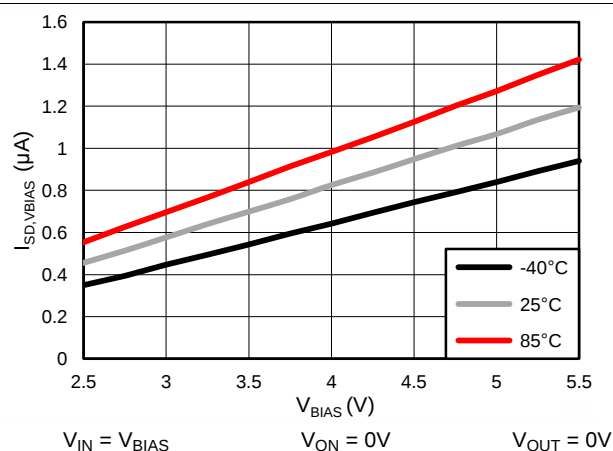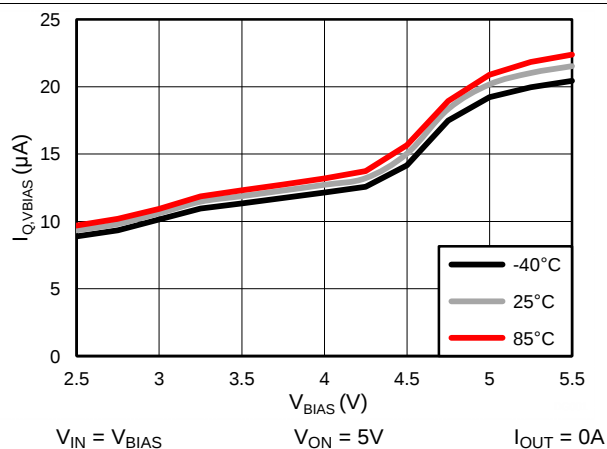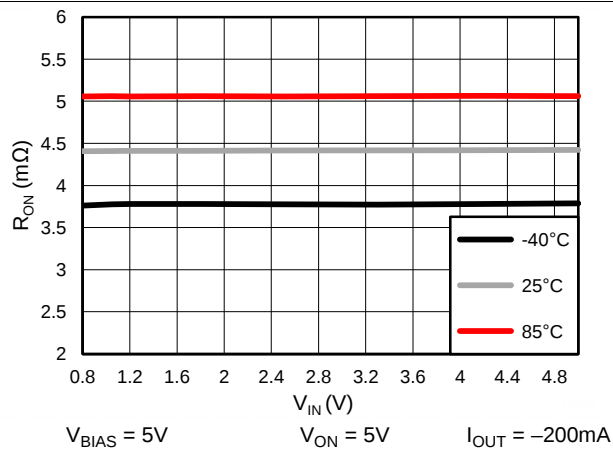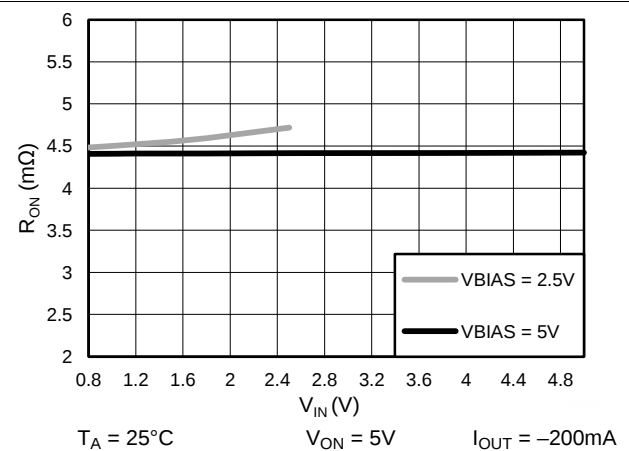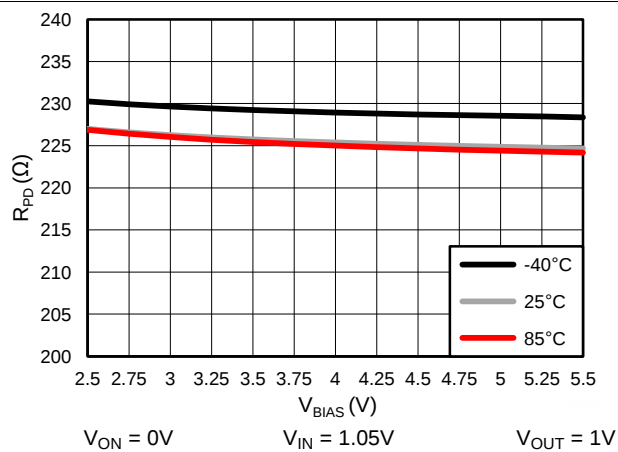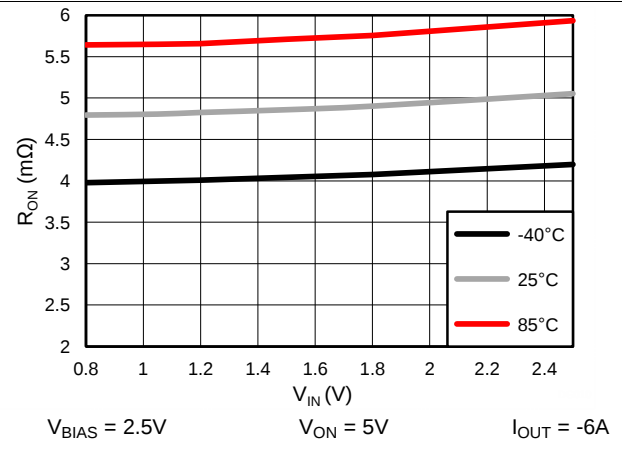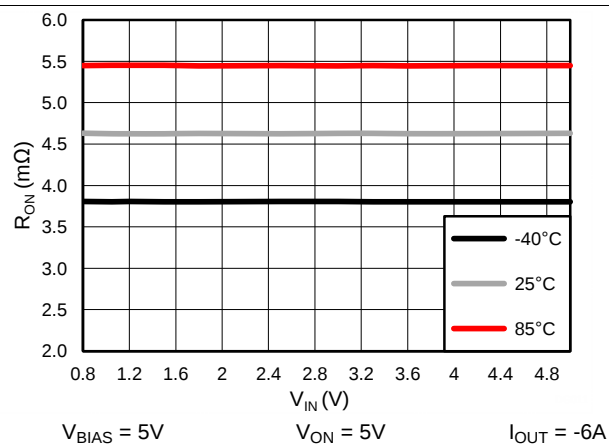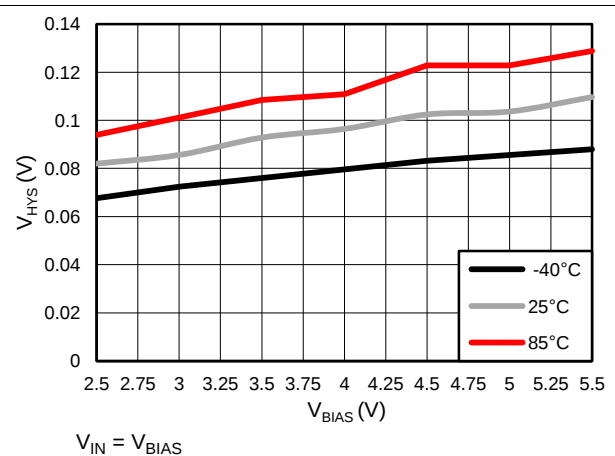7.8 Typical Characteristics



Typical Characteristics (continued)

Figure 8. R_{ON} vs V_{IN}

Figure 9. R_{ON} vs V_{IN}

Figure 10. R_{PD} vs V_{BIAS}

Figure 11. R_{ON} vs V_{IN} at 6A load

Figure 12. R_{ON} vs V_{IN} at 6A load

Figure 13. V_{HYS} vs V_{BIAS}

Typical Characteristics (continued)

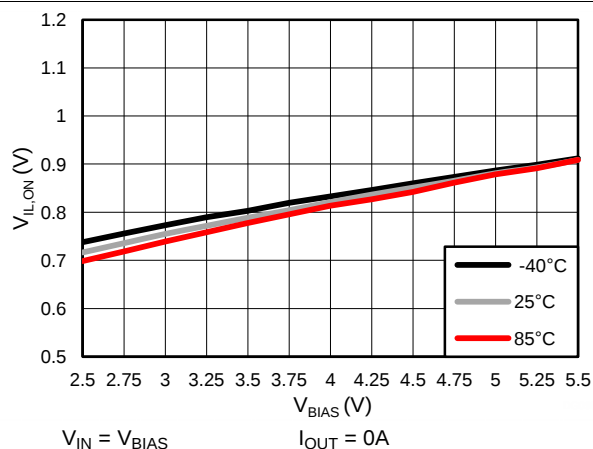


Figure 14. $V_{IL,ON}$ vs V_{BIAS}

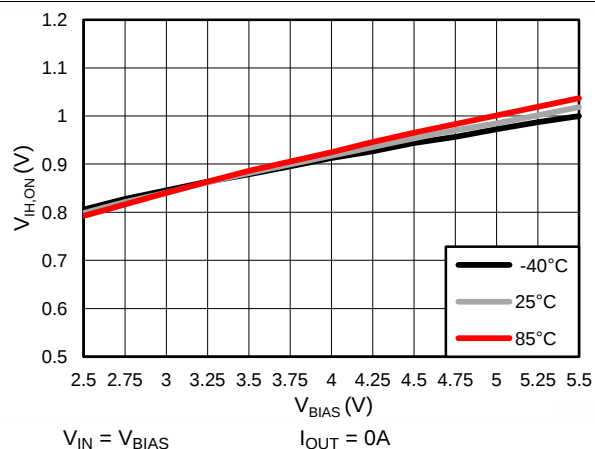


Figure 15. $V_{IH,ON}$ vs V_{BIAS}

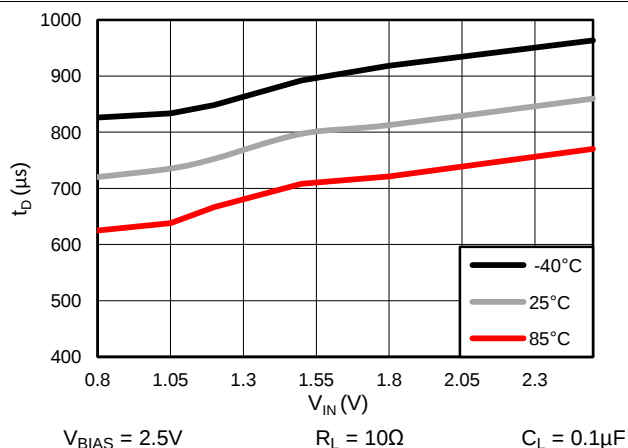


Figure 16. t_D vs V_{IN}

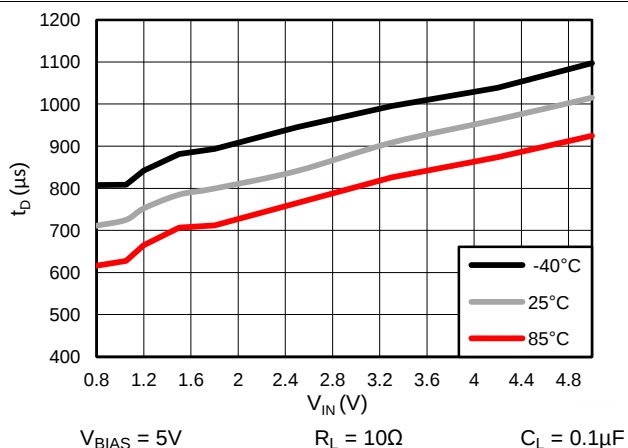


Figure 17. t_D vs V_{IN}

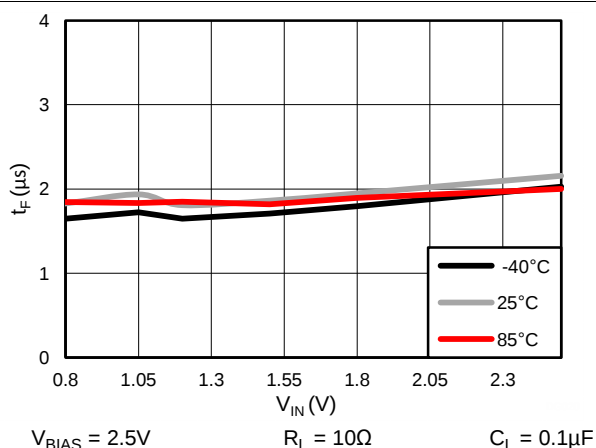


Figure 18. t_F vs V_{IN}

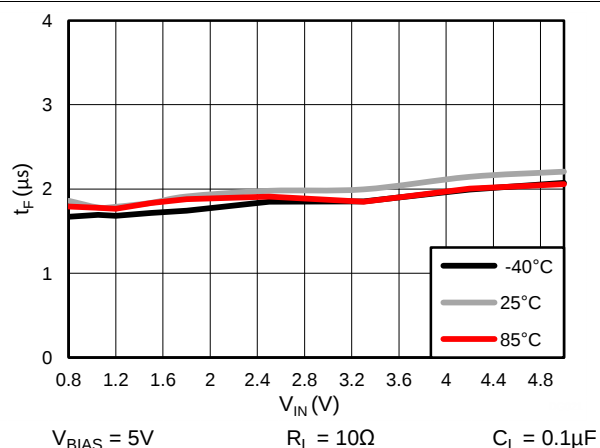
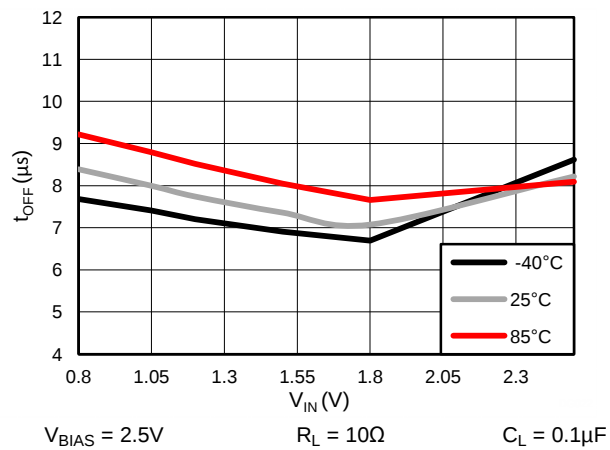
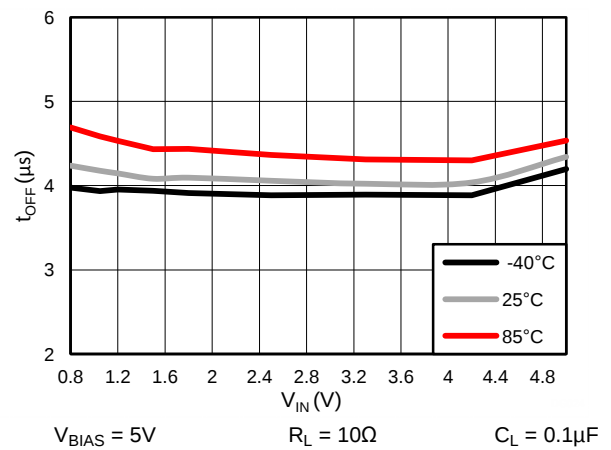
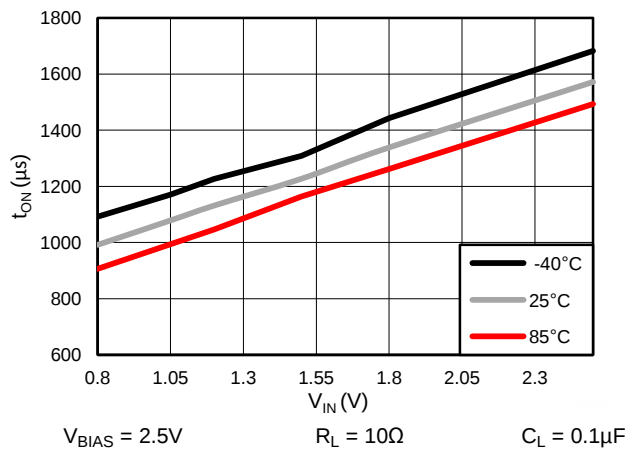
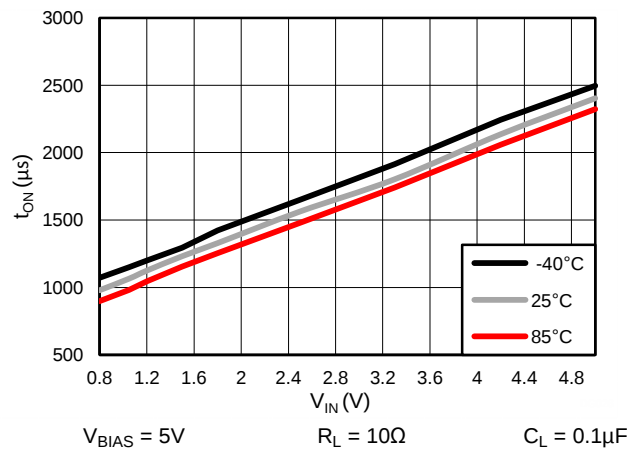
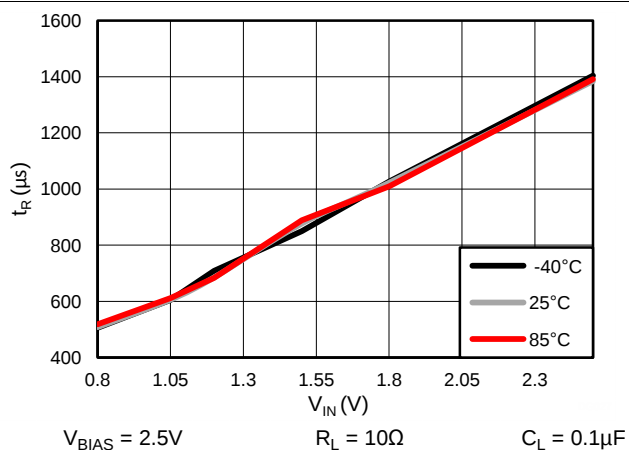
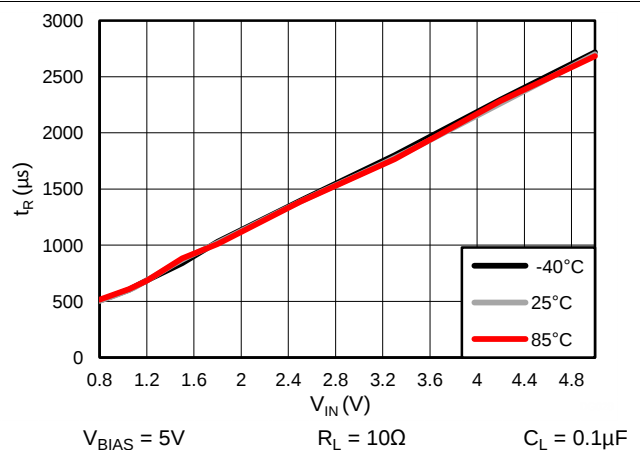
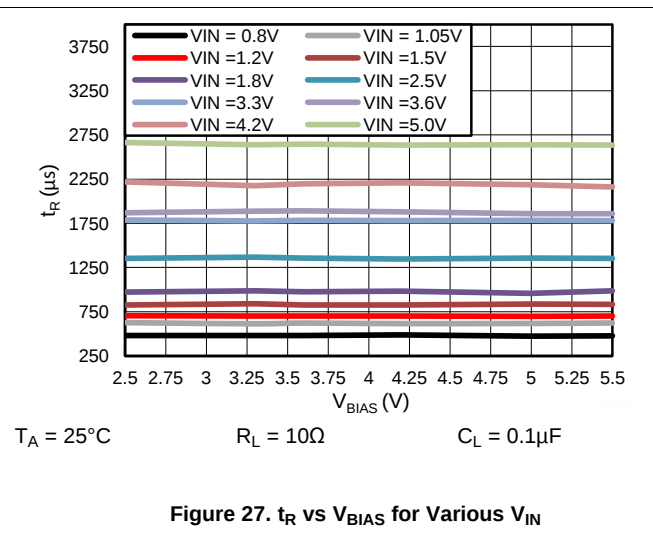
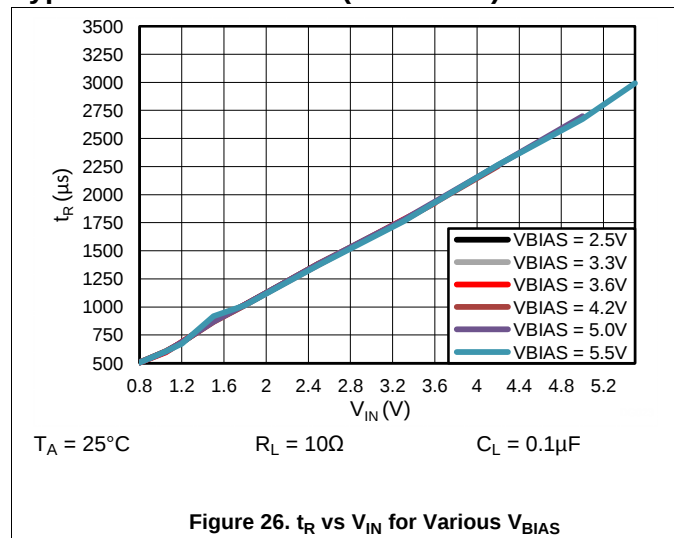


Figure 19. t_F vs V_{IN}

Typical Characteristics (continued)

Figure 20. t_{OFF} vs V_{IN}

Figure 21. t_{OFF} vs V_{IN}

Figure 22. t_{ON} vs V_{IN}

Figure 23. t_{ON} vs V_{IN}

Figure 24. t_R vs V_{IN}

Figure 25. t_R vs V_{IN}

Typical Characteristics (continued)



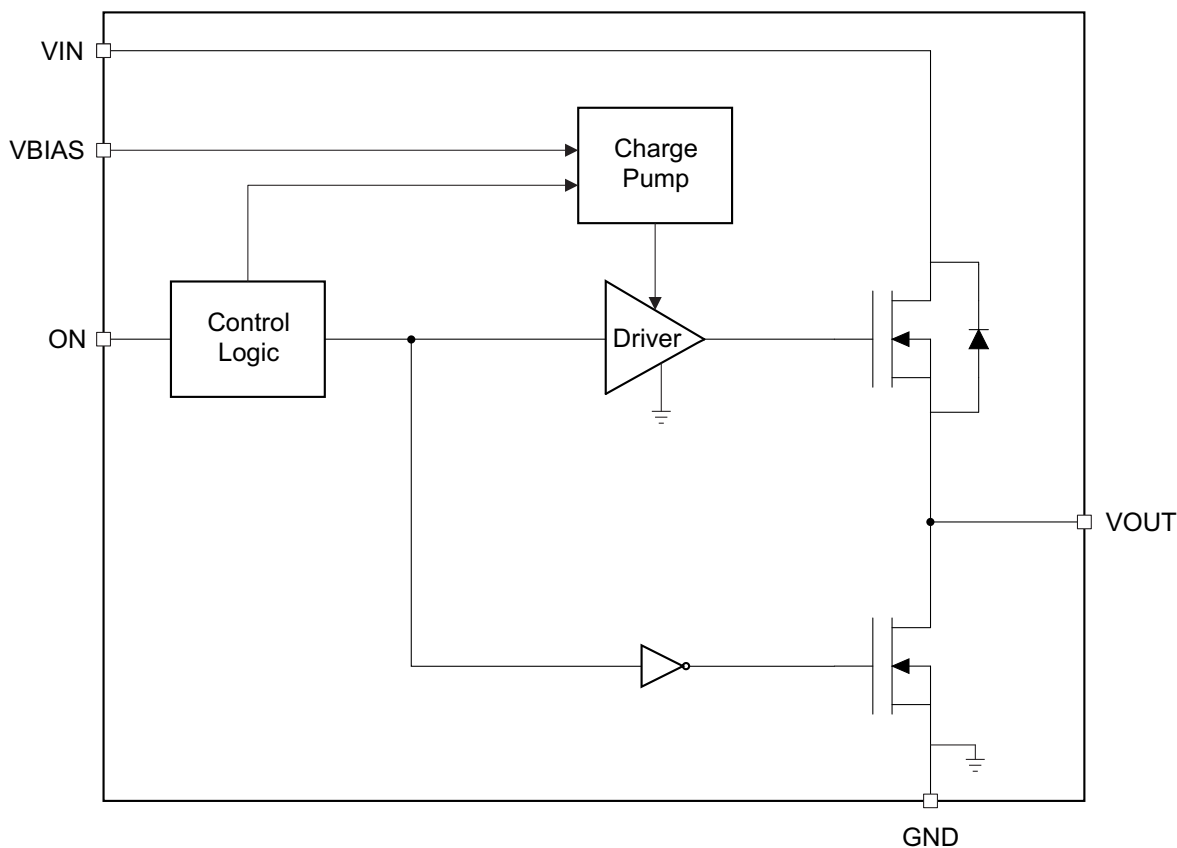
8 Detailed Description

8.1 Overview

The device is a 5.5V, 6A load switch in a 8-terminal SON package. To reduce voltage drop for low voltage and high current rails, the device implements an ultra-low resistance N-channel MOSFET which reduces the drop out voltage through the device.

The device has a controlled and fixed slew rate which helps reduce or eliminate power supply droop due to large inrush currents. During shutdown, the device has very low leakage currents, thereby reducing unnecessary leakages for downstream modules during standby. Integrated control logic, driver, charge pump, and output discharge FET eliminates the need for any external components, which reduces solution size and BOM count.

8.2 Functional Block Diagram



8.3 Feature Description

8.3.1 On/off Control

The ON terminal controls the state of the load switch, and asserting the terminal high (active high) enables the switch. The ON terminal is compatible with standard GPIO logic threshold and can be used with any microcontroller or discrete logic with 1.2-V or higher GPIO voltage. This terminal cannot be left floating and must be tied either high or low for proper functionality.

8.3.2 Input Capacitor (C_{IN})

To limit the voltage drop on the input supply caused by transient in-rush currents when the switch turns on into a discharged load capacitor or short-circuit, a capacitor needs to be placed between VIN and GND. A 1- μ F ceramic capacitor, C_{IN} , placed close to the terminals, is usually sufficient. Higher values of C_{IN} can be used to further reduce the voltage drop in high-current application. When switching heavy loads, it is recommended to have an input capacitor 10 times higher than the output capacitor to avoid excessive voltage drop; however, a 10 to 1 ratio for capacitance is not required for proper functionality of the device, but a ratio smaller than 10 to 1 (such as 1 to 1) could cause a V_{IN} dip upon turn-on due to inrush currents based on external factor such as board parasitics and output bulk capacitance.

8.3.3 Output Capacitor (C_L)

Due to the integrated body diode in the N-channel MOSFET, a C_{IN} greater than C_L is highly recommended. A C_L greater than C_{IN} can cause V_{OUT} to exceed V_{IN} when the system supply is removed. This could result in current flow through the body diode from VOUT to VIN. A C_{IN} to C_L ratio of 10 to 1 is recommended for minimizing V_{IN} dip caused by inrush currents during startup, however a 10 to 1 ratio for capacitance is not required for proper functionality of the device. A ratio smaller than 10 to 1 (such as 1 to 1) could cause a V_{IN} dip upon turn-on due to inrush currents based on external factor such as board parasitics and output bulk capacitance.

8.3.4 V_{IN} and V_{BIAS} Voltage Range

For optimal R_{ON} performance, make sure $V_{IN} \leq V_{BIAS}$. The device may still be functional if $V_{IN} > V_{BIAS}$ but it will exhibit R_{ON} greater than what is listed in the Electrical Characteristics table. See Figure 28 for an example of a typical device. Notice the increasing R_{ON} as V_{IN} increases. Be sure to never exceed the maximum voltage rating for V_{IN} and V_{BIAS} . Performance of the device is not guaranteed for $V_{IN} > V_{BIAS}$.

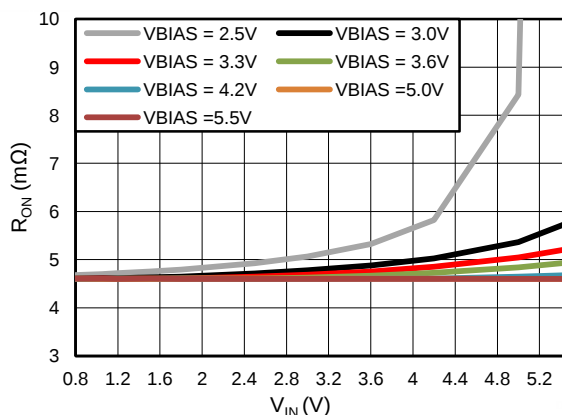


Figure 28. R_{ON} vs V_{IN} ($V_{IN} > V_{BIAS}$)

9 Applications and Implementation

9.1 Application Information

This section will highlight some of the design considerations when implementing this device in various applications. A PSPICE model for this device is also available in the product page of this device on www.ti.com for further aid.

9.2 Typical Application

This application demonstrates how the TPS22969 can be used to power downstream modules with large capacitances. The example below is powering a 100-μF capacitive output load.

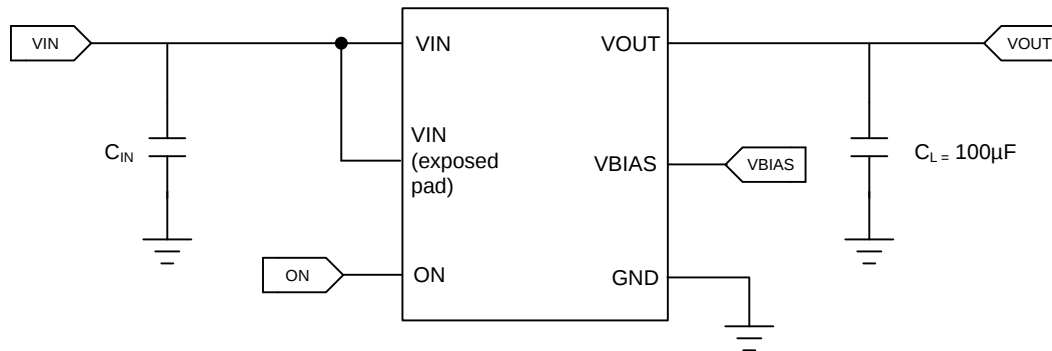


Figure 29. Typical Application Schematic for Powering a Downstream Module

9.2.1 Design Requirements

For this design example, use the following as the input parameters.

Table 1. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
V_{IN}	1.05V
V_{BIAS}	5.0V
Load current	6A

9.2.2 Detailed Design Procedure

To begin the design process, the designer needs to know the following:

- V_{IN} voltage
- V_{BIAS} voltage
- Load current

9.2.2.1 V_{IN} to V_{OUT} Voltage Drop

The V_{IN} to V_{OUT} voltage drop in the device is determined by the R_{ON} of the device and the load current. The R_{ON} of the device depends upon the V_{IN} and V_{BIAS} conditions of the device. Refer to the R_{ON} specification of the device in the Electrical Characteristics table of this datasheet. Once the R_{ON} of the device is determined based upon the V_{IN} and V_{BIAS} conditions, use [Equation 1](#) to calculate the V_{IN} to V_{OUT} voltage drop:

$$\Delta V = I_{LOAD} \times R_{ON} \quad (1)$$

where

- ΔV = voltage drop from V_{IN} to V_{OUT}
- I_{LOAD} = load current
- R_{ON} = On-resistance of the device for a specific V_{IN} and V_{BIAS} combination

An appropriate I_{LOAD} must be chosen such that the I_{MAX} specification of the device is not violated.

9.2.2.2 Inrush Current

To determine how much inrush current will be caused by the C_L capacitor, use Equation 2:

$$I_{\text{INRUSH}} = C_L \times \frac{dV_{\text{OUT}}}{dt} \quad (2)$$

where

- I_{INRUSH} = amount of inrush caused by C_L
- C_L = capacitance on VOUT
- dt = time it takes for change in V_{OUT} during the ramp up of VOUT when the device is enabled
- dV_{OUT} = change in V_{OUT} during the ramp up of VOUT when the device is enabled

An appropriate C_L value should be placed on VOUT such that the I_{MAX} and I_{PLS} specifications of the device are not violated.

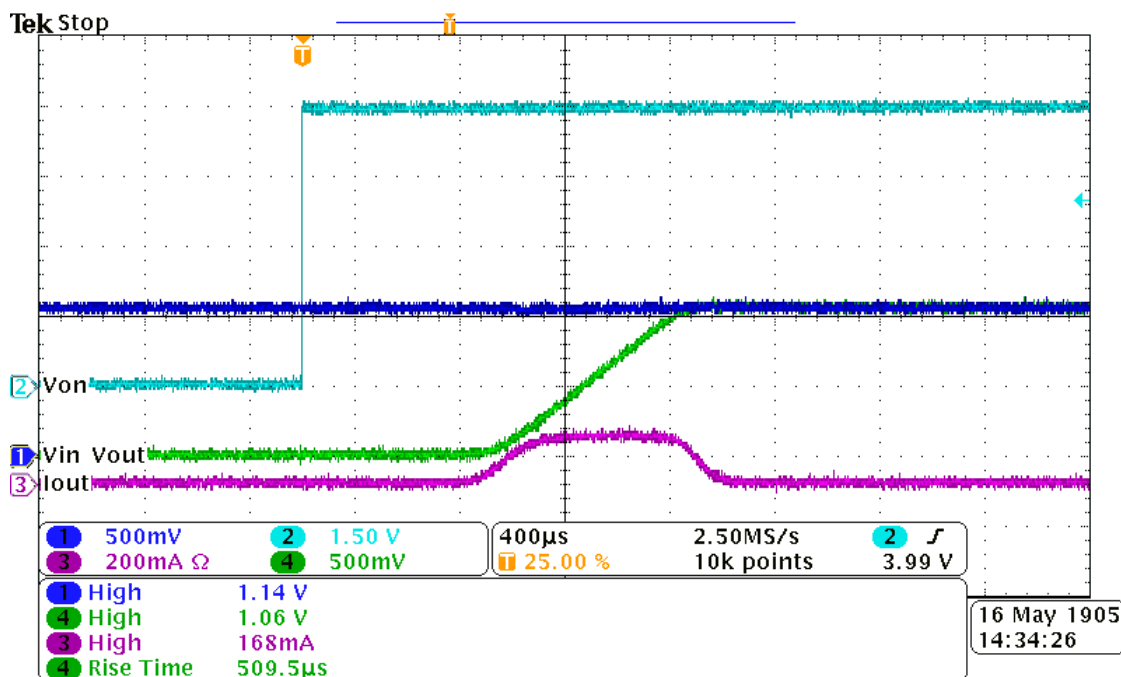


Figure 30. Inrush current ($V_{\text{BIAS}} = 5\text{V}$, $V_{\text{IN}} = 1.05\text{V}$, $C_L = 100\mu\text{F}$)

9.2.2.3 Thermal Considerations

The maximum IC junction temperature should be restricted to 125°C under normal operating conditions. To calculate the maximum allowable dissipation, $P_{\text{D(max)}}$ for a given output current and ambient temperature, use Equation 3.

$$P_{\text{D(MAX)}} = \frac{T_{\text{J(MAX)}} - T_{\text{A}}}{\theta_{\text{JA}}} \quad (3)$$

where

- $P_{\text{D(max)}}$ = maximum allowable power dissipation
- $T_{\text{J(max)}}$ = maximum allowable junction temperature (125°C for the TPS22969)
- T_{A} = ambient temperature of the device
- θ_{JA} = junction to air thermal impedance. See Thermal Information section. This parameter is highly dependent upon board layout.

9.2.3 Application Curves

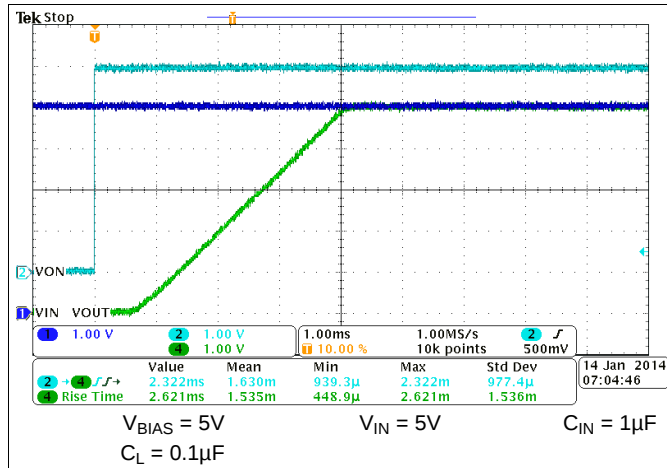


Figure 31. t_R at $V_{BIAS} = 5V$

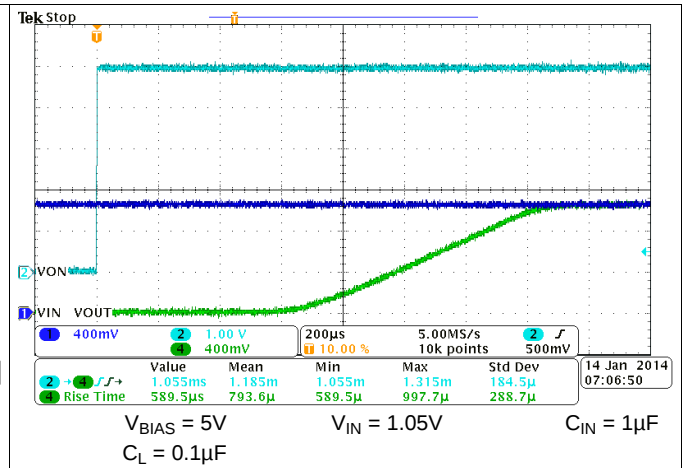


Figure 32. t_R at $V_{BIAS} = 5V$

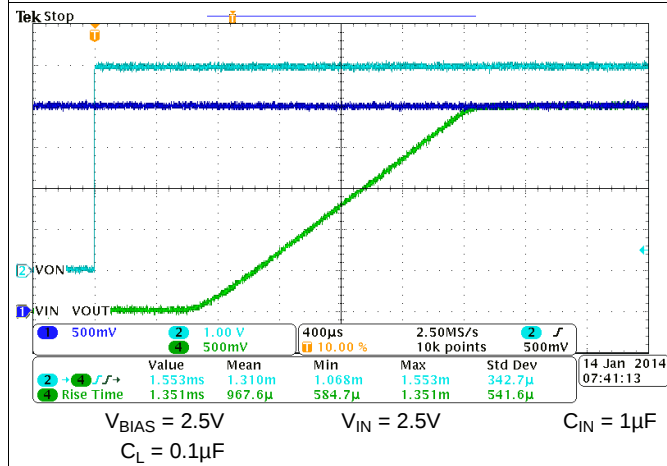


Figure 33. t_R at $V_{BIAS} = 2.5V$

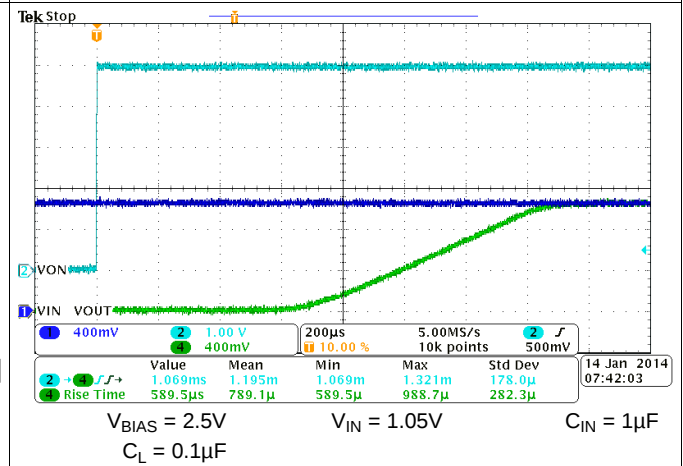


Figure 34. t_R at $V_{BIAS} = 2.5V$

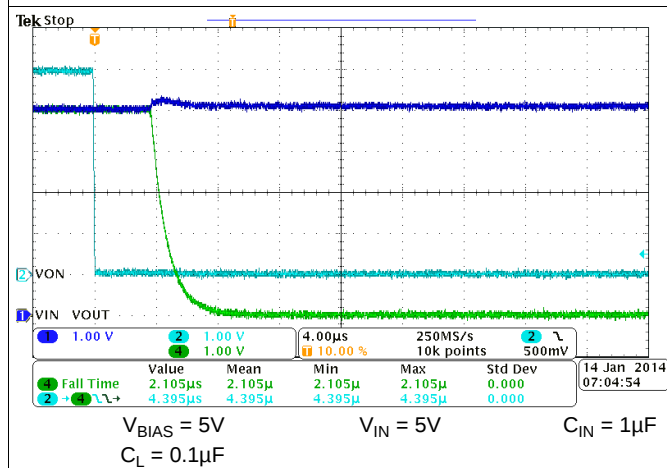


Figure 35. t_F at $V_{BIAS} = 5V$


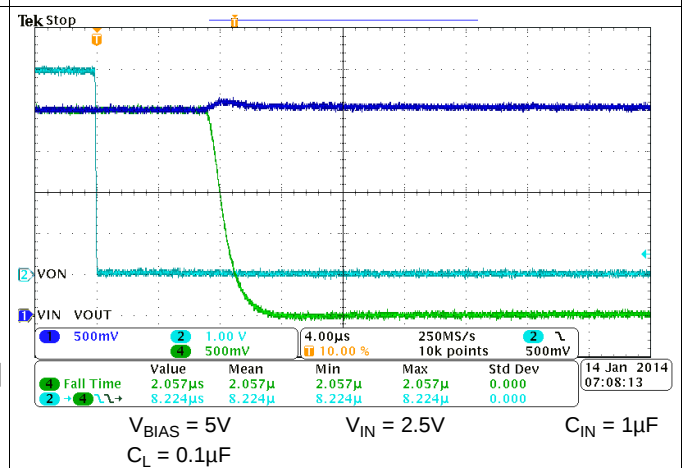
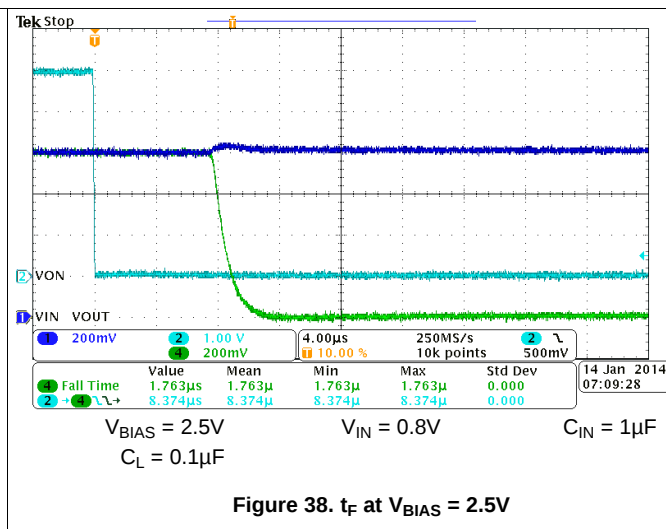


Figure 36. t_F at $V_{BIAS} = 5V$

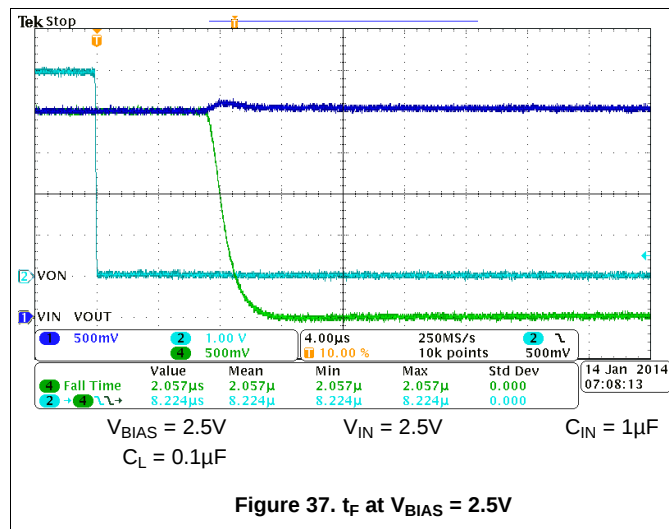

10 Power Supply Recommendations

The device is designed to operate from a V_{BIAS} range of 2.5-V to 5.5-V and V_{IN} range of 0.8-V to 5.5-V. This supply must be well regulated and placed as close to the device terminal as possible with the recommended 1µF bypass capacitor. If the supply is located more than a few inches from the device terminals, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. If additional bulk capacitance is required, an electrolytic, tantalum, or ceramic capacitor of 10-µF may be sufficient.

11 Layout

11.1 Layout Guidelines

- V_{IN} and V_{OUT} traces should be as short and wide as possible to accommodate for high current.
- Use vias under the exposed thermal pad for thermal relief for high current operation.
- The V_{IN} terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 1-µF ceramic with X5R or X7R dielectric. This capacitor should be placed as close to the device terminals as possible.
- The V_{OUT} terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is one-tenth of the V_{IN} bypass capacitor of X5R or X7R dielectric rating. This capacitor should be placed as close to the device terminals as possible.
- The V_{BIAS} terminal should be bypassed to ground with low ESR ceramic bypass capacitors. The typical recommended bypass capacitance is 0.1-µF ceramic with X5R or X7R dielectric.

11.2 Layout Example

○ VIA to Power Ground Plane

⌒ VIA to VIN Plane

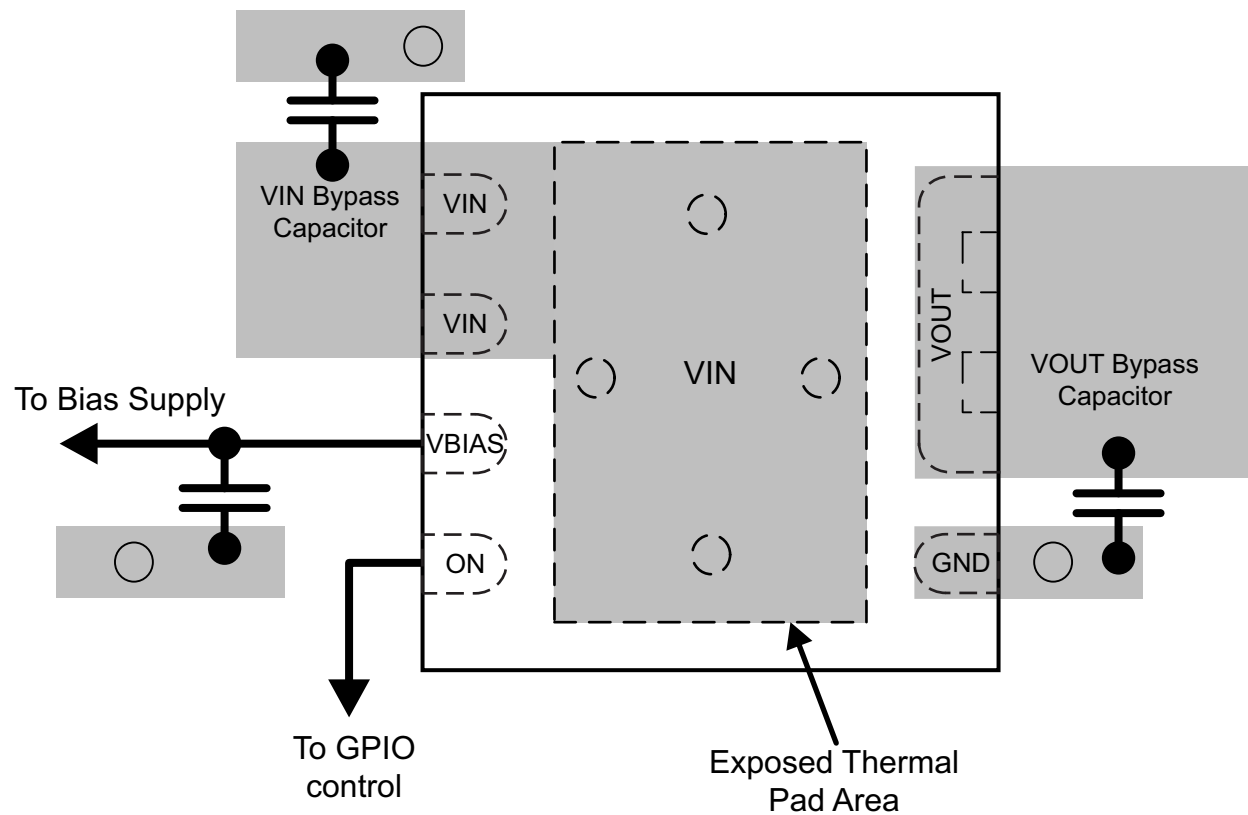


Figure 39. Recommended Board Layout

12 器件和文档支持

12.1 Trademarks

Ultrabook is a trademark of Intel.

12.2 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.3 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms and definitions.

13 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS22969DNYR	Active	Production	WSO (DNY) 8	3000 LARGE T&R	Yes	Call TI Nipdau	Level-2-260C-1 YEAR	-40 to 85	969A0
TPS22969DNYR.B	Active	Production	WSO (DNY) 8	3000 LARGE T&R	-	Call TI	Call TI	-40 to 105	
TPS22969DNYRG4	Active	Production	WSO (DNY) 8	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 105	969A0
TPS22969DNYRG4.B	Active	Production	WSO (DNY) 8	3000 LARGE T&R	-	Call TI	Call TI	-40 to 105	
TPS22969DNYT	Active	Production	WSO (DNY) 8	250 SMALL T&R	Yes	Call TI Nipdau	Level-2-260C-1 YEAR	-40 to 85	969A0
TPS22969DNYT.B	Active	Production	WSO (DNY) 8	250 SMALL T&R	-	Call TI	Call TI	-40 to 105	

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS22969DNYRG4	WSO	DNY	8	3000	330.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS22969DNYRG4	WSO	DNY	8	3000	367.0	367.0	38.0


PLASTIC QUAD FLATPACK- NO LEAD



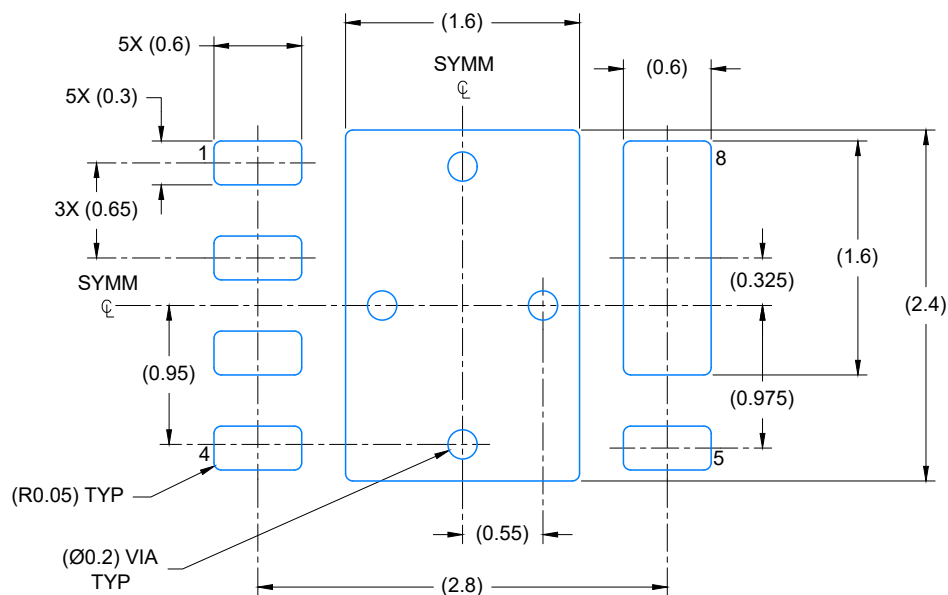1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



LAND PATTERN EXAMPLE
SCALE: 20X

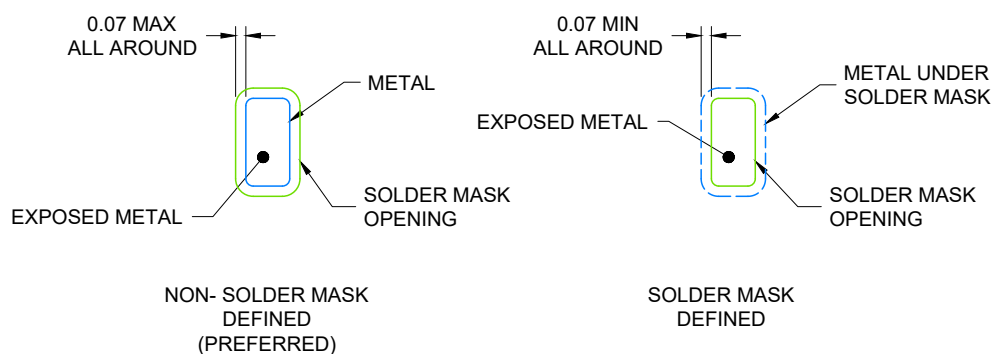


SOLDER MASK DETAILS

4221022/E 06/2020

NOTES: (continued)

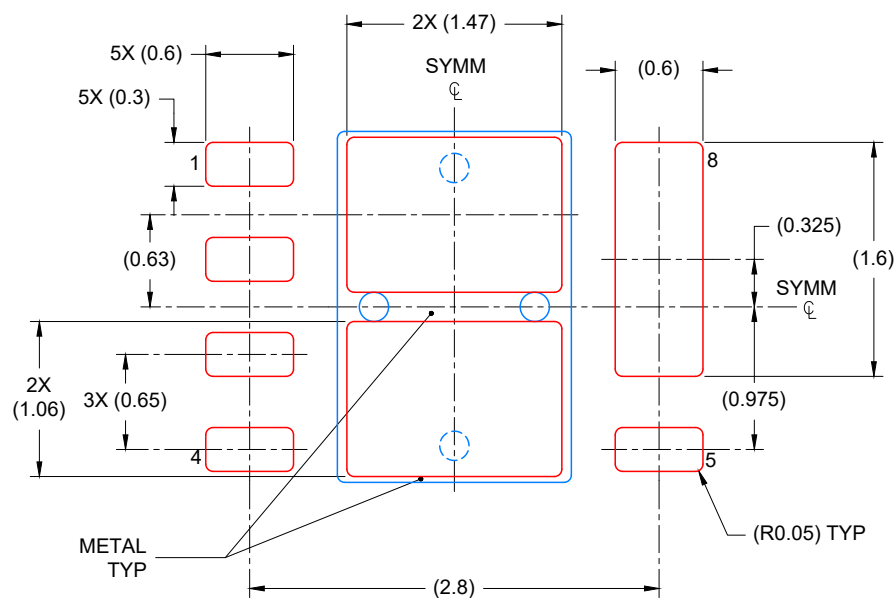4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



SOLDER PASTE EXAMPLE
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
 81% PRINTED COVERAGE BY AREA
 SCALE: 20X

4221022/E 06/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司