

# TPS3704-Q1 汽车类四通道/三通道/双通道/单通道窗口或标准电压监控器

## 1 特性

- ASIL-A 符合功能安全标准
  - 适用于功能安全应用的开发
  - 可帮助进行 ISO 26262 系统设计的文档
  - 系统可满足 ASIL D 级要求
  - 硬件可满足 ASIL A 要求
- 符合面向汽车应用的 AEC-Q100 标准
  - 器件温度等级 1: -40°C 至 +125°C
- 1-4 个通道用于监控先进的 SOC
  - 高  $\pm 0.25\%$  (典型) 阈值精度
  - 配置每个通道以进行窗口、UV 或 OV 电压监测
  - 每个通道的可编程窗口容差 [3% 至 11% (典型\*)]
  - 易于使用的计算器工具, 适用于可调版本
  - 设计用于监测 TI 处理器 (AM26x、AM62x、TDA4) 的内核和 GPIO 电源轨
- 低功耗微型解决方案
  - 5.5 $\mu$ A 典型静态电流
  - 紧凑型 6 引脚 SOT-23 封装 (2.9mm x 1.6mm)
- 附加特性
  - 内置迟滞可防止复位时误跳闸: 0.75% (典型值)
  - 23 个固定延时时间选项 (可选择 20 $\mu$ s 至 1200ms)
  - 提供开漏或推挽输出拓扑

## 2 应用

- 高级驾驶辅助系统 (ADAS)
- 汽车信息娱乐系统和仪表组
- 混合动力汽车/电动汽车
- 车身电子装置和照明

## 3 说明

TPS3704-Q1 是一款符合 ASIL-A 标准的低功耗精密窗口 (UV +OV) 电压监控器, 可进行配置, 采用 8 引脚 (1.6mm x 2.9mm) SOT-23 封装。这种高精度 ( $\pm 0.25\%$ ) 监控器有四通道、三通道、双通道和/或单通道选项。所有通道均可自定义为自己的过压和欠压窗口检测, 其上限和下限阈值公差可为对称或非对称式。


TPS3704-Q1 支持高度精确阈值检测并具有高分辨率, 专门用于在低电压电源轨上运行且电源容差裕度非常小的系统。此外, 内置低阈值迟滞和固定复位延迟功能, 可防止在监控多个电压轨时发出虚假复位信号。

TPS3704-Q1 不需要使用任何外部电阻器来设置过压和欠压复位阈值, 从而改进了安全系统的可靠性, 优化了整体精度、成本和解决方案大小。SENSEx 引脚支持可选使用外部电阻器以实现设计灵活性。独立的 VDD 和 SENSEx 引脚支持监控 VDD 以外的电压, 或者允许使用按钮输入。

### 器件信息

| 器件型号       | 封装 <sup>(1)</sup> | 本体尺寸 (标称值)    |
|------------|-------------------|---------------|
| TPS3704-Q1 | DDF (8 引脚 SOT-23) | 1.6mm x 2.9mm |

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

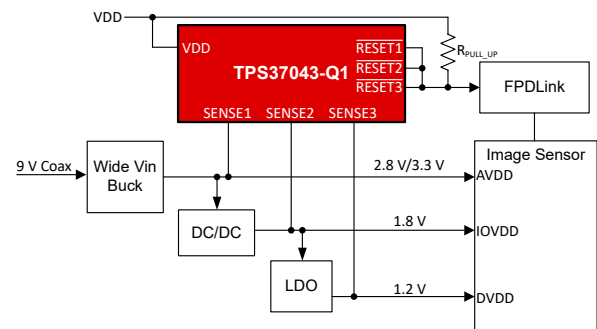

典型应用电路



## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | 7.3 Feature Description.....                                     | <b>20</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | 7.4 Device Functional Modes.....                                 | <b>22</b> |
| <b>3 说明</b> .....                              | <b>1</b>  | <b>8 Application and Implementation</b> .....                    | <b>23</b> |
| <b>4 Device Nomenclature</b> .....             | <b>3</b>  | 8.1 Application Information.....                                 | <b>23</b> |
| <b>5 Pin Configuration and Functions</b> ..... | <b>5</b>  | 8.2 Typical Applications.....                                    | <b>25</b> |
| <b>6 Specifications</b> .....                  | <b>7</b>  | 8.3 Power Supply Recommendations.....                            | <b>28</b> |
| 6.1 Absolute Maximum Ratings.....              | <b>7</b>  | 8.4 Layout.....                                                  | <b>28</b> |
| 6.2 ESD Ratings.....                           | <b>7</b>  | <b>9 Device and Documentation Support</b> .....                  | <b>30</b> |
| 6.3 Recommended Operating Conditions.....      | <b>7</b>  | 9.1 Device Nomenclature.....                                     | <b>30</b> |
| 6.4 Thermal Information.....                   | <b>8</b>  | 9.2 接收文档更新通知.....                                                | <b>31</b> |
| 6.5 Electrical Characteristics.....            | <b>8</b>  | 9.3 支持资源.....                                                    | <b>31</b> |
| 6.6 Timing Requirements.....                   | <b>10</b> | 9.4 Trademarks.....                                              | <b>31</b> |
| 6.7 Timing Diagrams .....                      | <b>11</b> | 9.5 静电放电警告.....                                                  | <b>31</b> |
| 6.8 Typical Characteristics.....               | <b>13</b> | 9.6 术语表.....                                                     | <b>32</b> |
| <b>7 Detailed Description</b> .....            | <b>17</b> | <b>10 Revision History</b> .....                                 | <b>32</b> |
| 7.1 Overview.....                              | <b>17</b> | <b>11 Mechanical, Packaging, and Orderable Information</b> ..... | <b>32</b> |
| 7.2 Functional Block Diagrams.....             | <b>17</b> |                                                                  |           |

## 4 Device Nomenclature

图 4-1 shows the device naming nomenclature to compare the different device variants. See 表 9-1 for a more detailed explanation. See 表 4-1 or 表 9-2 for the available device variants.

**表 4-1. Device Threshold Table**


| ORDERABLE PART NAME | VARIANT <sup>(3)</sup> | OUTPUT TYPE <sup>(4)</sup> | NUM OF CHAN. | RESET TIME | SENSE1 <sup>(1) (2)</sup> | SENSE2 <sup>(1) (2)</sup> | SENSE3 <sup>(1) (2)</sup> | SENSE4 <sup>(1) (2)</sup> |
|---------------------|------------------------|----------------------------|--------------|------------|---------------------------|---------------------------|---------------------------|---------------------------|
| TPS37041BPLEDDFRQ1  | Fixed                  | L                          | 1            | 5ms        | 0.9V (±7%)                | -                         | -                         | -                         |
| TPS37042A3OFDDFRQ1  | Fixed                  | O                          | 2            | 10ms       | 3.3V (±5%)                | 1.2V (±5%)                | -                         | -                         |
| TPS37042ZJOFDDFRQ1  | Fixed                  | O                          | 2            | 10ms       | 1.95V (±4%)               | 3.8V (±6%)                | -                         | -                         |
| TPS37043DJOFDDFR    | ADJ/Fixed              | O                          | 3            | 10ms       | 3.3V (-11%)               | 1.2V (-11%)               | 0.8V (-8%)                | -                         |
| TPS37043A4OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 2.8V (±5%)                | 1.8V (±5%)                | 1.2V (±5%)                | -                         |
| TPS37043A8OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 3.3V (±5%)                | 1.8V (±5%)                | 1.0V (±5%)                | -                         |
| TPS37043CPOFDDFRQ1  | ADJ/Fixed              | O                          | 3            | 10ms       | 3.3V (±4%)                | 0.75V (±4%)               | 0.8V (±3%)                | -                         |
| TPS37043ZJOFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 0.95V (±4%)               | 1.35V (±4%)               | 1.8V (±4%)                | -                         |
| TPS37043LJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.4V (±5%)                | 0.4V (±5%)                | 0.8V (±5%)                | -                         |
| TPS37043CJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                | -                         |
| TPS37043MJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.4V (±7%)                | 0.4V (±7%)                | 0.8V (±7%)                | -                         |
| TPS37043A5OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 3.3V (±4%)                | 1.8V (±4%)                | 1.2V (±4%)                | -                         |
| TPS37043BJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | -                         |
| TPS37044BJOFDDFR    | ADJ                    | O                          | 4            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                |
| TPS37044LJOJDDFR    | ADJ                    | O                          | 4            | 35ms       | 0.4V (±5%)                | 0.4V (±5%)                | 0.8V (±5%)                | 0.8V (±5%)                |
| TPS37044BJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                |
| TPS37044CJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                |
| TPS37044MJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.4V (±7%)                | 0.4V (±7%)                | 0.8V (±7%)                | 0.8V (±7%)                |
| TPS37044A4OGDDFRQ1  | Fixed                  | O                          | 4            | 15ms       | 3.3V (±8%)                | 1.8V (±4%)                | 1.15V (±6%)               | 1.15V (±6%)               |

(1) Listed percentage denotes window tolerance, see 图 6-1 for more information

(2) VIT threshold of 0.8V and 0.4V signifies an adjustable channel

(3) ADJ denotes an adjustable voltage threshold set by an external resistor divider, see [Adjustable Voltage Thresholds](#) for more information

(4) Output type "L" designates Push Pull Active Low and "O" designates Open Drain Active Low. Reference 图 4-1 for more information

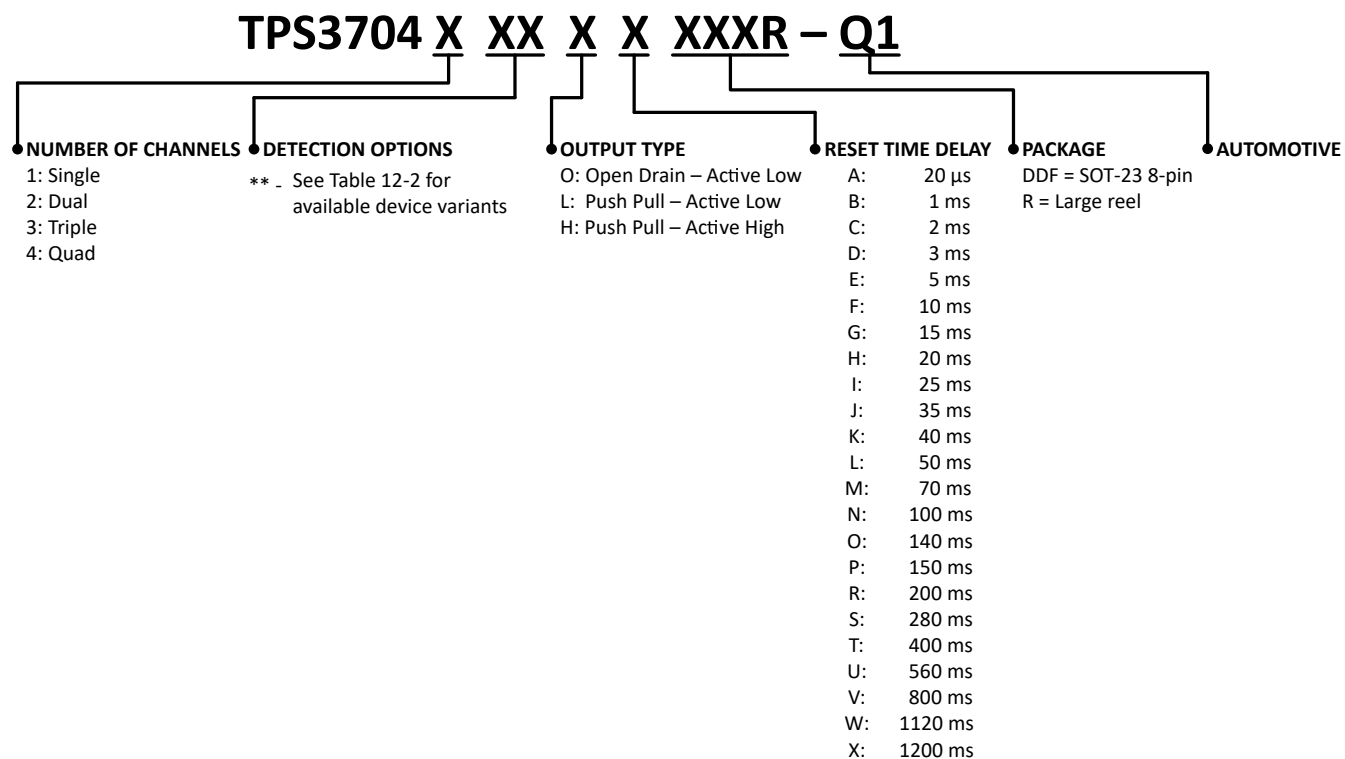

**图 4-1. Device Naming Convention**

## 5 Pin Configuration and Functions

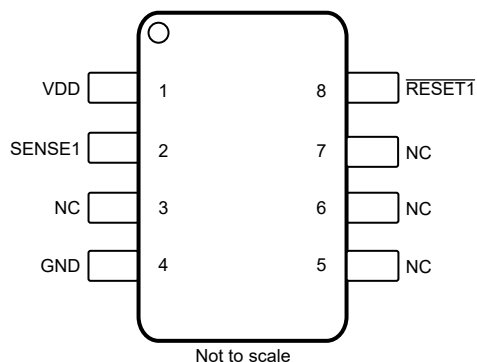


图 5-1. DDF Package  
 8-PIN SOT23  
 TPS37041-Q1 (Top View)

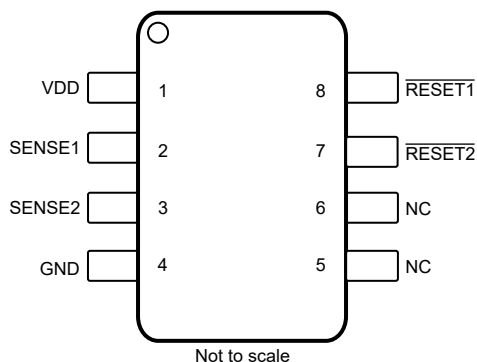


图 5-2. DDF Package  
 8-PIN SOT23  
 TPS37042-Q1 (Top View)

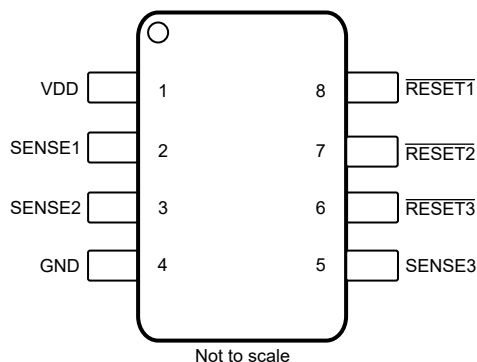


图 5-3. DDF Package  
 8-PIN SOT23  
 TPS37043-Q1 (Top View)

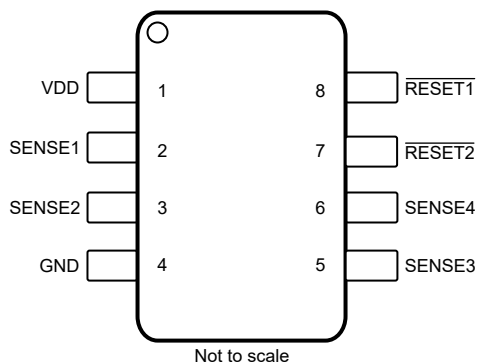


图 5-4. DDF Package  
 8-PIN SOT23  
 TPS37044-Q1 (Top View)

表 5-1. Pin Functions

| NAME   | PIN         |             |             |             | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------|-------------|-------------|-------------|-------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | TPS37041-Q1 | TPS37042-Q1 | TPS37043-Q1 | TPS37044-Q1 |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| VDD    | 1           | 1           | 1           | 1           | I   | Supply Input. Bypass with a 0.1µF capacitor to GND.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SENSE1 | 2           | 2           | 2           | 2           | I   | Connect directly to a monitored voltage. RESET1/RESET1 is asserted when SENSE1 falls outside of the window threshold. No external capacitor is required for this SENSE1 pin. For the TPS37044-Q1 (quad version) RESET1/RESET1 asserts when either SENSE1 or SENSE2 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.                                                                                            |
| SENSE2 | —           | 3           | 3           | 3           | I   | Connect directly to a monitored voltage. RESET2/RESET2 is asserted when SENSE2 falls outside of window threshold. No external capacitor is required for the SENSE2 pin. For the TPS37044-Q1 (quad version) RESET1/RESET1 asserts when either SENSE1 or SENSE2 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.                                                                                                 |
| SENSE3 | —           | —           | 5           | 5           | I   | Connect directly to monitored voltage. RESET3/RESET3 is asserted when SENSE3 falls outside of window threshold. No external capacitor is required for SENSE3 pin. For TPS37044-Q1 (quad version) RESET2/RESET2 asserts when either SENSE3 or SENSE4 falls outside of window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. If the input pin is not being used, it can be left floating.                                                                                      |
| SENSE4 | —           | —           | —           | 6           | I   | Connect directly to a monitored voltage. For TPS37044-Q1 (quad version) RESET2/RESET2 asserts when either SENSE3 or SENSE4 fall outside of the window threshold. For noisy applications, placing a 10nF to 100nF ceramic capacitor close to this pin may be needed for optimum performance. Leave this pin floating if not used.                                                                                                                                                                                                                                    |
| RESET1 | 8           | 8           | 8           | 8           | O   | RESET1/RESET1 asserts when SENSE1 falls outside of the overvoltage or undervoltage threshold window. RESET1/RESET1 stays asserted for the reset timeout period after SENSE1 fall back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. For the TPS37044-Q1, RESET1/RESET1 asserts when either SENSE1 or SENSE2 falls outside of the window threshold. Leave this pin floating if not used.<br>For the TPS37044F-Q1 option, any SENSEx channels that detect an overvoltage (OV) fault, this pin is asserted.  |
| RESET2 | —           | 7           | 7           | 7           | O   | RESET2/RESET2 asserts when SENSE2 falls outside of the overvoltage or undervoltage threshold window. RESET2/RESET2 stays asserted for the reset timeout period after SENSE2 falls back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. For the TPS37044-Q1, RESET2/RESET2 asserts when either SENSE3 or SENSE4 fall outside of the window threshold. Leave this pin floating if not used.<br>For the TPS37044F-Q1 option, any SENSEx channels that detect an undervoltage (UV) fault, this pin is asserted. |
| RESET3 | —           | —           | 6           | —           | O   | RESET3/RESET3 asserts when SENSE3 falls outside of the overvoltage or undervoltage threshold window. RESET3/RESET3 stays asserted for the reset timeout period after SENSE3 falls back within the window threshold. Active-low, open-drain reset output, requires an external pullup resistor. Leave this pin floating if not being used.                                                                                                                                                                                                                           |
| GND    | 4           | 4           | 4           | 4           | —   | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| NC     | 3,5,6,7     | 5,6         | —           | —           | —   | No connect                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                            |                                                           | MIN                         | MAX | UNIT |
|----------------------------|-----------------------------------------------------------|-----------------------------|-----|------|
| Voltage                    | $V_{DD}$                                                  | -0.3                        | 6.5 | V    |
|                            | $V_{RESET1}$ , $V_{RESET2}$ , $V_{RESET3}$                | -0.3                        | 6.5 | V    |
|                            | $V_{SENSE1}$ , $V_{SENSE2}$ , $V_{SENSE3}$ , $V_{SENSE4}$ | -0.3                        | 6.5 | V    |
| Current                    | $I_{RESET1}$ , $I_{RESET2}$ , $I_{RESET3}$ SINK           |                             | ±20 | mA   |
| Temperature <sup>(2)</sup> | Continuous total power dissipation                        | See the Thermal Information |     |      |
|                            | Operating junction temperature, $T_J$                     | -40                         | 150 | °C   |
|                            | Operating free-air temperature, $T_A$                     | -40                         | 150 | °C   |
|                            | Storage temperature, $T_{stg}$                            | -65                         | 150 | °C   |

- (1) Stresses beyond values listed under Absolute Maximum Ratings (AMR) may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to AMR-rated conditions for extended periods may affect device reliability.
- (2) As a result of the low dissipated power in this device, it is assumed that  $T_J = T_A$ .

### 6.2 ESD Ratings

|             |                         |                                                                   | VALUE | UNIT |
|-------------|-------------------------|-------------------------------------------------------------------|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup> | ±2000 | V    |
|             |                         | Charged-device model (CDM), per AEC Q100-011                      | ±750  |      |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification

### 6.3 Recommended Operating Conditions

|                                                 |                                | MIN | NOM | MAX | UNIT |
|-------------------------------------------------|--------------------------------|-----|-----|-----|------|
| $V_{DD}$                                        | Supply pin voltage             | 1.7 |     | 6.0 | V    |
| $V_{SENSE1,2,3,4}$                              | Input pin voltage              | 0   |     | 6.0 | V    |
| $V_{RESET1}$ , $V_{RESET2}$ , $V_{RESET3}$      | Output pin voltage             | 0   |     | 6.0 | V    |
| $I_{RESET1}$ , $I_{RESET2}$ , $I_{RESET3}$ SINK | Output pin current sink        | 0.3 |     | 5   | mA   |
| $T_A$                                           | Operating free air temperature | -40 |     | 125 | °C   |

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS3704x-Q1 | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | DDF         |      |
|                               |                                              | PINS        |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 121.5       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 60.6        | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 42.3        | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 2.2         | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 42.1        | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A         | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics

At  $1.7V \leq V_{DD} \leq 6.0V$ ,  $\overline{RESETx}$  Voltage ( $V_{RESETx}$ ) =  $10k\Omega$  to  $V_{DD}$ ,  $\overline{RESETx}$  load = 10pF, and over the operating free-air temperature range of  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$ , typical conditions at  $V_{DD} = 3.3V$ .

| PARAMETER             |                                                                                 | TEST CONDITIONS                            | MIN                 | TYP  | MAX  | UNIT      |
|-----------------------|---------------------------------------------------------------------------------|--------------------------------------------|---------------------|------|------|-----------|
| $V_{DD}$              | Supply Voltage                                                                  |                                            | 1.7                 |      | 6.0  | V         |
| UVLO                  | Under Voltage Lockout <sup>(1)</sup>                                            | $V_{DD}$ falling below 1.7V                | 1.2                 | 1.4  | 1.6  | V         |
| UVLO <sub>(HYS)</sub> | UVLO Hysteresis <sup>(2)</sup>                                                  | $V_{DD}$ rising below 1.7V                 |                     | 65   |      | mV        |
| $V_{POR}$             | Power on reset voltage <sup>(3)</sup>                                           | $V_{OL(MAX)} = 0.3V$ , $I_{OUT} = 15\mu A$ |                     |      | 0.7  | V         |
| $V_{IT}$ Range        | Threshold Programming Range                                                     |                                            | 0.4                 |      | 5.55 | V         |
| $V_{IT- (UV)}$        | UV accuracy ( $25^{\circ}C$ )                                                   |                                            |                     | 0.1  |      | %         |
| $V_{IT+ (OV)}$        | OV accuracy ( $25^{\circ}C$ )                                                   |                                            |                     | 0.1  |      | %         |
| TOL_min               | Tolerance Programming minimum                                                   |                                            |                     | 3    |      | %         |
| TOL_max               | Tolerance Programming maximum                                                   |                                            |                     | 11   |      | %         |
| THR RES Low           | Threshold Programming Resolution Low                                            | $V_{IT} \leq 0.8V$                         |                     | 20   |      | mV / step |
| THR RES Mid           | Threshold Programming Resolution Mid                                            | $0.8V < V_{IT} \leq 4.0V$                  |                     | 0.5  |      | % / step  |
| THR RES High          | Threshold Programming Resolution High                                           | $V_{IT} > 4.0V$                            |                     | 20   |      | mV / step |
| $V_{IT}$              | Accuracy for absolute threshold including tolerance                             | $V_{IT} < 0.8V$                            | -1.6                |      | 1.6  | %         |
| $V_{IT}$              | Accuracy for absolute threshold including tolerance                             | $V_{IT} = 0.8V - 5.55V$                    | -1                  |      | 1    | %         |
| $V_{HYS}$             | $V_{IT} < 0.80V$                                                                |                                            | 1.1                 | 1.4  | 1.7  | %         |
| $V_{HYS}$             | $V_{IT} \geq 0.80V$                                                             |                                            | 0.40                | 0.75 | 1    | %         |
| $I_{DD}$              | TPS3704x                                                                        | $V_{DD} \leq 6.0V$                         |                     | 5.5  | 15   | $\mu A$   |
| $I_{SENSEX}$          | Input current, SENSEx pin                                                       | $V_{SENSEX} = 5.5V$                        |                     | 1    | 2.5  | $\mu A$   |
| $I_{SENSE\_ADJ}$      | Input current, SENSE pin (Bypass internal resistor divider)- Adjustable version | $V_{SENSEX} = 5.5V$                        |                     |      | 350  | nA        |
| $V_{OL}$              | Low level output voltage                                                        | $V_{DD} = 1.7V$ , $I_{SINK} = 0.4mA$       |                     |      | 300  | mV        |
| $V_{OL}$              | Low level output voltage                                                        | $V_{DD} = 2V$ , $I_{SINK} = 3mA$           |                     |      | 300  | mV        |
| $V_{OL}$              | Low level output voltage                                                        | $V_{DD} = 6.0V$ , $I_{SINK} = 5mA$         |                     |      | 300  | mV        |
| $V_{OH}$              | High level output voltage (push pull)                                           |                                            | $0.8 \times V_{DD}$ |      |      | V         |
| $V_{OH}$              | High level output voltage (push pull)                                           | $V_{DD} = 1.7V$ , $I_{SOURCE} = 0.4mA$     | 1.36                |      |      | V         |

## 6.5 Electrical Characteristics ( 续 )

At  $1.7V \leq V_{DD} \leq 6.0V$ ,  $\overline{RESETx}$  Voltage ( $V_{\overline{RESETx}}$ ) =  $10k\Omega$  to  $V_{DD}$ ,  $\overline{RESETx}$  load = 10pF, and over the operating free-air temperature range of  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$ , typical conditions at  $V_{DD} = 3.3V$ .

| PARAMETER  |                                       | TEST CONDITIONS                         | MIN | TYP | MAX | UNIT |
|------------|---------------------------------------|-----------------------------------------|-----|-----|-----|------|
| $V_{OH}$   | High level output voltage (push pull) | $V_{DD} = 6V, I_{SOURCE} = 2mA$         | 4.8 |     |     | V    |
| $I_{(lk)}$ | Open drain output leakage current     | $V_{DD} = V_{\overline{RESETx}} = 6.0V$ |     |     | 350 | nA   |

- (1)  $\overline{RESETx}$  pin is driven low when  $V_{DD}$  falls below UVLO.
- (2) Hysteresis is with respect of the tripoint ( $V_{IT- (UV)}$ ,  $V_{IT+ (OV)}$ ).
- (3)  $V_{POR}$  is the minimum  $V_{DD}$  voltage level for a controlled output state. Slew rate = 100mV /  $\mu s$ .


## 6.6 Timing Requirements

At  $1.7V \leq V_{DD} \leq 6.0V$ ,  $\overline{RESETx}$  voltage ( $V_{\overline{RESETx}}$ ) =  $10k\Omega$  to  $V_{DD}$ ,  $\overline{RESETx}$  load =  $10pF$ , and over the operating free-air temperature range of  $-40^{\circ}C$  to  $125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = 25^{\circ}C$ , typical conditions at  $V_{DD} = 3.3V$ .


| PARAMETER      |                                                            | TEST CONDITIONS                                  | MIN | NOM   | MAX | UNIT    |
|----------------|------------------------------------------------------------|--------------------------------------------------|-----|-------|-----|---------|
| $t_D$          | Reset release time delay                                   | Fixed delay option $t_D < 4ms$ , overdrive = 10% | -40 | $t_D$ | 40  | %       |
| $t_D$          | Reset release time delay                                   | Fixed delay option $t_D > 5ms$ , overdrive = 10% | -30 | $t_D$ | 30  | %       |
| $t_{PD}$       | Propagation detect delay <sup>(1)</sup>                    | Fixed time delay $t_D > 1ms$ , overdrive 10%     |     |       | 10  | $\mu s$ |
| $t_{GI(VIT-)}$ | Glitch Immunity Undervoltage (5% overdrive) <sup>(2)</sup> |                                                  |     | 2     |     | $\mu s$ |
| $t_{GI(VIT+)}$ | Glitch Immunity Overvoltage (5% overdrive) <sup>(2)</sup>  |                                                  |     | 2     |     | $\mu s$ |
| $t_R$          | Ouptut rise (Push-Pull) <sup>(2) (3)</sup>                 |                                                  |     | 25    |     | ns      |
| $t_R$          | Output rise time (Open-Drain) <sup>(2) (3)</sup>           |                                                  |     | 2.2   |     | $\mu s$ |
| $t_F$          | Output fall time <sup>(2) (3)</sup>                        |                                                  |     | 0.2   |     | $\mu s$ |
| $t_{STRT}$     | Startup delay <sup>(4)</sup>                               |                                                  |     | 1     |     | ms      |

- (1)  $t_{PD}$  measured from threshold trip point ( $V_{IT-(UV)}$  or  $V_{IT+(OV)}$ ) to  $\overline{RESETx}$   $V_{OL}$  voltage
- (2) 5% Overdrive from threshold. Overdrive % =  $[(V_{SENSEX} - V_{IT}) / V_{IT}]$ ; Where  $V_{IT}$  stands for  $V_{IT-(UV)}$  or  $V_{IT+(OV)}$
- (3) Output transitions from  $V_{OL}$  to  $V_{OH}$  or ( $V_{\overline{RESETx}}$ ) for rise times and  $V_{OH}$  or ( $V_{\overline{RESETx}}$ ) to  $V_{OL}$  for fall times.
- (4) During the power-on sequence,  $V_{DD}$  must be at or above  $V_{DD(MIN)}$  for at least  $t_{STRT} + t_D$  before the output is in the correct state. when  $V_{DD}$  is between  $V_{DD(MIN)}$  and  $V_{POR}$  the  $\overline{RESETx}$  pin will be engaged

## 6.7 Timing Diagrams

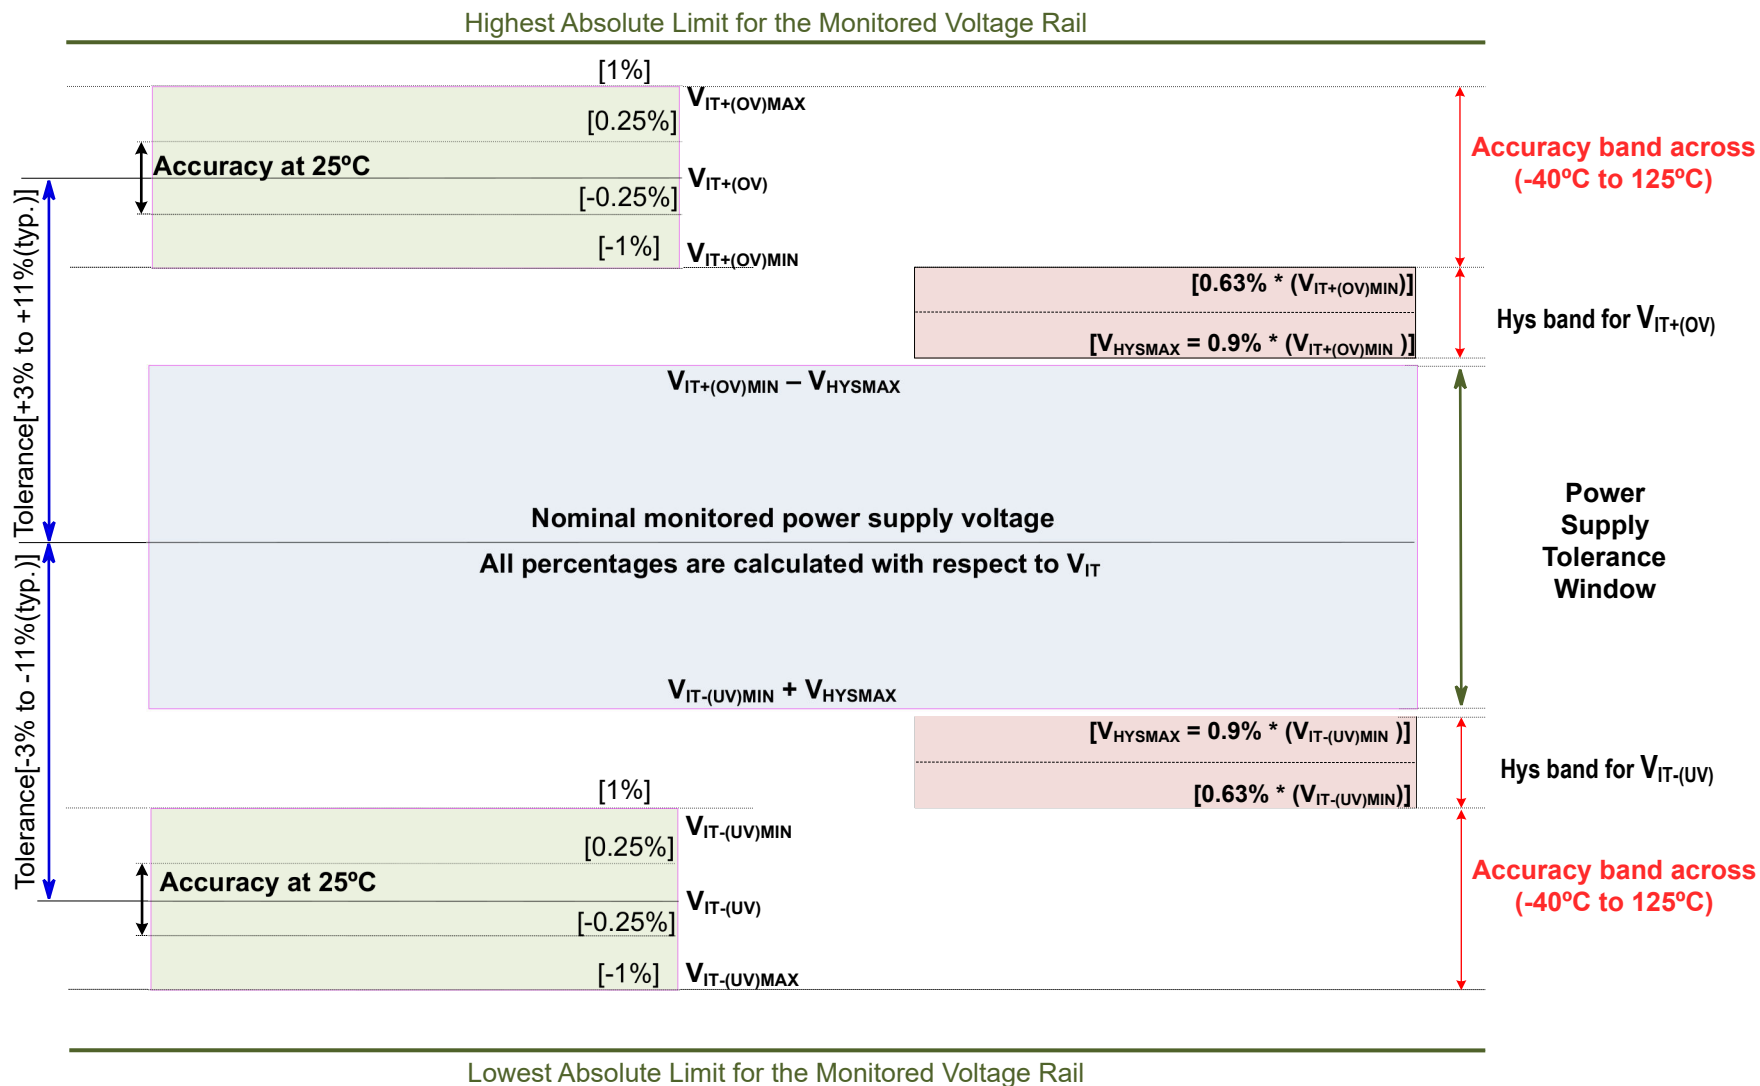

### 图 6-1. Voltage Threshold and Hysteresis Accuracy

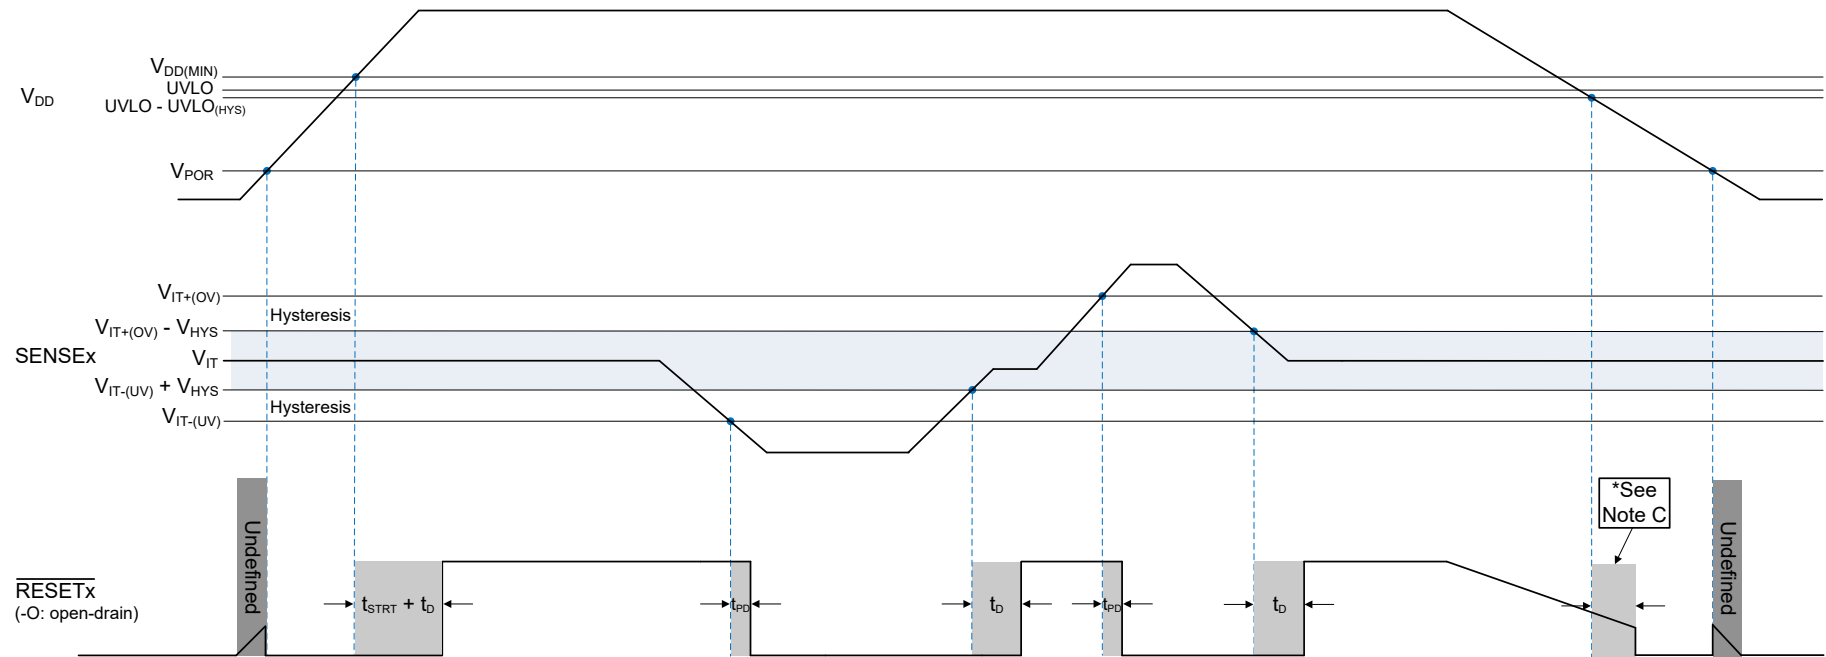

- A. Open-drain timing diagram assumes the  $\overline{\text{RESETx}}$ / $\text{RESETx}$  pin is connected via an external pullup resistor to VDD.
- B. Be advised that 图 6-2 shows the VDD falling slew rate is slow or the VDD decay time is much larger than the propagation detect delay ( $t_{PD}$ ) time.
- C.  $\overline{\text{RESETx}}$ / $\text{RESETx}$  is asserted after a time delay, typical value of 100  $\mu\text{s}$ , when VDD goes below the  $\text{UVLO}-\text{UVLO}_{(\text{HYS})}$  threshold.

图 6-2. SENSEx Timing Diagram

## 6.8 Typical Characteristics

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ , and  $R_{\text{pull-upx}} = 10\text{k}\Omega$ ,  $C_{\text{LOAD}} = 50\text{pF}$ , unless otherwise noted.

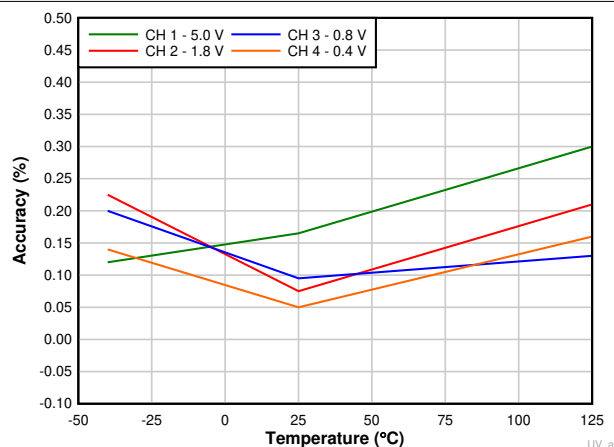


图 6-3. Undervoltage Accuracy vs Temperature

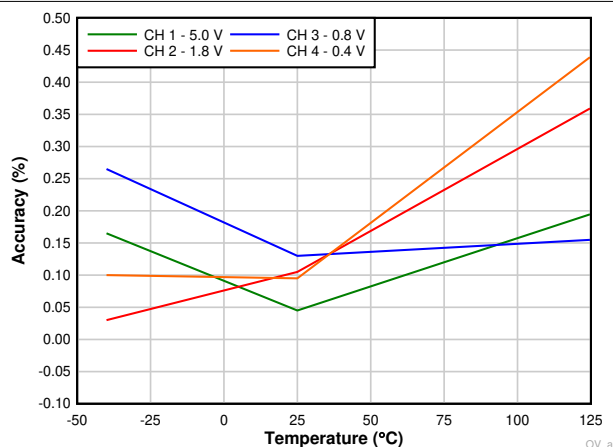


图 6-4. Overvoltage Accuracy vs Temperature

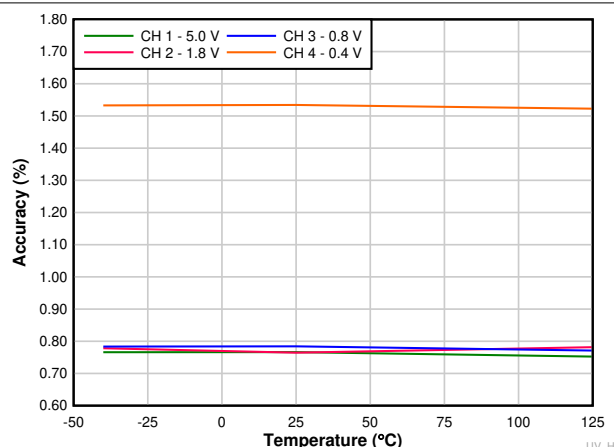


图 6-5. Undervoltage Hysteresis Voltage Accuracy vs Temperature

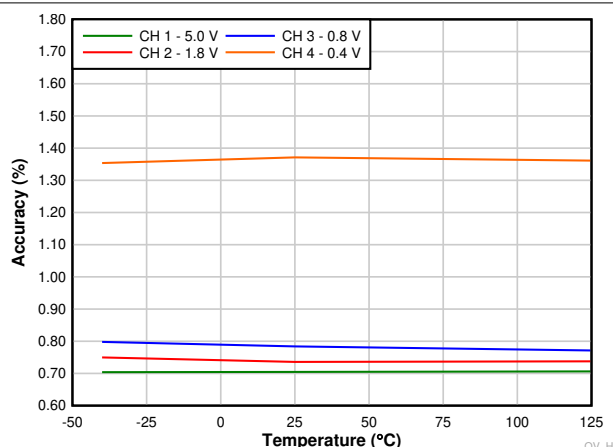


图 6-6. Overvoltage Hysteresis Voltage Accuracy vs Temperature

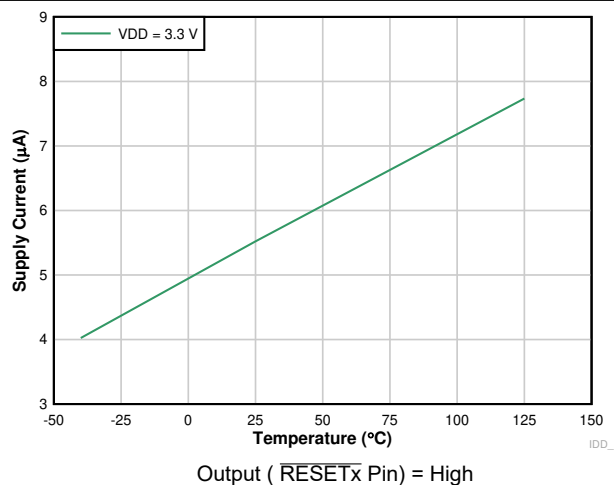


图 6-7. Supply Current vs Temperature

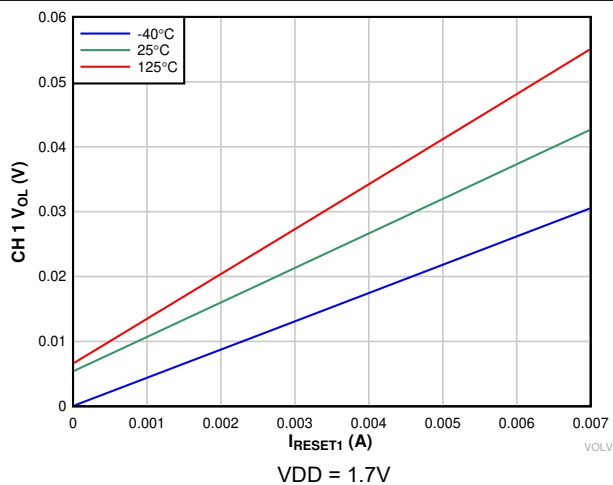


图 6-8. Low-Level CH 1 Output Voltage vs RESET1 Current

## 6.8 Typical Characteristics (continued)

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ , and  $R_{\text{pull-upx}} = 10\text{k}\Omega$ ,  $C_{\text{LOAD}} = 50\text{pF}$ , unless otherwise noted.

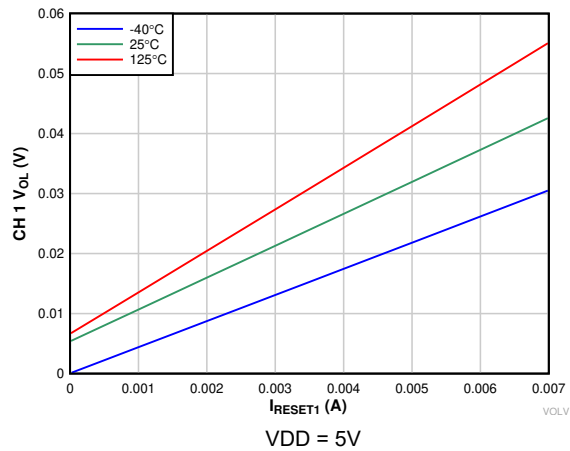


图 6-9. Low-Level CH 1 Output Voltage vs  $\overline{\text{RESET1}}$  Current

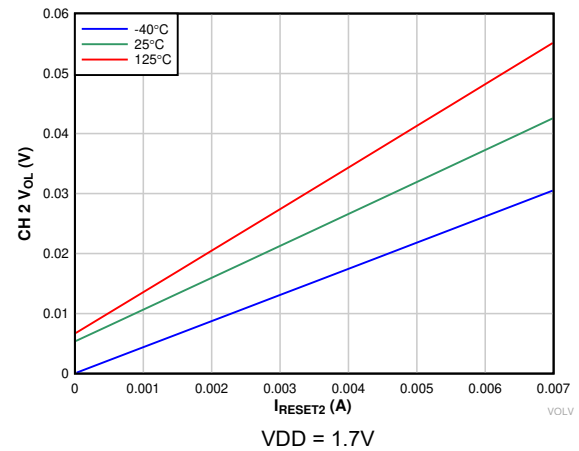


图 6-10. Low-Level CH 2 Output Voltage vs  $\overline{\text{RESET2}}$  Current

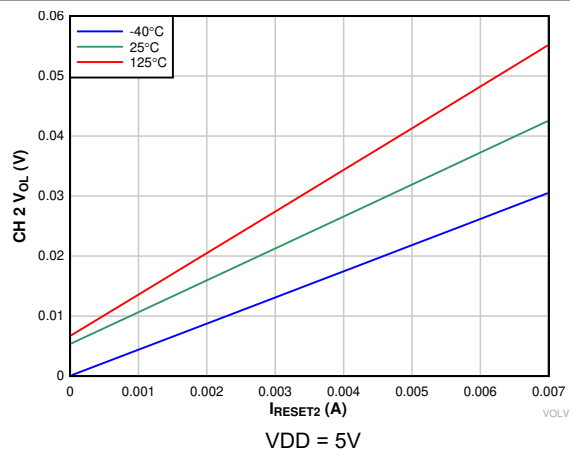


图 6-11. Low-Level CH 2 Output Voltage vs  $\overline{\text{RESET2}}$  Current

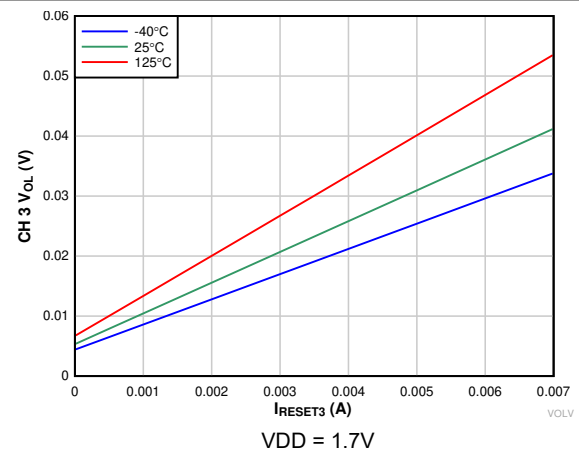


图 6-12. Low-Level CH 3 Output Voltage vs  $\overline{\text{RESET3}}$  Current

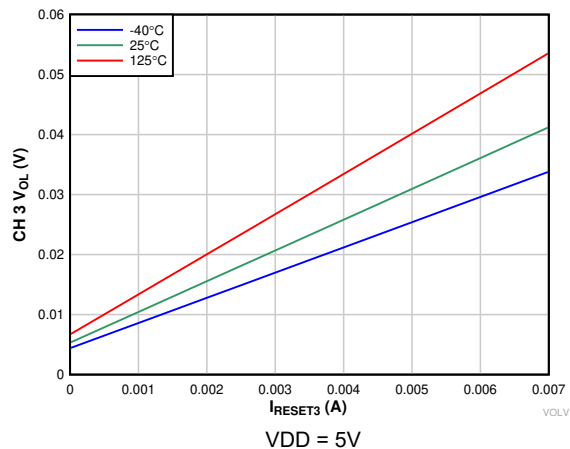


图 6-13. Low-Level CH 3 Output Voltage vs  $\overline{\text{RESET3}}$  Current

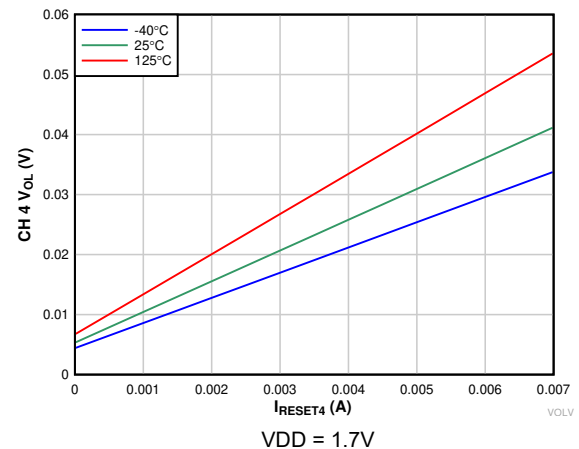


图 6-14. Low-Level CH 4 Output Voltage vs  $\overline{\text{RESET4}}$  Current

## 6.8 Typical Characteristics (continued)

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ , and  $R_{\text{pull-up}x} = 10\text{k}\Omega$ ,  $C_{\text{LOAD}} = 50\text{pF}$ , unless otherwise noted.

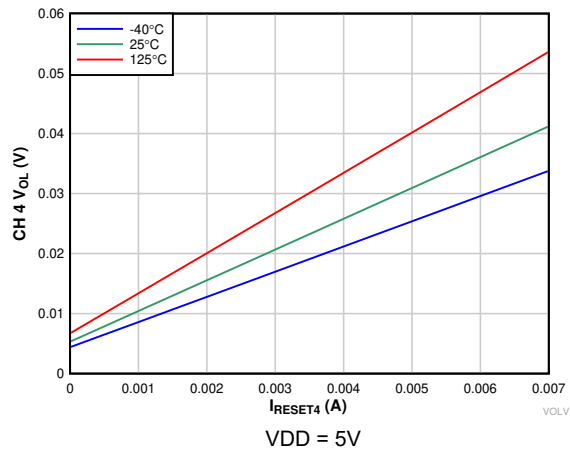


图 6-15. Low-Level CH 4 Output Voltage vs RESET4 Current

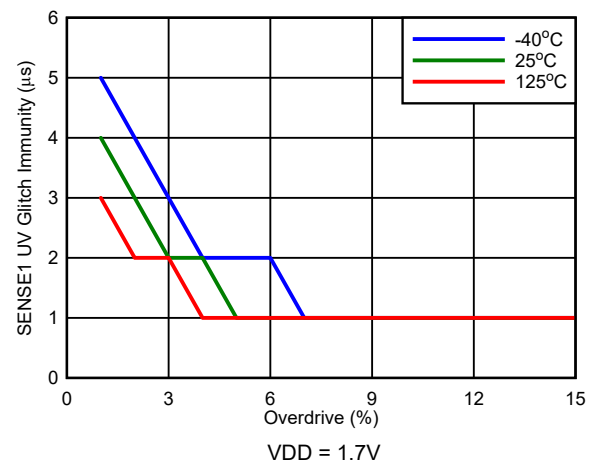


图 6-16. SENSE1 Glitch Immunity ( $V_{IT-}$ ) vs Overdrive

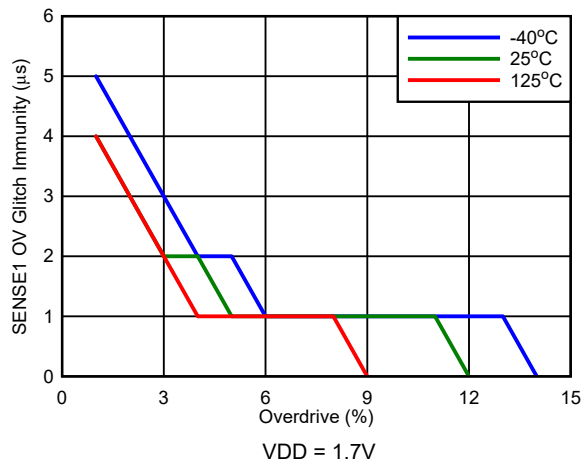


图 6-17. SENSE1 Glitch Immunity ( $V_{IT+}$ ) vs Overdrive

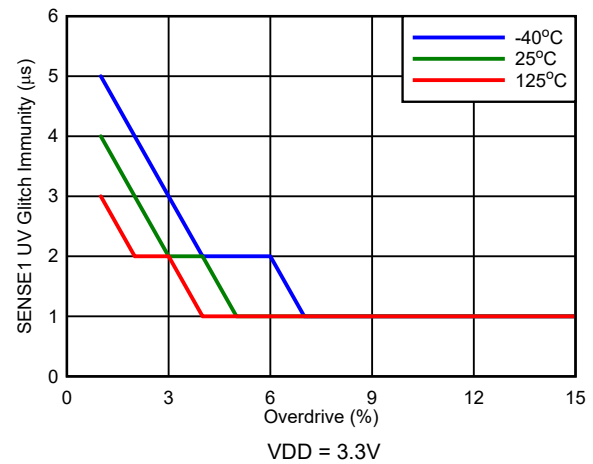


图 6-18. SENSE1 Glitch Immunity ( $V_{IT-}$ ) vs Overdrive

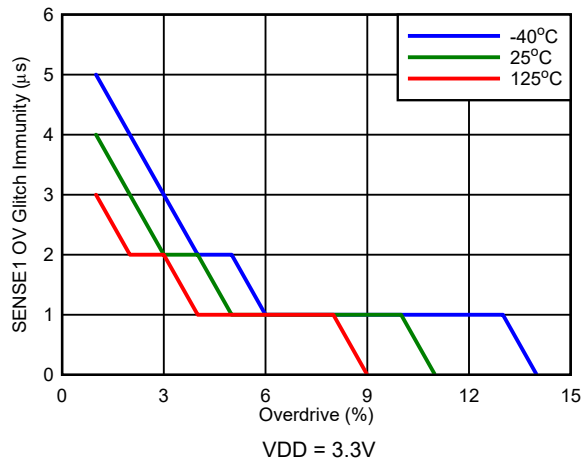


图 6-19. SENSE1 Glitch Immunity ( $V_{IT+}$ ) vs Overdrive

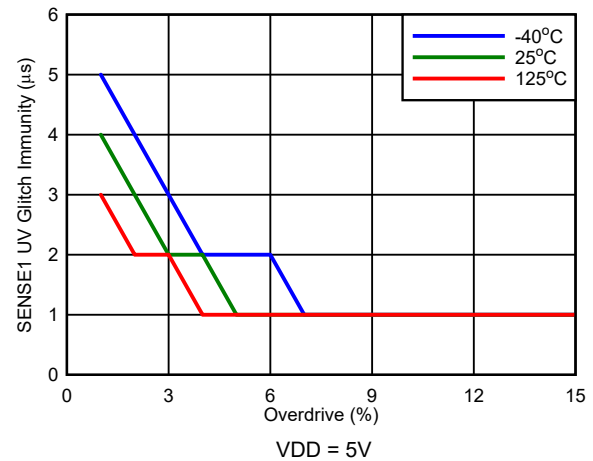


图 6-20. SENSE1 Glitch Immunity ( $V_{IT-}$ ) vs Overdrive

## 6.8 Typical Characteristics (continued)

Typical characteristics show the typical performance of the TPS3704x-Q1 device. Test conditions are  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 3.3\text{V}$ , and  $R_{\text{pull-upx}} = 10\text{k}\Omega$ ,  $C_{\text{LOAD}} = 50\text{pF}$ , unless otherwise noted.

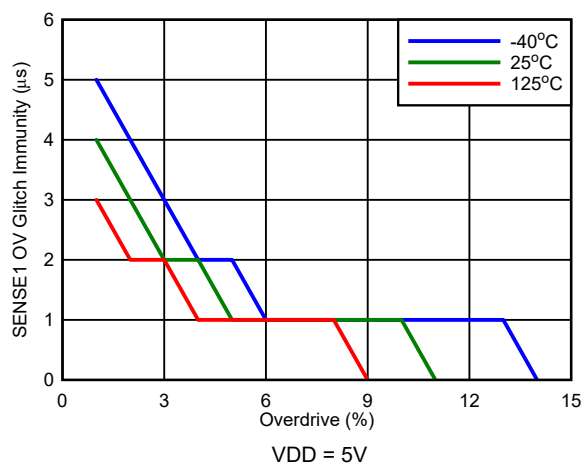


图 6-21. SENSE1 Glitch Immunity ( $V_{IT+}$ ) vs Overdrive

## 7 Detailed Description

### 7.1 Overview

The TPS3704-Q1 (TPS37044-Q1, TPS37043-Q1, TPS37042-Q1, and TPS37041-Q1) is a family of quad, triple, dual, and single precision voltage supervisors where each channel has overvoltage and undervoltage detection capability. The TPS3704-Q1 features a highly accurate window threshold voltage where the upper and lower thresholds can be customized for symmetric or asymmetric tolerances. The reset signal for the TPS3704-Q1 is asserted, with a fault detection time delay ( $t_{PD} = 10 \mu s$  max), when the sense voltage is outside of the overvoltage and undervoltage thresholds.

The TPS3704-Q1 includes the resistors used to set the overvoltage and undervoltage thresholds internal to the device. These internal resistors allow for lower component counts and greatly simplifies the design because no additional margins are needed to account for the accuracy of external resistors. The level of integration in the TPS3704-Q1 enables a total small solution size for any application.

The TPS3704-Q1 is able to monitor any voltage rail with high resolution ( $V_{IT} \leq 0.8V$ : 20mV steps /  $V_{IT} > 0.8V$ : 0.5% or 20mV steps whichever is lower). Each channel in the TPS3704x-Q1 can be configured independently as a window, OV or UV supervisor. Also, the VIT threshold voltage for each channel can be asymmetric. For example, a channel that is configured as an overvoltage supervisor can be setup with a +5% tolerance whereas an undervoltage channel supervisor can be programmed with a -4% tolerance. If a window supervisor is configured, the voltage threshold tolerance can either be symmetrical or asymmetrical.

The TPS3704-Q1 device includes fixed reset time delay ( $t_D$ ) options ranging from 20  $\mu s$  to 1200ms and can monitor up to four channels while maintaining an ultra-low  $I_Q$  current of 15  $\mu A$  (maximum).

### 7.2 Functional Block Diagrams

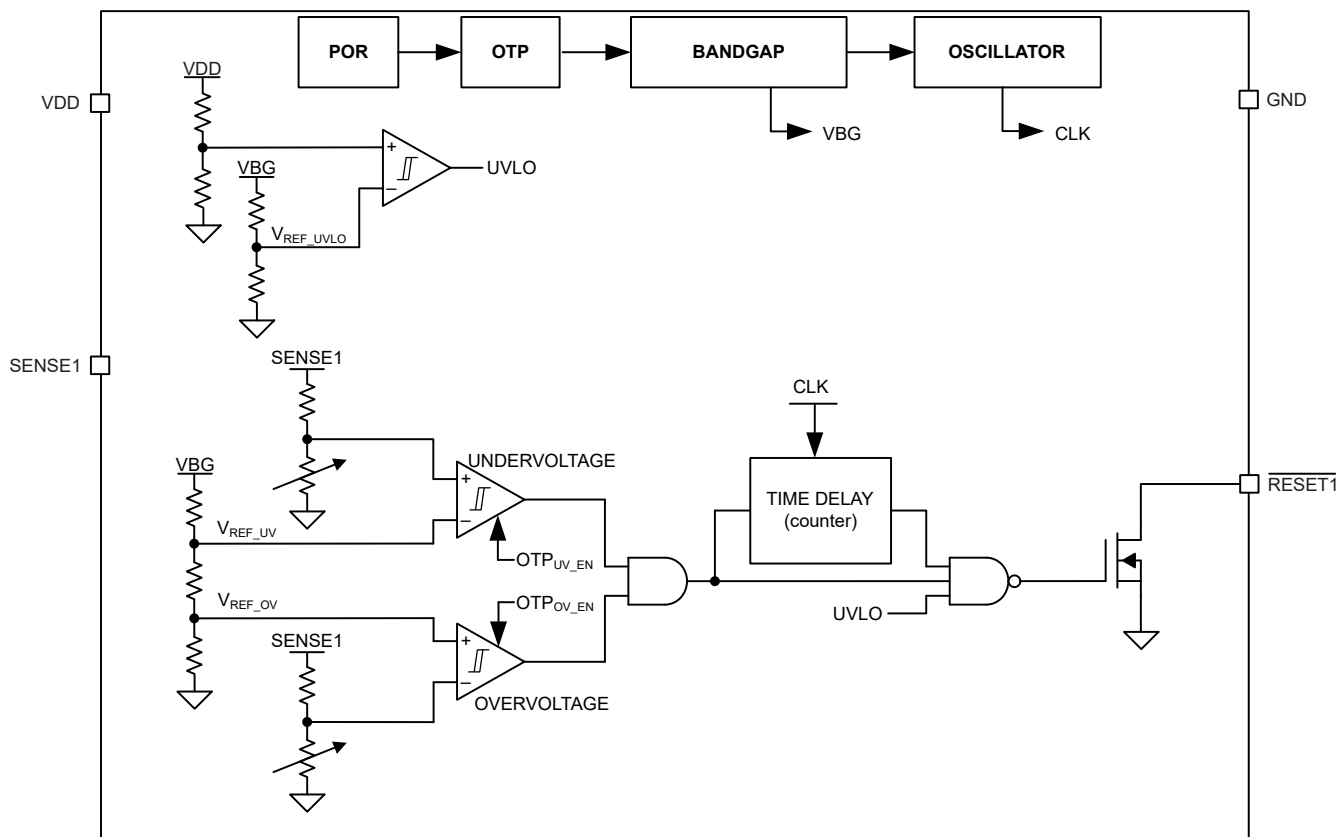


图 7-1. TPS37041-Q1 Single-Channel Functional Block Diagram

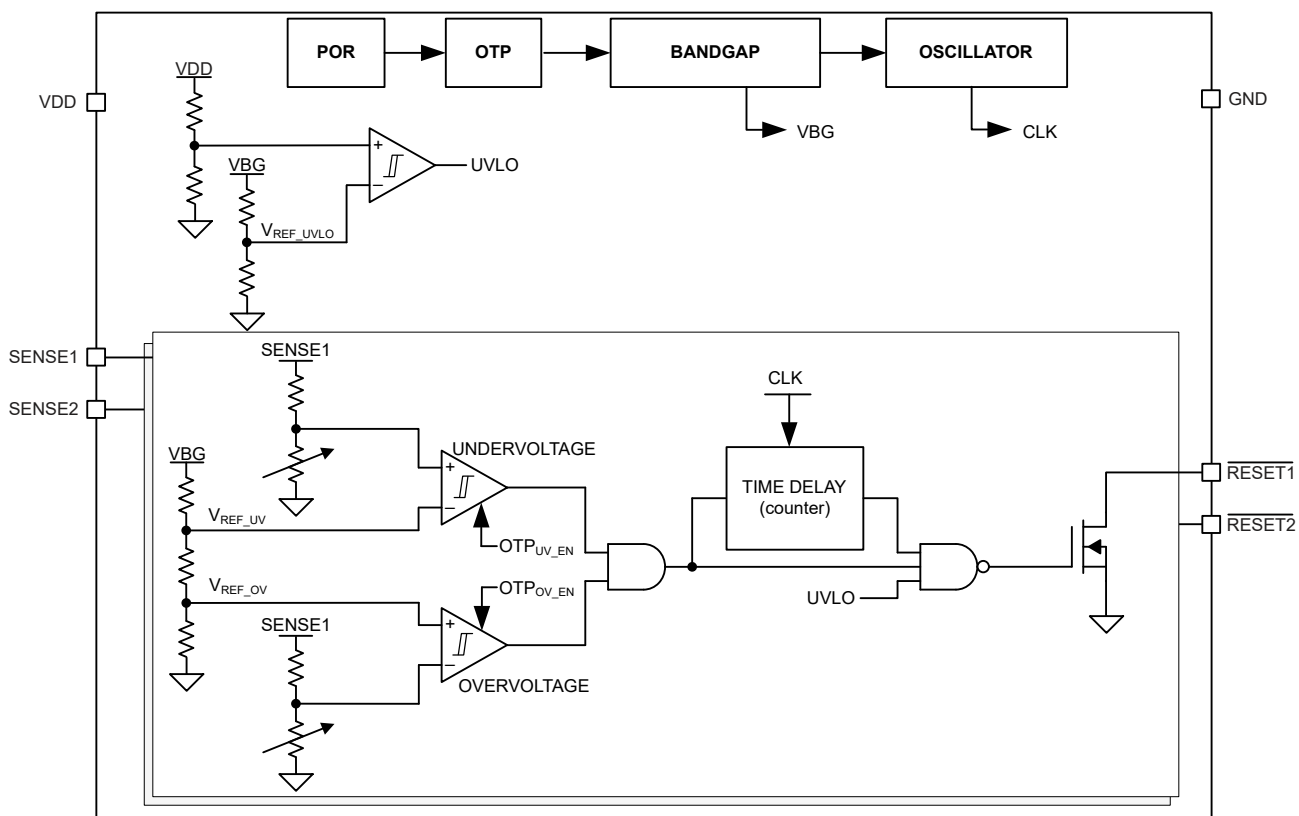


图 7-2. TPS37042-Q1 Dual-Channel Functional Block Diagram

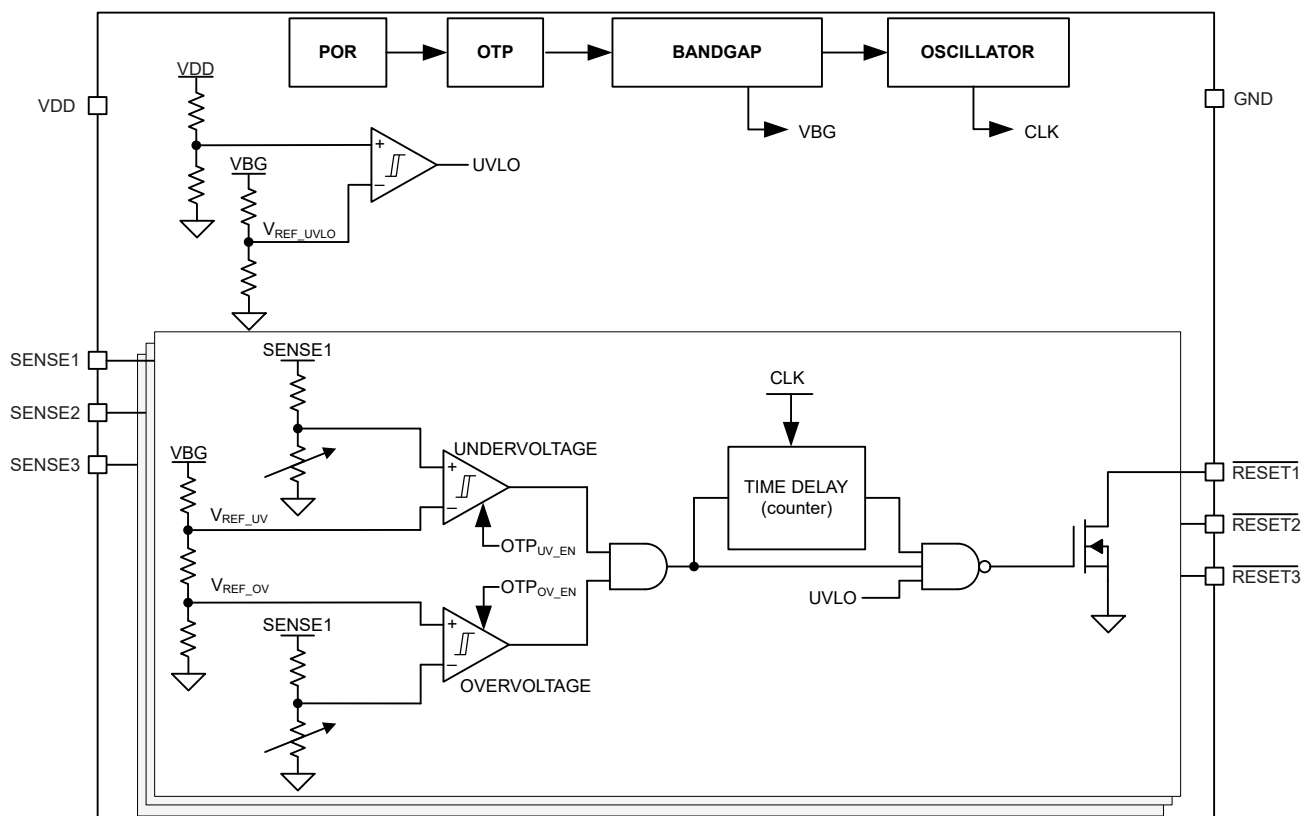


图 7-3. TPS37043-Q1 Triple-Channel Functional Block Diagram

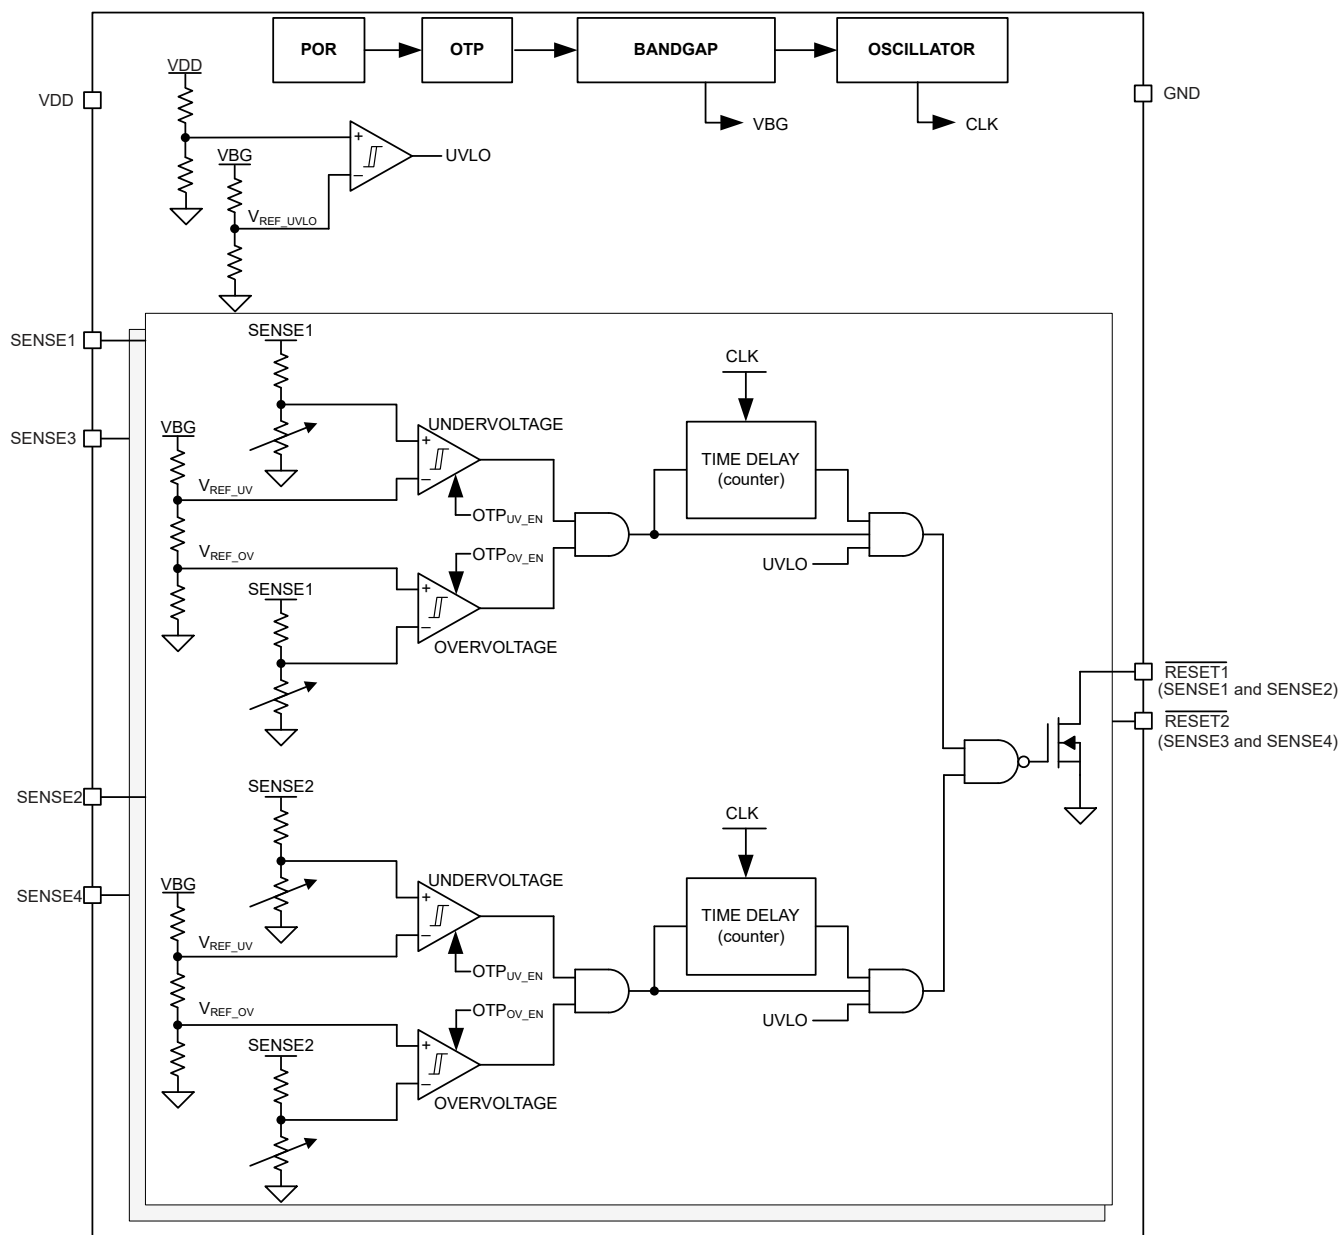


图 7-4. TPS37044-Q1 Quadruple-Channel Functional Block Diagram

\*For available voltages, window tolerance, time delays, and UV/OV threshold options, see 表 9-2.

## 7.3 Feature Description

### 7.3.1 VDD

The TPS3704-Q1 is designed to operate from an input voltage supply range between 1.7V to 6V. The SENSE<sub>x</sub> pins are monitored by the internal comparator. VDD also functions as the supply for the internal band gap, internal regulator, state machine, buffers, and other control blocks. The reset signal is at a known state when  $V_{DD} > V_{POR}$ . The undervoltage lockout forces the reset output to be asserted when VDD falls below the minimum VDD voltage.

The VDD capacitor is not required for this device; however, if the input supply is noisy, then good design practice is to place a 0.1  $\mu$ F to 1  $\mu$ F bypass capacitor between the VDD pin and the GND pin to make sure enough charge is available for the device to power up correctly. VDD must be at or above  $V_{DD(MIN)}$  for start-up delay

( $t_{\text{STRT}} + t_{\text{D}}$ ) to begin and for the device to be fully functional.

### 7.3.2 SENSEx Input

The SENSEx input can vary from 0V to 6V, regardless of the device supply voltage used. The SENSEx pins are used to monitor critical voltage rails or push-button inputs. If the voltage on this pin drops below  $V_{\text{IT-(UV)}}$  or goes above  $V_{\text{IT+(OV)}}$ , then  $\overline{\text{RESETx}}/\text{RESETx}$  is asserted. When the voltage on the SENSEx pin rises above the positive threshold voltage  $V_{\text{IT-(UV)}} + V_{\text{HYS}}$  or goes below the negative threshold voltage  $V_{\text{IT+(OV)}} - V_{\text{HYS}}$ ,

$\overline{\text{RESETx}}/\text{RESETx}$  deasserts after the set  $\overline{\text{RESETx}}/\text{RESETx}$  delay time. The internal comparators have built-in hysteresis to make sure well-defined  $\overline{\text{RESETx}}/\text{RESETx}$  assertions and deassertions even when there are small changes on the voltage rail being monitored.

The TPS3704-Q1 combines comparators with a precision reference voltage and a trimmed resistor divider. This configuration optimizes device accuracy because all resistor tolerances are accounted for in the accuracy and performance specifications. The TPS3704-Q1 is relatively immune to short transients on the SENSEx pin. Although not required in most cases, for noisy applications, good analog design practice is to place a 10nF to 100nF bypass capacitor at the SENSEx inputs to reduce sensitivity to transient voltages on the monitored signals.

#### 7.3.2.1 Immunity to SENSEx Pins Voltage Transients

The TPS3704-Q1 is immune to short voltage transient spikes on the input SENSEx pins. Sensitivity to transients depends on both transient duration and overdrive (amplitude) of the transient.

Overdrive is defined by how much  $V_{\text{SENSEx}}$  exceeds the specified threshold, and is important to know because the smaller the overdrive, the slower the response of the  $\overline{\text{RESETx}}/\text{RESETx}$  outputs. Threshold overdrive is calculated as a percent of the threshold in question, as shown in 方程式 1:

$$\text{Overdrive \%} = | (V_{\text{SENSEx}} - (V_{\text{IT-(UV)}} \text{ or } V_{\text{IT+(OV)}})) / V_{\text{IT}} (\text{Nominal}) \times 100\% | \quad (1)$$

where:

- $V_{\text{SENSEx}}$  is the voltage at the SENSEx pin
- $V_{\text{IT}} (\text{Nominal})$  is the nominal threshold voltage
- $V_{\text{IT-(UV)}}$  and  $V_{\text{IT+(OV)}}$  represent the actual undervoltage or overvoltage tripping voltage

##### 7.3.2.1.1 SENSEx Hysteresis

Overvoltage and undervoltage comparators include built-in hysteresis that provides noise immunity and ensures stable operation. For example, if the voltage on the SENSEx pin falls below  $V_{\text{IT-(UV)}}$  or above  $V_{\text{IT+(OV)}}$ , then  $\overline{\text{RESETx}}/\text{RESETx}$  is asserted. When the voltage on the SENSEx pin is between the positive and negative threshold voltages,  $\overline{\text{RESETx}}/\text{RESETx}$  deasserts after the set  $\overline{\text{RESETx}}/\text{RESETx}$  delay time. 图 7-5 shows the relation between  $V_{\text{IT-(UV)}}$ ,  $V_{\text{IT+(OV)}}$  and the hysteresis voltage ( $V_{\text{HYS}}$ ).

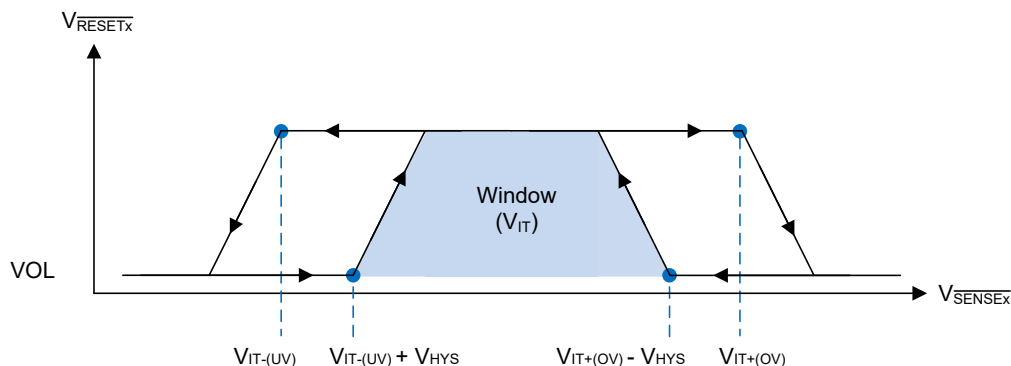


图 7-5. SENSEx Pin Hysteresis

### 7.3.3 $\overline{\text{RESETx}}/\text{RESETx}$

In a typical TPS3704-Q1 application, the  $\overline{\text{RESETx}}/\text{RESETx}$  output is connected to a reset or enable input of a processor [such as a digital signal processor (DSP), application-specific integrated circuit (ASIC), or other processor type] or the enable input of a voltage regulator [such as a DC/DC converter or low-dropout regulator (LDO)].

The TPS3704-Q1 has open-drain active low outputs that require an external pullup resistor to hold these lines high to the required voltage logic. Connect the external pullup resistor to the proper voltage rail to enable the output to be connected to other devices at the correct interface voltage levels. To ensure proper voltage levels, give some consideration when choosing the external pullup resistor values. The external pull-up resistor value is determined by  $V_{OL}$ , output capacitive loading, and output leakage current. These values are specified in 节 6.5. The open-drain output can be connected as a wired-OR logic with other  $\overline{\text{RESETx}}/\text{RESETx}$  open-drain pins.

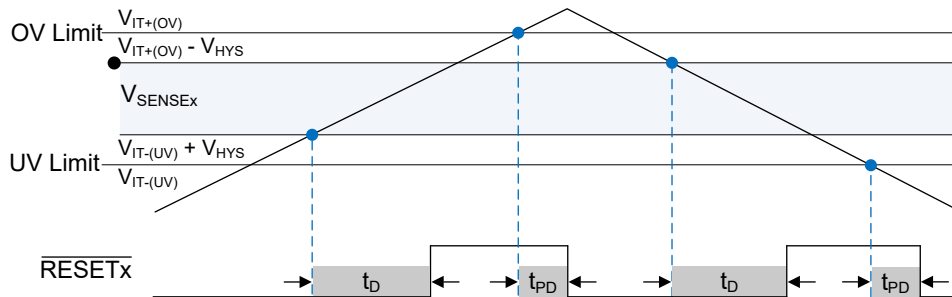


图 7-6.  $\overline{\text{RESETx}}$  Output

## 7.4 Device Functional Modes

表 7-1. Functional Mode Truth Table

| DESCRIPTION                | CONDITION                                   | VDD PIN                          | OUTPUT $\overline{\text{RESETx}}$ / ( $\text{RESETx}$ ) PIN |
|----------------------------|---------------------------------------------|----------------------------------|-------------------------------------------------------------|
| Normal operation           | $V_{IT-(UV)} < \text{SENSEx} < V_{IT+(OV)}$ | $V_{DD} > V_{DD(MIN)}$           | High / (Low)                                                |
| Normal operation (UV only) | $\text{SENSEx} > V_{IT-(UV)}$               | $V_{DD} > V_{DD(MIN)}$           | High / (Low)                                                |
| Overvoltage detection      | $\text{SENSEx} > V_{IT+(OV)}$               | $V_{DD} > V_{DD(MIN)}$           | Low / (High)                                                |
| Undervoltage detection     | $\text{SENSEx} < V_{IT-(UV)}$               | $V_{DD} > V_{DD(MIN)}$           | Low / (High)                                                |
| UVLO engaged               | $V_{IT-(UV)} < \text{SENSEx} < V_{IT+(OV)}$ | $V_{POR} < V_{DD} < \text{UVLO}$ | Low / (High)                                                |

### 7.4.1 Normal Operation ( $V_{DD} > V_{DD(MIN)}$ )

When the voltage on  $V_{DD}$  is greater than  $V_{DD(MIN)}$  for approximately  $(t_{STRT} + t_D)$ , the  $\overline{\text{RESETx}}/\text{RESETx}$  output state corresponds to the  $\text{SENSEx}$  pin voltage with respect to the threshold limits. When  $\text{SENSEx}$  voltage is outside of threshold limits the  $\overline{\text{RESETx}}/\text{RESETx}$  voltage is asserted.

### 7.4.2 Undervoltage Lockout ( $V_{POR} < V_{DD} < \text{UVLO}$ )

When the voltage on  $V_{DD}$  is less than the device UVLO voltage but greater than the power-on-reset voltage ( $V_{POR}$ ), the  $\overline{\text{RESETx}}/\text{RESETx}$  pin is asserted, regardless of the voltage on the  $\text{SENSEx}$  pin.

### 7.4.3 Power-On Reset ( $V_{DD} < V_{POR}$ )

When the voltage on  $V_{DD}$  is lower than the required voltage ( $V_{POR}$ ) to internally pull the asserted output to GND, the  $\overline{\text{RESETx}}/\text{RESETx}$  signal is undefined and is not to be relied upon for proper device function.

## 8 Application and Implementation

### 备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 8.1 Application Information

#### 8.1.1 Voltage Threshold Accuracy

Voltage monitoring requirements vary depending on the voltage supply tolerance of the device being powered. Because of the high precision of the TPS3704-Q1 ( $\pm 1\%$  max), the device allows for wider supply voltage margins and threshold headroom for tight tolerance applications.

For example, take a DC/DC regulator providing power to a core voltage rail of a microcontroller (MCU). The MCU has a tolerance of  $\pm 5\%$  of the nominal output voltage of the DC/DC. The user sets an ideal voltage threshold of  $\pm 4\%$ , which allows for  $\pm 1\%$  of threshold accuracy. Because the TPS3704-Q1 threshold accuracy is  $\pm 1\%$ , the user has more supply voltage margin, which can allow for a relaxed power supply design. This design gives flexibility to the DC/DC to use a smaller output capacitor or inductor because of a larger voltage window for voltage ripple and transients. There is also headroom between the minimum system voltage and voltage tolerance of the MCU to make sure that the voltage supply is never in the region of potential failure of malfunction without the TPS3704-Q1 asserting a reset signal.

图 8-1 shows the supply undervoltage margin and accuracy of the TPS3704-Q1 for the example explained in this section. Using a low accuracy supervisor cuts into the available budget for the power-supply ripple and transient response. This gives less flexibility to the user and a more stringent DC/DC converter design.

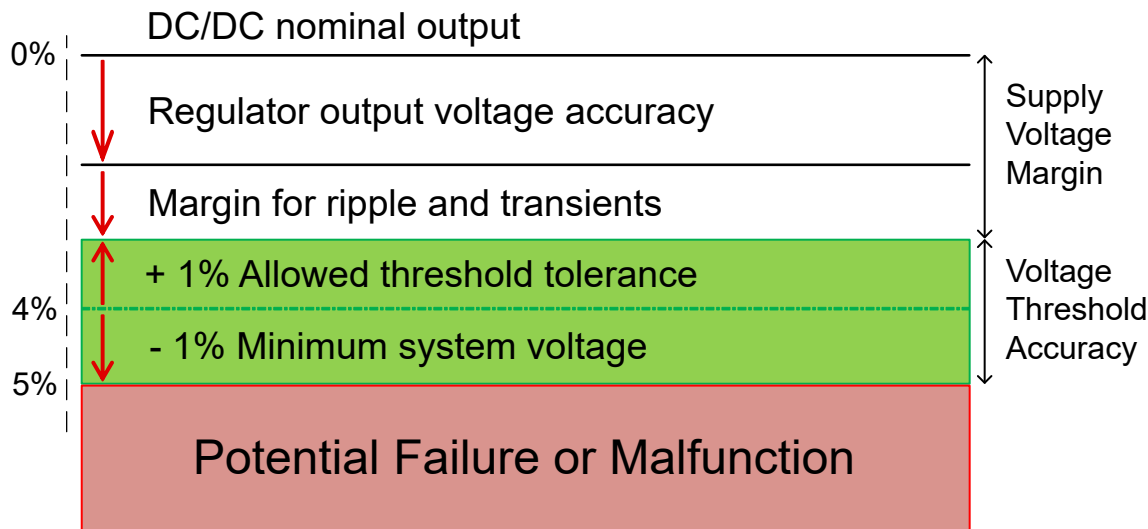


图 8-1. TPS3704-Q1 Voltage Threshold Accuracy

### 8.1.2 Adjustable Voltage Thresholds

The TPS3704-Q1 maximum accuracy (1%) allows for adjustable voltage thresholds using external resistors without adding major inaccuracies to the device. In case the desired monitored voltage is not available, external resistor dividers can be used to set the desired voltage thresholds. 图 8-2 illustrates an example of how to adjust the voltage threshold with external resistor dividers. For assistance in calculating the external resistors access the [TPS3704 adjustable threshold voltage resistor calculator](#) in the Design Tools and Simulation section of the TPS3704 product page. The resistors can be calculated depending on the desired voltage threshold and device part number. TI recommends using a voltage threshold device variant because of the bypass mode of the internal resistor ladder.

For example, consider a 2.0V rail being monitored ( $V_{MON}$ ) using the TPS37042BJOFDDFRQ1 variant. Using 方程式 2,  $R_1 = 15k\Omega$  given that  $R_2 = 10k\Omega$ ,  $V_{MON} = 2V$ , and  $V_{SENSE1} = 0.8V$ . This device is typically meant to monitor a

0.8V rail with  $\pm 4\%$  voltage thresholds. This means that the device undervoltage threshold ( $V_{IT-(UV)}$ ) and overvoltage threshold ( $V_{IT+(OV)}$ ) is 0.768V and 0.832V, respectively. Using 方程式 2,  $V_{MON} = 1.92V$  when  $V_{SENSE1} = V_{IT-(UV)}$ . This can be denoted as  $V_{MON-}$ , the monitored undervoltage threshold where the device asserts a reset signal. Using 方程式 2 again, the monitored overvoltage threshold ( $V_{MON+}$ ) = 2.08V when  $V_{SENSE1} = V_{IT+(OV)}$ . If a wider tolerance or UV only threshold is desired, use a device variant listed in 表 9-2 to determine which device part number matches which application.

$$V_{SENSE1} = V_{MON} \times (R_2 / (R_1 + R_2)) \quad (2)$$

There are inaccuracies that must be taken into consideration when adjusting voltage thresholds. Aside from the tolerance of the resistor divider, there is an internal resistance of the SENSE1 pin that can affect the accuracy of the resistor divider. Although expected to be very high impedance, users are recommended to calculate the values for design specifications. The internal sense resistance  $R_{SENSE1}$  can be calculated by the sense voltage  $V_{SENSE1}$  divided by the sense current  $I_{SENSE1}$  as shown in 方程式 4.  $V_{SENSE1}$  can be calculated using 方程式 2 depending on the resistor divider and monitored voltage.  $I_{SENSE1}$  can be calculated using 方程式 3.

$$I_{SENSE1} = [(V_{MON} - V_{SENSE1}) / R_1] - (V_{SENSE1} / R_2) \quad (3)$$

$$R_{SENSE1} = V_{SENSE1} / I_{SENSE1} \quad (4)$$

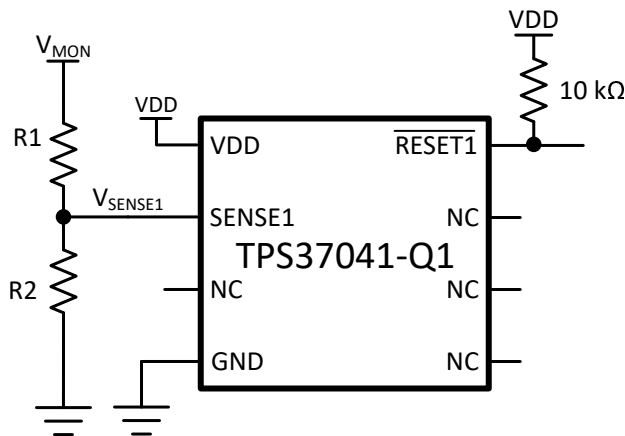


图 8-2. Adjustable Voltage Threshold With External Resistor Dividers

## 8.2 Typical Applications

### 8.2.1 Design 1: Multi-Rail Window Monitoring for Microcontroller Power Rails

图 8-3 show a typical application for the TPS37042-Q1. The TPS37042-Q1 is used to monitor two PMIC (Power Management IC) voltage rails that power the core and I/O voltage of the microcontroller that requires accurate reset delay and voltage supervision. The PMIC leverages the TPS37042-Q1 to monitor the core voltage rail of a MCU similar to the circuit below.

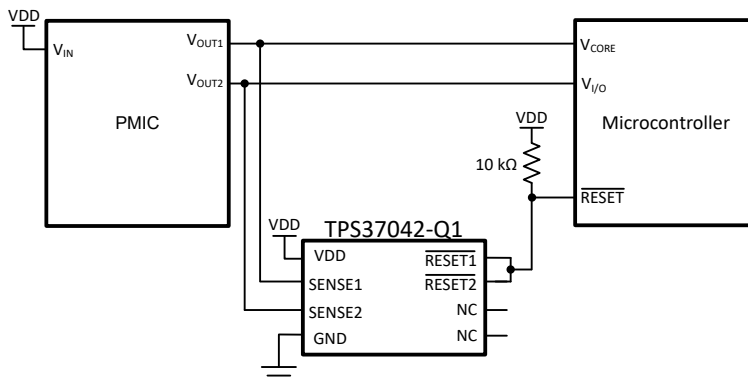


图 8-3. TPS37042-Q1 Dual-Channel Monitoring Two Microcontroller Power Rails

#### 8.2.1.1 Design Requirements

表 8-1. Design Requirements

| PARAMETER                                      | DESIGN REQUIREMENT                                                                                                | DESIGN RESULT                                                                                            |
|------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Monitored rails                                | 3.3V <sub>I/O</sub> nominal, with alerts if outside of ±8% of 3.3V (including device accuracy), 10ms reset delay  | Worst case V <sub>IT+(OV)</sub> = 3.533V (7.06%)<br>Worst case V <sub>IT-(UV)</sub> = 3.071V (- 6.94%)   |
|                                                | 1.2V <sub>CORE</sub> nominal, with alerts if outside of ±5% of 1.2V (including device accuracy), 10ms reset delay | Worst case V <sub>IT+(OV)</sub> = 1.2484V (4.03%)<br>Worst case V <sub>IT-(UV)</sub> = 1.1524V (- 3.97%) |
| Output logic voltage                           | 5V CMOS                                                                                                           | 5V CMOS                                                                                                  |
| Maximum system supervision current consumption | 25μA                                                                                                              | 5.5μA (20μA max)                                                                                         |

#### 8.2.1.2 Detailed Design Procedure

Determine which version of the TPS3704-Q1 best fits the monitored rail (V<sub>MON</sub>) and window tolerances found on 表 9-2. The TPS3704-Q1 allows overvoltage and undervoltage monitoring for precise voltage supervision of common rails between 0.4V and 5.5V. This application calls for very tight monitoring of the rail with only ±5% of variation allowed on the 1.2V<sub>CORE</sub> rail. To make sure this requirement is met, the TPS37042-Q1 was chosen for its ±3% thresholds. The 3.3V<sub>I/O</sub> is more flexible and can operate up to 8% variance. Because the TPS3704-Q1 comes in various tolerance options, the ±6% thresholds can be chosen for this voltage rail. To calculate the worst case for V<sub>IT+(OV)</sub> and V<sub>IT-(UV)</sub>, the accuracy must also be taken into account. The worst-case for V<sub>IT+(OV)</sub> and V<sub>IT-(UV)</sub> can be calculated shown in 方程式 5 and 方程式 6 respectively:

$$V_{IT+(OV-Worst\ Case)} = V_{MON} \times (1 + \%Threshold) \times (1 + \%Accuracy) = 1.2 \times (1.03) \times (1.01) = 1.2484V \quad (5)$$

$$V_{IT-(UV-Worst\ Case)} = V_{MON} \times (1 - \%Threshold) \times (1 - \%Accuracy) = 1.2 \times (0.97) \times (0.99) = 1.1524V \quad (6)$$

Hysteresis must also be taken into account when determining the OV and UV thresholds such that the release point after the fault is higher than the power-supply tolerance limits. See 图 6-1 for more details.

When the outputs switch to a high impedance state, the rise time of the RESET<sub>x</sub>/RESET<sub>x</sub> pin depends on the pullup resistance and the capacitance on that node. Choose pullup resistors that satisfy both the downstream

timing requirements and the sink current required to have a  $V_{OL}$  low enough for the application;  $10k\Omega$  to  $1M\Omega$  resistors are a good choice for low-capacitive loads.

### 8.2.2 Design 2: Manual Self-Test Option for Enhanced Functional Safety Use Cases

图 8-4 displays a self-test scheme where a manual self-test function can be implemented. Any SENSEx pin can be reserved and used to trigger a fault to be observed at the output, thus pre-checking the TPS3704-Q1 for fault detection. Because the TPS3704-Q1 is functional safety compliant, it helps elevate applications like the automotive ADAS camera achieve ISO 26262 requirements and automotive safety integrity levels. This example uses a TPS37044F-Q1, configured for separate undervoltage and overvoltage (UV/OV) outputs where the SENSE4 thresholds are set at 5.5V for OV and 2V for UV.

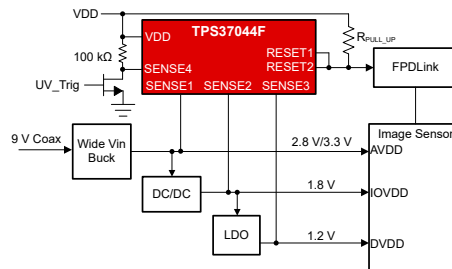


图 8-4. TPS37044F-Q1 Quad-Channel Monitoring With Manual Self-Test Option for Functional Safety

#### 8.2.2.1 Design Requirements

表 8-2. Design Requirements

| PARAMETER                 | DESIGN REQUIREMENT                                                                                            | DESIGN RESULT                                                                        |
|---------------------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Monitored rails           | 3.3V AVDD nominal, with alerts if outside of $\pm 4\%$ of 3.3V (including device accuracy), 10ms reset delay  | Worst case $V_{IT+(OV)} = 3.432V (+4\%)$<br>Worst case $V_{IT-(UV)} = 3.168V (-4\%)$ |
|                           | 1.8V IOVDD nominal, with alerts if outside of $\pm 4\%$ of 1.8V (including device accuracy), 10ms reset delay | Worst case $V_{IT+(OV)} = 1.872V (+4\%)$<br>Worst case $V_{IT-(UV)} = 1.728V (-4\%)$ |
|                           | 1.2V DVDD nominal, with alerts if outside of $\pm 4\%$ of 1.2V (including device accuracy), 10ms reset delay  | Worst case $V_{IT+(OV)} = 1.248V (+4\%)$<br>Worst case $V_{IT-(UV)} = 1.152V (-4\%)$ |
| SENSE4 (Self-test Option) | 100k $\Omega$ pullup resistor to VDD with NFET pulldown transistor to GND                                     | UV_Trig = High - causing SENSE4 pin going low<br>UV_Trig = Low - in normal operation |
| Output logic voltage      | 5V CMOS                                                                                                       | 5V CMOS                                                                              |
| Max system IDD current    | 25 $\mu A$                                                                                                    | 5.5 $\mu A$ (20 $\mu A$ maximum)                                                     |


#### 8.2.2.2 Detailed Design Procedure

图 8-4 shows a self-test scheme where a manual self-test function can be implemented. SENSE4 has an overvoltage (OV) threshold that is set at 5.5V and the undervoltage (UV) threshold set at 2V. SENSE4 can be connected via a  $100k\Omega$  resistor to VDD. The self-test setup gives the added benefit of a built-in overvoltage detector for the rail powering the TPS37044F-Q1. From a functional safety perspective, a voltage supervisor cannot be considered reliable if the supervisor is operating outside its recommended operated limits.

To trigger a manual self-test, pull UV\_Trig high to cause SENSE4 to be logic low, therefore triggering an undervoltage (UV) fault. The UV fault appears at RESET2 as an asserted low signal. By tying both reset outputs to an NMI or interrupt input of the processor, this self-test option scheme serves as a purpose to make sure that RESET2, of the TPS37044F-Q1 is operating properly. For more information on functional safety, see the [Functional Safety Manual](#).


### 8.2.3 Application Curves

These application curves were taken with the TPS37044A7OHDDFRQ1 device on the TPS3704Q1EVM. Please see the [TPS3704Q1EVM User Guide](#) for more information.

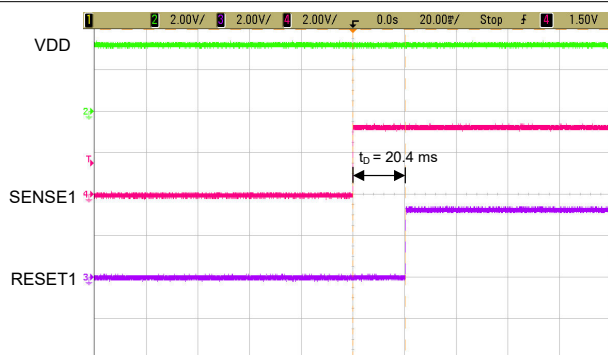


V<sub>SENSE1</sub> start up 0V to 3.3V, V<sub>DD</sub> = 3.3V, V<sub>RESET1</sub> = 3.3V,  
TPS37044A7OHDDFRQ1

图 8-5. TPS37044-Q1 SENSE1 Start-Up Function

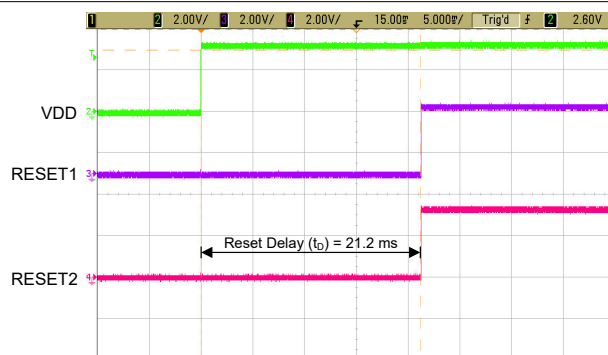


V<sub>DD</sub> start up 0V to 3.3V, V<sub>SENSE1</sub> = 3.3V, V<sub>SENSE2</sub> = 1.8V,  
V<sub>SENSE3\_4</sub> = 1.15V, V<sub>RESET1\_2</sub> = 3.3V,  
TPS37044A7OHDDFRQ1

图 8-6. TPS37044-Q1 VDD Start-Up Function

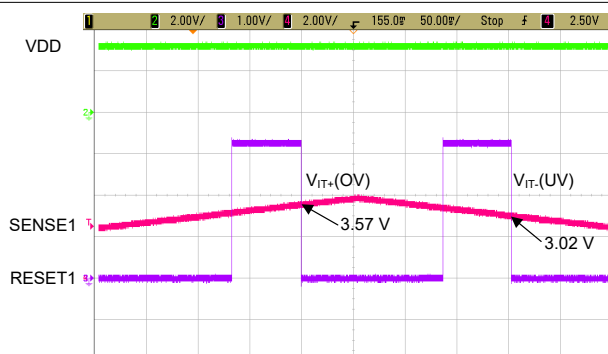


V<sub>SENSE1</sub> ramp 0V to 3.75V, OV/UV Threshold = 3.3V ( $\pm 8\%$ ),  
V<sub>SENSE2</sub> = 1.8V, V<sub>DD</sub> = 3.3V, V<sub>RESET1</sub> = 3.3V,  
TPS37044A7OHDDFRQ1

图 8-7. TPS37044-Q1 Overvoltage and Undervoltage Function

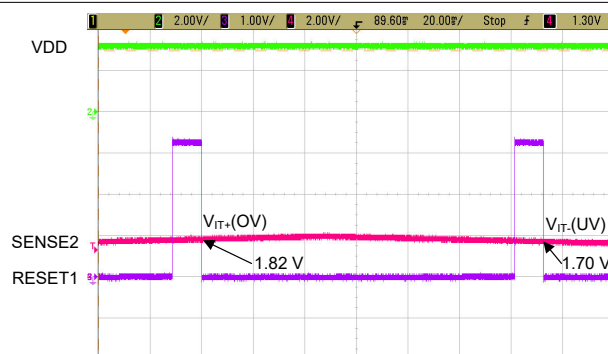


V<sub>SENSE2</sub> ramp 0V to 2V, OV/UV Threshold = 1.8V  
(+4%, -3.5%), V<sub>SENSE1</sub> = 3.3V, V<sub>DD</sub> = 3.3V,  
V<sub>RESET1</sub> = 3.3V, TPS37044A7OHDDFRQ1

图 8-8. TPS37044-Q1 Overvoltage and Undervoltage Function

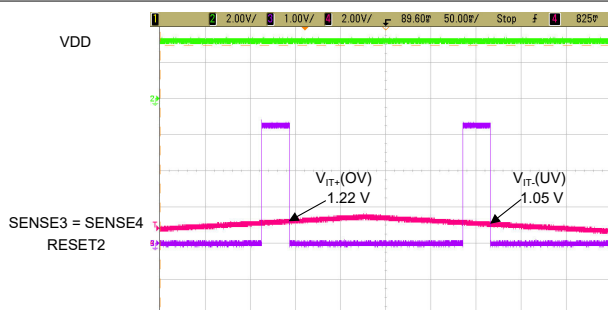


V<sub>SENSE3\_4</sub> ramp 0V to 1.5V, OV/UV Threshold = 1.15V  
(+7.5%, -5.5%), V<sub>DD</sub> = 3.3V, V<sub>RESET2</sub> = 3.3V,  
TPS37044A7OHDDFRQ1

图 8-9. TPS37044-Q1 Overvoltage and Undervoltage Function

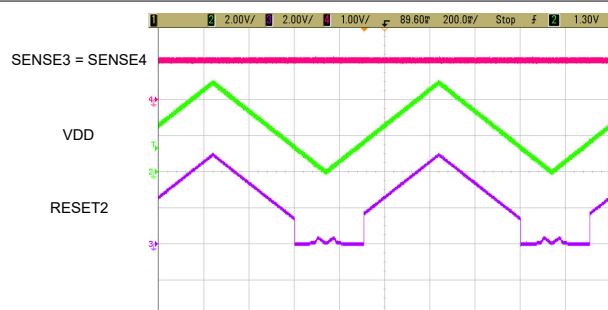


V<sub>DD</sub> ramp 0V to 5V, V<sub>SENSE3\_4</sub> = 1.2V, V<sub>RESET2</sub> = 3.3V,  
TPS37044A7OHDDFRQ1

图 8-10. TPS37044-Q1 VDD Ramp-Up Function

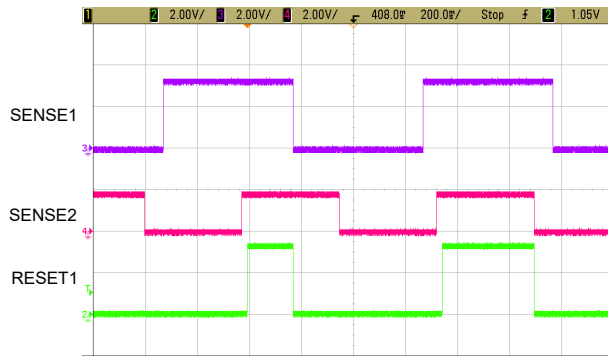


$V_{SENSE1}$  toggling 0V to 3.3V [OV/UV Threshold = 3.3V ( $\pm 8\%$ )],  
 $V_{SENSE2}$  toggling from 0V to 1.8V [OV/UV  
 Threshold = 1.8V (+4%, -3.5%)],  $V_{DD} = 3.3V$ ,  
 $V_{RESET1} = 3.3V$ , TPS37044A7OHDDFRQ1

图 8-11. TPS37044-Q1 SENSE 1 and  
SENSE 2 Toggling

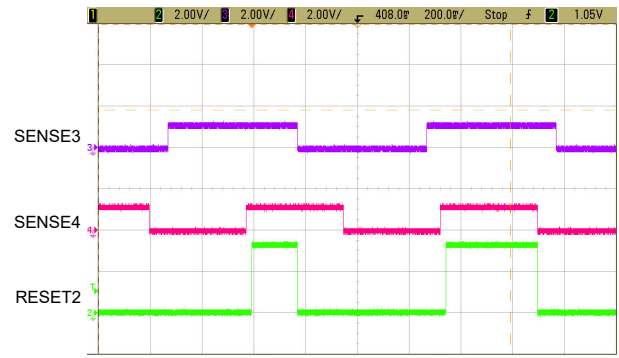


$V_{SENSE3}$  toggling 0V to 1.15V [OV/UV Threshold = 1.15V  
 (+7.5%, -5.5%)],  $V_{SENSE4}$  toggling from 0V to 1.15V  
 [OV/UV Threshold = 1.15V (+7.5%, -5.5%)],  $V_{DD} = 3.3V$ ,  
 $V_{RESET1} = 3.3V$ , TPS37044A7OHDDFRQ1

图 8-12. TPS37044-Q1 SENSE 3 and  
SENSE 4 Toggling

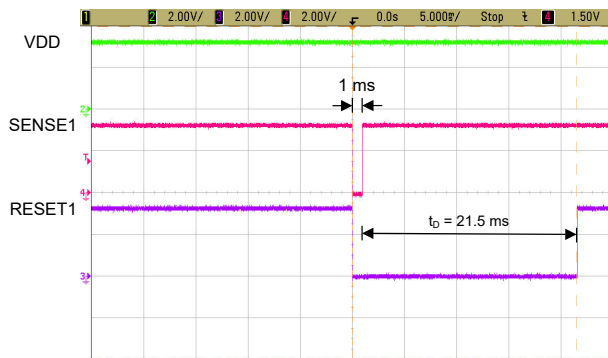

$V_{SENSE1} = 3.3V$ ,  $V_{SENSE1} = 0V$  via push-button for 1ms,  
 $V_{DD} = 3.3V$ ,  $V_{RESET1} = 3.3V$ , TPS37044A7OHDDFRQ1

图 8-13. TPS37044-Q1 SENSE1 Push-Button  
Monitoring Function With Reset Time Delay

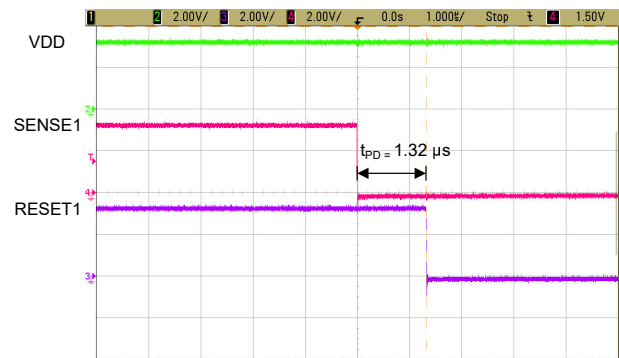

$V_{SENSE1}$  toggling from 3.3V to 0V,  $V_{DD} = 3.3V$ ,  $V_{RESET1}$   
 toggling from 3.3V to 0V, TPS37044A7OHDDFRQ1

图 8-14. TPS37044-Q1 SENSE1  
Propagation Delay Function

## 8.3 Power Supply Recommendations

### 8.3.1 Power Supply Guidelines

This device is designed to operate from an input supply with a voltage range between 1.7V to 5.5V. This device has a 6V absolute maximum rating on the VDD pin. Good analog practice is to place a 0.1μF to 1μF capacitor between the VDD pin and the GND pin depending on the input voltage supply noise. If the voltage supply providing power to VDD is susceptible to any large voltage transients that exceed maximum specifications, additional precautions must be taken. See [SNVA849](#) for more information.

## 8.4 Layout

### 8.4.1 Layout Guidelines

- Place the external components as close to the device as possible. This configuration prevents parasitic errors from occurring.
- Avoid using long traces for the VDD supply node. The VDD capacitor, along with parasitic inductance from the supply to the capacitor, can form an LC circuit and create ringing with peak voltages above the maximum VDD voltage.

- Avoid using long voltage traces to the sense pin. Long traces increase parasitic inductance and cause inaccurate monitoring and diagnostics.
- If SENSEx capacitors ( $C_{SENSEx}$ ) are used, place capacitors as close as possible to the SENSEx pins to further improve noise immunity on the SENSEx pins. Placing a 10nF to 100nF capacitors between the SENSEx pins and GND can reduce the sensitivity to transient voltages on the monitored signal.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when absolutely necessary.

#### 8.4.2 Layout Example

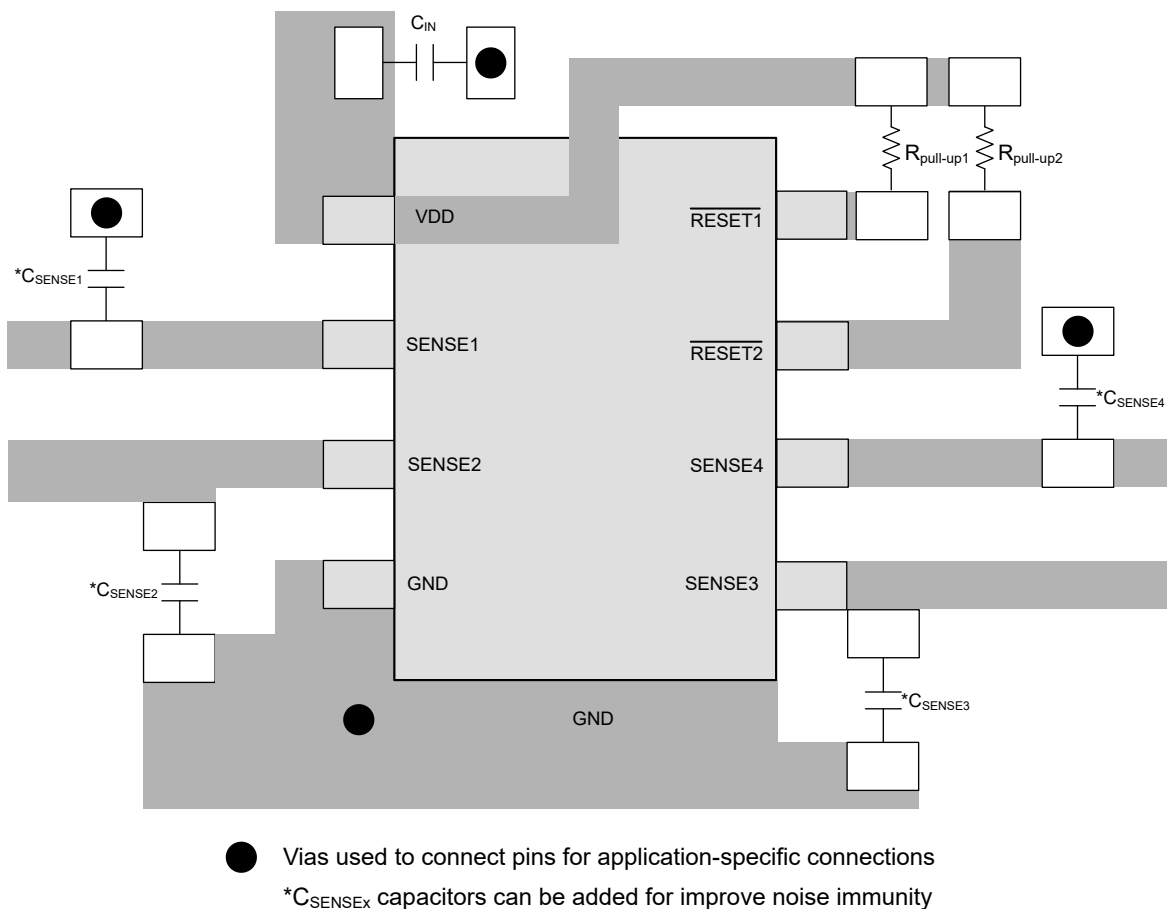


图 8-15. Recommended Layout

## 9 Device and Documentation Support

### 9.1 Device Nomenclature

图 4-1 在 节 4 和 表 9-1 描述如何解码设备的功能，基于其零件号列在 表 9-2。

**表 9-1. Device Naming Convention**

| DESCRIPTION                    | NOMENCLATURE   | VALUE                               |
|--------------------------------|----------------|-------------------------------------|
| Generic part number            | TPS3704x-Q1    | TPS3704x-Q1                         |
| Channel options                | 1              | One-channel option                  |
|                                | 2              | Dual-channel option                 |
|                                | 3              | Triple-channel option               |
|                                | 4              | Quad-channel option                 |
| Detection options              | Ax, Bx, Cx,... | See 表 9-2                           |
| Variant code (output topology) | O              | Open-drain, active-low              |
|                                | L              | Push-pull, active-low               |
|                                | H              | Push-pull, active-high              |
| Reset time delay option        | A              | 20 $\mu$ s reset time delay         |
|                                | B              | 1ms reset time delay                |
|                                | C              | 2ms reset time delay                |
|                                | D              | 3ms reset time delay                |
|                                | E              | 5ms reset time delay                |
|                                | F              | 10ms reset time delay               |
|                                | G              | 15ms reset time delay               |
|                                | H              | 20ms reset time delay               |
|                                | I              | 25ms reset time delay               |
|                                | J              | 35ms reset time delay               |
|                                | K              | 40ms reset time delay               |
|                                | L              | 50ms reset time delay               |
|                                | M              | 70ms reset time delay               |
|                                | N              | 100ms reset time delay              |
|                                | O              | 140ms reset time delay              |
|                                | P              | 150ms reset time delay              |
|                                | R              | 200ms reset time delay              |
|                                | S              | 280ms reset time delay              |
|                                | T              | 400ms reset time delay              |
|                                | U              | 560ms reset time delay              |
|                                | V              | 800ms reset time delay              |
|                                | W              | 1120ms reset time delay             |
|                                | X              | 1200ms reset time delay             |
| Package                        | DDF            | SOT-23 8-pin (1.6mm $\times$ 2.9mm) |
| Reel                           | R              | Large reel                          |
| Automotive version             | Q1             | Q100 AEC                            |

**表 9-2. Device Threshold Table**

| ORDERABLE PART NAME | VARIANT <sup>(3)</sup> | OUTPUT TYPE <sup>(4)</sup> | NUM OF CHAN. | RESET TIME | SENSE1 <sup>(1) (2)</sup> | SENSE2 <sup>(1) (2)</sup> | SENSE3 <sup>(1) (2)</sup> | SENSE4 <sup>(1) (2)</sup> |
|---------------------|------------------------|----------------------------|--------------|------------|---------------------------|---------------------------|---------------------------|---------------------------|
| TPS37041BPLEDFFRQ1  | Fixed                  | L                          | 1            | 5ms        | 0.9V ( $\pm 7\%$ )        | -                         | -                         | -                         |

**表 9-2. Device Threshold Table (续)**

| ORDERABLE PART NAME | VARIANT <sup>(3)</sup> | OUTPUT TYPE <sup>(4)</sup> | NUM OF CHAN. | RESET TIME | SENSE1 <sup>(1) (2)</sup> | SENSE2 <sup>(1) (2)</sup> | SENSE3 <sup>(1) (2)</sup> | SENSE4 <sup>(1) (2)</sup> |
|---------------------|------------------------|----------------------------|--------------|------------|---------------------------|---------------------------|---------------------------|---------------------------|
| TPS37042BJOFDDFRQ1  | ADJ                    | O                          | 2            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | -                         | -                         |
| TPS37042A3OFDDFRQ1  | Fixed                  | O                          | 2            | 10ms       | 3.3V (±5%)                | 1.2V (±5%)                | -                         | -                         |
| TPS37042ZJOFDDFRQ1  | Fixed                  | O                          | 2            | 10ms       | 1.95V (±4%)               | 3.8V (±6%)                | -                         | -                         |
| TPS37043DJOFDDFR    | ADJ/Fixed              | O                          | 3            | 10ms       | 3.3V (-11%)               | 1.2V (-11%)               | 0.8V (-8%)                | -                         |
| TPS37043A4OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 2.8V (±5%)                | 1.8V (±5%)                | 1.2V (±5%)                | -                         |
| TPS37043A8OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 3.3V (±5%)                | 1.8V (±5%)                | 1.0V (±5%)                | -                         |
| TPS37043CPOFDDFRQ1  | ADJ/Fixed              | O                          | 3            | 10ms       | 3.3V (±4%)                | 0.75V (±4%)               | 0.8V (±3%)                | -                         |
| TPS37043ZJOFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 0.95V (±4%)               | 1.35V (±4%)               | 1.8V (±4%)                | -                         |
| TPS37043LJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.4V (±5%)                | 0.4V (±5%)                | 0.8V (±5%)                | -                         |
| TPS37043CJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                | -                         |
| TPS37043MJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.4V (±7%)                | 0.4V (±7%)                | 0.8V (±7%)                | -                         |
| TPS37043A5OFDDFRQ1  | Fixed                  | O                          | 3            | 10ms       | 3.3V (±4%)                | 1.8V (±4%)                | 1.2V (±4%)                | -                         |
| TPS37043BJOFDDFRQ1  | ADJ                    | O                          | 3            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | -                         |
| TPS37044BJOFDDFR    | ADJ                    | O                          | 4            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                |
| TPS37044LJOJDDFR    | ADJ                    | O                          | 4            | 35ms       | 0.4V (±5%)                | 0.4V (±5%)                | 0.8V (±5%)                | 0.8V (±5%)                |
| TPS37044BJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                | 0.8V (±4%)                |
| TPS37044CJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                | 0.8V (±6%)                |
| TPS37044MJOFDDFRQ1  | ADJ                    | O                          | 4            | 10ms       | 0.4V (±7%)                | 0.4V (±7%)                | 0.8V (±7%)                | 0.8V (±7%)                |
| TPS37044A4OGDDFRQ1  | Fixed                  | O                          | 4            | 15ms       | 3.3V (±8%)                | 1.8V (±4%)                | 1.15V (±6%)               | 1.15V (±6%)               |

- (1) Listed percentage denotes window tolerance, see [图 6-1](#) for more information  
(2) VIT threshold of 0.8V and 0.4V signifies an adjustable channel  
(3) ADJ denotes an adjustable voltage threshold set by an external resistor divider, see [Adjustable Voltage Thresholds](#) for more information  
(4) Output type "L" designates Push Pull Active Low and "O" designates Open Drain Active Low. Reference [图 4-1](#) for more information

## 9.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](https://www.ti.com) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

## 9.3 支持资源

**TI E2E™ 中文支持论坛**是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

## 9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

## 9.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

## 9.6 术语表

### TI 术语表

本术语表列出并解释了术语、首字母缩略词和定义。

## 10 Revision History

注：以前版本的页码可能与当前版本的页码不同

| Changes from Revision B (August 2023) to Revision C (May 2024) | Page |
|----------------------------------------------------------------|------|
| • Removal of orderable part number TPS37042BJOFDDFRQ1.....     | 30   |
| • Addition of orderable part number TPS37041BPLEDDFRQ1.....    | 30   |

| Changes from Revision A (May 2022) to Revision B (August 2023)           | Page |
|--------------------------------------------------------------------------|------|
| • 精简了措辞并突出显示了器件阈值表和计算器工具.....                                            | 1    |
| • 在窗口容差规格中添加了阐述文本.....                                                   | 1    |
| • Addition of 表 4-1 .....                                                | 3    |
| • Clarifying text added to window tolerance specification in 图 6-1 ..... | 11   |
| • Addition of reference to adjustable threshold resistor calculator..... | 24   |
| • Orderable part name additions to 表 9-2 .....                           | 30   |

| Changes from Revision * (March 2021) to Revision A (May 2022) | Page |
|---------------------------------------------------------------|------|
| • 量产数据发布.....                                                 | 1    |

## 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number              | Status<br>(1) | Material type<br>(2) | Package   Pins        | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------------|---------------|----------------------|-----------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS37041BPLEDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1BPQE               |
| TPS37041BPLEDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1BPQE               |
| <a href="#">TPS37042A3OFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 2A3FQ               |
| TPS37042A3OFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 2A3FQ               |
| <a href="#">TPS37042ZJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 2ZJFQ               |
| TPS37042ZJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 2ZJFQ               |
| <a href="#">TPS37043A4OFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A4FQ               |
| TPS37043A4OFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A4FQ               |
| <a href="#">TPS37043A5OFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A5FQ               |
| TPS37043A5OFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A5FQ               |
| <a href="#">TPS37043A8OFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A8FQ               |
| TPS37043A8OFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3A8FQ               |
| <a href="#">TPS37043BJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3BJFQ               |
| TPS37043BJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3BJFQ               |
| <a href="#">TPS37043CJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3CJFQ               |
| TPS37043CJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3CJFQ               |
| <a href="#">TPS37043CPOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3CPFQ               |
| TPS37043CPOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3CPFQ               |
| <a href="#">TPS37043LJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3LJFQ               |
| TPS37043LJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3LJFQ               |
| <a href="#">TPS37043MJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3MJFQ               |
| TPS37043MJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3MJFQ               |
| <a href="#">TPS37043ZJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3ZJFQ               |
| TPS37043ZJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 3ZJFQ               |
| <a href="#">TPS37044A4OGDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4A4GQ               |
| TPS37044A4OGDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4A4GQ               |
| <a href="#">TPS37044BJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4BJFQ               |
| TPS37044BJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4BJFQ               |
| <a href="#">TPS37044CJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4CJFQ               |

| Orderable part number              | Status<br>(1) | Material type<br>(2) | Package   Pins        | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------------|---------------|----------------------|-----------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS37044CJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4CJFQ               |
| <a href="#">TPS37044MJOFDDFRQ1</a> | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4MJFQ               |
| TPS37044MJOFDDFRQ1.A               | Active        | Production           | SOT-23-THIN (DDF)   8 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 4MJFQ               |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## OTHER QUALIFIED VERSIONS OF TPS3704-Q1 :

- Catalog : [TPS3704](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS37041BPLEDFFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37042A3OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37042ZJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043A4OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043A5OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043A8OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043BJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043CJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043CPOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

| Device             | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS37043LJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043MJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37043ZJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37044A4OGDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37044BJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37044CJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS37044MJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device             | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS37041BPLEDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37042A3OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37042ZJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043A4OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043A5OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043A8OFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043BJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043CJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043CPOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043LJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043MJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37043ZJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37044A4OGDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37044BJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37044CJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS37044MJOFDDFRQ1 | SOT-23-THIN  | DDF             | 8    | 3000 | 210.0       | 185.0      | 35.0        |



## SOT-23-THIN - 1.1 mm max height


## PLASTIC SMALL OUTLINE

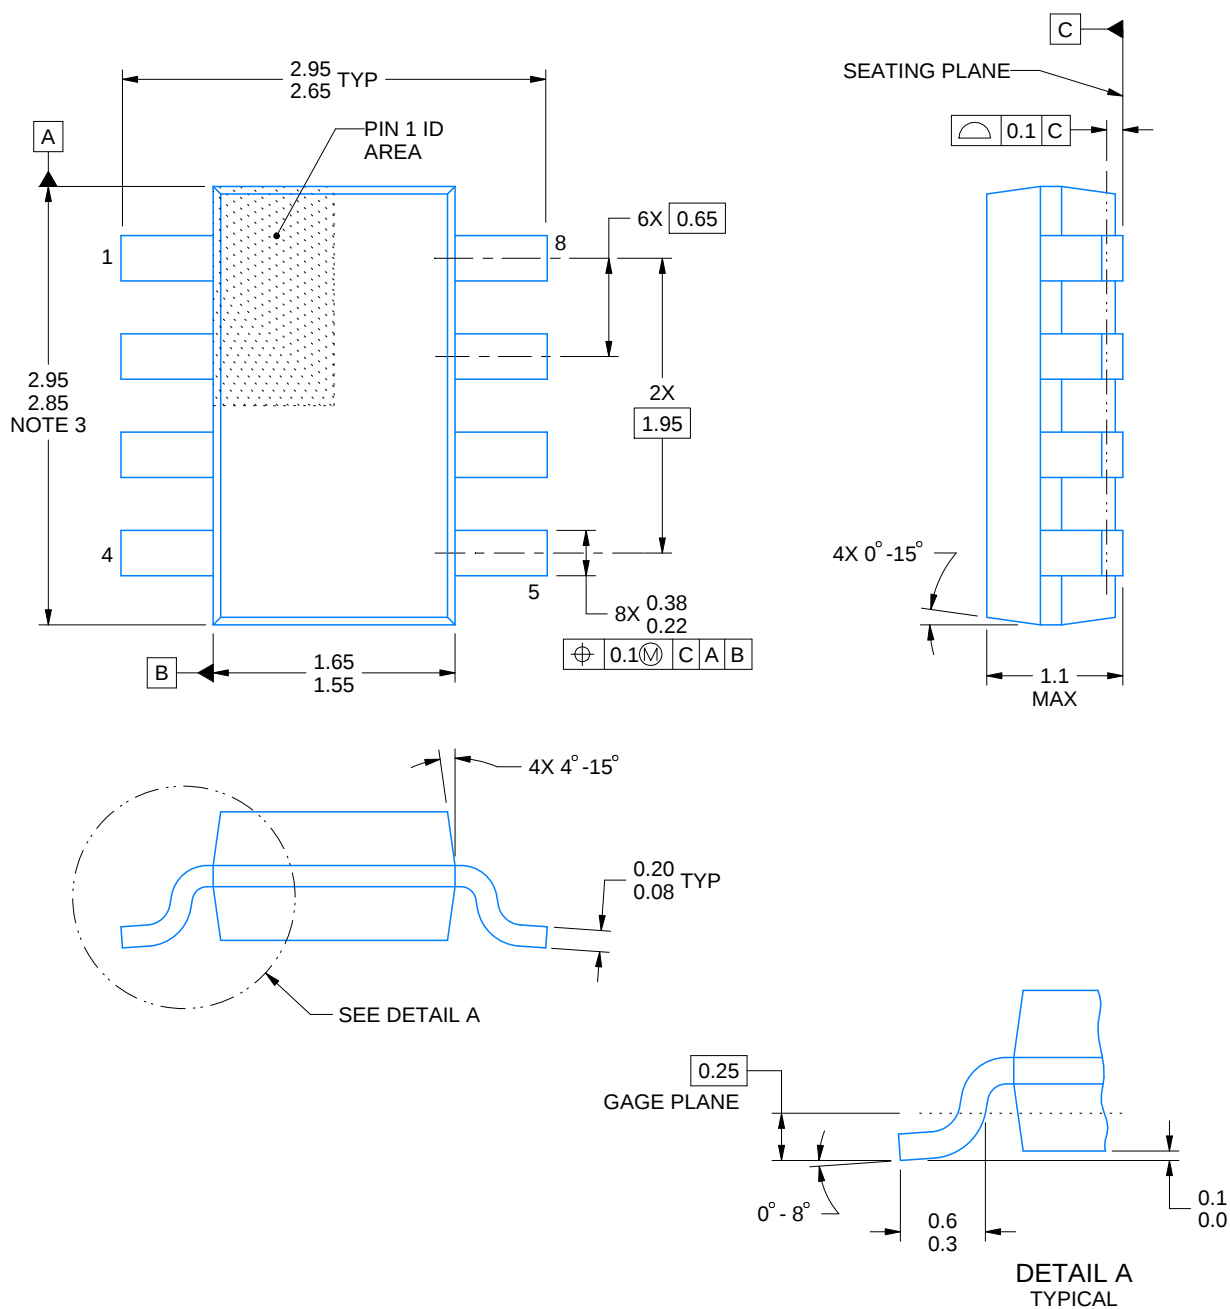



4222047/E 07/2024

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.

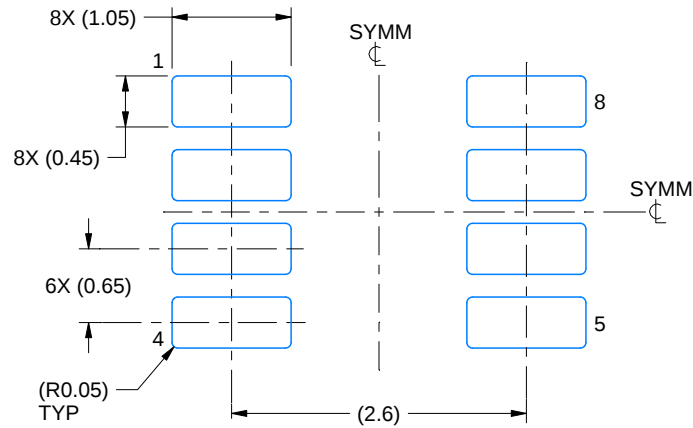

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

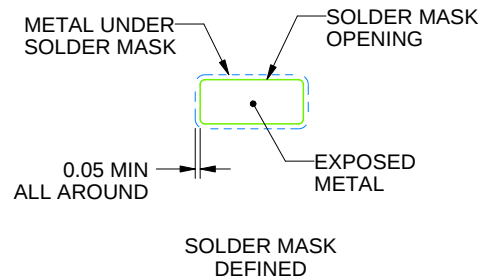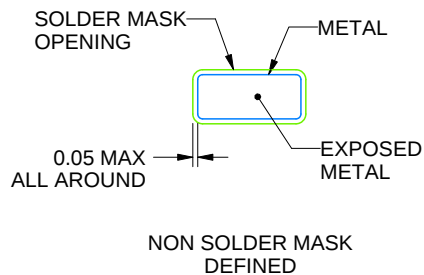

SOLDER MASK DETAILS

4222047/E 07/2024

NOTES: (continued)


4. Publication IPC-7351 may have alternate designs.
5. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DDF0008A

SOT-23-THIN - 1.1 mm max height

PLASTIC SMALL OUTLINE

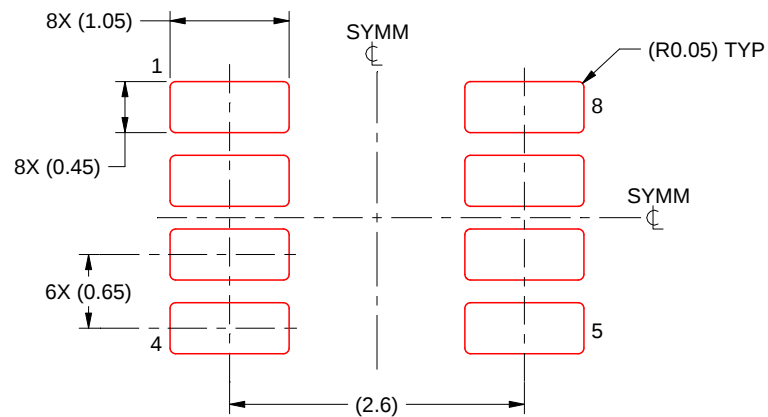

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4222047/E 07/2024

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
7. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司