

## TPS6040x 非稳压 60mA 电荷泵电压逆变器

### 1 特性

- 反相输入电源电压
- 输出电流高达 60mA
- 只需要三个小型 1 $\mu$ F 陶瓷电容器
- 输入电压范围：1.6V 至 5.5V
- 用于改进低输出电流时效率的省电模式 (TPS60400)
- 器件静态电流典型值：65 $\mu$ A
- 用于启动至负载的集成式主动式肖特基二极管
- 小型 5 引脚 SOT-23 封装
- 提供评估模块 TPS60400EVM-178

### 2 应用

- LCD 偏置
- 射频功率放大器的 GaAs 偏置
- 便携式仪表中的传感器电源
- 双极放大器电源
- 医疗仪器
- 由电池供电的设备

### 3 说明

TPS6040x 系列器件可在输入电压范围为 1.6V 至 5.5V 的情况下生成非稳压负输出电压。这些器件通常采用 5V 或 3.3V 的预稳压电源轨供电。由于输入电压范围很宽，两节镍镉电池、镍氢电池或碱性电池，或者一节锂离子电池即可为其供电。



只需要三个 1 $\mu$ F 外部电容器就可以构建完整的直流/直流电荷泵逆变器。整个逆变器采用 5 引脚 SOT23 封装，可以构建在 50mm<sup>2</sup> 的电路板面积上。通过用集成电路取代启动至负载通常所需的肖特基二极管，可以进一步减小电路板面积并减少组件数。

TPS6040x 可以提供最大值为 60mA 的输出电流，在较宽输出电流范围内实现超过 90% 的典型转换效率。提供三个器件选项，分别为 20kHz、50kHz 和 250kHz 固定频率运行。TPS60400 具有可变的开关频率，可降低宽负载范围应用中的工作电流，并实现采用低值电容器的设计。

器件信息

| 器件型号     | 封装 (1)     | 封装尺寸 (标称值)      |
|----------|------------|-----------------|
| TPS6040x | SOT-23 (5) | 2.90mm x 1.60mm |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

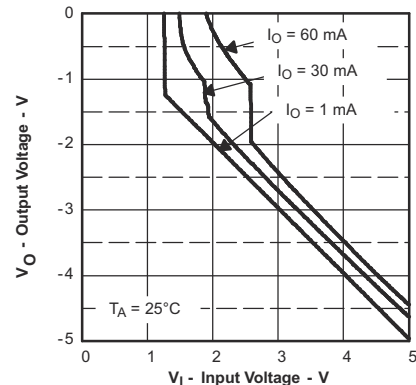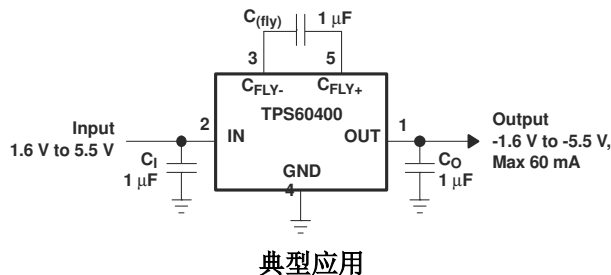

输出电压与输入电压间的关系



## Table of Contents

|                                                |           |                                                                  |           |
|------------------------------------------------|-----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                              | <b>1</b>  | 8.4 Device Functional Modes.....                                 | <b>12</b> |
| <b>2 应用</b> .....                              | <b>1</b>  | <b>9 Application and Implementation</b> .....                    | <b>13</b> |
| <b>3 说明</b> .....                              | <b>1</b>  | 9.1 Application Information.....                                 | 13        |
| <b>4 Revision History</b> .....                | <b>2</b>  | 9.2 Typical Application.....                                     | 13        |
| <b>5 Device Comparison Table</b> .....         | <b>3</b>  | 9.3 System Examples.....                                         | 16        |
| <b>6 Pin Configuration and Functions</b> ..... | <b>3</b>  | <b>10 Power Supply Recommendations</b> .....                     | <b>20</b> |
| <b>7 Specifications</b> .....                  | <b>4</b>  | <b>11 Layout</b> .....                                           | <b>21</b> |
| 7.1 Absolute Maximum Ratings.....              | 4         | 11.1 Layout Guidelines.....                                      | 21        |
| 7.2 Handling Ratings.....                      | 4         | 11.2 Layout Example.....                                         | 21        |
| 7.3 Recommended Operating Conditions.....      | 4         | <b>12 Device and Documentation Support</b> .....                 | <b>22</b> |
| 7.4 Thermal Information.....                   | 4         | 12.1 Device Support.....                                         | 22        |
| 7.5 Electrical Characteristics.....            | 5         | 12.2 Related Links.....                                          | 22        |
| 7.6 Typical Characteristics.....               | 5         | 12.3 Trademarks.....                                             | 22        |
| <b>8 Detailed Description</b> .....            | <b>10</b> | 12.4 Electrostatic Discharge Caution.....                        | 22        |
| 8.1 Overview.....                              | 10        | 12.5 Glossary.....                                               | 22        |
| 8.2 Functional Block Diagram.....              | 10        | <b>13 Mechanical, Packaging, and Orderable Information</b> ..... | <b>22</b> |
| 8.3 Feature Description.....                   | 11        |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

|                                                                               |             |
|-------------------------------------------------------------------------------|-------------|
| <b>Changes from Revision B (April 2015) to Revision C (October 2020)</b>      | <b>Page</b> |
| • 更新了整个文档的表、图和交叉参考的编号格式。.....                                                 | <b>1</b>    |
| <b>Changes from Revision A (November 2004) to Revision B (April 2015)</b>     | <b>Page</b> |
| • 添加了处理额定值表、特性说明部分、器件功能模式、应用和实现部分、电源相关建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分..... | <b>1</b>    |

## 5 Device Comparison Table

| PART NUMBER <sup>(1)</sup> | MARKING DBV PACKAGE | TYPICAL FLYING CAPACITOR [μF] | FEATURE                                     |
|----------------------------|---------------------|-------------------------------|---------------------------------------------|
| TPS60400DBV                | PFKI                | 1                             | Variable switching frequency 50 kHz-250 kHz |
| TPS60401DBV                | PFLI                | 10                            | Fixed frequency 20 kHz                      |
| TPS60402DBV                | PFMI                | 3.3                           | Fixed frequency 50 kHz                      |
| TPS60403DBV                | PFNI                | 1                             | Fixed frequency 250 kHz                     |

(1) The DBV package is available taped and reeled. Add R suffix to device type (for example, TPS60400DBVR) to order quantities of 3000 devices per reel. Add T suffix to device type (for example, TPS60400DBVT) to order quantities of 250 devices per reel.

## 6 Pin Configuration and Functions




图 6-1. DBV Package 5 Pins Top View

表 6-1. Pin Functions

| PIN               |     | I/O | DESCRIPTION                                                                                                                                              |
|-------------------|-----|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME              | NO. |     |                                                                                                                                                          |
| C <sub>FLY+</sub> | 5   |     | Positive terminal of the flying capacitor C <sub>(fly)</sub>                                                                                             |
| C <sub>FLY-</sub> | 3   |     | Negative terminal of the flying capacitor C <sub>(fly)</sub>                                                                                             |
| GND               | 4   |     | Ground                                                                                                                                                   |
| IN                | 2   | I   | Supply input. Connect to an input supply in the 1.6-V to 5.5-V range. Bypass IN to GND with a capacitor that has the same value as the flying capacitor. |
| OUT               | 1   | O   | Power output with V <sub>O</sub> = -V <sub>I</sub> Bypass OUT to GND with the output filter capacitor C <sub>O</sub> .                                   |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                              |                          | MIN                             | MAX                  | UNIT |
|----------------------------------------------|--------------------------|---------------------------------|----------------------|------|
| Voltage range                                | IN to GND                | -0.3                            | 5.5                  | V    |
|                                              | OUT to GND               | -5.5                            | 0.3                  | V    |
|                                              | C <sub>FLY</sub> to GND  | 0.3                             | V <sub>O</sub> - 0.3 | V    |
|                                              | C <sub>FLY+</sub> to GND | -0.3 V                          | V <sub>I</sub> + 0.3 | V    |
| Continuous power dissipation                 |                          | See <a href="#">§ 9.2.1.2.5</a> |                      |      |
| Continuous output current                    |                          |                                 | 80                   | mA   |
| Maximum junction temperature, T <sub>J</sub> |                          |                                 | 150                  | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 Handling Ratings

|                    |                           |                                                                                          | MIN   | MAX   | UNIT |
|--------------------|---------------------------|------------------------------------------------------------------------------------------|-------|-------|------|
| T <sub>stg</sub>   | Storage temperature range |                                                                                          | -55°C | 150°C | °C   |
| V <sub>(ESD)</sub> | Electrostatic discharge   | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | -1000 | 1000  | V    |
|                    |                           | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> | -500  | 500   |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

|                                                | MIN | NOM                | MAX  | UNIT |
|------------------------------------------------|-----|--------------------|------|------|
| Input voltage range, V <sub>I</sub>            | 1.8 |                    | 5.25 | V    |
| Output current range at OUT, I <sub>O</sub>    |     |                    | 60   | mA   |
| Input capacitor, C <sub>I</sub>                | 0   | C <sub>(fly)</sub> |      | μF   |
| Flying capacitor, C <sub>(fly)</sub>           |     | 1                  |      | μF   |
| Output capacitor, C <sub>O</sub>               |     | 1                  | 100  | μF   |
| Operating junction temperature, T <sub>J</sub> | -40 |                    | 125  | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS6040x | UNIT |
|-------------------------------|----------------------------------------------|----------|------|
|                               |                                              | DBV      |      |
|                               |                                              | 5 PINS   |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 221.2    | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 81.9     |      |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 39.8     |      |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 3.3      |      |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 38.9     |      |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | n/a      |      |

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

$C_I = C_{(fly)} = C_O$  (according to Table 1),  $T_C = -40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ ,  $V_I = 5\text{ V}$  over recommended operating free-air temperature range (unless otherwise noted)

| PARAMETER |                                                        | TEST CONDITIONS                                                                   |                                                     | MIN                                                                 | TYP    | MAX    | UNIT              |
|-----------|--------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------------------|--------|--------|-------------------|
| $V_I$     | Supply voltage range                                   | At $T_C = -40^{\circ}\text{C}$ to $85^{\circ}\text{C}$ , $R_L = 5\text{ k}\Omega$ |                                                     | 1.8                                                                 |        | 5.25   | V                 |
|           |                                                        | At $T_C \geq 0^{\circ}\text{C}$ , $R_L = 5\text{ k}\Omega$                        |                                                     | 1.6                                                                 |        |        |                   |
| $I_O$     | Maximum output current at $V_O$                        |                                                                                   |                                                     | 60                                                                  |        |        | mA                |
| $V_O$     | Output voltage                                         |                                                                                   |                                                     |                                                                     | $-V_I$ |        | V                 |
| $V_{P-P}$ | Output voltage ripple                                  | TPS60400                                                                          | $I_O = 5\text{ mA}$                                 | $C_{(fly)} = 1\text{ }\mu\text{F}$ , $C_O = 2.2\text{ }\mu\text{F}$ |        | 35     | mV <sub>P-P</sub> |
|           |                                                        | TPS60401                                                                          |                                                     | $C_{(fly)} = C_O = 10\text{ }\mu\text{F}$                           |        | 20     |                   |
|           |                                                        | TPS60402                                                                          |                                                     | $C_{(fly)} = C_O = 3.3\text{ }\mu\text{F}$                          |        | 20     |                   |
|           |                                                        | TPS60403                                                                          |                                                     | $C_{(fly)} = C_O = 1\text{ }\mu\text{F}$                            |        | 15     |                   |
| $I_Q$     | Quiescent current (no-load input current)              | TPS60400                                                                          | At $V_I = 5\text{ V}$                               |                                                                     |        | 125    | $\mu\text{A}$     |
|           |                                                        | TPS60401                                                                          |                                                     |                                                                     |        | 65     |                   |
|           |                                                        | TPS60402                                                                          |                                                     |                                                                     |        | 120    |                   |
|           |                                                        | TPS60403                                                                          |                                                     |                                                                     |        | 425    |                   |
|           |                                                        | TPS60400                                                                          | At $T \leq 60^{\circ}\text{C}$ , $V_I = 5\text{ V}$ |                                                                     |        | 210    | $\mu\text{A}$     |
|           |                                                        | TPS60401                                                                          |                                                     |                                                                     |        | 135    |                   |
|           |                                                        | TPS60402                                                                          |                                                     |                                                                     |        | 210    |                   |
|           |                                                        | TPS60403                                                                          |                                                     |                                                                     |        | 640    |                   |
| $f_{OSC}$ | Internal switching frequency                           | TPS60400                                                                          | VCO version                                         |                                                                     | 30     | 50-250 | kHz               |
|           |                                                        | TPS60401                                                                          |                                                     |                                                                     | 13     | 20     |                   |
|           |                                                        | TPS60402                                                                          |                                                     |                                                                     | 30     | 50     |                   |
|           |                                                        | TPS60403                                                                          |                                                     |                                                                     | 150    | 250    |                   |
|           | Impedance at $25^{\circ}\text{C}$ , $V_I = 5\text{ V}$ | TPS60400                                                                          | $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$      |                                                                     | 12     | 15     | $\Omega$          |
|           |                                                        | TPS60401                                                                          | $C_I = C_{(fly)} = C_O = 10\text{ }\mu\text{F}$     |                                                                     | 12     | 15     |                   |
|           |                                                        | TPS60402                                                                          | $C_I = C_{(fly)} = C_O = 3.3\text{ }\mu\text{F}$    |                                                                     | 12     | 15     |                   |
|           |                                                        | TPS60403                                                                          | $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$      |                                                                     | 12     | 15     |                   |

## 7.6 Typical Characteristics

表 7-1. Table of Graphs

|        |                   |                                                                                                                                                                                                                                                                                                                                                                         | FIGURE                         |
|--------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| $\eta$ | Efficiency        | vs Output current at 3.3 V, 5 V<br>TPS60400, TPS60401, TPS60402, TPS60403                                                                                                                                                                                                                                                                                               | 图 7-1, 图 7-2                   |
| $I_I$  | Input current     | vs Output current<br>TPS60400, TPS60401, TPS60402, TPS60403                                                                                                                                                                                                                                                                                                             | 图 7-3, 图 7-4                   |
| $I_S$  | Supply current    | vs Input voltage<br>TPS60400, TPS60401, TPS60402, TPS60403                                                                                                                                                                                                                                                                                                              | 图 7-5, 图 7-6                   |
|        | Output resistance | vs Input voltage at $-40^{\circ}\text{C}$ , $0^{\circ}\text{C}$ , $25^{\circ}\text{C}$ , $85^{\circ}\text{C}$<br>TPS60400, $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$<br>TPS60401, $C_I = C_{(fly)} = C_O = 10\text{ }\mu\text{F}$<br>TPS60402, $C_I = C_{(fly)} = C_O = 3.3\text{ }\mu\text{F}$<br>TPS60403, $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$        | 图 7-7, 图 7-8,<br>图 7-9, 图 7-10 |
| $V_O$  | Output voltage    | vs Output current at $25^{\circ}\text{C}$ , $V_{IN} = 1.8\text{ V}$ , $2.5\text{ V}$ , $3.3\text{ V}$ , $5\text{ V}$<br>TPS60400, $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$<br>TPS60401, $C_I = C_{(fly)} = C_O = 10\text{ }\mu\text{F}$<br>TPS60402, $C_I = C_{(fly)} = C_O = 3.3\text{ }\mu\text{F}$<br>TPS60403, $C_I = C_{(fly)} = C_O = 1\text{ }\mu\text{F}$ | 图 7-11, 图 7-12, 图 7-13, 图 7-14 |

表 7-1. Table of Graphs (continued)

|           |                      |                                                                                                                          | FIGURE                         |
|-----------|----------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| $f_{OSC}$ | Oscillator frequency | vs Temperature at $V_I = 1.8\text{ V}, 2.5\text{ V}, 3.3\text{ V}, 5\text{ V}$<br>TPS60400, TPS60401, TPS60402, TPS60403 | 图 7-15, 图 7-16, 图 7-17, 图 7-18 |
| $f_{OSC}$ | Oscillator frequency | vs Output current<br>TPS60400 at 2 V, 3.3 V, 5.0 V                                                                       | 图 7-19                         |

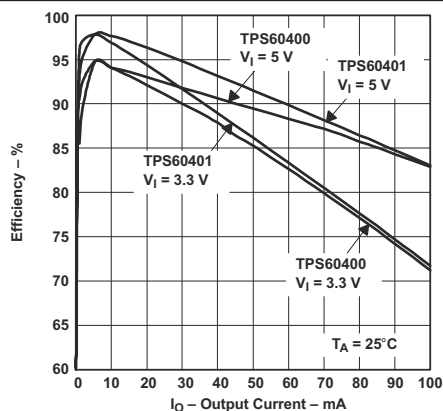


图 7-1. Efficiency vs Output Current

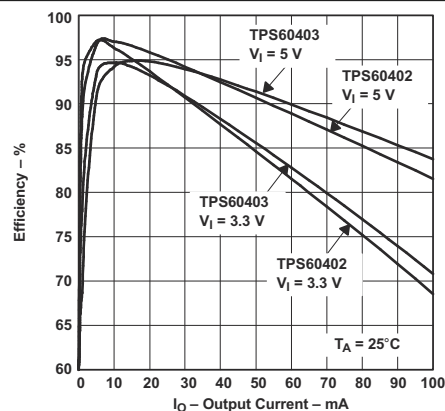


图 7-2. Efficiency vs Output Current

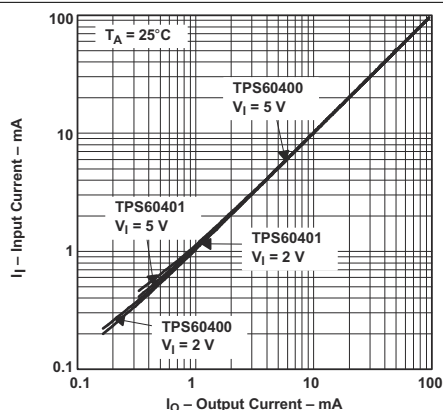


图 7-3. Input Current vs Output Current

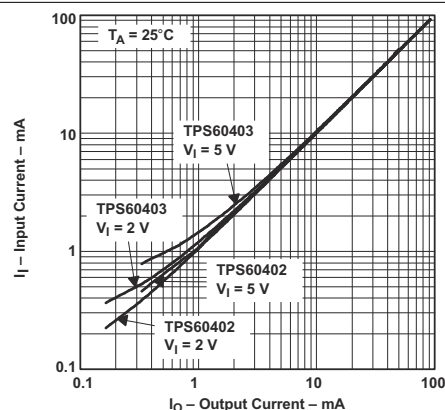


图 7-4. Input Current vs Output Current

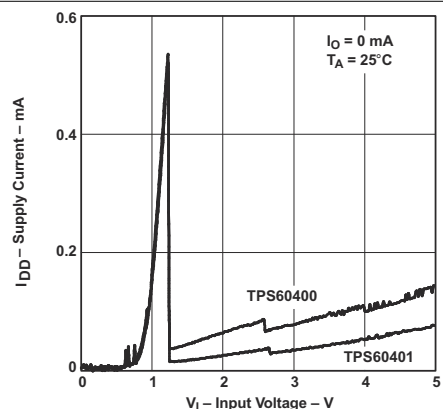


图 7-5. Supply Current vs Input Voltage

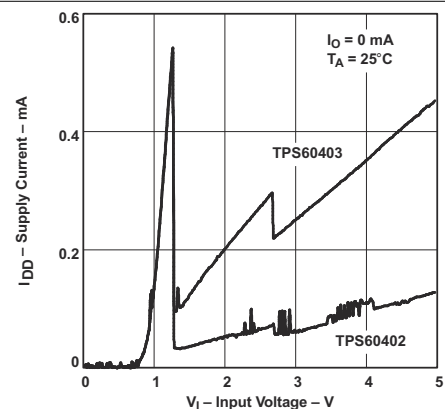


图 7-6. Supply Current vs Input Voltage

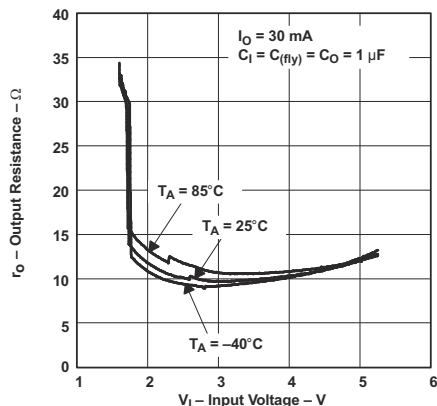


图 7-7. Output Resistance vs Input Voltage

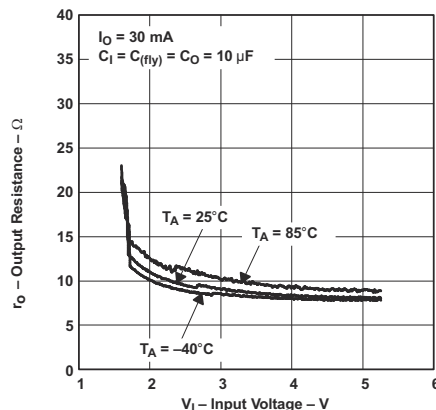


图 7-8. Output Resistance vs Input Voltage

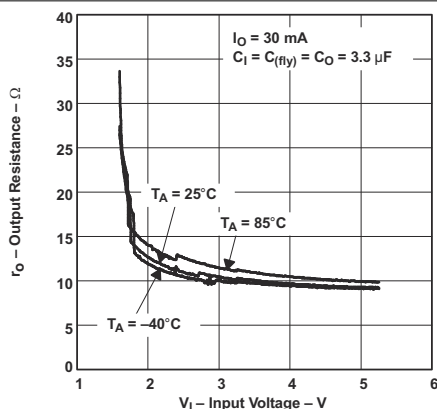


图 7-9. Output Resistance vs Input Voltage

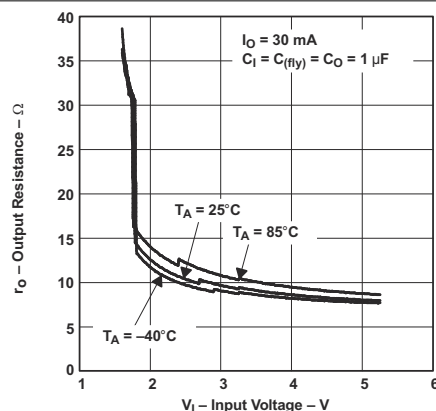


图 7-10. Output Resistance vs Input Voltage

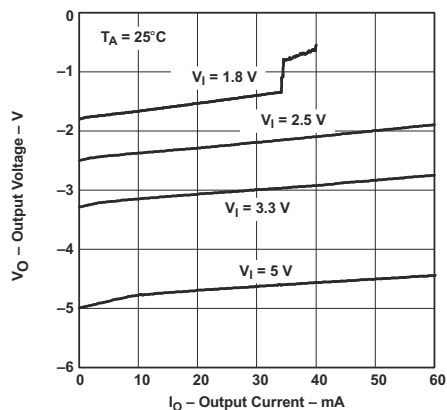


图 7-11. Output Voltage vs Output Current

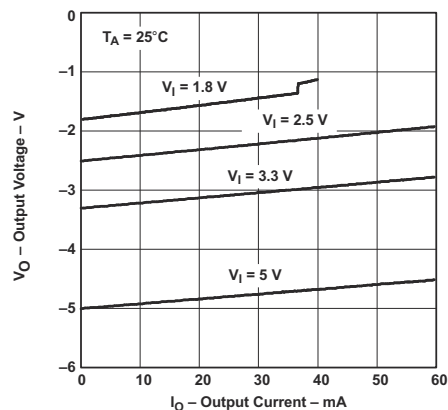


图 7-12. Output Voltage vs Output Current

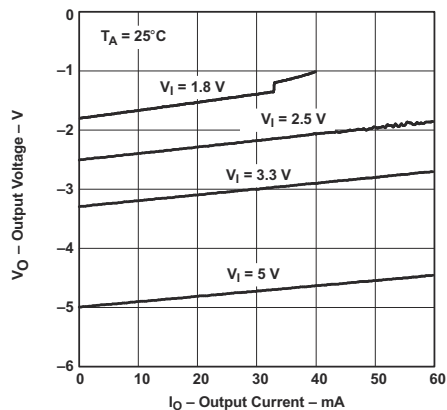


图 7-13. Output Voltage vs Output Current

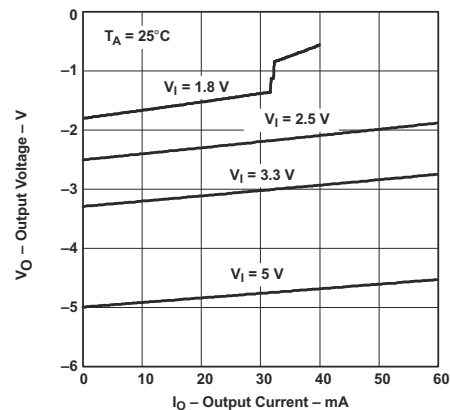


图 7-14. Output Voltage vs Output Current

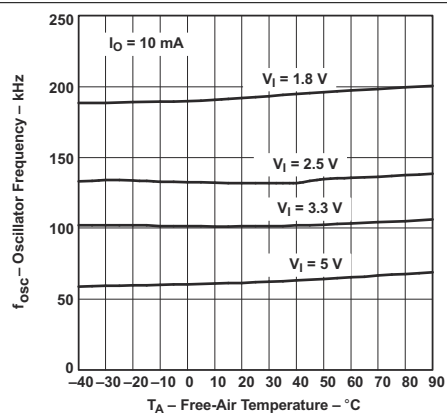


图 7-15. Oscillator Frequency vs Free-Air Temperature

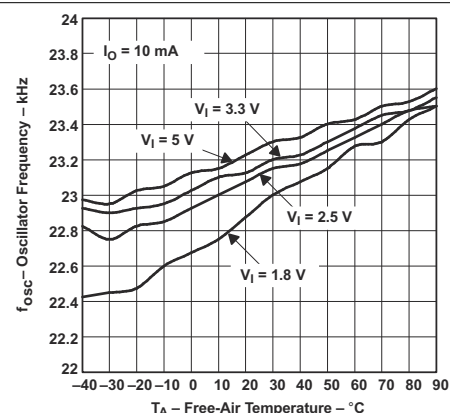


图 7-16. Oscillator Frequency vs Free-Air Temperature

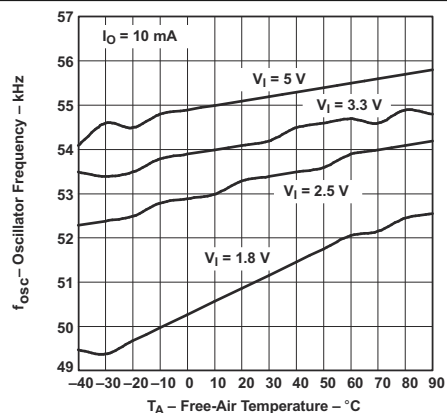


图 7-17. Oscillator Frequency vs Free-Air Temperature

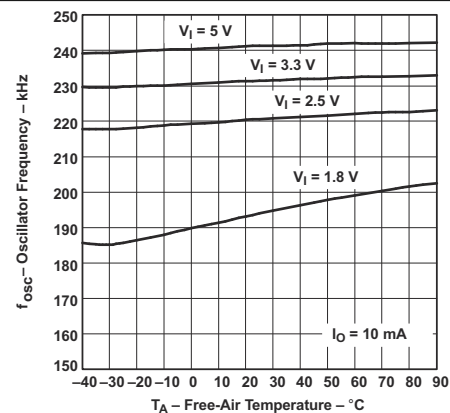


图 7-18. Oscillator Frequency vs Free-Air Temperature

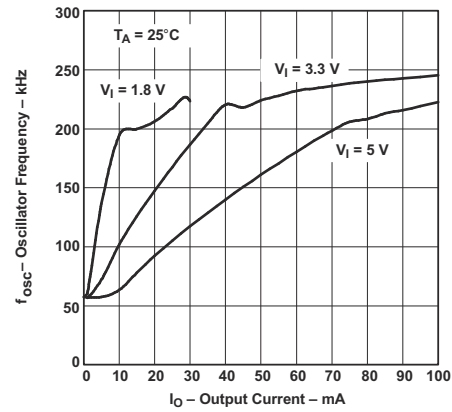


图 7-19. Oscillator Frequency vs Output Current

## 8 Detailed Description

### 8.1 Overview

The TPS60400, TPS60401 charge pumps invert the voltage applied to their input. For the highest performance, use low equivalent series resistance (ESR) capacitors (for example, ceramic). During the first half-cycle, switches S2 and S4 open, switches S1 and S3 close, and capacitor ( $C_{(fly)}$ ) charges to the voltage at  $V_I$ . During the second half-cycle, S1 and S3 open, S2 and S4 close. This connects the positive terminal of  $C_{(fly)}$  to GND and the negative to  $V_O$ . By connecting  $C_{(fly)}$  in parallel,  $C_O$  is charged negative. The actual voltage at the output is more positive than  $-V_I$ , since switches S1-S4 have resistance and the load drains charge from  $C_O$ .


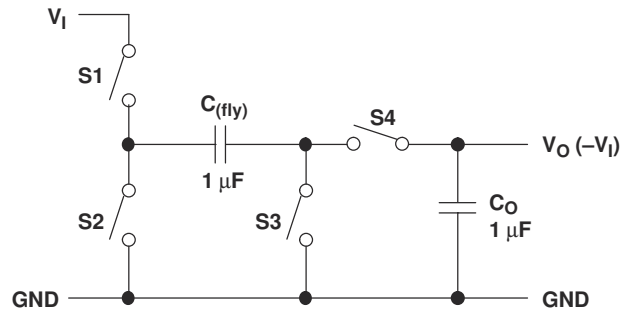


图 8-1. Operating Principle

### 8.2 Functional Block Diagram

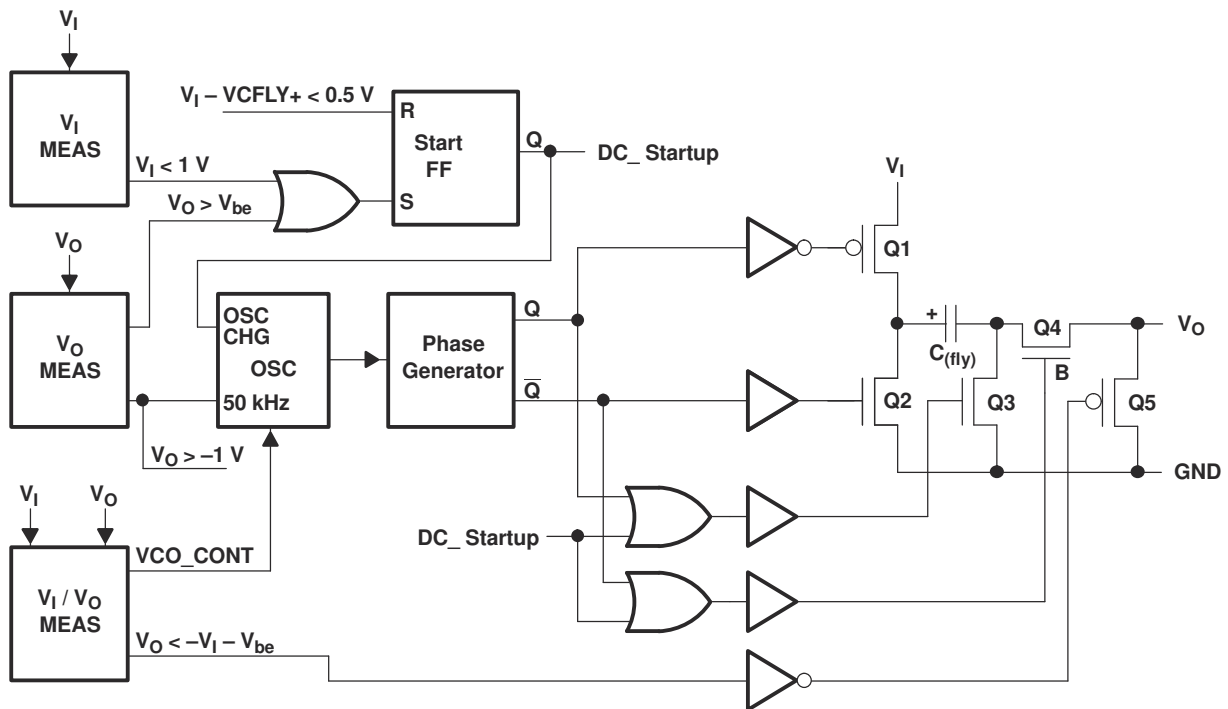

## 8.3 Feature Description

### 8.3.1 Charge-Pump Output Resistance

The TPS6040x devices are not voltage regulators. The charge pump's output source resistance is approximately  $15\ \Omega$  at room temperature (with  $V_I = 5\ \text{V}$ ), and  $V_O$  approaches  $-5\ \text{V}$  when lightly loaded.  $V_O$  droops toward GND as load current increases.

$$V_O = -(V_I - R_O \times I_O) \quad (1)$$

$$R_O \approx \frac{1}{f_{\text{osc}} \times C_{(\text{fly})}} + 4 \left( 2R_{\text{SWITCH}} + \text{ESR}_{\text{CFLY}} \right) + \text{ESR}_{\text{CO}}$$

$R_O$  = output resistance of the converter

(2)

### 8.3.2 Efficiency Considerations

The power efficiency of a switched-capacitor voltage converter is affected by three factors: the internal losses in the converter IC, the resistive losses of the capacitors, and the conversion losses during charge transfer between the capacitors. The internal losses are associated with the internal functions of the IC, such as driving the switches, oscillator, and so forth. These losses are affected by operating conditions such as input voltage, temperature, and frequency. The next two losses are associated with the output resistance of the voltage converter circuit. Switch losses occur because of the on-resistance of the MOSFET switches in the IC. Charge-pump capacitor losses occur because of their ESR. The relationship between these losses and the output resistance is as follows:

$$P_{\text{CAPACITOR LOSSES}} + P_{\text{CONVERSION LOSSES}} = I_O^2 \times R_O$$

$R_{\text{SWITCH}}$  = resistance of a single MOSFET-switch inside the converter  
 $f_{\text{OSC}}$  = oscillator frequency

(3)

The first term is the effective resistance from an ideal switched-capacitor circuit. Conversion losses occur during the charge transfer between  $C_{(\text{fly})}$  and  $C_O$  when there is a voltage difference between them. The power loss is:

$$P_{\text{CONV.LOSS}} = \left[ \frac{1}{2} \times C_{(\text{fly})} (V_I^2 - V_O^2) + \frac{1}{2} C_O (V_{\text{RIPPLE}}^2 - 2V_O V_{\text{RIPPLE}}) \right] \times f_{\text{osc}} \quad (4)$$

The efficiency of the TPS6040x devices is dominated by their quiescent supply current at low output current and by their output impedance at higher current.

$$\eta \cong \frac{I_O}{I_O + I_Q} \left( 1 - \frac{I_O \times R_O}{V_I} \right) \quad (5)$$

Where,  $I_Q$  = quiescent current.

## 8.4 Device Functional Modes

### 8.4.1 Active-Schottky Diode

For a short period of time, when the input voltage is applied, but the inverter is not yet working, the output capacitor is charged positive by the load. To prevent the output being pulled above GND, a Schottky diode must be added in parallel to the output. The function of this diode is integrated into the TPS6040x devices, which gives a defined startup performance and saves board space.

A current sink and a diode in series can approximate the behavior of a typical, modern operational amplifier. 图 8-2 shows the current into this typical load at a given voltage. The TPS6040x devices are optimized to start into these loads.

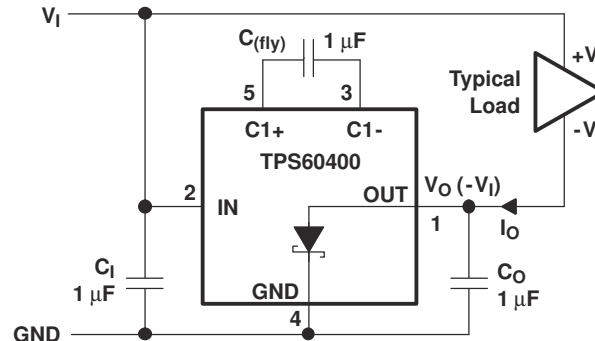


图 8-2. Typical Load

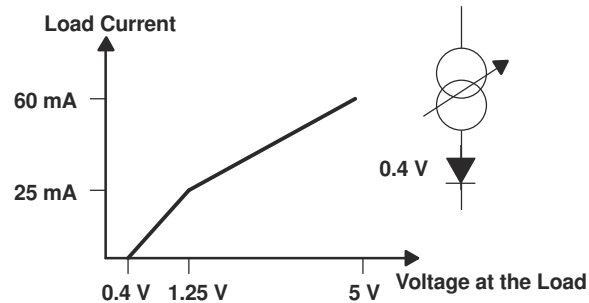


图 8-3. Maximum Start-Up Current

## 9 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TPS6040x is a family of devices that generate an unregulated negative output voltage from an input voltage ranging from 1.6 V to 5.5 V.

### 9.2 Typical Application

#### 9.2.1 Voltage Inverter

The design guidelines provide a component selection to operate the device within the recommended operating conditions.

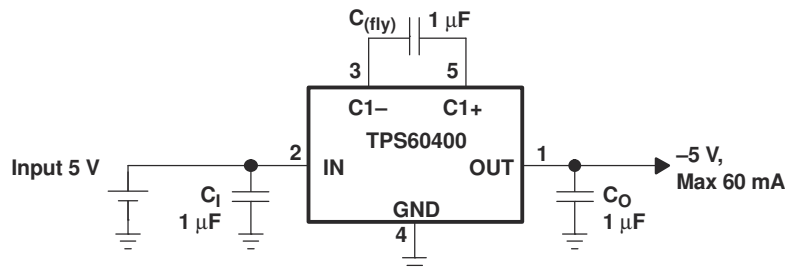


图 9-1. Typical Operating Circuit

##### 9.2.1.1 Design Requirements

The TPS6040x is connected to generate a negative output voltage from a positive input.

##### 9.2.1.2 Detailed Design Procedure

The most common application for these devices is a charge-pump voltage inverter (see 图 9-1). This application requires only two external components; capacitors  $C_{(fly)}$  and  $C_O$ , plus a bypass capacitor, if necessary. Refer to the capacitor selection section for suggested capacitor types.

For the maximum output current and best performance, three ceramic capacitors of 1  $\mu$ F (TPS60400, TPS60403) are recommended. For lower currents or higher allowed output voltage ripple, other capacitors can also be used. It is recommended that the output capacitors has a minimum value of 1  $\mu$ F. With flying capacitors lower than 1  $\mu$ F, the maximum output power decreases.

##### 9.2.1.2.1 Capacitor Selection

To maintain the lowest output resistance, use capacitors with low ESR (see 表 9-1). The charge-pump output resistance is a function of  $C_{(fly)}$ 's and  $C_O$ 's ESR. Therefore, minimizing the charge-pump capacitor's ESR minimizes the total output resistance. The capacitor values are closely linked to the required output current and the output noise and ripple requirements. It is possible to only use 1- $\mu$ F capacitors of the same type.

##### 9.2.1.2.2 Input Capacitor ( $C_I$ )

Bypass the incoming supply to reduce its ac impedance and the impact of the TPS6040x switching noise. The recommended bypassing depends on the circuit configuration and where the load is connected. When the inverter is loaded from OUT to GND, current from the supply switches between  $2 \times I_O$  and zero. Therefore, use a large bypass capacitor (for example, equal to the value of  $C_{(fly)}$ ) if the supply has high ac impedance. When the inverter is loaded from IN to OUT, the circuit draws  $2 \times I_O$  constantly, except for short switching spikes. A 0.1- $\mu$ F bypass capacitor is sufficient.

### 9.2.1.2.3 Flying Capacitor ( $C_{\text{fly}}$ )

Increasing the flying capacitor's size reduces the output resistance. Small values increases the output resistance. Above a certain point, increasing  $C_{\text{fly}}$ 's capacitance has a negligible effect, because the output resistance becomes dominated by the internal switch resistance and capacitor ESR.

### 9.2.1.2.4 Output Capacitor ( $C_O$ )

Increasing the output capacitor's size reduces the output ripple voltage. Decreasing its ESR reduces both output resistance and ripple. Smaller capacitance values can be used with light loads if higher output ripple can be tolerated. Use the following equation to calculate the peak-to-peak ripple.

$$V_{O(\text{ripple})} = \frac{I_O}{f_{\text{osc}} \times C_O} + 2 \times I_O \times \text{ESR}_{C_O} \quad (6)$$

表 9-1. Recommended Capacitor Values

| DEVICE   | $V_I$<br>[V] | $I_O$<br>[mA] | $C_I$<br>[μF] | $C_{\text{fly}}$<br>[μF] | $C_O$<br>[μF] |
|----------|--------------|---------------|---------------|--------------------------|---------------|
| TPS60400 | 1.8...5.5    | 60            | 1             | 1                        | 1             |
| TPS60401 | 1.8...5.5    | 60            | 10            | 10                       | 10            |
| TPS60402 | 1.8...5.5    | 60            | 3.3           | 3.3                      | 3.3           |
| TPS60403 | 1.8...5.5    | 60            | 1             | 1                        | 1             |

表 9-2. Recommended Capacitors

| MANUFACTURER | PART NUMBER    | SIZE | CAPACITANCE | TYPE    |
|--------------|----------------|------|-------------|---------|
| Taiyo Yuden  | EMK212BJ474MG  | 0805 | 0.47 μF     | Ceramic |
|              | LMK212BJ105KG  | 0805 | 1 μF        | Ceramic |
|              | LMK212BJ225MG  | 0805 | 2.2 μF      | Ceramic |
|              | EMK316BJ225KL  | 1206 | 2.2 μF      | Ceramic |
|              | LMK316BJ475KL  | 1206 | 4.7 μF      | Ceramic |
|              | JMK316BJ106KL  | 1206 | 10 μF       | Ceramic |
| TDK          | C2012X5R1C105M | 0805 | 1 μF        | Ceramic |
|              | C2012X5R1A225M | 0805 | 2.2 μF      | Ceramic |
|              | C2012X5R1A335M | 0805 | 3.3 μF      | Ceramic |

表 9-3 contains a list of manufacturers of the recommended capacitors. Ceramic capacitors will provide the lowest output voltage ripple because they typically have the lowest ESR-rating.

表 9-3. Recommended Capacitor Manufacturers

| CAPACITOR TYPE    | MANUFACTURER | WEB ADDRESS           |
|-------------------|--------------|-----------------------|
| X5R / X7R ceramic | Taiyo Yuden  | www.t-yuden.com       |
| X5R / X7R ceramic | TDK          | www.component.tdk.com |
| X5R / X7R ceramic | Vishay       | www.vishay.com        |
| X5R / X7R ceramic | Kemet        | www.kemet.com         |

### 9.2.1.2.5 Power Dissipation

As given in 7.4, the thermal resistance of TPS6040x is:  $R_{\theta JA} = 221^{\circ}\text{C/W}$ .

The terminal resistance can be calculated using the following equation:

$$R_{\theta JA} = \frac{T_J - T_A}{P_D} \quad (7)$$

where:

$T_J$  is the junction temperature.  $T_A$  is the ambient temperature.  $P_D$  is the power that is dissipated by the device.

$$R_{\theta JA} = \frac{T_J - T_A}{P_D} \quad (8)$$

The maximum power dissipation can be calculated using the following equation:

$$P_D = V_I \times I_I - V_O \times I_O = V_{I(\text{max})} \times (I_O + I_{\text{SUPPLY}}) - V_O \times I_O \quad (9)$$

The maximum power dissipation happens with maximum input voltage and maximum output current.

At maximum load the supply current is 0.7 mA maximum.

$$P_D = 5 \text{ V} \times (60 \text{ mA} + 0.7 \text{ mA}) - 4.4 \text{ V} \times 60 \text{ mA} = 40 \text{ mW} \quad (10)$$

With this maximum rating and the thermal resistance of the device on the EVM, the maximum temperature rise above ambient temperature can be calculated using the following equation:

$$\Delta T_J = R_{\theta JA} \times P_D = 221^{\circ}\text{C/W} \times 40 \text{ mW} = 8.8^{\circ}\text{C} \quad (11)$$


This means that the internal dissipation increases  $T_J$  by  $<10^{\circ}\text{C}$ .

The junction temperature of the device shall not exceed  $125^{\circ}\text{C}$ .


This means the IC can easily be used at ambient temperatures up to:

$$T_A = T_{J(\text{max})} - \Delta T_J = 125^{\circ}\text{C/W} - 10^{\circ}\text{C} = 115^{\circ}\text{C} \quad (12)$$

### 9.2.1.3 Application Curves

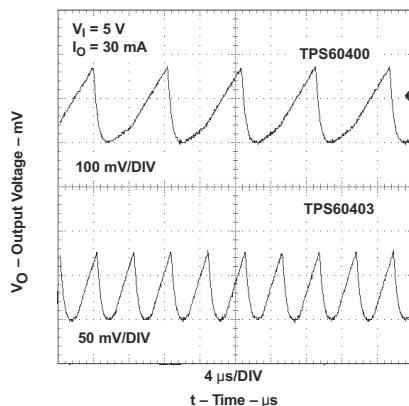

**图 9-2. Output Voltage vs Time for TPS60400 and TPS60401**

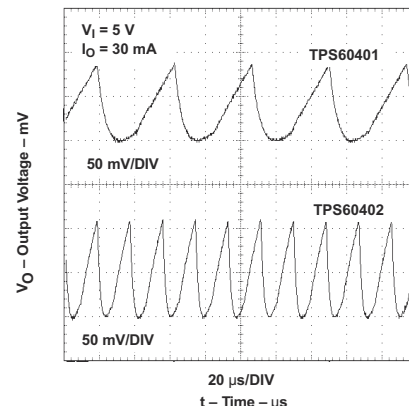

**图 9-3. Output Voltage vs Time for TPS60401 and TPS60402**

### 9.3 System Examples

To reduce the output voltage ripple, a RC post filter can be used.

An output filter can easily be formed with a resistor ( $R_P$ ) and a capacitor ( $C_P$ ). Cutoff frequency is given by:

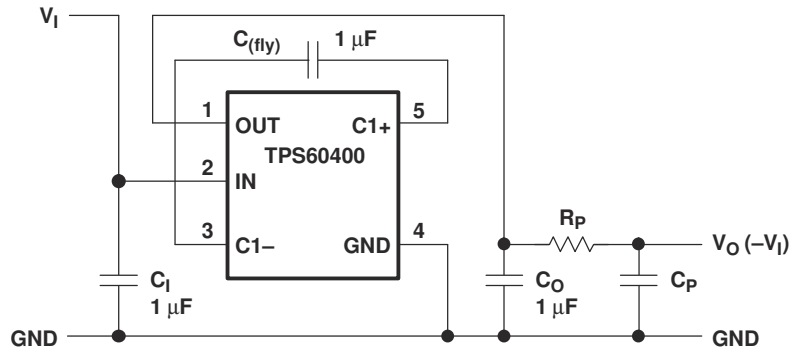


图 9-4. TPS60400 with RC-Post Filter

The equation refers only to the relation between output and input of the ac ripple voltages of the filter.

$$f_c = \frac{1}{2\pi R_P C_P} \quad (1)$$

and ratio  $V_O/V_{OUT}$  is:

$$\left| \frac{V_O}{V_{OUT}} \right| = \frac{1}{\sqrt{1 + (2\pi f R_P C_P)^2}} \quad (2)$$

$$\text{with } R_P = 50 \, \Omega, C_P = 0.1 \, \mu\text{F and } f = 250 \, \text{kHz: } \left| \frac{V_O}{V_{OUT}} \right| = 0.125 \quad (13)$$

To reduce the output voltage ripple, a LC post filter can be used.

图 9-5 shows a configuration with a LC-post filter to further reduce output ripple and noise.

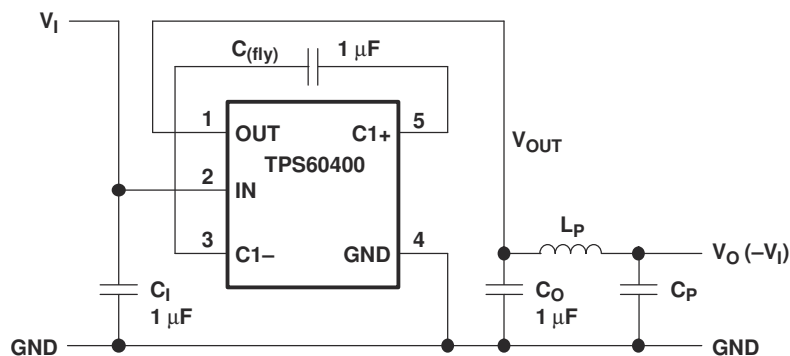



图 9-5. LC-Post Filter

The application allows to generate a voltage rail at a level of 1/2 of the input voltage.

A switched-capacitor voltage inverter can be configured as a high efficiency rail-splitter. This circuit provides a bipolar power supply that is useful in battery powered systems to supply dual-rail ICs, like operational amplifiers. Moreover, the SOT23-5 package and associated components require very little board space.

After power is applied, the flying capacitor ( $C_{(fly)}$ ) connects alternately across the output capacitors  $C_3$  and  $C_O$ . This equalizes the voltage on those capacitors and draws current from  $V_I$  to  $V_O$  as required to maintain the output at  $1/2 V_I$ .


The maximum input voltage between  $V_I$  and GND in the schematic (or between IN and OUT at the device itself) must not exceed 6.5 V.

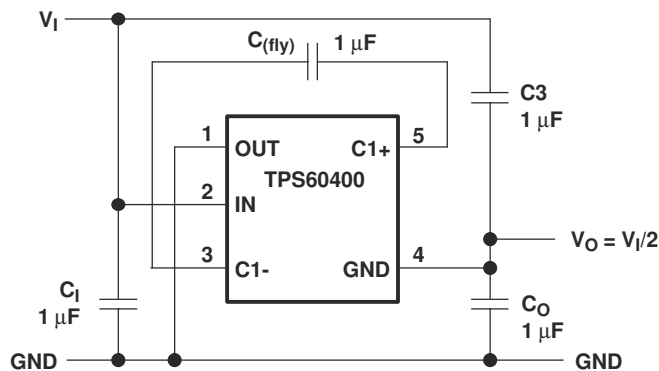

**图 9-6. TPS60400 as a High-Efficiency Rail Splitter**

The application allows to generate a voltage rail at a level of  $-V_I$  as well as  $2 \times V_I$  ( $V_{(pos)}$ ).

In the circuit of 图 9-7, capacitors  $C_I$ ,  $C_{(fly)}$ , and  $C_O$  form the inverter, while  $C_1$  and  $C_2$  form the doubler.  $C_1$  and  $C_{(fly)}$  are the flying capacitors;  $C_O$  and  $C_2$  are the output capacitors. Because both the inverter and doubler use part of the charge-pump circuit, loading either output causes both outputs to decline toward GND. Make sure the sum of the currents drawn from the two outputs does not exceed 60 mA. The maximum output current at  $V_{(pos)}$  must not exceed 30 mA. If the negative output is loaded, this current must be further reduced.

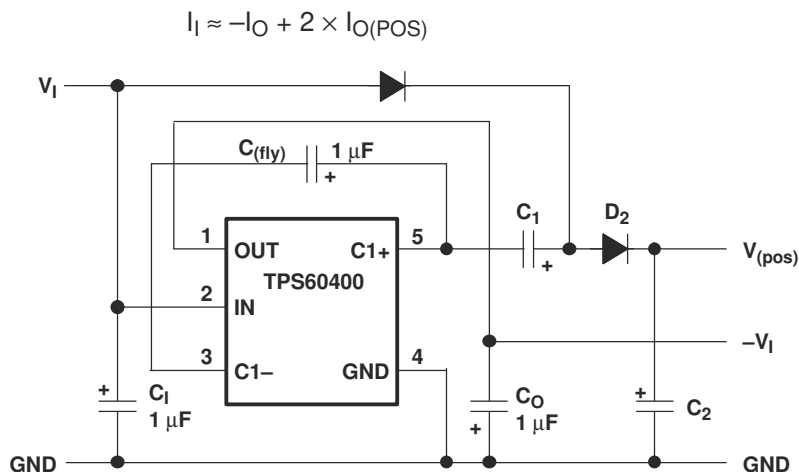

**图 9-7. TPS60400 as Doubler/Inverter**

The application generate a voltage rail at a level  $-2 \times V_I$ .

Two devices can be cascaded to produce an even larger negative voltage (see 图 9-8). The unloaded output voltage is normally  $-2 \times V_I$ , but this is reduced slightly by the output resistance of the first device multiplied by the quiescent current of the second. When cascading more than two devices, the output resistance rises dramatically.

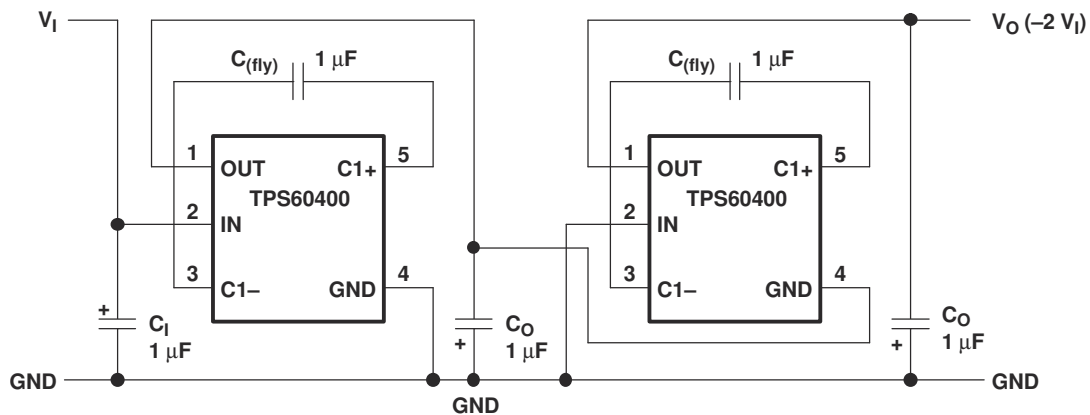


图 9-8. Doubling Inverter

The application allows to increase the output current by using two or more in parallel.

Paralleling multiple TPS6040xs reduces the output resistance. Each device requires its own flying capacitor ( $C_{fly}$ ), but the output capacitor ( $C_O$ ) serves all devices (see 图 9-9). Increase  $C_O$ 's value by a factor of  $n$ , where  $n$  is the number of parallel devices. Equation 1 shows the equation for calculating output resistance.

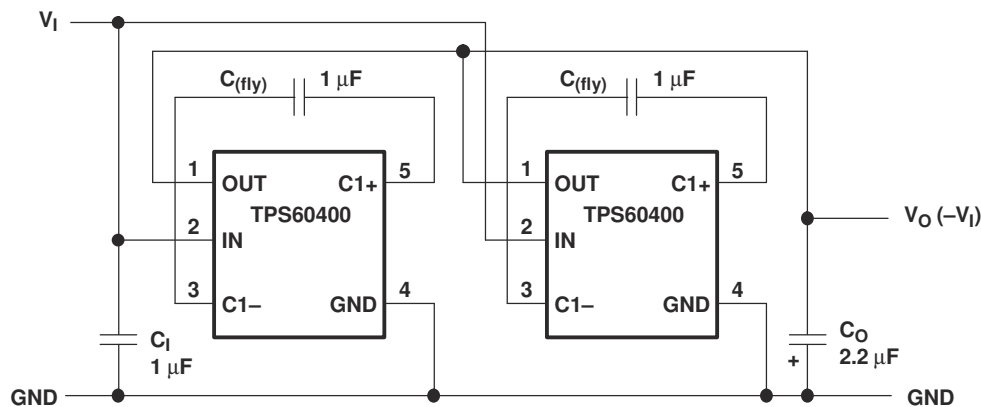


图 9-9. Paralleling Devices

The application adds a shutdown function.

If shutdown is necessary, use the circuit in 图 9-10. The output resistance of the TPS6040x typically is  $15\ \Omega$  plus two times the output resistance of the buffer.

Connecting multiple buffers in parallel reduces the output resistance of the buffer driving the IN pin.

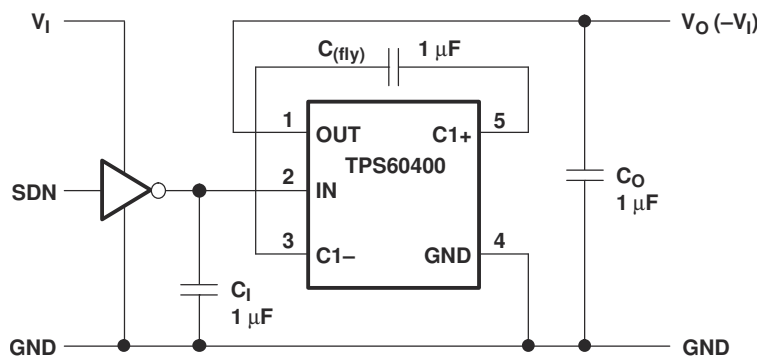


图 9-10. Shutdown Control

The application generates a regulated output voltage for a GaAs bias supply.

A solution for a -2.7-V/3-mA GaAs bias supply is proposed in 图 9-11. The input voltage of 3.3 V is first inverted with a TPS60403 and stabilized using a TLV431 low-voltage shunt regulator. Resistor  $R_P$  with capacitor  $C_P$  is used for filtering the output voltage.

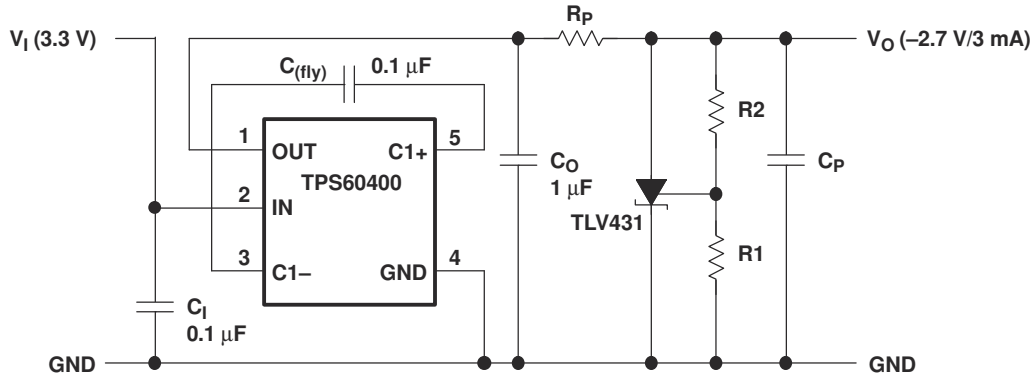


图 9-11. GaAs Supply

A 0.1-μF capacitor was selected for  $C_{(fly)}$ . By this, the output resistance of the inverter is about 52 Ω.

$R_{P_{MAX}}$  can be calculated using the following equation:

$$V_O = - \left( 1 + \frac{R_1}{R_2} \right) \times V_{ref} - R_1 \times I_{l(ref)} \quad (14)$$

A 100-Ω resistor was selected for  $R_P$ .

The reference voltage across  $R_2$  is 1.24 V typical. With 5-μA current for the voltage divider,  $R_2$  gets:

$$R_{P_{MAX}} = \left( \frac{V_{CO} - V_O}{I_O} - R_O \right)$$

With:  $V_{CO} = -3.3$  V;  $V_O = -2.7$  V;  $I_O = -3$  mA

$$R_{P_{MAX}} = 200 \, \Omega - 52 \, \Omega = 148 \, \Omega \quad (15)$$

With  $C_P = 1$  μF the ratio  $V_O/V_I$  of the RC post filter is:

$$R_2 = \frac{1.24 \, V}{5 \, \mu A} \approx 250 \, k\Omega$$

$$R_1 = \frac{2.7 - 1.24 \, V}{5 \, \mu A} \approx 300 \, k\Omega \quad (16)$$

$$\left| \frac{V_O}{V_I} \right| = \frac{1}{\sqrt{1 + (2\pi 125000 \text{ Hz} \times 100 \, \Omega \times 1 \, \mu F)^2}} \approx 0.01 \quad (17)$$

The application generates an output voltage of 1/2 of the input voltage.

By exchanging GND with OUT (connecting the GND pin with OUT and the OUT pin with GND), a step-down charge pump can easily be formed. In the first cycle  $S_1$  and  $S_3$  are closed, and  $C_{(fly)}$  with  $C_O$  in series are charged. Assuming the same capacitance, the voltage across  $C_{(fly)}$  and  $C_O$  is split equally between the capacitors. In the second cycle,  $S_2$  and  $S_4$  close and both capacitors with  $V_I/2$  across are connected in parallel.

The maximum input voltage between  $V_I$  and GND in the schematic (or between IN and OUT at the device itself) must not exceed 6.5 V. For input voltages in the range of 6.5 V to 11 V, an additional Zener-diode is recommended (see [图 9-14](#)).

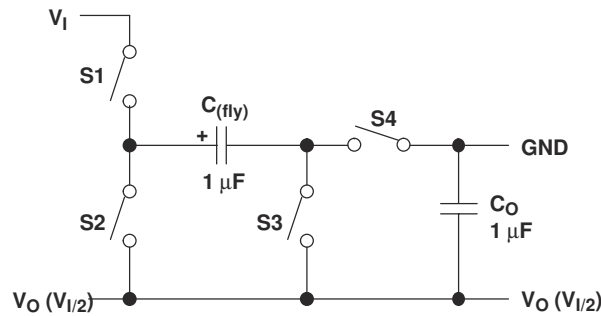


图 9-12. Step-Down Principle

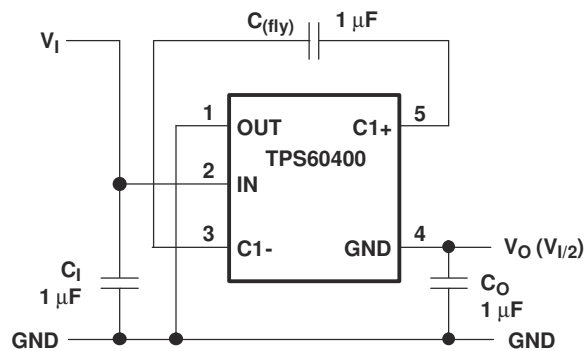


图 9-13. Step-Down Charge Pump Connection

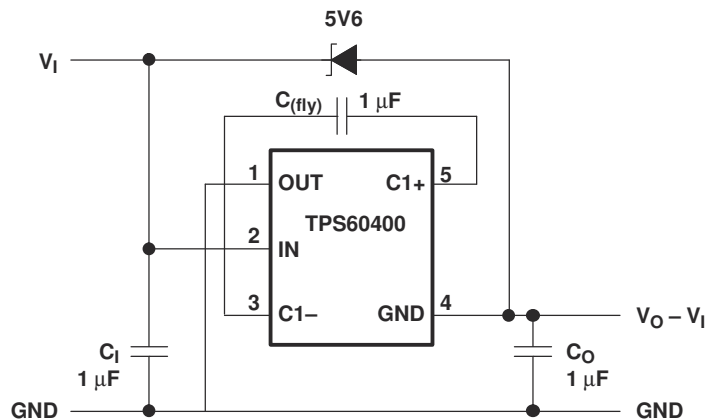


图 9-14. Step-Down Charge Pump Connection for Higher Input Voltages

## 10 Power Supply Recommendations

The TPS60400 device family has no special requirements for its power supply. The power supply output needs to be rated according to the supply voltage, output voltage and output current of the TPS6040x.

## 11 Layout

### 11.1 Layout Guidelines

All capacitors should be soldered as close as possible to the IC. A PCB layout proposal for a single-layer board is shown in 图 11-1. Care has been taken to connect all capacitors as close as possible to the circuit to achieve optimized output voltage ripple performance.

### 11.2 Layout Example

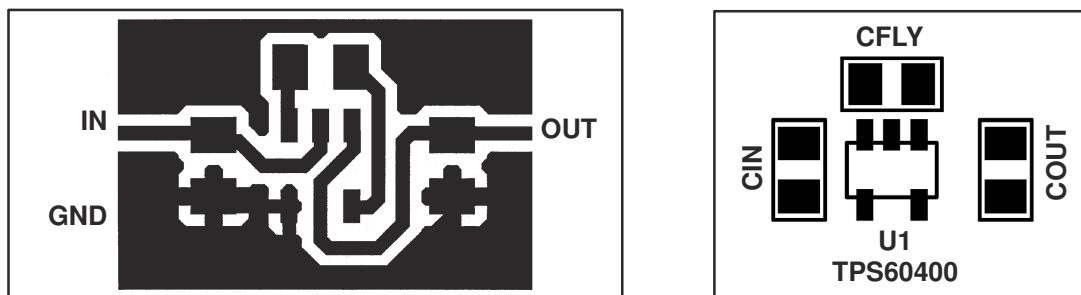


图 11-1. Recommended PCB Layout for TPS6040x (Top Layer)

## 12 Device and Documentation Support

### 12.1 Device Support

#### 12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

#### 12.1.2 Device Family Products

Other inverting DC-DC converters from Texas Instruments are listed in [表 12-1](#).

**表 12-1. Product Identification**

| PART NUMBER             | DESCRIPTION                                          |
|-------------------------|------------------------------------------------------|
| <a href="#">TPS6735</a> | Fixed negative 5-V, 200-mA inverting dc-dc converter |
| <a href="#">TPS6755</a> | Adjustable 1-W inverting dc-dc converter             |

### 12.2 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

**表 12-2. Related Links**

| PARTS    | PRODUCT FOLDER             | SAMPLE & BUY               | TECHNICAL DOCUMENTS        | TOOLS & SOFTWARE           | SUPPORT & COMMUNITY        |
|----------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| TPS60400 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS60401 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS60402 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |
| TPS60403 | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> | <a href="#">Click here</a> |

### 12.3 Trademarks

所有商标均为其各自所有者的财产。

### 12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 12.5 Glossary

#### TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS60400DBVR</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFKI                |
| TPS60400DBVR.A                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFKI                |
| TPS60400DBVR.B                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFKI                |
| <a href="#">TPS60400DBVRG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFKI                |
| TPS60400DBVRG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFKI                |
| <a href="#">TPS60400DBVT</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFKI                |
| TPS60400DBVT.B                 | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFKI                |
| <a href="#">TPS60400DBVTG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFKI                |
| TPS60400DBVTG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFKI                |
| <a href="#">TPS60401DBVR</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFLI                |
| TPS60401DBVR.A                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFLI                |
| TPS60401DBVR.B                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFLI                |
| <a href="#">TPS60401DBVRG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFLI                |
| TPS60401DBVRG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFLI                |
| <a href="#">TPS60401DBVT</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFLI                |
| TPS60401DBVT.B                 | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFLI                |
| <a href="#">TPS60401DBVTG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFLI                |
| TPS60401DBVTG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFLI                |
| <a href="#">TPS60402DBVR</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFMI                |
| TPS60402DBVR.A                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFMI                |
| TPS60402DBVR.B                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFMI                |
| <a href="#">TPS60402DBVRG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFMI                |
| TPS60402DBVRG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFMI                |
| <a href="#">TPS60402DBVT</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFMI                |
| TPS60402DBVT.B                 | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFMI                |
| <a href="#">TPS60402DBVTG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFMI                |
| TPS60402DBVTG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFMI                |
| <a href="#">TPS60403DBVR</a>   | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFNI                |
| TPS60403DBVR.A                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFNI                |

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS60403DBVR.B                 | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFNI                |
| <a href="#">TPS60403DBVRG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFNI                |
| TPS60403DBVRG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFNI                |
| <a href="#">TPS60403DBVT</a>   | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 85    | PFNI                |
| TPS60403DBVT.B                 | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | SN                                   | Level-1-260C-UNLIM                | -40 to 125   | PFNI                |
| <a href="#">TPS60403DBVTG4</a> | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | PFNI                |
| TPS60403DBVTG4.B               | Active        | Production           | SOT-23 (DBV)   5 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | PFNI                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TPS60400, TPS60401, TPS60402, TPS60403 :**

- Automotive : [TPS60400-Q1](#), [TPS60401-Q1](#), [TPS60402-Q1](#), [TPS60403-Q1](#)


NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

## TAPE AND REEL INFORMATION



### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

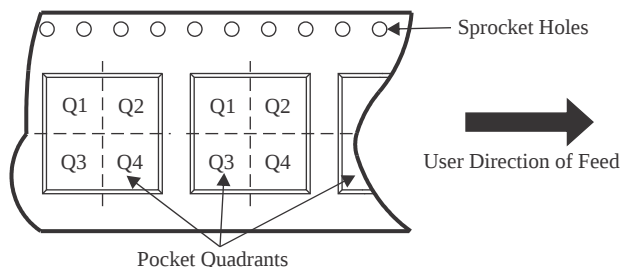

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS60400DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60400DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| TPS60400DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60400DBVTG4 | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| TPS60401DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60401DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60401DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60401DBVTG4 | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| TPS60402DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60402DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60402DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60402DBVTG4 | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| TPS60403DBVR   | SOT-23       | DBV             | 5    | 3000 | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60403DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| TPS60403DBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TPS60403DBVTG4 | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS60400DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS60400DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TPS60400DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TPS60400DBVTG4 | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| TPS60401DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS60401DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TPS60401DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TPS60401DBVTG4 | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| TPS60402DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS60402DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TPS60402DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TPS60402DBVTG4 | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| TPS60403DBVR   | SOT-23       | DBV             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS60403DBVRG4 | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| TPS60403DBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TPS60403DBVTG4 | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |



# EXAMPLE BOARD LAYOUT

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X



SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司