

TPS65131-Q1 正负输出直流/直流转换器

1 特性

- 符合汽车应用要求
- AEC-Q100 测试指导结果如下：
 - 器件温度等级 2：-40°C 至 105°C 环境工作温度范围
 - 在 -40°C 至 125°C 结温范围内测试了电气特性
 - 器件 HBM ESD 分类等级 H1C
 - 器件 CDM ESD 分类等级 C4B
- 高达 15V 和低至 -15V 的双向可调输出电压
- 对升压和逆变器主开关具有 2A 典型开关电流限制
- 高转换效率
 - 正输出轨高达 91%
 - 负输出轨高达 85%
 - 低负载状态下的省电模式
- 上电和断电时序的独立使能输入
- 用于外部 PFET 的控制输出可支持在关断时完全断电
- 输入电压范围为 2.7V 至 5.5V
- 最小 1.25MHz 固定频率 PWM 运行
- 热关断
- 在两个输出上提供过压保护
- 0.2μA 典型关断电流
- 具有可湿性侧面的小型 4mm × 4mm QFN-24 封装 (RGE)

2 应用

- 小尺寸至中等尺寸 OLED 显示器
- (TFT) LCD、CCD 辅助电源

3 说明

TPS65131-Q1 器件作为双输出直流/直流转换器，可产生高达 15V 的正输出电压和低至 -15V 的负输出电压，输出电流通常为 200mA，具体值取决于输入电压与输出电压比。凭借高达 85% 的总体效率，此器件非常适合于便携式电池供电类设备。输入电压范围为 2.7V 至 5.5V，因此允许诸如 3.3V 和 5V 的电压轨为 TPS65131-Q1 器件供电。TPS65131-Q1 器件采用具有散热焊盘和可湿性侧面的 QFN-24 封装。由于只需少量较小的外部组件，因此总体解决方案尺寸可以非常小。


此转换器采用定频 PWM 控制拓扑运行，而且在启用省电模式后，它在轻负载电流的情况下使用脉冲跳跃模式。在运行时，典型的总体器件静态电流只有 500μA。在关断状态下，器件一般消耗 0.2μA。独立使能引脚可实现针对两个输出的加电和断电排序。为了尽可能地实现故障情况下的高可靠性，此器件有一个内部电流限制、过压保护和热关断。

TPS65131-Q1 器件符合汽车应用标准（根据 AEC-Q100 温度等级 2）。该器件在 -40°C 至 125°C 的器件结温范围内接受了电气特性测试。此外，该器件还具有最低关断电流、小巧的解决方案尺寸、带散热焊盘的封装以及良好的效率和保护特性，专为汽车和工业应用而设计。

封装信息⁽¹⁾

器件型号	封装	本体尺寸 (标称值)
TPS65131-Q1	VQFN (24)	4mm × 4mm

(1) 如需了解所有可用封装，请参阅可订购产品附录。

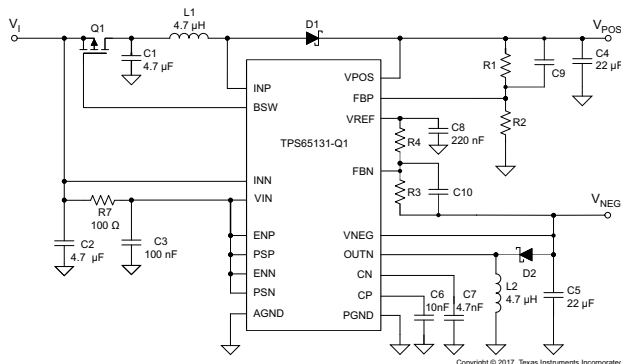

应用原理图



Table of Contents

1 特性	1	8 Application and Implementation	10
2 应用	1	8.1 Application Information.....	10
3 说明	1	8.2 Typical Applications.....	10
4 Device Comparison	2	8.3 Power Supply Recommendations.....	20
5 Pin Configuration and Functions	3	8.4 Layout.....	21
6 Specifications	4	9 器件和文档支持	22
6.1 Absolute Maximum Ratings.....	4	9.1 接收文档更新通知.....	22
6.2 ESD Ratings.....	4	9.2 支持资源.....	22
6.3 Recommended Operating Conditions.....	4	9.3 商标.....	22
6.4 Thermal Information.....	5	9.4 静电放电警告.....	22
6.5 Electrical Characteristics.....	5	9.5 术语表.....	22
6.6 Switching Characteristics.....	6	10 Revision History	22
6.7 Typical Characteristics.....	6	11 Mechanical, Packaging, and Orderable Information	24
7 Detailed Description	7	11.1 Mechanical Data.....	25
7.1 Overview.....	7	11.2 Tape and Reel Information.....	31
7.2 Functional Block Diagram.....	7		
7.3 Feature Description.....	8		
7.4 Device Functional Modes.....	9		

4 Device Comparison

表 4-1. Device Comparison Table

Part Number	Package	Wettable Flanks
TPS65131TRGERQ1	VQFN (24)	No
TPS65131WTRGERQ1	VQFN (24)	Yes

5 Pin Configuration and Functions

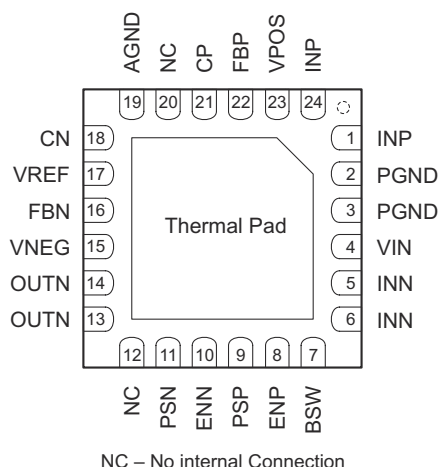


图 5-1. 24-pin VQFN Bottom View

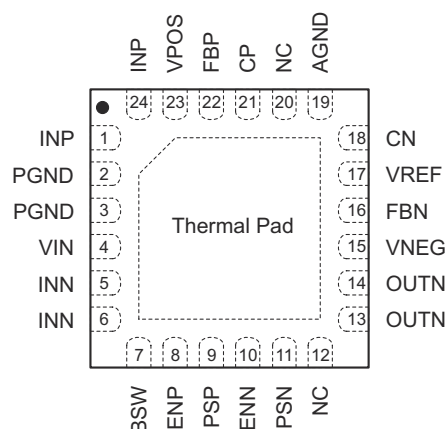


图 5-2. 24-pin VQFN Top View

表 5-1. Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
AGND	19	—	Analog ground pin
BSW	7	O	Gate-control pin for external battery switch. This pin goes low when ENP is set high.
CN	18	I/O	Compensation pin for inverting converter control
CP	21	I/O	Compensation pin for boost converter control
ENN	10	I	Enable pin for the negative-output voltage (0V: disabled, VIN: enabled)
ENP	8	I	Enable pin for the positive-output voltage (0V: disabled, VIN: enabled)
FBN	16	I	Feedback pin for the negative-output voltage divider
FBP	22	I	Feedback pin for the positive-output voltage divider
INN	5, 6	O	Inverting converter switch pin
INP	1, 24	O	Boost converter switch pin
NC ⁽¹⁾	12, 20	—	Not connected
OUTN	13, 14	I/O	Inverting converter switch output
PGND	2, 3	—	Power ground pin
PSN	11	I	Power-save mode enable for inverter stage (0V: disabled, VIN: enabled)
PSP	9	I	Power-save mode enable for boost converter stage (0V: disabled, VIN: enabled)
VIN	4	I	Control supply input
VNEG	15	I	Negative-output voltage-sense input
VPOS	23	I	Positive-output voltage-sense input
VREF	17	O	Reference output voltage. Bypass this pin with a 220nF capacitor to ground. Connect the lower resistor of the negative-output voltage divider to this pin.
Thermal pad			Thermal pad for thermal performance, connect to PGND

(1) NC - No internal connection

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature, unless otherwise noted ⁽¹⁾

		VALUE		UNIT
		MIN	MAX	
	Input voltage range at pins VIN, INN ⁽²⁾	- 0.3	6	V
	Voltage at pin VPOS ⁽²⁾	- 0.3	17	V
	Voltage at pin VNEG ⁽²⁾	- 17	$V_{(VIN)} + 0.3$	V
	Voltage at pins ENN, ENP, FBP, FBN, CN, CP, PSP, PSN, BSW ⁽²⁾	- 0.3	$V_{(VIN)} + 0.3$	V
	Input voltage at pin INP ⁽²⁾	- 0.3	17	V
	Differential voltage between pins OUTN to INN ⁽²⁾	- 0.3	24	V
	Thermal pad ⁽²⁾	- 0.3	0.3	V
T _J	Operating junction temperature	- 40	150	°C
T _{stg}	Storage temperature range	- 65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the network ground pin, unless otherwise noted.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per AEC Q100-002 ⁽¹⁾	±1000	V
		Charged device model (CDM), per AEC Q100-011	±750	V

- (1) AEC Q100-002 indicates HBM stressing is done in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature, unless otherwise noted

		MIN	MAX	UNIT
V _I , V _(VIN) , V _(INN)	Application input voltage range, input voltage range at VIN and INN pins	2.7	5.5	V
V _{POS}	Adjustable output voltage range for the boost converter	V _I + 0.5	15	V
V _{NEG}	Adjustable output voltage range for the inverting converter	- 15	- 2	V
V _(ENN) , V _(ENP)	Enable signals voltage	0	5.5	V
V _(PSN) , V _(PSP)	Power-save mode enable signals voltage	0	5.5	V
T _A	Operating free-air temperature range ⁽¹⁾	- 40	105	°C
T _J	Operating junction temperature range	- 40	125	°C

- (1) In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may require derating. See [Thermal Information](#) for details.

6.4 Thermal Information

THERMAL METRIC		TPS65131-Q1	UNIT
		RGE PACKAGE	
		24 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	34.1	°C/W
$R_{\theta JCTop}$	Junction-to-case (top) thermal resistance	36.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	12.2	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.4	°C/W
ψ_{JB}	Junction-to-board characterization parameter	12.3	°C/W
$R_{\theta JCbot}$	Junction-to-case (bottom) thermal resistance	2.8	°C/W

6.5 Electrical Characteristics

This specification applies over the full recommended input voltage range $V_I = 2.7V$ to $5.5V$ and over the temperature range $T_J = -40^{\circ}C$ to $125^{\circ}C$ unless otherwise noted. Typical values apply for $V_I = 3.6V$ and $T_J = 25^{\circ}C$.

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
DC-DC STAGE (V _(VPOS) , V _(VNEG))							
V _{ref}	Reference voltage		I _{ref} = 10μA	1.2	1.213	1.225	V
I _(FBP)	Positive feedback input bias current		V _(FBP) = V _{ref}		50		nA
I _(FBN)	Negative feedback input bias current		V _(FBN) = 0.1V _{ref}		50		nA
V _(FBP)	Positive feedback regulation voltage			1.189	1.213	1.237	V
V _(FBN)	Negative feedback regulation voltage			− 0.024	0	0.024	V
	Total output dc accuracy				3%		
r _{DS(on)(N)}	Inverter switch on-resistance		V _(VIN) = 3.6V		440	620	mΩ
			V _(VIN) = 5V		330	530	
I _(L IM-N)	Inverter switch current limit		V _(VIN) = 3.6V	1700	1950	2200	mA
r _{DS(on)(P)}	Boost switch on-resistance		V _(POS) = 5V		230	390	mΩ
			V _(POS) = 10V		170	230	
I _(LIM-P)	Boost switch current limit		V _(VIN) = 3.6V, V _(POS) = 8V	1700	1950	2250	mA
CONTROL STAGE							
V _{IH}	High-level input voltage, ENP, ENN, PSP, PSN			1.4			V
V _{IL}	Low-level input voltage, ENP, ENN, PSP, PSN					0.4	V
	Input current, ENP, ENN, PSP, PSN		ENP, ENN, PSP, PSN connected to GND or VIN		0.01	0.1	μA
R _(BSW)	Output resistance				27		k Ω
I _Q	Quiescent current	VIN	V _(VIN) = 3.6V, I _(POS) = I _(NEG) = 0, ENP = ENN = PSP = PSN = V _(VIN) , V _(POS) = 8V, V _(NEG) = − 5V		300	500	μA
		VPOS			100	120	
		VNEG			100	120	
I _{SD}	Shutdown supply current		ENN = ENP = LOW, T _A = − 40°C to 85°C		0.2	1.5	μA
V _(UVLO)	Undervoltage lockout threshold			2.1	2.35	2.7	V
T _(TS)	Thermal shutdown				150		°C
T _(TS-HYS)	Thermal shutdown hysteresis		Junction temperature decreasing		5		°C

6.6 Switching Characteristics

The specification applies over the full recommended input voltage range $V_I = 2.7\text{V}$ to 5.5V and over the temperature range $T_J = -40^\circ\text{C}$ to 125°C unless otherwise noted. Typical values apply for $V_I = 3.6\text{V}$ and $T_J = 25^\circ\text{C}$.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
FREQUENCY					
f	Oscillator frequency	1150	1380	1500	kHz
DUTY CYCLE					
$D_{(\text{MAX-P})}$	Maximum-duty-cycle, boost converter		87.5%		
$D_{(\text{MAX-N})}$	Maximum-duty-cycle, inverting converter		87.5%		
$D_{(\text{MIN-P})}$	Minimum-duty-cycle, boost converter		12.5%		
$D_{(\text{MIN-N})}$	Minimum-duty-cycle, inverting converter		12.5%		

6.7 Typical Characteristics

At 25°C , unless otherwise noted.

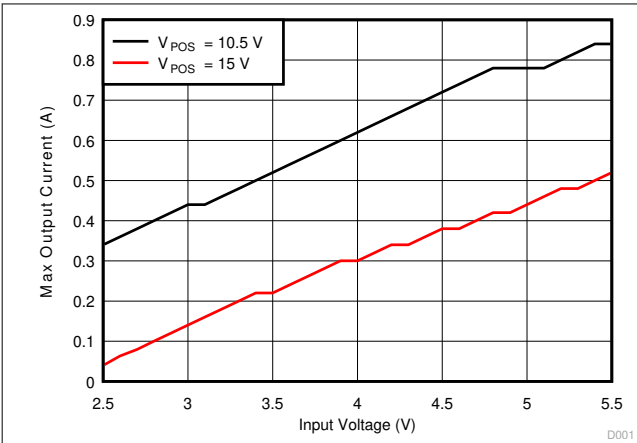


图 6-1. Boost Converter (V_{POS}) Maximum Output Current vs Input Voltage

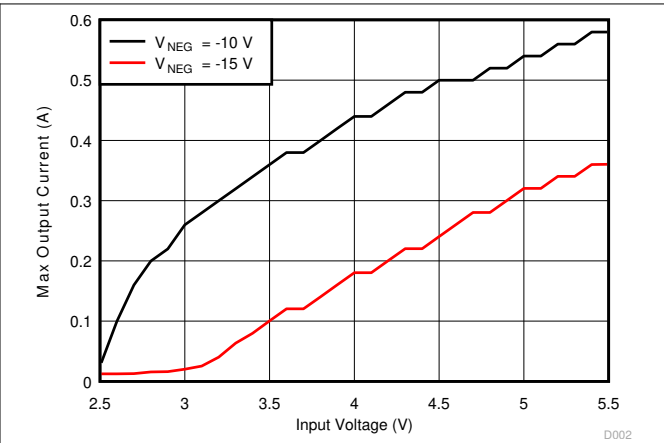


图 6-2. Inverting Converter (V_{POS}) Output Current vs Input Voltage

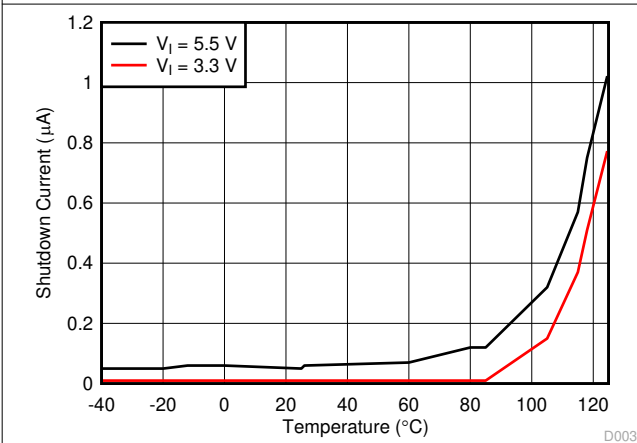


图 6-3. Shutdown Current (Into VIN and INN) Over Input Voltage

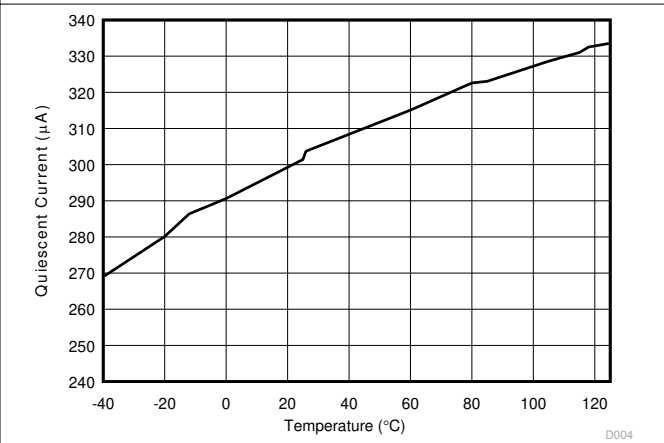



图 6-4. Quiescent Current (Into VIN and INN) Over Input Voltage

7 Detailed Description

7.1 Overview

The TPS65131-Q1 is a dual-output dc-dc converter that generates two adjustable output voltages. One output voltage is positive (boost converter), the other is negative (inverting converter). The positive output is adjustable up to 15V, the negative output is adjustable down to -15V. The device operates with an input voltage range of 2.7V to 5.5V. Both converters (positive and negative output) work independently of each other. They share a common clock and a common voltage reference. A fixed-frequency, pulse-width-modulated (PWM) regulator controls both outputs separately. In general, each converter operates in continuous-conduction mode (CCM). To improve efficiency at light loads, the converters can operate in discontinuous-conduction mode (DCM). When the power-save mode is enabled, the converters automatically transition between CCM and DCM operation: As the load current decreases, the converter enters DCM mode. Power-save mode is individually configurable for both outputs. The transition as a function of the load current works independently for each converter.

7.2 Functional Block Diagram

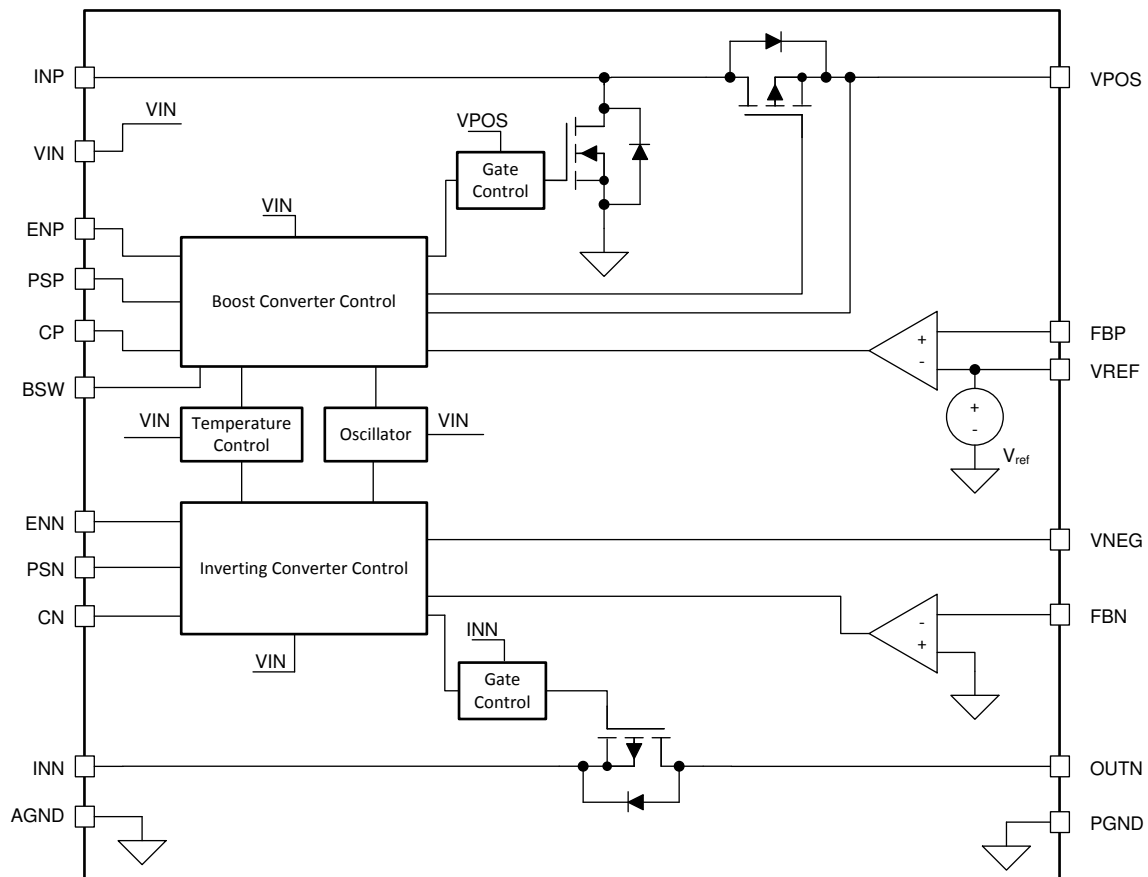

Copyright © 2017, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Power Conversion

Both converters operate in a fixed-frequency, PWM control scheme. The on-time of the internal switches varies depending on the input-to-output voltage ratio and the load. During the on-time, the inductors connected to the converters charge with current. In the remaining time, the off-time with a time period set by the fixed operating frequency, the inductors discharge into the output capacitors through the rectifier diodes. Usually at higher loads, the inductor currents are continuous. At lighter loads, the boost converter uses an additional internal switch to allow current to flow back to the input. This avoids inductor current becoming discontinuous in the boost converter. At the inverting converter, during light loads, the inductor current can become discontinuous. In this case, the control circuit of the inverting controller output automatically takes care of these changing conditions to operate always with an optimum control setup.

7.3.2 Control

The controller circuits of both converters employ a fixed-frequency, multiple-feedforward controller topology. These circuits monitor input voltage, output voltage, and voltage drop across the switches. Changes in the operating conditions of the converters directly affect the duty cycle and must not take the indirect and slow way through the output voltage-control loops. A self-learning control corrects measurement errors in this feedforward system. An external capacitor damps the output to avoid output-voltage steps due to output changes of this self-learning control system.

The voltage loops, determined by the error amplifiers, must only handle small signal errors. The error amplifiers feature internal compensation. Their inputs are the feedback voltages on the FBP and FBN pins. The device uses a comparison of these voltages with the internal reference voltage to generate an accurate and stable output voltage.

7.3.3 Output Rails Enable or Disable

Both converters can be enabled or disabled individually. Applying a logic HIGH signal at the enable pins (ENP for the boost converter, ENN for the inverting converter) enables the corresponding output. After enabling, internal circuitry, necessary to operate the specific converter, then turns on, followed by the [Soft Start](#).

Applying a low signal at the enable ENP or ENN pin shuts down the corresponding converter. When both enable pins are low, the device enters shutdown mode, where all internal circuitry turns off. The device now consumes shutdown current flowing into the VIN pin. The output loads of the converters can be disconnected from the input, see [Load Disconnect](#).

7.3.4 Load Disconnect

The device supports completely disconnecting the load when the converters are disabled. For the inverting converter, the device turns off the internal PMOS switch. If the inverting converter is turned off, no dc current path remains which could discharge the battery or supply.

This is different for the boost converter. The external rectifying diode, together with the boost inductor, form a dc current path which could discharge the battery or supply if any load connects to the output. The device has no internal switch to prevent current from flowing. For this reason, the device offers a PMOS gate control output (BSW) to enable and disable a PMOS switch in this dc current path, ideally directly between the boost inductor and battery. To be able to fully disconnect the battery, the forward direction of the parasitic backgate diode of this switch must point to the battery or supply. The external PMOS switch, which connects to BSW, turns on when the boost converter is enabled and turns off when the boost converter is disabled.

7.3.5 Soft Start

Both converters have implemented soft-start functions. When each converter is enabled, the implemented switch current limit ramps up slowly to its nominal programmed value in typically 1ms. The device includes this function to limit the input current during start-up to avoid high peak input currents, which could interfere with other systems connected to the same battery or supply.

If the application includes the [Load Disconnect](#) PMOS switch, a current flows from the input to the output of the boost converter at the moment the PMOS switch becomes conducting.

7.3.6 Overvoltage Protection

Both built-in converters (boost and inverter) have implemented individual overvoltage protection. If the feedback voltage under normal operation exceeds the nominal value by typically 5%, the corresponding converter shuts down immediately to protect any connected circuitry from possible damage.

7.3.7 Undervoltage Lockout

An undervoltage lockout prevents the device from starting up and operating if the supply voltage at the VIN pin is lower than the undervoltage lockout threshold. For this case, the device automatically shuts down both converters when the supply voltage at VIN falls below this threshold. Nevertheless, parts of the control circuits remain active, which is different than device shutdown using EN inputs. The device includes the undervoltage lockout function to prevent device malfunction.

7.3.8 Overtemperature Shutdown

The device automatically shuts down both converters if the implemented internal temperature sensor detects a chip temperature above the thermal shutdown temperature. It automatically starts operating again when the chip temperature falls below this threshold plus hysteresis threshold. The built-in hysteresis avoids undefined operation caused by ringing from shutdown and prevents operating at a temperature close to the overtemperature shutdown threshold.

7.4 Device Functional Modes

7.4.1 Power-Save Mode

The power-save mode can improve efficiency at light loads. In power-save mode, the converter only operates when the output voltage falls below an device internally set threshold voltage. The converter ramps up the output voltage with one or several operating pulses and goes again into power-save mode once the inductor current becomes discontinuous.

The PSN and PSP logic level selects between power-save mode and continuous-conduction mode. If the specific pins (PSP for the boost converter, PSN for the inverting converter) are HIGH, the power-save mode for the corresponding converter operates at light loads. Similarly, a LOW on the PSP pin or PSN pin disables the power-save mode for the corresponding converter.

8 Application and Implementation

备注


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The TPS656131-Q1 boost converter output voltage, V_{POS} , and the inverting converter output voltage, V_{NEG} , require external components to set the required output voltages. The valid output voltage ranges are as shown in [Recommended Operating Conditions](#)). The passages below show typical application examples with different output voltage settings and guidance for external component choices.

8.2 Typical Applications

8.2.1 TPS65131-Q1 With $V_{POS} = 10.5V$, $V_{NEG} = -10V$

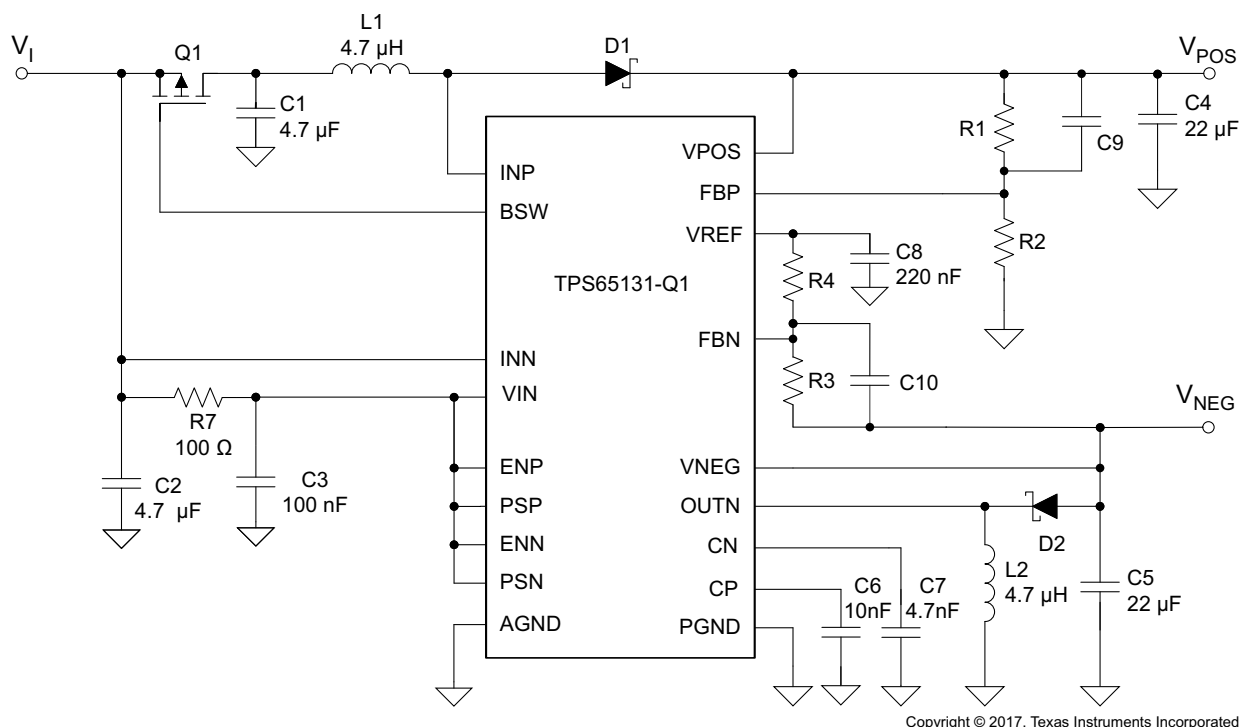

Copyright © 2017, Texas Instruments Incorporated

图 8-1. Typical Application Schematic With $V_{POS} = 10.5V$, $V_{NEG} = -10V$

8.2.2 Design Requirements

The design procedure for this setup is similar to the first example, see [Detailed Design Procedure](#). Change the feedback dividers to set the output voltage, see [Programming the Output Voltage](#). Further, choose the feed-forward capacitors according to [Feedforward Capacitors](#). 表 8-1 shows the components being changed. See 图 8-1.

表 8-1. Design Parameters

Design Parameter	Example Value	
Input voltage range	2.7V to 5.5V	
Boost converter output voltage, V_{POS}	R1 = 1M Ω R2 = 130k Ω C9 = 6.8pF	10.5V
Inverting converter output voltage, V_{NEG}	R3 = 1M Ω R4 = 121.2k Ω C10 = 7.5pF	- 10V

In this example, the converters are operated with power-save mode both enabled and disabled (see [Power-Save Mode](#)).

8.2.3 Detailed Design Procedure

8.2.3.1 Programming the Output Voltage

8.2.3.1.1 Boost Converter

An external resistor divider adjusts the output voltage of the TPS65131-Q1 boost converter stage. Connect this divider to the FBP pin. The typical value of the voltage at the FBP pin is the reference voltage, which is 1.213V. The maximum recommended output voltage at the boost converter is 15V. To achieve appropriate accuracy, the current through the feedback divider should be about 100 times higher than the current into the FBP pin. Typical current into the FBP pin is 0.05 μ A, and the voltage across R2 is 1.213V. Based on those values, the recommended value for R2 should be lower than 200k Ω in order to set the divider current at 5 μ A or higher.

Calculate the value of resistor R1, as a function of the needed output voltage (V_{POS}), with 方程式 1:

$$R1 = R2 \times \left(\frac{V_{POS}}{V_{ref}} - 1 \right) \quad (1)$$

In this example, with R2 = 130k Ω , choose R1 = 1M Ω to set V_{POS} = 10.5V.

8.2.3.1.2 Inverting Converter

An external resistor divider adjusts the output voltage of the TPS65131-Q1 inverting converter stage. Connect this divider to the FBN pin. Unlike the feedback divider at the boost converter, the reference point of the feedback divider is not GND, but V_{ref} . So the typical value of the voltage at the FBN pin is 0V. The minimum recommended output voltage at the inverting converter is - 15V. Feedback divider current considerations are similar to the considerations for the boost converter. For the same reasons, the feedback divider current should be in the range of 5 μ A or higher. The voltage across R4 is 1.213V. Based on those values, the recommended value for R4 should be lower than 200k Ω in order to set the divider current at the required value.

Calculate the value of resistor R3, as a function of the needed output voltage (V_{NEG}), with 方程式 2:

$$R3 = -R4 \times \left(\frac{V_{NEG}}{V_{ref}} \right) \quad (2)$$

In this example, with R4 = 121.2k Ω , choose R3 = 1M Ω to set V_{NEG} = - 10V.

8.2.3.1.3 Inductor Selection

An inductive converter normally requires two main passive components to store energy during the conversion. Therefore, each converter requires an inductor and a storage capacitor. To select the right inductor, it is recommended to keep the possible peak inductor current below the current-limit threshold of the power switch in the chosen configuration. For example, the current-limit threshold of the switch for the boost converter and for the inverting converters is nominally 1950mA. The highest peak current through the switches and the inductor depends on the output load (I_{POS} , I_{NEG}), the input voltage (V_I), and the output voltages (V_{POS} , V_{NEG}). Use 方程式 3 to estimate the peak inductor current in the boost converter, $I_{(L-P)}$. 方程式 4 shows the corresponding formula for the inverting converter, $I_{(L-N)}$.

$$I_{(L-P)} = \frac{V_{POS}}{V_I \times 0.64} \times I_{POS} \quad (3)$$

$$I_{(L-N)} = \frac{V_I - V_{NEG}}{V_I \times 0.64} \times I_{NEG} \quad (4)$$

The second parameter for choosing the inductor is the desired current ripple in the inductor. Normally, it is advisable to work with a ripple of less than 20% of the average inductor current. A smaller ripple reduces the losses in the inductor, as well as output voltage ripple and EMI. But in the same way, output voltage regulation gets slower, causing higher voltage changes during fast load changes. In addition, a larger inductor usually increases the total system cost. Keep those parameters in mind and calculate the possible inductor value with 方程式 5 for the boost converter ($L1$) and 方程式 6 for the inverting converter ($L2$).

$$L1 = \frac{V_I \times (V_{POS} - V_I)}{\Delta I_{(L-P)} \times f \times V_{POS}} \quad (5)$$

$$L2 = \frac{V_I \times V_{NEG}}{\Delta I_{(L-N)} \times f \times (V_{NEG} - V_I)} \quad (6)$$

The parameter f is the switching frequency. For the boost converter, $\Delta I_{(L-P)}$ is the ripple current in the inductor, that is, 20% of $I_{(L-P)}$. Accordingly, for the inverting converter, $\Delta I_{(L-N)}$ is the ripple current in the inductor, that is, 20% of $I_{(L-N)}$. V_I is the input voltage, which is 3.3V in this example. So, the calculated inductance value for the boost inductor is 5.1μH and for the inverting converter inductor is 5.1μH. With these calculated values and the calculated currents, it is possible to choose a suitable inductor.

In typical applications, the recommendation is to choose a 4.7μH inductor. The device is optimized to work with inductance values between 3.3μH and 6.8μH. Nevertheless, operation with higher inductance values may be possible in some applications. Perform detailed stability analysis in this case. Be aware of the possibility that load transients and losses in the circuit can lead to higher currents than estimated in [方程式 3](#) and [方程式 4](#). Also, the losses caused by magnetic hysteresis and conductor resistance are a major parameter for total circuit efficiency.

The following table shows inductors from different suppliers used with the TPS65131-Q1 converter:

表 8-2. List of Inductors

VENDOR ⁽¹⁾	INDUCTOR SERIES
EPCOS	B8246284-G4
Würth Elektronik	7447789XXX
	744031XXX
TDK	VLF3010
	VLF4012
Cooper Electronics Technologies	SD12

(1) See [节 9.3](#)

8.2.3.2 Capacitor Selection

8.2.3.2.1 Input Capacitor

As a recommendation, choose an input capacitors of at least 4.7μF for the input of the boost converter (INP) and accordingly for the input of the inverting converter (INN). This improves transient behavior of the regulators and EMI behavior of the total power-supply circuit. Choose a ceramic capacitor or a tantalum capacitor. For the use of a tantalum capcitor, an additonal, smaller ceramic capacitor (100nF) in parallel is required. Place the input capacitor(s) close to the input pins.

8.2.3.2.2 Output Capacitors

One of the major parameters necessary to define the capacitance value of the output capacitor is the maximum allowed output voltage ripple of the converter. Two parameters, which are the capacitance and the equivalent series resistance (ESR), affect this ripple. It is possible to calculate the minimum capacitance needed for the defined ripple, supposing that the ESR is zero. Use [方程式 7](#) for the boost-converter output capacitor (C4min) and [方程式 8](#) for the inverting-converter output capacitor (C5min).

$$C4min = \frac{I_{POS} \times (V_{POS} - V_I)}{f \times \Delta V_{POS} \times V_{POS}} \quad (7)$$

$$C5min = \frac{I_{NEG} \times V_{NEG}}{f \times \Delta V_{NEG} \times (V_{NEG} - V_I)} \quad (8)$$

The parameter f is the switching frequency. ΔV_{POS} and ΔV_{NEG} are the maximum allowed ripple voltages for each converter.

Choosing a ripple voltage in the range of 10mV requires a minimum capacitance of 12 μ F. The total ripple is larger due to the ESR of the output capacitor. Use [方程式 9](#) for the boost converter and [方程式 10](#) for the inverting converter to calculate this additional ripple component.

$$\Delta V_{(ESR-P)} = I_{POS} \times R_{(ESR-C4)} \quad (9)$$

$$\Delta V_{(ESR-N)} = I_{NEG} \times R_{(ESR-C5)} \quad (10)$$

In this example, an additional ripple of 2mV is the result of using a typical ceramic capacitor with an ESR in the 10m Ω range. The total ripple is the sum of the ripple caused by the capacitance and the ripple caused by the ESR of the capacitor. In this example, the total ripple is 10mV.

Load transients can create additional ripple. When the load current increases rapidly, the output capacitor must provide the additional current until the inductor current increases by the control loop which sets a higher on-time (duty cycle) of the main switch. The higher duty cycle results in longer inductor charging periods. The inductance itself also limits the rate of increase of the inductor current. When the load current decreases rapidly, the output capacitor must store the excess energy (stored in the inductor) until the regulator has decreased the inductor current by reducing the duty cycle. The recommendation is to use higher capacitance values, as the foregoing calculations show.

8.2.3.3 Rectifier Diode Selection

Both converters (the boost and inverting converter) require rectifier diodes, D1 and D2. As a recommendation, to reduce losses, use Schottky diodes. The forward current rating needed is equal to the maximum output current. Consider that the maximum currents, I_{POSmax} and I_{NEGmax} , might differ for V_{POS} and V_{NEG} when choosing the diodes.

8.2.3.4 External P-MOSFET Selection

During shutdown, when connected to a power supply, a path from the power supply to the positive output conducts through the inductor and an external diode. Optionally, in order to fully disconnect the positive output V_{POS} during shutdown, add an external p-MOSFET (Q1). The BSW pin controls the gate of the p-MOSFET. When choosing a proper p-MOSFET, the V_{GS} and V_{GD} voltage ratings must cover the input voltage range, the drain current rating must not be lower than the maximum input current flowing into the application, and conditions of the p-MOSFET operating area must fit.

If there is no intention to use an external p-MOSFET, leave the BSW pin floating.

8.2.3.5 Stabilizing the Control Loop

8.2.3.5.1 Feedforward Capacitors

As a recommendation, to speed up the control loop, place feedforward capacitors in the feedback divider, parallel to R1 (boost converter) and R3 (inverting converter). [方程式 11](#) shows how to calculate the appropriate value for the boost converter, and [方程式 12](#) for the inverting converter.

$$C9 = \frac{6.8 \mu s}{R1} \quad (11)$$

$$C10 = \frac{7.5 \mu s}{R3} \quad (12)$$

In this application example, $C9 = 6.8pF$ and $C10 = 7.5pF$ match the choices of R1 and R3.

To avoid coupling noise into the control loop from the feedforward capacitors, it is possible to place a series resistor to limit the bandwidth of the feedforward effect. Any value between $10k\Omega$ and $100k\Omega$ is suitable. The higher the resistance, the lower the noise coupled into the control loop system.

8.2.3.5.2 Compensation Capacitors

The device features completely internally compensated control loops for both converters. The internal feedforward system has built-in error correction which requires external capacitors. As a recommendation, use a $10nF$ capacitor at the CP pin of the boost converter and a $4.7nF$ capacitor at the CN pin of the inverting converter.

8.2.4 Analog Supply Input Filter

To ensure a noise free voltage supply of the IC, it is recommended to add an RC or LC filter between IIN and VIN pins.

8.2.4.1 RC-Filter

For most applications an RC filter can be used with a resistance value of 100 Ω minimum and capacitor value of 0.1 μF as in the application example [图 8-1](#).

8.2.4.2 LC-Filter

For applications where input voltages V_I with a fast rising edge (slew rate $\geq 275\text{mV}/\mu\text{s}$) are expected, it is recommended to replace the resistor R7 with a ferrite bead to minimize the delay between the signals on IIN and VIN. A ferrite bead with the lowest possible DCR and a proper current rating should be selected - BLM18KG101TN1 for example. A conservative approach for the current rating specification is to set it at 1.5 times or twice the maximum input current.

表 8-3. List of Ferrite Beads

VENDOR	FERRITE BEAD SERIES
Murata	BLMxKG

8.2.5 Thermal Information

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependent issues, such as thermal coupling, airflow, added heatsinks and convection surfaces, and the presence of heat-generating components affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance follow.

- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB
- Introducing airflow to the system

The recommended device junction temperature range, T_J , is -40°C to 125°C . The thermal resistance of the 24-pin QFN, 4 - mm $\times$ 4 - mm package (RGE) is $R_{\theta JA} = 34.1^\circ\text{C}/\text{W}$. The recommended operating ambient temperature range for the device is $T_A = -40^\circ\text{C}$ to 105°C . Use [方程式 13](#) to calculate the maximum power dissipation, $P_{D\text{max}}$, as a function of T_A . In this equation, use $T_J = 125^\circ\text{C}$ to operate the device within the recommended temperature range, use $T_J = T_{(TS)}$ to determine the absolute maximum threshold when the device might go into thermal shutdown. If the maximum ambient temperature of the application is lower, more heat dissipation is possible.

$$P_{D\text{max}} = \frac{T_J - T_A}{R_{\theta JA}} \quad (13)$$

8.2.6 Application Curves

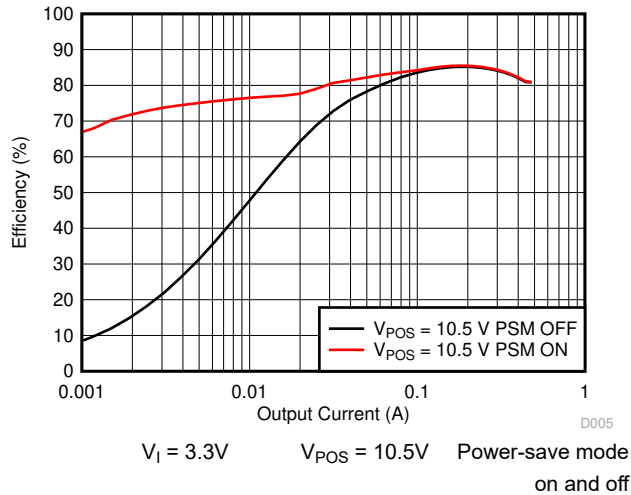


图 8-2. Boost Converter (V_{POS}) Efficiency vs Output Current

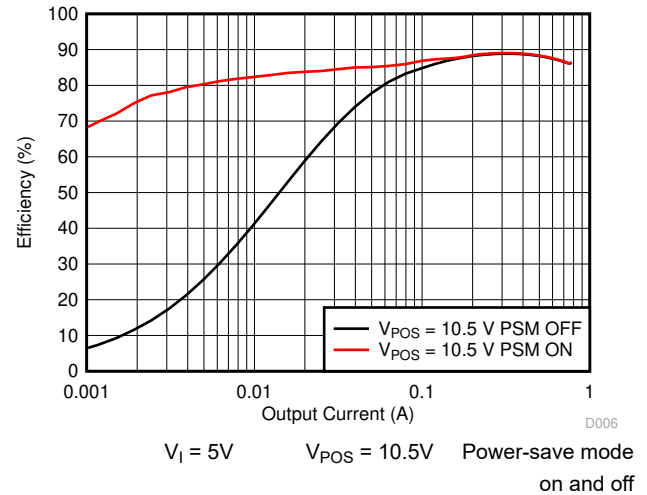


图 8-3. Boost Converter (V_{POS}) Efficiency vs Output Current

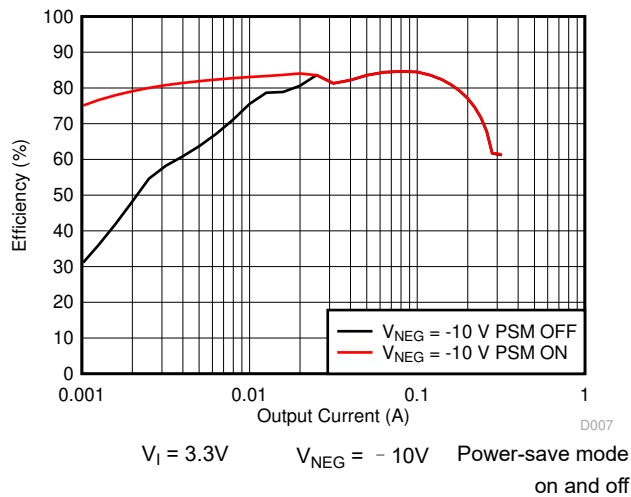


图 8-4. Inverting Converter (V_{NEG}) Efficiency vs Output Current



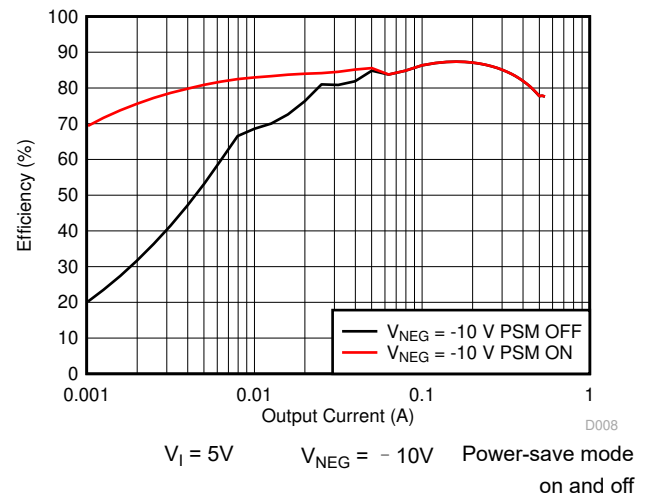


图 8-5. Inverting Converter (V_{NEG}) Efficiency vs Output Current

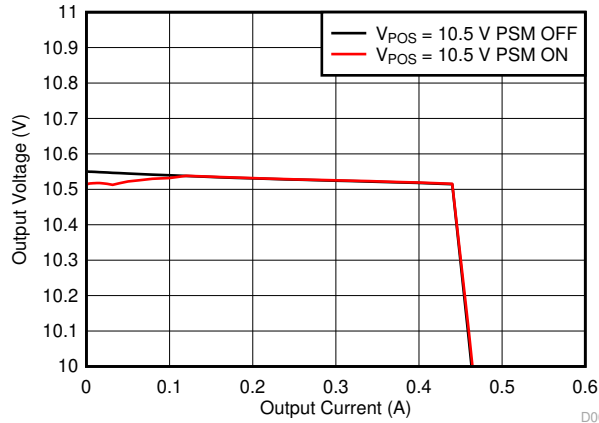


$V_I = 3.3\text{ V}$ $V_{POS} = 10.5\text{ V}$ Power-save mode
on and off

图 8-6. Boost Converter (V_{POS}) Output Voltage vs Output Current

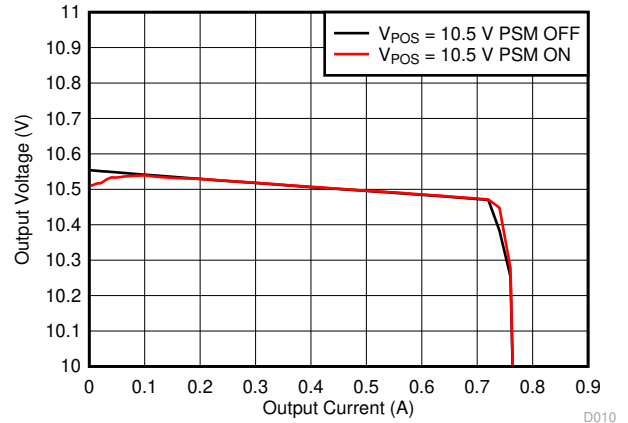


$V_I = 5\text{ V}$ $V_{POS} = 10.5\text{ V}$ Power-save mode
on and off

图 8-7. Boost Converter (V_{POS}) Output Voltage vs Output Current

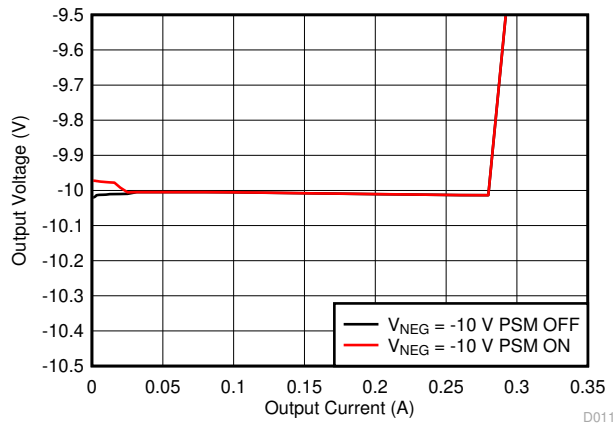


$V_I = 3.3\text{ V}$ $V_{NEG} = -10\text{ V}$ Power-save mode
on and off

图 8-8. Inverting Converter (V_{NEG}) Output Voltage vs Output Current

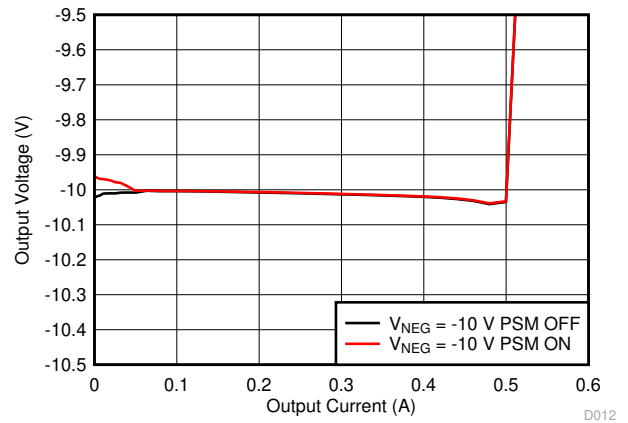


$V_I = 5\text{ V}$ $V_{NEG} = -10\text{ V}$ Power-save mode
on and off

图 8-9. Inverting Converter (V_{NEG}) Output Voltage vs Output Current

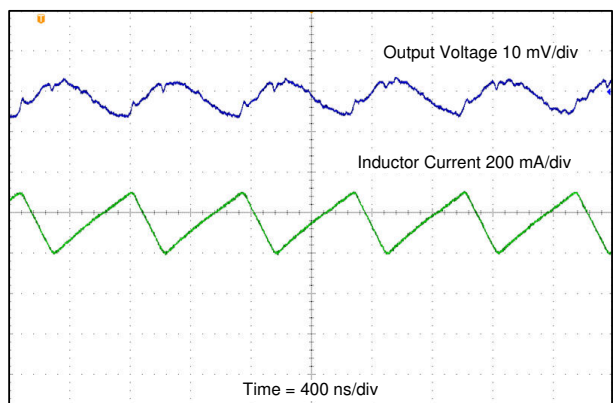


$V_I = 3.3\text{ V}$ $V_{POS} = 10.5\text{ V}$ $I_{POS} = 200\text{ mA}$ Power-save mode
off

图 8-10. Boost Converter (V_{POS}) Output Ripple

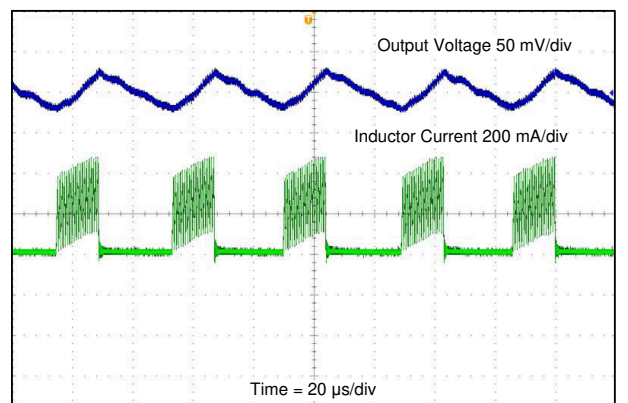


$V_I = 3.3\text{ V}$ $V_{POS} = 10.5\text{ V}$ $I_{POS} = 20\text{ mA}$ Power-save mode
on

图 8-11. Boost Converter (V_{POS}) Output Ripple

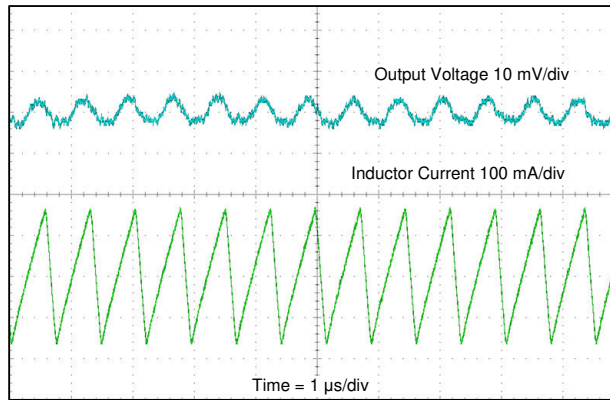


$V_I = 3.3V$ $V_{NEG} = -10V$ $I_{NEG} = 200mA$ Power-save mode off

图 8-12. Inverting Converter (V_{NEG}) Output Ripple

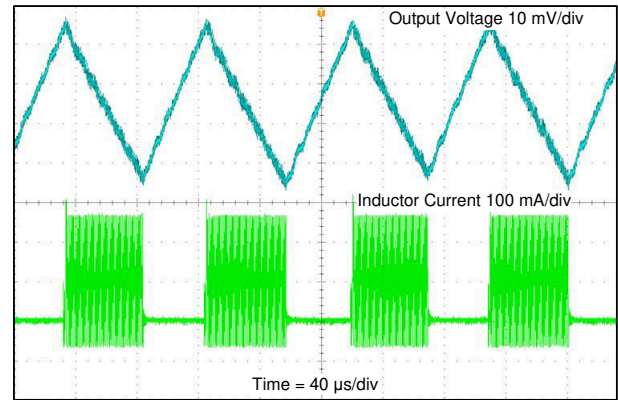


$V_I = 3.3V$ $V_{NEG} = -10V$ $I_{NEG} = 20mA$ Power-save mode on

图 8-13. Inverting Converter (V_{NEG}) Output Ripple

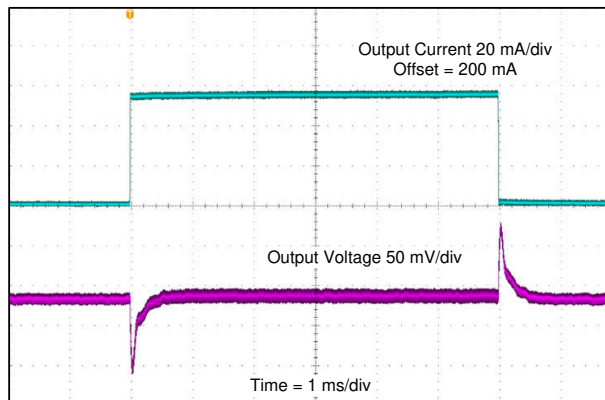


$V_I = 3.3V$ $V_{POS} = 10.5V$
 $I_{POS} = 200mA$ to $250mA$

图 8-14. Boost Converter (V_{POS}) Load Transient Response

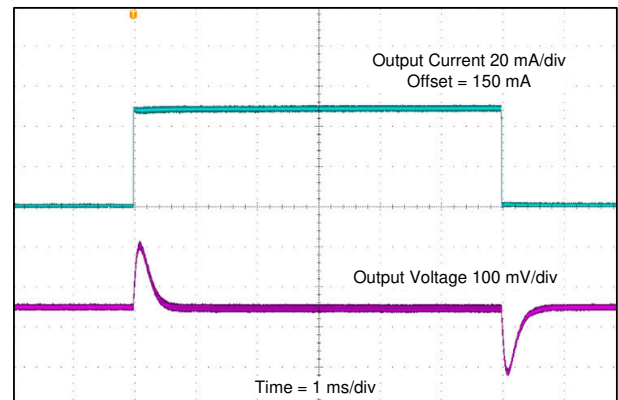


$V_I = 3.3V$ $V_{NEG} = -10V$
 $I_{NEG} = 150mA$ to $200mA$

图 8-15. Inverting Converter (V_{NEG}) Load Transient Response

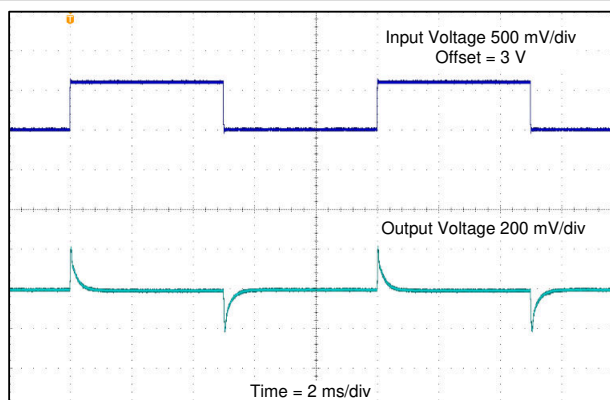

$V_I = 3V$ to $3.6V$ $V_{POS} = 10.5V$ $I_{POS} = 150mA$

图 8-16. Boost Converter (V_{POS}) Line Transient Response

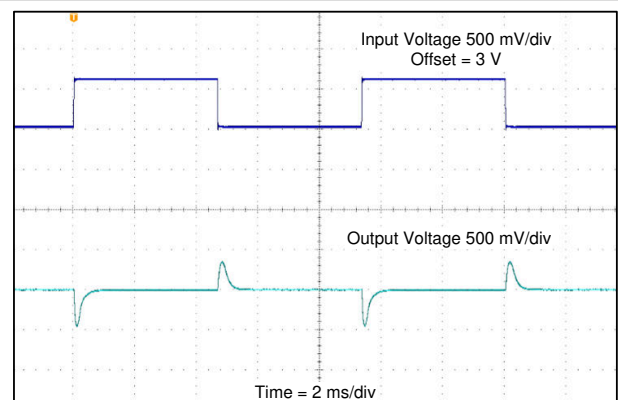

$V_I = 3V$ to $3.6V$ $V_{NEG} = -10V$ $I_{NEG} = 100mA$

图 8-17. Inverting (V_{NEG}) Converter Line Transient Response

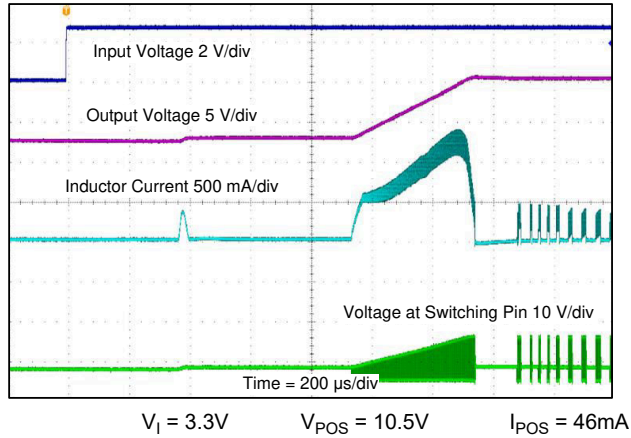
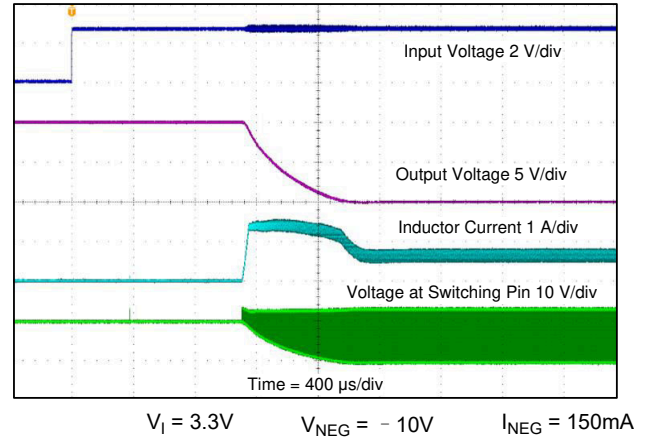
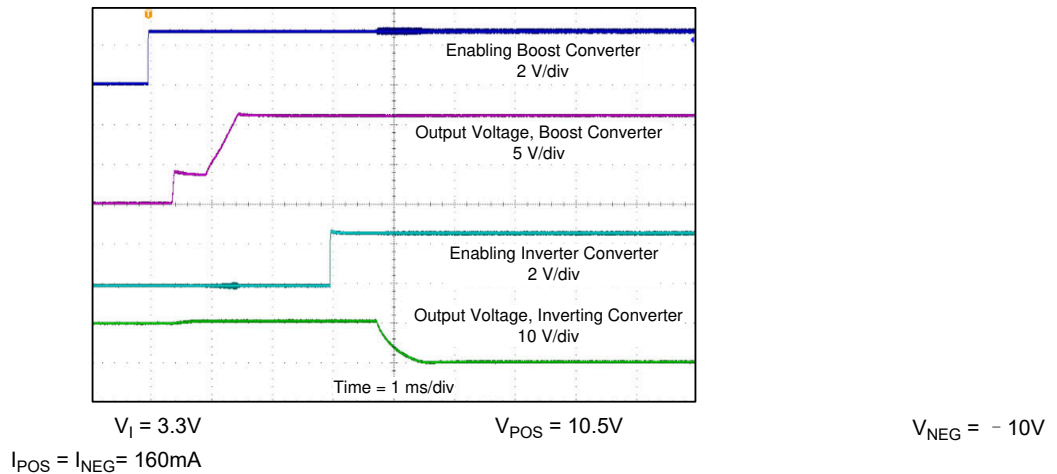
图 8-18. Boost Converter (V_{POS}) Start-Up Into Load图 8-19. Inverting Converter (V_{NEG}) Start-Up Into Load

图 8-20. Boost and Inverting Converter Start-Up Into Load

8.3 Power Supply Recommendations

The TPS65131-Q1 input voltage ranges from 2.7V to 5.5V. Consequently, the supply can come, for example, from a 3.3V or 5V rail. If the device starts into load during the [Soft Start](#) phase, the drawn input current can be higher than during post-start operation. Consider the application requirements when selecting the power supply.

To avoid unintended toggling of the [Undervoltage Lockout](#), connect the TPS65131-Q1 via a low-impedance path to the power supply.

8.4 Layout

8.4.1 Layout Guidelines

As for all switching power supplies, the layout is an important step in the design, especially at high peak currents and high switching frequencies. Improper layout might show the symptoms of poor line or load regulation, ground and output voltage shifts, stability issues, unsatisfying EMI behavior or worsened efficiency. Therefore, use wide and short traces for the main current paths and for the power ground tracks. The input capacitors (C1, C2, C3), output capacitors (C4, C5), the inductors (L1, L2), and the rectifying diodes (D1, D2) should be placed as close as possible to the IC to keep parasitic inductances low. Use a wide PGND plane. Connect the analog ground pin (AGND) to the PGND plane. Further, connect the PGND plane with the exposed thermal pad. Place the feedback dividers as close as possible to the control pin (boost converter) or the VREF pin (inverting converter) of the IC.

图 8-21 provides an layout example which is recommended to be followed.

8.4.2 Layout Example

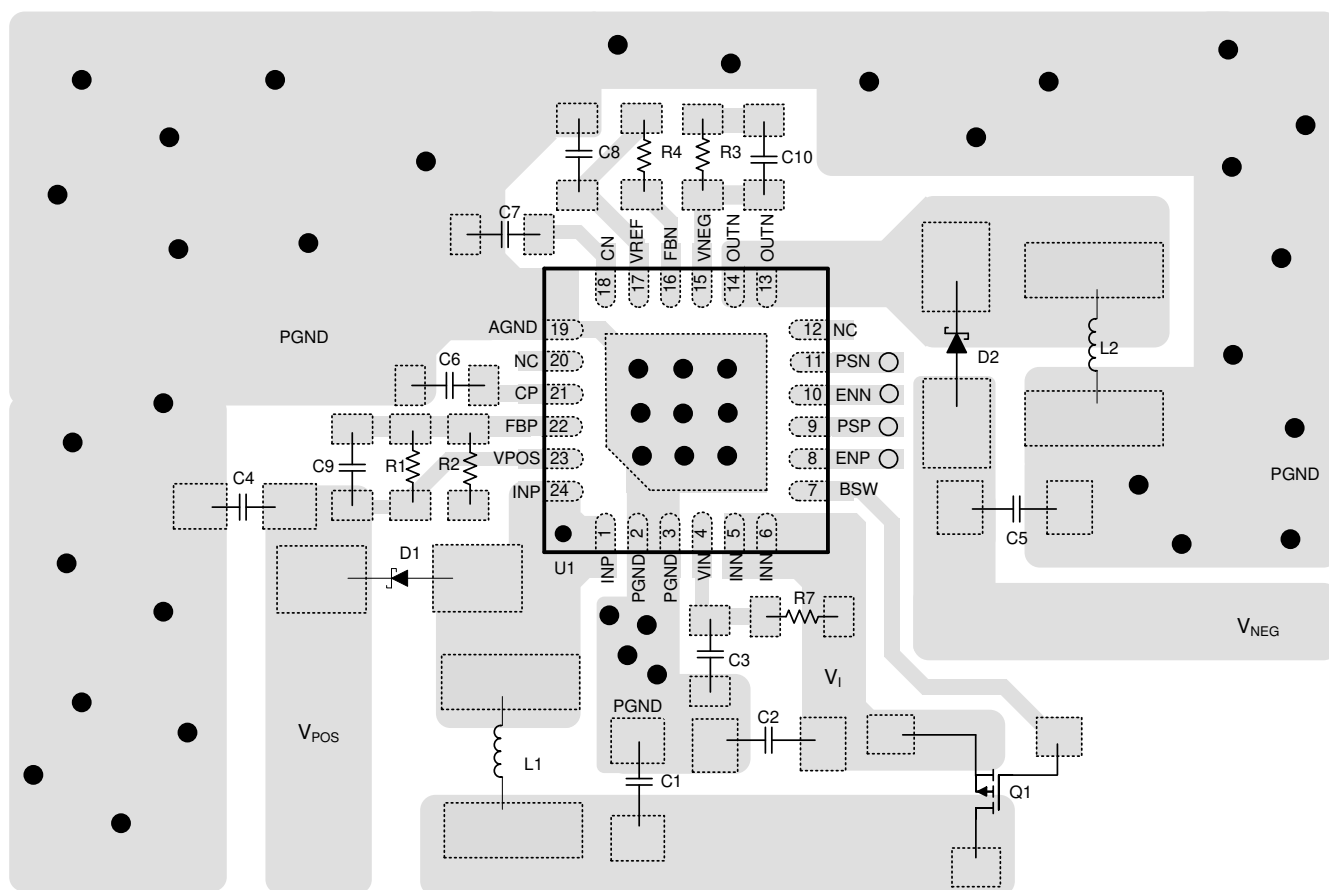


图 8-21. TPS65131-Q1 Layout Recommendation

9 器件和文档支持

TI 提供大量的开发工具。下面列出了用于评估器件性能、生成代码和开发解决方案的工具和软件。

9.1 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.2 支持资源

TI E2E™ 中文支持论坛 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

9.3 商标

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

9.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.5 术语表

TI 术语表

本术语表列出并解释了术语、首字母缩略词和定义。

10 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision E (March 2017) to Revision F (August 2024)	Page
• 更新了 器件信息 表.....	1
Changes from Revision D (October 2014) to Revision E (March 2017)	Page
• 将 节 1 要点文本从“...认证...”更改为“...测试指南...”，将 HBM 分类等级从“H2”更改为“H1C”.....	1
• Moved T _{stg} spec to the Abs Max Ratings table per new data sheet standard.....	4
• Changed "Handling Ratings" to "ESD Ratings" and HBM Value From "±2 kV" to "±1000 V".....	4
• Changed Electrical Characteristics condition statement to "This specification applies over the full recommended input voltage range V _I = 2.7 V to 5.5 V and over the temperature range T _J = - 40°C to 125°C unless otherwise noted. Typical values apply for V _I = 3.6 V and T _J = 25°C.".....	5
• Changed The specification applies over the full recommended input voltage range V _I = 2.7 V to 5.5 V and over the temperature range T _J = - 40 °C to 125°C unless otherwise noted. Typical values apply for V _I = 3.6 V and T _J = 25°.....	6
• Added 节 8.2.4 description	16
Changes from Revision C (March 2014) to Revision D (October 2014)	Page
• 全局编辑更改，数据表使用了全新的格式.....	1

• 将最大效率从 89% 更改为 91% , 从 81% 更改为 85%.....	1
• 删除了 “最小 1.25MHz”	1
• 将 1μA 关断电流更改为 0.2μA 典型值.....	1
• Added Thermal Pad to Absolute Maximum Ratings. Added min./max. values where missing.....	4
• Added $V_{(VIN)}$, $V_{(INN)}$, $V_{(NEG)}$, $V_{(POS)}$, $V_{(ENN)}$, $V_{(ENP)}$, $V_{(PSN)}$ to Recommended Operating Conditions table.....	4
• Changed symbol names to JEDEC compliance.....	5
• Added frequency and duty cycles to Switching Characteristics table. Removed from Electrical Characteristics table.....	6
• Added Rectifier Diode Selection Guide.....	15
• Added P-MOSFET Selection Guide.....	15

Changes from Revision B (February 2013) to Revision C (March 2014)

Page

• 添加了 “在 - 40°C 至 125°C 结温范围内测试了电气特性”	1
• 添加了 “器件信息” 表.....	1
• Deleted T_A table row.....	4
• Changed I_{NN} to V_{INN} , added pin names VIN and INN.....	4
• Added pin name VPOS.....	4
• Added pin name VNEG.....	4
• Changed I_{NP} to V_{INP} , added pin name INP.....	4
• Changed "between pins OUTN to V_{INN} " to "between pins OUTN to INN".....	4
• Added operating junction temperature.....	4
• Added "In applications where high power dissipation and/or poor package thermal resistance is present, the maximum ambient temperature may require derating. See 节 8.2.5 for details.".....	4
• Deleted "virtual" from "Operating virtual junction temperature range".....	4
• Changed Electrical Characteristics condition statement to "This specification applies over the full recommended input voltage range $V_I = 2.7\text{ V}$ to 5.5 V and over the temperature range $T_J = T_A = -40^\circ\text{C}$ to 125°C unless otherwise noted. Typical values apply for $V_I = 3.6\text{ V}$ and $T_J = T_A = 25^\circ\text{C}$.".....	5
• Changed $I_{LIM,min} = 1800\text{ mA}$ to 1700 mA	5
• Deleted $V_{POS} = 5\text{ V}$ (105°C) row.....	5
• Changed $r_{DS(on)P,max}$ ($V_{POS} = 5\text{ V}$) = $300\text{ m}\Omega$ to $390\text{ m}\Omega$	5
• Changed $r_{DS(on)P,max}$ ($V_{POS} = 10\text{ V}$) = $200\text{ m}\Omega$ to $230\text{ m}\Omega$	5
• Changed $I_{LIMP,min} = 1800\text{ mA}$ to 1700 mA	5
• Changed $I_{LIMP,max} = 2200\text{ mA}$ to 2250 mA	5
• Added $T_A = -40^\circ\text{C}$ to 85°C	5
• Changed minimum $f = 1250\text{ kHz}$ to 1150 kHz	6
• Editorially updated Block Diagram.....	7
• Changed "The maximum recommended junction temperature (T_J) of the TPS65131-Q1 is 125°C ." to "The recommended device junction temperature range, T_J , is -40°C to 125°C .".....	16
• Changed $R_{\theta JA} = 37.8^\circ\text{C/W}$ to $R_{\theta JA} = 34.1^\circ\text{C/W}$	16
• Changed "Specified regulator operation is ensured to a maximum ambient temperature T_A of 105°C ." to "The recommended operating ambient temperature range for the device is $T_A = -40^\circ\text{C}$ to 105°C .".....	16
• Changed "Therefore, the maximum power dissipation is about 1058 mW " to "Use 方程式 13 to calculate the maximum power dissipation, P_{Dmax} , as a function of T_A . In this equation, use $T_J = 125^\circ\text{C}$ to operate the device within the recommended temperature range, use $T_J = T_{(TS)}$ to determine the absolute maximum threshold when the device might go into thermal shutdown.".....	16
• Changed 方程式 13	16

Changes from Revision A (November 2012) to Revision B (February 2013)	Page
• 将 CDM ESD 等级从 C3B 改为 C4B。	1

Changes from Revision * (May 2012) to Revision A (November 2012)	Page
• 器件从预发布变为量产	1
• Added thermal information table values	5
• Added $V_{POS} = 5\text{ V}$ (105°C) row and values to Electrical Characteristics table	5

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most-current data available for the designated device. This data is subject to change without notice and without revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

11.1 Mechanical Data


RGE0024B



PACKAGE OUTLINE

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

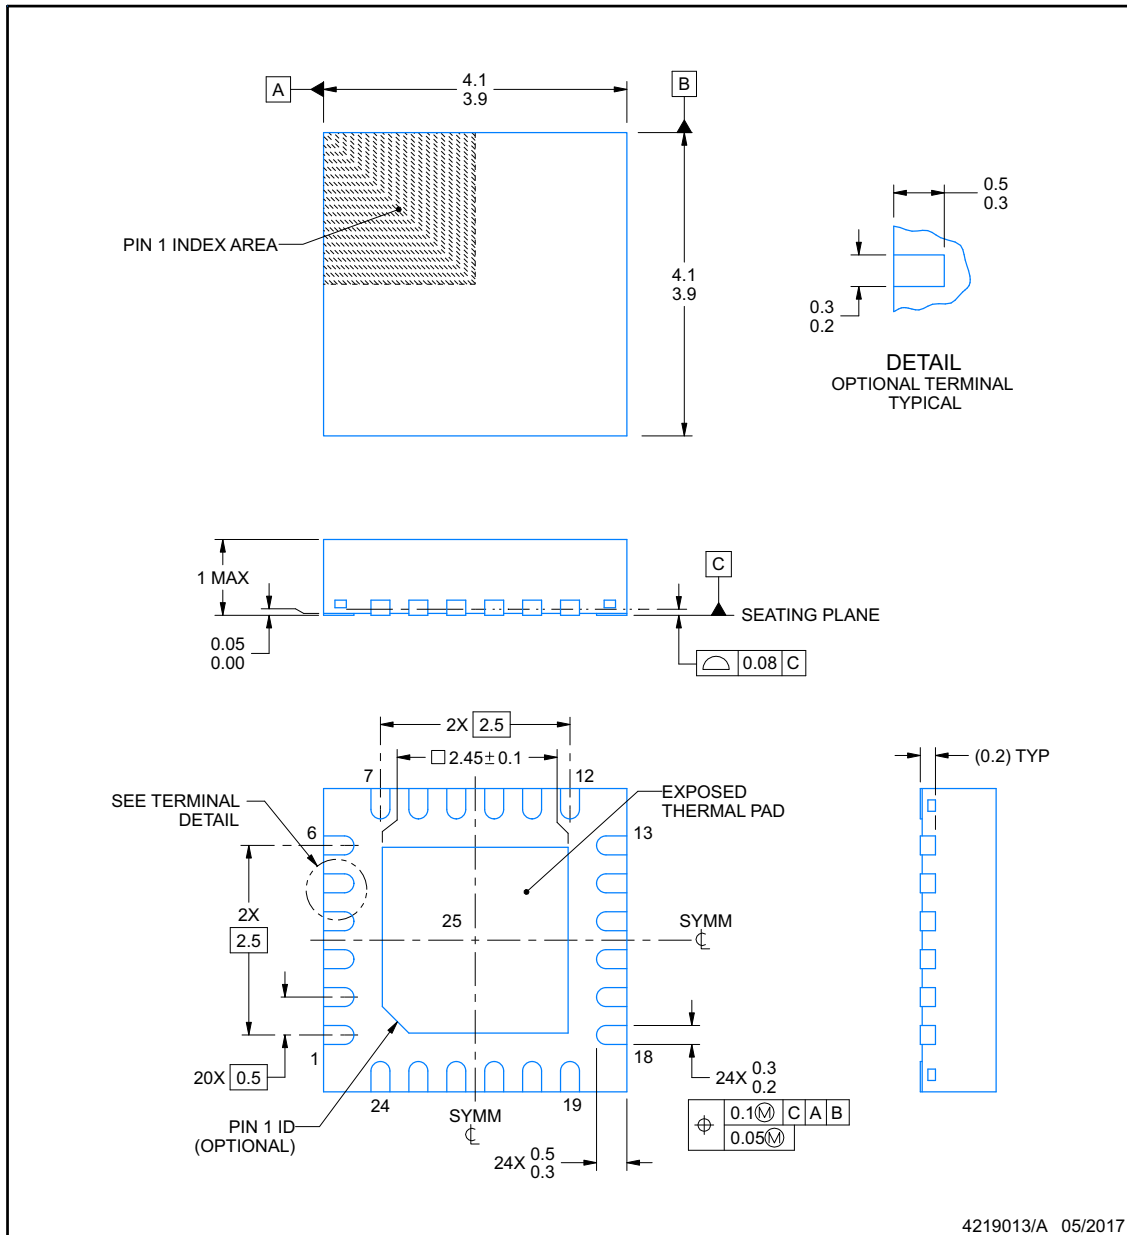


NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT**RGE0024B****VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

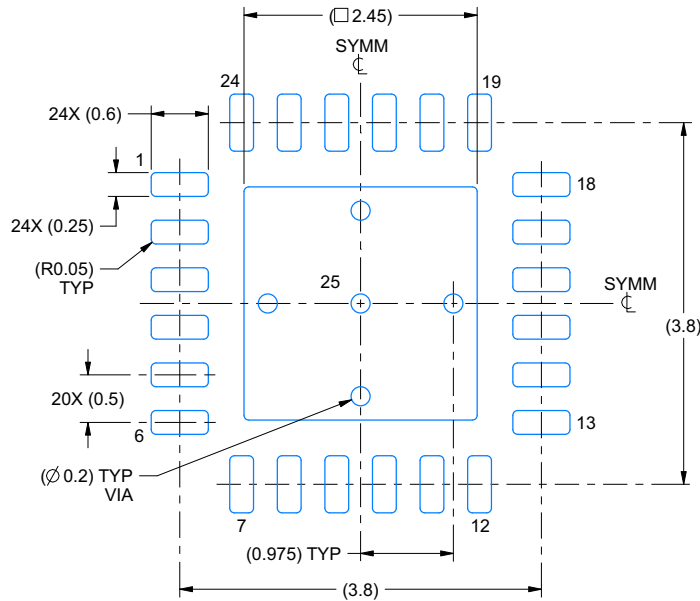

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

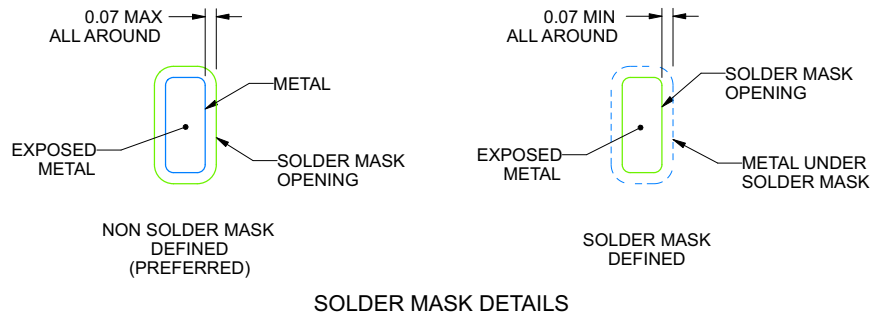

4219013/A 05/2017

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGE0024B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

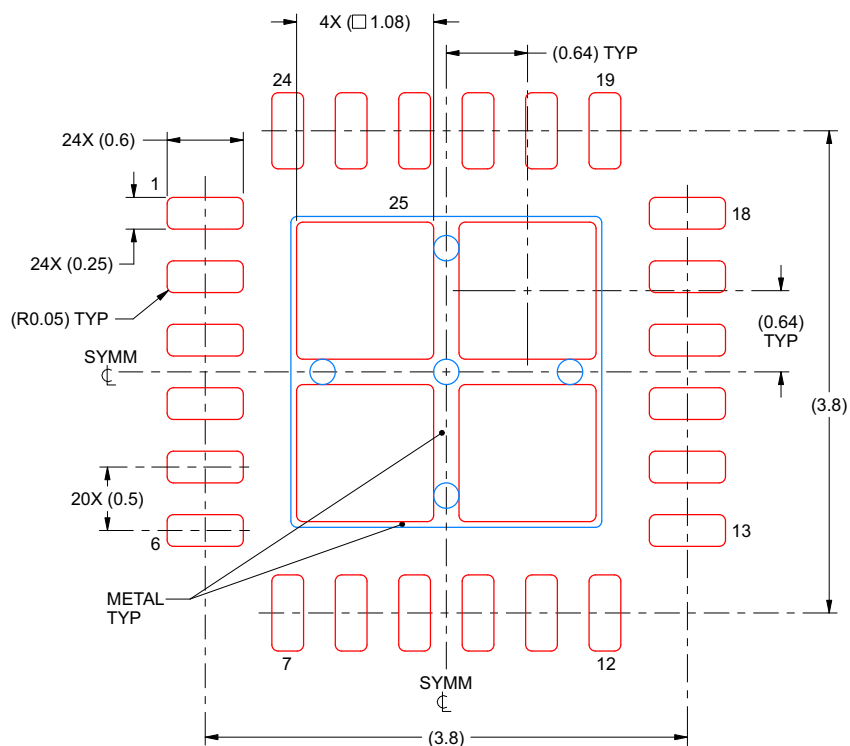

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
EXPOSED PAD 25
78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:20X


4219013/A 05/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

RGE0024N**PACKAGE OUTLINE****VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK-NO LEAD

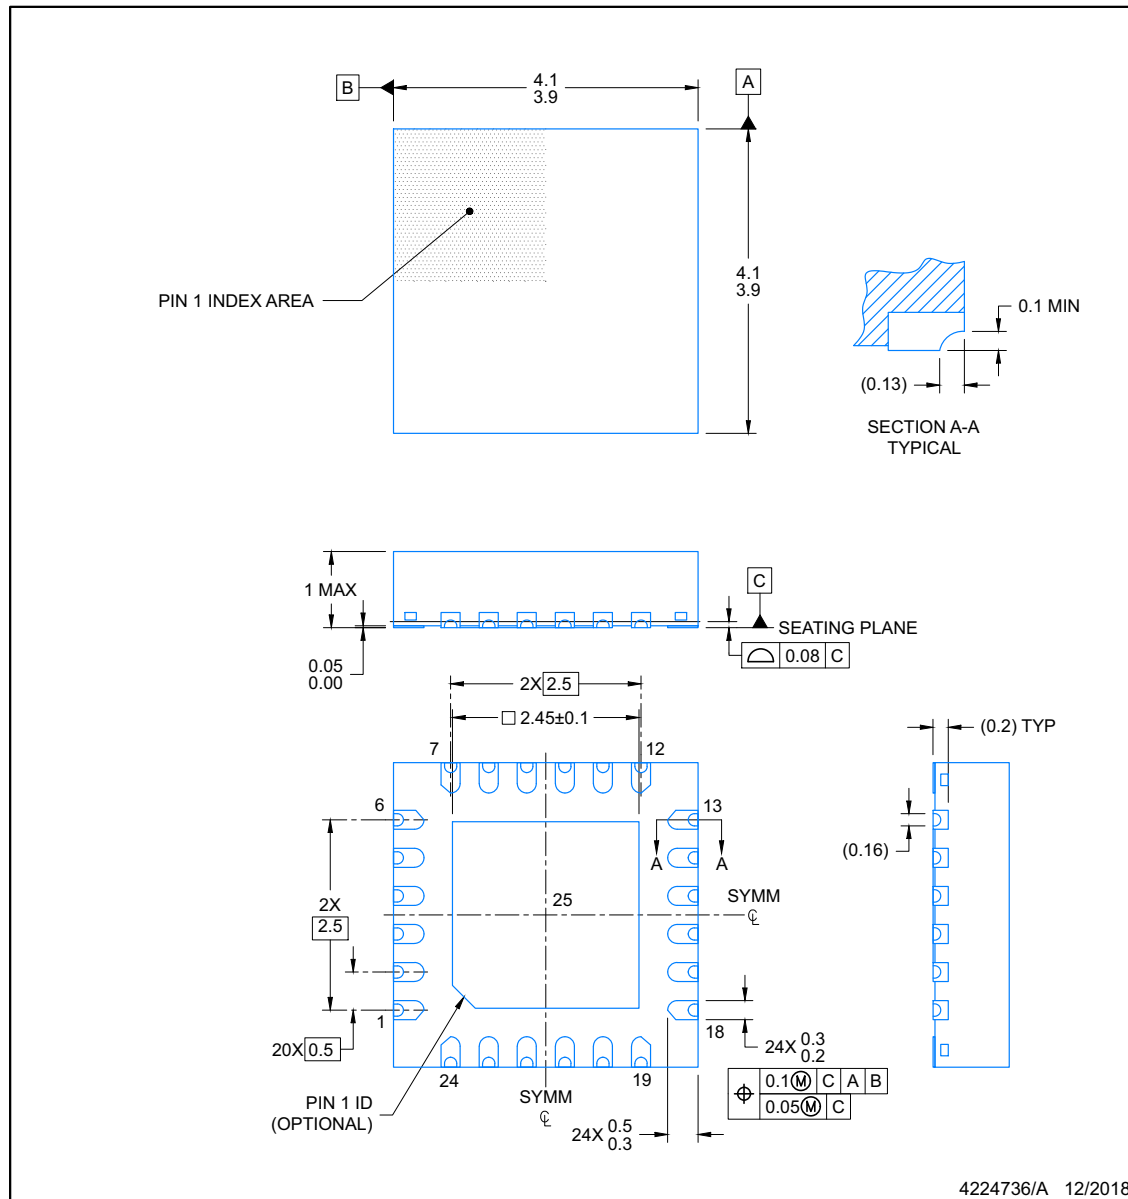**NOTES:**


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

EXAMPLE BOARD LAYOUT

RGE0024N

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK-NO LEAD

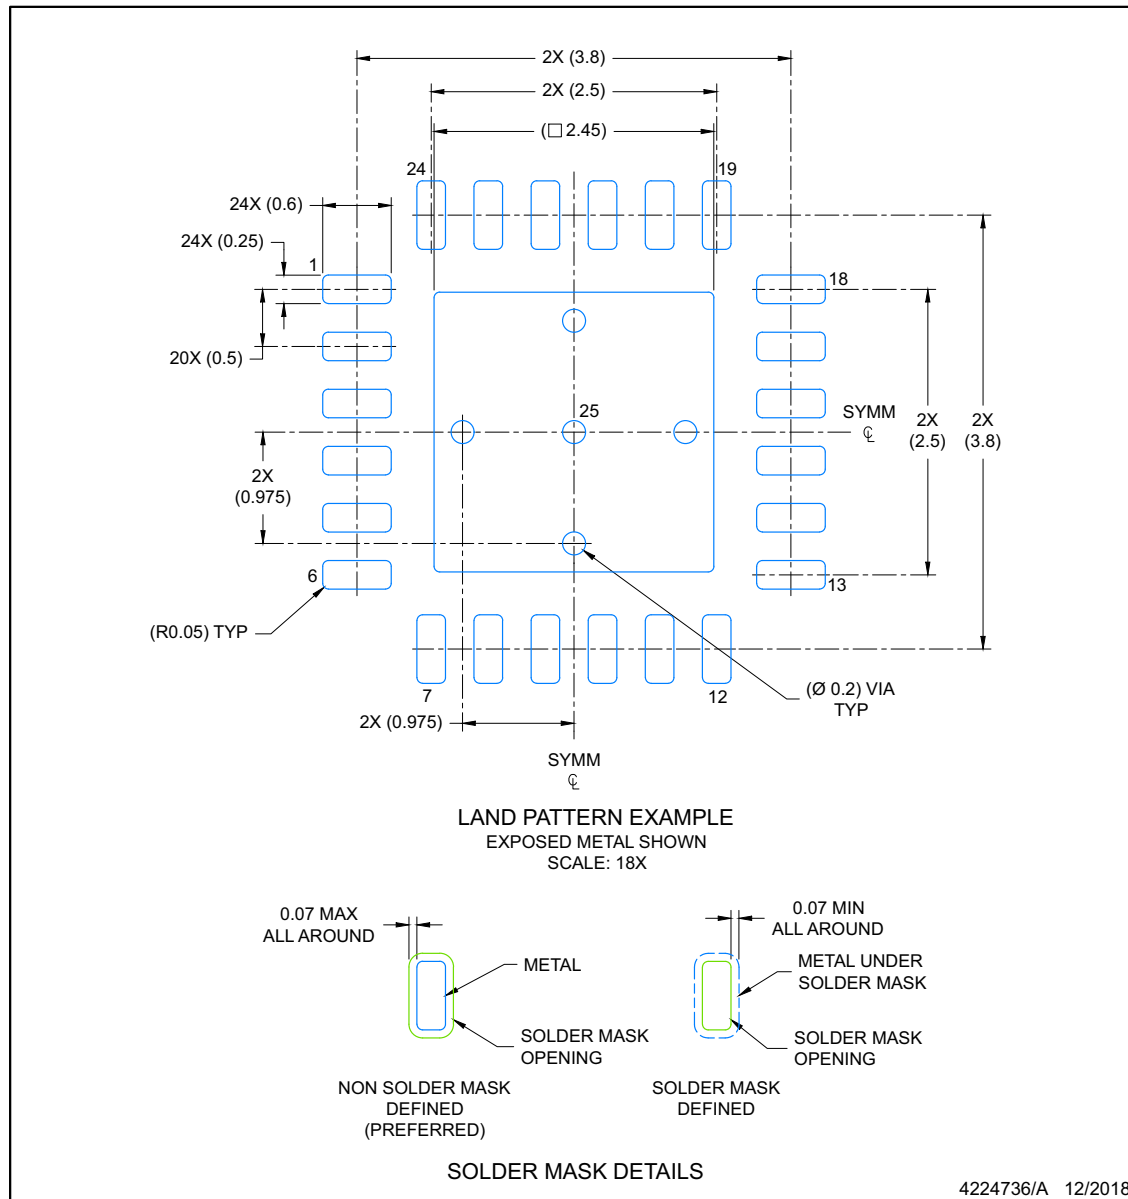

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

VQFN - 1 mm max height

RGE0024N


PLASTIC QUAD FLATPACK-NO LEAD

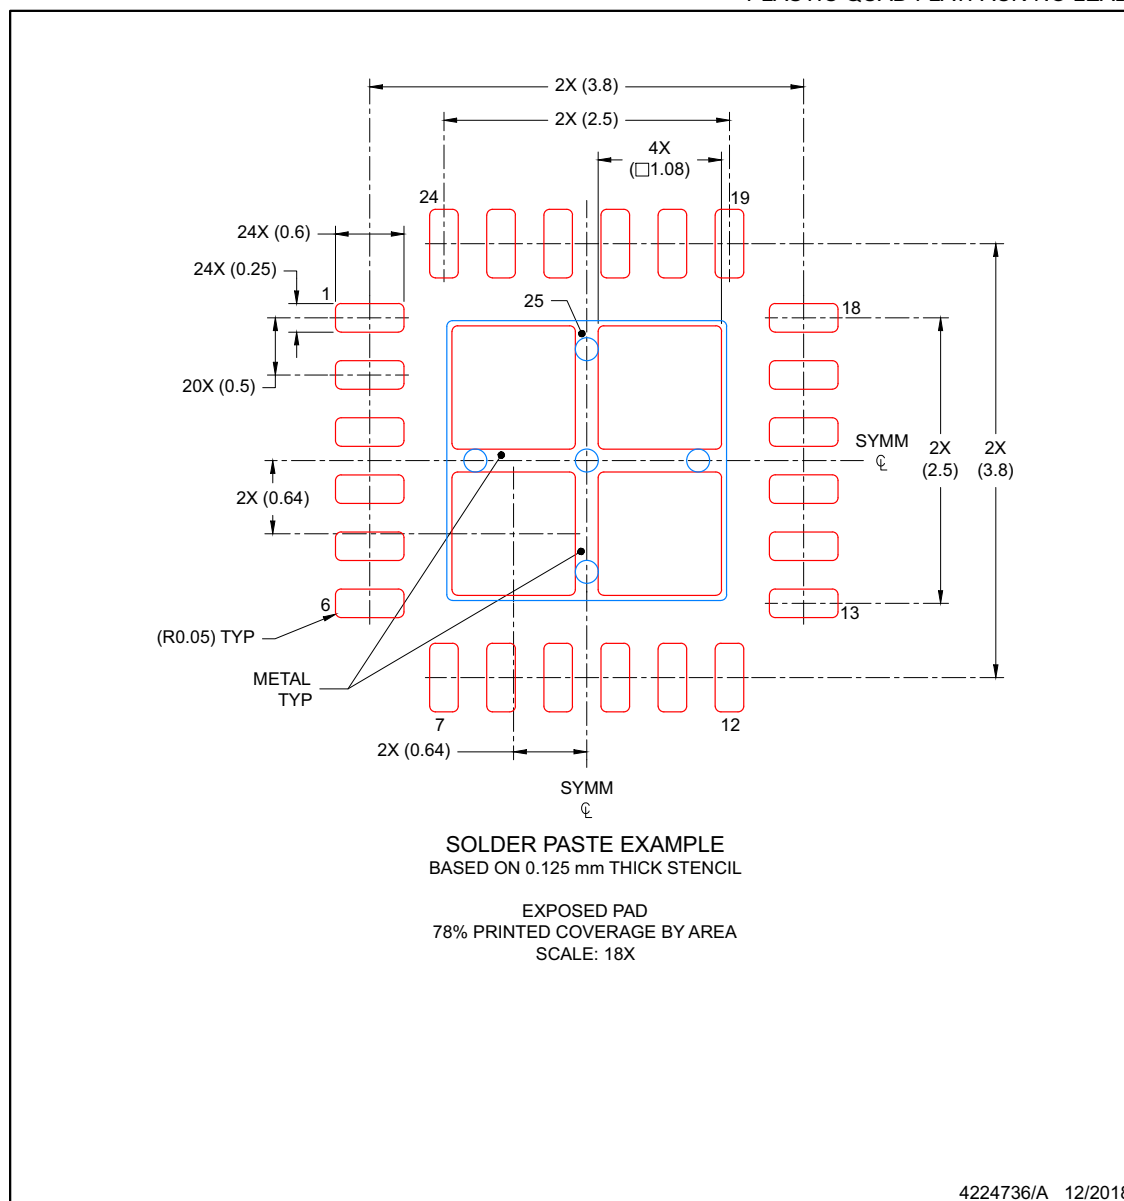


NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

11.2 Tape and Reel Information

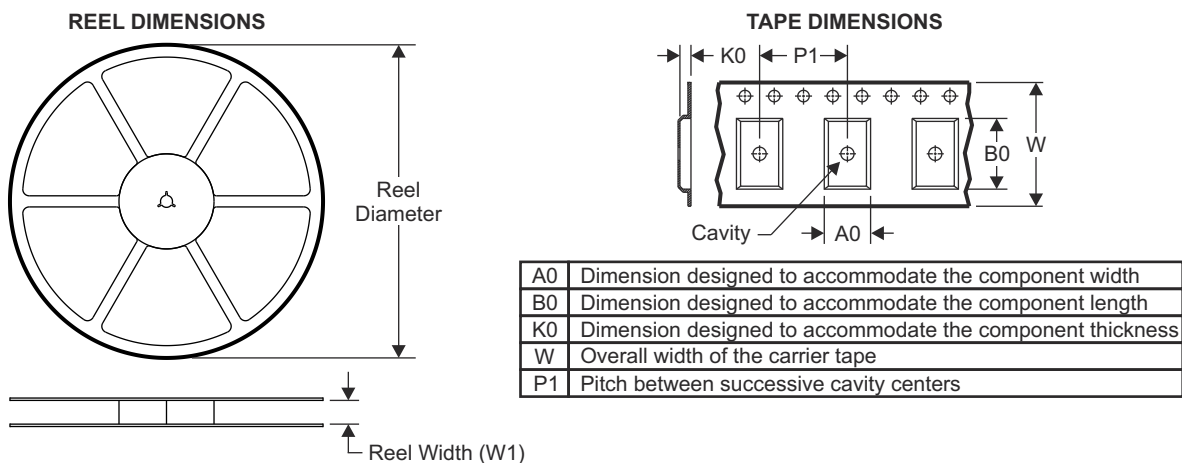


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

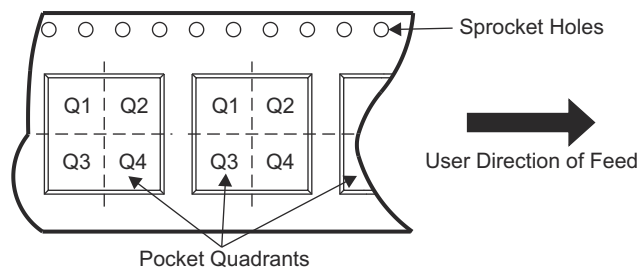

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65131TRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
TPS65131WTRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

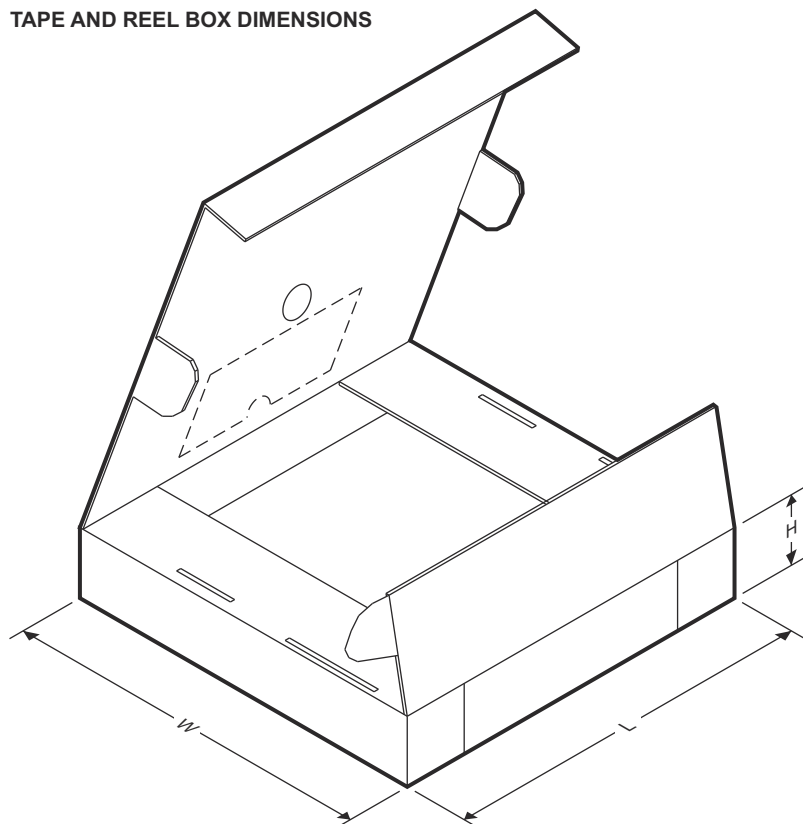

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS65131TRGERQ1	VQFN	RGE	24	3000	356.0	356.0	35.0
TPS65131WTRGERQ1	VQFN	RGE	24	3000	360.0	360.0	36.0

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS65131TRGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 105	2U65131 Q1
TPS65131TRGERQ1.A	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 105	2U65131 Q1
TPS65131WTRGERQ1	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	65131W Q1
TPS65131WTRGERQ1.A	Active	Production	VQFN (RGE) 24	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	65131W Q1

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


OTHER QUALIFIED VERSIONS OF TPS65131-Q1 :

- Catalog : [TPS65131](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product


TAPE AND REEL INFORMATION

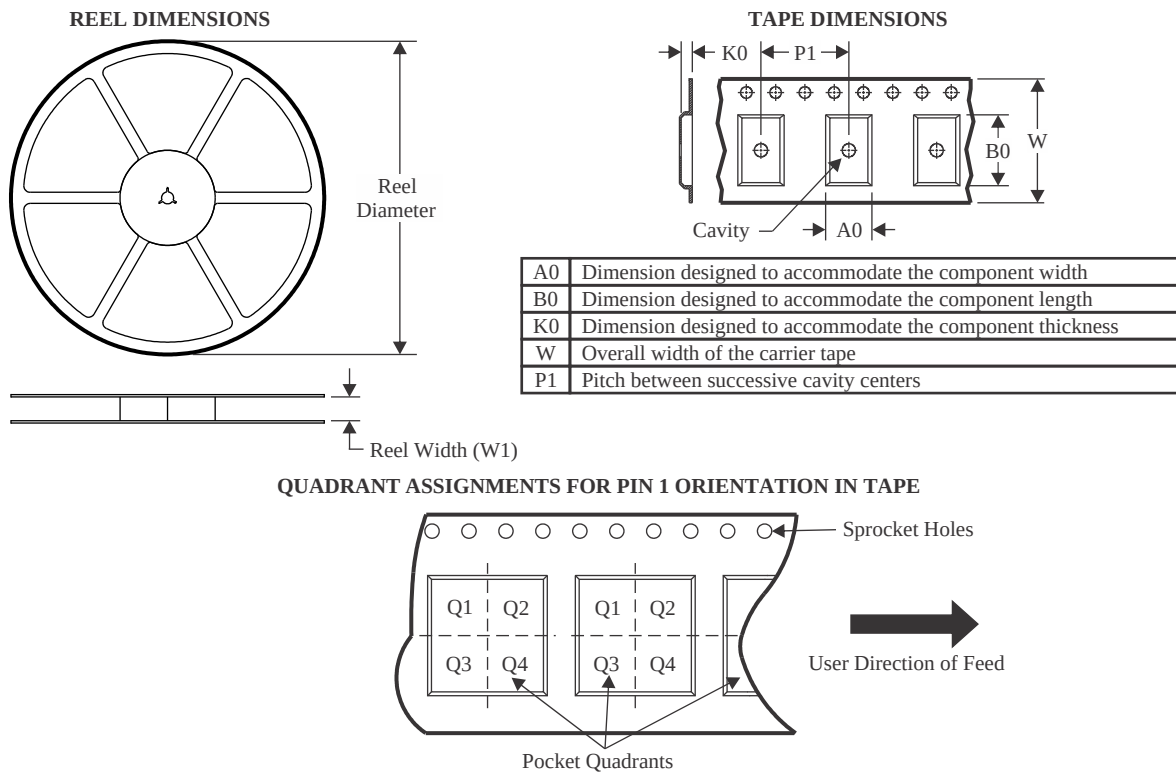

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65131TRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
TPS65131WTRGERQ1	VQFN	RGE	24	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

TAPE AND REEL BOX DIMENSIONS

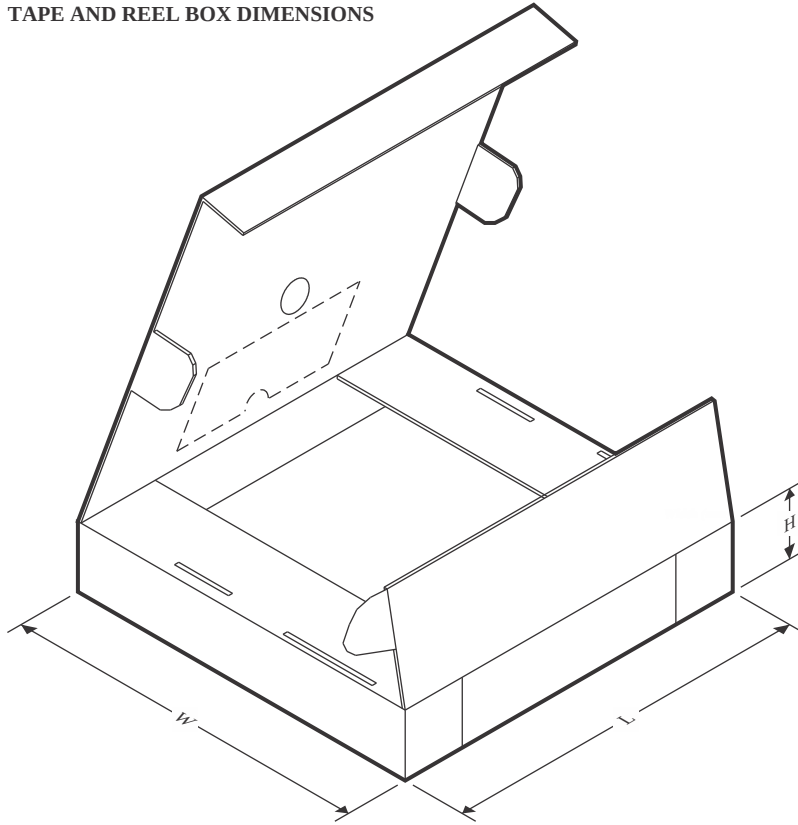

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS65131TRGERQ1	VQFN	RGE	24	3000	353.0	353.0	32.0
TPS65131WTRGERQ1	VQFN	RGE	24	3000	360.0	360.0	36.0

RGE 24

GENERIC PACKAGE VIEW



VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

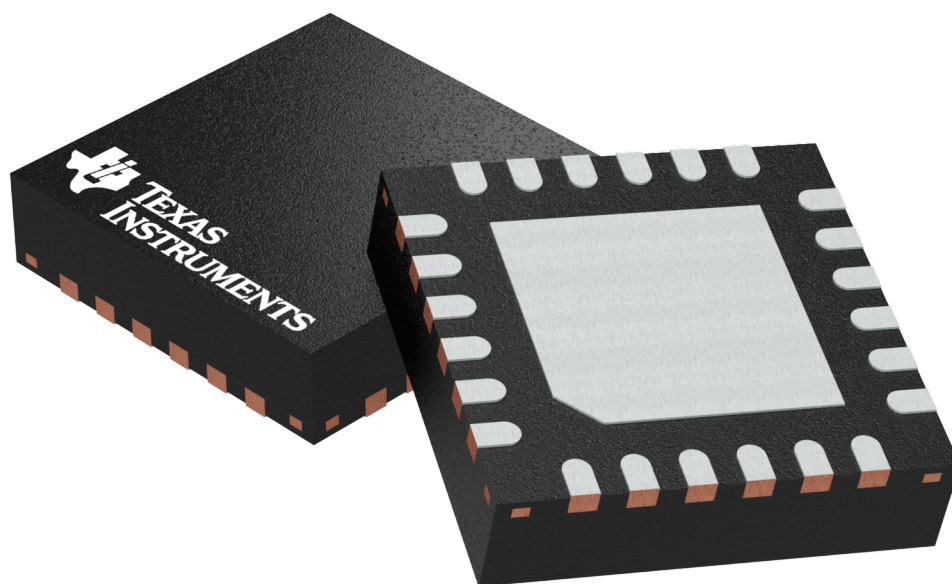

Images above are just a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

4204104/H

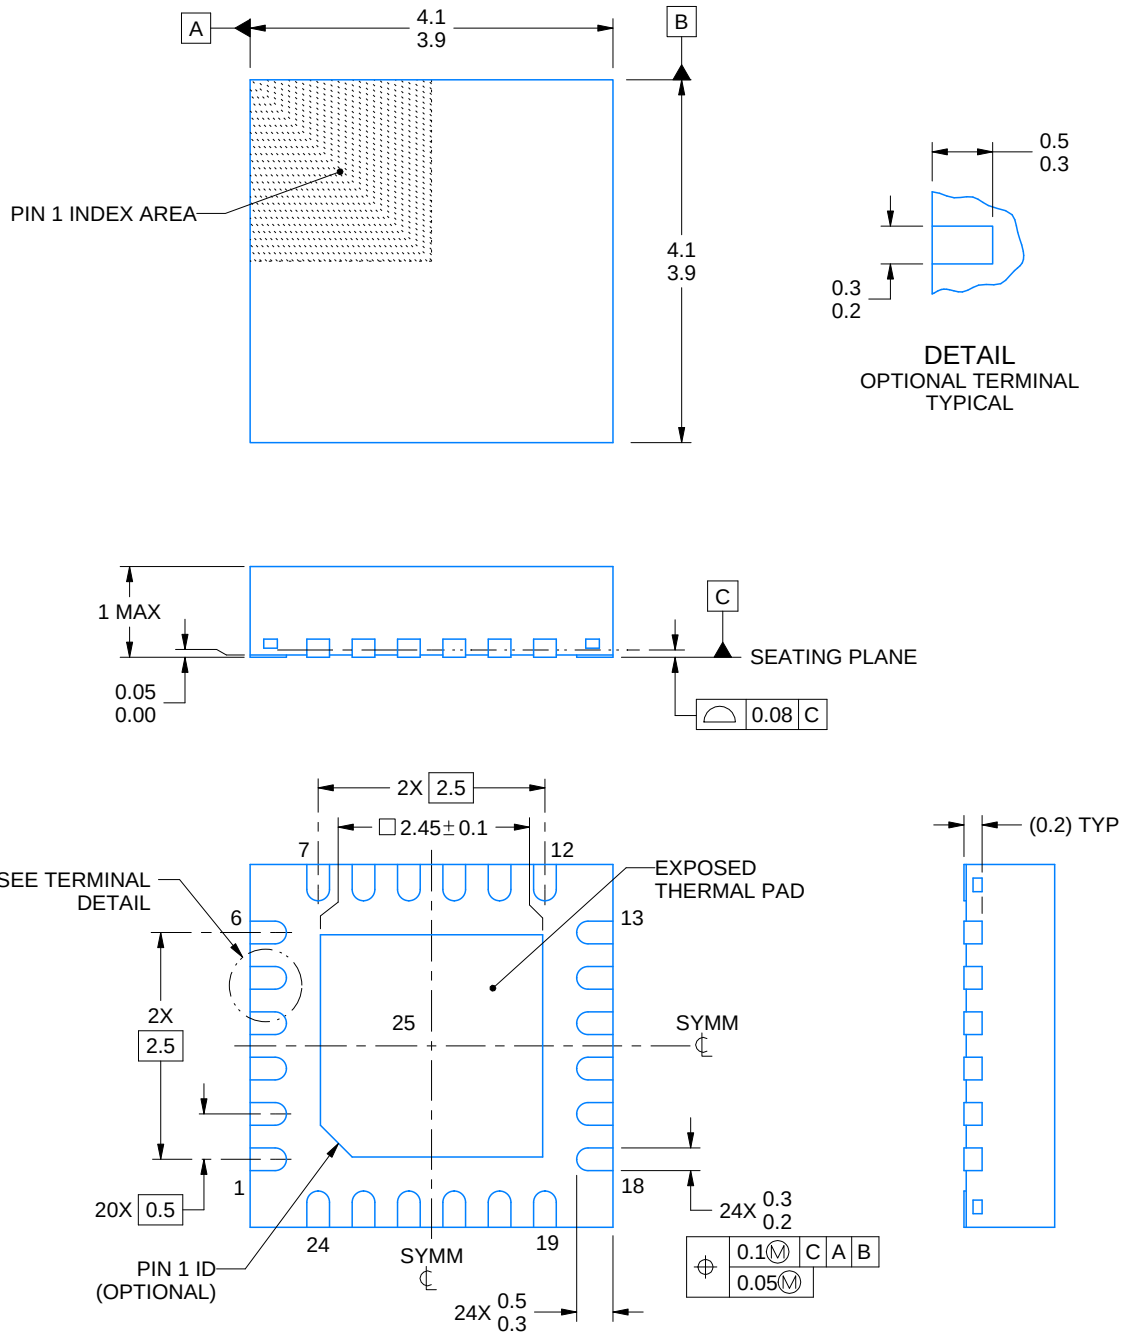

4219013/A 05/2017


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


RGE0024B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

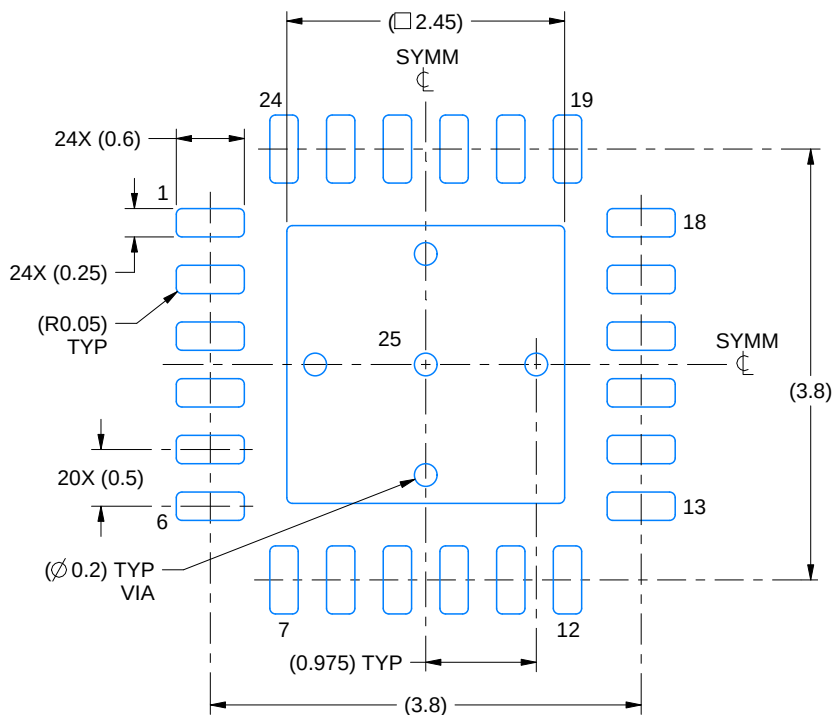

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

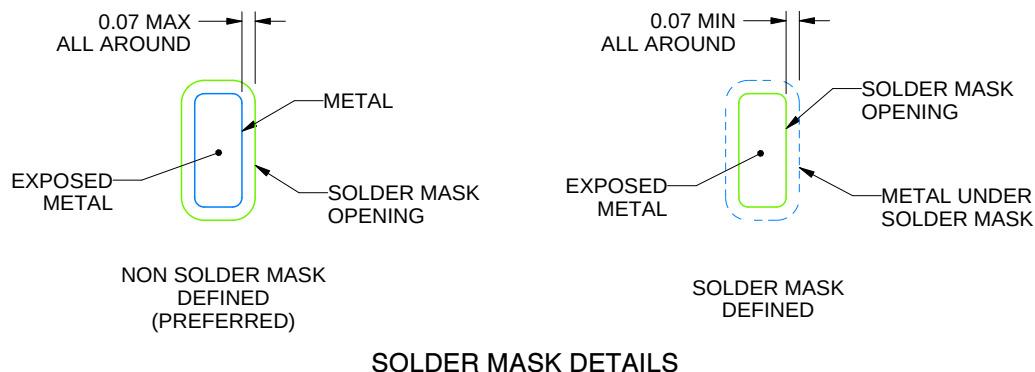

4219013/A 05/2017


NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

RGE0024B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

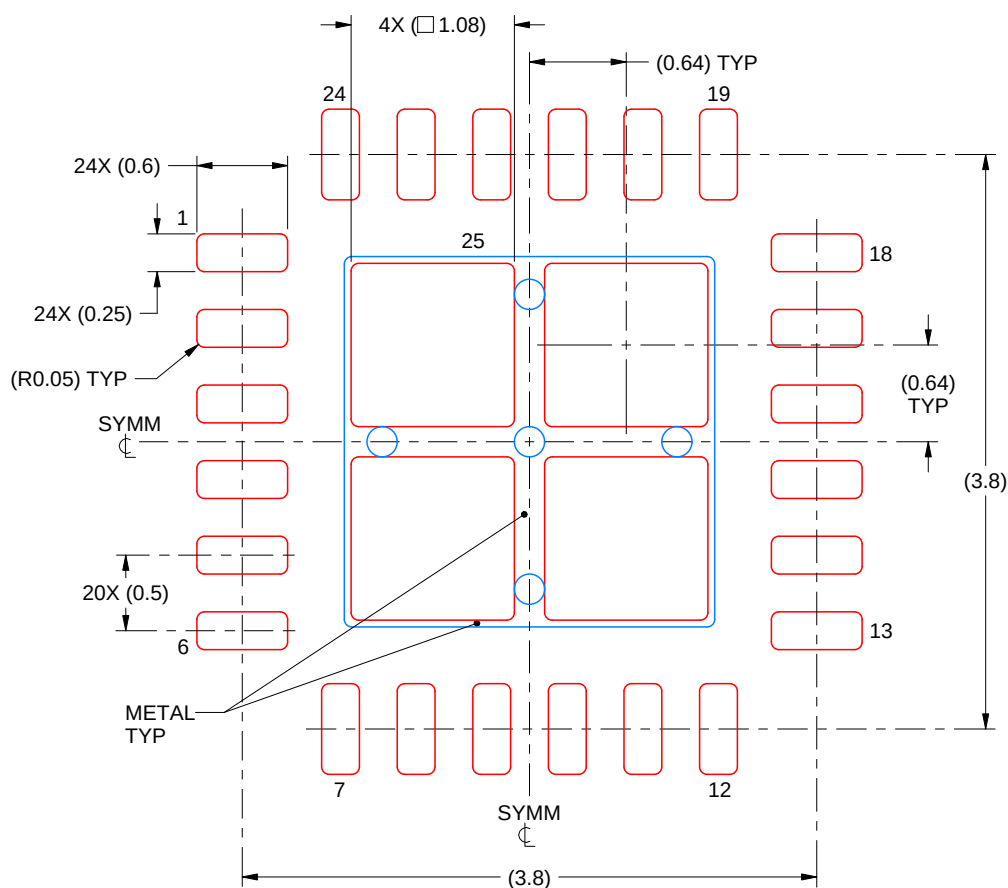


SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 25
78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:20X

4219013/A 05/2017

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

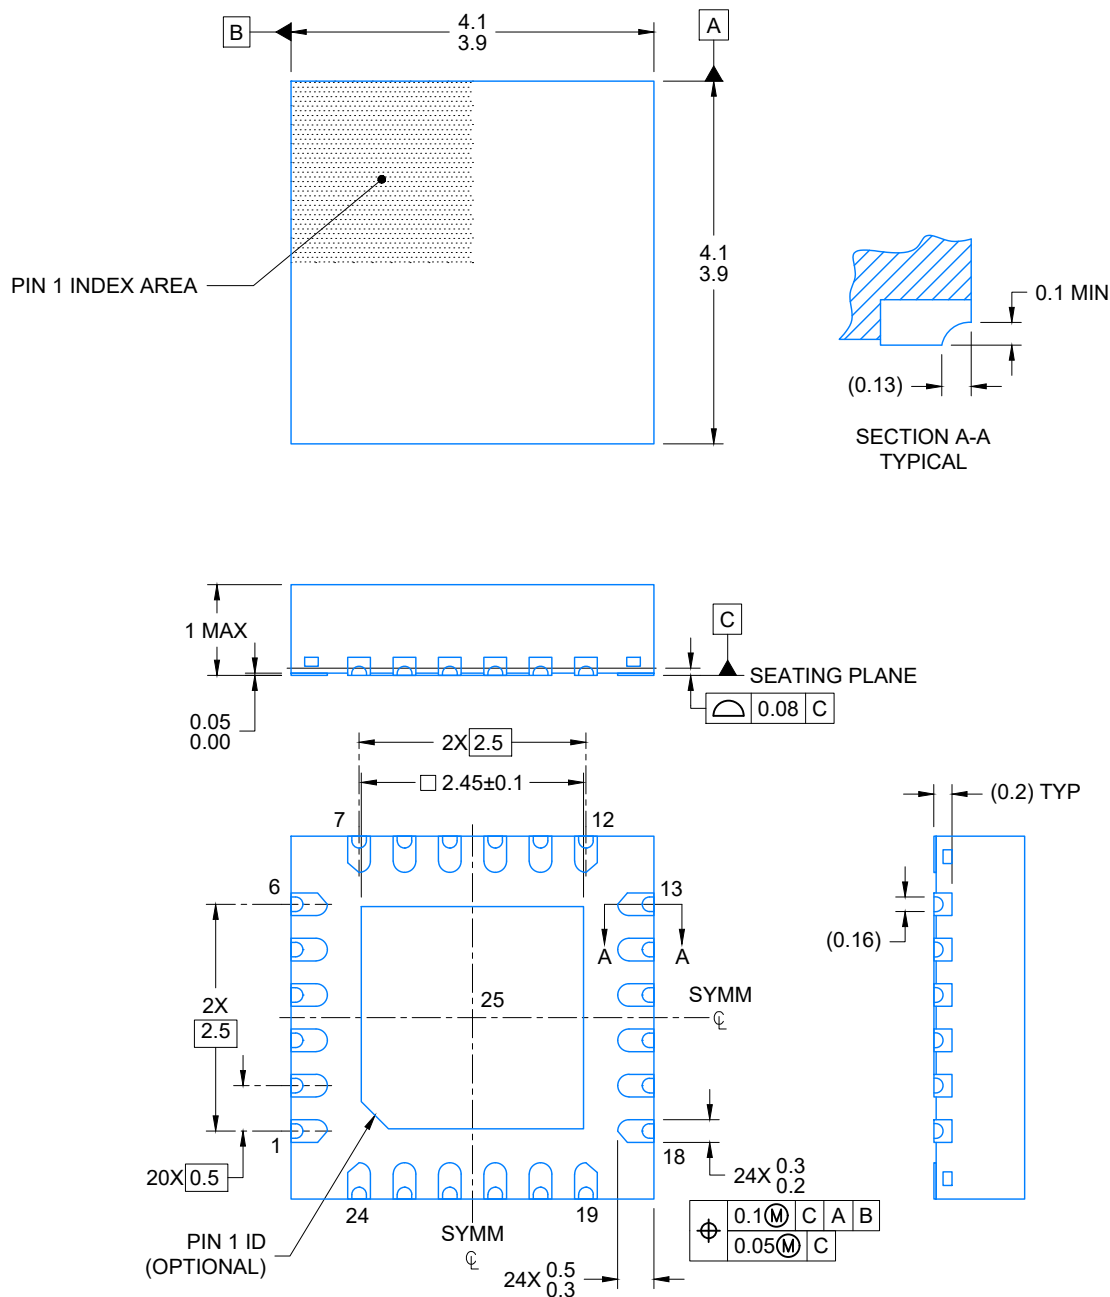

4224736/A 12/2018

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

VQFN - 1 mm max height

24X (3.8)

2X (2.5)

(□ 2.45)

24

19

24X (0.6)

24X (0.25)

1

20X (0.5)

18

2X (0.975)

2X (2.5)

2X (3.8)

SYMM

25

13

6

(R0.05) TYP

7

12

2X (0.975)

(Ø 0.2) VIA TYP

SYMM

The diagram compares two PCB manufacturing methods:

- NON SOLDER MASK DEFINED (PREFERRED):** This method shows a rectangular opening in the solder mask. The opening is defined by a blue line, and the surrounding area is filled with green, representing the metal. A dimension line indicates a maximum clearance of 0.07 mm all around the opening. Labels include "0.07 MAX ALL AROUND", "METAL", and "SOLDER MASK OPENING".
- SOLDER MASK DEFINED:** This method shows a rectangular opening in the solder mask. The opening is defined by a green line, and the surrounding area is filled with blue, representing the metal. A dimension line indicates a minimum clearance of 0.07 mm all around the opening. Labels include "0.07 MIN ALL AROUND", "METAL UNDER SOLDER MASK", and "SOLDER MASK OPENING".

4224736/A 12/2018


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGE0024N

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK-NO LEAD

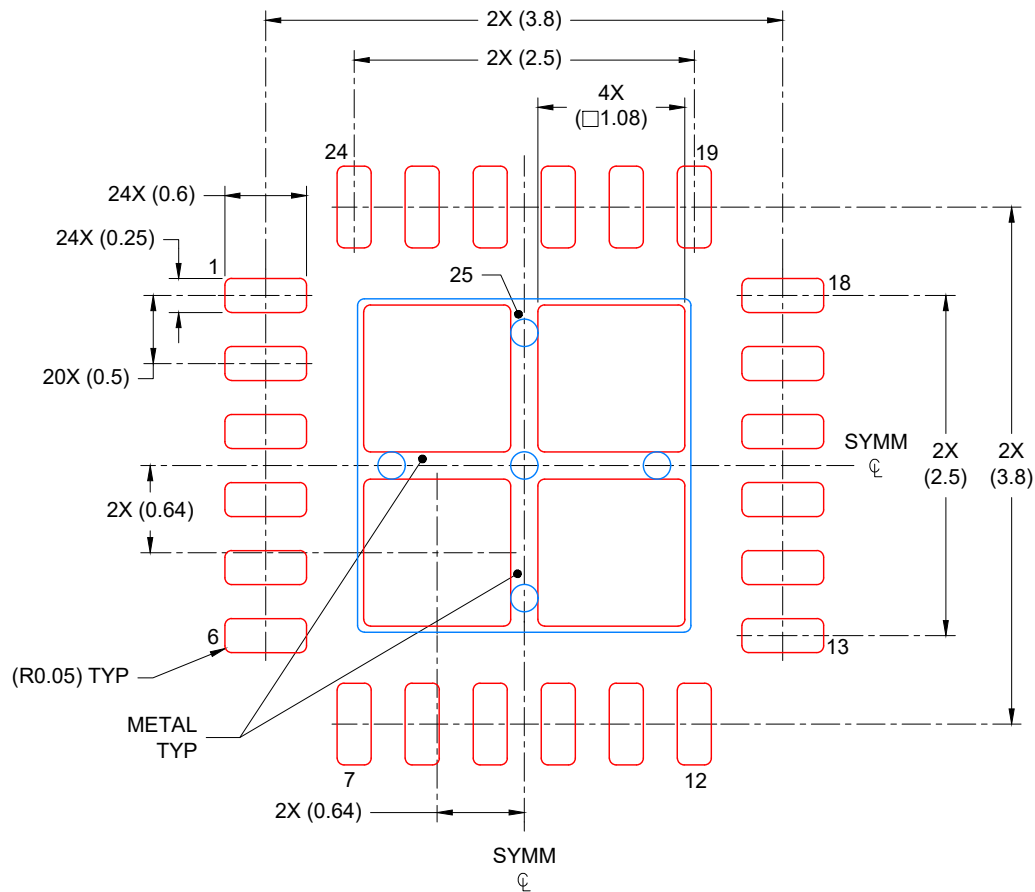

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
78% PRINTED COVERAGE BY AREA
SCALE: 18X

4224736/A 12/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司