



## TPS65631 双输出有源矩阵有机发光二极管 (AMOLED) 显示屏电源

### 1 特性

- 2.9V 至 4.5V 输入电压范围
- 4.6V 固定正输出电压
- 25°C 至 85°C 温度范围内， $V_{POS}$  精度 0.5%
- 单独的  $V_{POS}$  输出感测引脚
- -1.4V 至 -4.4V 的数字可编程负输出电压（缺省值 -4V）
- 支持的输出电流高达 250mA
- 出色的线路瞬态稳压
- 短路保护功能
- 热关断
- 采用 3.00mm x 3.00mm 12 引脚四方扁平无引线 (QFN) 封装

### 2 应用范围

AMOLED 显示屏

### 3 说明


TPS65631 被设计用于驱动需要正负电源轨的 AMOLED（有源矩阵有机发光二极管）显示屏。此器件集成了一个针对  $V_{POS}$  的升压转换器和一个针对  $V_{NEG}$  的反相降压升压转换器，非常适合于电池供电类产品。数字控制引脚 (CTRL) 允许用数字步长设定负输出电压。TPS65631 使用能够实现出色线路瞬态性能的创新技术。

#### 器件信息<sup>(1)</sup>


产品型号	封装	封装尺寸（标称值）
TPS65631	QFN (12)	3.00mm x 3.00mm

(1) 要了解所有可用封装，请见数据表末尾的可订购产品附录。

### 4 简化电路原理图

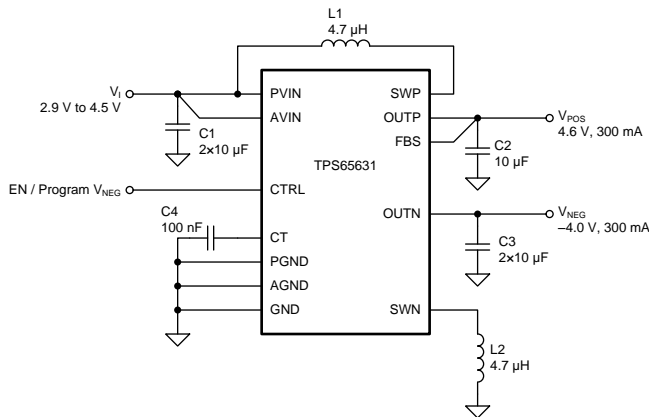

效率与输出电流间的关系

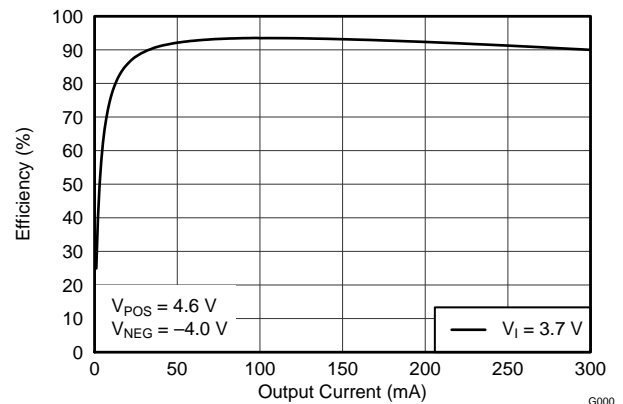

G000





## 目录

<b>1</b>	<b>特性</b> .....	<b>1</b>	8.2	Functional Block Diagram .....	<b>8</b>
<b>2</b>	<b>应用范围</b> .....	<b>1</b>	8.3	Feature Description .....	<b>8</b>
<b>3</b>	<b>说明</b> .....	<b>1</b>	8.4	Device Functional Modes .....	<b>12</b>
<b>4</b>	<b>简化电路原理图</b> .....	<b>1</b>	<b>9</b>	<b>Applications and Implementation</b> .....	<b>12</b>
<b>5</b>	<b>修订历史记录</b> .....	<b>2</b>	9.1	Application Information .....	<b>12</b>
<b>6</b>	<b>Pin Configuration and Functions</b> .....	<b>3</b>	9.2	Typical Application .....	<b>12</b>
<b>7</b>	<b>Specifications</b> .....	<b>4</b>	<b>10</b>	<b>Power Supply Recommendations</b> .....	<b>16</b>
7.1	Absolute Maximum Ratings .....	<b>4</b>	<b>11</b>	<b>Layout</b> .....	<b>17</b>
7.2	Handling Ratings .....	<b>4</b>	11.1	Layout Guidelines .....	<b>17</b>
7.3	Recommended Operating Conditions .....	<b>4</b>	11.2	Layout Example .....	<b>17</b>
7.4	Thermal Information .....	<b>4</b>	<b>12</b>	<b>器件和文档支持</b> .....	<b>18</b>
7.5	Electrical Characteristics .....	<b>5</b>	12.1	器件支持 .....	<b>18</b>
7.6	Timing Requirements .....	<b>6</b>	12.2	Trademarks .....	<b>18</b>
7.7	Typical Characteristics .....	<b>7</b>	12.3	Electrostatic Discharge Caution .....	<b>18</b>
<b>8</b>	<b>Detailed Description</b> .....	<b>8</b>	12.4	Glossary .....	<b>18</b>
8.1	Overview .....	<b>8</b>	<b>13</b>	<b>机械封装和可订购信息</b> .....	<b>18</b>

## 5 修订历史记录

日期	修订版本	注释
2014 年 5 月	E	没有针对修订版本 E 的之前修订历史记录 - 首次公开发布

## 6 Pin Configuration and Functions

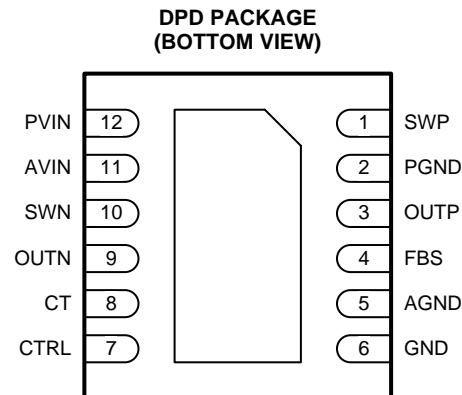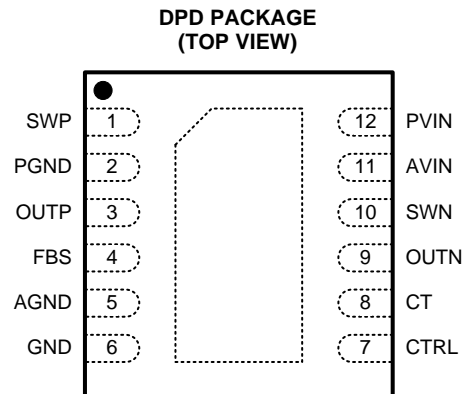

### Pin Functions

NAME	NO.	I/O	DESCRIPTION
AGND	5	—	Analog ground.
AVIN	11	—	Input supply voltage for internal analog circuits (both converters).
CT	8	I/O	Timing capacitor pin. Connect a capacitor between this pin and ground to control the time it takes for the output of the inverting buck-boost converter to ramp from one value of $V_{NEG}$ to another.
CTRL	7	I	Control pin. Combined device enable and inverting buck-boost converter output voltage programming pin.
FBS	4	I	Feedback sense pin of the boost converter output voltage.
GND	6	—	Ground. (Note: it is possible to leave this pin floating without affecting device performance.)
PGND	2	—	Power ground of the boost converter.
PVIN	12	—	Input supply voltage pin for the inverting buck-boost converter.
SWN	10	O	Switch pin of the inverting buck-boost converter.
SWP	1	O	Switch pin of the boost converter.
OUTN	9	O	Rectifier pin of the inverting buck-boost converter.
OUTP	3	O	Rectifier pin of the boost converter.
Exposed Thermal Pad	13	—	Connect this pad to AGND and PGND.

## 7 Specifications

### 7.1 Absolute Maximum Ratings <sup>(1)</sup>

 over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

		MIN	MAX	UNIT
Input voltage <sup>(2)</sup>	SWP, OUTP, FBS, PVIN, AVIN	–0.3	6	V
	OUTN	–0.3	–6	V
	SWN	–6	6	V
	CTRL	–0.3	5.5	V
	CT	–0.3	3.6	V
Operating junction temperature range, T <sub>J</sub>		–40	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) With respect to GND pin.

### 7.2 Handling Ratings

			MIN	MAX	UNIT
T <sub>STG</sub>	Storage temperature range		−65	150	°C
V <sub>ESD</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	−2	2	kV
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup>	−500	500	V
		Machine model (MM) ESD stress voltage	−200	200	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process..

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

PARAMETER		MIN	NOM	MAX	UNIT
V <sub>I</sub>	Input supply voltage range	2.9	3.7	4.5	V
V <sub>O</sub>	Output voltage range	V <sub>POS</sub>		4.6	V
		V <sub>NEG</sub>		–4.4 –4 –1.4	
I <sub>O</sub>	Output current range	I <sub>POS</sub>		300	mA
		I <sub>NEG</sub>		300	
T <sub>A</sub>	Operating ambient temperature	–40	25	85	°C
T <sub>J</sub>	Operating junction temperature	–40	85	125	°C

### 7.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		PD	UNIT
		12 PINS	
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	51.5	°C/W
R <sub>θJctop</sub>	Junction-to-case (top) thermal resistance	47.1	
R <sub>θJB</sub>	Junction-to-board thermal resistance	25.0	
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	0.5	
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	25.2	
R <sub>θJcbot</sub>	Junction-to-case (bottom) thermal resistance	4.4	

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

$V_I = 3.7\text{ V}$ ,  $V_{(CTRL)} = 3.7\text{ V}$ ,  $V_{POS} = 4.6\text{ V}$ ,  $V_{NEG} = -4.0\text{ V}$ ,  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , typical values are at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY						
I <sub>I</sub>	Shutdown current into AVIN and PVIN	CTRL pin connected to ground.	0.1			μA
V <sub>UVLO</sub>	Undervoltage lockout threshold	V <sub>I</sub> rising.	2.4			V
		V <sub>I</sub> falling.	2.1			
BOOST CONVERTER						
V <sub>O</sub>	Output voltage		4.6			V
	Output voltage tolerance	25°C ≤ T <sub>A</sub> ≤ 85°C, no load	−0.5%	0.5%		
		−40°C ≤ T <sub>A</sub> < 85°C, no load	−0.8%	0.8%		
r <sub>DS(ON)</sub>	Switch (low-side) on-resistance	I <sub>(SWP)</sub> = 200 mA	200			mΩ
	Rectifier (high-side) on-resistance	I <sub>(SWP)</sub> = 200 mA	350			
	Switching frequency	I <sub>O</sub> = 200 mA	1.7			MHz
	Switch current limit	Inductor valley current	0.8	1	A	
	Short-circuit threshold voltage in operation	V <sub>O</sub> falling	4.1			V
	Short-circuit detection time during operation		3			ms
	Output sense threshold voltage using OUTP	V <sub>(OUTP)</sub> - V <sub>(FBS)</sub> increasing	300			mV
	Output sense threshold voltage using FBS	V <sub>(OUTP)</sub> - V <sub>(FBS)</sub> decreasing	200			mV
	Input resistance of FBS	Between FBS pin and ground	4			MΩ
	Discharge resistance	CTRL pin connected to ground, I <sub>O</sub> = 1 mA	30			Ω
	Line regulation	I <sub>O</sub> = 200 mA	0.002			%/V
	Load regulation		0.01			%/A
INVERTING BUCK-BOOST CONVERTER						
V <sub>O</sub>	Output voltage default		−4.0			V
	Output voltage range		−4.4	−1.4		
	Output voltage tolerance		−0.05	0.05		
r <sub>DS(ON)</sub>	Switch (high-side) on-resistance	I <sub>(SWN)</sub> = 200 mA	200			mΩ
	Rectifier (low-side) on-resistance	I <sub>(SWN)</sub> = 200 mA	300			
	Switching frequency	I <sub>O</sub> = 10 mA	1.7			MHz
	Switch current limit	V <sub>I</sub> = 2.9 V	1.5	2.2	A	
	Short-circuit threshold voltage during operation	Voltage drop from nominal V <sub>O</sub>	500			mV
	Short-circuit threshold voltage during start-up		180	200	230	
t <sub>SCP</sub>	Short-circuit detection time during start-up		10			ms
	Short-circuit detection time during operation		3			ms
	Discharge resistance	CTRL pin connected to ground, I <sub>O</sub> = 1 mA	150			Ω
	Line regulation	I <sub>O</sub> = 200 mA	0.006			%/V
	Load regulation		0.31			%/A
CTRL						
	High-level threshold voltage		1.2			V
	Low-level threshold voltage		0.4			V

## Electrical Characteristics (continued)

$V_I = 3.7\text{ V}$ ,  $V_{(CTRL)} = 3.7\text{ V}$ ,  $V_{POS} = 4.6\text{ V}$ ,  $V_{NEG} = -4.0\text{ V}$ ,  $T_J = -40^\circ\text{C}$  to  $125^\circ\text{C}$ , typical values are at  $T_A = 25^\circ\text{C}$  (unless otherwise noted)


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
	Pull-down resistance		150	400	860	k $\Omega$
<b>OTHER</b>						
$R_{(CT)}$	CT pin output resistance		150	300	500	k $\Omega$
$t_{INIT}$	Initialization time			300	400	$\mu\text{s}$
$t_{OFF}$	Shut-down time		30		80	$\mu\text{s}$
$t_{STORE}$	Data storage time		30		80	$\mu\text{s}$
$T_{SD}$	Thermal shutdown temperature			145		$^\circ\text{C}$

## 7.6 Timing Requirements


		MIN	TYP	MAX	UNIT
<b>CTRL Interface</b>					
$t_{HIGH}$	High-level pulse duration	2	10	25	$\mu\text{s}$
$t_{LOW}$	Low-level pulse duration	2	10	25	$\mu\text{s}$

## 7.7 Typical Characteristics


At  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

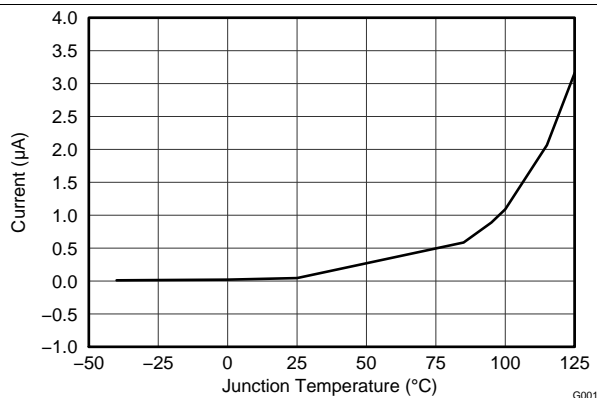


**Figure 1. Shutdown Current into AVIN and PVIN**

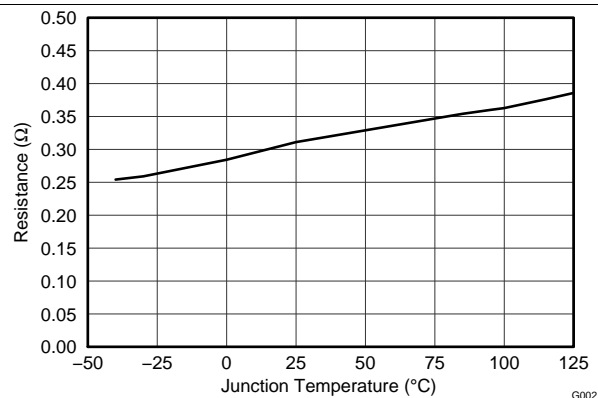


**Figure 2. Boost Converter Switch  $r_{DS(ON)}$**

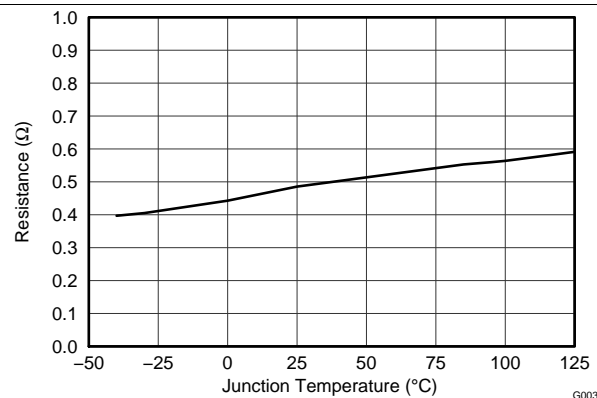

**Figure 3. Boost Converter Rectifier  $r_{DS(ON)}$**

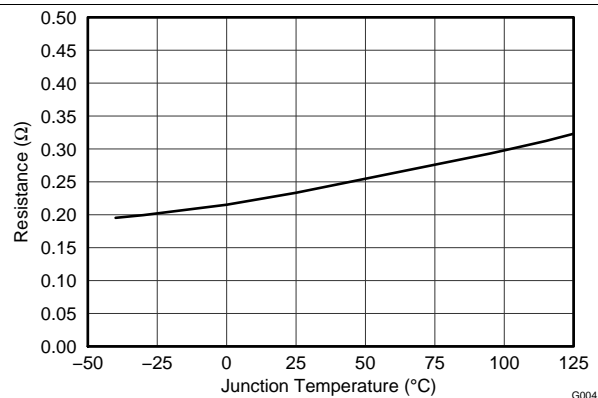

**Figure 4. Inverting Buck-Boost Converter Switch  $r_{DS(ON)}$**

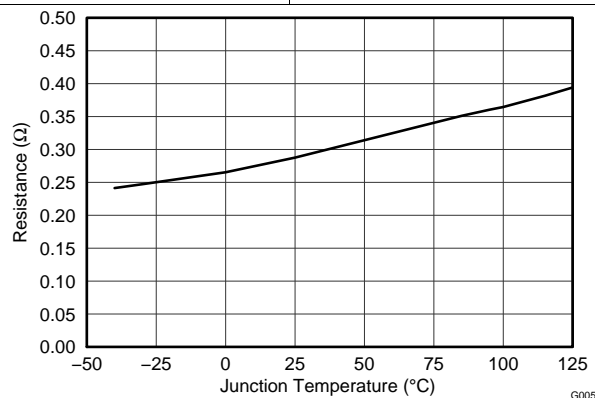


**Figure 5. Inverting Buck-Boost Converter Rectifier  $r_{DS(ON)}$**

## 8 Detailed Description

### 8.1 Overview

The TPS65631 consists of a boost converter and an inverting buck boost converter. The  $V_{POS}$  output is fixed at 4.6 V and  $V_{NEG}$  output is programmable via a digital interface in the range of -1.4 V ~ -4.4 V, the default is -4 V. The transition time of  $V_{NEG}$  output is adjustable by the CT pin capacitor.

### 8.2 Functional Block Diagram

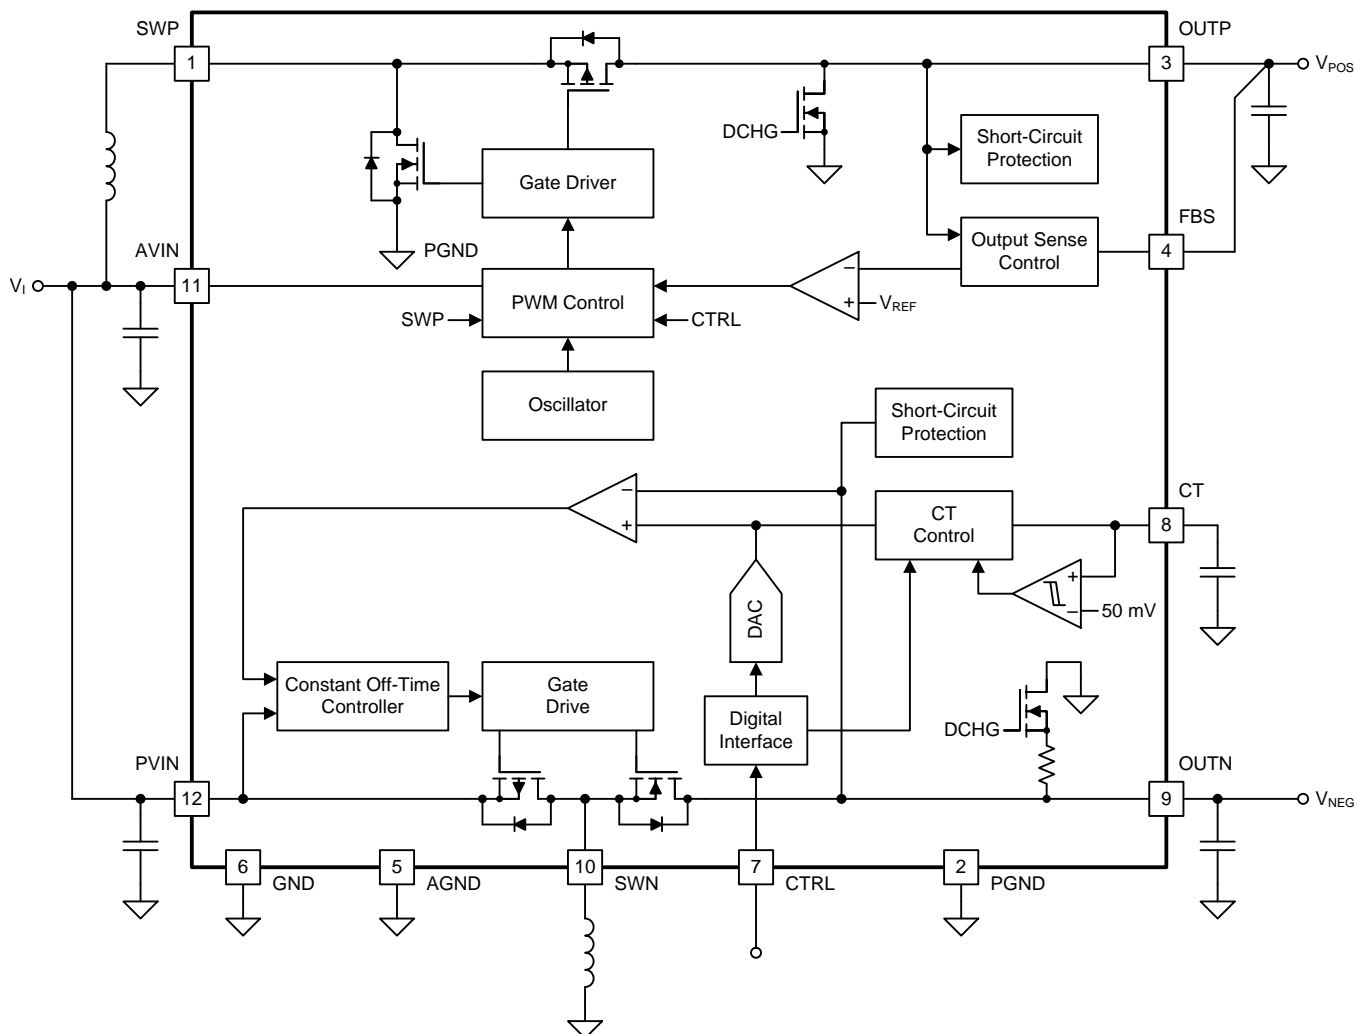

### 8.3 Feature Description

#### 8.3.1 Boost Converter

The boost converter uses a fixed-frequency current-mode topology, and its output voltage ( $V_{POS}$ ) is fixed at 4.6 V. For the highest output voltage accuracy, connect the output sense pin (FBS) directly to the positive pin of the output capacitor. If not used, the FBS pin can be left floating or connected to ground. If the FBS pin is not used, the boost converter senses its output voltage using the OUTP pin.




## Feature Description (continued)

### 8.3.2 Inverting Buck-Boost Converter

The inverting buck-boost converter uses a constant-off-time peak-current mode topology. The converter's default output voltage ( $V_{NEG}$ ) is  $-4\text{ V}$ , but it can be programmed to any voltage in the range  $-1.4\text{ V}$  to  $-4.4\text{ V}$  (see [Programming  \$V\_{NEG}\$](#) ).

#### 8.3.2.1 Programming $V_{NEG}$

The output voltage of the inverting buck-boost converter ( $V_{NEG}$ ) can be programmed using the CTRL pin. If output voltage programming is not required, the CTRL pin can be used as a standard enable pin (see [Enable \(CTRL\)](#)).

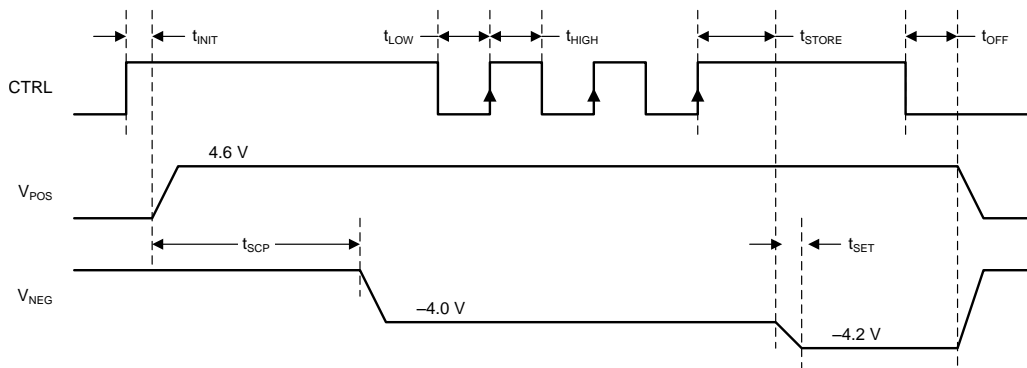

**Figure 6. Programming  $V_{NEG}$  Using the CTRL Pin**

When the CTRL pin is pulled high, the inverting buck-boost converter starts up with its default voltage of  $-4\text{ V}$ . The device now counts the rising edges applied to the CTRL pin and sets the output voltage ( $V_{NEG}$ ) according to [Table 1](#). For the timing diagram shown in [Figure 6](#),  $V_{NEG}$  is programmed to  $-4.2\text{ V}$ , since three rising edges are detected.

The CTRL interface is designed to work with pulses whose duration is between  $2\text{ }\mu\text{s}$  and  $25\text{ }\mu\text{s}$ . Pulses shorter than  $2\text{ }\mu\text{s}$  or longer than  $25\text{ }\mu\text{s}$  are not ensured to be recognized.

**Table 1. Programming Table for  $V_{NEG}$**

Number of Rising Edges	$V_{NEG}$	Number of Rising Edges	$V_{NEG}$
0 / no pulses	$-4\text{ V}$	16	$-2.9\text{ V}$
1	$-4.4\text{ V}$	17	$-2.8\text{ V}$
2	$-4.3\text{ V}$	18	$-2.7\text{ V}$
3	$-4.2\text{ V}$	19	$-2.6\text{ V}$
4	$-4.1\text{ V}$	20	$-2.5\text{ V}$
5	$-4.0\text{ V}$	21	$-2.4\text{ V}$
6	$-3.9\text{ V}$	22	$-2.3\text{ V}$
7	$-3.8\text{ V}$	23	$-2.2\text{ V}$
8	$-3.7\text{ V}$	24	$-2.1\text{ V}$
9	$-3.6\text{ V}$	25	$-2.0\text{ V}$
10	$-3.5\text{ V}$	26	$-1.9\text{ V}$
11	$-3.4\text{ V}$	27	$-1.8\text{ V}$
12	$-3.3\text{ V}$	28	$-1.7\text{ V}$
13	$-3.2\text{ V}$	29	$-1.6\text{ V}$
14	$-3.1\text{ V}$	30	$-1.5\text{ V}$
15	$-3.0\text{ V}$	31	$-1.4\text{ V}$

### 8.3.2.2 Controlling the $V_{NEG}$ Transition Time


The transition time ( $t_{set}$ ) is the time required to move  $V_{NEG}$  from one voltage level to the next. Users can control the transition time by connecting a capacitor between the CT pin and ground. When the CT pin is left open or is connected to ground, the transition time is as short as possible. When a capacitor is connected to the CT pin, the transition time is determined by the time constant ( $\tau$ ) of the external capacitor ( $C_{(CT)}$ ) and the internal resistance of the CT pin ( $R_{(CT)}$ ). The output voltage  $V_{NEG}$  reaches 70% of its programmed value after  $1\tau$ .

An example is given below for the case when using 100 nF for  $C_{(CT)}$ .

$$\tau \approx t_{set(70\%)} = R_{(CT)} \times C_{(CT)} = 300 \text{ k}\Omega \times 100 \text{ nF} = 30 \text{ ms} \quad (1)$$

The output voltage  $V_{NEG}$  reaches its programmed value after approximately  $3\tau$ .


The external capacitor connected to the CT pin has no effect on the first programming of  $V_{NEG}$ , when the inverting buck-boost converter ramps its output to the default voltage as fast as possible. Figure 7 shows the detail of programming of the  $V_{NEG}$  transition time with the CT pin during start-up.

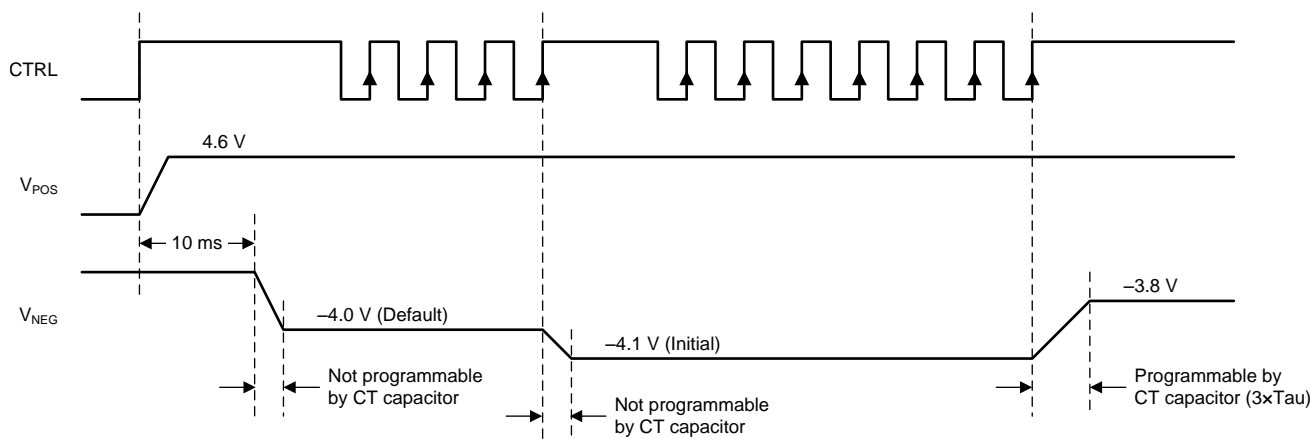

**Figure 7. Programming the Transition Time of  $V_{NEG}$**

### 8.3.3 Soft-Start and Start-Up Sequence

The TPS65631 features a soft-start function to limit inrush current. When the device is enabled by a high-level signal applied to the CTRL pin, the boost converter starts switching with a reduced switch current limit. Ten milliseconds after the CTRL pin goes high, the inverting buck-boost converter starts with a default value of  $-4 \text{ V}$ . A typical start-up sequence is shown in Figure 8.

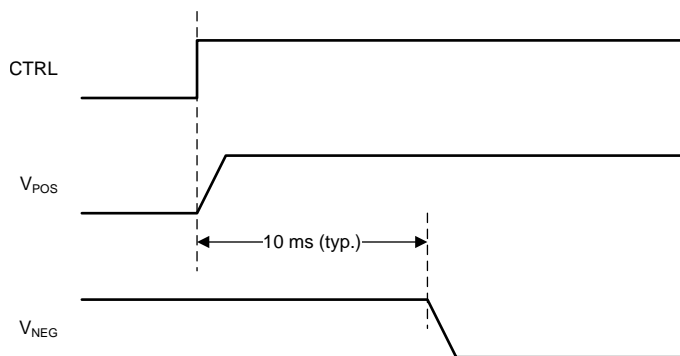

**Figure 8. Typical Start-Up Sequence**

### 8.3.4 Enable (CTRL)

The CTRL pin serves two functions. One is to enable and disable the device, and the other is to program the output voltage ( $V_{NEG}$ ) of the inverting buck-boost converter (see [Programming  \$V\_{NEG}\$](#) ). If the digital interface is not required, the CTRL pin can be used as a standard enable pin for the device, which will come up with its default value on  $V_{NEG}$  of  $-4$  V. When CTRL is pulled high, the device is enabled. The device is shut down with CTRL low.

### 8.3.5 Undervoltage Lockout

The TPS65631 features an undervoltage lockout function that disables the device when the input supply voltage is too low for normal operation.

### 8.3.6 Short Circuit Protection

The TPS65631 is protected against short-circuits of  $V_{POS}$  and  $V_{NEG}$  to ground and to each other.

#### 8.3.6.1 Short-Circuits During Normal Operation

During normal operation an error condition is detected if  $V_{POS}$  falls below 4.1 V for more than 3 ms or  $V_{NEG}$  is pulled above the programmed nominal output by 500 mV for longer than 3 ms. In either case the device enters shutdown mode: the converters are disabled and their outputs are disconnected from the input. To resume normal operation either cycle the input supply voltage or toggle the CTRL pin low and then high again.

#### 8.3.6.2 Short-Circuits During Start-Up


During start up an error condition is detected if:

- $V_{POS}$  is not in regulation 10 ms after a high-level is applied to the CTRL pin.
- $V_{NEG}$  is higher than threshold level 10 ms after a high-level is applied to the CTRL pin.
- $V_{NEG}$  is not in regulation 20 ms after a high-level is applied to the CTRL pin.

To resume normal operation either cycle the input supply voltage or toggle the CTRL pin low and then high again.

### 8.3.7 Output Discharge During Shutdown

The TPS65631 actively discharges its outputs during shutdown. [Figure 9](#) shows the output discharge control.

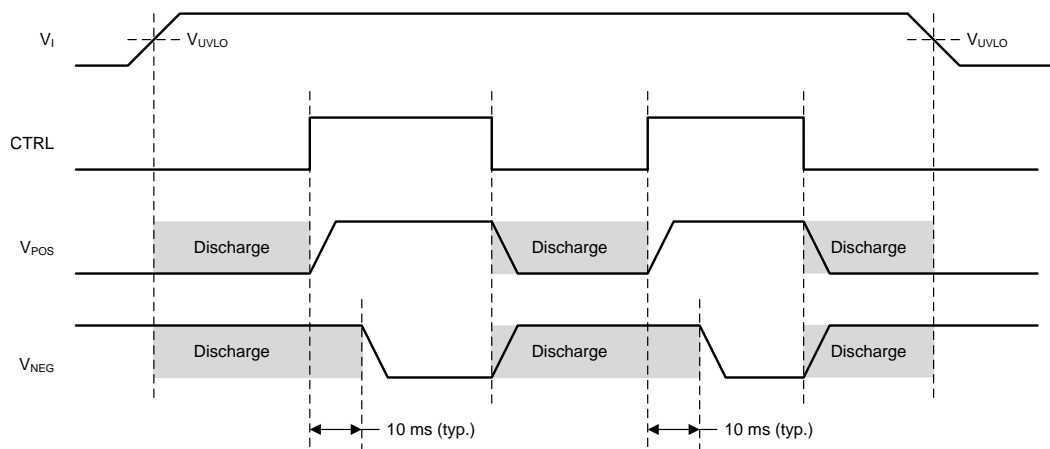

**Figure 9. Active Discharge of  $V_{POS}$  and  $V_{NEG}$  During Shutdown**

### 8.3.8 Thermal Shutdown

The TPS65631 enters thermal shutdown mode if its junction temperature exceeds  $145^{\circ}\text{C}$  (typical). During thermal shutdown mode none of the device functions are available. To resume normal operation, either cycle the input supply voltage or toggle the CTRL pin low and then high again.

## 8.4 Device Functional Modes

### 8.4.1 Operation with $V_I < 2.9\text{ V}$

The recommended minimum input supply voltage for full performance is 2.9 V. The device continues to operate with input supply voltages below 2.9 V; however, full performance is not guaranteed. The device does not operate with input supply voltages below the UVLO threshold.

### 8.4.2 Operation with $V_I \approx V_{POS}$ (Diode Mode)

The TPS65631 features a "diode" mode that enables it to regulate its output voltage even when the input supply voltage is close to  $V_{POS}$  (that is, too high for normal boost operation). When operating in diode mode the converter's high-side switch stops switching and its body diode is used as the rectifier. Boost converter efficiency is reduced when operating in diode mode. At low output currents ( $\approx 2\text{ mA}$  and below), the boost converter automatically transitions from pulse-width modulation to pulse-skip mode. This ensures that  $V_{POS}$  stays in regulation but increases the output voltage ripple on  $V_{POS}$ .

### 8.4.3 Operation with CTRL


When a low-level signal is applied to the CTRL pin the device is disabled and switching is inhibited. When the input supply voltage is above the UVLO threshold and a high-level signal is applied to the CTRL pin the device is enabled and its start-up sequence begins.

## 9 Applications and Implementation

### 9.1 Application Information

Figure 10 shows a typical application circuit suitable for supplying AMOLED displays in smartphone applications. The circuit is designed to operate from a single-cell Li-Ion battery and generates a positive output voltage  $V_{POS}$  of 4.6 V and a negative output voltage of  $-4\text{ V}$ . Both outputs are capable of supplying up to 300 mA of output current.

### 9.2 Typical Application

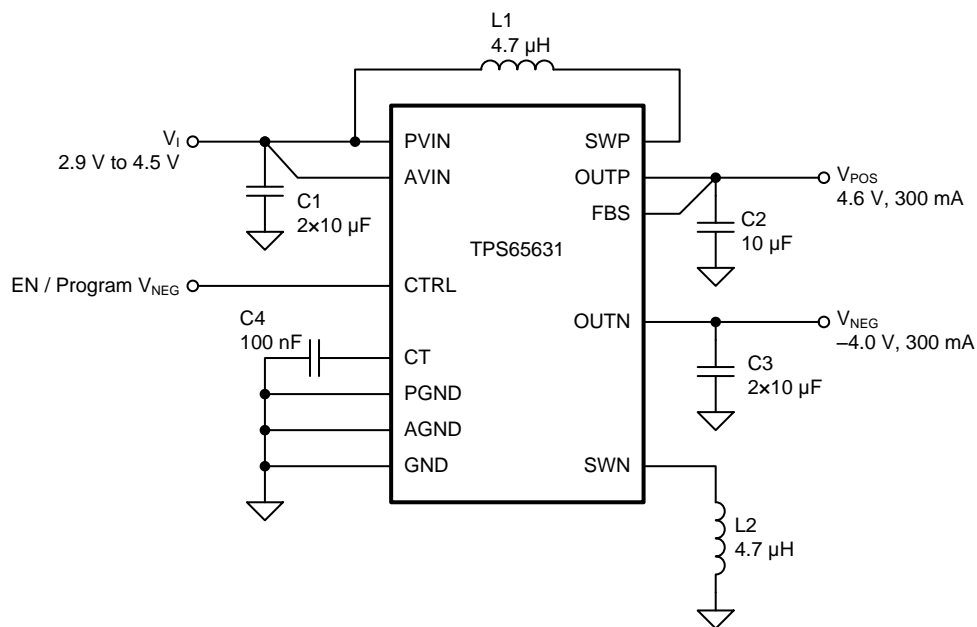

**Figure 10. Typical Application Schematic**

## Typical Application (continued)

### 9.2.1 Design Requirements

For this design example, use the following input parameters.

**Table 2. Design Parameters**

DESIGN PARAMETER	EXAMPLE
Input voltage range	2.9 V to 4.5 V
Output voltage	$V_{POS} = 4.6V$ , $V_{NEG} = -4 V$
Switching frequency	1.7 MHz

### 9.2.2 Detailed Design Procedure

In order to maximize performance, the TPS65631 has been optimized for use with a relatively narrow range of component values, and customers are strongly recommended to use the application circuit shown in [Figure 10](#) with the components listed in [Table 3](#) and [Table 4](#).

#### 9.2.2.1 Inductor Selection

The boost converter and inverting buck-boost converter have been optimized for use with 4.7  $\mu H$  inductors, and it is recommended that this value be used in all applications. Customers using other values of inductor are strongly recommended to characterize circuit performance on a case-by-case basis.

**Table 3. Inductor Selection**

PARAMETER	VALUE	MANUFACTURER	PART NUMBER
L1, L2	4.7 $\mu H$	Coilmaster	MMPP252012-4R7N
		Toko	1239AS-H-4R7M
		ABCO	LPP252012-4R7N
		Coilcraft	XFL4020-4R7ML

#### 9.2.2.2 Capacitor Selection

The recommended capacitor values are shown in [Table 4](#). Applications using less than the recommended capacitance (e.g. to save PCB area) may experience increased voltage ripple. In general, the lower the output power, the lower the necessary capacitance.

**Table 4. Capacitor Selection**

PARAMETER	VALUE	MANUFACTURER	PART NUMBER
C1	$2 \times 10 \mu F$	Murata	GRM21BR71A106KE51
C2	10 $\mu F$	Murata	GRM21BR71A106KE51
C3	$2 \times 10 \mu F$	Murata	GRM21BR71A106KE51
C4	100 nF	Murata	GRM21BR71E104KA01

#### 9.2.2.3 Stability

Applications using component values that differ significantly from those recommended in [Table 3](#) and [Table 4](#) should be checked for stability over the full range of operating conditions.

## 9.2.3 Application Curves

The performance shown in the following graphs was obtained using the circuit shown in [Figure 10](#) and the external components shown in [Table 3](#) and [Table 4](#). The output voltage settings for these measurements were  $V_{POS} = 4.6\text{ V}$  and  $V_{NEG} = -4\text{ V}$ .

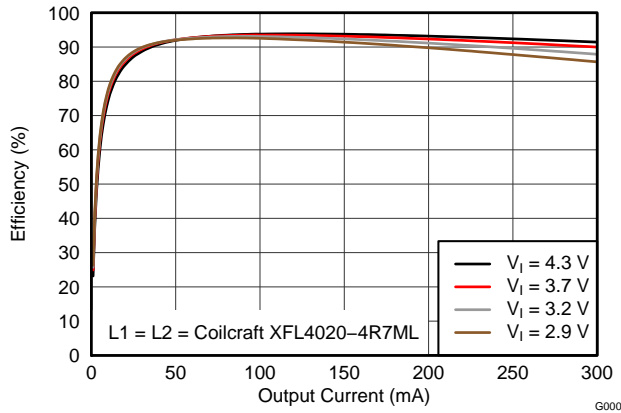


Figure 11. Efficiency vs. Output Current

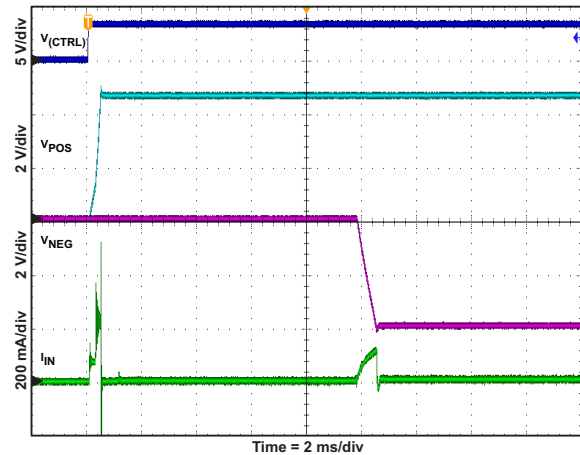


Figure 12. Start-Up Waveforms

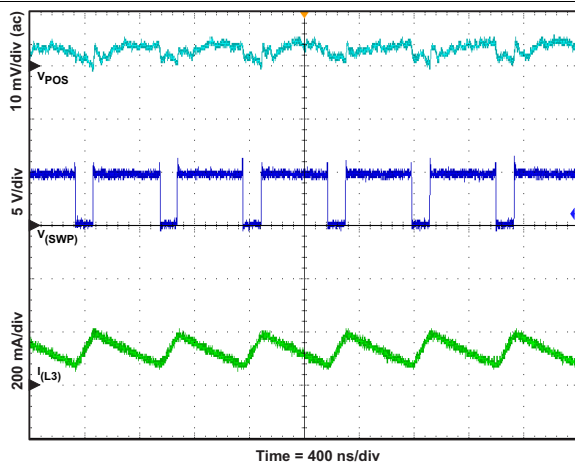


Figure 13.  $V_{POS}$  Switch Voltage, Inductor Current and Output Voltage Ripple ( $I_O = 100\text{ mA}$ )

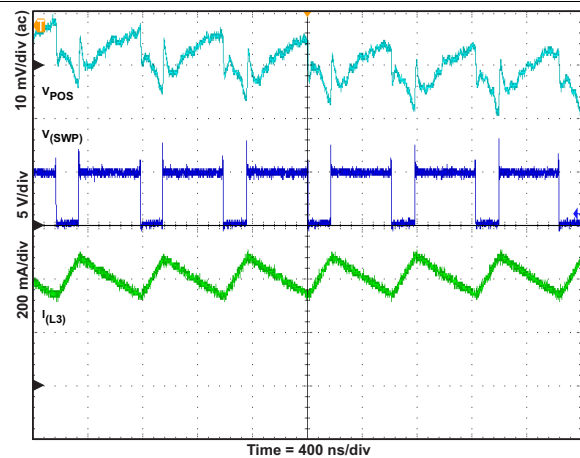


Figure 14.  $V_{POS}$  Switch Voltage, Inductor Current and Output Voltage Ripple ( $I_O = 300\text{ mA}$ )

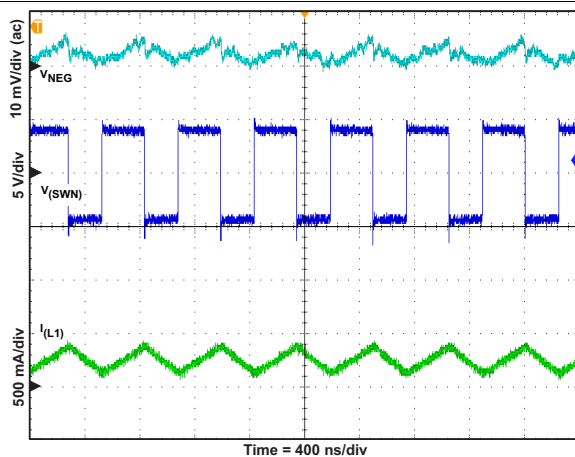


Figure 15.  $V_{NEG}$  Switch Voltage, Inductor Current and Output Voltage Ripple ( $I_O = 100\text{ mA}$ )



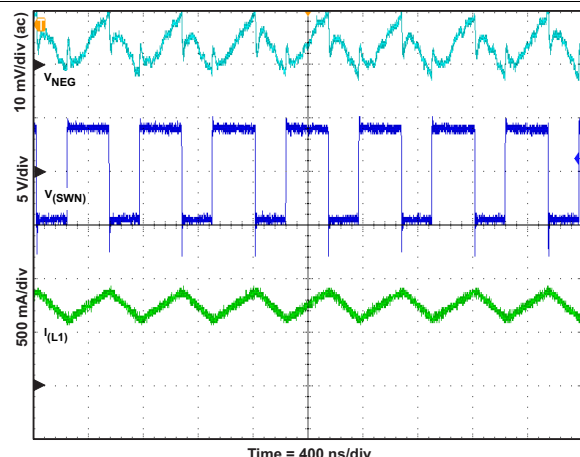



Figure 16.  $V_{NEG}$  Switch Voltage, Inductor Current and Output Voltage Ripple ( $I_O = 300\text{ mA}$ )

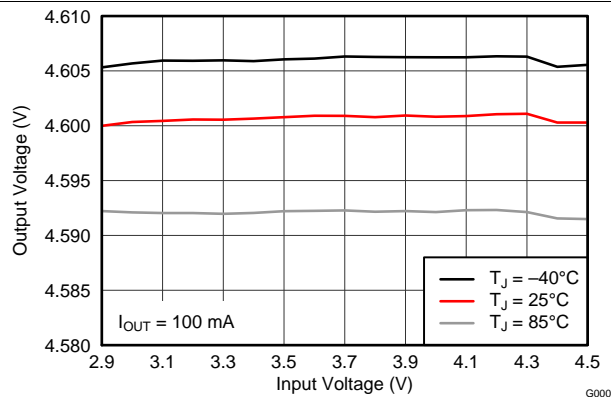


**Figure 17. Boost Converter Line Regulation**

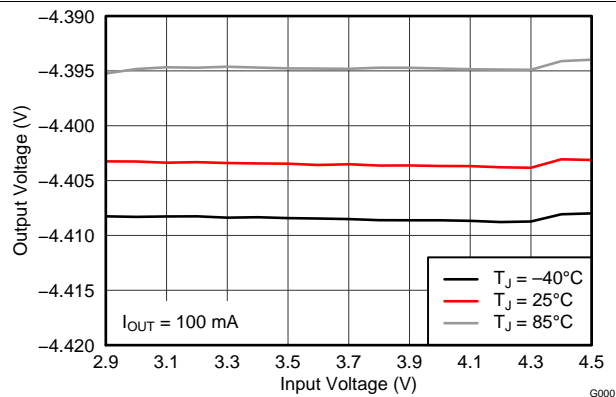


**Figure 18. Inverting Buck-Boost Converter Line Regulation**

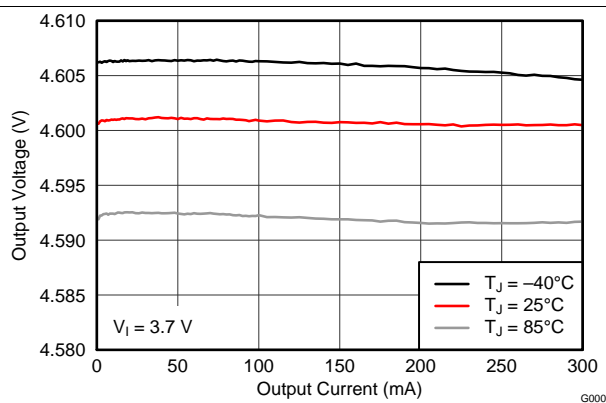


**Figure 19. Boost Converter Load Regulation**

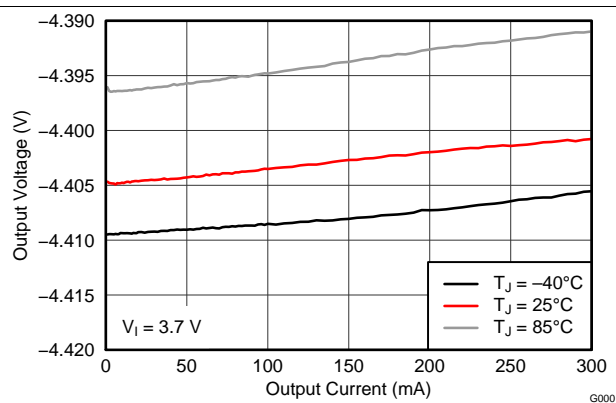


**Figure 20. Inverting Buck-Boost Converter Load Regulation**

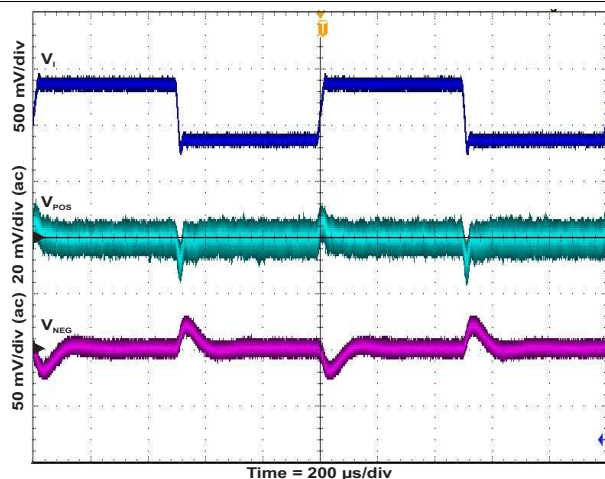

**Figure 21. Line Transient Response**

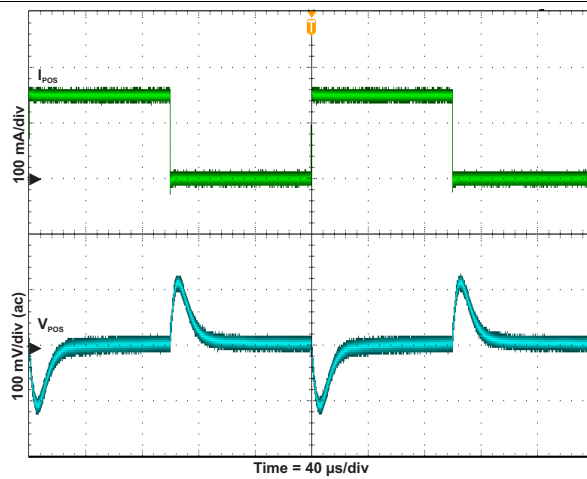

**Figure 22. Boost Converter Load Transient Response**

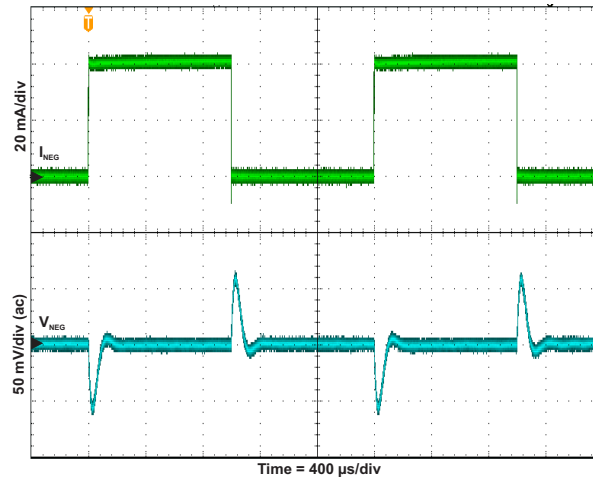

**Figure 23. Inverting Buck-Boost Converter Load Transient Response**

## 10 Power Supply Recommendations

The TPS65631 is designed to operate from an input voltage supply range between 2.9 V and 4.5 V. If the input supply is located more than a few centimeters from the TPS65631 additional bulk capacitance may be required. The 2x10  $\mu$ F shown in the schematics in this data sheet are a typical choice for this function.



## 11 Layout

### 11.1 Layout Guidelines


No PCB layout is perfect, and compromises are always necessary. However, following the basic principles listed below (in order of importance) should go a long way to achieving good performance:

- Route switching currents on the top layer using short, wide traces. Do not route these signals through vias, which have relatively high parasitic inductance and resistance.
- Place C1 as close as possible to pin 12.
- Place C2 as close as possible to pin 3.
- Place C3 as close as possible to pin 9.
- Place L1 as close as possible to pin 1.
- Place L2 as close as possible to pin 10.
- Use the thermal pad to join GND, AGND and PGND.
- Connect the FBS pin directly to the positive pin of C2, that is, keep this connection separate from the connection between OUTP and C2.
- Use a copper pour on layer 2 as a thermal spreader and connect the thermal pad to it using a number of thermal vias.

Figure 24 illustrates how a PCB layout following the above principles may be realized in practice.

### 11.2 Layout Example

Figure 24 shows the above principles implemented for the circuit of Figure 10.

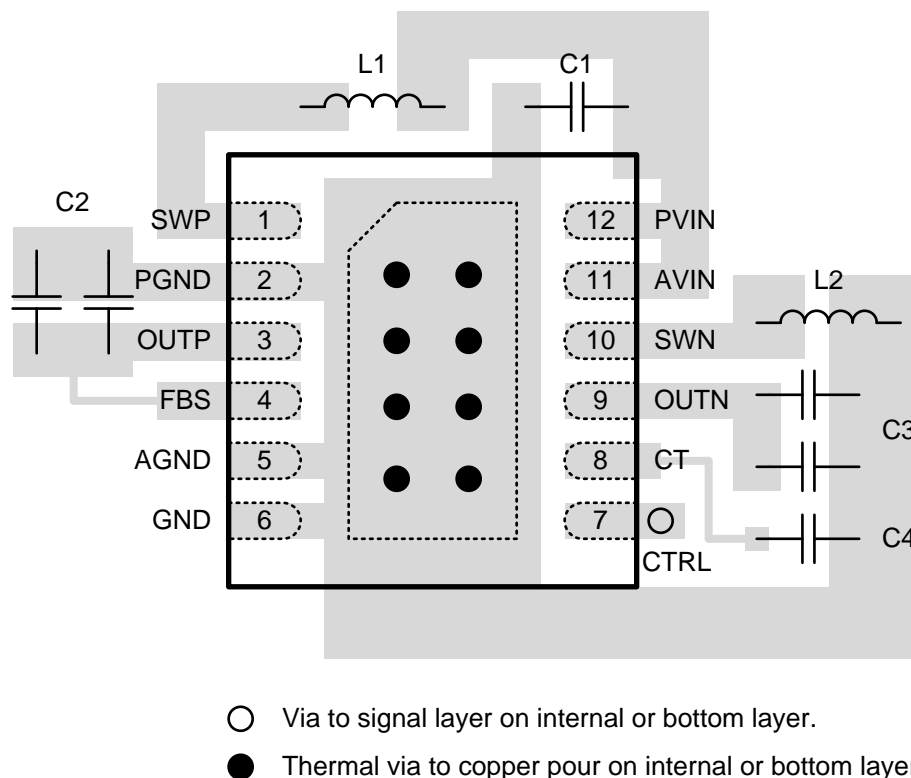

**Figure 24. PCB Layout Example**

## 12 器件和文档支持

### 12.1 器件支持

#### 12.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

### 12.2 Trademarks

All trademarks are the property of their respective owners.

### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.4 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms and definitions.

## 13 机械封装和可订购信息

以下页中包括机械封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

## PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TPS65631DPDR</a>	Active	Production	WSON (DPD)   12	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SDS
TPS65631DPDR.A	Active	Production	WSON (DPD)   12	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SDS
TPS65631DPDR.B	Active	Production	WSON (DPD)   12	3000   LARGE T&R	-	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	SDS

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS65631DPDR	WSO	DPD	12	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS65631DPDR	WS0N	DPD	12	3000	346.0	346.0	33.0

DPD (S-PWSON-N12)

PLASTIC SMALL OUTLINE NO-LEAD

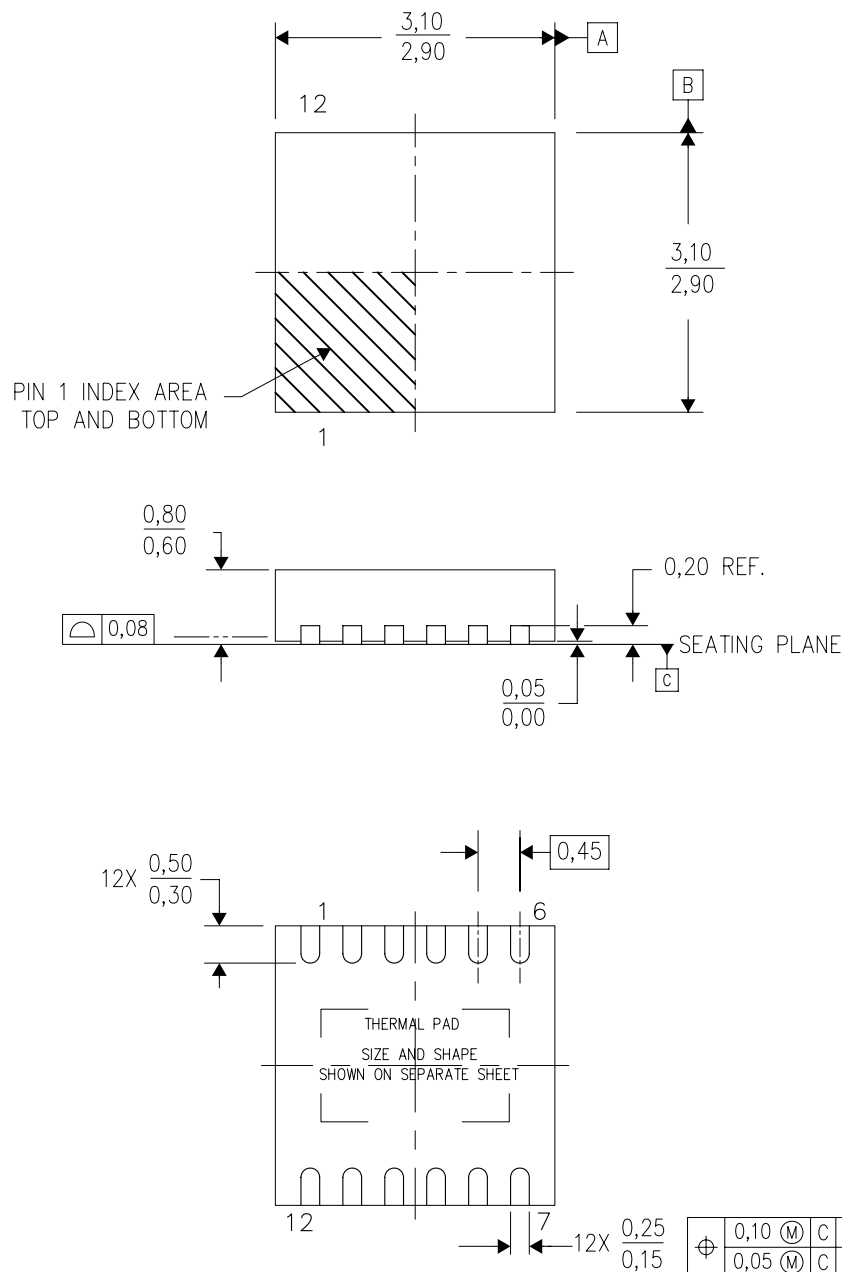

4212354/C 01/12


- NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.  
 B. This drawing is subject to change without notice.  
 C. Small Outline No-Lead (SON) package configuration.  
 D. The package thermal pad must be soldered to the board for thermal and mechanical performance, if present.  
 E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions, if present

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

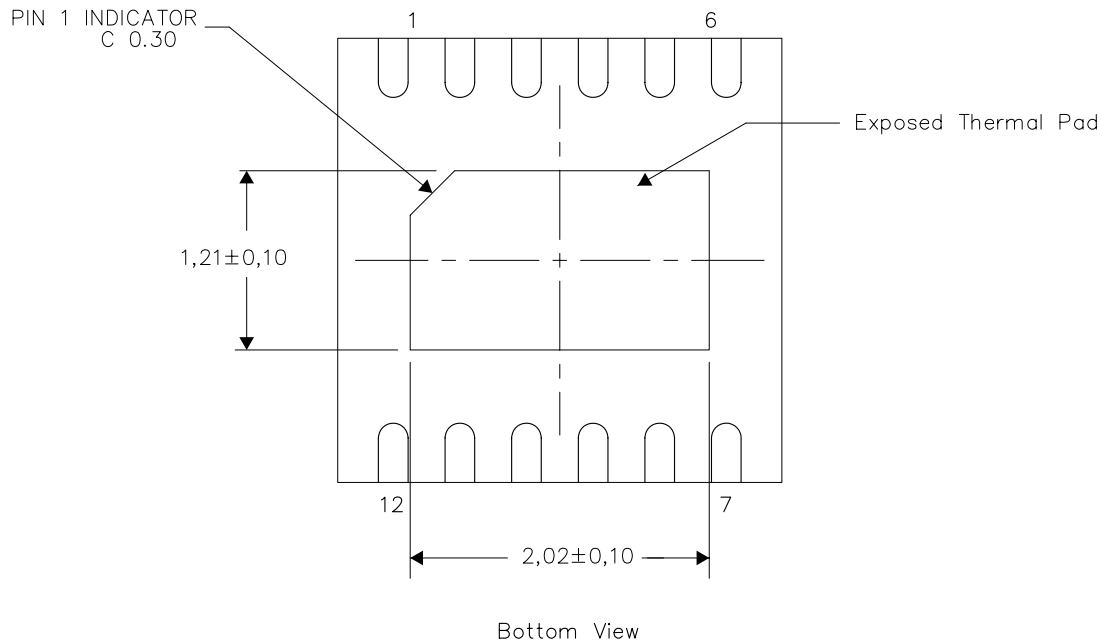

Exposed Thermal Pad Dimensions

4212468/A 02/12

NOTE: All linear dimensions are in millimeters

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司