

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003


- Available in 5-V, 4.85-V, and 3.3-V Fixed-Output and Adjustable Versions
- Very Low-Dropout Voltage . . . Maximum of 32 mV at $I_O = 100$ mA (TPS7150)
- Very Low Quiescent Current – Independent of Load . . . 285 μ A Typ
- Extremely Low Sleep-State Current
0.5 μ A Max
- 2% Tolerance Over Specified Conditions For Fixed-Output Versions
- Output Current Range of 0 mA to 500 mA
- TSSOP Package Option Offers Reduced Component Height for Space-Critical Applications
- Power-Good (PG) Status Output

description


The TPS71xx integrated circuits are a family of micropower low-dropout (LDO) voltage regulators. An order of magnitude reduction in dropout voltage and quiescent current over conventional LDO performance is achieved by replacing the typical pnp pass transistor with a PMOS device.

Because the PMOS device behaves as a low-value resistor, the dropout voltage is very low (maximum of 32 mV at an output current of 100 mA for the TPS7150) and is directly proportional to the output current (see Figure 1). Additionally, since the PMOS pass element is a voltage-driven device, the quiescent current is very low and remains independent of output loading (typically 285 μ A over the full range of output current, 0 mA to 500 mA). These two key specifications yield a significant improvement in operating life for battery-powered systems. The LDO family also features a sleep mode; applying a TTL high signal to \overline{EN} (enable) shuts down the regulator, reducing the quiescent current to 0.5 μ A maximum at $T_J = 25^\circ\text{C}$.

D OR P PACKAGE
(TOP VIEW)

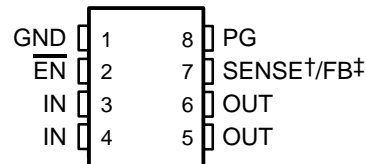

PW PACKAGE
(TOP VIEW)



NC – No internal connection

† SENSE – Fixed voltage options only
(TPS7133, TPS7148, and TPS7150)

‡ FB – Adjustable version only (TPS7101)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2003, Texas Instruments Incorporated

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

description (continued)

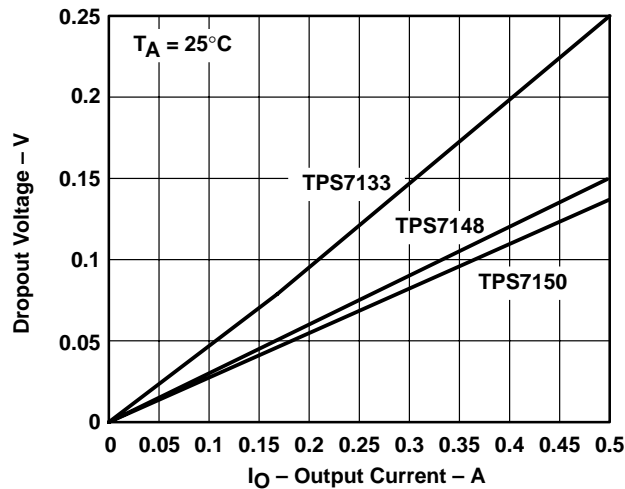


Figure 1. Dropout Voltage Versus Output Current

Power good (PG) reports low output voltage and can be used to implement a power-on reset or a low-battery indicator.

The TPS71xx is offered in 3.3-V, 4.85-V, and 5-V fixed-voltage versions and in an adjustable version (programmable over the range of 1.2 V to 9.75 V). Output voltage tolerance is specified as a maximum of 2% over line, load, and temperature ranges (3% for adjustable version). The TPS71xx family is available in PDIP (8 pin), SO (8 pin), and TSSOP (20-pin) packages. The TSSOP has a maximum height of 1,2 mm.


AVAILABLE OPTIONS

| T _J | OUTPUT VOLTAGE (V) | | | PACKAGED DEVICES | | | CHIP FORM (Y) |
|----------------|--------------------------------|------|------|-------------------|-----------------|------------|---------------|
| | MIN | TYP | MAX | SMALL OUTLINE (D) | PLASTIC DIP (P) | TSSOP (PW) | |
| –40°C to 125°C | 4.9 | 5 | 5.1 | TPS7150QD | TPS7150QP | TPS7150QPW | TPS7150Y |
| | 4.75 | 4.85 | 4.95 | TPS7148QD | TPS7148QP | TPS7148QPW | TPS7148Y |
| | 3.23 | 3.3 | 3.37 | TPS7133QD | TPS7133QP | TPS7133QPW | TPS7133Y |
| | Adjustable† 1.2 V to 9.75 V | | | TPS7101QD | TPS7101QP | TPS7101QPW | TPS7101Y |

† The D and PW packages are available taped and reeled. Add R suffix to device type (e.g., TPS7150QDR). The TPS7101Q is programmable using an external resistor divider (see application information). The chip form is tested at 25°C.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

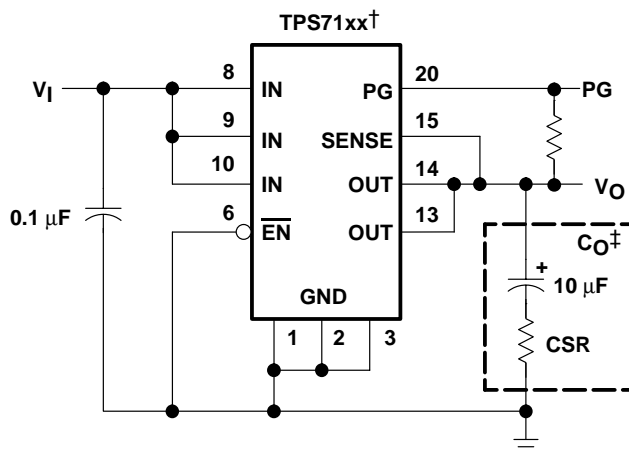


† TPS7133, TPS7148, TPS7150 (fixed-voltage options)

‡ Capacitor selection is nontrivial. See application information section for details.

Figure 2. Typical Application Configuration

TPS71xx chip information


These chips, when properly assembled, display characteristics similar to the TPS71xxQ. Thermal compression or ultrasonic bonding may be used on the doped aluminum bonding pads. The chips may be mounted with conductive epoxy or a gold-silicon preform.

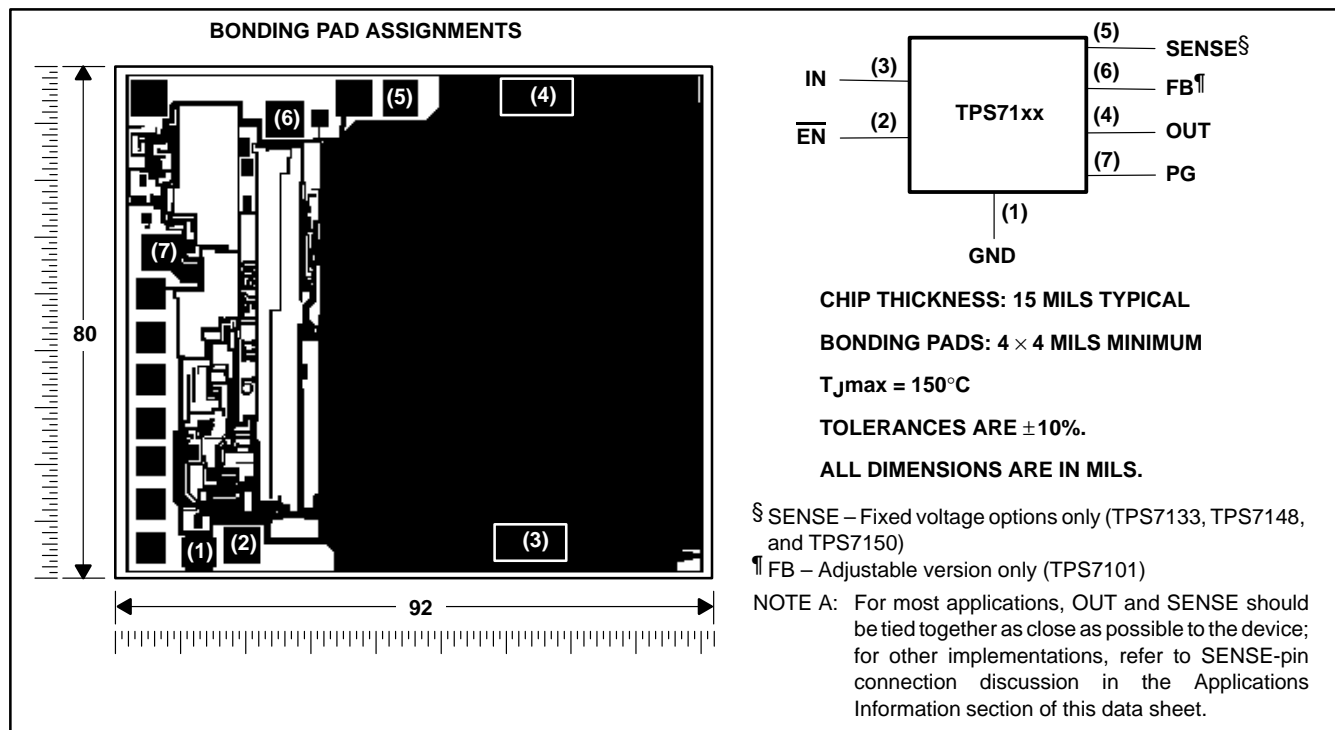

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

functional block diagram

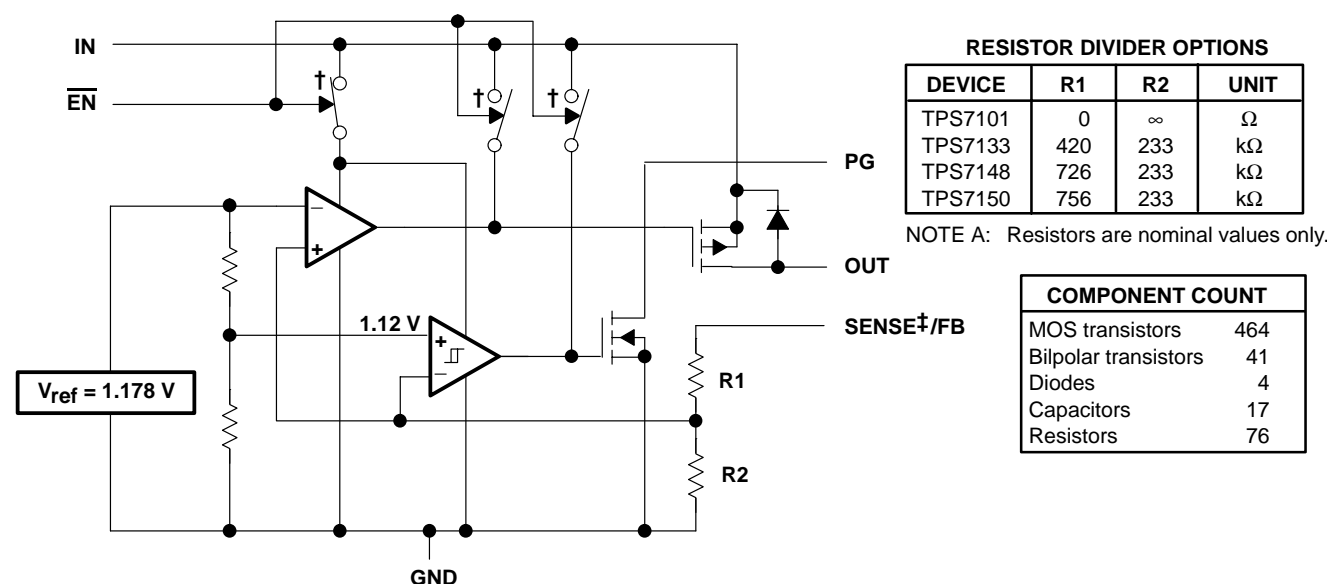

† Switch positions are shown with $\overline{\text{EN}}$ low (active).

‡ For most applications, SENSE should be externally connected to OUT as close as possible to the device. For other implementations, refer to SENSE-pin connection discussion in Applications Information section.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)§

| | |
|---|---------------------------------------|
| Input voltage range†, V_I , PG, SENSE, $\overline{\text{EN}}$ | –0.3 V to 11 V |
| Output current, I_O | 2 A |
| Continuous total power dissipation | See Dissipation Rating Tables 1 and 2 |
| Operating virtual junction temperature range, T_J | –55°C to 150°C |
| Storage temperature range, T_{stg} | –65°C to 150°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |

§ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

† All voltage values are with respect to network terminal ground.

DISSIPATION RATING TABLE 1 – FREE-AIR TEMPERATURE (see Figure 3)‡

| PACKAGE | $T_A \leq 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING | $T_A = 125^\circ\text{C}$ POWER RATING |
|---------|---|---|--|---|
| D | 725 mW | 5.8 mW/°C | 464 mW | 145 mW |
| P | 1175 mW | 9.4 mW/°C | 752 mW | 235 mW |
| PW | 700 mW | 5.6 mW/°C | 448 mW | 140 mW |

DISSIPATION RATING TABLE 2 – CASE TEMPERATURE (see Figure 4)‡



| PACKAGE | $T_C \leq 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_C = 25^\circ\text{C}$ | $T_C = 70^\circ\text{C}$ POWER RATING | $T_C = 125^\circ\text{C}$ POWER RATING |
|---------|---|---|--|---|
| D | 2188 mW | 17.5 mW/°C | 1400 mW | 438 mW |
| P | 2738 mW | 21.9 mW/°C | 1752 mW | 548 mW |
| PW | 4025 mW | 32.2 mW/°C | 2576 mW | 805 mW |

‡ Dissipation rating tables and figures are provided for maintenance of junction temperature at or below absolute maximum temperature of 150°C. For guidelines on maintaining junction temperature within recommended operating range, see the Thermal Information section.

|| Refer to Thermal Information section for detailed power dissipation considerations when using the TSSOP packages.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
 TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
 LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

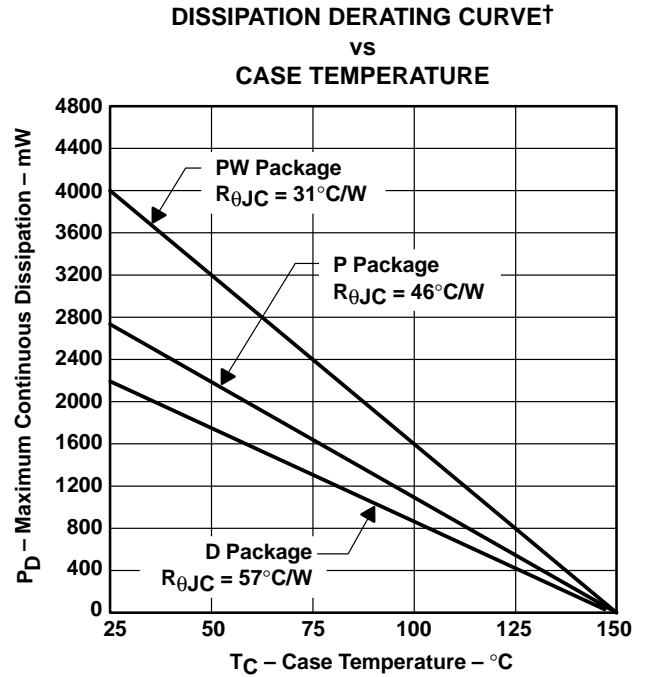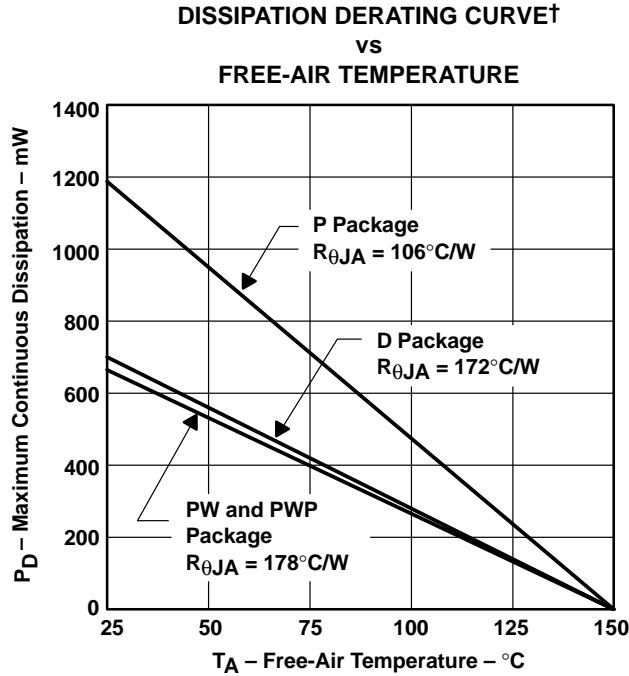

† Dissipation rating tables and figures are provided for maintenance of junction temperature at or below absolute maximum temperature of 150°C. For guidelines on maintaining junction temperature within recommended operating range, see the Thermal Information section.

recommended operating conditions

| | | MIN | MAX | UNIT |
|--|----------|------|-----|------|
| Input voltage, V_I ‡ | TPS7101Q | 2.5 | 10 | V |
| | TPS7133Q | 3.77 | 10 | |
| | TPS7148Q | 5.2 | 10 | |
| | TPS7150Q | 5.33 | 10 | |
| High-level input voltage at \overline{EN} , V_{IH} | | 2 | | V |
| Low-level input voltage at \overline{EN} , V_{IL} | | | 0.5 | V |
| Output current range, I_O | | 0 | 500 | mA |
| Operating virtual junction temperature range, T_J | | -40 | 125 | °C |

‡ Minimum input voltage defined in the recommended operating conditions is the maximum specified output voltage plus dropout voltage at the maximum specified load range. Since dropout voltage is a function of output current, the usable range can be extended for lighter loads. To calculate the minimum input voltage for your maximum output current, use the following equation: $V_{I(min)} = V_{O(max)} + V_{DO(max\ load)}$. Because the TPS7101 is programmable, $r_{DS(on)}$ should be used to calculate V_{DO} before applying the above equation. The equation for calculating V_{DO} from $r_{DS(on)}$ is given in Note 2 in the electrical characteristics table. The minimum value of 2.5 V is the absolute lower limit for the recommended input voltage range for the TPS7101.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

electrical characteristics at $I_O = 10\text{ mA}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F/CSR}^\dagger = 1\text{ }\Omega$, SENSE/FB shorted to OUT (unless otherwise noted)

| PARAMETER | TEST CONDITIONS‡ | T _J | TPS7101Q, TPS7133Q TPS7148Q, TPS7150Q | | | UNIT |
|---|--|----------------|--|-----|--------|------|
| | | | MIN | TYP | MAX | |
| Ground current (active mode) | $\overline{\text{EN}} \leq 0.5\text{ V}$, $0\text{ mA} \leq \text{I}_\text{O} \leq 500\text{ mA}$ | 25°C | 285 | 350 | μA | |
| | | –40°C to 125°C | 460 | | | |
| Input current (standby mode) | $\overline{\text{EN}} = \text{V}_\text{I}$, $2.7\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ | 25°C | 0.5 | | μA | |
| | | –40°C to 125°C | 2 | | | |
| Output current limit | $\text{V}_\text{O} = 0$, $\text{V}_\text{I} = 10\text{ V}$ | 25°C | 1.2 | 2 | A | |
| | | –40°C to 125°C | 2 | | | |
| Pass-element leakage current in standby mode | $\overline{\text{EN}} = \text{V}_\text{I}$, $2.7\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ | 25°C | 0.5 | | μA | |
| | | –40°C to 125°C | 1 | | | |
| PG leakage current | Normal operation, $\text{V}_\text{PG} = 10\text{ V}$ | 25°C | 0.02 | 0.5 | μA | |
| | | –40°C to 125°C | 0.5 | | | |
| Output voltage temperature coefficient | | –40°C to 125°C | 61 | 75 | ppm/°C | |
| Thermal shutdown junction temperature | | | 165 | | °C | |
| EN logic high (standby mode) | $2.5\text{ V} \leq \text{V}_\text{I} \leq 6\text{ V}$ | –40°C to 125°C | 2 | | V | |
| | $6\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ | | 2.7 | | | |
| $\overline{\text{EN}}$ logic low (active mode) | $2.7\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ | 25°C | 0.5 | | V | |
| | | –40°C to 125°C | 0.5 | | | |
| $\overline{\text{EN}}$ hysteresis voltage | | 25°C | 50 | | mV | |
| $\overline{\text{EN}}$ input current | $0\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ $0\text{ V} \leq \text{V}_\text{I} \leq 10\text{ V}$ | 25°C | –0.5 | 0.5 | μA | |
| | | –40°C to 125°C | –0.5 | 0.5 | | |
| Minimum V_I for active pass element | | 25°C | 2.05 | 2.5 | V | |
| | | –40°C to 125°C | 2.5 | | | |
| Minimum V_I for valid PG | $\text{I}_\text{PG} = 300\text{ }\mu\text{A}$ $\text{I}_\text{PG} = 300\text{ }\mu\text{A}$ | 25°C | 1.06 | 1.5 | V | |
| | | –40°C to 125°C | 1.9 | | | |

[†] CSR (compensation series resistance) refers to the total series resistance, including the equivalent series resistance (ESR) of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

[‡] Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TPS7101 electrical characteristics at $I_O = 10\text{ mA}$, $V_I = 3.5\text{ V}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F/CSR}^\dagger = 1\text{ }\Omega$, FB shorted to OUT at device leads (unless otherwise noted)

| PARAMETER | TEST CONDITIONS‡ | | T _J | TPS7101Q | | | UNIT |
|---|---|---|----------------|----------|-------|-------|--------------------------------|
| | | | | MIN | TYP | MAX | |
| Reference voltage (measured at FB with OUT connected to FB) | $V_I = 3.5\text{ V}$, $I_O = 10\text{ mA}$ | | 25°C | | 1.178 | | V |
| | $2.5\text{ V} \leq V_I \leq 10\text{ V}$, See Note 1 | $5\text{ mA} \leq I_O \leq 500\text{ mA}$ | –40°C to 125°C | 1.143 | | 1.213 | V |
| Reference voltage temperature coefficient | | | –40°C to 125°C | | 61 | 75 | ppm/°C |
| Pass-element series resistance (see Note 2) | $V_I = 2.4\text{ V}$, $50\text{ }\mu\text{A} \leq I_O \leq 150\text{ mA}$ | | 25°C | | 0.7 | 1 | Ω |
| | | | –40°C to 125°C | | | 1 | |
| | $V_I = 2.4\text{ V}$, $150\text{ mA} \leq I_O \leq 500\text{ mA}$ | | 25°C | | 0.83 | 1.3 | |
| | | | –40°C to 125°C | | | 1.3 | |
| | $V_I = 2.9\text{ V}$, $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | | 25°C | | 0.52 | 0.85 | |
| | | | –40°C to 125°C | | | 0.85 | |
| | $V_I = 3.9\text{ V}$, $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | | 25°C | | 0.32 | | |
| | | | –40°C to 125°C | | | | |
| Input regulation | $V_I = 2.5\text{ V to } 10\text{ V}$, See Note 1 | $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | 25°C | | | 18 | mV |
| | | | –40°C to 125°C | | | 25 | |
| Output regulation | $I_O = 5\text{ mA to } 500\text{ mA}$, See Note 1 | $2.5\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | | 14 | mV |
| | | | –40°C to 125°C | | | 25 | |
| | $I_O = 50\text{ }\mu\text{A to } 500\text{ mA}$, See Note 1 | $2.5\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | | 22 | mV |
| | | | –40°C to 125°C | | | 54 | |
| Ripple rejection | $f = 120\text{ Hz}$ | $I_O = 50\text{ }\mu\text{A}$ | 25°C | 48 | 59 | | dB |
| | | | –40°C to 125°C | 44 | | | |
| | | $I_O = 500\text{ mA}$, See Note 1 | 25°C | 45 | 54 | | |
| | | | –40°C to 125°C | 44 | | | |
| Output noise-spectral density | $f = 120\text{ Hz}$ | | 25°C | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 25°C | | 95 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 25°C | | 89 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 25°C | | 74 | | |
| PG trip-threshold voltage§ | V_{FB} voltage decreasing from above V_{PG} | | –40°C to 125°C | 1.101 | | 1.145 | V |
| PG hysteresis voltage§ | Measured at V_{FB} | | 25°C | | 12 | | mV |
| PG output low voltage§ | $I_{\text{PG}} = 400\text{ }\mu\text{A}$, $V_I = 2.13\text{ V}$ | | 25°C | | 0.1 | 0.4 | V |
| | | | –40°C to 125°C | | | 0.4 | |
| FB input current | | | 25°C | –10 | 0.1 | 10 | nA |
| | | | –40°C to 125°C | –20 | | 20 | |

† CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

‡ Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

§ Output voltage programmed to 2.5 V with closed-loop configuration (see application information).

NOTES: 1. When $V_I < 2.9\text{ V}$ and $I_O > 150\text{ mA}$ simultaneously, pass element $r_{\text{DS(on)}}$ increases (see Figure 27) to a point such that the resulting dropout voltage prevents the regulator from maintaining the specified tolerance range.

2. To calculate dropout voltage, use equation:

$$V_{\text{DO}} = I_O \cdot r_{\text{DS(on)}}$$

$r_{\text{DS(on)}}$ is a function of both output current and input voltage. The parametric table lists $r_{\text{DS(on)}}$ for $V_I = 2.4\text{ V}$, 2.9 V , 3.9 V , and 5.9 V , which corresponds to dropout conditions for programmed output voltages of 2.5 V, 3 V, 4 V, and 6 V, respectively. For other programmed values, refer to Figure 26.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TPS7133 electrical characteristics at $I_O = 10\text{ mA}$, $V_I = 4.3\text{ V}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F}/\text{CSR}^\dagger = 1\text{ }\Omega$, SENSE shorted to OUT (unless otherwise noted)

| PARAMETER | TEST CONDITIONS [‡] | T _J | TPS7133Q | | | UNIT |
|--------------------------------|--|--------------------------------|----------------|------|------|--------------------------------|
| | | | MIN | TYP | MAX | |
| Output voltage | $V_I = 4.3\text{ V}$, $I_O = 10\text{ mA}$ | 25°C | | 3.3 | | V |
| | $4.3\text{ V} \leq V_I \leq 10\text{ V}$, $5\text{ mA} \leq I_O \leq 500\text{ mA}$ | –40°C to 125°C | 3.23 | | 3.37 | |
| Dropout voltage | $I_O = 10\text{ mA}$, $V_I = 3.23\text{ V}$ | 25°C | | 4.5 | 7 | mV |
| | | –40°C to 125°C | | | 8 | |
| | $I_O = 100\text{ mA}$, $V_I = 3.23\text{ V}$ | 25°C | | 47 | 60 | |
| | | –40°C to 125°C | | | 80 | |
| | $I_O = 500\text{ mA}$, $V_I = 3.23\text{ V}$ | 25°C | | 235 | 300 | |
| | | –40°C to 125°C | | | 400 | |
| Pass-element series resistance | $(3.23\text{ V} - V_O)/I_O$, $I_O = 500\text{ mA}$, $V_I = 3.23\text{ V}$ | 25°C | | 0.47 | 0.6 | Ω |
| | | –40°C to 125°C | | | 0.8 | |
| Input regulation | $V_I = 4.3\text{ V}$ to 10 V, $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | 25°C | | | 20 | mV |
| | | –40°C to 125°C | | | 27 | |
| Output regulation | $I_O = 5\text{ mA}$ to 500 mA, $4.3\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 21 | 38 | mV |
| | | –40°C to 125°C | | | 75 | |
| | $I_O = 50\text{ }\mu\text{A}$ to 500 mA, $4.3\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 30 | 60 | mV |
| | | –40°C to 125°C | | | 120 | |
| Ripple rejection | $f = 120\text{ Hz}$ | $I_O = 50\text{ }\mu\text{A}$ | 25°C | 43 | 54 | dB |
| | | $I_O = 50\text{ }\mu\text{A}$ | –40°C to 125°C | 40 | | |
| | | $I_O = 500\text{ mA}$ | 25°C | 39 | 49 | |
| | | $I_O = 500\text{ mA}$ | –40°C to 125°C | 36 | | |
| Output noise-spectral density | $f = 120\text{ Hz}$ | 25°C | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 25°C | 274 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 25°C | 228 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 25°C | 159 | | |
| PG trip-threshold voltage | V_O voltage decreasing from above V_{PG} | –40°C to 125°C | 2.868 | | 3 | V |
| PG hysteresis voltage | | 25°C | | 35 | | mV |
| PG output low voltage | $I_{\text{PG}} = 1\text{ mA}$, $V_I = 2.8\text{ V}$ | 25°C | | 0.22 | 0.4 | V |
| | | –40°C to 125°C | | | 0.4 | |

[†] CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

[‡] Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TPS7148 electrical characteristics at $I_O = 10\text{ mA}$, $V_I = 5.85\text{ V}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F}$ /CSR $^\dagger = 1\text{ }\Omega$, SENSE shorted to OUT (unless otherwise noted)

| PARAMETER | TEST CONDITIONS ‡ | T_J | TPS7148Q | | | UNIT |
|--------------------------------|--|--|----------|------|------|--------------------------------|
| | | | MIN | TYP | MAX | |
| Output voltage | $V_I = 5.85\text{ V}$, $I_O = 10\text{ mA}$ | 25°C | | 4.85 | | V |
| | $5.85\text{ V} \leq V_I \leq 10\text{ V}$, $5\text{ mA} \leq I_O \leq 500\text{ mA}$ | -40°C to 125°C | 4.75 | | 4.95 | |
| Dropout voltage | $I_O = 10\text{ mA}$, $V_I = 4.75\text{ V}$ | 25°C | | 2.9 | 6 | mV |
| | | -40°C to 125°C | | | 8 | |
| | $I_O = 100\text{ mA}$, $V_I = 4.75\text{ V}$ | 25°C | | 30 | 37 | |
| | | -40°C to 125°C | | | 54 | |
| | $I_O = 500\text{ mA}$, $V_I = 4.75\text{ V}$ | 25°C | | 150 | 180 | |
| | | -40°C to 125°C | | | 250 | |
| Pass-element series resistance | $(4.75\text{ V} - V_O)/I_O$, $I_O = 500\text{ mA}$, $V_I = 4.75\text{ V}$ | 25°C | | 0.32 | 0.35 | Ω |
| | | -40°C to 125°C | | | 0.52 | |
| Input regulation | $V_I = 5.85\text{ V}$ to 10 V , $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | 25°C | | | 27 | mV |
| | | -40°C to 125°C | | | 37 | |
| Output regulation | $I_O = 5\text{ mA}$ to 500 mA , $5.85\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 12 | 42 | mV |
| | | -40°C to 125°C | | | 80 | |
| | $I_O = 50\text{ }\mu\text{A}$ to 500 mA , $5.85\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 42 | 60 | mV |
| | | -40°C to 125°C | | | 130 | |
| Ripple rejection | $f = 120\text{ Hz}$ | $I_O = 50\text{ }\mu\text{A}$, 25°C | | 42 | 53 | dB |
| | | $I_O = 50\text{ }\mu\text{A}$, -40°C to 125°C | | 39 | | |
| | | $I_O = 500\text{ mA}$, 25°C | | 39 | 50 | |
| | | $I_O = 500\text{ mA}$, -40°C to 125°C | | 35 | | |
| Output noise-spectral density | $f = 120\text{ Hz}$ | 25°C | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $10\text{ Hz} \leq f \leq 100\text{ kHz}$, CSR $^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$, 25°C | | 410 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$, 25°C | | 328 | | |
| | | $C_O = 100\text{ }\mu\text{F}$, 25°C | | 212 | | |
| PG trip-threshold voltage | V_O voltage decreasing from above V_{PG} | -40°C to 125°C | | 4.5 | 4.7 | V |
| PG hysteresis voltage | | 25°C | | 50 | | mV |
| PG output low voltage | $I_{PG} = 1.2\text{ mA}$, $V_I = 4.12\text{ V}$ | 25°C | | 0.2 | 0.4 | V |
| | | -40°C to 125°C | | | 0.4 | |

† CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

‡ Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TPS7150 electrical characteristics at $I_O = 10\text{ mA}$, $V_I = 6\text{ V}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F/CSR}^\dagger = 1\text{ }\Omega$, SENSE shorted to OUT (unless otherwise noted)

| PARAMETER | TEST CONDITIONS [‡] | T _J | TPS7150Q | | | UNIT |
|--------------------------------|---|--------------------------------|----------------|------|------|--------------------------------|
| | | | MIN | TYP | MAX | |
| Output voltage | $V_I = 6\text{ V}$, $I_O = 10\text{ mA}$ | 25°C | | 5 | | V |
| | $6\text{ V} \leq V_I \leq 10\text{ V}$, $5\text{ mA} \leq I_O \leq 500\text{ mA}$ | –40°C to 125°C | 4.9 | | 5.1 | |
| Dropout voltage | $I_O = 10\text{ mA}$, $V_I = 4.88\text{ V}$ | 25°C | | 2.9 | 6 | mV |
| | | –40°C to 125°C | | | 8 | |
| | $I_O = 100\text{ mA}$, $V_I = 4.88\text{ V}$ | 25°C | | 27 | 32 | |
| | | –40°C to 125°C | | | 47 | |
| | $I_O = 500\text{ mA}$, $V_I = 4.88\text{ V}$ | 25°C | | 146 | 170 | |
| | | –40°C to 125°C | | | 230 | |
| Pass-element series resistance | $(4.88\text{ V} - V_O)/I_O$, $I_O = 500\text{ mA}$, $V_I = 4.88\text{ V}$ | 25°C | | 0.29 | 0.32 | Ω |
| | | –40°C to 125°C | | | 0.47 | |
| Input regulation | $V_I = 6\text{ V to }10\text{ V}$, $50\text{ }\mu\text{A} \leq I_O \leq 500\text{ mA}$ | 25°C | | | 25 | mV |
| | | –40°C to 125°C | | | 32 | |
| Output regulation | $I_O = 5\text{ mA to }500\text{ mA}$, $6\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 30 | 45 | mV |
| | | –40°C to 125°C | | | 86 | |
| | $I_O = 50\text{ }\mu\text{A to }500\text{ mA}$, $6\text{ V} \leq V_I \leq 10\text{ V}$ | 25°C | | 45 | 65 | mV |
| | | –40°C to 125°C | | | 140 | |
| Ripple rejection | $f = 120\text{ Hz}$ | $I_O = 50\text{ }\mu\text{A}$ | 25°C | 45 | 55 | dB |
| | | | –40°C to 125°C | 40 | | |
| | | $I_O = 500\text{ mA}$ | 25°C | 42 | 52 | |
| | | | –40°C to 125°C | 36 | | |
| Output noise-spectral density | $f = 120\text{ Hz}$ | 25°C | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 25°C | 430 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 25°C | 345 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 25°C | 220 | | |
| PG trip-threshold voltage | V_O voltage decreasing from above V_{PG} | –40°C to 125°C | 4.55 | | 4.75 | V |
| PG hysteresis voltage | | 25°C | | 53 | | mV |
| PG output low voltage | $I_{\text{PG}} = 1.2\text{ mA}$, $V_I = 4.25\text{ V}$ | 25°C | | 0.2 | 0.4 | V |
| | | –40°C to 125°C | | | 0.4 | |

[†] CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

[‡] Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

electrical characteristics at $I_O = 10\text{ mA}$, $\overline{\text{EN}} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F/CSR}^\dagger = 1\text{ }\Omega$, $T_J = 25^\circ\text{C}$, SENSE/FB shorted to OUT (unless otherwise noted)

| PARAMETER | TEST CONDITIONS‡ | TPS7101Y, TPS7133Y TPS7148Y, TPS7150Y | UNIT |
|---|---|--|------------------|
| | | MIN TYP MAX | |
| Ground current (active mode) | $\overline{\text{EN}} \leq 0.5\text{ V}$, $0\text{ mA} \leq I_O \leq 500\text{ mA}$ $V_I = V_O + 1\text{ V}$ | 285 | μA |
| Output current limit | $V_O = 0$, $V_I = 10\text{ V}$ | 1.2 | A |
| PG leakage current | Normal operation, $V_{PG} = 10\text{ V}$ | 0.02 | μA |
| Thermal shutdown junction temperature | | 165 | $^\circ\text{C}$ |
| $\overline{\text{EN}}$ hysteresis voltage | | 50 | mV |
| Minimum V_I for active pass element | | 2.05 | V |
| Minimum V_I for valid PG | $I_{PG} = 300\text{ }\mu\text{A}$ | 1.06 | V |

| PARAMETER | TEST CONDITIONS‡ | | TPS7101Y | | | UNIT |
|---|---|-----------------------------------|----------|-----|-----|--------|
| | | | MIN | TYP | MAX | |
| Reference voltage (measured at FB with OUT connected to FB) | V _I = 3.5 V, | I _O = 10 mA | 1.178 | | | V |
| Pass-element series resistance (see Note 2) | V _I = 2.4 V, | 50 μA ≤ I _O ≤ 150 mA | 0.7 | | | Ω |
| | V _I = 2.4 V, | 150 mA ≤ I _O ≤ 500 mA | 0.83 | | | |
| | V _I = 2.9 V, | 50 μA ≤ I _O ≤ 500 mA | 0.52 | | | |
| | V _I = 3.9 V, | 50 μA ≤ I _O ≤ 500 mA | 0.32 | | | |
| | V _I = 5.9 V, | 50 μA ≤ I _O ≤ 500 mA | 0.23 | | | |
| Input regulation | V _I = 2.5 V to 10 V, See Note 1 | 50 μA ≤ I _O ≤ 500 mA, | 18 | | | mV |
| Output regulation | 2.5 V ≤ V _I ≤ 10 V, See Note 1 | I _O = 5 mA to 500 mA, | 14 | | | mV |
| | 2.5 V ≤ V _I ≤ 10 V, See Note 1 | I _O = 50 μA to 500 mA, | 22 | | | mV |
| Ripple rejection | V _I = 3.5 V, I _O = 50 μA | f = 120 Hz, | 59 | | | dB |
| Output noise-spectral density | V _I = 3.5 V, | f = 120 Hz | 2 | | | μV/√Hz |
| Output noise voltage | V _I = 3.5 V, 10 Hz ≤ f ≤ 100 kHz, CSR [†] = 1 Ω | C _O = 4.7 μF | 95 | | | μVrms |
| | | C _O = 10 μF | 89 | | | |
| | | C _O = 100 μF | 74 | | | |
| PG hysteresis voltage§ | V _I = 3.5 V, | Measured at V _{FB} | 12 | | | mV |
| PG output low voltage§ | V _I = 2.13 V, | I _{PG} = 400 μA | 0.1 | | | V |
| FB input current | V _I = 3.5 V | V _I = 3.5 V | 0.1 | | | nA |

† CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

‡ Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

§ Output voltage programmed to 2.5 V with closed-loop configuration (see application information).

NOTES: 1. When $V_I < 2.9\text{ V}$ and $I_O > 150\text{ mA}$ simultaneously, pass element $r_{DS(on)}$ increases (see Figure 27) to a point such that the resulting dropout voltage prevents the regulator from maintaining the specified tolerance range.

2. To calculate dropout voltage, use equation:

$$V_{DO} = I_O \cdot r_{DS(on)}$$

$r_{DS(on)}$ is a function of both output current and input voltage. The parametric table lists $r_{DS(on)}$ for $V_I = 2.4\text{ V}$, 2.9 V , 3.9 V , and 5.9 V , which corresponds to dropout conditions for programmed output voltages of 2.5 V, 3 V, 4 V, and 6 V, respectively. For other programmed values, refer to Figure 26.



TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

electrical characteristics at $I_O = 10\text{ mA}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F/CSR}^\dagger = 1\text{ }\Omega$, $T_J = 25^\circ\text{C}$, SENSE shorted to OUT (unless otherwise noted) (continued)

| PARAMETER | TEST CONDITIONS [‡] | TPS7133Y | | | UNIT |
|--------------------------------|---|--------------------------------|------|-----|--------------------------------|
| | | MIN | TYP | MAX | |
| Output voltage | $V_I = 4.3\text{ V}$, $I_O = 10\text{ mA}$ | | 3.3 | | V |
| Dropout voltage | $V_I = 3.23\text{ V}$, $I_O = 10\text{ mA}$ | | 0.02 | | mV |
| | $V_I = 3.23\text{ V}$, $I_O = 100\text{ mA}$ | | 47 | | |
| | $V_I = 3.23\text{ V}$, $I_O = 500\text{ mA}$ | | 235 | | |
| | | | | | |
| Pass-element series resistance | $(3.23\text{ V} - V_O)/I_O$, $V_I = 3.23\text{ V}$, $I_O = 500\text{ mA}$ | | 0.47 | | Ω |
| Output regulation | $4.3\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 5\text{ mA to } 500\text{ mA}$ | | 21 | | mV |
| | $4.3\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 50\text{ }\mu\text{A to } 500\text{ mA}$ | | 30 | | mV |
| Ripple rejection | $V_I = 4.3\text{ V}$, $f = 120\text{ Hz}$, $I_O = 50\text{ }\mu\text{A}$ | | 54 | | dB |
| | $I_O = 500\text{ mA}$ | | 49 | | |
| Output noise-spectral density | $V_I = 4.3\text{ V}$, $f = 120\text{ Hz}$ | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $V_I = 4.3\text{ V}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 274 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 228 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 159 | | |
| PG hysteresis voltage | $V_I = 4.3\text{ V}$ | | 35 | | mV |
| PG output low voltage | $V_I = 2.8\text{ V}$, $I_{\text{PG}} = 1\text{ mA}$ | | 0.22 | | V |

| PARAMETER | TEST CONDITIONS [‡] | TPS7148Y | | | UNIT |
|--------------------------------|--|--------------------------------|------|-----|--------------------------------|
| | | MIN | TYP | MAX | |
| Output voltage | $V_I = 5.85\text{ V}$, $I_O = 10\text{ mA}$ | | 4.85 | | V |
| Dropout voltage | $V_I = 4.75\text{ V}$, $I_O = 10\text{ mA}$ | | 0.08 | | mV |
| | $V_I = 4.75\text{ V}$, $I_O = 100\text{ mA}$ | | 30 | | |
| | $V_I = 4.75\text{ V}$, $I_O = 500\text{ mA}$ | | 150 | | |
| Pass-element series resistance | $(4.75\text{ V} - V_O)/I_O$, $V_I = 4.75\text{ V}$, $I_O = 500\text{ mA}$ | | 0.32 | | Ω |
| Output regulation | $5.85\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 5\text{ mA to } 500\text{ mA}$ | | 12 | | mV |
| | $5.85\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 50\text{ }\mu\text{A to } 500\text{ mA}$ | | 42 | | mV |
| Ripple rejection | $V_I = 5.85\text{ V}$, $f = 120\text{ Hz}$, $I_O = 50\text{ }\mu\text{A}$ | | 53 | | dB |
| | $I_O = 500\text{ mA}$ | | 50 | | |
| Output noise-spectral density | $V_I = 5.85\text{ V}$, $f = 120\text{ Hz}$ | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $V_I = 5.85\text{ V}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 410 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 328 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 212 | | |
| PG hysteresis voltage | $V_I = 5.85\text{ V}$ | | 50 | | mV |
| PG output low voltage | $V_I = 4.12\text{ V}$, $I_{\text{PG}} = 1.2\text{ mA}$ | | 0.2 | 0.4 | V |

[†] CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

[‡] Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.



TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

electrical characteristics at $I_O = 10\text{ mA}$, $\overline{EN} = 0\text{ V}$, $C_O = 4.7\text{ }\mu\text{F}/\text{CSR}^\dagger = 1\text{ }\Omega$, $T_J = 25^\circ\text{C}$, SENSE shorted to OUT (unless otherwise noted) (continued)

| PARAMETER | TEST CONDITIONS [‡] | TPS7150Y | | | UNIT |
|--------------------------------|---|--------------------------------|------|-----|--------------------------------|
| | | MIN | TYP | MAX | |
| Output voltage | $V_I = 6\text{ V}$, $I_O = 10\text{ mA}$ | | 5 | | V |
| Dropout voltage | $V_I = 4.88\text{ V}$, $I_O = 10\text{ mA}$ | | 0.13 | | mV |
| | $V_I = 4.88\text{ V}$, $I_O = 100\text{ mA}$ | | 27 | | |
| | $V_I = 4.88\text{ V}$, $I_O = 500\text{ }\mu\text{A}$ | | 146 | | |
| | $(4.88\text{ V} - V_O)/I_O$, $V_I = 4.88\text{ V}$, $I_O = 500\text{ mA}$ | | 0.29 | | |
| Pass-element series resistance | | | | | Ω |
| Output regulation | $6\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 5\text{ mA to } 500\text{ mA}$ | | 30 | | mV |
| | $6\text{ V} \leq V_I \leq 10\text{ V}$, $I_O = 50\text{ }\mu\text{A to } 500\text{ mA}$ | | 45 | | mV |
| Ripple rejection | $V_I = 6\text{ V}$, $f = 120\text{ Hz}$, $I_O = 50\text{ }\mu\text{A}$ | | 55 | | dB |
| | $I_O = 500\text{ mA}$ | | 52 | | |
| Output noise-spectral density | $V_I = 6\text{ V}$, $f = 120\text{ Hz}$ | | 2 | | $\mu\text{V}/\sqrt{\text{Hz}}$ |
| Output noise voltage | $V_I = 6\text{ V}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$, $\text{CSR}^\dagger = 1\text{ }\Omega$ | $C_O = 4.7\text{ }\mu\text{F}$ | 430 | | μV_{rms} |
| | | $C_O = 10\text{ }\mu\text{F}$ | 345 | | |
| | | $C_O = 100\text{ }\mu\text{F}$ | 220 | | |
| PG hysteresis voltage | $V_I = 6\text{ V}$ | | 53 | | mV |
| PG output low voltage | $V_I = 4.25\text{ V}$, $P_G = 1.2\text{ mA}$ | | 0.2 | | V |

[†] CSR refers to the total series resistance, including the ESR of the capacitor, any series resistance added externally, and PWB trace resistance to C_O .

[‡] Pulse-testing techniques are used to maintain virtual junction temperature as close as possible to ambient temperature; thermal effects must be taken into account separately.

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TYPICAL CHARACTERISTICS

Table of Graphs

| | | | FIGURE |
|-----------------|---|------------------------------|---------------|
| I_Q | Quiescent current | vs Output current | 5 |
| | | vs Input voltage | 6 |
| | | vs Free-air temperature | 7 |
| V_{DO} | Dropout voltage | vs Output current | 8 |
| ΔV_{DO} | Change in dropout voltage | vs Free-air temperature | 9 |
| ΔV_O | Change in output voltage | vs Free-air temperature | 10 |
| V_O | Output voltage | vs Input voltage | 11 |
| ΔV_O | Change in output voltage | vs Input voltage | 12 |
| V_O | Output voltage | vs Output current | 13 |
| | | | 14 |
| | | | 15 |
| | | | 16 |
| | Ripple rejection | vs Frequency | 17 |
| | | | 18 |
| | | | 19 |
| | | | 20 |
| | Output spectral noise density | vs Frequency | 21 |
| | | | 22 |
| | | | 23 |
| | | | 24 |
| $r_{DS(on)}$ | Pass-element resistance | vs Input voltage | 25 |
| R | Divider resistance | vs Free-air temperature | 26 |
| $I_I(SENSE)$ | SENSE pin current | vs Free-air temperature | 27 |
| | FB leakage current | vs Free-air temperature | 28 |
| V_I | Minimum input voltage for active-pass element | vs Free-air temperature | 29 |
| | Minimum input voltage for valid PG | vs Free-air temperature | 30 |
| $I_I(EN)$ | Input current (\overline{EN}) | vs Free-air temperature | 31 |
| | Output voltage response from Enable (\overline{EN}) | | 32 |
| V_{PG} | Power-good (PG) voltage | vs Output voltage | 33 |
| CSR | Compensation series resistance | vs Output current | 34 |
| | | | 35 |
| CSR | Compensation series resistance | vs Added ceramic capacitance | 36 |
| | | | 37 |
| CSR | Compensation series resistance | vs Output current | 38 |
| | | | 39 |
| CSR | Compensation series resistance | vs Added ceramic capacitance | 40 |
| | | | 41 |

TYPICAL CHARACTERISTICS

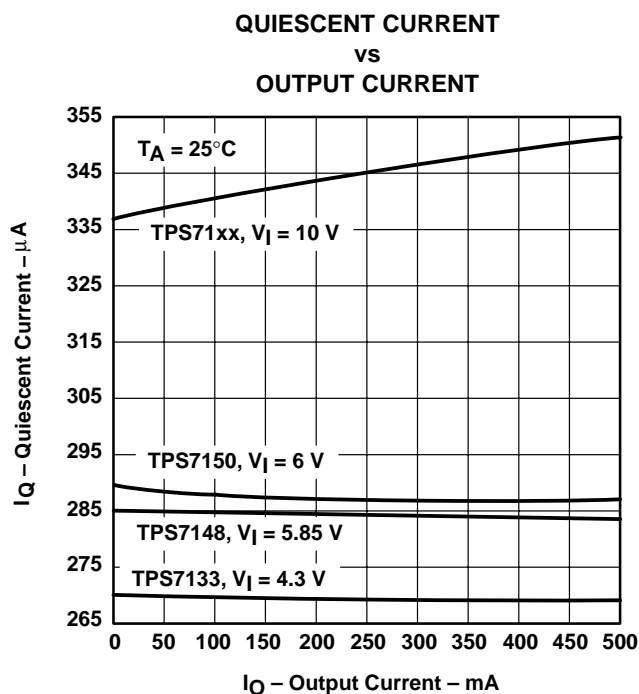


Figure 5

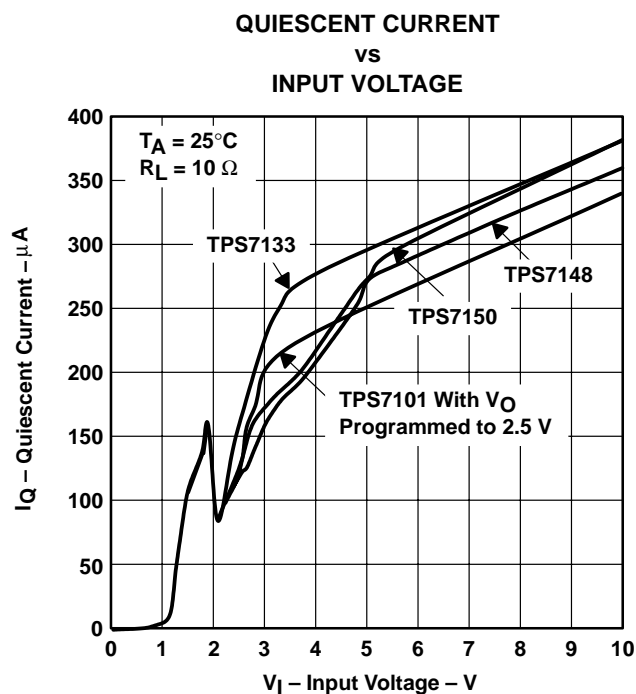


Figure 6

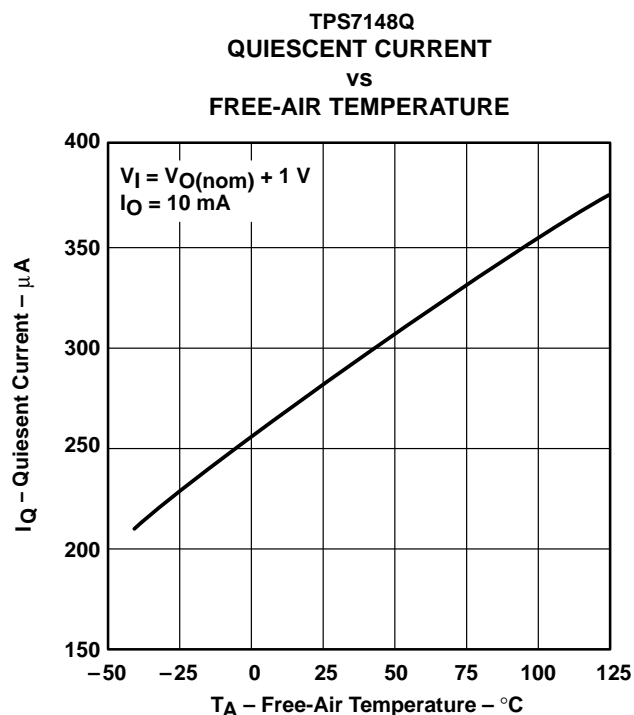


Figure 7

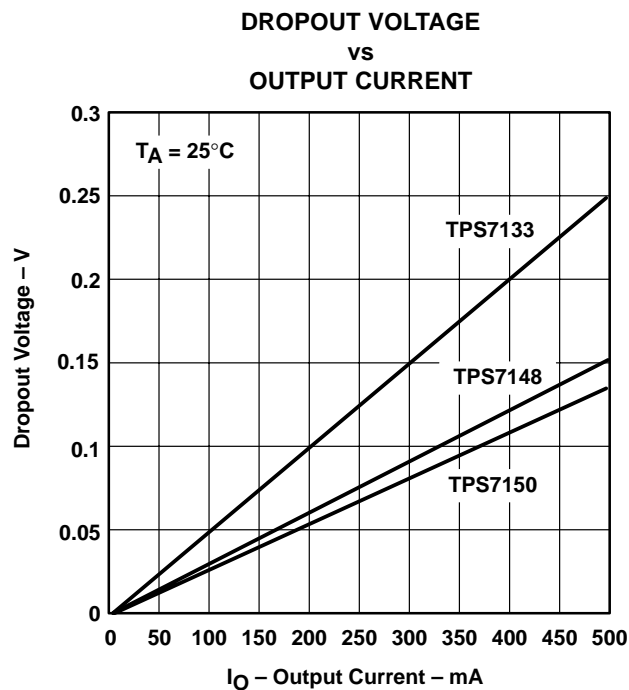


Figure 8

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
 TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
 LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TYPICAL CHARACTERISTICS

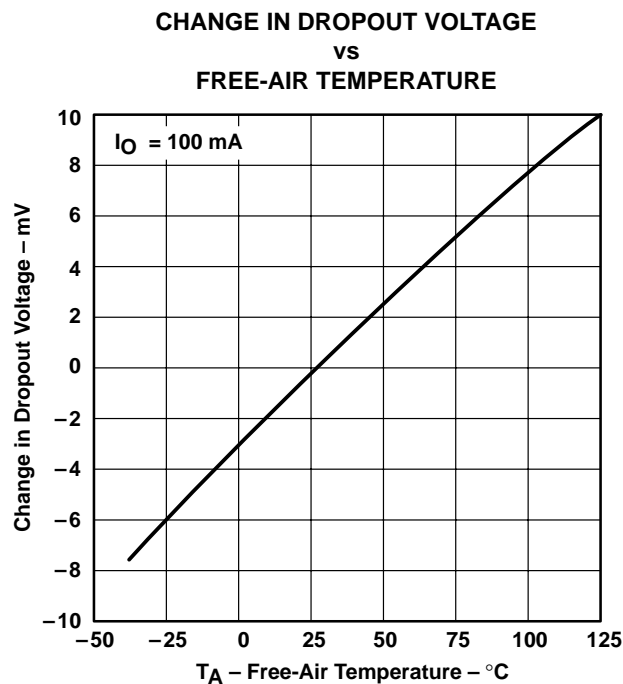


Figure 9

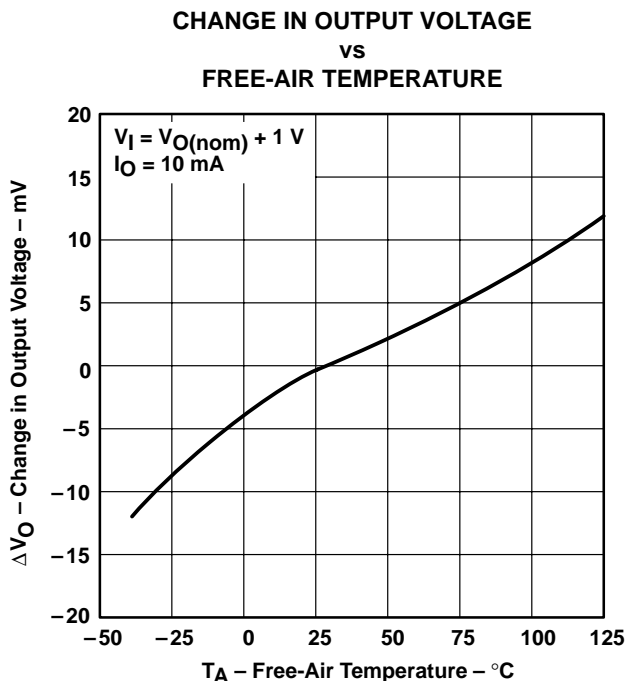


Figure 10

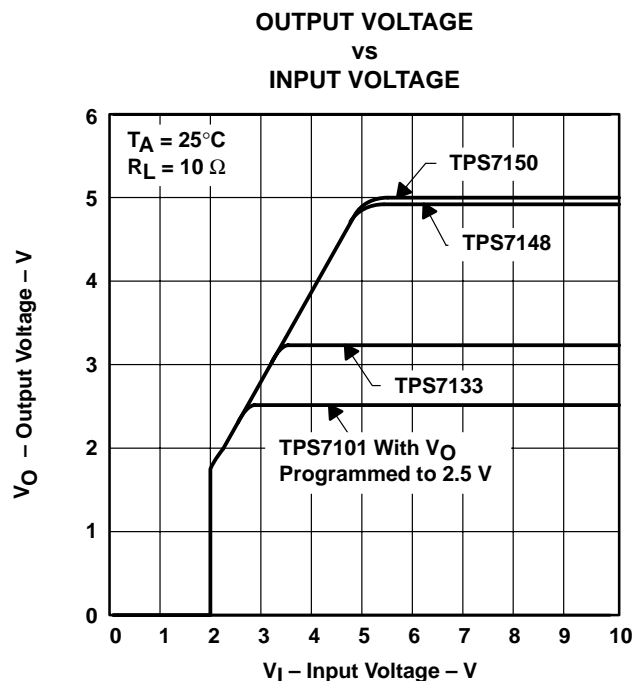


Figure 11

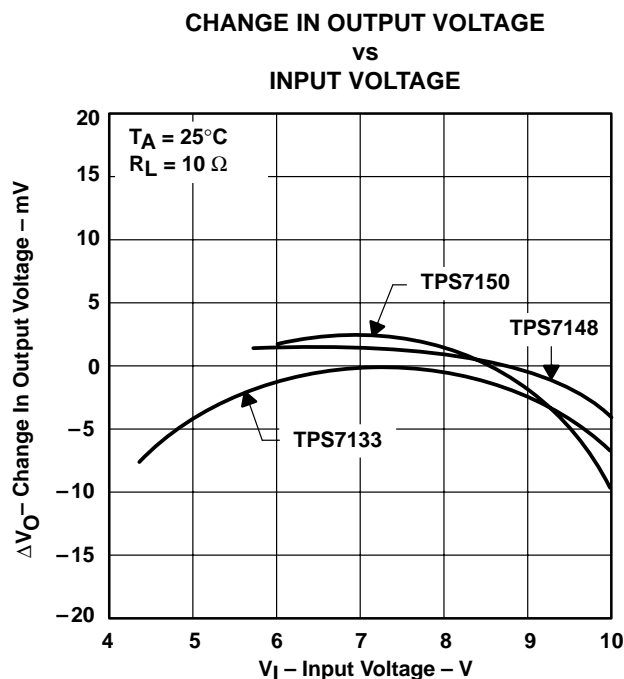


Figure 12

TYPICAL CHARACTERISTICS

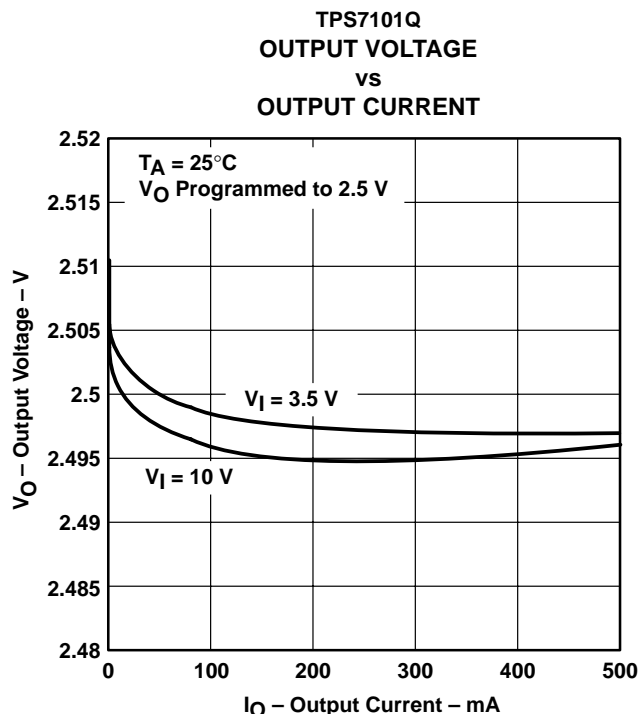


Figure 13

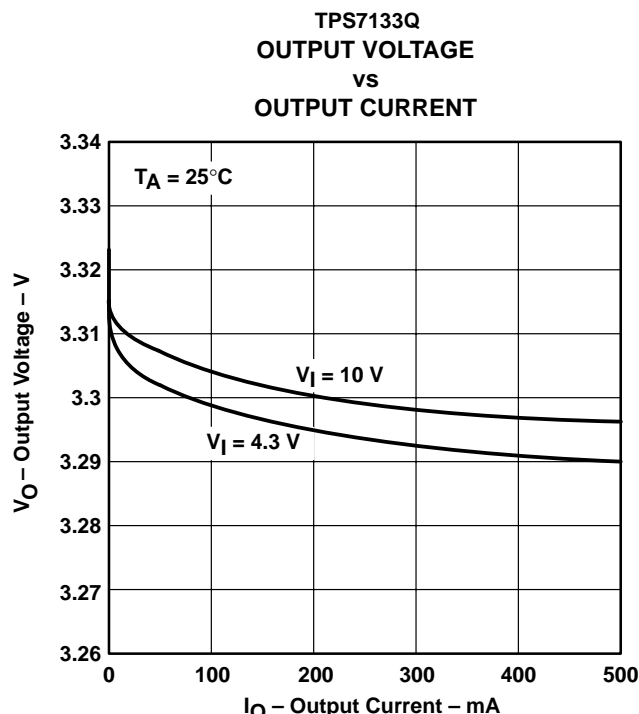


Figure 14

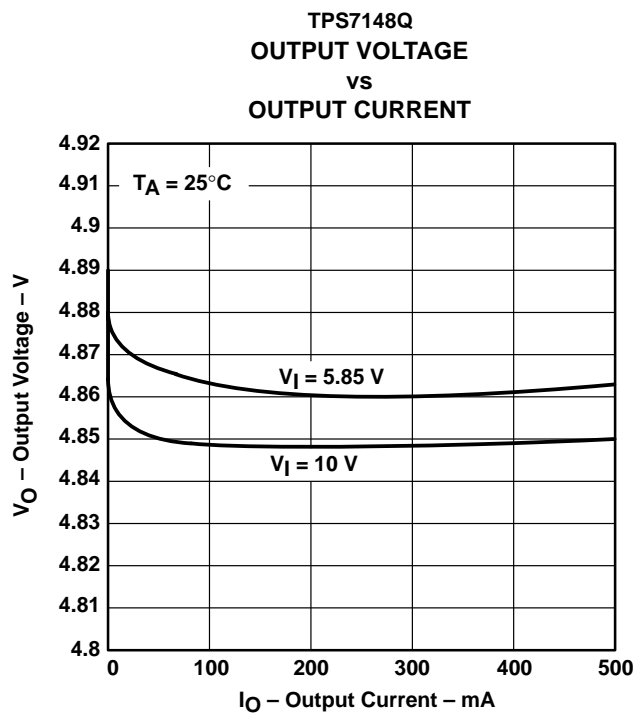


Figure 15

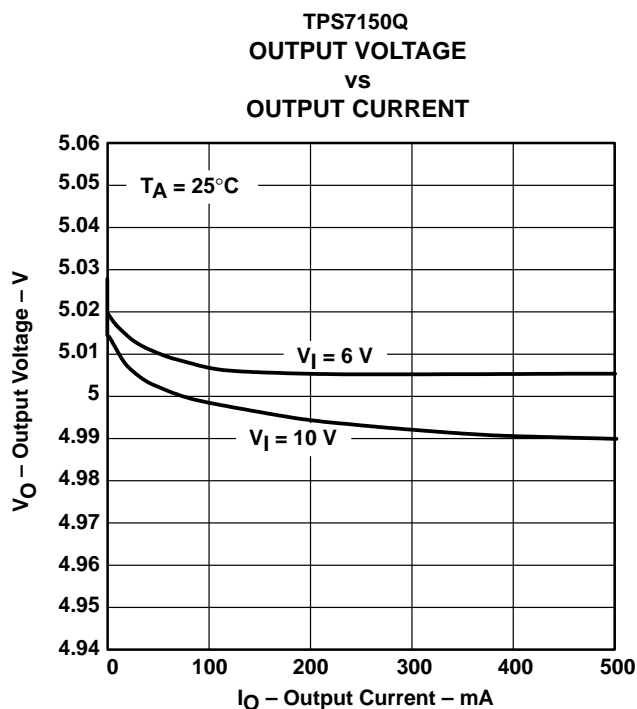


Figure 16

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TYPICAL CHARACTERISTICS

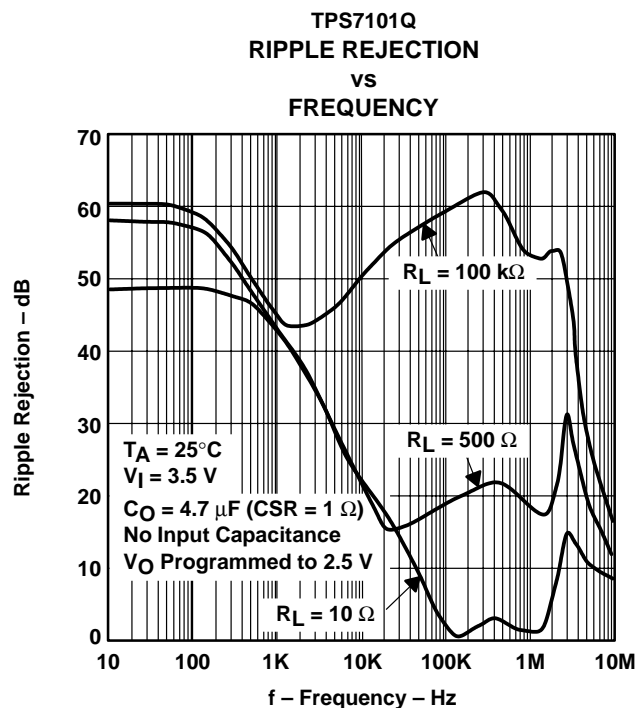


Figure 17

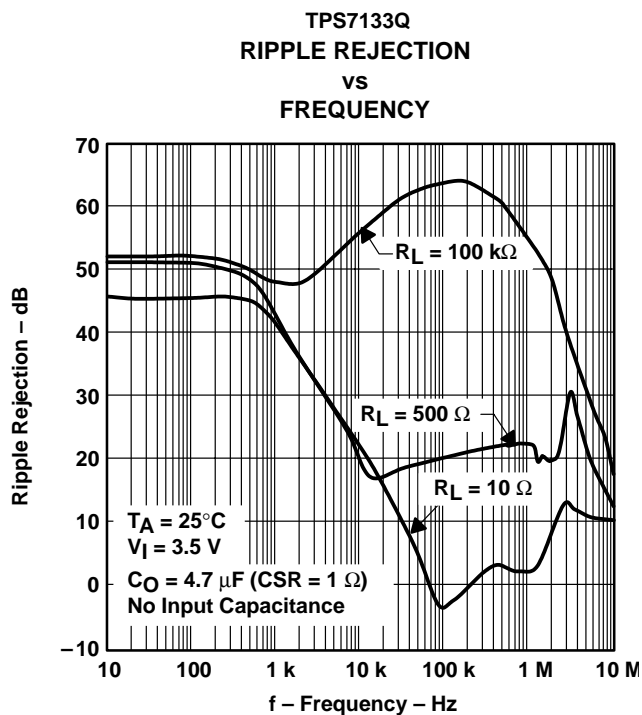


Figure 18

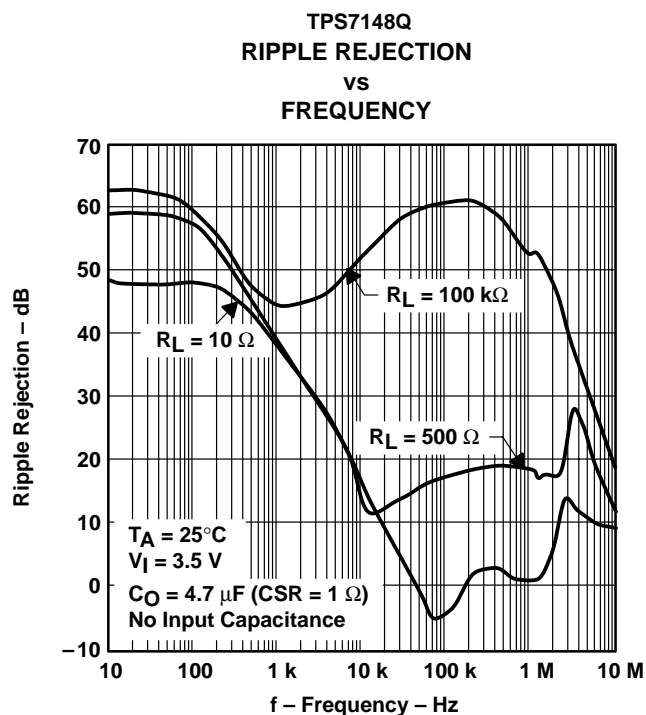


Figure 19

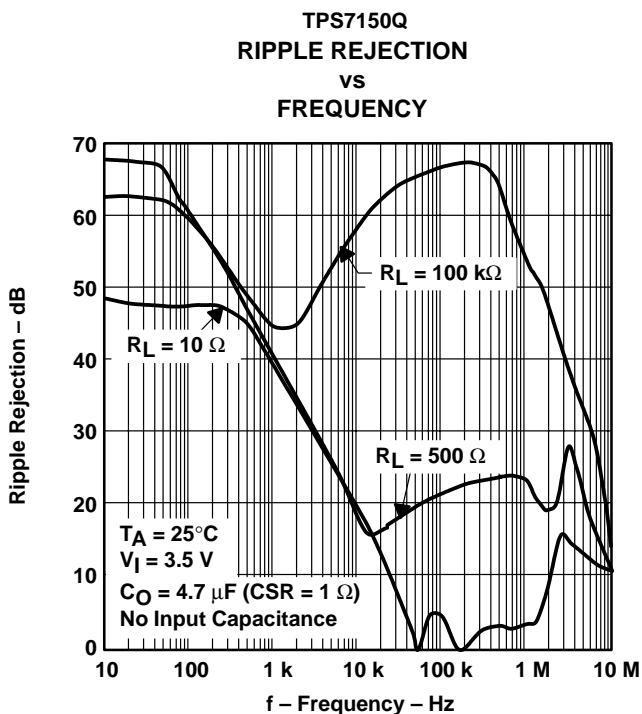


Figure 20

TYPICAL CHARACTERISTICS

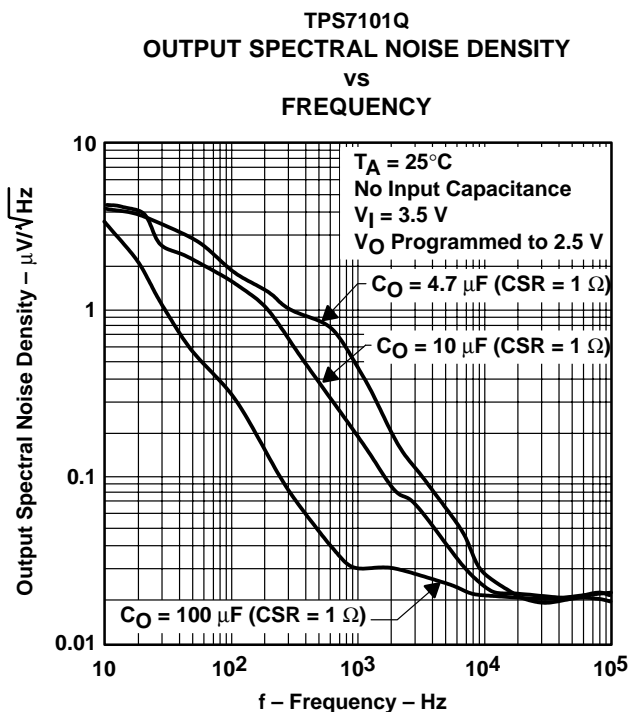


Figure 21

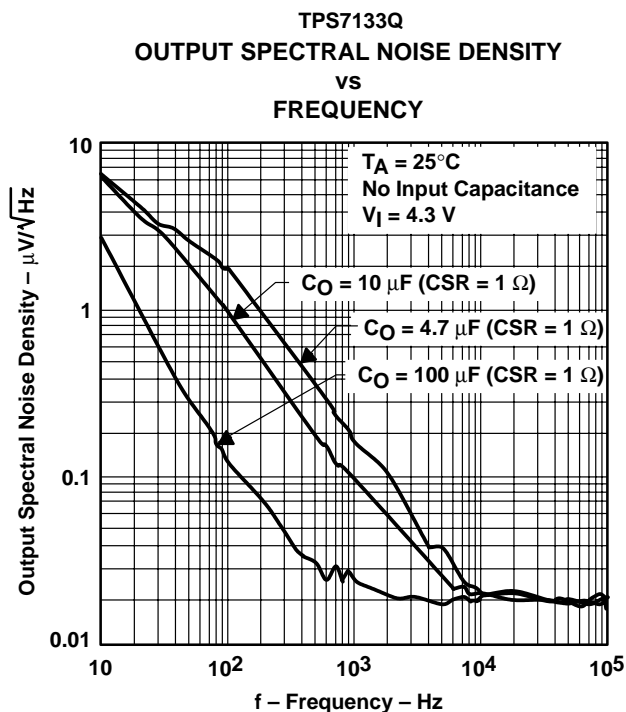


Figure 22

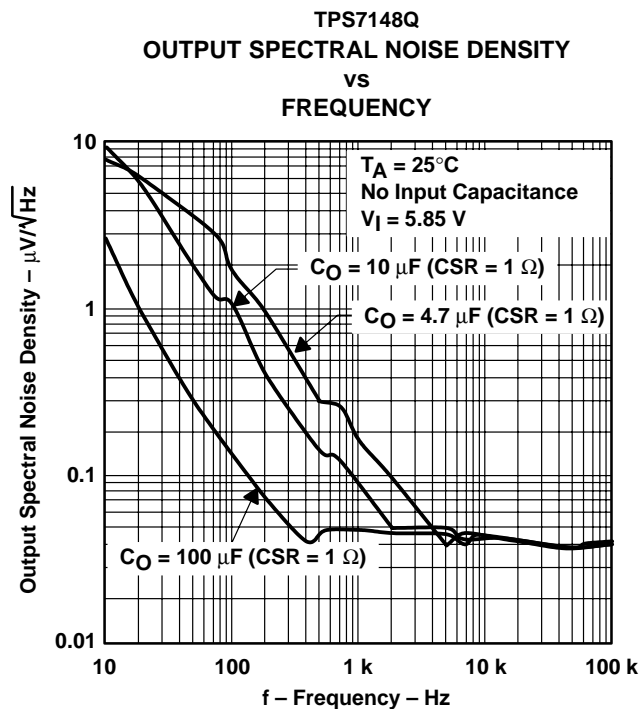


Figure 23

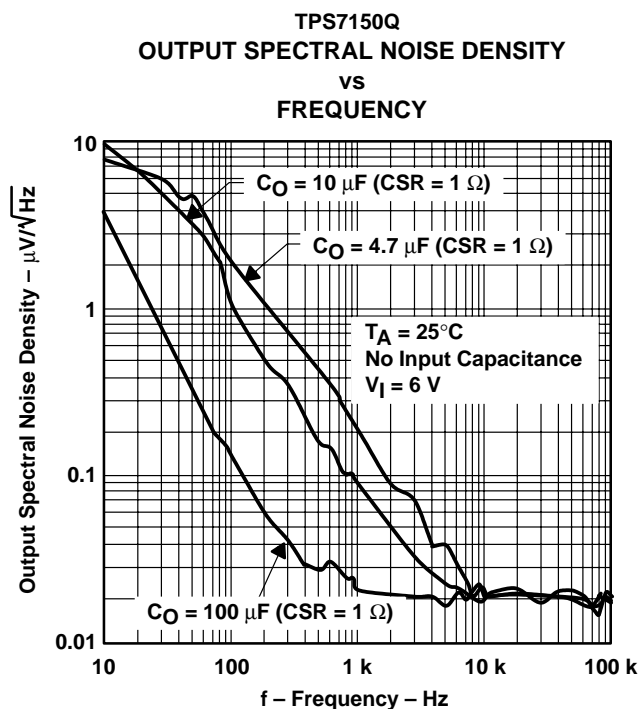


Figure 24

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TYPICAL CHARACTERISTICS

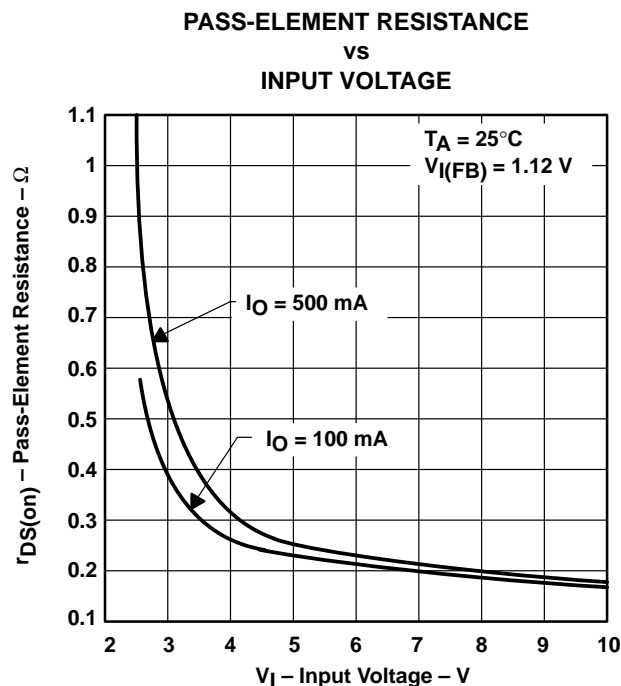


Figure 25

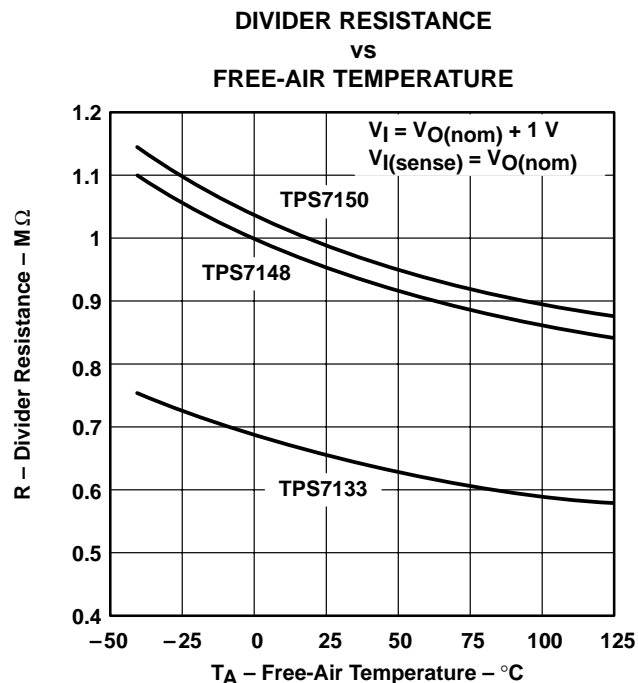


Figure 26

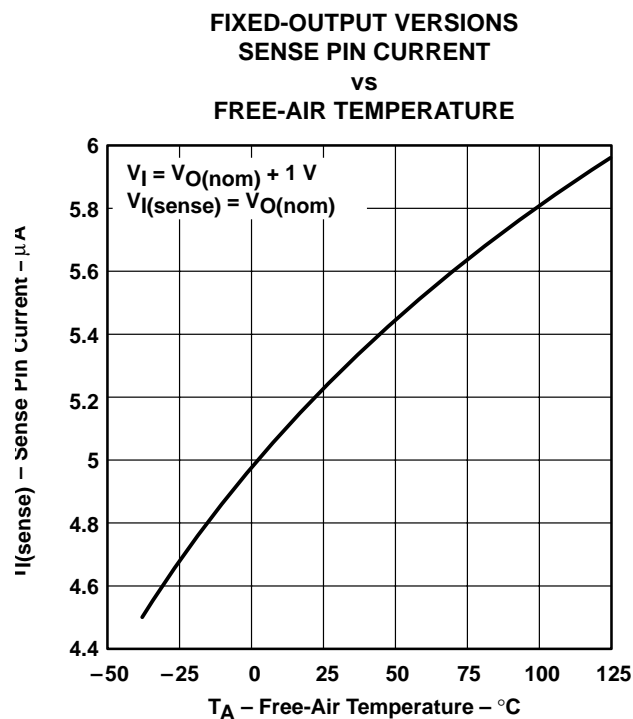


Figure 27

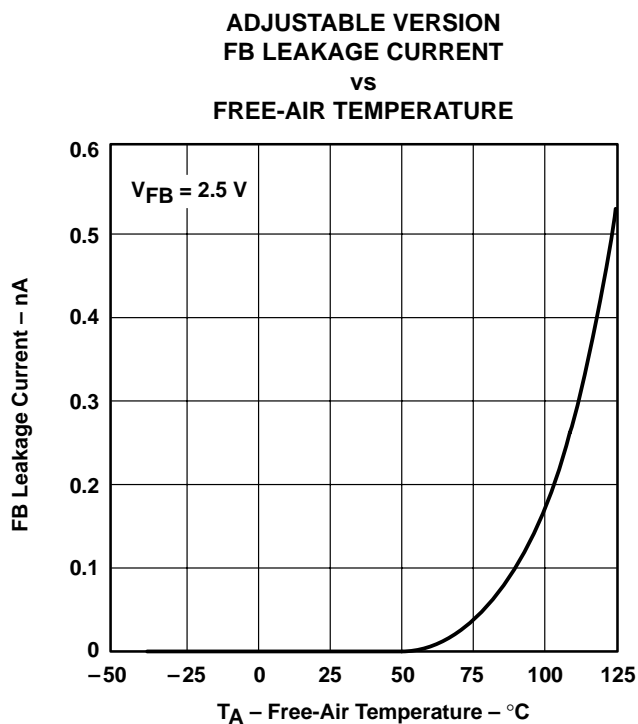


Figure 28

TYPICAL CHARACTERISTICS

MINIMUM INPUT VOLTAGE FOR ACTIVE
 PASS ELEMENT
 vs
 FREE-AIR TEMPERATURE

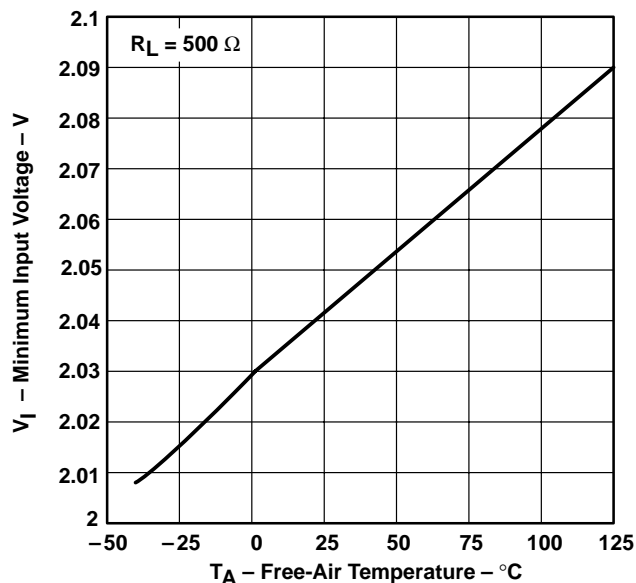


Figure 29

MINIMUM INPUT VOLTAGE FOR VALID
 POWER GOOD (PG)
 vs
 FREE-AIR TEMPERATURE

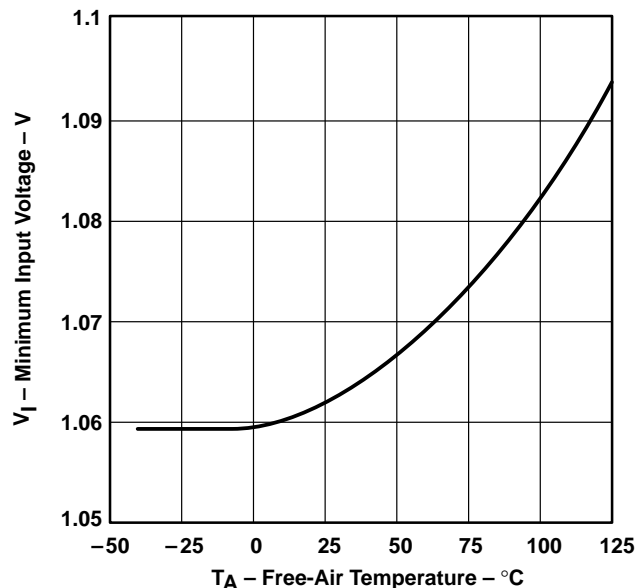


Figure 30

$\overline{\text{EN}}$ INPUT CURRENT
 vs
 FREE-AIR TEMPERATURE

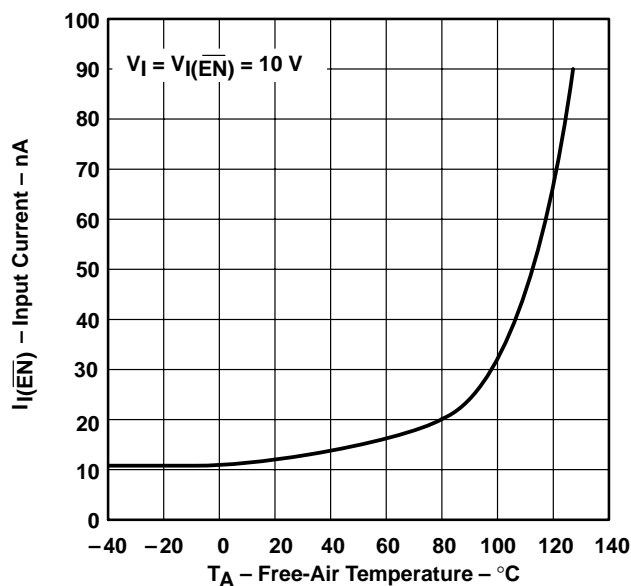


Figure 31

TYPICAL CHARACTERISTICS

OUTPUT VOLTAGE RESPONSE FROM ENABLE ($\overline{\text{EN}}$)

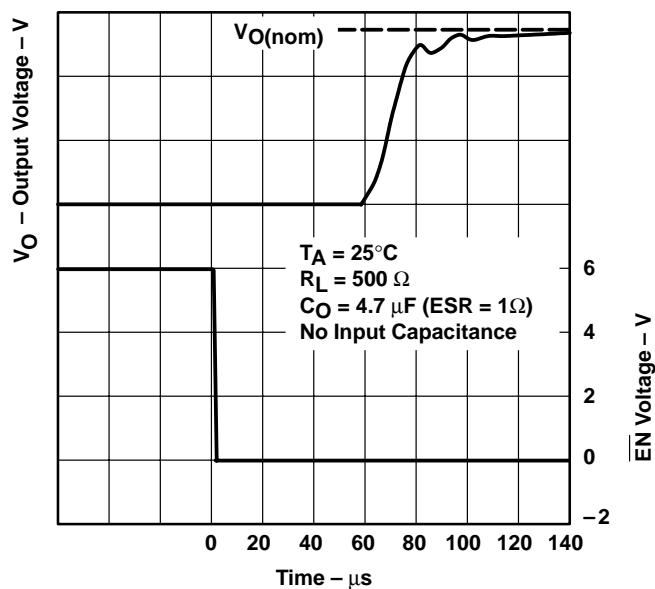


Figure 32

POWER-GOOD (PG) VOLTAGE vs OUTPUT VOLTAGE

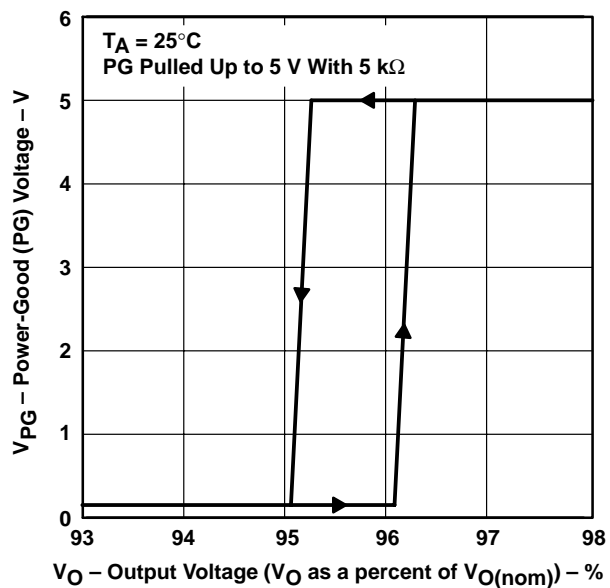


Figure 33

TYPICAL CHARACTERISTICS

TYPICAL REGIONS OF STABILITY
 COMPENSATION SERIES RESISTANCE
 VS
 OUTPUT CURRENT

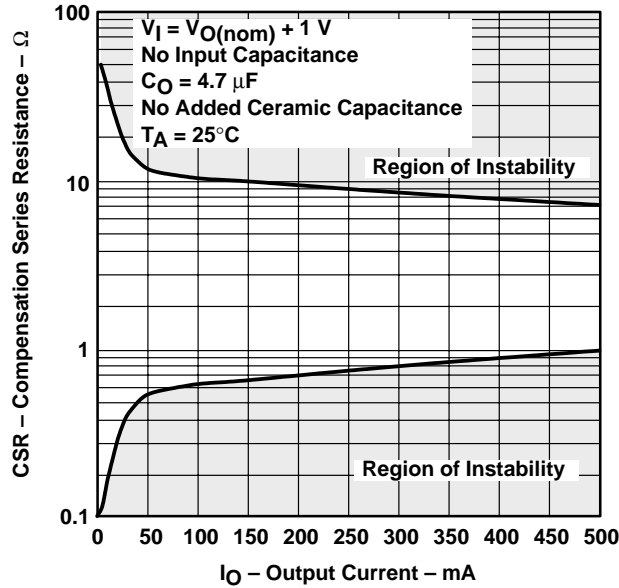


Figure 34

TYPICAL REGIONS OF STABILITY
 COMPENSATION SERIES RESISTANCE
 VS
 OUTPUT CURRENT

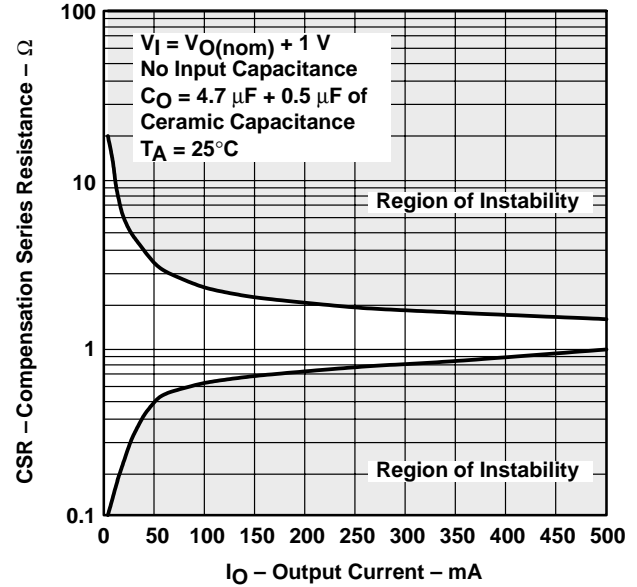


Figure 35

TYPICAL REGIONS OF STABILITY
 COMPENSATION SERIES RESISTANCE
 VS
 ADDED CERAMIC CAPACITANCE

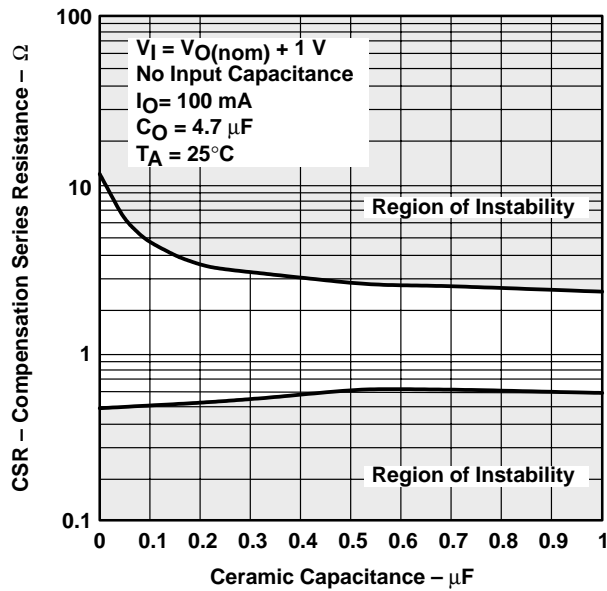


Figure 36

TYPICAL REGIONS OF STABILITY
 COMPENSATION SERIES RESISTANCE
 VS
 ADDED CERAMIC CAPACITANCE

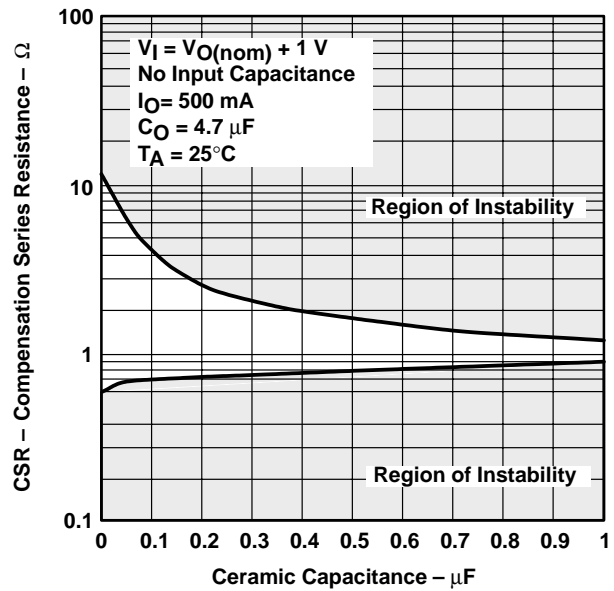


Figure 37

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
 TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
 LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

TYPICAL CHARACTERISTICS

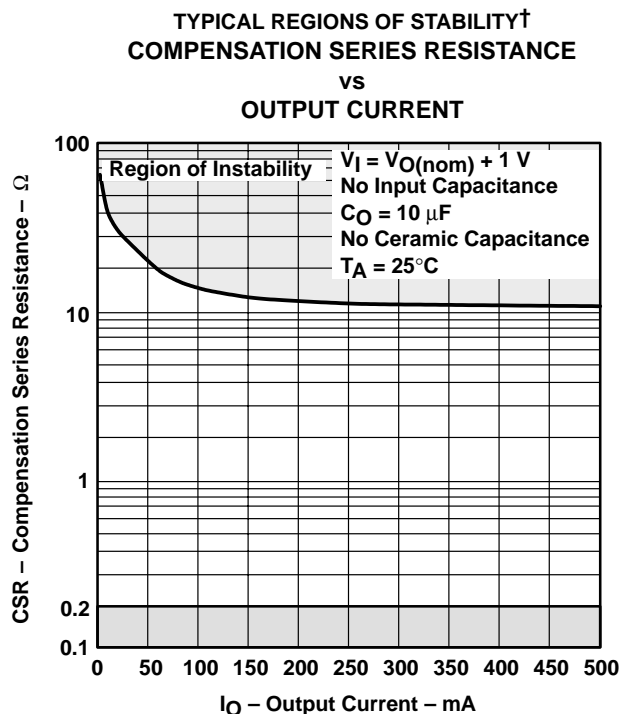


Figure 38

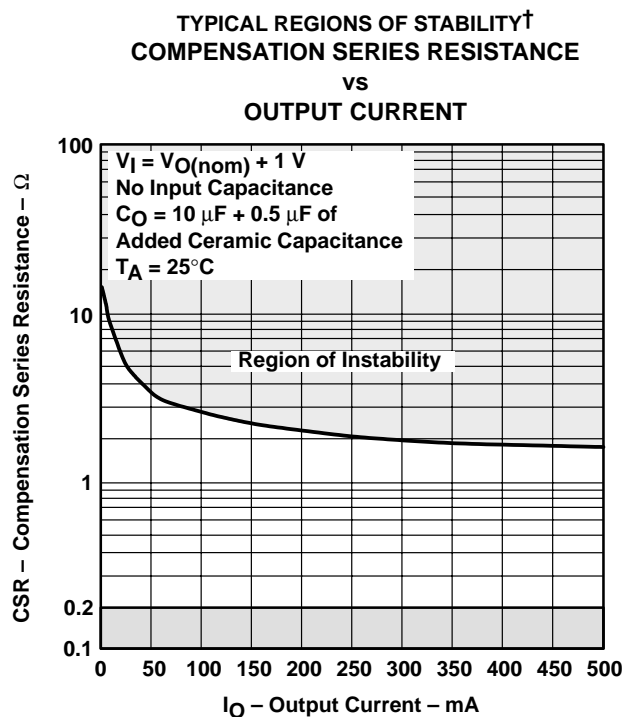


Figure 39

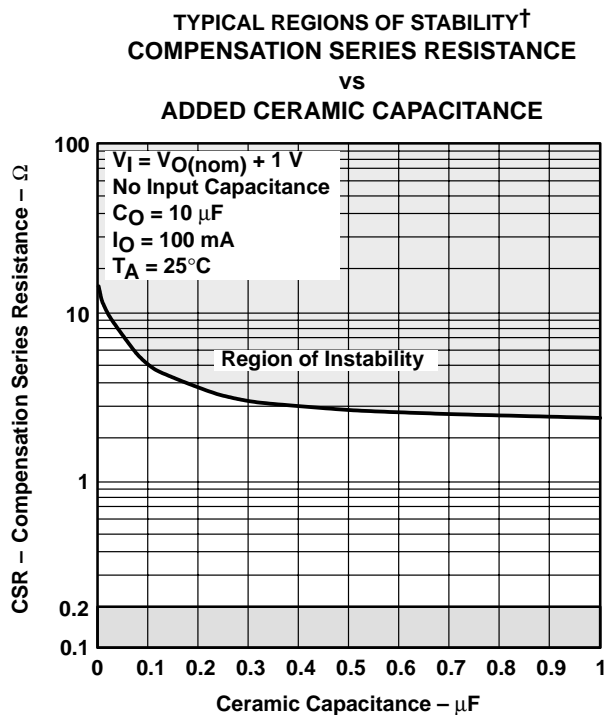


Figure 40

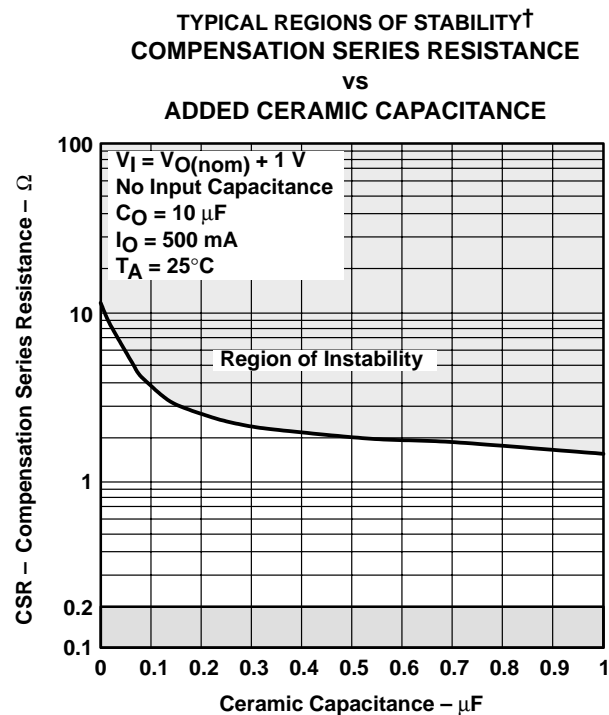


Figure 41

† CSR values below 0.1 Ω are not recommended.

TYPICAL CHARACTERISTICS

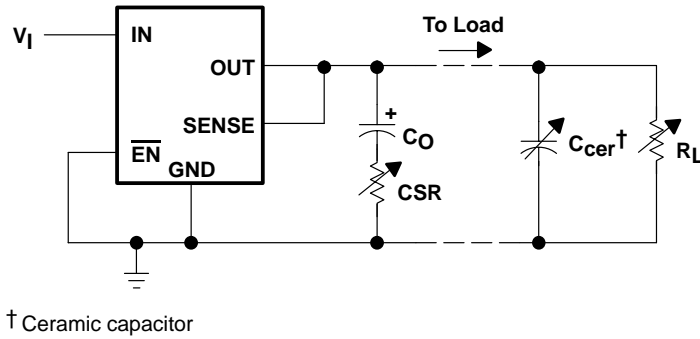


Figure 42. Test Circuit for Typical Regions of Stability (Figures 34 through 41)

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q
TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y
LOW-DROPOUT VOLTAGE REGULATORS

SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

APPLICATION INFORMATION

The TPS71xx series of low-dropout (LDO) regulators is designed to overcome many of the shortcomings of earlier-generation LDOs, while adding features such as a power-saving shutdown mode and a power-good indicator. The TPS71xx family includes three fixed-output voltage regulators: the TPS7133 (3.3 V), the TPS7148 (4.85 V), and the TPS7150 (5 V). The family also offers an adjustable device, the TPS7101 (adjustable from 1.2 V to 9.75 V).

device operation

The TPS71xx, unlike many other LDOs, features very low quiescent currents that remain virtually constant even with varying loads. Conventional LDO regulators use a pnp-pass element, the base current of which is directly proportional to the load current through the regulator ($I_B = I_C/\beta$). Close examination of the data sheets reveals that those devices are typically specified under near no-load conditions; actual operating currents are much higher as evidenced by typical quiescent current versus load current curves. The TPS71xx uses a PMOS transistor to pass current; because the gate of the PMOS element is voltage driven, operating currents are low and invariable over the full load range. The TPS71xx specifications reflect actual performance under load.

Another pitfall associated with the pnp-pass element is its tendency to saturate when the device goes into dropout. The resulting drop in β forces an increase in I_B to maintain the load. During power up, this translates to large start-up currents. Systems with limited supply current may fail to start up. In battery-powered systems, it means rapid battery discharge when the voltage decays below the minimum required for regulation. The TPS71xx quiescent current remains low even when the regulator drops out, eliminating both problems.

Included in the TPS71xx family is a 4.85-V regulator, the TPS7148. Designed specifically for 5-V cellular systems, its 4.85-V output, regulated to within $\pm 2\%$, allows for operation within the low-end limit of 5-V systems specified to $\pm 5\%$ tolerance; therefore, maximum regulated operating lifetime is obtained from a battery pack before the device drops out, adding crucial talk minutes between charges.

The TPS71xx family also features a shutdown mode that places the output in the high-impedance state (essentially equal to the feedback-divider resistance) and reduces quiescent current to under 2 μA . If the shutdown feature is not used, $\overline{\text{EN}}$ should be tied to ground. Response to an enable transition is quick; regulated output voltage is reestablished in typically 120 μs .

minimum load requirements

The TPS71xx family is stable even at zero load; no minimum load is required for operation.

SENSE-pin connection

The SENSE pin of fixed-output devices must be connected to the regulator output for proper functioning of the regulator. Normally, this connection should be as short as possible; however, the connection can be made near a critical circuit (remote sense) to improve performance at that point. Internally, SENSE connects to a high-impedance wide-bandwidth amplifier through a resistor-divider network and noise pickup feeds through to the regulator output. Routing the SENSE connection to minimize/avoid noise pickup is essential. Adding an RC network between SENSE and OUT to filter noise is not recommended because it can cause the regulator to oscillate.

external capacitor requirements

An input capacitor is not required; however, a ceramic bypass capacitor (0.047 pF to 0.1 μF) improves load transient response and noise rejection if the TPS71xx is located more than a few inches from the power supply. A higher-capacitance electrolytic capacitor may be necessary if large (hundreds of milliamps) load transients with fast rise times are anticipated.




APPLICATION INFORMATION

external capacitor requirements (continued)

As with most LDO regulators, the TPS71xx family requires an output capacitor for stability. A 10-μF solid-tantalum capacitor connected from the regulator output to ground is sufficient to ensure stability over the full load range (see Figure 43). Adding high-frequency ceramic or film capacitors (such as power-supply bypass capacitors for digital or analog ICs) can cause the regulator to become unstable unless the ESR of the tantalum capacitor is less than 1.2 Ω over temperature. Where component height and/or mounting area is a problem, physically smaller, 10-μF devices can be screened for ESR. Figures 34 through 41 show the stable regions of operation using different values of output capacitance with various values of ceramic load capacitance.

In applications with little or no high-frequency bypass capacitance (< 0.2 μF), the output capacitance can be reduced to 4.7 μF, provided ESR is maintained between the values shown in figures 34 through 41. Because minimum capacitor ESR is seldom if ever specified, it may be necessary to add a 0.5-Ω to 1-Ω resistor in series with the capacitor and limit ESR to 1.5 Ω maximum.

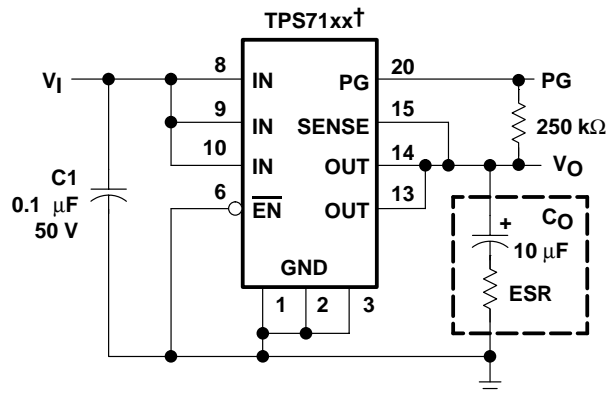

† TPS7133, TPS7148, TPS7150 (fixed-voltage options)

Figure 43. Typical Application Circuit

programming the TPS7101 adjustable LDO regulator

Programming the adjustable regulators is accomplished using an external resistor divider as shown in Figure 44. The equation governing the output voltage is:

$$V_O = V_{\text{ref}} \cdot \left(1 + \frac{R1}{R2}\right)$$

where

V_{ref} = reference voltage, 1.178 V typ

TPS7101Q, TPS7133Q, TPS7148Q, TPS7150Q TPS7101Y, TPS7133Y, TPS7148Y, TPS7150Y LOW-DROPOUT VOLTAGE REGULATORS


SLVS092G – NOVEMBER 1994 – REVISED JANUARY 2003

APPLICATION INFORMATION

programming the TPS7101 adjustable LDO regulator (continued)

Resistors R1 and R2 should be chosen for approximately 7- μ A divider current. A recommended value for R2 is 169 k Ω with R1 adjusted for the desired output voltage. Smaller resistors can be used, but offer no inherent advantage and consume more power. Larger values of R1 and R2 should be avoided as leakage currents at FB introduce an error. Solving equation 1 for R1 yields a more useful equation for choosing the appropriate resistance:

$$R1 = \left(\frac{V_O}{V_{ref}} - 1 \right) \cdot R2$$

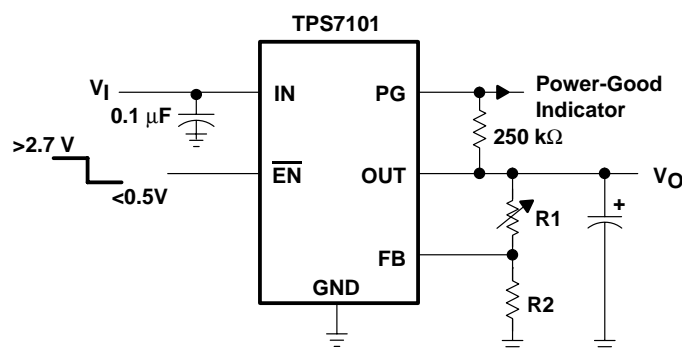

OUTPUT VOLTAGE
PROGRAMMING GUIDE

| OUTPUT VOLTAGE | R1 | R2 | UNIT |
|----------------|-----|-----|------------|
| 2.5 V | 191 | 169 | k Ω |
| 3.3 V | 309 | 169 | k Ω |
| 3.6 V | 348 | 169 | k Ω |
| 4 V | 402 | 169 | k Ω |
| 5 V | 549 | 169 | k Ω |
| 6.4 V | 750 | 169 | k Ω |

Figure 44. TPS7101 Adjustable LDO Regulator Programming

power-good indicator

The TPS71xx features a power-good (PG) output that can be used to monitor the status of the regulator. The internal comparator monitors the output voltage: when the output drops to between 92% and 98% of its nominal regulated value, the PG output transistor turns on, taking the signal low. The open-drain output requires a pullup resistor. If not used, it can be left floating. PG can be used to drive power-on reset circuitry or as a low-battery indicator. PG does not assert itself when the regulated output voltage falls outside the specified 2% tolerance, but instead reports an output voltage low, relative to its nominal regulated value.

regulator protection

The TPS71xx PMOS-pass transistor has a built-in back diode that safely conducts reverse currents when the input voltage drops below the output voltage (e.g., during power down). Current is conducted from the output to the input and is not internally limited. When extended reverse voltage is anticipated, external limiting may be appropriate.

The TPS71xx also features internal current limiting and thermal protection. During normal operation, the TPS71xx limits output current to approximately 1 A. When current limiting engages, the output voltage scales back linearly until the overcurrent condition ends. While current limiting is designed to prevent gross device failure, care should be taken not to exceed the power dissipation ratings of the package. If the temperature of the device exceeds 165°C, thermal-protection circuitry shuts it down. Once the device has cooled, regulator operation resumes.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|-----------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS7101QD | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7101Q |
| TPS7101QD.A | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7101Q |
| TPS7101QDR | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7101Q |
| TPS7101QDR.A | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7101Q |
| TPS7101QP | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7101QP |
| TPS7101QP.A | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7101QP |
| TPS7101QPWR | Active | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | PT7101 |
| TPS7101QPWR.A | Active | Production | TSSOP (PW) 20 | 2000 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | PT7101 |
| TPS7133QD | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7133Q |
| TPS7133QD.A | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7133Q |
| TPS7133QDR | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7133Q |
| TPS7133QDR.A | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7133Q |
| TPS7133QP | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7133QP |
| TPS7133QP.A | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7133QP |
| TPS7148QD | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7148Q |
| TPS7148QD.A | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7148Q |
| TPS7148QP | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7148QP |
| TPS7148QP.A | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7148QP |
| TPS7150QD | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7150Q |
| TPS7150QD.A | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7150Q |
| TPS7150QDG4 | Active | Production | SOIC (D) 8 | 75 TUBE | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7150Q |
| TPS7150QDR | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7150Q |
| TPS7150QDR.A | Active | Production | SOIC (D) 8 | 2500 LARGE T&R | Yes | NIPDAU | Level-1-260C-UNLIM | -40 to 125 | 7150Q |
| TPS7150QP | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7150QP |
| TPS7150QP.A | Active | Production | PDIP (P) 8 | 50 TUBE | Yes | NIPDAU | N/A for Pkg Type | -40 to 125 | TPS7150QP |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS7101QDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| TPS7101QPWR | TSSOP | PW | 20 | 2000 | 330.0 | 16.4 | 6.95 | 7.0 | 1.4 | 8.0 | 16.0 | Q1 |
| TPS7133QDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |
| TPS7150QDR | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |


TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS7101QDR | SOIC | D | 8 | 2500 | 353.0 | 353.0 | 32.0 |
| TPS7101QPWR | TSSOP | PW | 20 | 2000 | 353.0 | 353.0 | 32.0 |
| TPS7133QDR | SOIC | D | 8 | 2500 | 350.0 | 350.0 | 43.0 |
| TPS7150QDR | SOIC | D | 8 | 2500 | 350.0 | 350.0 | 43.0 |

TUBE

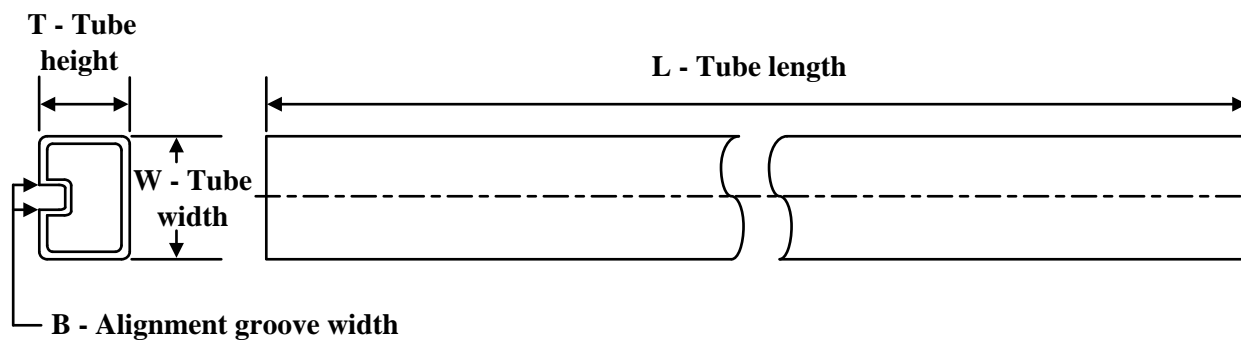

*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TPS7101QD | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| TPS7101QD.A | D | SOIC | 8 | 75 | 506.6 | 8 | 3940 | 4.32 |
| TPS7101QP | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7101QP.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7133QD | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7133QD.A | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7133QP | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7133QP.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7148QD | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7148QD.A | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7148QP | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7148QP.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7150QD | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7150QD.A | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7150QDG4 | D | SOIC | 8 | 75 | 505.46 | 6.76 | 3810 | 4 |
| TPS7150QP | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |
| TPS7150QP.A | P | PDIP | 8 | 50 | 506 | 13.97 | 11230 | 4.32 |

D0008A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE



- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Falls within JEDEC MS-001 variation BA.

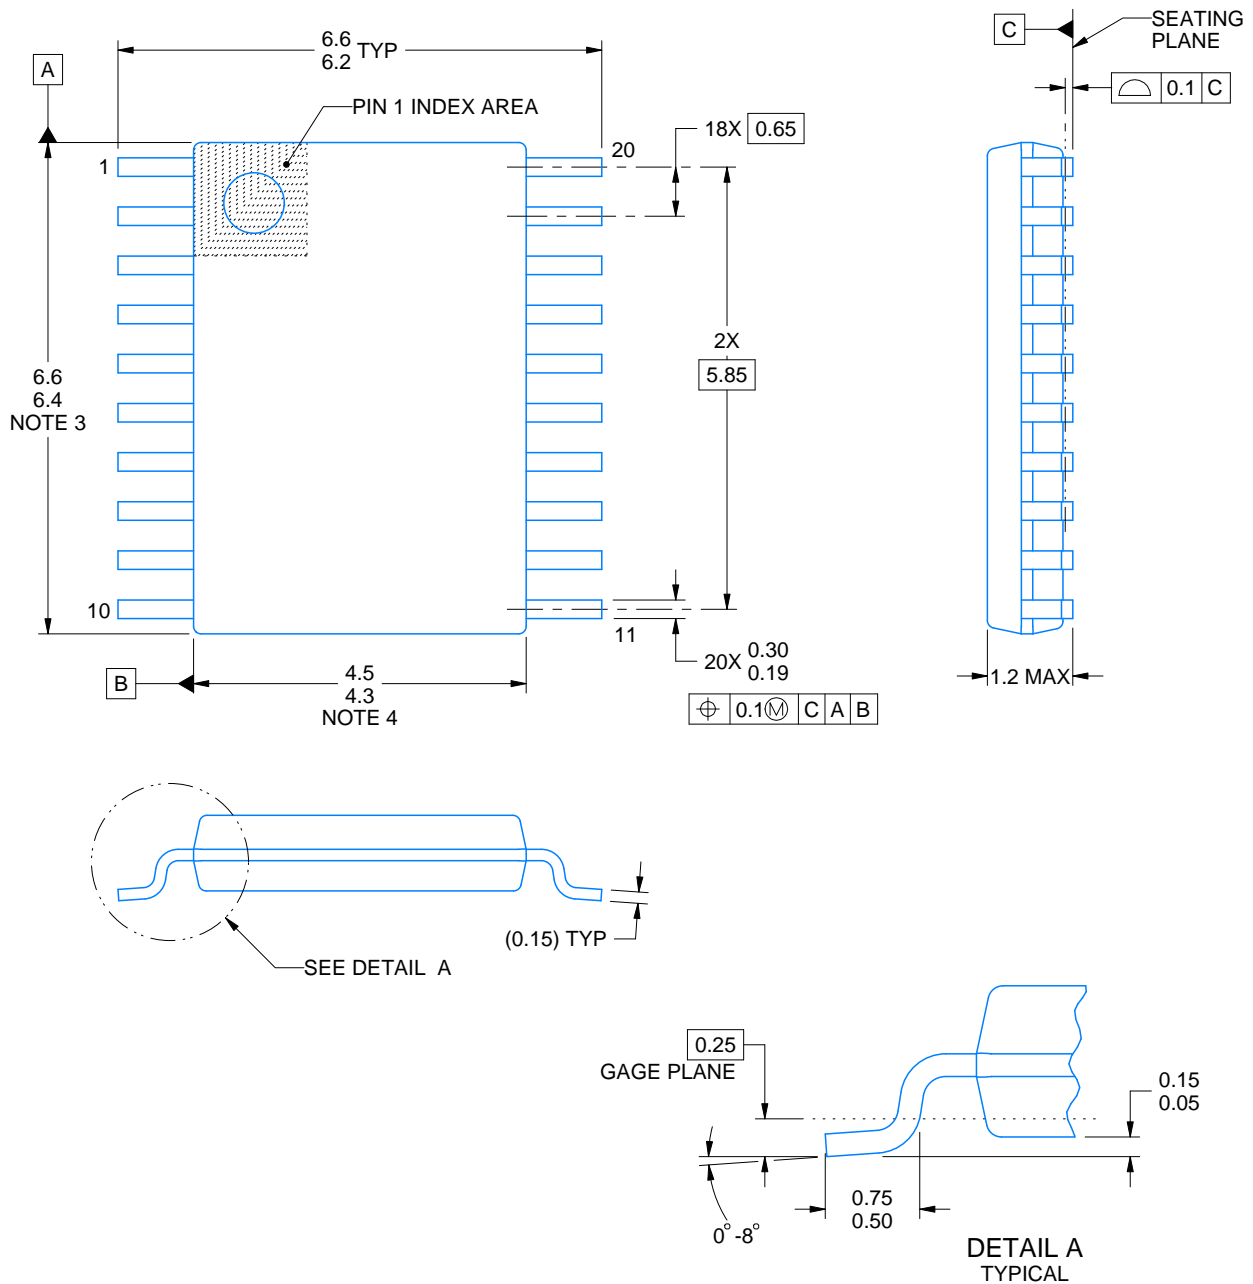

4220206/A 02/2017

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



4220206/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated