

## AN-1873 DC Parameters

### ABSTRACT

This application report discusses the DC parameters.

### Contents

1	Introduction .....	2
2	$V_{OS}$ (Input Offset Voltage) .....	2
3	$TCV_{OS}$ (Input Offset Voltage Drift) .....	3
4	$I_{IN}$ (Input Current) .....	4
5	$I_{OS}$ (Input Offset Current) .....	4
6	$TCI_{OS}$ (Input Offset Current Drift) .....	4
7	$I_B$ (Bias Current) .....	5
8	CMRR (Common Mode Rejection Ratio) .....	6
9	PSRR (Power Supply Rejection Ratio) .....	7
10	$A_{VOL}$ (Open Loop/Large Signal Voltage Gain) .....	8
11	$V_O$ (Voltage Swing) .....	8
12	$I_O$ (Output Short Circuit Current) .....	9
13	$I_S$ (Supply Current) .....	9
14	CMVR (Common Mode Voltage Range) .....	9

### List of Figures

1	Offset Voltage vs. $V_{CM}$ for LMP7731 (Typical Characteristics) .....	2
2	Percentage vs. $TCV_{OS}$ Distribution for LMP7731 (Typical Characteristics) .....	3
3	Input Bias Current vs. $V_{CM}$ For LMP7731 (Typical Characteristics).....	5
4	Common Mode Rejection Ratio vs. Frequency For LMP7731 (Typical Characteristics) .....	6
5	Power Supply Rejection Ratio vs. Frequency For LMP7731 (Typical Characteristics).....	7

### List of Tables

1	Offset Voltage for LMP7731 (Electrical Characteristics) .....	2
2	Offset Voltage Drift for LMP7731 (Electrical Characteristics) .....	3
3	Input Current for LMP2011 (Electrical Characteristics) .....	4
4	Input Offset Current for LMP7731 (Electrical Characteristics) .....	4
5	Input Offset Current Drift for LMP7731 (Electrical Characteristics) .....	4
6	Bias Current for LMP7731 (Electrical Characteristics) .....	5
7	Common Mode Rejection Ratio for LMP7731 (Electrical Characteristics) .....	6
8	Power Supply Rejection Ratio for LMP7731 (Electrical Characteristics) .....	7
9	Large Signal Voltage Gain for LMP7731 (Electrical Characteristics) .....	8
10	Offset Voltage for LMP7731 (Electrical Characteristics) .....	8
11	Output Short Circuit Current for LMP7731 (Electrical Characteristics) .....	9
12	Supply Current for LMP7731 (Electrical Characteristics) .....	9
13	Input Common-Mode Voltage Range for LMP7731 (Electrical Characteristics) .....	9

## 1 Introduction

When looking at a datasheet, it is important to see at what voltage and conditions the part is specified. The first column is the abbreviated symbol of the parameter. The second column is the name and description of the parameter. In addition, there might be some added conditions to a particular parameter located in the third column. There are three test conditions: Minimum, Typical, and Maximum values. These are guaranteed values for the performance of this part. Also, for this parameter there are bolded maximum values, which indicate the condition at temperature extremes. The last column states the unit of the parameter.

In the "Typical Characteristics" section of this datasheet, there are various curves displaying different parameters. These curves are used to help understand the specified values of the datasheet.

## 2 $V_{OS}$ (Input Offset Voltage)

In an ideal case, in any op-amp circuit, when 0V is applied to the input, 0V should be expected at the output. In actuality, there is a voltage present at the output. This voltage is due to the number of mismatches of the op-amp's internal transistors and resistance. The value of  $V_{OS}$  is determined by the voltage required to make the output voltage 0V.

**Table 1. Offset Voltage for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**


Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_{OS}$	Input Offset Voltage	$V_{CM} = 4.5V$		$\pm 6$	$\pm 50$ $\pm 120$	$\mu V$
		$V_{CM} = 0.5V$		$\pm 6$	$\pm 40$ $\pm 100$	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The part in [Figure 1](#), the LMP7731, is specified at 5V, at  $25^\circ C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ . The offset voltage to the LMP7731 is specified at  $V_{CM} = 4.5V$  and  $0.5V$  instead of the usual  $2.5V$ .

In [Figure 1](#), the offset voltage is  $-6\mu V$  at 5V and  $25^\circ C$ .

**Offset Voltage vs. Supply Voltage**

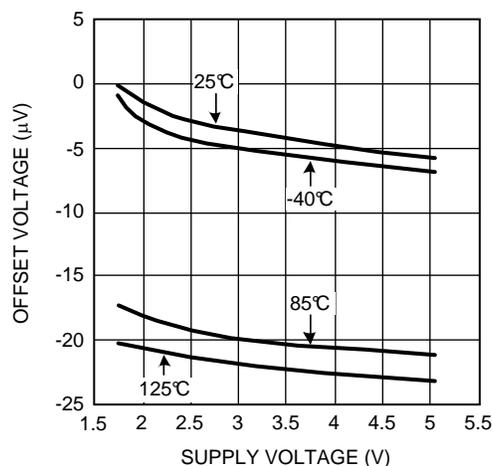

**Figure 1. Offset Voltage vs.  $V_{CM}$  for LMP7731 (Typical Characteristics)**

### 3 TCV<sub>OS</sub> (Input Offset Voltage Drift)

TCV<sub>OS</sub> is defined as the temperature coefficient of the offset voltage. The value of TCV<sub>OS</sub> is determined by the amount of change in input offset voltage per degree Celsius.

**Table 2. Offset Voltage Drift for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**


Symbol	Parameter	Conditions	Min	Typ	Max	Units
TCV <sub>OS</sub>	Input Offset Voltage Drift	V <sub>CM</sub> = 4.5V		±0.5	±1.0	μV/°C
		V <sub>CM</sub> = 0.5V		±0.2	±0.8	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for T<sub>A</sub> = 25°C, V<sup>+</sup> = 5V, V<sup>-</sup> = 0V, V<sub>CM</sub> = V<sup>+</sup>/2, R<sub>L</sub> > 10 kΩ to V<sup>+</sup>/2.

Like the offset voltage, the offset voltage drift has the conditions of V<sub>CM</sub> = 4.5V and 0.5V instead of the usual 2.5V.

In the upper left corner of Figure 2, the parameters of the graph are shown, with the supply voltage at 3.3 and 5V, common mode voltage at 0.5V and the temperature range from -40 °C to 125 °C.

The TCV<sub>OS</sub> typical value for the LMP7731 according to Figure 2 is -0.2μV/°C.

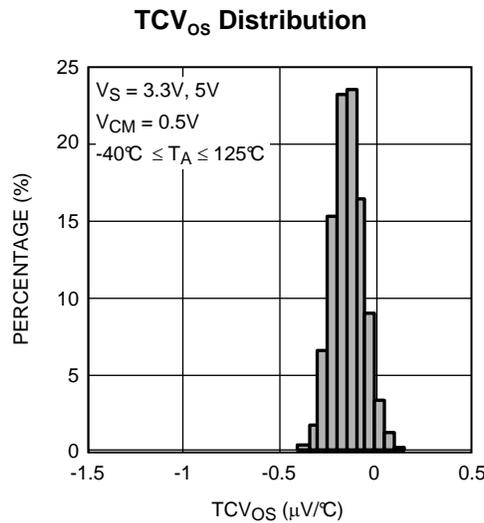

**Figure 2. Percentage vs. TCV<sub>OS</sub> Distribution for LMP7731 (Typical Characteristics)**

#### 4 $I_{IN}$ (Input Current)

An ideal op-amp has no current flowing in the input terminals. In actuality, there are small currents that flow through both input terminals. The input current is defined as the sum of the currents that flow into the op-amp.

**Table 3. Input Current for LMP2011 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_{IN}$	Input Current			-3		pA

(1) **5V DC Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_J = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = 2.5\text{V}$  and  $R_L > 1\text{M}\Omega$ .

The LMP2011 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_O = 2.5\text{V}$ ,  $R_L > 1\text{M}\Omega$ . There are no additional conditions associated with this parameter.

#### 5 $I_{OS}$ (Input Offset Current)

The difference between the currents flowing into the input terminals.

**Table 4. Input Offset Current for LMP7731 (Electrical Characteristics)<sup>(1)(2)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_{OS}$	Input Offset Current	$V_{CM} = 4.5\text{V}$		$\pm 1$	$\pm 50$ <b><math>\pm 70</math></b>	nA
		$V_{CM} = 0.5\text{V}$		$\pm 11$	$\pm 65$ <b><math>\pm 80</math></b>	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

(2) **Boldface** limits apply at the temperature extremes.

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V^+/2$ . This particular parameter has the conditions of  $V_{CM} = 4.5\text{V}$  and  $V_{CM} = 0.5\text{V}$ .

#### 6 $TCl_{OS}$ (Input Offset Current Drift)

The change in input offset current due to the change in temperature.

**Table 5. Input Offset Current Drift for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$TCl_{OS}$	Input Offset Current Drift	$V_{CM} = 0.5\text{V}$ and $V_{CM} = 4.5\text{V}$		0.0482		nA/°C

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V^+/2$ . This particular parameter has the conditions of  $V_{CM} = 0.5\text{V}$  and  $V_{CM} = 4.5\text{V}$ .

## 7 $I_B$ (Bias Current)

In an ideal op-amp circuit, there should be no current flowing in or out of the input terminals. But in actuality, there is a small current that flows into both terminals. The bias current is calculated as the average of the two input currents.

**Table 6. Bias Current for LMP7731 (Electrical Characteristics)<sup>(1)(2)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_B$	Input Bias Current	$V_{CM} = 4.5V$		$\pm 1.5$	$\pm 30$ <b><math>\pm 50</math></b>	nA
		$V_{CM} = 0.5V$		$\pm 14$	$\pm 50$ <b><math>\pm 85</math></b>	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .


(2) **Boldface** limits apply at the temperature extremes.

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ . This particular parameter has the conditions of  $V_{CM} = 0.5V$  and  $V_{CM} = 4.5V$ .

In the upper right corner of [Figure 3](#), the conditions of this graph are shown with the supply voltage at 5V.

The input bias current value at  $V_{CM} = 0.5V$  at 25°C is at 14nA

The input bias current value at  $V_{CM} = 4.5V$  at 25°C is at 1.5nA

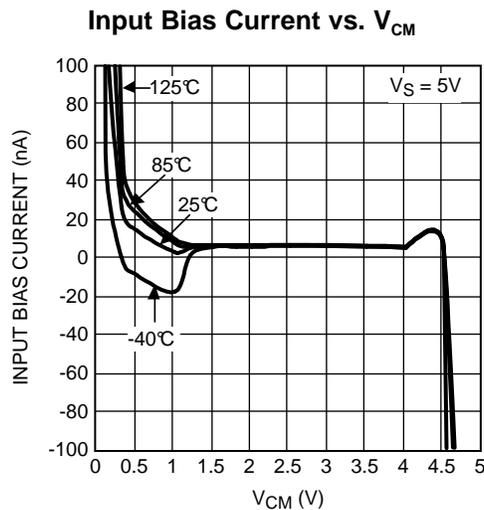

**Figure 3. Input Bias Current vs.  $V_{CM}$  For LMP7731 (Typical Characteristics)**

## 8 CMRR (Common Mode Rejection Ratio)

This parameter is calculated as the change in input offset voltage with respect to the change in the common mode voltage. CMRR is defined as  $20 \cdot \log(\Delta V_{CM} / \Delta V_{OS})$ , in decibels (dB).

**Table 7. Common Mode Rejection Ratio for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**


Symbol	Parameter	Conditions	Min	Typ	Max	Units
CMRR	Common Mode Rejection Ratio	$0.15V \leq V_{CM} \leq 0.7V$ $0.23 \leq V_{CM} \leq 0.7V$	101 89	120		dB
		$1.5V \leq V_{CM} \leq 4.85V$ $1.5V \leq V_{CM} \leq 4.77V$	105 99	130		

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ C$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ . This particular parameter has the  $V_{CM}$  conditions ranging between 0.15 and 0.7, 0.23 and 0.7, 1.5 and 4.85, and 1.5 and 4.77 volts.

In the upper right corner of [Figure 4](#), the conditions of this parameter are given as the supply voltage at 2.5, 3.3, and 5 volts.

The CMRR for the LMP7731 at 5V is measured to be 130dB.

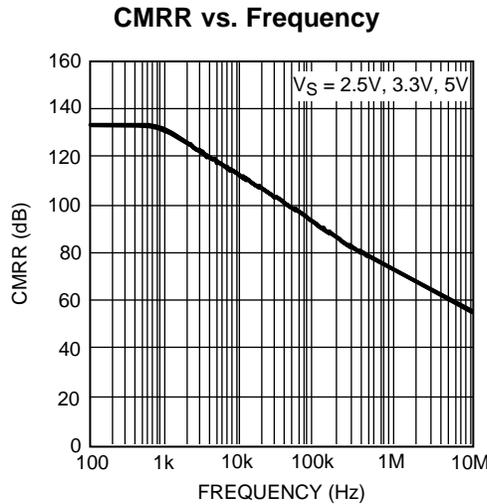

**Figure 4. Common Mode Rejection Ratio vs. Frequency For LMP7731 (Typical Characteristics)**

## 9 PSRR (Power Supply Rejection Ratio)

This parameter is calculated as the change in input offset voltage with respect to the change in power supply voltage. PSRR is defined as  $20 \cdot \log(\Delta V_{OS} / \Delta V_{SUPPLY})$ , in decibels (dB).


**Table 8. Power Supply Rejection Ratio for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
PSRR	Power Supply Rejection Ratio	$2.5V \leq V_+ \leq 5V$	111	129		dB
		$1.8V \leq V_+ \leq 5.5V$		117		

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5V$ ,  $V^- = 0V$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ . This particular parameter has the  $V^+$  conditions in the range of 2.5 to 5, and 1.8 to 5.5 volts.

The PSRR for the LMP7731 at 5V is measured to be 129dB.

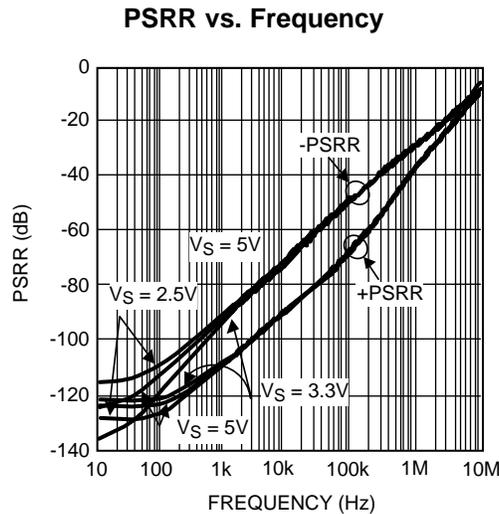

**Figure 5. Power Supply Rejection Ratio vs. Frequency For LMP7731 (Typical Characteristics)**

## 10 $A_{VOL}$ (Open Loop/Large Signal Voltage Gain)

The ratio of the output signal to the input signal (the gain) of the amplifier without external feedback, in decibels (dB).

**Table 9. Large Signal Voltage Gain for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$A_{VOL}$	Large Signal Voltage Gain	$R_L = 10\text{ k}\Omega$ to $V+/2$ $V_O = 0.5\text{V}$ to $4.5\text{V}$	112 104	130		dB
		$R_L = 2\text{ k}\Omega$ to $V+/2$ $V_O = 0.5\text{V}$ to $4.5\text{V}$	110 94	119		

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V^+/2$ . This particular parameter has the  $R_L = 10\text{k}\Omega$  to  $V^+/2$  with  $V_O$  from 0.5 to 4.5V and  $R_L = 2\text{k}\Omega$  to  $V^+/2$  with  $V_O$  from 0.5 to 4.5V.

## 11 $V_O$ (Voltage Swing)

This is the maximum peak-to-peak voltage swing that can be inputted to the circuit without clipping the signal.

Table 10. Output Swing High and Low for LMP7731 (Electrical Characteristics)

**Table 10. Offset Voltage for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$V_O$	Output Swing High	$R_L = 10\text{ k}\Omega$ to $V+/2$		8	50 75	mV from either rail
		$R_L = 2\text{ k}\Omega$ to $V+/2$		24	50 75	
	Output Swing Low	$R_L = 10\text{ k}\Omega$ to $V+/2$		9	50 75	
		$R_L = 2\text{ k}\Omega$ to $V+/2$		23	50 75	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V^+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V^+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V^+/2$ . This particular parameter has the  $R_L = 10\text{k}\Omega$  to  $V^+/2$  and  $R_L = 2\text{k}\Omega$  to  $V^+/2$ .

## 12 $I_o$ (Output Short Circuit Current)

The amount of current that is drawn from the output.

**Table 11. Output Short Circuit Current for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_o$	Output Short Circuit Current	Sourcing, $V_o = V+/2$	33 27	47		mA
		Sinking, $V_o = V+/2$ $V_{IN}(\text{diff}) = -100\text{ mV}$	30 25	49		

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V+/2$ . This particular parameter has the  $V_o = V+/2$  with  $V_{IN}(\text{diff}) = 100\text{mV}$  for sourcing and  $V_o = V+/2$  with  $V_{IN}(\text{diff}) = -100\text{mV}$  for sinking.

## 13 $I_s$ (Supply Current)

The current into the  $V_{CC+}$  and  $V_{CC-}$  inputs required to operate the op amp.

**Table 12. Supply Current for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_s$	Supply current (Per Channel)	$V_{CM} = 4.5\text{V}$		2.2	3.0 3.7	mA
		$V_{CM} = 0.5\text{V}$		2.5	3.4 4.2	

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V+/2$ . This particular parameter has the  $V_{CM} = 4.5$  and  $0.5\text{V}$ .

## 14 CMVR (Common Mode Voltage Range)

(Also called Input Voltage Range) The amplifier's common mode voltage operation range. If the common mode voltage has exceeded the limits, the op amp will not function as stated in the datasheet.

**Table 13. Input Common-Mode Voltage Range for LMP7731 (Electrical Characteristics)<sup>(1)</sup>**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
CMVR	Input Common-Mode Voltage Range	Large Signal CMRR $\geq 80\text{ dB}$	0		5	V

(1) **5V Electrical Characteristics:** Unless otherwise specified, all limits are guaranteed for  $T_A = 25^\circ\text{C}$ ,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{ k}\Omega$  to  $V+/2$ .

The LMP7731 is specified at 5V, at 25 °C,  $V^+ = 5\text{V}$ ,  $V^- = 0\text{V}$ ,  $V_{CM} = V+/2$ ,  $R_L > 10\text{k}\Omega$  to  $V+/2$ . This particular parameter has the Large Signal CMRR  $\geq 80\text{dB}$ .

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)