

Configuring TPS65950/30/20 Backup State

Gandhar Dighe

ABSTRACT

The TPS65930 and TPS65920 devices have the same backup state functionality as TPS65950 device. Hence the backup state functionality described for TPS65950 in this report also applies to TPS65930/20.

The TPS65950 uses a main battery and an optional backup battery. The backup battery powers up some modules of the TPS65950 when the main battery is removed or discharged below a certain level. This application note addresses topics related to TPS65950 BACKUP state and backup battery charging.

Contents

1	TPS65950 BACKUP State Overview	1
2	BACKUP State Configuration	4
3	Backup Battery Charging	4
4	Power Cut System Use Case	6
5	Reducing Power Consumption in BACKUP State.....	6
Appendix A	References	8

List of Figures

1	TPS65950 BACKUP State Transition.....	3
2	TPS65950 Backup Battery Charger.....	4

List of Tables

1	BBISEL Field Mapping.....	5
2	BBSSEL Field Mapping.....	5

1 TPS65950 BACKUP State Overview

The TPS65950 takes power from a main battery (VBAT) and an optional backup battery (BKBAT). This application note describes the BACKUP state configuration of the TPS65950 when a rechargeable backup battery is connected to it.

The TPS65950 operates in one of five power states:

- NO SUPPLY
- BACKUP
- WAIT-ON
- ACTIVE
- SLEEP

Note: This document uses VBACKUP to indicate the voltage level of the backup battery.

The VRTC power domain is powered by one of two internal low-dropout regulators (LDOs): VVRTC or

VBRTC. The VRTC is powered by the VVRTC LDO when VBAT > 2.7 V and it is powered by the VBRTC LDO when the TPS65950 is in BACKUP state. The input to VVRTC LDO is always VBAT, whereas the VBRTC LDO is supplied by the uninterrupted power rail (UPR). The UPR is connected to VBAT if VBAT > 2.85 V or (VBAT > 2.1 V and VBAT > VBACKUP); otherwise, the UPR is connected to BKBAT if it contains a valid supply (VBACKUP > 1.8 V).


The VRTC in the TPS65950 maintains registers and powers some modules:

- Internal 32-kHz clock
- Real-time clock (RTC)
- Twenty secure registers (SECURED_REG_x, x = A, B, ..., S and SECURED_REG_U)
- Eight general-purpose (GP) registers (BACKUP_REG_x, x = A, ..., H)
- Remaining Backup domain registers:
 - CFG_P1_TRANSITION
 - CFG_P2_TRANSITION
 - CFG_P3_TRANSITION
 - CFG_P123_TRANSITION
 - STS_BOOT
 - CFG_BOOT
 - BOOT_BCI
 - CFG_PWRANA1
 - CFG_PWRANA2
 - RTC_CTRL_REG
 - RTC_STATUS_REG

1.1 BACKUP State Transitions

Transitions between TPS65950 operating states are determined by external and internal events that can be hardware-generated or software-triggered.

[Figure 1](#) shows the transition of the TPS65950 between BACKUP and other states. It does not show transitions between other states.

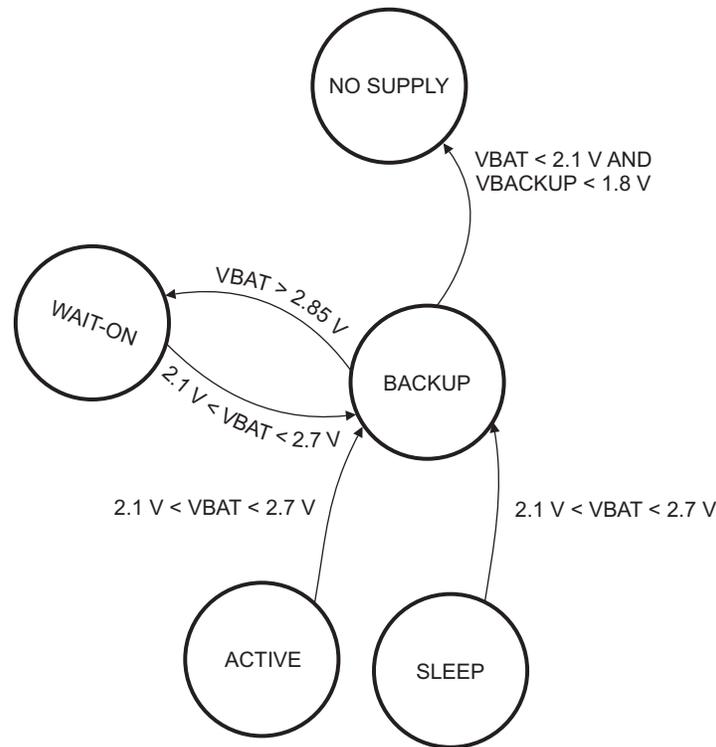

025-001

Figure 1. TPS65950 BACKUP State Transition

When the TPS65950 is in WAIT-ON, ACTIVE, or SLEEP states, it goes to BACKUP state when VBAT falls below 2.7 V. The TPS65950 remains in BACKUP state as long as VBAT > 2.1 V or VBACKUP > 1.8 V.

Note: One exception: when the user presses the PWRON (power-on) button for 8 seconds and removes the battery in the next 8 seconds, the TPS65950 enters NO SUPPLY state instead of BACKUP state, even if a valid backup battery is present. In such a situation, the backup domain registers are also reset, along with the VRRTC domain registers.

When the TPS65950 is in BACKUP state, it can move to WAIT-ON state when the VBAT level exceeds 2.85 V.

The TPS65950 moves from BACKUP state to NO SUPPLY state when VBAT < 2.1 V and VBACKUP < 1.8 V.

1.2 TPS65950-Supported Backup Batteries

The TPS65950 supports batteries or large capacitors to support backup battery functionality. Some examples of backup batteries are Manganese-Silicon-Lithium batteries (MS414) or electrochemical capacitors (XH414H).

Two of the most important parameters to consider before selecting a backup battery associated with TPS65950 are:

- Backup battery constant charging current
- Backup battery end-of-charge voltage

For information about the backup battery constant charging current and backup battery end-of-charge voltage supported by the TPS65950, see Reference 2 in [Section A.1](#).

Note: When the backup battery is not used with the TPS65950, connect the BKBAT pin to electrical ground.


2 BACKUP State Configuration

As part of TPS65950 initialization, at boot time, the software running on the host processor must perform the following minimum steps related to backup domain configuration:

- If the value of the STS_BOOT BACKUP bit is 1:
 1. The system has previously been in BACKUP state and the software must take any required action and clear the BACKUP bit by setting it to 0.
 2. Software must ensure that the STS_BOOT SETUP_DONE_BCK bit is set to 1.
- If the value of the STS_BOOT BACKUP bit is 0, the system could be coming back from NO SUPPLY or WAIT-ON state. Thus, software must check the STS_BOOT SETUP_DONE_BCK bit (assuming that software always sets this bit after configuring the backup domain registers).
 - If the value of the STS_BOOT SETUP_DONE_BCK bit is 1, the backup domain register configuration has been retained and there is no need to reconfigure those registers.
 - If the value of the STS_BOOTSETUP_DONE_BCK bit is 0, software is returning from NO-SUPPLY state. Software must configure all backup domain registers and then set the SETUP_DONE_BCK bit to 1.

3 Backup Battery Charging

Figure 2 shows the TPS65950 backup charging scheme. A rechargeable backup battery connected to the TPS65950 can be charged by a programmable LDO powered by the main battery. The backup battery charger can be controlled by the BBCHEN, BBISEL, and BBSEL fields of the BB_CFG register.

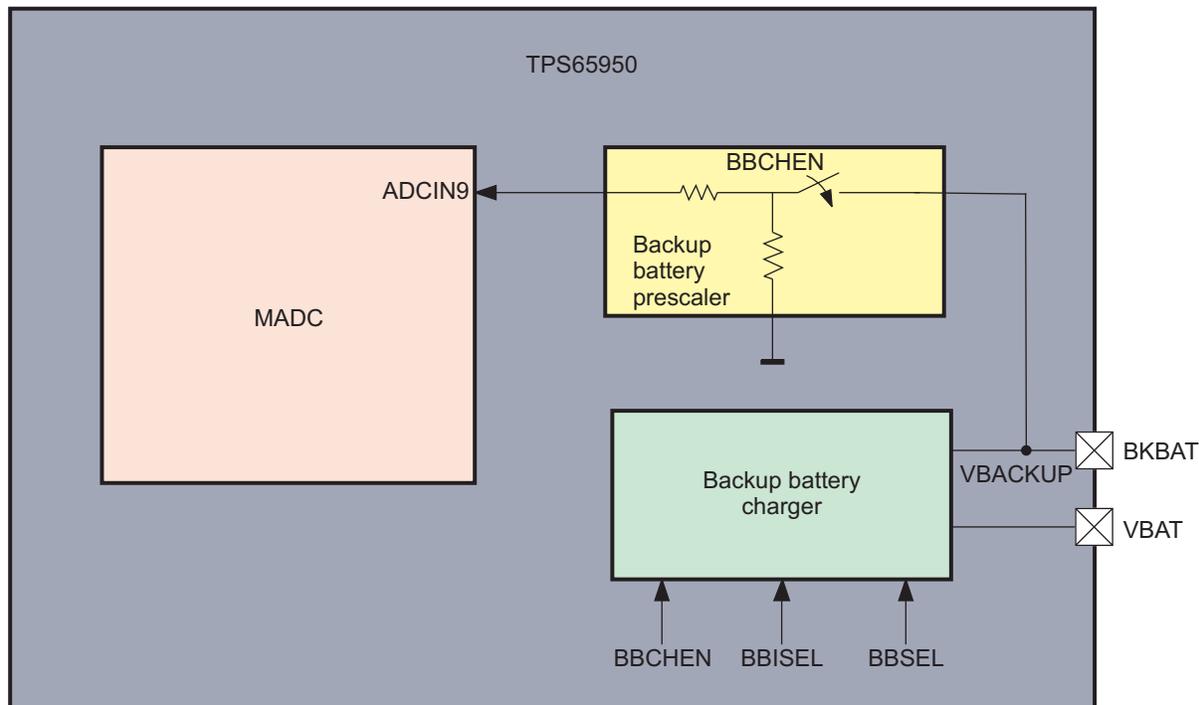

025-002

Figure 2. TPS65950 Backup Battery Charger

The BBISEL field lets the user specify the constant backup battery charging current. [Table 1](#) lists typical values of backup battery charging current for different values of the BBISEL field. For minimum and maximum values of backup battery charging current for each value of the BBISEL field, see Reference 2 in [Section A.1](#).

Table 1. BBISEL Field Mapping

BBISEL	Backup Battery Charging Current (μ A)
00	25
01	150
10	500
11	1000

The BBSEL field lets the user specify the end-of-backup battery charging voltage. [Table 2](#) lists typical values of backup battery charging voltage for different values of the BBSEL field. For minimum and maximum values of backup battery charging voltage limits for each value of the BBSEL field, see Reference 2 in [Section A.1](#).

Table 2. BBSEL Field Mapping

BBSEL	End-of-Backup Battery Charging Voltage (V)
00	2.5
01	3.0
10	3.1
11	3.2

The host processor can identify the instantaneous backup battery voltage by connecting VBACKUP to the MADC ADCIN9 channel through a resistive prescaler ($BB_CFG[BBCHEN] = 1$) and then performing a software-triggered conversion on the ADCIN9 channel. For the monitoring ADC (MADC) configuration required for software-triggered conversion requests, see Reference 1 in [Section A.1](#).

3.1 Automatic Backup Battery Charging

Automated backup battery charging is controlled by hardware. For automatic backup battery charging, perform the following steps:

1. Configure the backup battery charging current and end-of-backup battery charging voltage by programming the BBISEL and BBSEL fields, respectively. The values of these fields depend on the backup battery being used.
2. Enable backup battery charging by setting the BB_CFG BBCHEN bit to 1.

With this configuration, the backup battery starts charging automatically when $V_{BAT} > 3.2$ V and $V_{BAT} > V_{BACKUP}$. Backup battery charging automatically stops when VBACKUP reaches the specified BBSEL voltage.

Even when the charging stops, the backup battery module is still enabled, because the BBCHEN bit is set to 1.

To reduce leakage in the backup battery charger after charging completes, software can measure VBACKUP using the MADC conversion. If VBACKUP has reached the desired voltage, the backup battery module can be disabled by setting the BBCHEN bit to 0.

3.2 Software-Controlled Backup Battery Charging

Software-controlled backup battery charging is used when the backup battery is to be charged to a voltage level different from the values mentioned in [Table 2](#). For software-controlled backup battery charging, perform the following steps:

1. Configure the backup battery charging current and backup battery charging voltage limit by programming the BBISEL and BBSEL fields, respectively. The value of the battery end-of-charge voltage (the BBSEL field) selected must be greater than the required backup battery voltage.
2. Enable backup battery charging by setting the BB_CFG BBCHEN bit to 1. With this configuration, the backup battery starts charging automatically when $V_{BAT} > 3.2\text{ V}$ and $V_{BAT} > V_{BACKUP}$.
3. Request MADC conversion of V_{BACKUP} periodically and compare the conversion results with the desired backup battery voltage.
4. When the conversion results are within some limits of desired backup battery voltage, stop backup battery charging by setting the BBCHEN bit to 0.

Note: The BBCHEN bit is reset when the TRITON_RESET resource in the TPS65950 is asserted. This resource is asserted when the default ACTIVE-to-WAIT-ON sequence executes in the TPS65950. The sample warm reset sequence provided in the TPS65950 TRM (Reference 1 in [Section A.1](#)) also asserts this resource when the system undergoes warm reset. That is, backup battery charging is automatically disabled when the TPS65950 enters WAIT-ON state or when a system warm reset occurs. Therefore, the host processor must enable backup battery charging (if needed) by setting the BBCHEN bit to 1 after the system returns to ACTIVE state from WAIT-ON state or after a warm reset.

4 Power Cut System Use Case

Power cut means a momentary disconnect of the main battery (for example, when the phone is dropped and the main battery is removed momentarily). In such a case, the capacitors connected to the main battery can keep the TPS65950 in ACTIVE state for some time, depending on the load on the application processor.

To support this feature, perform the following minimum steps:

1. Unmask the MBCHG interrupt of the TPS65950 power subchip by setting the PWR_IMR1 MBCHG bit to 0
2. The MBCHG interrupt is generated when V_{BAT} falls below 3.0 V or rises above 3.2 V. Configure the MBCHG interrupt to be generated for both of these cases by setting the MBCHG_FALLING and MBCHG_RISING bits of the PWR_EDR2 register to 1.

If power is cut and if $2.7\text{ V} < V_{BAT} < 3.0\text{ V}$, the host processor receives the MBCHG interrupt. The host processor must take necessary action (save data, shut down applications, etc.). If the main battery is connected before the V_{BAT} capacitors discharge below 2.7 V, the TPS65950 remains in ACTIVE state. If the V_{BAT} level increases to more than 3.2 V, the same MBCHG interrupt is recognized by the host processor.

If the main battery remains disconnected for a longer period and the capacitors on the V_{BAT} are discharged below 2.7 V, the TPS65950 enters BACKUP or NO SUPPLY state (assuming $V_{BAT} < 2.1\text{ V}$ and $V_{BACKUP} < 1.8\text{ V}$).

5 Reducing Power Consumption in BACKUP State

To reduce power consumption in BACKUP state, the software can configure the 32-kHz clock to be in low-power mode by setting the CFG_BOOT CK32K_LOWPWR_EN bit to 1 when the TPS65950 is in ACTIVE state.

Note: The CFG_BOOT register is in the backup domain, so the value of the CK32K_LOWPWR_EN bit is retained as long as a valid battery source is present. That is, if the TPS65950 returns to ACTIVE state from BACKUP state without passing through NO SUPPLY state, the value of this bit is retained.

Note: The CK32K_LOWPWR_EN bit affects the 32-kHz clock only in BACKUP state. When the TPS65950 returns to ACTIVE state, the 32-KHz clock is in normal mode, even if the CK32K_LOWPWR_EN bit is set to 1.

Appendix A References

A.1 References

This document refers to the following related documents:

1. TPS65950 Technical Reference Manual (SWCU050A)
2. TPS65950 Data Manual (SWCS032)

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
RF/IF and ZigBee® Solutions	www.ti.com/lprf

Applications

Audio	www.ti.com/audio
Automotive	www.ti.com/automotive
Broadband	www.ti.com/broadband
Digital Control	www.ti.com/digitalcontrol
Medical	www.ti.com/medical
Military	www.ti.com/military
Optical Networking	www.ti.com/opticalnetwork
Security	www.ti.com/security
Telephony	www.ti.com/telephony
Video & Imaging	www.ti.com/video
Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated