

# ADS54J60 デュアル・チャネル、16 ビット、1.0GSPS A/D コンバータ

## 1 特長

- 16 ビット分解能、デュアル・チャネル、1GSPS の ADC
- ノイズ・フロア: -159dBFS/Hz
- スペクトラム性能 ( $f_{IN} = 170\text{MHz}$ 、-1dBFS 時)
  - SNR: 70dBFS
  - NSD: -157dBFS/Hz
  - SFDR: 86dBc (インターリーブ・トーンを含む)
  - SFDR: 89dBc (HD2、HD3、インターリーブ・トーンを除く)
- スペクトラム性能 ( $f_{IN} = 350\text{MHz}$ 、-1dBFS 時)
  - SNR: 67.5dBFS
  - NSD: -154.5dBFS/Hz
  - SFDR: 75dBc
  - SFDR: 85dBc (HD2、HD3、およびインターリーブ・トーンを除く)
- チャネル分離:  $f_{IN} = 170\text{MHz}$  のとき 100dBc
- 入力フル・スケール:  $1.9V_{PP}$
- 入力帯域幅 (3dB): 1.2GHz
- オンチップ・ディザリング
- 広帯域 DDC ブロックを搭載
- サブクラス 1 をサポートする JESD204B インターフェイス
  - 10.0Gbps で、ADC ごとに 2 レーン
  - 5.0Gbps で、ADC ごとに 4 レーン
  - マルチチップの同期をサポート
- 消費電力: 1GSPS のとき 1.35W/Ch
- パッケージ: 72 ピン VQFN (10mm × 10mm)

## 2 アプリケーション

- レーダーおよびアンテナ・アレイ
- 広帯域ワイヤレス
- ケーブル CMTS、DOCSIS 3.1 レシーバ
- 通信テスト機器
- マイクロ波受信機
- ソフトウェア無線 (SDR)
- デジタイザ
- 医療用画像処理および診断

## 3 概要

ADS54J60 は低電力で広帯域幅の 16 ビット、1.0GSPS、デュアル・チャネルの A/D コンバータ (ADC) です。信号対雑音比 (SNR) が高くなるように設計した本デバイスは、広い瞬時帯域幅にわたって最高のダイナミック・レンジを求めるアプリケーションのために -159dBFS/Hz のノイズ・フロアを実現しています。このデバイスは、最大 10Gbps のデータ転送速度の JESD204B シリアル・インターフェイスをサポートしており、ADC ごとに 2 レーンまたは 4 レーンをサポートできます。バッファ付きのアナログ入力により、広い周波数帯域にわたって入力インピーダンスが均一で、サンプルとホールドのグリッチ・エネルギーが最小化されます。必要に応じて、各 ADC チャンネルを広帯域のデジタル・ダウン・コンバータ (DDC) ブロックへ接続できます。ADS54J60 は、非常に小さな消費電力で広い入力周波数範囲にわたって、非常に優れたスプリアス・フリー・ダイナミック・レンジ (SFDR) を実現します。


JESD204B インターフェイスにより、インターフェイスの配線数を削減でき、システムの集積度を高めることができます。内蔵のフェーズ・ロック・ループ (PLL) は ADC サンプリング・クロックを逡倍し、各チャネルからの 16 ビット・データをシリアル化するためのビット・クロックを生成します。

### 製品情報

| 型番       | パッケージ     | 本体サイズ (公称)      |
|----------|-----------|-----------------|
| ADS54J60 | VQFN (72) | 10.00mm×10.00mm |

(1) 提供されているすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

### 170MHz の入力信号に対する FFT

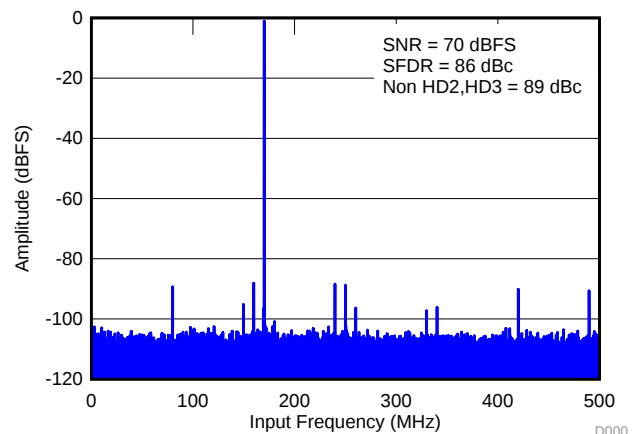

## 目次

|      |                                        |    |      |                                           |    |
|------|----------------------------------------|----|------|-------------------------------------------|----|
| 1    | 特長 .....                               | 1  | 8.3  | Feature Description .....                 | 26 |
| 2    | アプリケーション .....                         | 1  | 8.4  | Device Functional Modes .....             | 34 |
| 3    | 概要 .....                               | 1  | 8.5  | Register Maps .....                       | 45 |
| 4    | 改訂履歴 .....                             | 2  | 9    | Application and Implementation .....      | 74 |
| 5    | Device Comparison Table .....          | 5  | 9.1  | Application Information .....             | 74 |
| 6    | Pin Configuration and Functions .....  | 5  | 9.2  | Typical Application .....                 | 83 |
| 7    | Specifications .....                   | 7  | 10   | Power Supply Recommendations .....        | 85 |
| 7.1  | Absolute Maximum Ratings .....         | 7  | 10.1 | Power Sequencing and Initialization ..... | 86 |
| 7.2  | ESD Ratings .....                      | 7  | 11   | Layout .....                              | 87 |
| 7.3  | Recommended Operating Conditions ..... | 7  | 11.1 | Layout Guidelines .....                   | 87 |
| 7.4  | Thermal Information .....              | 8  | 11.2 | Layout Example .....                      | 88 |
| 7.5  | Electrical Characteristics .....       | 8  | 12   | デバイスおよびドキュメントのサポート .....                  | 89 |
| 7.6  | AC Characteristics .....               | 9  | 12.1 | ドキュメントのサポート .....                         | 89 |
| 7.7  | Digital Characteristics .....          | 12 | 12.2 | ドキュメントの更新通知を受け取る方法 .....                  | 89 |
| 7.8  | Timing Requirements .....              | 13 | 12.3 | コミュニティ・リソース .....                         | 89 |
| 7.9  | Typical Characteristics .....          | 15 | 12.4 | 商標 .....                                  | 89 |
| 7.10 | Typical Characteristics: Contour ..... | 24 | 12.5 | 静電気放電に関する注意事項 .....                       | 89 |
| 8    | Detailed Description .....             | 25 | 12.6 | Glossary .....                            | 89 |
| 8.1  | Overview .....                         | 25 | 13   | メカニカル、パッケージ、および注文情報 .....                 | 89 |
| 8.2  | Functional Block Diagram .....         | 25 |      |                                           |    |

## 4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

| Revision C (January 2017) から Revision D に変更                                                                                                      | Page |
|--------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • 170MHz の入力信号に対する FFT 変更 .....                                                                                                                  | 1    |
| • Changed the description of the CLKINM, CLKINP, SYSREFM, SYSREFP, and PDN pins in <i>Pin Functions</i> table .....                              | 6    |
| • Changed typical values across parameters in <i>AC Characteristics</i> table .....                                                              | 9    |
| • Changed value of $A_{IN}$ from $-1$ dBFS to $-3$ dBFS in 470 MHz test condition across all parameters in <i>AC Characteristics</i> table ..... | 9    |
| • Added ENOB parameter to <i>AC Characteristics</i> table .....                                                                                  | 11   |
| • Changed the first footnote in <i>Timing Characteristics</i> table .....                                                                        | 13   |
| • Changed the typical value of FOVR latency from $18 + 4$ ns to 18 ns in <i>Timing Characteristics</i> table .....                               | 13   |
| • Changed parameter name from $t_{PD}$ to $t_{PDI}$ in <i>Timing Characteristics</i> table .....                                                 | 13   |
| • Changed FFT for 170-MHz Input Signal figure .....                                                                                              | 15   |
| • Changed FFT for 470-MHz Input Signal at $-3$ dBFS figure, title, and conditions .....                                                          | 16   |
| • Changed conditions of FFT for 720-MHz Input Signal at $-6$ dBFS figure .....                                                                   | 16   |
| • Changed Spurious-Free Dynamic Range vs Input Frequency figure .....                                                                            | 17   |
| • Changed DDC Block figure .....                                                                                                                 | 27   |
| • Deleted register address 53 from <i>Register Address for Power-Down Modes</i> table .....                                                      | 33   |
| • Added last sentence to Step 4 in <i>Serial Register Readout: Analog Bank</i> section .....                                                     | 36   |
| • Added last sentence to Step 4 in <i>Serial Register Readout: JESD Bank</i> section .....                                                       | 37   |
| • Added SDOUT Timing Diagram figure .....                                                                                                        | 38   |
| • Deleted unrelated patterns in <i>JESD204B Test Patterns</i> section .....                                                                      | 40   |
| • Changed <i>Serial Interface Registers</i> figure .....                                                                                         | 45   |
| • Added register addresses 1h and 2h and their descriptions to GENERAL REGISTERS in <i>Register Map</i> section .....                            | 46   |
| • Changed the name of MASTER PAGE (80h) to MASTER PAGE (ANALOG BANK PAGE SEL = 80h) in <i>Register Map</i> table .....                           | 46   |
| • Changed register 53h and 54h, and their descriptions to MASTER PAGE (ANALOG BANK PAGE SEL = 80h) in                                            |      |

## 改訂履歴 (continued)

|                                                                                                                                                                                                                                          |    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Register Map section.....                                                                                                                                                                                                                | 46 |
| • Changed the name of ADC PAGE (0Fh) to ADC PAGE (ANALOG BANK PAGE SEL= 0Fh) in Register Map table.....                                                                                                                                  | 46 |
| • Changed the name of MAIN DIGITAL PAGE (6800h) to MAIN DIGITAL PAGE (JESD BANK PAGE SEL=6800h) in Register Map table .....                                                                                                              | 46 |
| • Changed bit 5, register 4E of MAIN DIGITAL PAGE (JESD BANK PAGE SEL = 6800h) from 0 to IMPROVE IL PERF .....                                                                                                                           | 46 |
| • Changed the name of JESD DIGITAL PAGE (6900h) to JESD DIGITAL PAGE (JESD BANK PAGE SEL=6900h) in Register Map table .....                                                                                                              | 47 |
| • Changed the name of JESD ANALOG PAGE (6A00h) to JESD ANALOG PAGE (JESD BANK PAGE SEL=6A00h) in Register Map table.....                                                                                                                 | 47 |
| • Changed bit 1, register 12 of JESD ANALOG PAGE (6A00h) from 0 to ALWAYS WRITE 1 .....                                                                                                                                                  | 47 |
| • Changed bits 5 and 3, register 17 of JESD ANALOG PAGE (JESD BANK PAGE SEL = 6A00h) from 0 to LANE PDN 1 and from 0 to LANE PDN 0 respectively .....                                                                                    | 47 |
| • Added OFFSET READ Page and OFFSET LOAD Page registers to Register Map table.....                                                                                                                                                       | 47 |
| • Added ADS54J60 Access Type Codes table, deleted legends from Register Descriptions section .....                                                                                                                                       | 49 |
| • Added register 1h and 2h to Register Descriptions section .....                                                                                                                                                                        | 50 |
| • Changed description of Registers 3h and 4h (address = 3h and 4h) in General Registers Page .....                                                                                                                                       | 51 |
| • Changed description of bit 0 in Register 4Fh (address = 4Fh), Master Page (080h) .....                                                                                                                                                 | 55 |
| • Changed the description of registers 53h and 54h .....                                                                                                                                                                                 | 56 |
| • Changed 9.5 dB to 12 dB in description of bits 6-0 in Register 44h (address = 44h), Main Digital Page (6800h) .....                                                                                                                    | 59 |
| • Changed bit 5 from 0 the IMPROVE IL PERF and changed Register 4Eh Field Descriptions table in Register 4Eh (address = 4Eh), Main Digital Page (6800h) .....                                                                            | 61 |
| • Changed bit 1 from 0 to ALWAYS WRITE 1 in Register 12h (address = 12h), JESD Analog Page (6A00h) .....                                                                                                                                 | 68 |
| • Changed bit 1 from ALWAYS WRITE 1 to 0 in register 15h bit register .....                                                                                                                                                              | 69 |
| • Added x (where x = 0, 2, or 3) to bits 7-2 in Register 13h-15h Field Descriptions table of Registers 13h-15h (address = 13h-15h), JESD Analog Page (6A00h) .....                                                                       | 69 |
| • Changed bit 6 from W to R/W, bit 5 from 0 to LANE PDN 1 and from W to R/W, and changed bit 3 from 0 to LANE PDN 0 and from W to R/W in Register 17h bit register table of Register 17h (address = 17h), JESD Analog Page (6A00h) ..... | 70 |
| • Changed bits 5-0 of Register 17h Field Descriptions table in Register 17h (address = 17h), JESD Analog Page (6A00h) .....                                                                                                              | 70 |
| • Added Offset Read Page Register and Offset Load Page Register sections to Register Descriptions section .....                                                                                                                          | 72 |
| • Added DC Offset Correction Block in the ADS54J60 section .....                                                                                                                                                                         | 78 |
| • Changed $\pm 512$ codes to $\pm 1024$ codes in DC Offset Correction Block in the ADS54J60 section.....                                                                                                                                 | 78 |
| • Added Idle Channel Histogram section .....                                                                                                                                                                                             | 82 |
| • Added transformer TC1-1-13M+ to Transformer-Coupled Circuits section.....                                                                                                                                                              | 84 |
| • Added note to Layout Guidelines section.....                                                                                                                                                                                           | 87 |

## Revision B (August 2015) から Revision C に変更

## Page

|                                                                                                                                                     |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|----|
| • 「特長」のスペクトラム性能の箇条書き項目で、最後の副項目にある SFDR の値を 変更 .....                                                                                                 | 1  |
| • 「製品情報」の表 変更.....                                                                                                                                  | 1  |
| • Added CDM row to ESD Ratings table.....                                                                                                           | 7  |
| • Changed the minimum value for the input clock frequency in the Recommended Operating Conditions table .....                                       | 7  |
| • Added minimum value to the ADC sampling rate parameter in the Electrical Characteristics table.....                                               | 8  |
| • Added 720 -MHz test condition rows to SNR, NSD, SINAD, SFDR, HD2, HD3, Non HD2, HD3, THD, and SFDR_IL parameters of AC Characteristics table..... | 9  |
| • Changed typical specification of SFDR parameter in AC Characteristics table .....                                                                 | 10 |

|                                                                                                                               |    |
|-------------------------------------------------------------------------------------------------------------------------------|----|
| • Changed Sample Timing, <i>Aperture jitter</i> parameter typical specification in <i>Timing Characteristics</i> section..... | 13 |
| • Added the FOVR latency parameter to the <i>Timing Characteristics</i> table.....                                            | 13 |
| • Added <i>FFT for 720-MHz Input Signal at –6 dBFS</i> figure .....                                                           | 16 |
| • Added <i>Typical Characteristics: Contour</i> section.....                                                                  | 24 |
| • Changed <i>Overview</i> section .....                                                                                       | 25 |
| • Changed <i>Functional Block Diagram</i> section: changed Control and SPI block and added dashed outline to FOVR traces      | 25 |
| • Added <a href="#">Figure 60</a> and text reference to <i>Analog Inputs</i> section .....                                    | 27 |
| • Changed <i>SYSREF Signal</i> section: changed <a href="#">Table 4</a> and added last paragraph.....                         | 30 |
| • Added <i>SYSREF Not Present (Subclass 0, 2)</i> section .....                                                               | 31 |
| • Changed the number of clock cycles in the <i>Fast OVR</i> section .....                                                     | 32 |
| • Changed <a href="#">Table 10</a> and <a href="#">Table 11</a> .....                                                         | 41 |
| • Changed <a href="#">Table 12</a> and <a href="#">Table 13</a> .....                                                         | 42 |
| • Deleted <i>Lane Enable with Decimation</i> subsection .....                                                                 | 42 |
| • Added the <i>Program Summary of DDC Modes and JESD Link Configuration</i> table .....                                       | 43 |
| • Added <a href="#">Figure 84</a> to <i>Register Maps</i> section .....                                                       | 45 |
| • Changed <a href="#">Table 15</a> .....                                                                                      | 46 |
| • Deleted register 39h, 3Ah, and 56h .....                                                                                    | 46 |
| • Changed <i>Example Register Writes</i> section .....                                                                        | 49 |
| • Updated register descriptions .....                                                                                         | 50 |
| • Added <a href="#">Table 54</a> .....                                                                                        | 64 |
| • Deleted row for bit 1 in <a href="#">Table 64</a> as bit 1 is included in last table row .....                              | 69 |
| • Changed <a href="#">Table 75</a> .....                                                                                      | 75 |
| • Changed internal aperture jitter value in <i>SNR and Clock Jitter</i> section .....                                         | 78 |
| • Changed <a href="#">Figure 141</a> .....                                                                                    | 78 |
| • Changed <i>Power Supply Recommendations</i> section .....                                                                   | 85 |
| • Added the <i>Power Sequencing and Initialization</i> section.....                                                           | 86 |
| • 追加「ドキュメントのサポート」および「ドキュメントの更新通知を受け取る方法」セクション .....                                                                           | 89 |


**Revision A (May 2015) から Revision B に変更**
**Page**

|                 |   |
|-----------------|---|
| • 量産にリリース ..... | 1 |
|-----------------|---|

## 5 Device Comparison Table

| PART NUMBER              | SPEED GRADE (MSPS) | RESOLUTION (Bits) | CHANNEL |
|--------------------------|--------------------|-------------------|---------|
| <a href="#">ADS54J20</a> | 1000               | 12                | 2       |
| <a href="#">ADS54J42</a> | 625                | 14                | 2       |
| <a href="#">ADS54J40</a> | 1000               | 14                | 2       |
| <a href="#">ADS54J60</a> | 1000               | 16                | 2       |
| <a href="#">ADS54J66</a> | 500                | 14                | 4       |
| <a href="#">ADS54J69</a> | 500                | 16                | 2       |

## 6 Pin Configuration and Functions

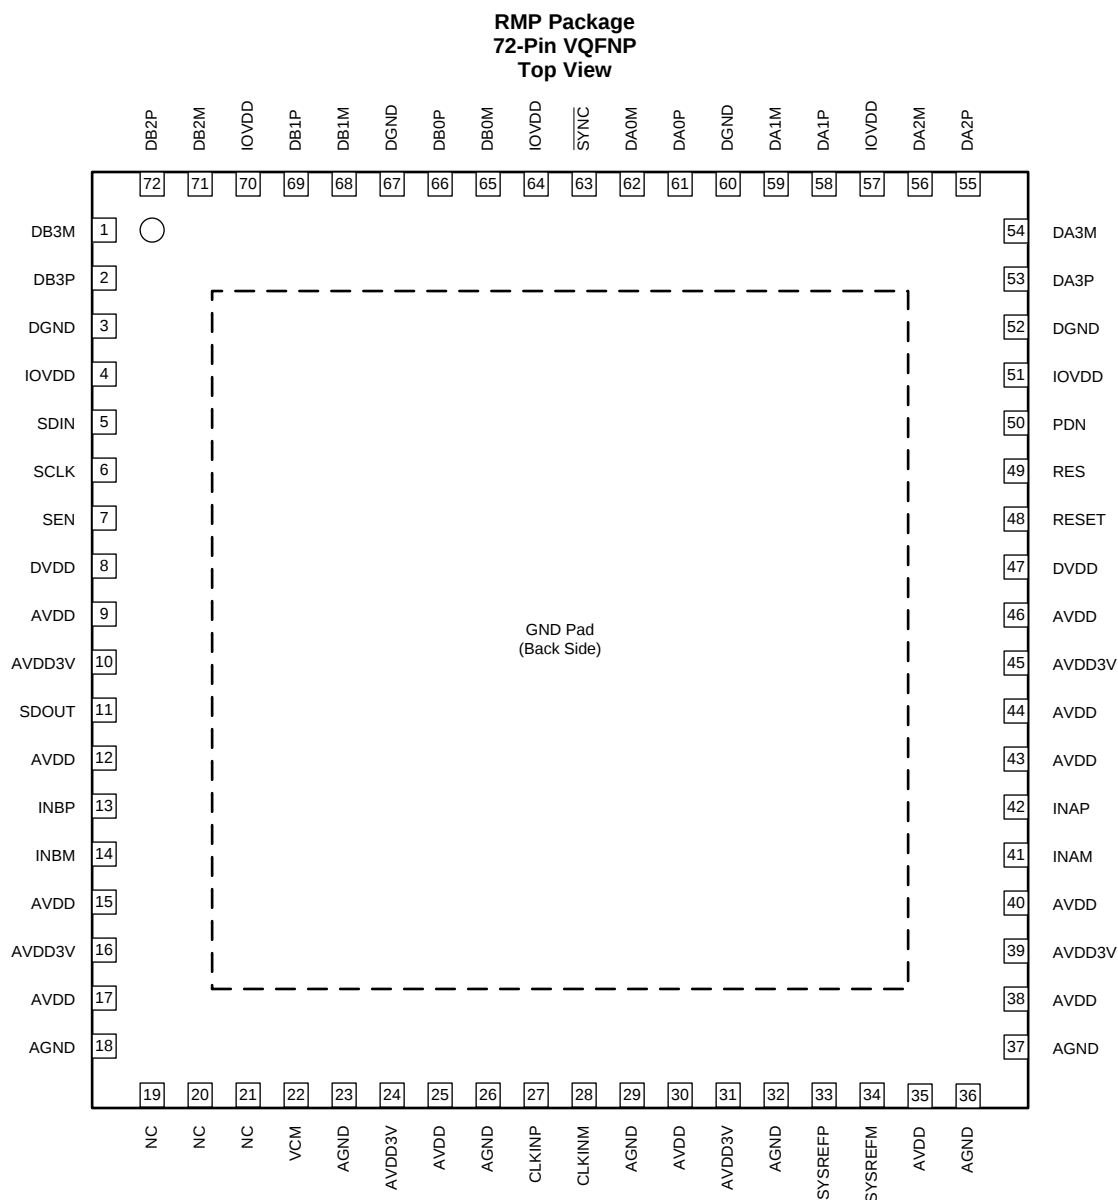

## Pin Functions

| PIN                |                                               | I/O | DESCRIPTION                                                                                                                                                                                   |
|--------------------|-----------------------------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME               | NO.                                           |     |                                                                                                                                                                                               |
| CLOCK, SYSREF      |                                               |     |                                                                                                                                                                                               |
| CLKINM             | 28                                            | I   | Negative differential clock input for the ADC. The device has an internal 100-Ω termination resistor between the CLKINP and CLKINM pins.                                                      |
| CLKINP             | 27                                            | I   | Positive differential clock input for the ADC. The device has an internal 100-Ω termination resistor between the CLKINP and CLKINM pins.                                                      |
| SYSREFM            | 34                                            | I   | Negative external SYSREF input. Connect this pin to GND if not used.                                                                                                                          |
| SYSREFP            | 33                                            | I   | Positive external SYSREF input. Connect this pin to 1.8 V if not used.                                                                                                                        |
| CONTROL, SERIAL    |                                               |     |                                                                                                                                                                                               |
| PDN                | 50                                            | I/O | Power down, active low pin. Can be configured via an SPI register setting. Can be configured to fast overrange output for channel A via the SPI.                                              |
| RESET              | 48                                            | I   | Hardware reset; active high. This pin has an internal 20-kΩ pulldown resistor.                                                                                                                |
| SCLK               | 6                                             | I   | Serial interface clock input                                                                                                                                                                  |
| SDIN               | 5                                             | I   | Serial interface data input                                                                                                                                                                   |
| SDOUT              | 11                                            | O   | Serial interface data output. Can be configured to fast overrange output for channel B via the SPI.                                                                                           |
| SEN                | 7                                             | I   | Serial interface enable                                                                                                                                                                       |
| DATA INTERFACE     |                                               |     |                                                                                                                                                                                               |
| DA0M               | 62                                            | O   | JESD204B serial data negative outputs for channel A                                                                                                                                           |
| DA1M               | 59                                            |     |                                                                                                                                                                                               |
| DA2M               | 56                                            |     |                                                                                                                                                                                               |
| DA3M               | 54                                            |     |                                                                                                                                                                                               |
| DA0P               | 61                                            | O   | JESD204B serial data positive outputs for channel A                                                                                                                                           |
| DA1P               | 58                                            |     |                                                                                                                                                                                               |
| DA2P               | 55                                            |     |                                                                                                                                                                                               |
| DA3P               | 53                                            |     |                                                                                                                                                                                               |
| DB0M               | 65                                            | O   | JESD204B serial data negative outputs for channel B                                                                                                                                           |
| DB1M               | 68                                            |     |                                                                                                                                                                                               |
| DB2M               | 71                                            |     |                                                                                                                                                                                               |
| DB3M               | 1                                             |     |                                                                                                                                                                                               |
| DB0P               | 66                                            | O   | JESD204B serial data positive outputs for channel B                                                                                                                                           |
| DB1P               | 69                                            |     |                                                                                                                                                                                               |
| DB2P               | 72                                            |     |                                                                                                                                                                                               |
| DB3P               | 2                                             |     |                                                                                                                                                                                               |
| SYNC               | 63                                            | I   | Synchronization input for JESD204B port                                                                                                                                                       |
| INPUT, COMMON MODE |                                               |     |                                                                                                                                                                                               |
| INAM               | 41                                            | I   | Differential analog negative input for channel A                                                                                                                                              |
| INAP               | 42                                            | I   | Differential analog positive input for channel A                                                                                                                                              |
| INBM               | 14                                            | I   | Differential analog negative input for channel B                                                                                                                                              |
| INBP               | 13                                            | I   | Differential analog positive input for channel B                                                                                                                                              |
| VCM                | 22                                            | O   | Common-mode voltage, 2.1 V. Note that analog inputs are internally biased to this pin through 600 Ω (effective), no external connection from the VCM pin to the INxP or INxM pin is required. |
| POWER SUPPLY       |                                               |     |                                                                                                                                                                                               |
| AGND               | 18, 23, 26, 29, 32, 36, 37                    | I   | Analog ground                                                                                                                                                                                 |
| AVDD               | 9, 12, 15, 17, 25, 30, 35, 38, 40, 43, 44, 46 | I   | Analog 1.9-V power supply                                                                                                                                                                     |
| AVDD3V             | 10, 16, 24, 31, 39, 45                        | I   | Analog 3.0-V power supply for the analog buffer                                                                                                                                               |
| DGND               | 3, 52, 60, 67                                 | I   | Digital ground                                                                                                                                                                                |
| DVDD               | 8, 47                                         | I   | Digital 1.9-V power supply                                                                                                                                                                    |
| IOVDD              | 4, 51, 57, 64, 70                             | I   | Digital 1.15-V power supply for the JESD204B transmitter                                                                                                                                      |
| NC, RES            |                                               |     |                                                                                                                                                                                               |
| NC                 | 19-21                                         | —   | Unused pins, do not connect                                                                                                                                                                   |
| RES                | 49                                            | I   | Reserved pin. Connect to DGND.                                                                                                                                                                |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                       |                                                        | MIN  | MAX        | UNIT |
|---------------------------------------|--------------------------------------------------------|------|------------|------|
| Supply voltage range                  | AVDD3V                                                 | –0.3 | 3.6        | V    |
|                                       | AVDD                                                   | –0.3 | 2.1        |      |
|                                       | DVDD                                                   | –0.3 | 2.1        |      |
|                                       | IOVDD                                                  | –0.2 | 1.4        |      |
| Voltage between AGND and DGND         |                                                        | –0.3 | 0.3        | V    |
| Voltage applied to input pins         | INAP, INBP, INAM, INBM                                 | –0.3 | 3          | V    |
|                                       | CLKINP, CLKINM                                         | –0.3 | AVDD + 0.3 |      |
|                                       | SYSREFP, SYSREFM                                       | –0.3 | AVDD + 0.3 |      |
|                                       | SCLK, SEN, SDIN, RESET, $\overline{\text{SYNC}}$ , PDN | –0.2 | 2.1        |      |
| Storage temperature, T <sub>stg</sub> |                                                        | –65  | 150        | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1000 | V    |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
(2) JEDEC document JEP157 states that 250-V HBM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)<sup>(1)(2)</sup>

|                      |                                                                                          | MIN                   | NOM                | MAX  | UNIT            |
|----------------------|------------------------------------------------------------------------------------------|-----------------------|--------------------|------|-----------------|
| Supply voltage range | AVDD3V                                                                                   | 2.85                  | 3.0                | 3.6  | V               |
|                      | AVDD                                                                                     | 1.8                   | 1.9                | 2.0  |                 |
|                      | DVDD                                                                                     | 1.7                   | 1.9                | 2.0  |                 |
|                      | IOVDD                                                                                    | 1.1                   | 1.15               | 1.2  |                 |
| Analog inputs        | Differential input voltage range                                                         |                       | 1.9                |      | V <sub>PP</sub> |
|                      | Input common-mode voltage                                                                |                       | 2.0                |      | V               |
|                      | Maximum analog input frequency for 1.9-V <sub>PP</sub> input amplitude <sup>(3)(4)</sup> |                       | 400                |      | MHz             |
| Clock inputs         | Input clock frequency, device clock frequency                                            |                       | 250 <sup>(5)</sup> | 1000 | MHz             |
|                      | Input clock amplitude differential (V <sub>CLKP</sub> – V <sub>CLKM</sub> )              | Sine wave, ac-coupled | 0.75               | 1.5  | V <sub>PP</sub> |
|                      |                                                                                          | LVPECL, ac-coupled    | 0.8                | 1.6  |                 |
|                      |                                                                                          | LVDS, ac-coupled      |                    | 0.7  |                 |
|                      | Input device clock duty cycle                                                            |                       | 45%                | 50%  | 55%             |
| Temperature          | Operating free-air, T <sub>A</sub>                                                       | –40                   |                    | 85   | °C              |
|                      | Operating junction, T <sub>J</sub>                                                       |                       | 105 <sup>(6)</sup> | 125  |                 |

- (1) SYSREF must be applied for the device to initialize; see the [SYSREF Signal](#) section for details.  
(2) After power-up, always use a hardware reset to reset the device for the first time; see [Table 75](#) for details.  
(3) Operating 0.5 dB below the maximum-supported amplitude is recommended to accommodate gain mismatch in interleaving ADCs.  
(4) At high frequencies, the maximum supported input amplitude reduces; see [Figure 37](#) for details.  
(5) See [Table 10](#).  
(6) Prolonged use above the nominal junction temperature can increase the device failure-in-time (FIT) rate.

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | ADS54J60   | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RMP (VQFN) |      |
|                               |                                              | 72 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 22.3       | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 5.1        | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 2.4        | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.1        | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 2.3        | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 0.4        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

typical values are at T<sub>A</sub> = 25°C, full temperature range is from T<sub>MIN</sub> = –40°C to T<sub>MAX</sub> = 85°C, ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, –1-dBFS differential input, and 0-dB digital gain (unless otherwise noted)

| PARAMETER                       |                                     | TEST CONDITIONS                                | MIN  | TYP  | MAX  | UNIT |
|---------------------------------|-------------------------------------|------------------------------------------------|------|------|------|------|
| <b>GENERAL</b>                  |                                     |                                                |      |      |      |      |
|                                 | ADC sampling rate                   |                                                | 250  |      | 1000 | MSPS |
|                                 | Resolution                          |                                                | 16   |      |      | Bits |
| <b>POWER SUPPLIES</b>           |                                     |                                                |      |      |      |      |
| AVDD3V                          | 3.0-V analog supply                 |                                                | 2.85 | 3.0  | 3.6  | V    |
| AVDD                            | 1.9-V analog supply                 |                                                | 1.8  | 1.9  | 2.0  | V    |
| DVDD                            | 1.9-V digital supply                |                                                | 1.7  | 1.9  | 2.0  | V    |
| IOVDD                           | 1.15-V SERDES supply                |                                                | 1.1  | 1.15 | 1.2  | V    |
| I <sub>AVDD3V</sub>             | 3.0-V analog supply current         | V <sub>IN</sub> = full-scale on both channels  |      | 334  | 360  | mA   |
| I <sub>AVDD</sub>               | 1.9-V analog supply current         | V <sub>IN</sub> = full-scale on both channels  |      | 359  | 510  | mA   |
| I <sub>DVDD</sub>               | 1.9-V digital supply current        | Eight lanes active (LMFS = 8224)               |      | 197  | 260  | mA   |
| I <sub>IOVDD</sub>              | 1.15-V SERDES supply current        | Eight lanes active (LMFS = 8224)               |      | 566  | 920  | mA   |
| P <sub>dis</sub>                | Total power dissipation             | Eight lanes active (LMFS = 8224)               |      | 2.71 | 3.1  | W    |
| I <sub>DVDD</sub>               | 1.9-V digital supply current        | Four lanes active (LMFS = 4244)                |      | 211  |      | mA   |
| I <sub>IOVDD</sub>              | 1.15-V SERDES supply current        | Four lanes active (LMFS = 4244)                |      | 618  |      | mA   |
| P <sub>dis</sub>                | Total power dissipation             | Four lanes active (LMFS = 4244)                |      | 2.80 |      | W    |
| I <sub>DVDD</sub>               | 1.9-V digital supply current        | Four lanes active (LMFS = 4222), 2X decimation |      | 197  |      | mA   |
| I <sub>IOVDD</sub>              | 1.15-V SERDES supply current        | Four lanes active (LMFS = 4222), 2X decimation |      | 593  |      | mA   |
| P <sub>dis</sub>                | Total power dissipation             | Four lanes active (LMFS = 4222), 2X decimation |      | 2.74 |      | W    |
| I <sub>DVDD</sub>               | 1.9-V digital supply current        | Two lanes active (LMFS = 2221), 4X decimation  |      | 176  |      | mA   |
| I <sub>IOVDD</sub>              | 1.15-V SERDES supply current        | Two lanes active (LMFS = 2221), 4X decimation  |      | 562  |      | mA   |
| P <sub>dis</sub> <sup>(1)</sup> | Total power dissipation             | Two lanes active (LMFS = 2221), 4X decimation  |      | 2.66 |      | W    |
|                                 | Global power-down power dissipation |                                                |      | 139  | 315  | mW   |

(1) See the [Power-Down Mode](#) section for details.

## Electrical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER                                     |                                       | TEST CONDITIONS                                                                   | MIN | TYP  | MAX | UNIT             |
|-----------------------------------------------|---------------------------------------|-----------------------------------------------------------------------------------|-----|------|-----|------------------|
| <b>ANALOG INPUTS (INAP, INAM, INBP, INBM)</b> |                                       |                                                                                   |     |      |     |                  |
|                                               | Differential input full-scale voltage |                                                                                   |     | 1.9  |     | $V_{\text{PP}}$  |
| $V_{\text{IC}}$                               | Common-mode input voltage             |                                                                                   |     | 2.0  |     | V                |
| $R_{\text{IN}}$                               | Differential input resistance         | At 170-MHz input frequency                                                        |     | 0.6  |     | $\text{k}\Omega$ |
| $C_{\text{IN}}$                               | Differential input capacitance        | At 170-MHz input frequency                                                        |     | 4.7  |     | pF               |
|                                               | Analog input bandwidth (3 dB)         | 50- $\Omega$ source driving ADC inputs terminated with 50- $\Omega$               |     | 1.2  |     | GHz              |
| <b>CLOCK INPUT (CLKINP, CLKINM)</b>           |                                       |                                                                                   |     |      |     |                  |
|                                               | Internal clock biasing                | CLKINP and CLKINM are connected to internal biasing voltage through 400- $\Omega$ |     | 1.15 |     | V                |

## 7.6 AC Characteristics

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER |                        | TEST CONDITIONS                                                                   | MIN   | TYP   | MAX | UNIT    |
|-----------|------------------------|-----------------------------------------------------------------------------------|-------|-------|-----|---------|
| SNR       | Signal-to-noise ratio  | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |       | 70.9  |     | dBFS    |
|           |                        | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 70.6  |     |         |
|           |                        | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 67.2  | 70    |     |         |
|           |                        | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 69.2  |     |         |
|           |                        | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 68.7  |     |         |
|           |                        | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 68.1  |     |         |
|           |                        | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 67.1  |     |         |
|           |                        | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |       | 67.6  |     |         |
|           |                        | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |       | 66    |     |         |
|           |                        | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |       | 64.4  |     |         |
| NSD       | Noise spectral density | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |       | 157.9 |     | dBFS/Hz |
|           |                        | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 157.6 |     |         |
|           |                        | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 154.2 | 157   |     |         |
|           |                        | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 156.2 |     |         |
|           |                        | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 155.7 |     |         |
|           |                        | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 155.1 |     |         |
|           |                        | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |       | 154.1 |     |         |
|           |                        | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |       | 154.6 |     |         |
|           |                        | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |       | 153   |     |         |
|           |                        | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |       | 151.4 |     |         |

## AC Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER |                                                  | TEST CONDITIONS                                                                   | MIN | TYP  | MAX | UNIT |
|-----------|--------------------------------------------------|-----------------------------------------------------------------------------------|-----|------|-----|------|
| SINAD     | Signal-to-noise and distortion ratio             | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 70.7 |     | dBFS |
|           |                                                  | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 70.4 |     |      |
|           |                                                  | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 67  | 69.8 |     |      |
|           |                                                  | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 69.1 |     |      |
|           |                                                  | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 68.3 |     |      |
|           |                                                  | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 67.6 |     |      |
|           |                                                  | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 66   |     |      |
|           |                                                  | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 66.8 |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 65.2 |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 64.3 |     |      |
| SFDR      | Spurious-free dynamic range (excluding IL spurs) | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 85   |     | dBc  |
|           |                                                  | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 84   |     |      |
|           |                                                  | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 78  | 88   |     |      |
|           |                                                  | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 86   |     |      |
|           |                                                  | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 81   |     |      |
|           |                                                  | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 78   |     |      |
|           |                                                  | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 73   |     |      |
|           |                                                  | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 72   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 68   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 72   |     |      |
| HD2       | Second-order harmonic distortion                 | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 85   |     | dBc  |
|           |                                                  | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 92   |     |      |
|           |                                                  | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 79  | 95   |     |      |
|           |                                                  | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 86   |     |      |
|           |                                                  | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 81   |     |      |
|           |                                                  | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 81   |     |      |
|           |                                                  | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 76   |     |      |
|           |                                                  | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 72   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 68   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 72   |     |      |
| HD3       | Third-order harmonic distortion                  | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 87   |     | dBc  |
|           |                                                  | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 84   |     |      |
|           |                                                  | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 82  | 89   |     |      |
|           |                                                  | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 92   |     |      |
|           |                                                  | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 82   |     |      |
|           |                                                  | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 78   |     |      |
|           |                                                  | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 73   |     |      |
|           |                                                  | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 70   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 75   |     |      |
|           |                                                  | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 84   |     |      |

## AC Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER    |                                                               | TEST CONDITIONS                                                                   | MIN | TYP  | MAX | UNIT |
|--------------|---------------------------------------------------------------|-----------------------------------------------------------------------------------|-----|------|-----|------|
| Non HD2, HD3 | Spurious-free dynamic range (excluding HD2, HD3, and IL spur) | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 94   |     | dBFS |
|              |                                                               | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 97   |     |      |
|              |                                                               | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 79  | 93   |     |      |
|              |                                                               | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 95   |     |      |
|              |                                                               | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 95   |     |      |
|              |                                                               | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 91   |     |      |
|              |                                                               | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 85   |     |      |
|              |                                                               | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 90   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 90   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 96   |     |      |
| THD          | Total harmonic distortion                                     | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 83   |     | dBc  |
|              |                                                               | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 83   |     |      |
|              |                                                               | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 74  | 87   |     |      |
|              |                                                               | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 84   |     |      |
|              |                                                               | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 78   |     |      |
|              |                                                               | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 76   |     |      |
|              |                                                               | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 71   |     |      |
|              |                                                               | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 71   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 67   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 71   |     |      |
| ENOB         | Effective number of bits                                      | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 11.5 |     | Bits |
|              |                                                               | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 11.4 |     |      |
|              |                                                               | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 11.3 |     |      |
|              |                                                               | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 11.2 |     |      |
|              |                                                               | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 11.0 |     |      |
|              |                                                               | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 10.9 |     |      |
|              |                                                               | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 10.7 |     |      |
|              |                                                               | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 10.8 |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 10.5 |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 10.4 |     |      |
| SFDR_IL      | Interleaving spur                                             | $f_{\text{IN}} = 10\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$                |     | 88   |     | dBc  |
|              |                                                               | $f_{\text{IN}} = 100\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 90   |     |      |
|              |                                                               | $f_{\text{IN}} = 170\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               | 69  | 87   |     |      |
|              |                                                               | $f_{\text{IN}} = 230\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 85   |     |      |
|              |                                                               | $f_{\text{IN}} = 270\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 84   |     |      |
|              |                                                               | $f_{\text{IN}} = 300\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 82   |     |      |
|              |                                                               | $f_{\text{IN}} = 370\text{ MHz}$ , $A_{\text{IN}} = -1\text{ dBFS}$               |     | 82   |     |      |
|              |                                                               | $f_{\text{IN}} = 470\text{ MHz}$ , $A_{\text{IN}} = -3\text{ dBFS}$               |     | 79   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$               |     | 79   |     |      |
|              |                                                               | $f_{\text{IN}} = 720\text{ MHz}$ , $A_{\text{IN}} = -6\text{ dBFS}$ , gain = 5 dB |     | 75   |     |      |

## AC Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER |                                                  | TEST CONDITIONS                                                                                          | MIN | TYP | MAX | UNIT |
|-----------|--------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----|-----|-----|------|
| IMD3      | Two-tone, third-order intermodulation distortion | $f_{\text{IN1}} = 185\text{ MHz}$ , $f_{\text{IN2}} = 190\text{ MHz}$ , $A_{\text{IN}} = -7\text{ dBFS}$ |     | -88 |     | dBFS |
|           |                                                  | $f_{\text{IN1}} = 365\text{ MHz}$ , $f_{\text{IN2}} = 370\text{ MHz}$ , $A_{\text{IN}} = -7\text{ dBFS}$ |     | -79 |     |      |
|           |                                                  | $f_{\text{IN1}} = 465\text{ MHz}$ , $f_{\text{IN2}} = 470\text{ MHz}$ , $A_{\text{IN}} = -7\text{ dBFS}$ |     | -75 |     |      |
|           | Crosstalk isolation between channel A and B      | Full-scale, 170-MHz signal on aggressor; idle channel is victim                                          |     | 100 |     | dB   |

## 7.7 Digital Characteristics

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ ,  $-1\text{-dBFS}$  differential input, and  $0\text{-dB}$  digital gain (unless otherwise noted)

| PARAMETER                                                                              |                                   | TEST CONDITIONS                                                    | MIN        | TYP  | MAX | UNITS            |
|----------------------------------------------------------------------------------------|-----------------------------------|--------------------------------------------------------------------|------------|------|-----|------------------|
| DIGITAL INPUTS (RESET, SCLK, SEN, SDIN, $\overline{\text{SYNC}}$ , PDN) <sup>(1)</sup> |                                   |                                                                    |            |      |     |                  |
| V <sub>IH</sub>                                                                        | High-level input voltage          | All digital inputs support 1.2-V and 1.8-V logic levels            | 0.8        |      |     | V                |
| V <sub>IL</sub>                                                                        | Low-level input voltage           | All digital inputs support 1.2-V and 1.8-V logic levels            |            |      | 0.4 | V                |
| I <sub>IH</sub>                                                                        | High-level input current          | SEN                                                                |            | 0    |     | μA               |
|                                                                                        |                                   | RESET, SCLK, SDIN, PDN, $\overline{\text{SYNC}}$                   |            | 50   |     |                  |
| I <sub>IL</sub>                                                                        | Low-level input current           | SEN                                                                |            | 50   |     | μA               |
|                                                                                        |                                   | RESET, SCLK, SDIN, PDN, $\overline{\text{SYNC}}$                   |            | 0    |     |                  |
| DIGITAL INPUTS (SYSREFP, SYSREFM)                                                      |                                   |                                                                    |            |      |     |                  |
| V <sub>D</sub>                                                                         | Differential input voltage        |                                                                    | 0.35       | 0.45 | 1.4 | V                |
| V <sub>(CM_DIG)</sub>                                                                  | Common-mode voltage for SYSREF    |                                                                    |            | 1.3  |     | V                |
| DIGITAL OUTPUTS (SDOUT, PDN) <sup>(2)</sup>                                            |                                   |                                                                    |            |      |     |                  |
| V <sub>OH</sub>                                                                        | High-level output voltage         |                                                                    | DVDD – 0.1 | DVDD |     | V                |
| V <sub>OL</sub>                                                                        | Low-level output voltage          |                                                                    |            |      | 0.1 | V                |
| DIGITAL OUTPUTS (JESD204B Interface: DxP, DxM) <sup>(3)</sup>                          |                                   |                                                                    |            |      |     |                  |
| V <sub>OD</sub>                                                                        | Output differential voltage       | With default swing setting                                         |            | 700  |     | mV <sub>PP</sub> |
| V <sub>OC</sub>                                                                        | Output common-mode voltage        |                                                                    |            | 450  |     | mV               |
|                                                                                        | Transmitter short-circuit current | Transmitter pins shorted to any voltage between –0.25 V and 1.45 V | –100       |      | 100 | mA               |
| Z <sub>os</sub>                                                                        | Single-ended output impedance     |                                                                    |            | 50   |     | Ω                |
|                                                                                        | Output capacitance                | Output capacitance inside the device, from either output to ground |            | 2    |     | pF               |

(1) The RESET, SCLK, SDIN, and PDN pins have a 20-k $\Omega$  (typical) internal pulldown resistor to ground, and the SEN pin has a 20-k $\Omega$  (typical) pullup resistor to IOVDD.

(2) When functioning as an OVR pin for channel B.

(3) 100- $\Omega$  differential termination.

## 7.8 Timing Requirements

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, and –1-dBFS differential input (unless otherwise noted)

|                                                     |                                                                                                                                                         | MIN  | TYP       | MAX | UNITS              |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----------|-----|--------------------|
| <b>SAMPLE TIMING</b>                                |                                                                                                                                                         |      |           |     |                    |
|                                                     | Aperture delay                                                                                                                                          | 0.75 |           | 1.6 | ns                 |
|                                                     | Aperture delay matching between two channels on the same device                                                                                         |      | $\pm 70$  |     | ps                 |
|                                                     | Aperture delay matching between two devices at the same temperature and supply voltage                                                                  |      | $\pm 270$ |     | ps                 |
|                                                     | Aperture jitter                                                                                                                                         |      | 120       |     | $f_s$ rms          |
| <b>WAKE-UP TIMING</b>                               |                                                                                                                                                         |      |           |     |                    |
|                                                     | Wake-up time to valid data after coming out of global power-down                                                                                        |      | 150       |     | $\mu\text{s}$      |
| <b>LATENCY <sup>(1)</sup></b>                       |                                                                                                                                                         |      |           |     |                    |
|                                                     | Data latency: ADC sample to digital output                                                                                                              |      | 134       |     | Input clock cycles |
|                                                     | OVR latency: ADC sample to OVR bit                                                                                                                      |      | 62        |     | Input clock cycles |
|                                                     | FOVR latency: ADC sample to FOVR signal on pin                                                                                                          |      | 18        |     | Input clock cycles |
| $t_{\text{PDI}}$                                    | Propagation delay: logic gates and output buffers delay (does not change with $f_s$ )                                                                   |      | 4         |     | ns                 |
| <b>SYSREF TIMING</b>                                |                                                                                                                                                         |      |           |     |                    |
| $t_{\text{SU\_SYSREF}}$                             | Setup time for SYSREF, referenced to the input clock falling edge                                                                                       | 300  |           | 900 | ps                 |
| $t_{\text{H\_SYSREF}}$                              | Hold time for SYSREF, referenced to the input clock falling edge                                                                                        | 100  |           |     | ps                 |
| <b>JESD OUTPUT INTERFACE TIMING CHARACTERISTICS</b> |                                                                                                                                                         |      |           |     |                    |
|                                                     | Unit interval                                                                                                                                           | 100  |           | 400 | ps                 |
|                                                     | Serial output data rate                                                                                                                                 | 2.5  |           | 10  | Gbps               |
|                                                     | Total jitter for BER of 1E-15 and lane rate = 10 Gbps                                                                                                   |      | 26        |     | ps                 |
|                                                     | Random jitter for BER of 1E-15 and lane rate = 10 Gbps                                                                                                  |      | 0.75      |     | ps rms             |
|                                                     | Deterministic jitter for BER of 1E-15 and lane rate = 10 Gbps                                                                                           |      | 12        |     | ps, pk-pk          |
| $t_R, t_F$                                          | Data rise time, data fall time: rise and fall times are measured from 20% to 80%, differential output waveform, 2.5 Gbps $\leq$ bit rate $\leq$ 10 Gbps |      | 35        |     | ps                 |

(1) Overall latency = latency +  $t_{\text{PDI}}$ .


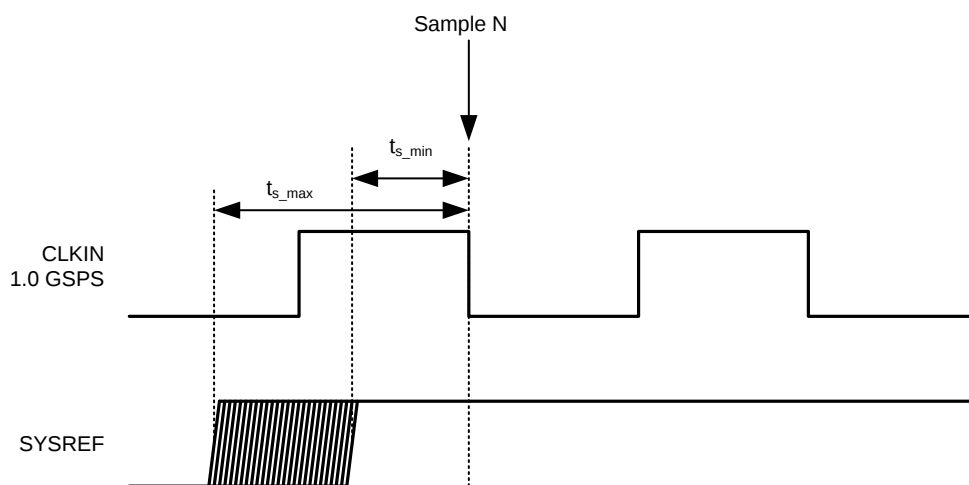



Figure 1. SYSREF Timing

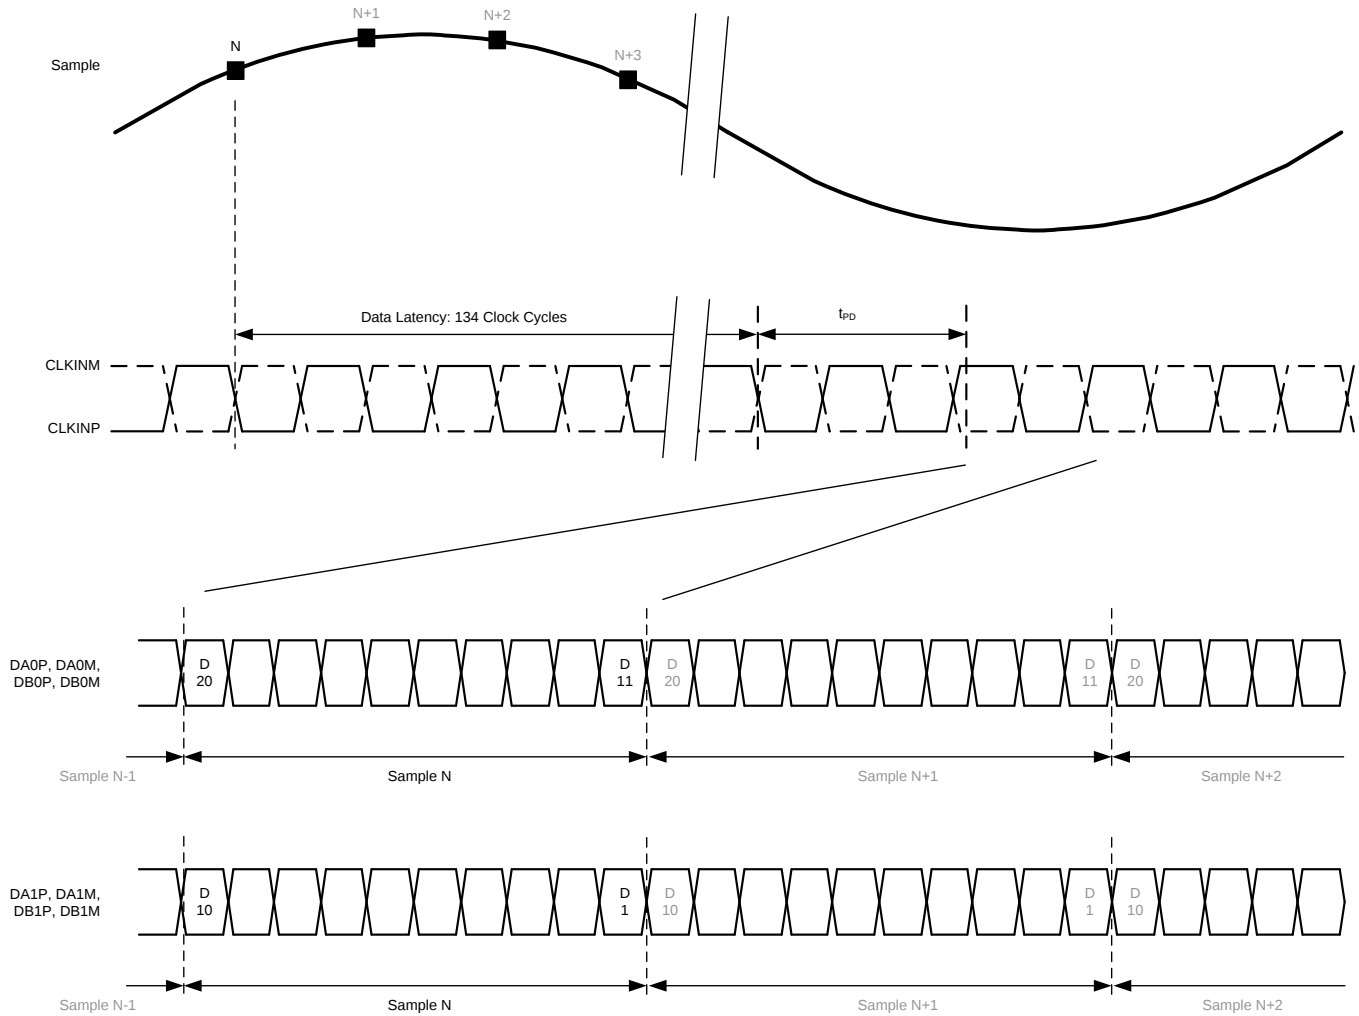


**Figure 2. Sample Timing Requirements Diagram**

## 7.9 Typical Characteristics


typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, and –1-dBFS differential input (unless otherwise noted)

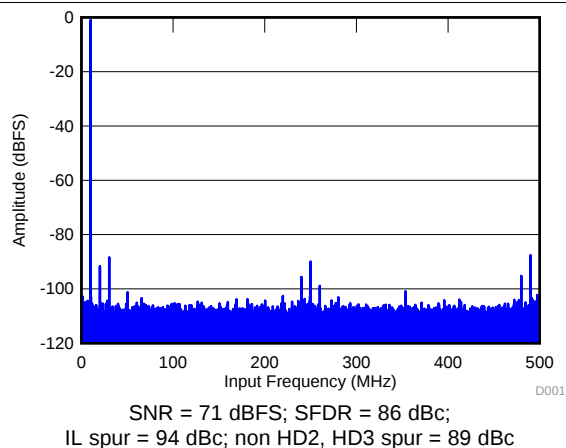


**Figure 3. FFT for 10-MHz Input Signal**

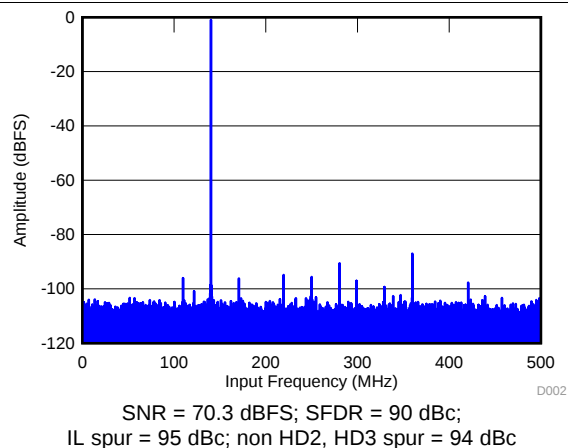


**Figure 4. FFT for 140-MHz Input Signal**

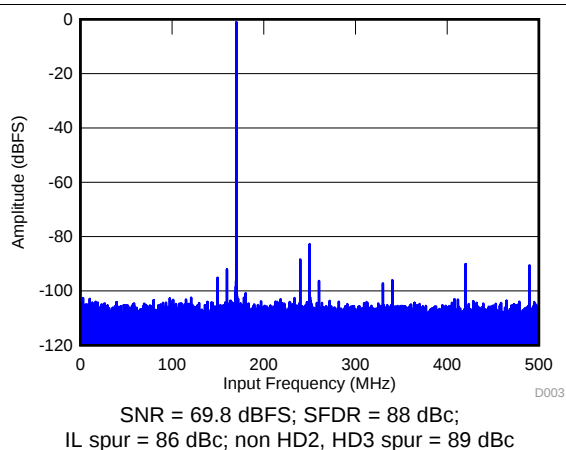


**Figure 5. FFT for 170-MHz Input Signal**

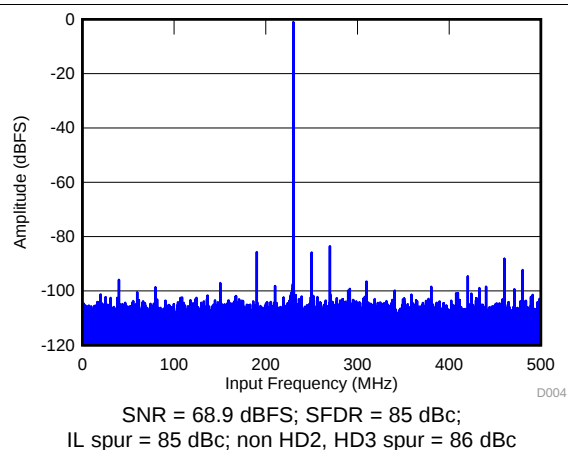

**Figure 6. FFT for 230-MHz Input Signal**

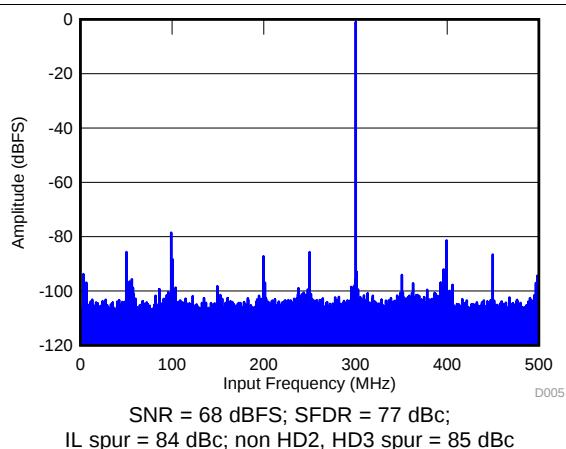

**Figure 7. FFT for 300-MHz Input Signal**

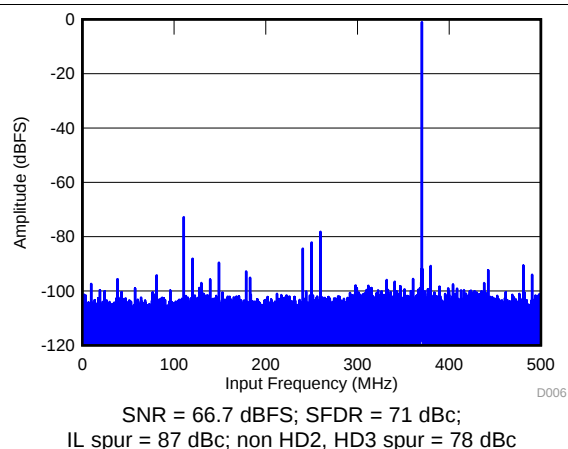

**Figure 8. FFT for 370-MHz Input Signal**

## Typical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, and -1-dBFS differential input (unless otherwise noted)

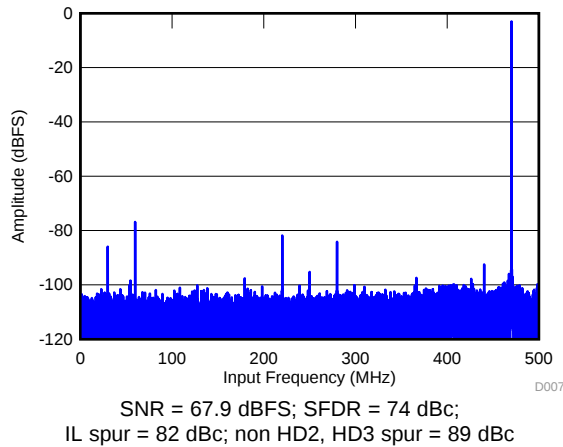


Figure 9. FFT for 470-MHz Input Signal at -3 dBFS

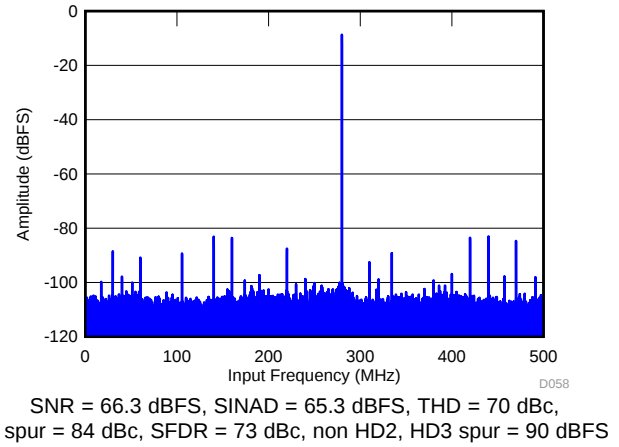


Figure 10. FFT for 720-MHz Input Signal at -6 dBFS

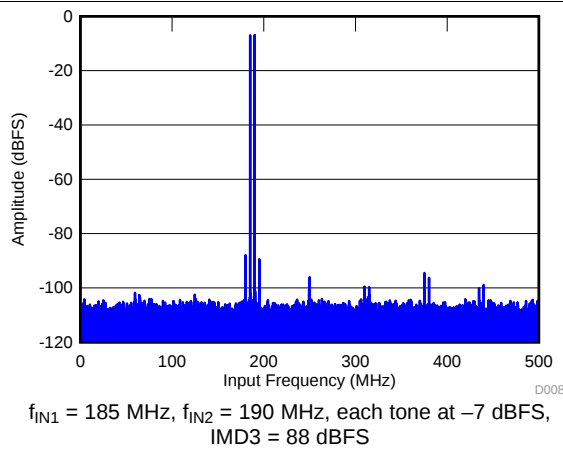


Figure 11. FFT for Two-Tone Input Signal (-7 dBFS)

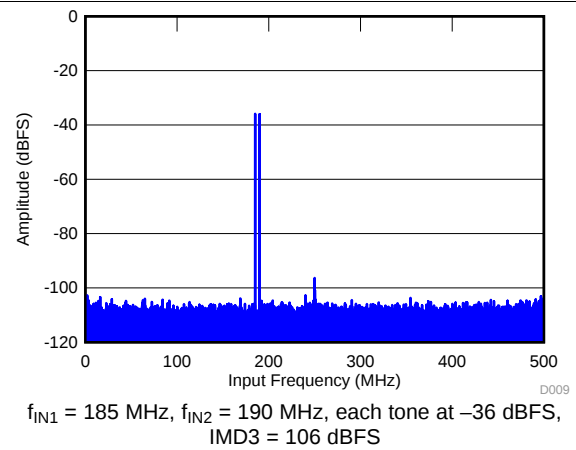


Figure 12. FFT for Two-Tone Input Signal (-36 dBFS)

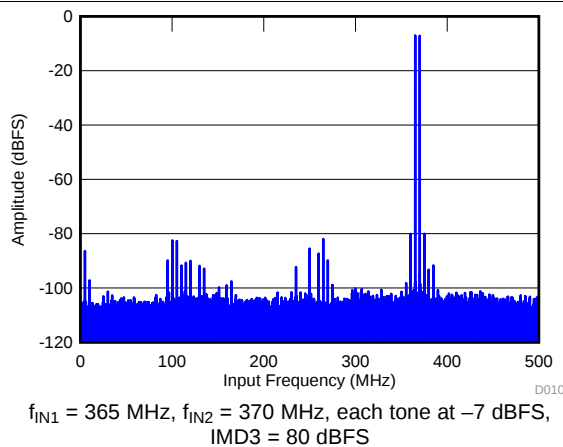


Figure 13. FFT for Two-Tone Input Signal (-7 dBFS)


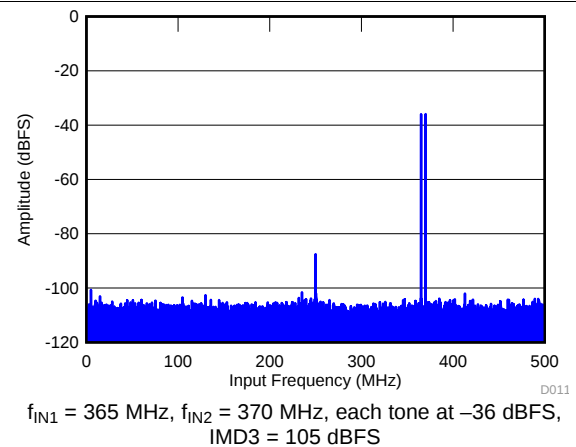



Figure 14. FFT for Two-Tone Input Signal (-36 dBFS)

## Typical Characteristics (continued)


typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ , and  $-1\text{ dBFS}$  differential input (unless otherwise noted)

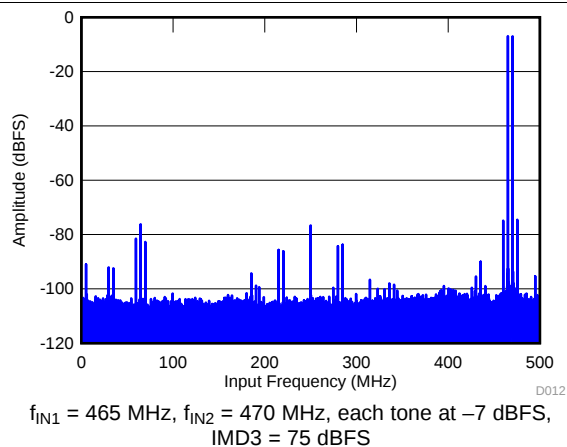


**Figure 15. FFT for Two-Tone Input Signal (-7 dBFS)**

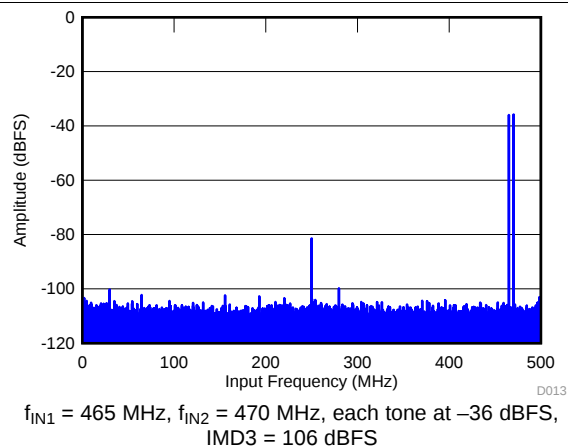


**Figure 16. FFT for Two-Tone Input Signal (-36 dBFS)**

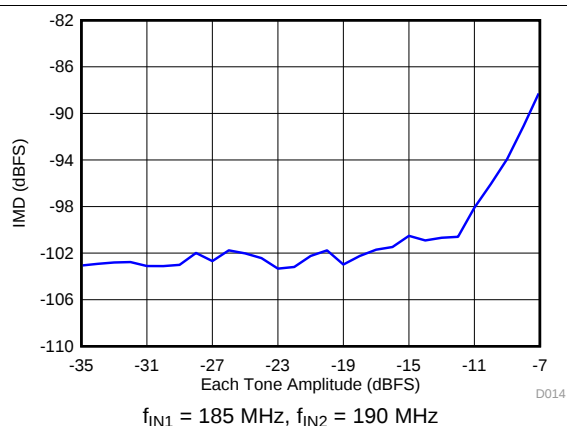


**Figure 17. Intermodulation Distortion vs Input Tone Amplitude**

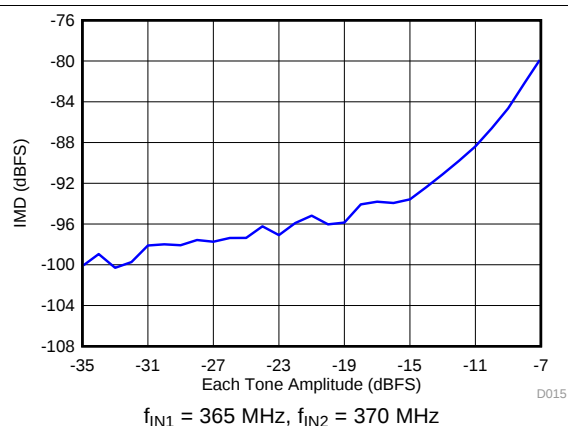

**Figure 18. Intermodulation Distortion vs Input Tone Amplitude**

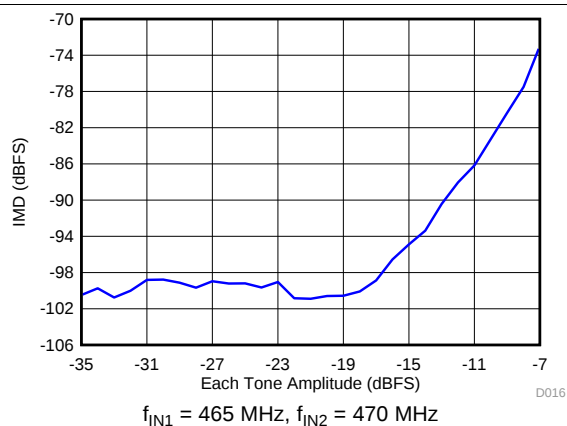

**Figure 19. Intermodulation Distortion vs Input Tone Amplitude**

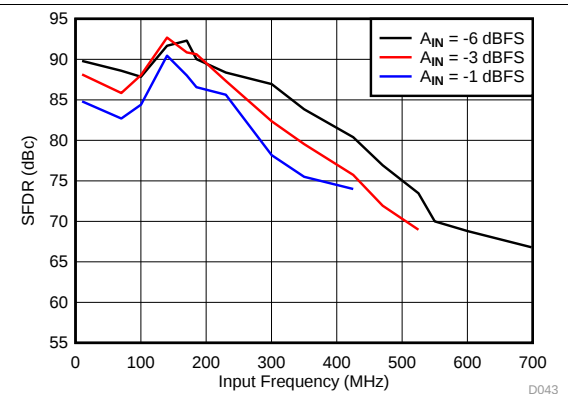

**Figure 20. Spurious-Free Dynamic Range vs Input Frequency**

## Typical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, and -1-dBFS differential input (unless otherwise noted)

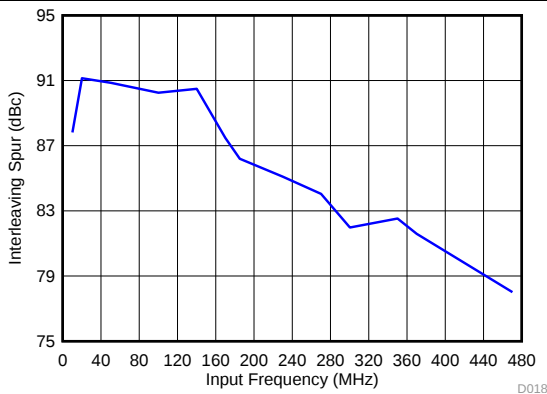


Figure 21. IL Spur vs Input Frequency

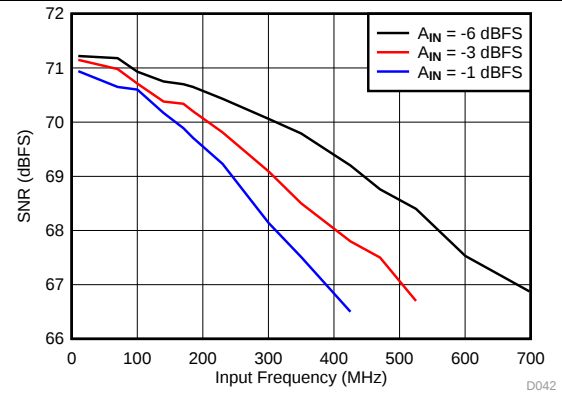


Figure 22. Signal-to-Noise Ratio vs Input Frequency

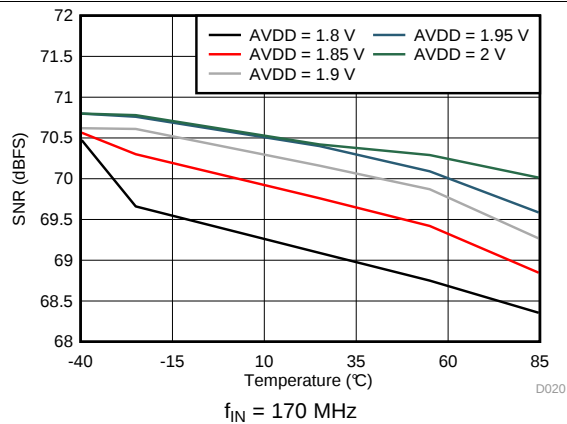


Figure 23. Signal-to-Noise Ratio vs AVDD Supply and Temperature

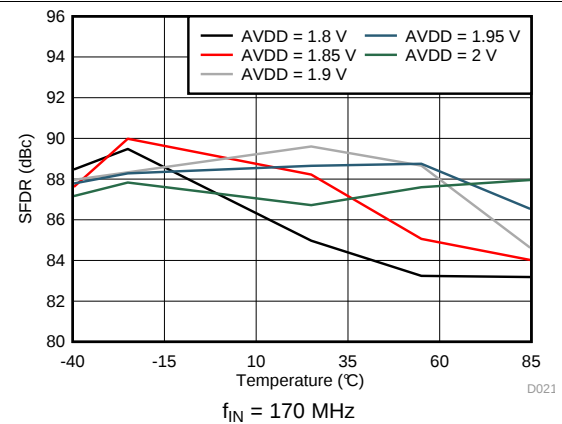


Figure 24. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

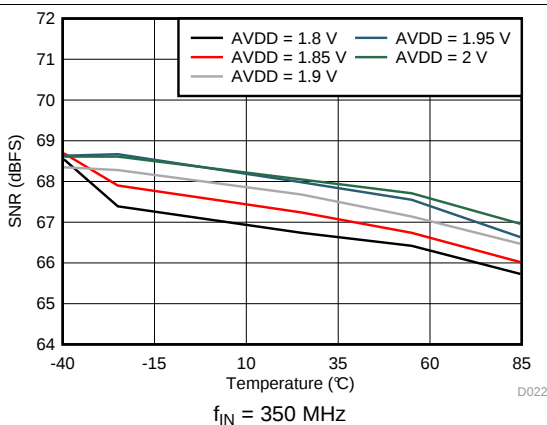


Figure 25. Signal-to-Noise Ratio vs AVDD Supply and Temperature

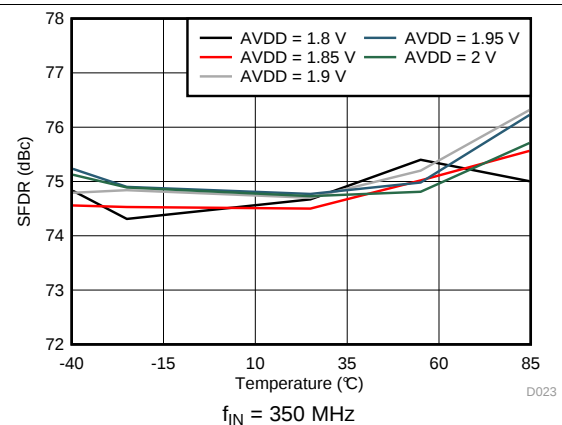


Figure 26. Spurious-Free Dynamic Range vs AVDD Supply and Temperature

## Typical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ , and  $-1\text{-dBFS}$  differential input (unless otherwise noted)

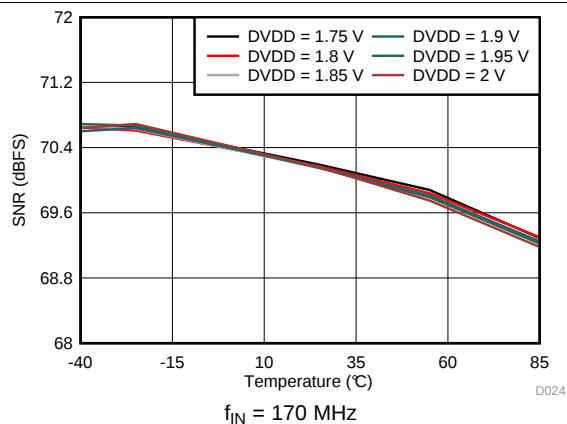


Figure 27. Signal-to-Noise Ratio vs DVDD Supply and Temperature

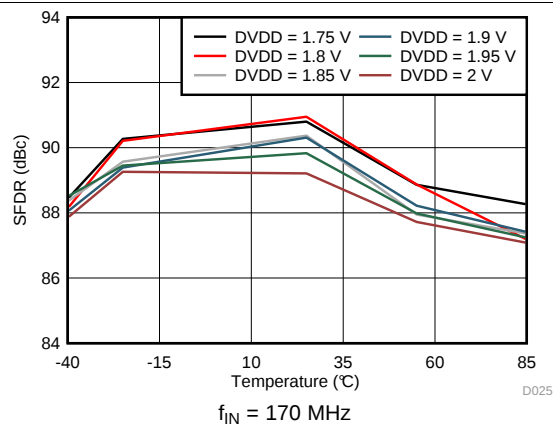


Figure 28. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

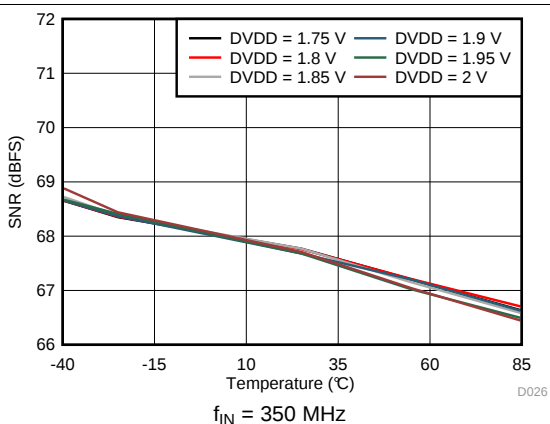


Figure 29. Signal-to-Noise Ratio vs DVDD Supply and Temperature

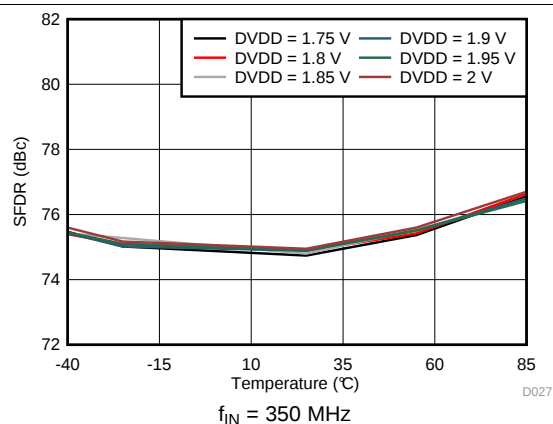


Figure 30. Spurious-Free Dynamic Range vs DVDD Supply and Temperature

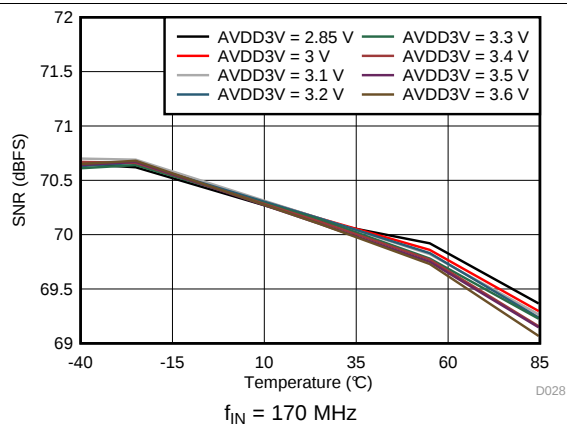


Figure 31. Signal-to-Noise Ratio vs AVDD3V Supply and Temperature

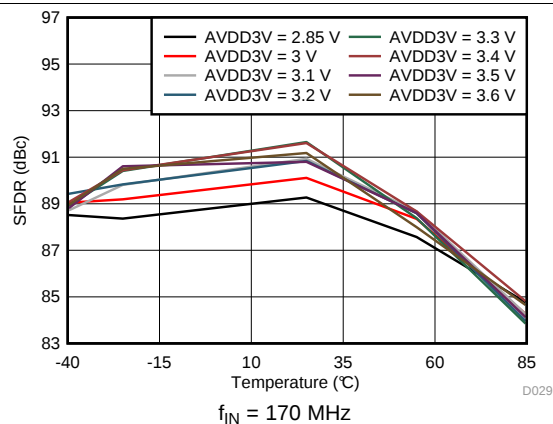


Figure 32. Spurious-Free Dynamic Range vs AVDD3V Supply and Temperature

## Typical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, and -1-dBFS differential input (unless otherwise noted)

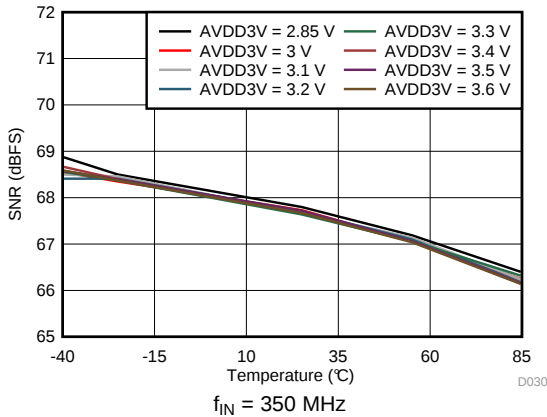


Figure 33. Signal-to-Noise Ratio vs AVDD3V Supply and Temperature

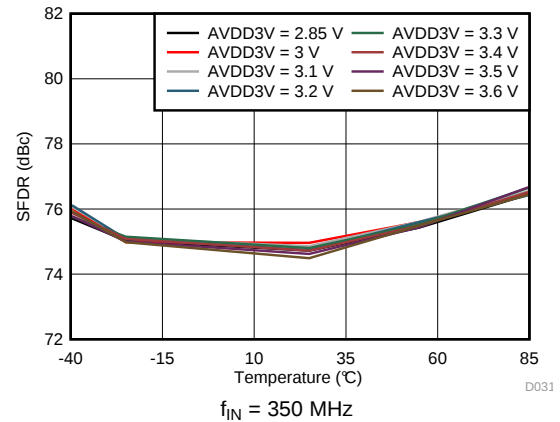


Figure 34. Spurious-Free Dynamic Range vs AVDD3V Supply and Temperature

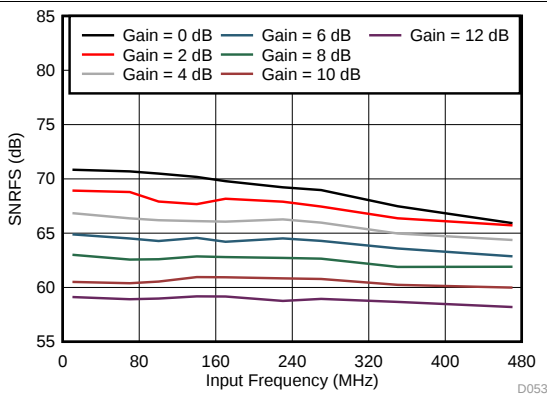


Figure 35. Signal-to-Noise Ratio vs Gain and Input Frequency

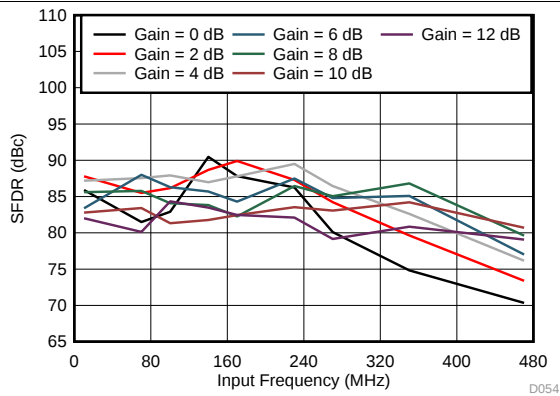


Figure 36. Spurious-Free Dynamic Range vs Gain and Input Frequency

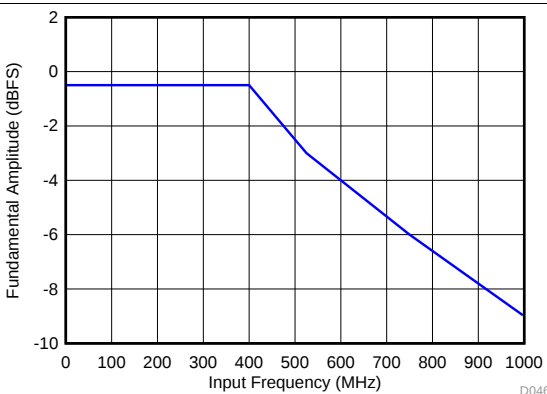


Figure 37. Maximum Supported Amplitude vs Frequency


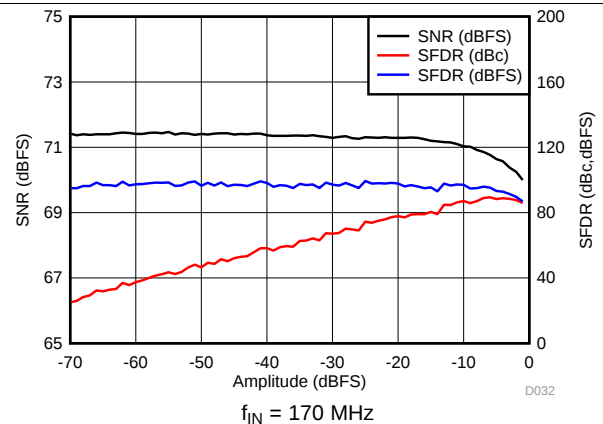



Figure 38. Performance vs Input Amplitude

## Typical Characteristics (continued)


typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ , and  $-1\text{-dBFS}$  differential input (unless otherwise noted)

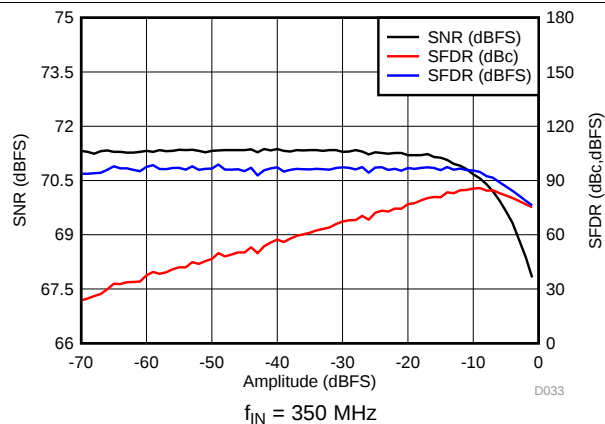


**Figure 39. Performance vs Input Amplitude**

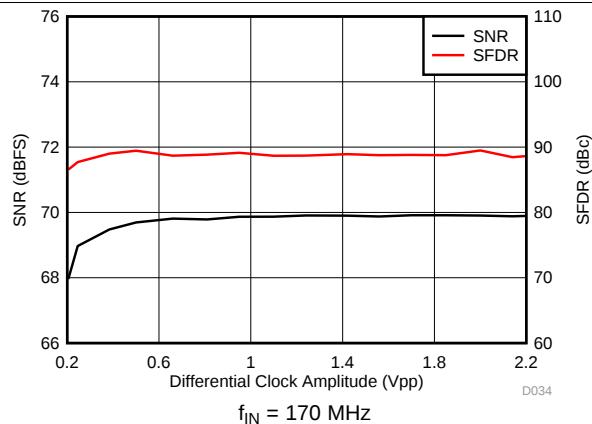


**Figure 40. Performance vs Sampling Clock Amplitude**

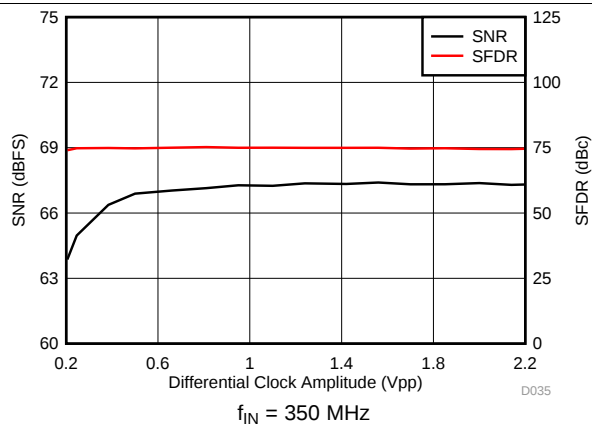


**Figure 41. Performance vs Sampling Clock Amplitude**

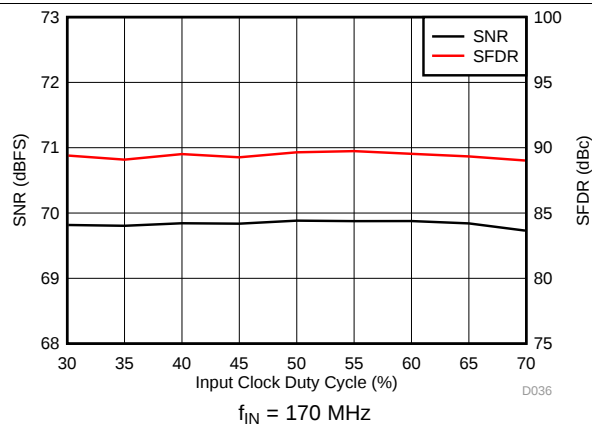

**Figure 42. Performance vs Clock Duty Cycle**

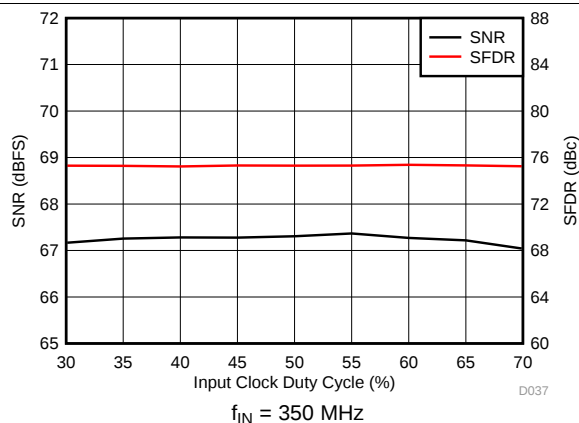

**Figure 43. Performance vs Clock Duty Cycle**

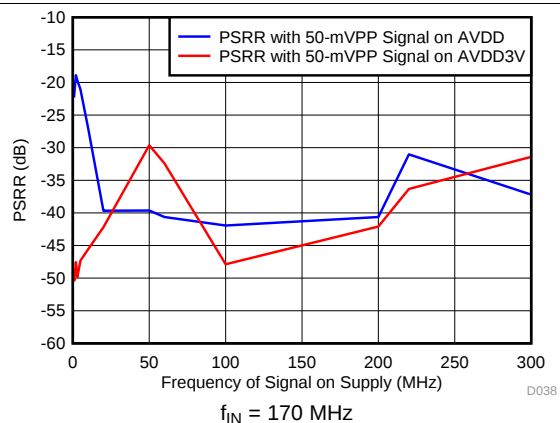

**Figure 44. Power-Supply Rejection Ratio vs Test Signal Frequency**

## Typical Characteristics (continued)

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ , and  $-1\text{-dBFS}$  differential input (unless otherwise noted)

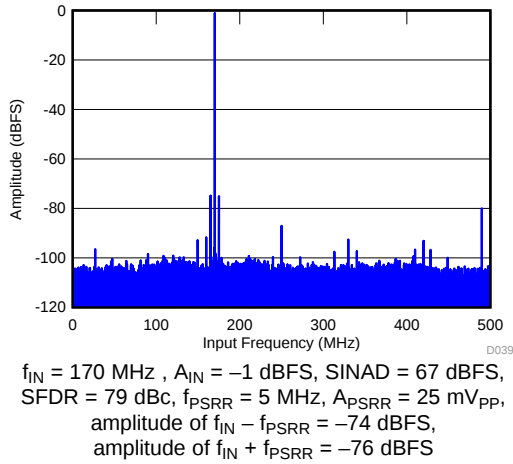


Figure 45. Power-Supply Rejection Ratio FFT for Test Signals on the AVDD Supply

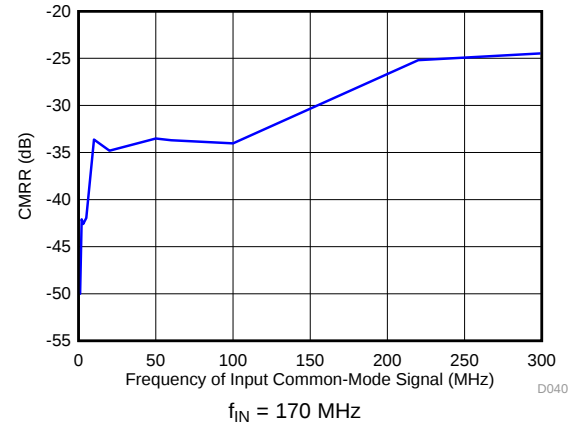


Figure 46. Common-Mode Rejection Ratio vs Test Signal Frequency

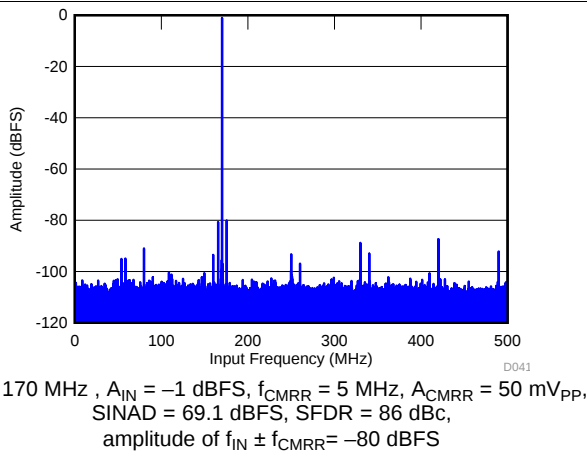


Figure 47. Common-Mode Rejection Ratio FFT

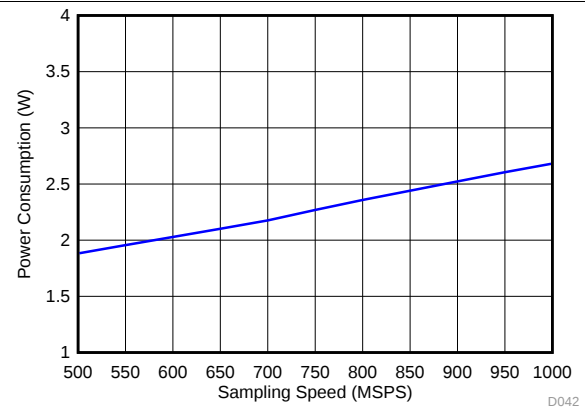


Figure 48. Power vs Sampling Speed

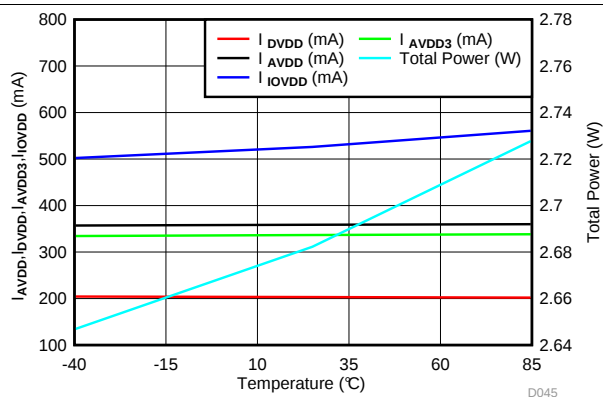


Figure 49. Power vs Temperature


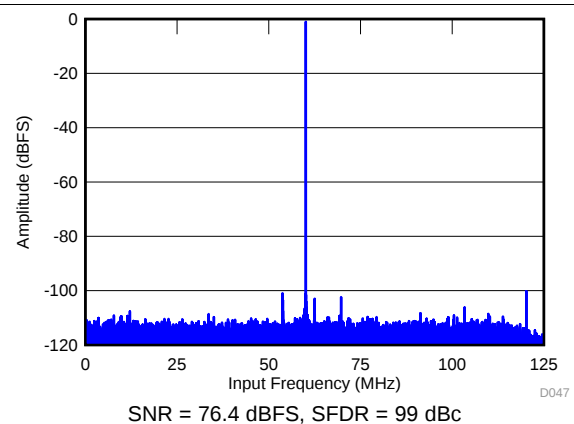



Figure 50. FFT for 60-MHz Input Signal in Decimate-by-4 Mode

## Typical Characteristics (continued)


typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle,  $\text{AVDD3V} = 3.0\text{ V}$ ,  $\text{AVDD} = \text{DVDD} = 1.9\text{ V}$ ,  $\text{IOVDD} = 1.15\text{ V}$ , and  $-1\text{-dBFS}$  differential input (unless otherwise noted)

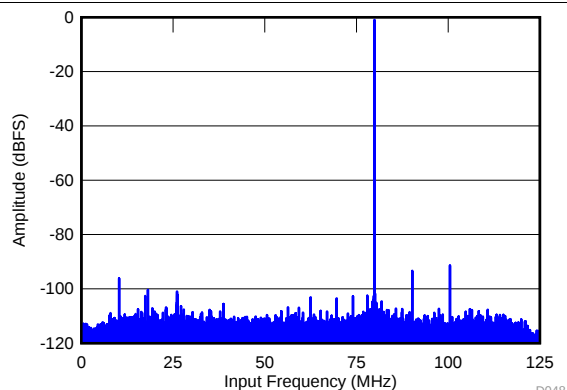


**Figure 51. FFT for 170-MHz Input Signal in Decimate-by-4 Mode**

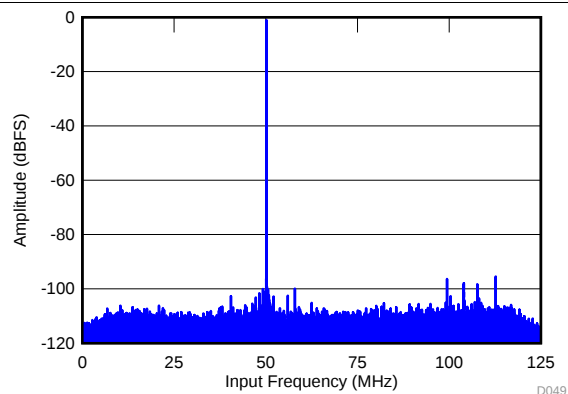


**Figure 52. FFT for 300-MHz Input Signal in Decimate-by-4 Mode**

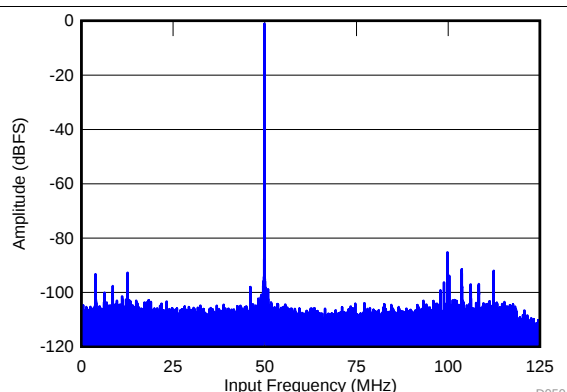

**Figure 53. FFT for 450-MHz Input Signal in Decimate-by-4 Mode**

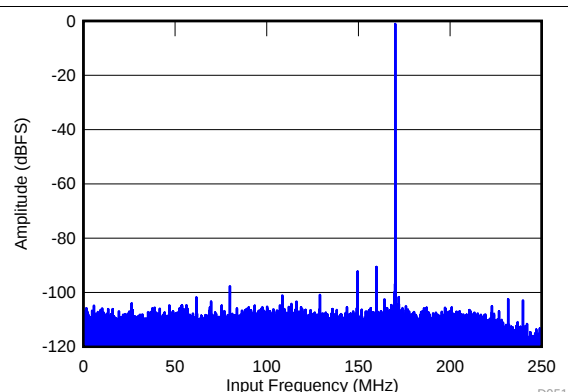



**Figure 54. FFT for 170-MHz Input Signal in Decimate-by-2 Mode**

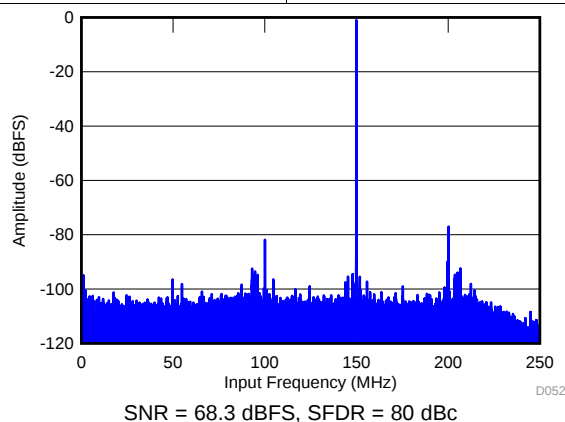

**Figure 55. FFT for 350-MHz Input Signal in Decimate-by-2 Mode**

## 7.10 Typical Characteristics: Contour

typical values are at  $T_A = 25^\circ\text{C}$ , full temperature range is from  $T_{\text{MIN}} = -40^\circ\text{C}$  to  $T_{\text{MAX}} = 85^\circ\text{C}$ , ADC sampling rate = 1.0 GSPS, 50% clock duty cycle, AVDD3V = 3.0 V, AVDD = DVDD = 1.9 V, IOVDD = 1.15 V, -1-dBFS differential input, and 0-dB digital gain (unless otherwise noted)

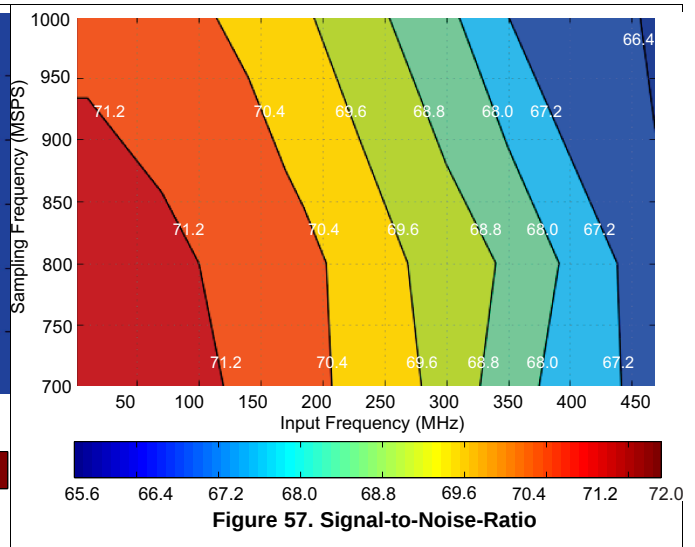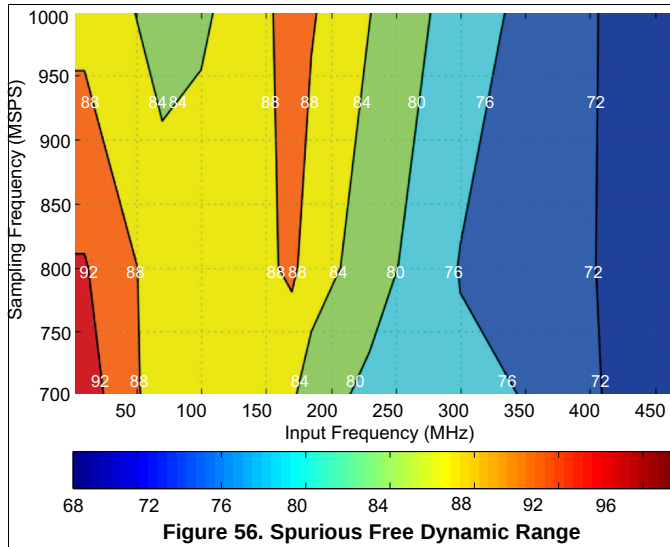


## 8 Detailed Description

### 8.1 Overview

The ADS54J60 is a low-power, wide-bandwidth, 16-bit, 1.0-GSPS, dual-channel, analog-to-digital converter (ADC). The ADS54J60 employs four interleaving ADCs for each channel to achieve a noise floor of  $-159$  dBFS/Hz. The ADS54J60 uses TI's proprietary interleaving and dither algorithms to achieve a clean spectrum with a high spurious-free dynamic range (SFDR). The device also offers various programmable decimation filtering options for systems requiring higher signal-to-noise ratio (SNR) and SFDR over a wide range of frequencies.

Analog input buffers isolate the ADC driver from glitch energy generated from sampling process, thereby simplify the driving network on-board. The JESD204B interface reduces the number of interface lines with two-lane and four-lane options, allowing a high system integration density. The JESD204B interface operates in subclass 1, enabling multi-chip synchronization with the SYSREF input.

### 8.2 Functional Block Diagram

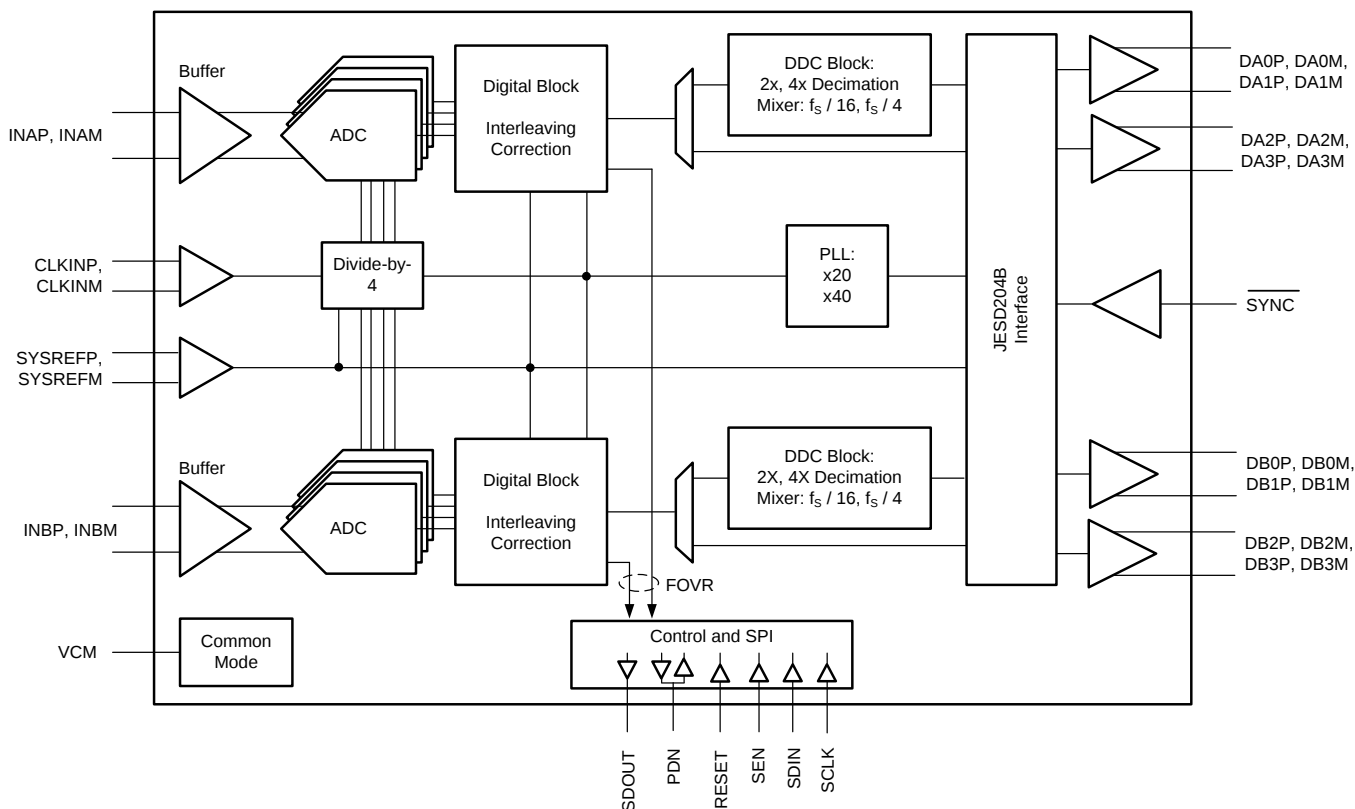


## 8.3 Feature Description

### 8.3.1 Analog Inputs

The ADS54J60 analog signal inputs are designed to be driven differentially. The analog input pins have internal analog buffers that drive the sampling circuit. As a result of the analog buffer, the input pins present a high impedance input across a very wide frequency range to the external driving source, which enables great flexibility in the external analog filter design as well as excellent 50-Ω matching for RF applications. The buffer also helps isolate the external driving circuit from the internal switching currents of the sampling circuit, resulting in a more constant SFDR performance across input frequencies.


The common-mode voltage of the signal inputs is internally biased to VCM using 600-Ω resistors, allowing for ac-coupling of the input drive network. Each input pin (INP, INM) must swing symmetrically between (VCM + 0.475 V) and (VCM – 0.475 V), resulting in a 1.9-V<sub>PP</sub> (default) differential input swing. The input sampling circuit has a 3-dB bandwidth that extends up to 1.2 GHz. An equivalent analog input network diagram is shown in Figure 58.

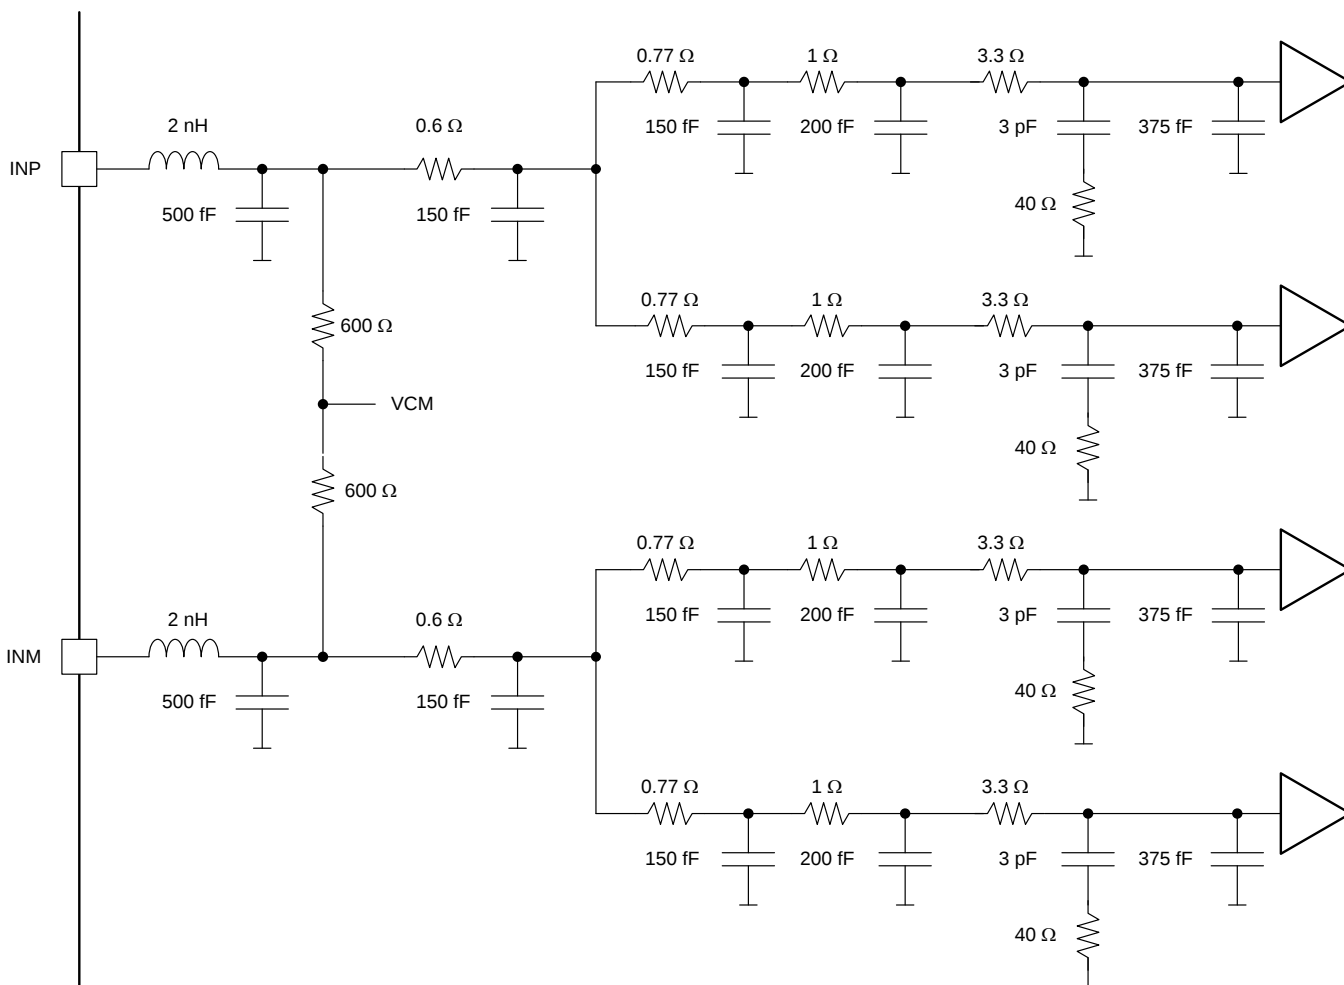


**Figure 58. Analog Input Network**

## Feature Description (continued)

The input bandwidth shown in Figure 59 is measured with respect to a 50-Ω differential input termination at the ADC input pins. Figure 60 shows the signal processing done inside the DDC block of the ADS54J60.

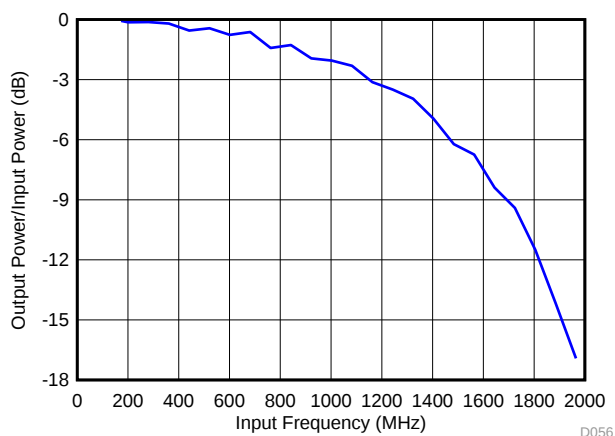

**Figure 59. Transfer Function versus Frequency**

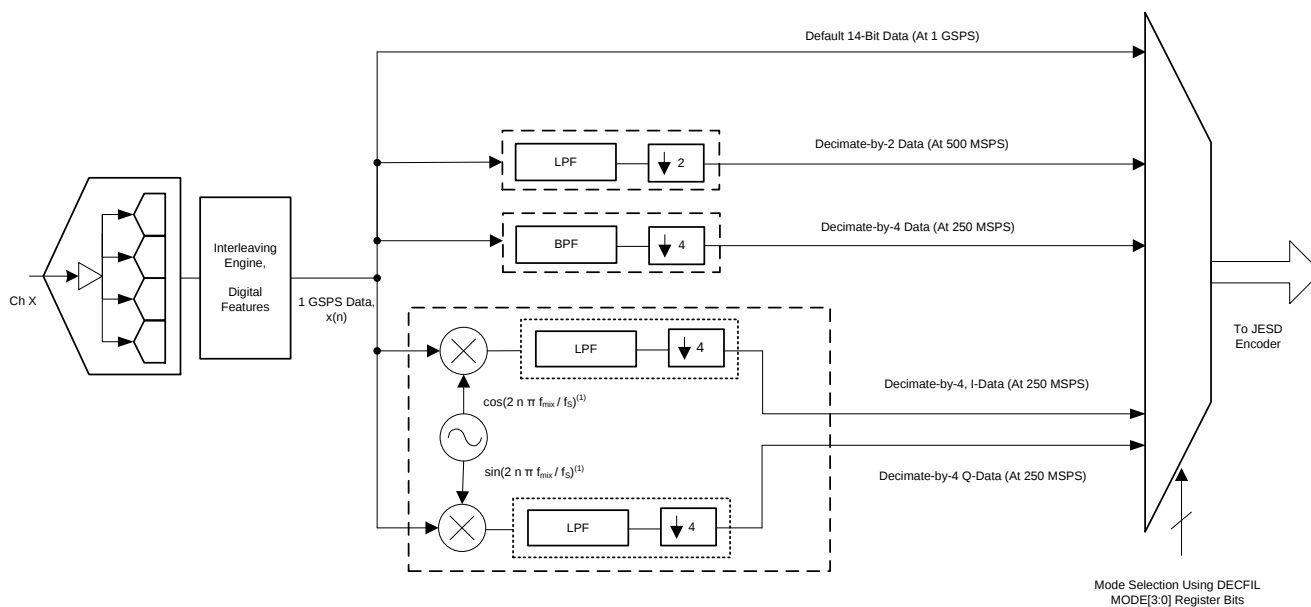

- (1) In IQ decimate-by-4 mode, the mixer frequency is fixed at  $f_{\text{mix}} = f_s / 4$ . For  $f_s = 1$  GSPS and  $f_{\text{mix}} = 250$  MHz.

**Figure 60. DDC Block**

## Feature Description (continued)

### 8.3.2 DDC Block

The ADS54J60 has an optional DDC block that can be enabled via an SPI register write. Each ADC channel is followed by a DDC block consisting of three different decimate-by-2 and by-4 finite impulse response (FIR) half-band filter options. The different decimation filter options can be selected via SPI programming.


#### 8.3.2.1 Decimate-by-2 Filter

This decimation filter has 41 taps. The stop-band attenuation is approximately 90 dB and the pass-band flatness is  $\pm 0.05$  dB. Table 1 shows corner frequencies for low-pass and high-pass filter options.


**Table 1. Corner Frequencies for the Decimate-by-2 Filter**

| CORNERS (dB) | LOW PASS           | HIGH PASS          |
|--------------|--------------------|--------------------|
| -0.1         | $0.202 \times f_S$ | $0.298 \times f_S$ |
| -0.5         | $0.210 \times f_S$ | $0.290 \times f_S$ |
| -1           | $0.215 \times f_S$ | $0.285 \times f_S$ |
| -3           | $0.227 \times f_S$ | $0.273 \times f_S$ |

Figure 61 and Figure 62 show the frequency response of decimate-by-2 filter from dc to  $f_S / 2$ .

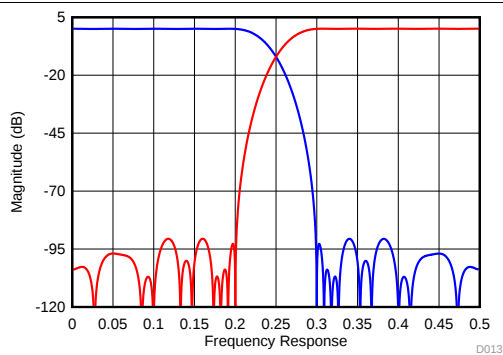

**Figure 61. Decimate-by-2 Filter Response**

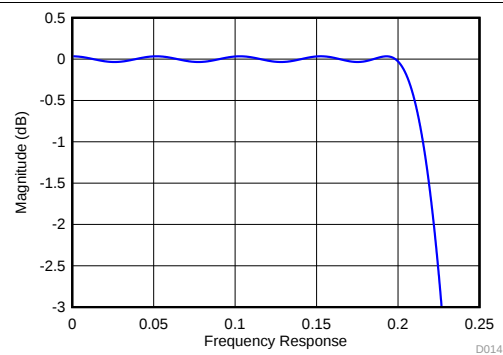

**Figure 62. Decimate-by-2 Filter Response (Zoomed)**


### 8.3.2.2 Decimate-by-4 Filter Using a Digital Mixer

This band-pass decimation filter consists of a digital mixer and three concatenated FIR filters with a combined latency of approximately 28 output clock cycles. The alias band attenuation is approximately 55 dB and the pass-band flatness is  $\pm 0.1$  dB. By default after reset, the band-pass filter is centered at  $f_s / 16$ . Using the SPI, the center frequency can be programmed at  $N \times f_s / 16$  (where  $N = 1, 3, 5$ , or  $7$ ). Table 2 shows corner frequencies for two extreme options. Figure 63 and Figure 64 show frequency response of decimate-by-4 filter for center frequencies  $f_s/16$  and  $3 \times f_s/16$  ( $N = 1$  and  $3$ ).


**Table 2. Corner frequencies for the Decimate-by-4 Filter**

| CORNERS (dB) | CORNER FREQUENCY AT LOWER SIDE<br>(Center Frequency $f_s / 16$ ) | CORNER FREQUENCY AT HIGHER SIDE<br>(Center Frequency $f_s / 16$ ) |
|--------------|------------------------------------------------------------------|-------------------------------------------------------------------|
| -0.1         | $0.011 \times f_s$                                               | $0.114 \times f_s$                                                |
| -0.5         | $0.010 \times f_s$                                               | $0.116 \times f_s$                                                |
| -1           | $0.008 \times f_s$                                               | $0.117 \times f_s$                                                |
| -3           | $0.006 \times f_s$                                               | $0.120 \times f_s$                                                |

Figure 63 and Figure 64 show the frequency response of a decimate-by-4 filter from dc to  $f_s / 2$ .

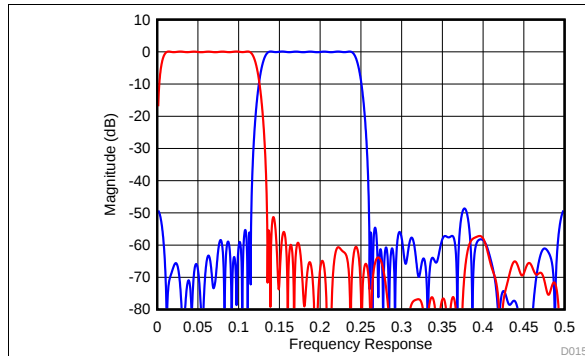

**Figure 63. Decimate-by-4 Filter Response**

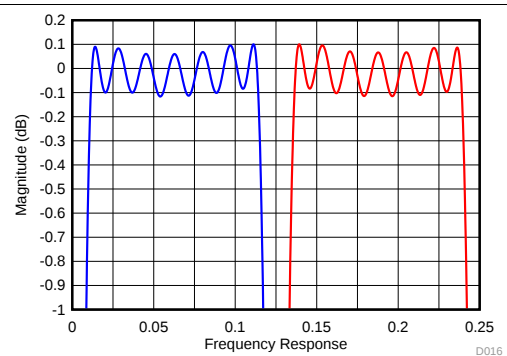

**Figure 64. Decimate-by-4 Filter Response (Zoomed)**



### 8.3.2.3 Decimate-by-4 Filter with IQ Outputs

In this configuration, the DDC block includes a fixed digital  $f_s / 4$  mixer. Thus, the IQ pass band is approximately  $\pm 110$  MHz, centered at  $f_s / 4$ . This decimation filter has 41 taps with a latency of approximately ten output clock cycles. The stop-band attenuation is approximately 90 dB and the pass-band flatness is  $\pm 0.05$  dB. Table 3 shows the corner frequencies for a low-pass decimate-by-4 with IQ filter.

**Table 3. Corner Frequencies for a Decimate-by-4 IQ Output Filter**

| CORNERS (dB) | LOW PASS           |
|--------------|--------------------|
| -0.1         | $0.107 \times f_s$ |
| -0.5         | $0.112 \times f_s$ |
| -1           | $0.115 \times f_s$ |
| -3           | $0.120 \times f_s$ |

Figure 65 and Figure 66 show the frequency response of a decimate-by-4 IQ output filter from dc to  $f_s / 2$ .

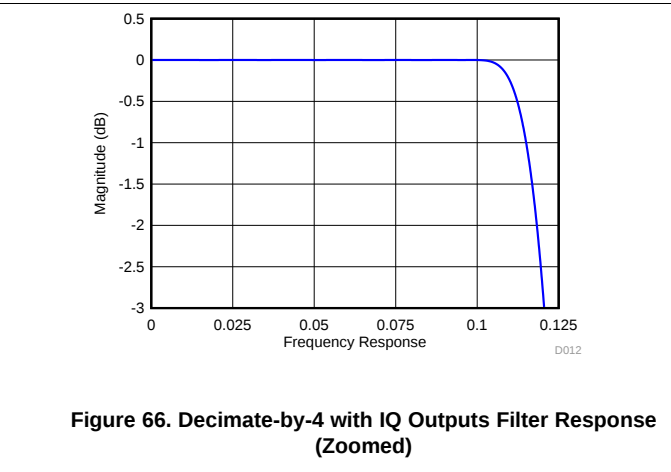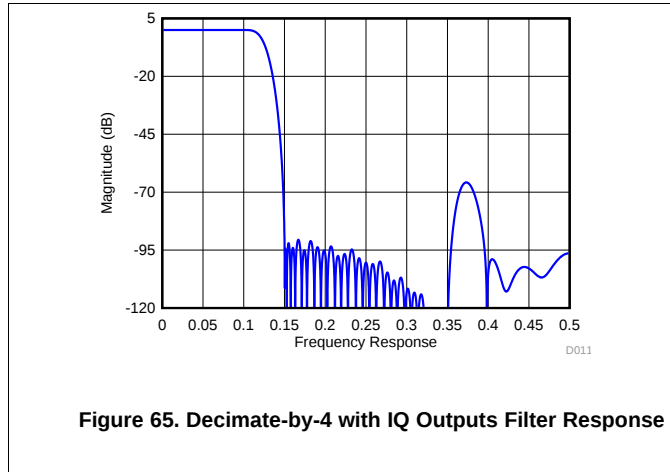

### 8.3.3 SYSREF Signal

The SYSREF signal is a periodic signal that is sampled by the ADS54J60 device clock and used to align the boundary of the local multi-frame clock inside the data converter. SYSREF is required to be a sub-harmonic of the local multiframe clock (LMFC) internal timing. To meet this requirement, the timing of SYSREF is dependent on the device clock frequency and the LMFC frequency, as determined by the selected DDC decimation and frames per multi-frame settings. TI recommends that the SYSREF signal be a low-frequency signal in the range of 1 MHz to 5 MHz in order to reduce coupling to the signal path both on the printed circuit board (PCB) as well as internal in the device.

The external SYSREF signal must be a sub-harmonic of the internal LMFC clock, as shown in Equation 1 and Table 4.

$$\text{SYSREF} = \text{LMFC} / 2^N$$

where

- $N = 0, 1, 2$ , and so forth.

(1)

**Table 4. Local Multi-Frame Clock Frequency**

| LMFS CONFIGURATION | DECIMATION | LMFC CLOCK <sup>(1)(2)</sup> |
|--------------------|------------|------------------------------|
| 4211               | —          | $f_s / K$                    |
| 4244               | —          | $(f_s / 4) / K$              |
| 8224               | —          | $(f_s / 4) / K$              |
| 4222               | 2X         | $(f_s / 4) / K$              |
| 2242               | 2X         | $(f_s / 4) / K$              |
| 2221               | 4X         | $(f_s / 4) / K$              |
| 2441               | 4X (IQ)    | $(f_s / 4) / K$              |
| 4421               | 4X (IQ)    | $(f_s / 4) / K$              |
| 1241               | 4X         | $(f_s / 4) / K$              |

(1)  $K$  = Number of frames per multi frame (JESD digital page 6900h, address 06h, bits 4-0).

(2)  $f_s$  = sampling (device) clock frequency.

For example, if LMFS = 8224 then the programmed value of K is 9 (the actual value is  $9 + 1 = 10$  because the actual value for K = the value set in the SPI register +1). If the device clock frequency is  $f_s = 1000$  MSPS, then the local multi-frame clock frequency becomes  $(1000 / 4) / 10 = 25$  MHz. The SYSREF signal frequency can be chosen as the LMFC frequency / 8 = 3.125 MHz.

### 8.3.3.1 SYSREF Not Present (Subclass 0, 2)

A SYSREF pulse is required by the ADS54J60 to reset internal counters. If SYSREF is not present, as can be the case in subclass 0 or 2, this pulse can be done by doing the following register writes shown in [Table 5](#).


**Table 5. Internally Pulsing SYSREF Twice Using Register Writes**

| ADDRESS (Hex) | DATA (Hex) | COMMENT              |
|---------------|------------|----------------------|
| 0-011h        | 80h        | Set the master page  |
| 0-054h        | 80h        | Enable manual SYSREF |
| 0-053h        | 01h        | Set SYSREF high      |
| 0-053h        | 00h        | Set SYSREF low       |
| 0-053h        | 01h        | Set SYSREF high      |
| 0-053h        | 00h        | Set SYSREF low       |

### 8.3.4 Overrange Indication

The ADS54J60 provides a fast overrange indication that can be presented in the digital output data stream via SPI configuration. Alternatively, if not used, the SDOUT (pin 11) and PDN (pin 50) pins can be configured via the SPI to output the fast OVR indicator.

When the FOVR indication is embedded in the output data stream, it replaces the LSB of the 16-bit data stream going to the 8b/10b encoder, as shown in [Figure 67](#).

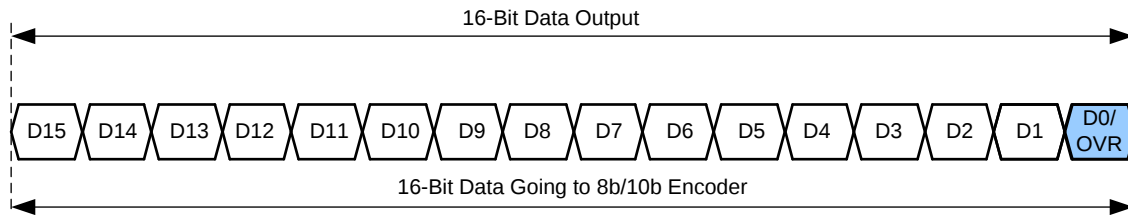


**Figure 67. Overrange Indication in a Data Stream**

#### 8.3.4.1 Fast OVR

The fast OVR is triggered if the input voltage exceeds the programmable overrange threshold and is presented after only 18 clock cycles +  $t_{PD}$  ( $t_{PD}$  of the gates and buffers is approximately 4 ns), thus enabling a quicker reaction to an overrange event.

The input voltage level at which the overload is detected is referred to as the *threshold*. The threshold is programmable using the FOVR THRESHOLD bits, as shown in [Figure 68](#). The FOVR is triggered 18 clock cycles +  $t_{PD}$  ( $t_{PD}$  of the gates and buffers is approximately 4 ns) after the overload condition occurs.

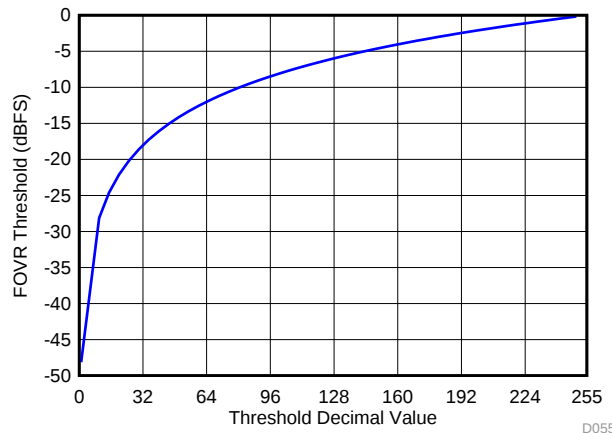

**Figure 68. Programming Fast OVR Thresholds**

The input voltage level at which the fast OVR is triggered is defined by [Equation 2](#):

$$\text{Full-Scale} \times [\text{Decimal Value of the FOVR Threshold Bits}] / 255 \quad (2)$$

The default threshold is E3h (227d), corresponding to a threshold of –1 dBFS.

In terms of full-scale input, the fast OVR threshold can be calculated as [Equation 3](#):

$$20\log(\text{FOVR Threshold} / 255) \quad (3)$$

### 8.3.5 Power-Down Mode

The ADS54J60 provides a highly-configurable power-down mode. Power-down can be enabled using the PDN pin or SPI register writes.

A power-down mask can be configured, which allows a trade-off between wake-up time and power consumption in power-down mode. Two independent power-down masks can be configured: MASK 1 and MASK 2 as shown in [Table 6](#). See the master page registers in [Table 15](#) for further details.

**Table 6. Register Address for Power-Down Modes**

| REGISTER ADDRESS<br>A[7:0] (Hex) | COMMENT | REGISTER DATA  |                  |                |          |             |   |   |   |
|----------------------------------|---------|----------------|------------------|----------------|----------|-------------|---|---|---|
|                                  |         | 7              | 6                | 5              | 4        | 3           | 2 | 1 | 0 |
| MASTER PAGE (80h)                |         |                |                  |                |          |             |   |   |   |
| 20                               | MASK 1  | PDN ADC CHA    |                  |                |          | PDN ADC CHB |   |   |   |
| 21                               |         | PDN BUFFER CHB |                  | PDN BUFFER CHA |          | 0           | 0 | 0 | 0 |
| 23                               | MASK 2  | PDN ADC CHA    |                  |                |          | PDN ADC CHB |   |   |   |
| 24                               |         | PDN BUFFER CHB |                  | PDN BUFFER CHA |          | 0           | 0 | 0 | 0 |
| 26                               | CONFIG  | GLOBAL PDN     | OVERRIDE PDN PIN | PDN MASK SEL   | 0        | 0           | 0 | 0 | 0 |
| 55                               |         | 0              | 0                | 0              | PDN MASK | 0           | 0 | 0 | 0 |

To save power, the device can be put in complete power down by using the GLOBAL PDN register bit. However, when JESD must remain linked up while putting the device in power down, the ADC and analog buffer can be powered down by using the PDN ADC CHx and PDN BUFFER CHx register bits after enabling the PDN MASK register bit. The PDN MASK SEL register bit can be used to select between MASK 1 or MASK 2. [Table 7](#) shows power consumption for different combinations of the GLOBAL PDN, PDN ADC CHx, and PDN BUFF CHx register bits.

**Table 7. Power Consumption in Different Power-Down Settings**

| REGISTER BIT                                                 | COMMENT                                                      | I <sub>AVDD3V</sub> (mA) | I <sub>AVDD</sub> (mA) | I <sub>DVDD</sub> (mA) | I <sub>IOVDD</sub> (mA) | TOTAL POWER (W) |
|--------------------------------------------------------------|--------------------------------------------------------------|--------------------------|------------------------|------------------------|-------------------------|-----------------|
| Default                                                      | After reset, with a full-scale input signal to both channels | 336                      | 358                    | 198                    | 533                     | 2.68            |
| GBL PDN = 1                                                  | The device is in complete power-down state                   | 2                        | 6                      | 22                     | 199                     | 0.29            |
| GBL PDN = 0, PDN ADC CHx = 1 (x = A or B)                    | The ADC of one channel is powered down                       | 274                      | 223                    | 135                    | 512                     | 2.09            |
| GBL PDN = 0, PDN BUFF CHx = 1 (x = A or B)                   | The input buffer of one channel is powered down              | 262                      | 352                    | 194                    | 545                     | 2.45            |
| GBL PDN = 0, PDN ADC CHx = 1, PDN BUFF CHx = 1 (x = A or B)  | The ADC and input buffer of one channel is powered down      | 198                      | 222                    | 132                    | 508                     | 1.85            |
| GBL PDN = 0, PDN ADC CHx = 1, PDN BUFF CHx = 1 (x = A and B) | The ADC and input buffer of both channels are powered down   | 60                       | 85                     | 66                     | 484                     | 1.02            |

## 8.4 Device Functional Modes


### 8.4.1 Device Configuration

The ADS54J60 can be configured by using a serial programming interface, as described in the [Serial Interface](#) section. In addition, the device has one dedicated parallel pin (PDN) for controlling the power-down mode.

The ADS54J60 supports a 24-bit (16-bit address, 8-bit data) SPI operation and uses paging (see the [Register Maps](#) section) to access all register bits.

#### 8.4.1.1 Serial Interface

The ADC has a set of internal registers that can be accessed by the serial interface formed by the SEN (serial interface enable), SCLK (serial interface clock), and SDIN (serial interface data) pins, as shown in [Figure 69](#). Legends used in [Figure 69](#) are explained in [Table 8](#). Serially shifting bits into the device is enabled when SEN is low. Serial data on SDIN are latched at every SCLK rising edge when SEN is active (low). The interface can function with SCLK frequencies from 2 MHz down to very low speeds (of a few Hertz) and also with a non-50% SCLK duty cycle.

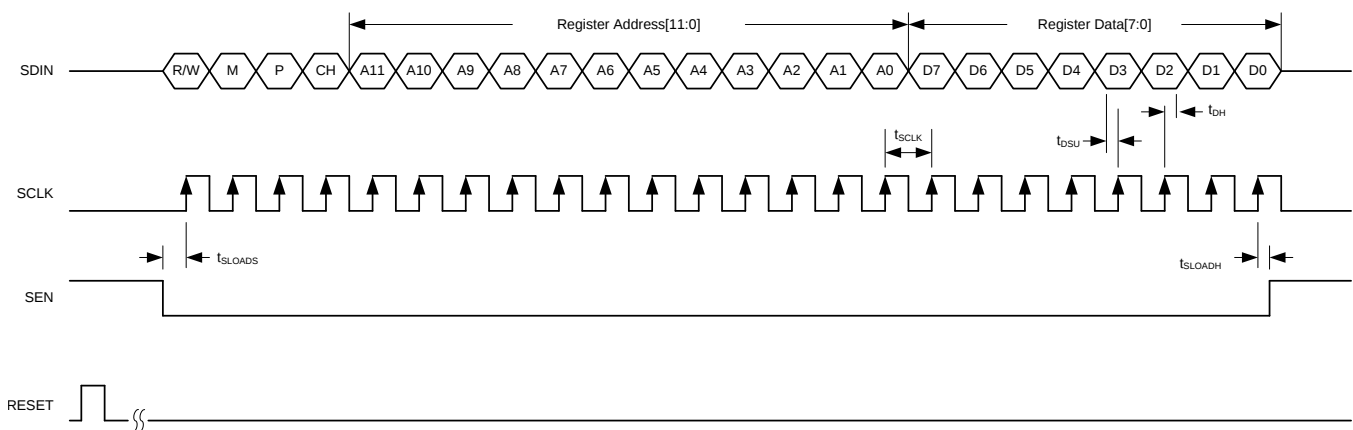

**Figure 69. SPI Timing Diagram**

**Table 8. SPI Timing Diagram Legend**

| SPI BITS | DESCRIPTION                                            | BIT SETTINGS                                                                                                        |
|----------|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| R/W      | Read/write bit                                         | 0 = SPI write<br>1 = SPI read back                                                                                  |
| M        | SPI bank access                                        | 0 = Analog SPI bank (master and ADC pages)<br>1 = JESD SPI bank (main digital, JESD analog, and JESD digital pages) |
| P        | JESD page selection bit                                | 0 = Page access<br>1 = Register access                                                                              |
| CH       | SPI access for a specific channel of the JESD SPI bank | 0 = Channel A<br>1 = Channel B<br>By default, both channels are being addressed.                                    |
| A[11:0]  | SPI address bits                                       | —                                                                                                                   |
| D[7:0]   | SPI data bits                                          | —                                                                                                                   |

Table 9 shows the timing requirements for the serial interface signals in Figure 69.


**Table 9. SPI Timing Requirements**

|                     |                                                  | MIN  | TYP | MAX | UNIT |
|---------------------|--------------------------------------------------|------|-----|-----|------|
| $f_{\text{SCLK}}$   | SCLK frequency (equal to $1 / t_{\text{SCLK}}$ ) | > dc |     | 2   | MHz  |
| $t_{\text{SLOADS}}$ | SEN to SCLK setup time                           | 100  |     |     | ns   |
| $t_{\text{SLOADH}}$ | SCLK to SEN hold time                            | 100  |     |     | ns   |
| $t_{\text{DSU}}$    | SDIN setup time                                  | 100  |     |     | ns   |
| $t_{\text{DH}}$     | SDIN hold time                                   | 100  |     |     | ns   |

#### 8.4.1.2 Serial Register Write: Analog Bank

The analog SPI bank contains of two pages (the master and ADC page). The internal register of the ADS54J60 analog SPI bank can be programmed by:

1. Driving the SEN pin low.
2. Initiating a serial interface cycle specifying the page address of the register whose content must be written.
  - Master page: write address 0011h with 80h.
  - ADC page: write address 0011h with 0Fh.
3. Writing the register content as shown in Figure 70. When a page is selected, multiple writes into the same page can be done.

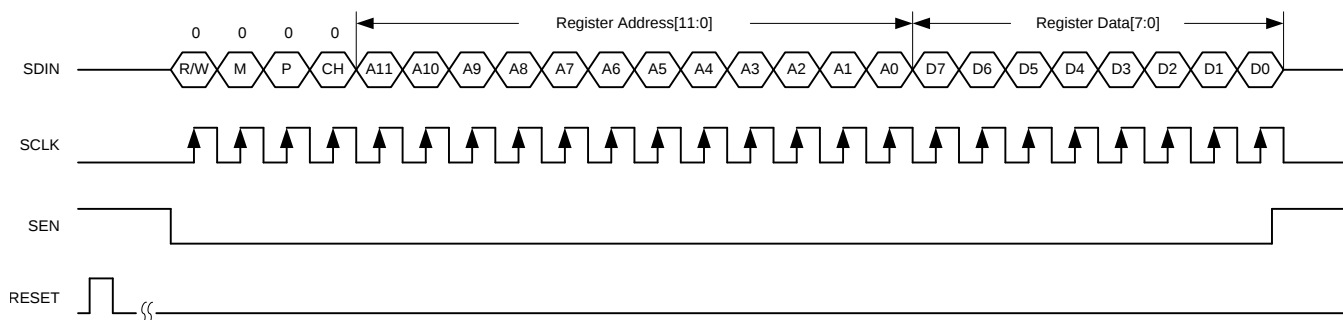


**Figure 70. Serial Register Write Timing Diagram**

### 8.4.1.3 Serial Register Readout: Analog Bank

The content from one of the two analog banks can be read out by:

1. Driving the SEN pin low.
2. Selecting the page address of the register whose content must be read.
  - Master page: write address 0011h with 80h.
  - ADC page: write address 0011h with 0Fh.
3. Setting the R/W bit to 1 and write the address to be read back.
4. Reading back the register content on the SDOUT pin, as shown in Figure 71. When a page is selected, multiple read backs from the same page can be done. SDOUT comes out at the SCLK falling edge with an approximate delay ( $t_{SD\_DELAY}$ ) of 68 ns; see Figure 75.

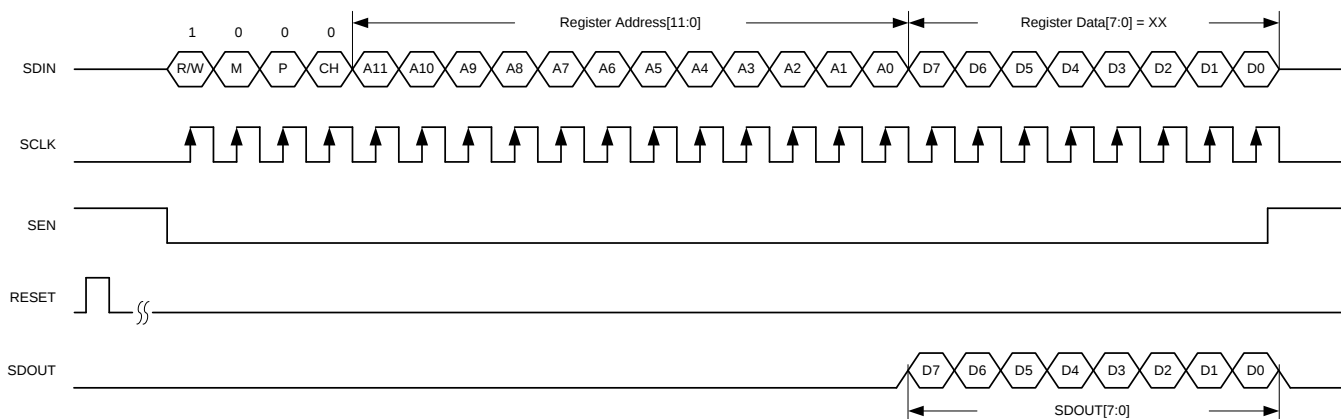


**Figure 71. Serial Register Read Timing Diagram**

### 8.4.1.4 JESD Bank SPI Page Selection

The JESD SPI bank contains four pages (main digital, JESD digital, and JESD analog pages). The individual pages can be selected by:

1. Driving the SEN pin low.
2. Setting the M bit to 1 and specifying the page with two register writes. Note that the P bit must be set to 0, as shown in Figure 72.
  - Write address 4003h with 00h (LSB byte of the page address).
  - Write address 4004h with the MSB byte of the page address.
    - For the main digital page: write address 4004h with 68h.
    - For the JESD digital page: write address 4004h with 69h.
    - For the JESD analog page: write address 4004h with 6Ah.

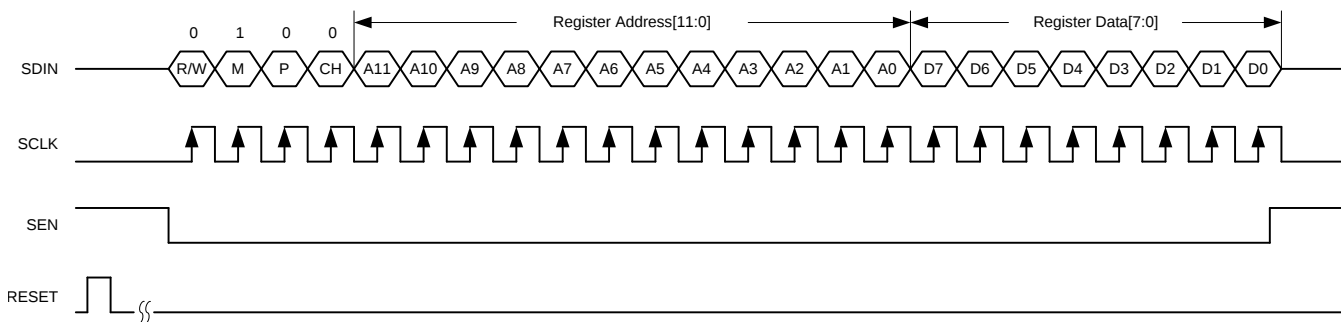


**Figure 72. SPI Page Selection**

### 8.4.1.5 Serial Register Write: JESD Bank

The ADS54J60 is a dual-channel device and the JESD204B portion is configured individually for each channel by using the CH bit. Note that the P bit must be set to 1 for register writes.

1. Drive the SEN pin low.
2. Select the JESD bank page. Note that the M bit = 1 and the P bit = 0.
  - Write address 4003h with 00h.
  - Write address 4005h with 01h to enable separate control for both channels.
    - For the main digital page: write address 4004h with 68h.
    - For the JESD digital page: write address 4004h with 69h.
    - For the JESD analog page: write address 4004h with 6Ah.
3. Set the M and P bits to 1, select channel A (CH = 0) or channel B (CH = 1), and write the register content as shown in [Figure 73](#). When a page is selected, multiple writes into the same page can be done.

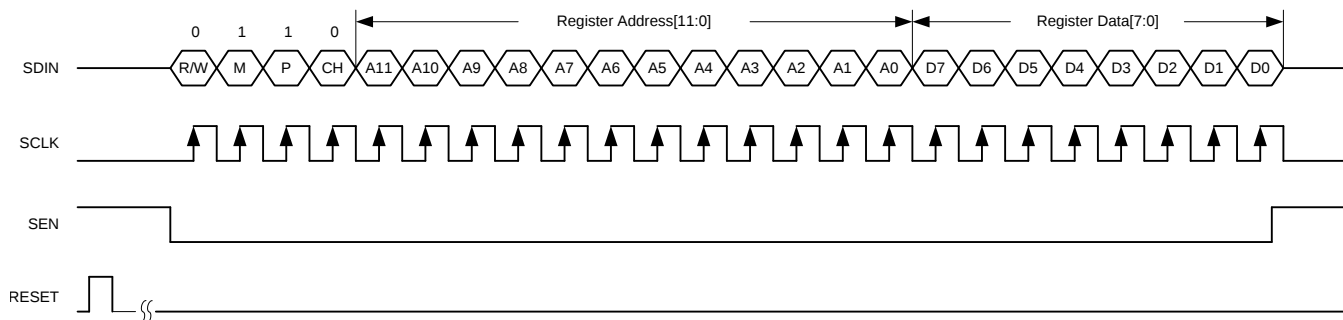

**Figure 73. JESD Serial Register Write Timing Diagram**


#### 8.4.1.5.1 Individual Channel Programming

By default, register writes are applied to both channels. To enable individual channel writes, write address 4005h with 01h (default is 00h).


### 8.4.1.6 Serial Register Readout: JESD Bank

The content from one of the pages of the JESD bank can be read out by:

1. Driving the SEN pin low.
2. Selecting the JESD bank page. Note that the M bit = 1 and the P bit = 0.
  - Write address 4003h with 00h.
  - Write address 4005h with 01h to enable separate control for both channels.
    - For the main digital page: write address 4004h with 68h.
    - For the JESD digital page: write address 4004h with 69h.
    - For the JESD analog page: write address 4004h with 6Ah.
3. Setting the R/W, M, and P bits to 1, selecting channel A or channel B, and writing the address to be read back.
4. Reading back the register content on the SDO pin; see [Figure 74](#). When a page is selected, multiple read backs from the same page can be done. SDO comes out at the SCLK falling edge with an approximate delay ( $t_{SD\_DELAY}$ ) of 68 ns; see [Figure 75](#).

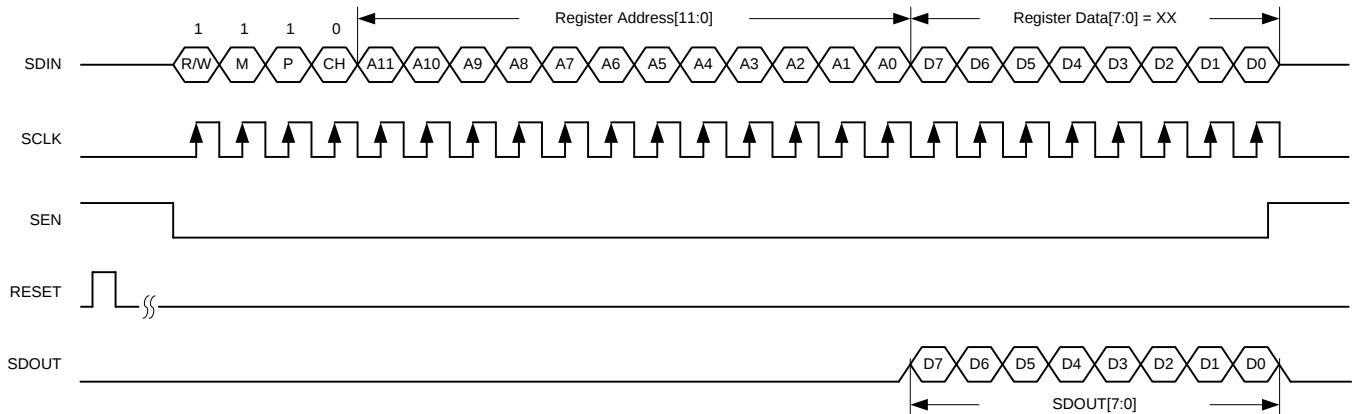

**Figure 74. JESD Serial Register Read Timing Diagram**

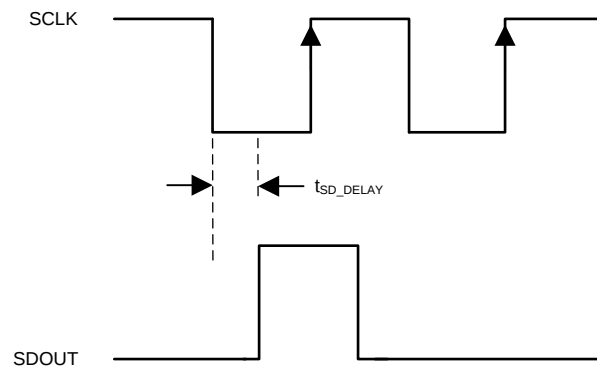


**Figure 75. SDOUT Timing Diagram**

### 8.4.2 JESD204B Interface

The ADS54J60 supports device subclass 1 with a maximum output data rate of 10.0 Gbps for each serial transmitter.


An external SYSREF signal is used to align all internal clock phases and the local multi-frame clock to a specific sampling clock edge, allowing synchronization of multiple devices in a system and minimizing timing and alignment uncertainty. The SYNC input is used to control the JESD204B SERDES blocks.

Depending on the ADC output data rate, the JESD204B output interface can be operated with either two or four lanes per single ADC; see [Figure 76](#). The JESD204B setup and configuration of the frame assembly parameters is controlled via the SPI interface.

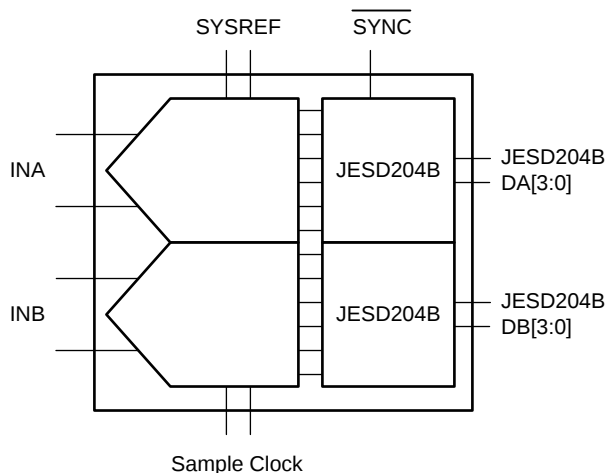

**Figure 76. ADS54J60 Block Diagram**

The JESD204B transmitter block shown in [Figure 77](#) consists of the transport layer, the data scrambler, and the link layer. The transport layer maps the ADC output data into the selected JESD204B frame data format. The link layer performs the 8b/10b data encoding as well as the synchronization and initial lane alignment using the SYNC input signal. Optionally, data from the transport layer can be scrambled.

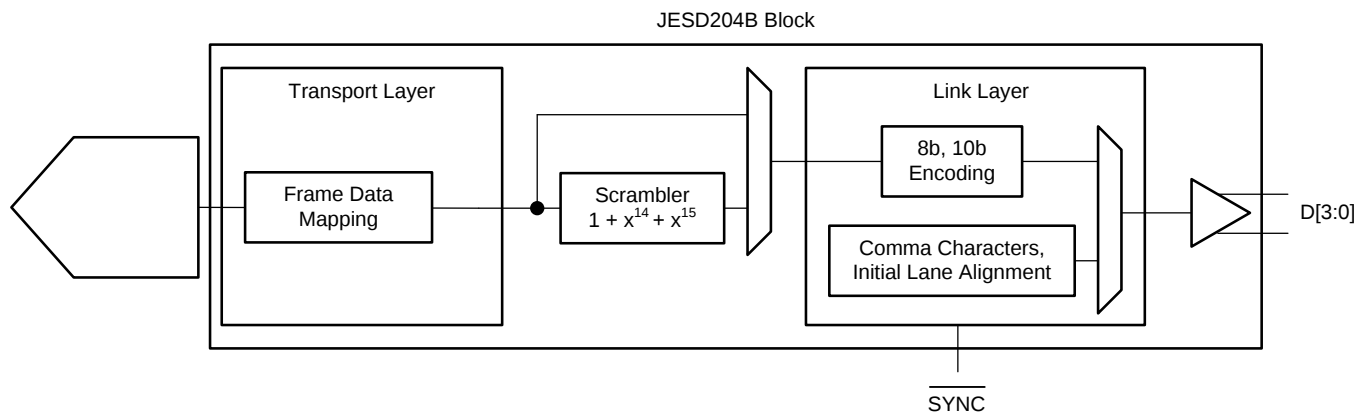


**Figure 77. JESD204B Transmitter Block**

### 8.4.2.1 JESD204B Initial Lane Alignment (ILA)

The initial lane alignment process is started when the receiving device de-asserts the  $\overline{\text{SYNC}}$  signal, as shown in Figure 78. When a logic low is detected on the SYNC input pin, the ADS54J60 starts transmitting comma (K28.5) characters to establish a code group synchronization.

When synchronization is complete, the receiving device asserts the  $\overline{\text{SYNC}}$  signal and the ADS54J60 starts the initial lane alignment sequence with the next local multi-frame clock boundary. The ADS54J60 transmits four multi-frames, each containing K frames (K is SPI programmable). Each of the multi-frames contains the frame start and end symbols and the second multi-frame also contains the JESD204 link configuration data.

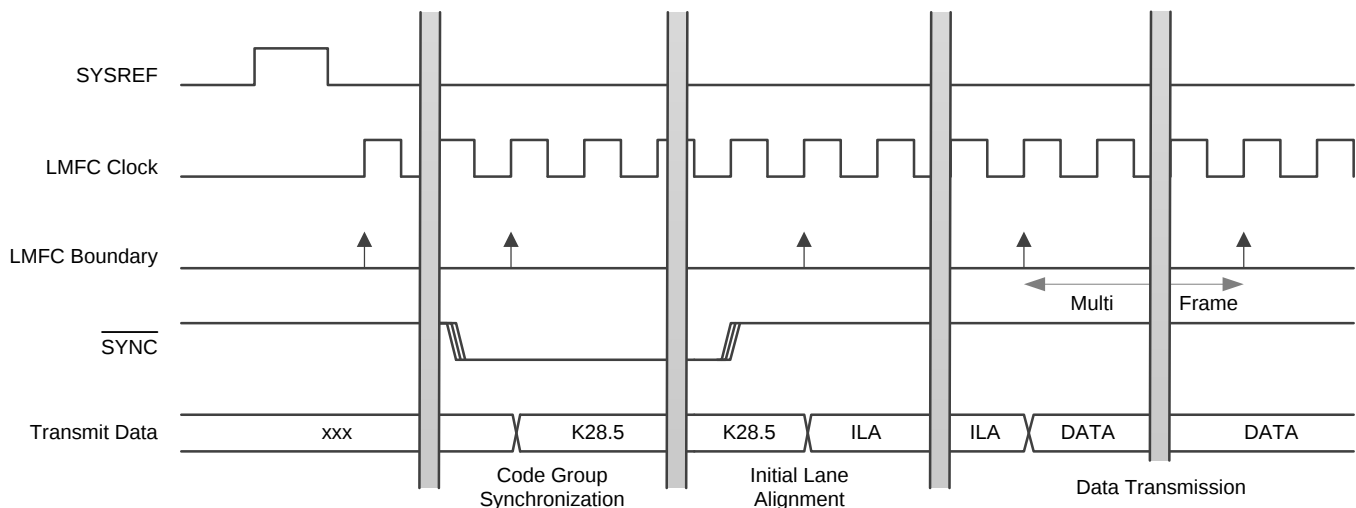

**Figure 78. Lane Alignment Sequence**

### 8.4.2.2 JESD204B Test Patterns

There are three different test patterns available in the transport layer of the JESD204B interface. The ADS54J60 supports a clock output, encoded test pattern, and an 12-octet RPAT pattern. These test patterns can be enabled via an SPI register write and are located in the JESD digital page of the JESD bank.

### 8.4.2.3 JESD204B Frame

The JESD204B standard defines the following parameters:

- L is the number of lanes per link.
- M is the number of converters per device.
- F is the number of octets per frame clock period, per lane.
- S is the number of samples per frame per converter.

### 8.4.2.4 JESD204B Frame

[Table 10](#) lists the available JESD204B formats and valid ranges for the ADS54J60 when the decimation filter is not used. The ranges are limited by the SERDES lane rate and the maximum ADC sample frequency.

**Table 10. Default Interface Rates**

| L | M | F | S | DECIMATION | MINIMUM RATES        |                        | MAXIMUM RATES        |                        |
|---|---|---|---|------------|----------------------|------------------------|----------------------|------------------------|
|   |   |   |   |            | SAMPLING RATE (MSPS) | SERDES BIT RATE (Gbps) | SAMPLING RATE (MSPS) | SERDES BIT RATE (Gbps) |
| 4 | 2 | 1 | 1 | Not used   | 250                  | 2.5                    | 1000                 | 10.0                   |
| 4 | 2 | 4 | 4 | Not used   | 250                  | 2.5                    | 1000                 | 10.0                   |
| 8 | 2 | 2 | 4 | Not used   | 500                  | 2.5                    | 1000                 | 5.0                    |

#### NOTE

In the LMFS = 8224 row of [Table 10](#), the sample order in lane DA2 and DA3 are swapped.

The detailed frame assembly is shown in [Table 11](#).

**Table 11. Default Frame Assembly**

| PIN | LMFS = 4211           | LMFS = 4244           |                      |                       |                      | LMFS = 8224           |                      |
|-----|-----------------------|-----------------------|----------------------|-----------------------|----------------------|-----------------------|----------------------|
| DA0 |                       |                       |                      |                       |                      | A <sub>3</sub> [15:8] | A <sub>3</sub> [7:0] |
| DA1 | A <sub>0</sub> [7:0]  | A <sub>2</sub> [15:8] | A <sub>2</sub> [7:0] | A <sub>3</sub> [15:8] | A <sub>3</sub> [7:0] | A <sub>2</sub> [15:8] | A <sub>2</sub> [7:0] |
| DA2 | A <sub>0</sub> [15:8] | A <sub>0</sub> [15:8] | A <sub>0</sub> [7:0] | A <sub>1</sub> [15:8] | A <sub>1</sub> [7:0] | A <sub>0</sub> [15:8] | A <sub>0</sub> [7:0] |
| DA3 |                       |                       |                      |                       |                      | A <sub>1</sub> [15:8] | A <sub>1</sub> [7:0] |
| DB0 |                       |                       |                      |                       |                      | B <sub>3</sub> [15:8] | B <sub>3</sub> [7:0] |
| DB1 | B <sub>0</sub> [7:0]  | B <sub>2</sub> [15:8] | B <sub>2</sub> [7:0] | B <sub>3</sub> [15:8] | B <sub>3</sub> [7:0] | B <sub>2</sub> [15:8] | B <sub>2</sub> [7:0] |
| DB2 | B <sub>0</sub> [15:8] | B <sub>0</sub> [15:8] | B <sub>0</sub> [7:0] | B <sub>1</sub> [15:8] | B <sub>1</sub> [7:0] | B <sub>0</sub> [15:8] | B <sub>0</sub> [7:0] |
| DB3 |                       |                       |                      |                       |                      | B <sub>1</sub> [15:8] | B <sub>1</sub> [7:0] |

### 8.4.2.5 JESD204B Frame Assembly with Decimation

Table 12 lists the available JESD204B formats and valid ranges for the ADS54J60 when enabling the decimation filter. The ranges are limited by the SERDES line rate and the maximum ADC sample frequency.

Table 13 lists the detailed frame assembly with different decimation options.

**Table 12. Interface Rates with Decimation Filter**

| L | M | F | S | DECIMATION | MINIMUM RATES                 |                           |                        | MAXIMUM RATES                 |                           |                        |
|---|---|---|---|------------|-------------------------------|---------------------------|------------------------|-------------------------------|---------------------------|------------------------|
|   |   |   |   |            | DEVICE CLOCK FREQUENCY (MSPS) | OUTPUT SAMPLE RATE (MSPS) | SERDES BIT RATE (Gbps) | DEVICE CLOCK FREQUENCY (MSPS) | OUTPUT SAMPLE RATE (MSPS) | SERDES BIT RATE (Gbps) |
| 4 | 4 | 2 | 1 | 4X (IQ)    | 500                           | 125                       | 2.5                    | 1000                          | 250                       | 5.0                    |
| 4 | 2 | 2 | 2 | 2X         | 500                           | 250                       | 2.5                    | 1000                          | 500                       | 5.0                    |
| 2 | 2 | 4 | 2 | 2X         | 300                           | 150                       | 3                      | 1000                          | 500                       | 10.0                   |
| 2 | 2 | 2 | 1 | 4X         | 500                           | 125                       | 2.5                    | 1000                          | 250                       | 5.0                    |
| 2 | 4 | 4 | 1 | 4X (IQ)    | 300                           | 75                        | 3                      | 1000                          | 250                       | 10.0                   |
| 1 | 2 | 4 | 1 | 4X         | 300                           | 75                        | 3                      | 1000                          | 250                       | 10.0                   |

**Table 13. Frame Assembly with Decimation Filter**

| PIN | LMFS = 4222, 2X DECIMATION |          | LMFS = 2242, 2X DECIMATION |          |           |          | LMFS = 2221, 4X DECIMATION |          | LMFS = 2441, 4X DECIMATION (IQ) |           |            |           | LMFS = 4421, 4X DECIMATION (IQ) |           | LMFS = 1241, 4X DECIMATION |          |           |          |
|-----|----------------------------|----------|----------------------------|----------|-----------|----------|----------------------------|----------|---------------------------------|-----------|------------|-----------|---------------------------------|-----------|----------------------------|----------|-----------|----------|
| DA0 | A1 [15:8]                  | A1 [7:0] |                            |          |           |          |                            |          |                                 |           |            |           | AQ0 [15:8]                      | AQ0 [7:0] |                            |          |           |          |
| DA1 | A0 [15:8]                  | A0 [7:0] | A0 [15:8]                  | A0 [7:0] | A1 [15:8] | A1 [7:0] | A0 [15:8]                  | A0 [7:0] | AI0 [15:8]                      | AI0 [7:0] | AQ0 [15:8] | AQ0 [7:0] | AI0 [15:8]                      | AI0 [7:0] | A0 [15:8]                  | A0 [7:0] | B0 [15:8] | B0 [7:0] |
| DA2 |                            |          |                            |          |           |          |                            |          |                                 |           |            |           |                                 |           |                            |          |           |          |
| DA3 |                            |          |                            |          |           |          |                            |          |                                 |           |            |           |                                 |           |                            |          |           |          |
| DB0 | B1 [15:8]                  | B1 [7:0] |                            |          |           |          |                            |          |                                 |           |            |           | BQ0 [15:8]                      | BQ0 [7:0] |                            |          |           |          |
| DB1 | B0 [15:8]                  | B0 [7:0] | B0 [15:8]                  | B0 [7:0] | B1 [15:8] | B1 [7:0] | B0 [15:8]                  | B0 [7:0] | BI0 [15:8]                      | BI0 [7:0] | BQ0 [15:8] | BQ0 [7:0] | BI0 [15:8]                      | BI0 [7:0] |                            |          |           |          |
| DB2 |                            |          |                            |          |           |          |                            |          |                                 |           |            |           |                                 |           |                            |          |           |          |
| DB3 |                            |          |                            |          |           |          |                            |          |                                 |           |            |           |                                 |           |                            |          |           |          |


**Table 14. Program Summary of DDC Modes and JESD Link Configuration<sup>(1)(2)</sup>**

| LMFS OPTIONS |   |   |   | DDC MODES PROGRAMMING               |                                       |                                                                         |                            | JESD LINK (LMFS) PROGRAMMING |                              |                           |                               |                                |                                 |                                 |
|--------------|---|---|---|-------------------------------------|---------------------------------------|-------------------------------------------------------------------------|----------------------------|------------------------------|------------------------------|---------------------------|-------------------------------|--------------------------------|---------------------------------|---------------------------------|
| L            | M | F | S | DECIMATION OPTIONS                  | DEC MODE EN, DECFIL EN <sup>(3)</sup> | DECFIL MODE[3:0] <sup>(4)</sup>                                         | JESD FILTER <sup>(5)</sup> | JESD MODE <sup>(6)</sup>     | JESD PLL MODE <sup>(7)</sup> | LANE SHARE <sup>(8)</sup> | DA_BUS_REORDER <sup>(9)</sup> | DB_BUS_REORDER <sup>(10)</sup> | BUS_REORDER_EN1 <sup>(11)</sup> | BUS_REORDER_EN2 <sup>(12)</sup> |
| 4            | 2 | 1 | 1 | No decimation                       | 00                                    | 00                                                                      | 000                        | 100                          | 10                           | 0                         | 00h                           | 00h                            | 0                               | 0                               |
| 4            | 2 | 4 | 4 | No decimation                       | 00                                    | 00                                                                      | 000                        | 010                          | 10                           | 0                         | 00h                           | 00h                            | 0                               | 0                               |
| 8            | 2 | 2 | 4 | No decimation (default after reset) | 00                                    | 00                                                                      | 000                        | 001                          | 00                           | 0                         | 00h                           | 00h                            | 0                               | 0                               |
| 4            | 4 | 2 | 1 | 4X (IQ)                             | 11                                    | 0011 (LPF with $f_s / 4$ mixer)                                         | 111                        | 001                          | 00                           | 0                         | 0Ah                           | 0Ah                            | 1                               | 1                               |
| 4            | 2 | 2 | 2 | 2X                                  | 11                                    | 0010 (LPF) or 0110 (HPF)                                                | 110                        | 001                          | 00                           | 0                         | 0Ah                           | 0Ah                            | 1                               | 1                               |
| 2            | 2 | 4 | 2 | 2X                                  | 11                                    | 0010 (LPF) or 0110 (HPF)                                                | 110                        | 010                          | 10                           | 0                         | 0Ah                           | 0Ah                            | 1                               | 1                               |
| 2            | 2 | 2 | 1 | 4X                                  | 11                                    | 0000, 0100, 1000, or 1100 (all BPFs with different center frequencies). | 100                        | 001                          | 00                           | 0                         | 0Ah                           | 0Ah                            | 1                               | 1                               |
| 2            | 4 | 4 | 1 | 4X (IQ)                             | 11                                    | 0011 (LPF with an $f_s / 4$ mixer)                                      | 111                        | 010                          | 10                           | 0                         | 0Ah                           | 0Ah                            | 1                               | 1                               |
| 1            | 2 | 4 | 1 | 4X                                  | 11                                    | 0000, 0100, 1000, or 1100 (all BPFs with different center frequencies)  | 100                        | 010                          | 10                           | 1                         | 0Ah                           | 0Ah                            | 1                               | 1                               |

- (1) Keeping the same LMFS settings for both channels is recommended.
- (2) The PULSE RESET register bit must be pulsed after the registers in the main digital page are programmed.
- (3) The DEC MODE EN and DECFIL EN register bits are located in the main digital page, register 04Dh (bit 3) and register 041h (bit 4).
- (4) The DECFIL MODE[3:0] register bits are located in the main digital page, register 041h (bits 5 and 2-0).
- (5) The JESD FILTER register bits are located in the JESD digital page, register 001h (bits 5-3).
- (6) The JESD MODE register bits are located in the JESD digital page, register 001h (bits 2-0).
- (7) The JESD PLL MODE register bits are located in the JESD analog page, register 016h (bits 1-0).
- (8) The LANE SHARE register bit is located in the JESD digital page, register 016h (bit 4).
- (9) The DA\_BUS\_REORDER register bits are located in the JESD digital page, register 031h (bits 7-0).
- (10) The DB\_BUS\_REORDER register bits are located in the JESD digital page, register 032h (bits 7-0).
- (11) The BUS\_REORDER\_EN1 register bit is located in the main digital page, register 052h (bit 7).
- (12) The BUS\_REORDER\_EN2 register bit is located in the main digital page, register 072h (bit 3).

#### 8.4.2.5.1 JESD Transmitter Interface


Each of the 10.0-Gbps SERDES JESD transmitter outputs requires ac coupling between the transmitter and receiver. The differential pair must be terminated with 100-Ω resistors as close to the receiving device as possible to avoid unwanted reflections and signal degradation, as shown in Figure 79.

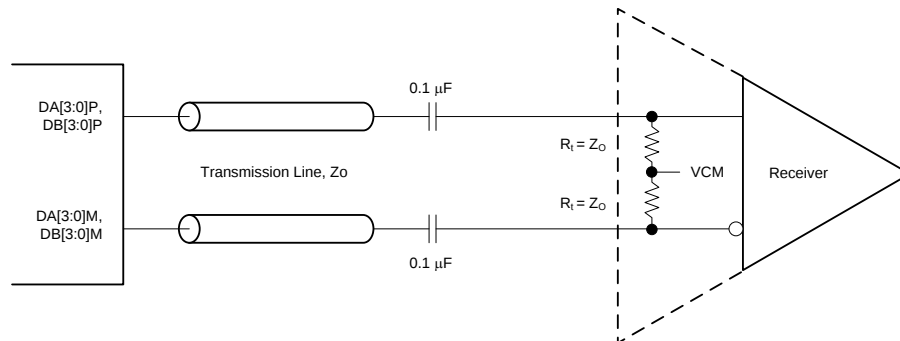


**Figure 79. Output Connection to Receiver**

#### 8.4.2.5.2 Eye Diagram


Figure 80 to Figure 83 show the serial output eye diagrams of the ADS54J60 at 5.0 Gbps and 10 Gbps with default and increased output voltage swing against the JESD204B mask.

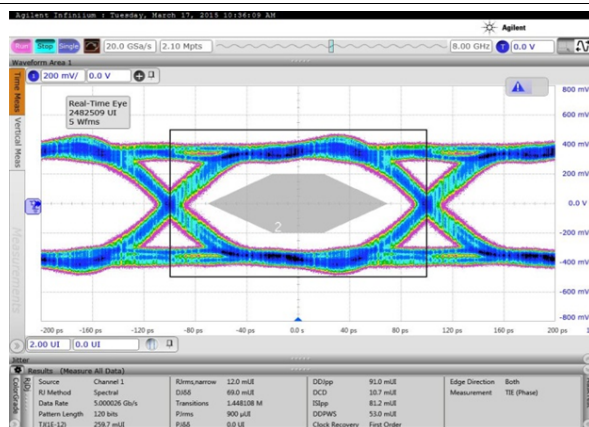


**Figure 80. Eye at 5-Gbps Bit Rate with Default Output Swing**

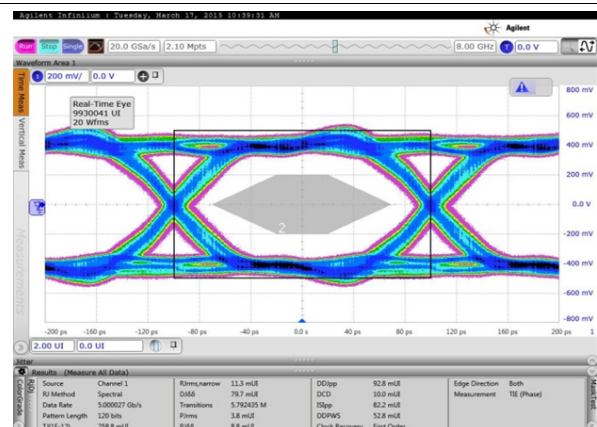

**Figure 81. Eye at 5-Gbps Bit Rate with Increased Output Swing**

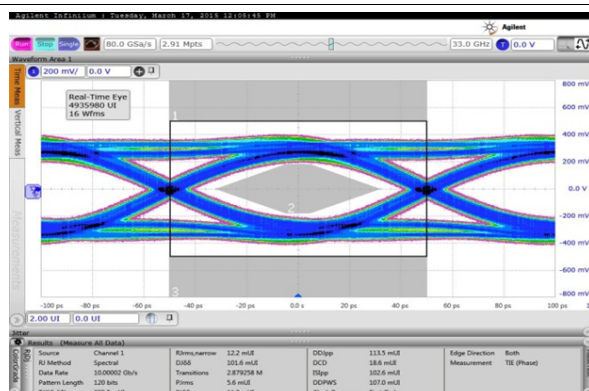


**Figure 82. Eye at 10-Gbps Bit Rate with Default Output Swing**

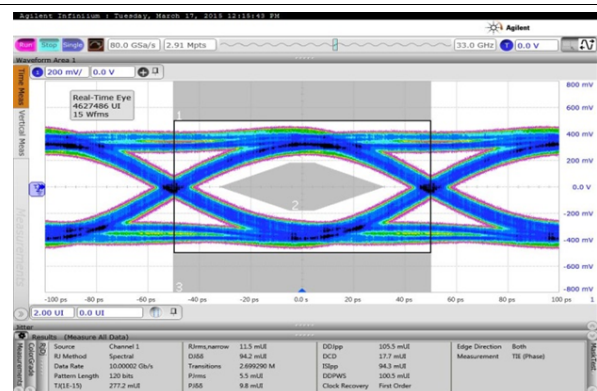

**Figure 83. Eye at 10-Gbps Bit Rate with Increased Output Swing**

## 8.5 Register Maps

Figure 84 shows a conceptual diagram of the serial registers.

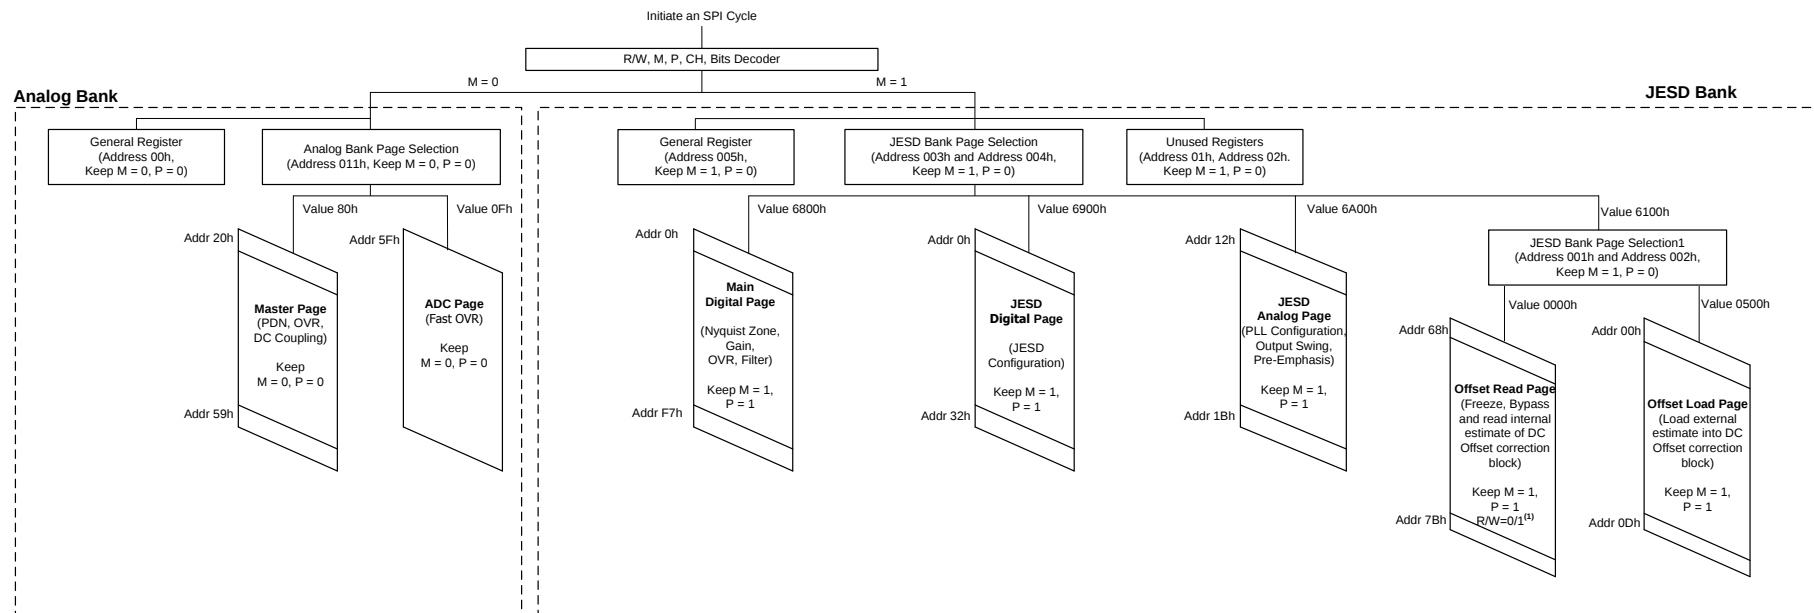

(1) Set the R/W bit to 1 when reading an estimate of the dc offset correction block, otherwise keep this bit at 0.

**Figure 84. Serial Interface Registers**

The ADS54J60 contains two main SPI banks. The analog SPI bank gives access to the ADC analog blocks and the digital SPI bank controls the interleaving engine and anything related to the JESD204B serial interface. The analog SPI bank is divided into two pages (master and ADC) and the digital SPI bank is divided into three pages (main digital, JESD digital, and JESD analog). Table 15 lists a register map for the ADS54J60.

**Register Maps (continued)**
**Table 15. Register Map**

| REGISTER ADDRESS<br>A[11:0] (Hex)              | REGISTER DATA             |                  |                 |           |             |                  |                       |                      |
|------------------------------------------------|---------------------------|------------------|-----------------|-----------|-------------|------------------|-----------------------|----------------------|
|                                                | 7                         | 6                | 5               | 4         | 3           | 2                | 1                     | 0                    |
| GENERAL REGISTERS                              |                           |                  |                 |           |             |                  |                       |                      |
| 0                                              | RESET                     | 0                | 0               | 0         | 0           | 0                | 0                     | RESET                |
| 1                                              | JESD BANK PAGE SEL1[7:0]  |                  |                 |           |             |                  |                       |                      |
| 2                                              | JESD BANK PAGE SEL1[15:8] |                  |                 |           |             |                  |                       |                      |
| 3                                              | JESD BANK PAGE SEL[7:0]   |                  |                 |           |             |                  |                       |                      |
| 4                                              | JESD BANK PAGE SEL[15:8]  |                  |                 |           |             |                  |                       |                      |
| 5                                              | 0                         | 0                | 0               | 0         | 0           | 0                | 0                     | DISABLE BROADCAST    |
| 11                                             | ANALOG BANK PAGE SEL      |                  |                 |           |             |                  |                       |                      |
| MASTER PAGE (ANALOG BANK PAGE SEL = 80h)       |                           |                  |                 |           |             |                  |                       |                      |
| 20                                             | PDN ADC CHA               |                  |                 |           | PDN ADC CHB |                  |                       |                      |
| 21                                             | PDN BUFFER CHB            |                  | PDN BUFFER CHA  |           | 0           | 0                | 0                     | 0                    |
| 23                                             | PDN ADC CHA               |                  |                 |           | PDN ADC CHB |                  |                       |                      |
| 24                                             | PDN BUFFER CHB            |                  | PDN BUFFER CHA  |           | 0           | 0                | 0                     | 0                    |
| 26                                             | GLOBAL PDN                | OVERRIDE PDN PIN | PDN MASK SEL    | 0         | 0           | 0                | 0                     | 0                    |
| 4F                                             | 0                         | 0                | 0               | 0         | 0           | 0                | 0                     | EN INPUT DC COUPLING |
| 53                                             | 0                         | 0                | 0               | 0         | 0           | 0                | EN SYSREF DC COUPLING | MANUAL SYSREF        |
| 54                                             | ENABLE MANUAL SYSREF      | 0                | MASK SYSREF     |           | 0           | 0                | 0                     | 0                    |
| 55                                             | 0                         | 0                | 0               | PDN MASK  | 0           | 0                | 0                     | 0                    |
| 59                                             | FOVR CHB                  | 0                | ALWAYS WRITE 1  | 0         | 0           | 0                | 0                     | 0                    |
| ADC PAGE (ANALOG BANK PAGE SEL = 0Fh)          |                           |                  |                 |           |             |                  |                       |                      |
| 5F                                             | FOVR THRESHOLD PROG       |                  |                 |           |             |                  |                       |                      |
| MAIN DIGITAL PAGE (JESD BANK PAGE SEL = 6800h) |                           |                  |                 |           |             |                  |                       |                      |
| 0                                              | 0                         | 0                | 0               | 0         | 0           | 0                | 0                     | PULSE RESET          |
| 41                                             | 0                         | 0                | DECFIL MODE[3]  | DECFIL EN | 0           | DECFIL MODE[2:0] |                       |                      |
| 42                                             | 0                         | 0                | 0               | 0         | 0           | NYQUIST ZONE     |                       |                      |
| 43                                             | 0                         | 0                | 0               | 0         | 0           | 0                | 0                     | FORMAT SEL           |
| 44                                             | 0                         | DIGITAL GAIN     |                 |           |             |                  |                       |                      |
| 4B                                             | 0                         | 0                | FORMAT EN       | 0         | 0           | 0                | 0                     | 0                    |
| 4D                                             | 0                         | 0                | 0               | 0         | DEC MODE EN | 0                | 0                     | 0                    |
| 4E                                             | CTRL NYQUIST              | 0                | IMPROVE IL PERF | 0         | 0           | 0                | 0                     | 0                    |

## Register Maps (continued)

**Table 15. Register Map (continued)**

| REGISTER ADDRESS                                                           | REGISTER DATA          |                   |             |                            |                 |                         |                   |             |
|----------------------------------------------------------------------------|------------------------|-------------------|-------------|----------------------------|-----------------|-------------------------|-------------------|-------------|
| A[11:0] (Hex)                                                              | 7                      | 6                 | 5           | 4                          | 3               | 2                       | 1                 | 0           |
| 52                                                                         | BUS_REORDER EN1        | 0                 | 0           | 0                          | 0               | 0                       | 0                 | DIG GAIN EN |
| 72                                                                         | 0                      | 0                 | 0           | 0                          | BUS_REORDER EN2 | 0                       | 0                 | 0           |
| AB                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | 0                 | LSB SEL EN  |
| AD                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | LSB SELECT        |             |
| F7                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | 0                 | DIG RESET   |
| JESD DIGITAL PAGE (JESD BANK PAGE SEL = 6900h)                             |                        |                   |             |                            |                 |                         |                   |             |
| 0                                                                          | CTRL K                 | 0                 | 0           | TESTMODE EN                | FLIP ADC DATA   | LANE ALIGN              | FRAME ALIGN       | TX LINK DIS |
| 1                                                                          | SYNC REG               | SYNC REG EN       | JESD FILTER |                            |                 | JESD MODE               |                   |             |
| 2                                                                          | LINK LAYER TESTMODE    |                   |             | LINK LAYER RPAT            | LMFC MASK RESET | 0                       | 0                 | 0           |
| 3                                                                          | FORCE LMFC COUNT       | LMFC COUNT INIT   |             |                            |                 |                         | RELEASE ILANE SEQ |             |
| 5                                                                          | SCRAMBLE EN            | 0                 | 0           | 0                          | 0               | 0                       | 0                 | 0           |
| 6                                                                          | 0                      | 0                 | 0           | FRAMES PER MULTI FRAME (K) |                 |                         |                   |             |
| 7                                                                          | 0                      | 0                 | 0           | 0                          | SUBCLASS        | 0                       | 0                 | 0           |
| 16                                                                         | 1                      | 0                 | 0           | LANE SHARE                 | 0               | 0                       | 0                 | 0           |
| 31                                                                         | DA_BUS_REORDER[7:0]    |                   |             |                            |                 |                         |                   |             |
| 32                                                                         | DB_BUS_REORDER[7:0]    |                   |             |                            |                 |                         |                   |             |
| JESD ANALOG PAGE (JESD BANK PAGE SEL = 6A00h)                              |                        |                   |             |                            |                 |                         |                   |             |
| 12                                                                         | SEL EMP LANE 1         |                   |             |                            |                 |                         | ALWAYS WRITE 1    | 0           |
| 13                                                                         | SEL EMP LANE 0         |                   |             |                            |                 |                         | 0                 | 0           |
| 14                                                                         | SEL EMP LANE 2         |                   |             |                            |                 |                         | 0                 | 0           |
| 15                                                                         | SEL EMP LANE 3         |                   |             |                            |                 |                         | 0                 | 0           |
| 16                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | JESD PLL MODE     |             |
| 17                                                                         | 0                      | PLL RESET         | LANE PDN 1  | 0                          | LANE PDN 0      | 0                       | 0                 | 0           |
| 1A                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | FOVR CHA          | 0           |
| 1B                                                                         | JESD SWING             |                   |             | 0                          | FOVR CHA EN     | 0                       | 0                 | 0           |
| OFFSET READ PAGE (JESD BANK PAGE SEL = 6100h, JESD BANK PAGE SEL1 = 0000h) |                        |                   |             |                            |                 |                         |                   |             |
| 68                                                                         | FREEZE CORR            | DC OFFSET CORR BW |             |                            |                 | BYPASS CORR             | ALWAYS WRITE 1    | 0           |
| 69                                                                         | 0                      | 0                 | 0           | 0                          | 0               | 0                       | 0                 | EXT CORR EN |
| 74                                                                         | ADC0_CORR_INT_EST[7:0] |                   |             |                            |                 |                         |                   |             |
| 75                                                                         | 0                      | 0                 | 0           | 0                          | 0               | ADC0_CORR_INT_EST[10:8] |                   |             |
| 76                                                                         | ADC1_CORR_INT_EST[7:0] |                   |             |                            |                 |                         |                   |             |

**Register Maps (continued)**
**Table 15. Register Map (continued)**

| REGISTER ADDRESS<br>A[11:0] (Hex)                                          | REGISTER DATA          |   |   |   |   |                         |   |   |
|----------------------------------------------------------------------------|------------------------|---|---|---|---|-------------------------|---|---|
|                                                                            | 7                      | 6 | 5 | 4 | 3 | 2                       | 1 | 0 |
| 77                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC1_CORR_INT_EST[10:8] |   |   |
| 78                                                                         | ADC2_CORR_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 79                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC2_CORR_INT_EST[10:8] |   |   |
| 7A                                                                         | ADC3_CORR_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 7B                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC3_CORR_INT_EST[10:8] |   |   |
| OFFSET LOAD PAGE (JESD BANK PAGE SEL = 6100h, JESD BANK PAGE SEL1 = 0500h) |                        |   |   |   |   |                         |   |   |
| 00                                                                         | ADC0_LOAD_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 01                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC0_CORR_INT_EST[10:8] |   |   |
| 04                                                                         | ADC1_LOAD_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 05                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC1_CORR_INT_EST[10:8] |   |   |
| 08                                                                         | ADC2_LOAD_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 09                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC2_CORR_INT_EST[10:8] |   |   |
| 0C                                                                         | ADC3_LOAD_INT_EST[7:0] |   |   |   |   |                         |   |   |
| 0D                                                                         | 0                      | 0 | 0 | 0 | 0 | ADC3_CORR_INT_EST[10:8] |   |   |

### 8.5.1 Example Register Writes

This section provides three different example register writes. [Table 16](#) describes a global power-down register write, [Table 17](#) describes the register writes when the default lane setting (eight active lanes per device) is changed to four active lanes (LMFS = 4211), and [Table 18](#) describes the register writes for 2X decimation with four active lanes (LMFS = 4222).

**Table 16. Global Power Down**

| ADDRESS (Hex) | DATA (Hex) | COMMENT                   |
|---------------|------------|---------------------------|
| 0-011h        | 80h        | Set the master page       |
| 0-026h        | C0h        | Set the global power-down |

**Table 17. Two Lanes per Channel Mode (LMFS = 4211)**

| ADDRESS (Hex) | DATA (Hex) | COMMENT                        |
|---------------|------------|--------------------------------|
| 4-004h        | 69h        | Select the JESD digital page   |
| 4-003h        | 00h        | Select the JESD digital page   |
| 6-001h        | 02h        | Select the digital to 40X mode |
| 4-004h        | 6Ah        | Select the JESD analog page    |
| 6-016h        | 02h        | Set the SERDES PLL to 40X mode |

**Table 18. 2X Decimation (LPF for Both Channels) with Four Active Lanes (LMFS = 4222)**

| ADDRESS (Hex) | DATA (Hex) | COMMENT                                                                                      |
|---------------|------------|----------------------------------------------------------------------------------------------|
| 4-004h        | 68h        | Select the main digital page (6800h)                                                         |
| 4-003h        | 00h        | Select the main digital page (6800h)                                                         |
| 6-041h        | 12h        | Set decimate-by-2 (low-pass filter)                                                          |
| 6-04Dh        | 08h        | Enable decimation filter control                                                             |
| 6-072h        | 08h        | BUS_REORDER EN2                                                                              |
| 6-052h        | 80h        | BUS_REORDER EN1                                                                              |
| 6-000h        | 01h        | Pulse the PULSE RESET bit (so that register writes to the main digital page go into effect). |
| 6-000h        | 00h        |                                                                                              |
| 4-004h        | 69h        | Select the JESD digital page (6900h)                                                         |
| 4-003h        | 00h        | Select the JESD digital page (6900h)                                                         |
| 6-031h        | 0Ah        | Output bus reorder for channel A                                                             |
| 6-032h        | 0Ah        | Output bus reorder for channel B                                                             |
| 6-001h        | 31h        | Program the JESD MODE and JESD FILTER register bits for LMFS = 4222.                         |

[Table 19](#) lists the access codes for the ADS54J60 registers.

**Table 19. ADS54J60 Access Type Codes**

| Access Type                   | Code | Description                            |
|-------------------------------|------|----------------------------------------|
| <b>Read Type</b>              |      |                                        |
| R                             | R    | Read                                   |
| R/W                           | R-W  | Read or write                          |
| <b>Write Type</b>             |      |                                        |
| W                             | W    | Write                                  |
| <b>Reset or Default Value</b> |      |                                        |
| -n                            |      | Value after reset or the default value |

## 8.5.2 Register Descriptions

### 8.5.2.1 General Registers

#### 8.5.2.1.1 Register 0h (address = 0h)

**Figure 85. Register 0h**

|       |      |      |      |      |      |      |       |
|-------|------|------|------|------|------|------|-------|
| 7     | 6    | 5    | 4    | 3    | 2    | 1    | 0     |
| RESET | 0    | 0    | 0    | 0    | 0    | 0    | RESET |
| W-0h  | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h  |

**Table 20. Register 0h Field Descriptions**

| Bit | Field | Type | Reset | Description                                                           |
|-----|-------|------|-------|-----------------------------------------------------------------------|
| 7   | RESET | W    | 0h    | 0 = Normal operation<br>1 = Internal software reset, clears back to 0 |
| 6-1 | 0     | W    | 0h    | Must write 0                                                          |
| 0   | RESET | W    | 0h    | 0 = Normal operation<br>1 = Internal software reset, clears back to 0 |

#### 8.5.2.1.2 Register 1h (address = 1h)

**Figure 86. Register 1h**

|                          |   |   |   |   |   |   |   |
|--------------------------|---|---|---|---|---|---|---|
| 7                        | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| JESD BANK PAGE SEL1[7:0] |   |   |   |   |   |   |   |
| R/W-0h                   |   |   |   |   |   |   |   |

**Table 21. Register 1h Field Descriptions**

| Bit | Field                    | Type | Reset | Description                                                                                                             |
|-----|--------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------|
| 7-0 | JESD BANK PAGE SEL1[7:0] | R/W  | 0h    | Program these bits to access the desired page in the JESD bank.<br>0000h = OFFSET READ Page<br>0500h = OFFSET LOAD Page |

#### 8.5.2.1.3 Register 2h (address = 2h)

**Figure 87. Register 2h**

|                           |   |   |   |   |   |   |   |
|---------------------------|---|---|---|---|---|---|---|
| 7                         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| JESD BANK PAGE SEL1[15:8] |   |   |   |   |   |   |   |
| R/W-0h                    |   |   |   |   |   |   |   |

**Table 22. Register 2h Field Descriptions**

| Bit | Field                     | Type | Reset | Description                                                                                                             |
|-----|---------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------|
| 7-0 | JESD BANK PAGE SEL1[15:8] | R/W  | 0h    | Program these bits to access the desired page in the JESD bank.<br>0000h = OFFSET READ Page<br>0500h = OFFSET LOAD Page |

#### 8.5.2.1.4 Register 3h (address = 3h)

**Figure 88. Register 3h**

|                         |   |   |   |   |   |   |   |
|-------------------------|---|---|---|---|---|---|---|
| 7                       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| JESD BANK PAGE SEL[7:0] |   |   |   |   |   |   |   |
| R/W-0h                  |   |   |   |   |   |   |   |

**Table 23. Register 3h Field Descriptions**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                                          |
|-----|-------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | JESD BANK PAGE SEL[7:0] | R/W  | 0h    | Program these bits to access the desired page in the JESD bank.<br>6800h = Main digital page selected<br>6900h = JESD digital page selected<br>6A00h = JESD analog page selected<br>6100h = OFFSET READ or LOAD Page |

#### 8.5.2.1.5 Register 4h (address = 4h)

**Figure 89. Register 4h**

|                          |   |   |   |   |   |   |   |
|--------------------------|---|---|---|---|---|---|---|
| 7                        | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| JESD BANK PAGE SEL[15:8] |   |   |   |   |   |   |   |
| R/W-0h                   |   |   |   |   |   |   |   |

**Table 24. Register 4h Field Descriptions**

| Bit | Field                    | Type | Reset | Description                                                                                                                                                                                                          |
|-----|--------------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | JESD BANK PAGE SEL[15:8] | R/W  | 0h    | Program these bits to access the desired page in the JESD bank.<br>6800h = Main digital page selected<br>6900h = JESD digital page selected<br>6A00h = JESD analog page selected<br>6100h = OFFSET READ or LOAD Page |

#### 8.5.2.1.6 Register 5h (address = 5h)

**Figure 90. Register 5h**

|      |      |      |      |      |      |      |                   |
|------|------|------|------|------|------|------|-------------------|
| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0                 |
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | DISABLE BROADCAST |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h            |

**Table 25. Register 5h Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                |
|-----|-------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0                 | W    | 0h    | Must write 0                                                                                                                               |
| 0   | DISABLE BROADCAST | R/W  | 0h    | 0 = Normal operation. Channel A and B are programmed as a pair.<br>1 = Channel A and B can be individually programmed based on the CH bit. |

**8.5.2.1.7 Register 11h (address = 11h)**
**Figure 91. Register 11h**

|                 |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ANALOG PAGE SEL |   |   |   |   |   |   |   |
| R/W-0h          |   |   |   |   |   |   |   |

**Table 26. Register 11h Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                              |
|-----|----------------------|------|-------|----------------------------------------------------------------------------------------------------------|
| 7-0 | ANALOG BANK PAGE SEL | R/W  | 0h    | Program these bits to access the desired page in the analog bank.<br>Master page = 80h<br>ADC page = 0Fh |

**8.5.2.2 Master Page (080h) Registers**
**8.5.2.2.1 Register 20h (address = 20h), Master Page (080h)**
**Figure 92. Register 20h**

|             |   |   |   |             |   |   |   |
|-------------|---|---|---|-------------|---|---|---|
| 7           | 6 | 5 | 4 | 3           | 2 | 1 | 0 |
| PDN ADC CHA |   |   |   | PDN ADC CHB |   |   |   |
| R/W-0h      |   |   |   | R/W-0h      |   |   |   |

**Table 27. Registers 20h Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                      |
|-----|-------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | PDN ADC CHA | R/W  | 0h    | There are two power-down masks that are controlled via the PDN mask register bit in address 55h. The power-down mask 1 or mask 2 are selected via register bit 5 in address 26h.<br>Power-down mask 1: addresses 20h and 21h.<br>Power-down mask 2: addresses 23h and 24h.<br>0Fh = Power-down CHB only.<br>F0h = Power-down CHA only.<br>FFh = Power-down both. |
| 3-0 | PDN ADC CHB | R/W  | 0h    |                                                                                                                                                                                                                                                                                                                                                                  |

### 8.5.2.2.2 Register 21h (address = 21h), Master Page (080h)

**Figure 93. Register 21h**

| 7              | 6 | 5              | 4 | 3    | 2    | 1    | 0    |
|----------------|---|----------------|---|------|------|------|------|
| PDN BUFFER CHB |   | PDN BUFFER CHA |   | 0    | 0    | 0    | 0    |
| R/W-0h         |   | R/W-0h         |   | W-0h | W-0h | W-0h | W-0h |

**Table 28. Register 21h Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----|----------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | PDN BUFFER CHB | R/W  | 0h    | There are two power-down masks that are controlled via the PDN mask register bit in address 55h. The power-down mask 1 or mask 2 are selected via register address 26h, bit 5.<br>Power-down mask 1: addresses 20h and 21h.<br>Power-down mask 2: addresses 23h and 24h.<br>There are two buffers per channel. One buffer drives two ADC cores.<br>PDN BUFFER CHx:<br>00 = Both buffers of a channel are active.<br>11 = Both buffers are powered down.<br>01–10 = Do not use. |
| 5-4 | PDN BUFFER CHA | R/W  | 0h    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 3-0 | 0              | W    | 0h    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|     |                |      |       | Must write 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

### 8.5.2.2.3 Register 23h (address = 23h), Master Page (080h)

**Figure 94. Register 23h**

| 7           | 6 | 5 | 4 | 3           | 2 | 1 | 0 |
|-------------|---|---|---|-------------|---|---|---|
| PDN ADC CHA |   |   |   | PDN ADC CHB |   |   |   |
| R/W-0h      |   |   |   | R/W-0h      |   |   |   |

**Table 29. Register 23h Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                    |
|-----|-------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | PDN ADC CHA | R/W  | 0h    | There are two power-down masks that are controlled via the PDN mask register bit in address 55h. The power-down mask 1 or mask 2 are selected via register address 26h, bit 5.<br>Power-down mask 1: addresses 20h and 21h.<br>Power-down mask 2: addresses 23h and 24h.<br>0Fh = Power-down CHB only.<br>F0h = Power-down CHA only.<br>FFh = Power-down both. |
| 3-0 | PDN ADC CHB | R/W  | 0h    |                                                                                                                                                                                                                                                                                                                                                                |

**8.5.2.2.4 Register 24h (address = 24h), Master Page (080h)**
**Figure 95. Register 24h**

| 7              | 6 | 5              | 4 | 3    | 2    | 1    | 0    |
|----------------|---|----------------|---|------|------|------|------|
| PDN BUFFER CHB |   | PDN BUFFER CHA |   | 0    | 0    | 0    | 0    |
| R/W-0h         |   | R/W-0h         |   | W-0h | W-0h | W-0h | W-0h |

**Table 30. Register 24h Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----|----------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | PDN BUFFER CHB | R/W  | 0h    | There are two power-down masks that are controlled via the PDN mask register bit in address 55h. The power-down mask 1 or mask 2 are selected via register address 26h, bit 5.<br>Power-down mask 1: addresses 20h and 21h.<br>Power-down mask 2: addresses 23h and 24h.<br>Power-down mask 2: addresses 23h and 24h.<br>There are two buffers per channel. One buffer drives two ADC cores.<br>PDN BUFFER CHx:<br>00 = Both buffers of a channel are active.<br>11 = Both buffers are powered down.<br>01–10 = Do not use. |
| 5-4 | PDN BUFFER CHA | R/W  | 0h    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 3-0 | 0              | W    | 0h    | Must write 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

### 8.5.2.2.5 Register 26h (address = 26h), Master Page (080h)

**Figure 96. Register 26h**

| 7          | 6                | 5            | 4    | 3    | 2    | 1    | 0    |
|------------|------------------|--------------|------|------|------|------|------|
| GLOBAL PDN | OVERRIDE PDN PIN | PDN MASK SEL | 0    | 0    | 0    | 0    | 0    |
| R/W-0h     | R/W-0h           | R/W-0h       | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 31. Register 26h Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                          |
|-----|------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------|
| 7   | GLOBAL PDN       | R/W  | 0h    | Bit 6 (OVERRIDE PDN PIN) must be set before this bit can be programmed.<br>0 = Normal operation<br>1 = Global power-down via the SPI |
| 6   | OVERRIDE PDN PIN | R/W  | 0h    | This bit ignores the power-down pin control.<br>0 = Normal operation<br>1 = Ignores inputs on the power-down pin                     |
| 5   | PDN MASK SEL     | R/W  | 0h    | This bit selects power-down mask 1 or mask 2.<br>0 = Power-down mask 1<br>1 = Power-down mask 2                                      |
| 4-0 | 0                | W    | 0h    | Must write 0                                                                                                                         |

### 8.5.2.2.6 Register 4Fh (address = 4Fh), Master Page (080h)

**Figure 97. Register 4Fh**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0                    |
|------|------|------|------|------|------|------|----------------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | EN INPUT DC COUPLING |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h               |

**Table 32. Register 4Fh Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----|----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0                    | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 0   | EN INPUT DC COUPLING | R/W  | 0h    | The device has an internal biasing resistor of 600 $\Omega$ from VCM to the INP and INM pins. A small common-mode current flows through these resistors causing approximately a 100-mV drop. To compensate for the drop, the device raises the VCM voltage by 100 mV by default. This compensation is particularly helpful in AC-coupling applications where the common-mode voltage on the INP and INM pins is established by internal biasing resistors. In DC-coupling applications, because the common-mode voltage is established by external circuit, there is no need to raise VCM by 100 mV.<br>0 = Device raises VCM voltage by 100 mV, useful in AC-coupling applications<br>1 = Device does not raise the VCM voltage, useful in DC-coupling applications |

**8.5.2.2.7 Register 53h (address = 53h), Master Page (080h)**
**Figure 98. Register 53h**

| 7    | 6      | 5    | 4    | 3    | 2    | 1                        | 0                |
|------|--------|------|------|------|------|--------------------------|------------------|
| 0    | 0      | 0    | 0    | 0    | 0    | EN SYSREF<br>DC COUPLING | MANUAL<br>SYSREF |
| W-0h | R/W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h                   | R/W-0h           |

**Table 33. Register 53h Field Descriptions**

| Bit | Field                 | Type | Reset | Description                                                                                                                                                                                                                                                                                                                            |
|-----|-----------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | 0                     | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                           |
| 1   | EN SYSREF DC COUPLING | R/W  | 0h    | Enables a higher common-mode voltage input on the SYSREF signal (up to 1.6 V).<br>0 = Normal operation<br>1 = Enables a higher SYSREF common-mode voltage support                                                                                                                                                                      |
| 0   | MANUAL SYSREF         | R/W  | 0h    | The device has a feature to apply the SYSREF signal manually through the serial interface instead of the SYREFP, SYREFM pins. This application can be done by first setting the ENABLE MANUAL SYSREF register bit, then using the MANUAL SYSREF bit to set the SYSREF signal high or low.<br>0 = Set SYSREF low<br>1 = Set SYSREF high |

**8.5.2.2.8 Register 54h (address = 54h), Master Page (080h)**
**Figure 99. Register 54h**

| 7                          | 6    | 5           | 4    | 3    | 2    | 1    | 0    |
|----------------------------|------|-------------|------|------|------|------|------|
| ENABLE<br>MANUAL<br>SYSREF | 0    | MASK SYSREF | 0    | 0    | 0    | 0    | 0    |
| R/W-0h                     | W-0h | R/W-0h      | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 34. Register 54h Field Descriptions**

| Bit | Field                | Type | Reset | Description                                                                                                                                                             |
|-----|----------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | ENABLE MANUAL SYSREF | R/W  | 0h    | Enables the SYSREF input from the serial interface, thus disabling pin control. Use the MANUAL SYSREF register bit to apply SYSREF manually.                            |
| 6   | 0                    | W    | 0h    | Must write 0                                                                                                                                                            |
| 5-4 | MASK SYSREF          | R/W  | 0h    | 00 = Normal operation<br>11 = The SYSREF signal is ignored by the device irrespective of how the signal was applied (through a pin or manually by the serial interface) |
| 3-0 | 0                    | W    | 0h    | Must write 0                                                                                                                                                            |

### 8.5.2.2.9 Register 55h (address = 55h), Master Page (080h)

**Figure 100. Register 55h**

| 7    | 6    | 5    | 4        | 3    | 2    | 1    | 0    |
|------|------|------|----------|------|------|------|------|
| 0    | 0    | 0    | PDN MASK | 0    | 0    | 0    | 0    |
| W-0h | W-0h | W-0h | R/W-0h   | W-0h | W-0h | W-0h | W-0h |

**Table 35. Register 55h Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                                        |
|-----|----------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | 0        | W    | 0h    | Must write 0                                                                                                                                                                       |
| 4   | PDN MASK | R/W  | 0h    | This bit enables power-down via a register bit.<br>0 = Normal operation<br>1 = Power-down is enabled by powering down internal blocks as specified in the selected power-down mask |
| 3-0 | 0        | W    | 0h    | Must write 0                                                                                                                                                                       |

### 8.5.2.2.10 Register 59h (address = 59h), Master Page (080h)

**Figure 101. Register 59h**

| 7        | 6    | 5              | 4    | 3    | 2    | 1    | 0    |
|----------|------|----------------|------|------|------|------|------|
| FOVR CHB | 0    | ALWAYS WRITE 1 | 0    | 0    | 0    | 0    | 0    |
| W-0h     | W-0h | R/W-0h         | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 36. Register 59h Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                          |
|-----|----------------|------|-------|------------------------------------------------------------------------------------------------------|
| 7   | FOVR CHB       | W    | 0h    | Outputs FOVR signal for channel B on the SDOUT pin.<br>0 = normal operation<br>1 = FOVR on SDOUT pin |
| 6   | 0              | W    | 0h    | Must write 0                                                                                         |
| 5   | ALWAYS WRITE 1 | R/W  | 0h    | Must write 1                                                                                         |
| 4-0 | 0              | W    | 0h    | Must write 0                                                                                         |

### 8.5.2.3 ADC Page (0Fh) Register

#### 8.5.2.3.1 Register 5F (address = 5F), ADC Page (0Fh)

**Figure 102. Register 5F**

| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|---|---|---|---|---|---|---|
| FOVR THRESHOLD PROG |   |   |   |   |   |   |   |
| R/W-E3h             |   |   |   |   |   |   |   |

**Table 37. Register 5F Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                     |
|-----|---------------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | FOVR THRESHOLD PROG | R/W  | E3h   | Program the fast OVR thresholds together for channel A and B, as described in the <a href="#">Overrange Indication</a> section. |

### 8.5.2.4 Main Digital Page (6800h) Registers

#### 8.5.2.4.1 Register 0h (address = 0h), Main Digital Page (6800h)

**Figure 103. Register 0h**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0           |
|------|------|------|------|------|------|------|-------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | PULSE RESET |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h      |

**Table 38. Register 0h Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                            |
|-----|-------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0           | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                           |
| 0   | PULSE RESET | R/W  | 0h    | Must be pulsed after power-up or after configuring registers in the main digital page of the JESD bank. Any register bits in the main digital page (6800h) take effect only after this bit is pulsed; see the <a href="#">Start-Up Sequence</a> section for the correct sequence.<br>0 = Normal operation<br>0 → 1 → 0 = Bit is pulsed |

#### 8.5.2.4.2 Register 41h (address = 41h), Main Digital Page (6800h)

**Figure 104. Register 41h**

| 7    | 6    | 5              | 4         | 3    | 2                | 1 | 0 |
|------|------|----------------|-----------|------|------------------|---|---|
| 0    | 0    | DECFIL MODE[3] | DECFIL EN | 0    | DECFIL MODE[2:0] |   |   |
| W-0h | W-0h | R/W-0h         | R/W-0h    | W-0h | R/W-0h           |   |   |

**Table 39. Register 41h Field Descriptions**

| Bit | Field            | Type | Reset | Description                                                                                                                                                                                                                                    |
|-----|------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | 0                | W    | 0h    | Must write 0                                                                                                                                                                                                                                   |
| 5   | DECFIL MODE[3]   | R/W  | 0h    | This bit selects the decimation filter mode. <a href="#">Table 40</a> lists the bit settings. The decimation filter control (DEC MODE EN, register 4Dh, bit 3) and decimation filter enable (DECFIL EN, register 41h, bit 4) must be enabled.  |
| 4   | DECFIL EN        | R/W  | 0h    | Enables the digital decimation filter<br>0 = Normal operation, full rate output<br>1 = Digital decimation enabled                                                                                                                              |
| 3   | 0                | W    | 0h    | Must write 0                                                                                                                                                                                                                                   |
| 2-0 | DECFIL MODE[2:0] | R/W  | 0h    | These bits select the decimation filter mode. <a href="#">Table 40</a> lists the bit settings. The decimation filter control (DEC MODE EN, register 4Dh, bit 3) and decimation filter enable (DECFIL EN, register 41h, bit 4) must be enabled. |

**Table 40. DECFIL MODE Bit Settings**

| BITS (5, 2-0) | FILTER MODE                                      | DECIMATION |
|---------------|--------------------------------------------------|------------|
| 0000          | Band-pass filter centered on $3 \times f_S / 16$ | 4X         |
| 0100          | Band-pass filter centered on $5 \times f_S / 16$ | 4X         |
| 1000          | Band-pass filter centered on $1 \times f_S / 16$ | 4X         |
| 1100          | Band-pass filter centered on $7 \times f_S / 16$ | 4X         |
| 0010          | Low-pass filter                                  | 2X         |
| 0110          | High-pass filter                                 | 2X         |
| 0011          | Low-pass filter with $f_S / 4$ mixer             | 4X (IQ)    |

### 8.5.2.4.3 Register 42h (address = 42h), Main Digital Page (6800h)

**Figure 105. Register 42h**

| 7    | 6    | 5    | 4    | 3    | 2            | 1 | 0 |
|------|------|------|------|------|--------------|---|---|
| 0    | 0    | 0    | 0    | 0    | NYQUIST ZONE |   |   |
| W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h       |   |   |

**Table 41. Register 42h Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                                                                                                                                                                                                 |
|-----|--------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-3 | 0            | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                |
| 2-0 | NYQUIST ZONE | R/W  | 0h    | The Nyquist zone must be selected for proper interleaving correction. Control must be enabled (register 4Eh, bit 7).<br>000 = 1st Nyquist zone (0 MHz to 500 MHz)<br>001 = 2nd Nyquist zone (500 MHz to 1000 MHz)<br>010 = 3rd Nyquist zone (1000 MHz to 1500 MHz)<br>All others = Not used |

### 8.5.2.4.4 Register 43h (address = 43h), Main Digital Page (6800h)

**Figure 106. Register 43h**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0          |
|------|------|------|------|------|------|------|------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | FORMAT SEL |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h     |

**Table 42. Register 43h Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                    |
|-----|------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0          | W    | 0h    | Must write 0                                                                                                                   |
| 0   | FORMAT SEL | R/W  | 0h    | Changes the output format. Set the FORMAT EN bit to enable control using this bit.<br>0 = Twos complement<br>1 = Offset binary |

### 8.5.2.4.5 Register 44h (address = 44h), Main Digital Page (6800h)

**Figure 107. Register 44h**

| 7      | 6            | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------------|---|---|---|---|---|---|
| 0      | DIGITAL GAIN |   |   |   |   |   |   |
| R/W-0h | R/W-0h       |   |   |   |   |   |   |

**Table 43. Register 44h Field Descriptions**

| Bit | Field        | Type | Reset | Description                                                                                                                                                         |
|-----|--------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | 0            | R/W  | 0h    | Must write 0                                                                                                                                                        |
| 6-0 | DIGITAL GAIN | R/W  | 0h    | Digital gain setting. Digital gain must be enabled (register 52h, bit 0).<br>Gain in dB = 20log (digital gain / 32)<br>7Fh = 127 which equals digital gain of 12 dB |

**8.5.2.4.6 Register 4Bh (address = 4Bh), Main Digital Page (6800h)**
**Figure 108. Register 4Bh**

| 7    | 6    | 5         | 4    | 3    | 2    | 1    | 0    |
|------|------|-----------|------|------|------|------|------|
| 0    | 0    | FORMAT EN | 0    | 0    | 0    | 0    | 0    |
| W-0h | W-0h | R/W-0h    | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 44. Register 4Bh Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                                                                                                                                         |
|-----|-----------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | 0         | W    | 0h    | Must write 0                                                                                                                                                                                                        |
| 5   | FORMAT EN | R/W  | 0h    | This bit enables control for data format selection using the FORMAT SEL register bit.<br>0 = Default, output is in twos complement format<br>1 = Output is in offset binary format after FORMAT SEL bit is also set |
| 4-0 | 0         | W    | 0h    | Must write 0                                                                                                                                                                                                        |

**8.5.2.4.7 Register 4Dh (address = 4Dh), Main Digital Page (6800h)**
**Figure 109. Register 4Dh**

| 7    | 6    | 5    | 4    | 3          | 2    | 1    | 0    |
|------|------|------|------|------------|------|------|------|
| 0    | 0    | 0    | 0    | DEC MOD EN | 0    | 0    | 0    |
| W-0h | W-0h | W-0h | W-0h | R/W-0h     | W-0h | W-0h | W-0h |

**Table 45. Register 4Dh Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                                          |
|-----|------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | 0          | W    | 0h    | Must write 0                                                                                                                                         |
| 3   | DEC MOD EN | R/W  | 0h    | This bit enables control of decimation filter mode via the DECFIL MODE[3:0] register bits.<br>0 = Default<br>1 = Decimation modes control is enabled |
| 2-0 | 0          | W    | 0h    | Must write 0                                                                                                                                         |

#### 8.5.2.4.8 Register 4Eh (address = 4Eh), Main Digital Page (6800h)

**Figure 110. Register 4Eh**

| 7            | 6    | 5               | 4    | 3    | 2    | 1    | 0    |
|--------------|------|-----------------|------|------|------|------|------|
| CTRL NYQUIST | 0    | IMPROVE IL PERF | 0    | 0    | 0    | 0    | 0    |
| R/W-0h       | W-0h | W-0h            | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 46. Register 4Eh Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----|-----------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CTRL NYQUIST    | R/W  | 0h    | This bit enables selecting the Nyquist zone using register 42h, bits 2-0.<br>0 = Selection disabled<br>1 = Selection enabled                                                                                                                                                                                                                                                                                                                          |
| 6   | 0               | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 5   | IMPROVE IL PERF | R/W  | 0h    | Improves interleaving performance. Effective only for input frequencies that are within $\pm f_s / 64$ band centered at $n \times f_s / 8$ ( $n = 1, 2, 3, \text{ or } 4$ ). For example, at a 1-Gsps sampling rate, this bit may improve IL performance when input frequencies fall within the $\pm 15.625$ -MHz band located at 125 MHz, 250 MHz, 375 MHz, and 500 MHz.<br>0 = Default<br>1 = Improves IL performance for certain input frequencies |
| 4-0 | 0               | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                                                                                                          |

#### 8.5.2.4.9 Register 52h (address = 52h), Main Digital Page (6800h)

**Figure 111. Register 52h**

| 7               | 6    | 5    | 4    | 3    | 2    | 1    | 0           |
|-----------------|------|------|------|------|------|------|-------------|
| BUS_REORDER_EN1 | 0    | 0    | 0    | 0    | 0    | 0    | DIG GAIN EN |
| W-0h            | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h      |

**Table 47. Register 52h Field Descriptions**

| Bit | Field           | Type | Reset | Description                                                                                                   |
|-----|-----------------|------|-------|---------------------------------------------------------------------------------------------------------------|
| 7   | BUS_REORDER_EN1 | R/W  | 0h    | Must write 1 in DDC mode only                                                                                 |
| 6-1 | 0               | W    | 0h    | Must write 0                                                                                                  |
| 0   | DIG GAIN EN     | R/W  | 0h    | Enables selecting the digital gain for register 44h.<br>0 = Digital gain disabled<br>1 = Digital gain enabled |

#### 8.5.2.4.10 Register 72h (address = 72h), Main Digital Page (6800h)

**Figure 112. Register 72h**

| 7    | 6    | 5    | 4    | 3               | 2    | 1    | 0    |
|------|------|------|------|-----------------|------|------|------|
| 0    | 0    | 0    | 0    | BUS_REORDER_EN2 | 0    | 0    | 0    |
| W-0h | W-0h | W-0h | W-0h | R/W-0h          | W-0h | W-0h | W-0h |

**Table 48. Register 72h Field Descriptions**

| Bit | Field           | Type | Reset | Description                     |
|-----|-----------------|------|-------|---------------------------------|
| 7-4 | 0               | W    | 0h    | Must write 0                    |
| 3   | BUS_REORDER_EN2 | R/W  | 0h    | Must write a 1 in DDC mode only |
| 2-0 | 0               | W    | 0h    | Must write 0                    |

**8.5.2.4.11 Register ABh (address = ABh), Main Digital Page (6800h)**
**Figure 113. Register ABh**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0          |
|------|------|------|------|------|------|------|------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | LSB SEL EN |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h     |

**Table 49. Register ABh Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                                              |
|-----|------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0          | W    | 0h    | Must write 0                                                                                                                                             |
| 0   | LSB SEL EN | R/W  | 0h    | Enable control for the LSB SELECT register bit.<br>0 = Default<br>1 = The LSB of 16-bit ADC data can be programmed as fast OVR using the LSB SELECT bit. |

**8.5.2.4.12 Register ADh (address = ADh), Main Digital Page (6800h)**
**Figure 114. Register ADh**

| 7    | 6    | 5    | 4    | 3    | 2    | 1          | 0 |
|------|------|------|------|------|------|------------|---|
| 0    | 0    | 0    | 0    | 0    | 0    | LSB SELECT |   |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h     |   |

**Table 50. Register ADh Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                                                                |
|-----|------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | 0          | W    | 0h    | Must write 0                                                                                                                                                               |
| 1-0 | LSB SELECT | R/W  | 0h    | Enables output of the FOVR flag instead of the output data LSB.<br>00 = Output is 16-bit data<br>11 = Output data LSB is replaced by the FOVR information for each channel |

**8.5.2.4.13 Register F7h (address = F7h), Main Digital Page (6800h)**
**Figure 115. Register F7h**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0         |
|------|------|------|------|------|------|------|-----------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | DIG RESET |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h      |

**Table 51. Register F7h Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                                                           |
|-----|-----------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0         | W    | 0h    | Must write 0                                                                                                                          |
| 0   | DIG RESET | W    | 0h    | Self-clearing reset for the digital block. Does not include the interleaving correction.<br>0 = Normal operation<br>1 = Digital reset |

### 8.5.2.5 JESD Digital Page (6900h) Registers

#### 8.5.2.5.1 Register 0h (address = 0h), JESD Digital Page (6900h)

**Figure 116. Register 0h**

| 7      | 6    | 5    | 4           | 3             | 2          | 1           | 0           |
|--------|------|------|-------------|---------------|------------|-------------|-------------|
| CTRL K | 0    | 0    | TESTMODE EN | FLIP ADC DATA | LANE ALIGN | FRAME ALIGN | TX LINK DIS |
| R/W-0h | W-0h | W-0h | R/W-0h      | R/W-0h        | R/W-0h     | R/W-0h      | R/W-0h      |

**Table 52. Register 0h Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                               |
|-----|---------------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CTRL K        | R/W  | 0h    | Enable bit for a number of frames per multi frame.<br>0 = Default is five frames per multi frame<br>1 = Frames per multi frame can be set in register 06h                                                                 |
| 6-5 | 0             | W    | 0h    | Must write 0                                                                                                                                                                                                              |
| 4   | TESTMODE EN   | R/W  | 0h    | This bit generates the long transport layer test pattern mode, as per section 5.1.6.3 of the JESD204B specification.<br>0 = Test mode disabled<br>1 = Test mode enabled                                                   |
| 3   | FLIP ADC DATA | R/W  | 0h    | 0 = Normal operation<br>1 = Output data order is reversed: MSB to LSB.                                                                                                                                                    |
| 2   | LANE ALIGN    | R/W  | 0h    | This bit inserts the lane alignment character (K28.3) for the receiver to align to lane boundary, as per section 5.3.3.5 of the JESD204B specification.<br>0 = Normal operation<br>1 = Inserts lane alignment characters  |
| 1   | FRAME ALIGN   | R/W  | 0h    | This bit inserts the lane alignment character (K28.7) for the receiver to align to lane boundary, as per section 5.3.3.5 of the JESD204B specification.<br>0 = Normal operation<br>1 = Inserts frame alignment characters |
| 0   | TX LINK DIS   | R/W  | 0h    | This bit disables sending the initial link alignment (ILA) sequence when SYNC is de-asserted.<br>0 = Normal operation<br>1 = ILA disabled                                                                                 |

**8.5.2.5.2 Register 1h (address = 1h), JESD Digital Page (6900h)**
**Figure 117. Register 1h**

| 7        | 6           | 5           | 4 | 3 | 2         | 1 | 0 |
|----------|-------------|-------------|---|---|-----------|---|---|
| SYNC REG | SYNC REG EN | JESD FILTER |   |   | JESD MODE |   |   |
| R/W-0h   | R/W-0h      | R/W-0h      |   |   | R/W-01h   |   |   |

**Table 53. Register 1h Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                 |
|-----|-------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SYNC REG    | R/W  | 0h    | Register control for sync request.<br>0 = Normal operation<br>1 = ADC output data are replaced with K28.5 characters. Register bit SYNC REG EN must also be set to 1.                                                                                                                                                       |
| 6   | SYNC REG EN | R/W  | 0h    | Enables register control for sync request.<br>0 = Use the SYNC pin for sync requests<br>1 = Use the SYNC REG register bit for sync requests                                                                                                                                                                                 |
| 5-3 | JESD FILTER | R/W  | 0h    | These bits and the JESD MODE bits set the correct LMFS configuration for the JESD interface. The JESD FILTER setting must match the configuration in the decimation filter page.<br>000 = Filter bypass mode<br>See <a href="#">Table 54</a> for valid combinations for register bits JESD FILTER along with JESD MODE.     |
| 2-0 | JESD MODE   | R/W  | 01h   | These bits select the number of serial JESD output lanes per ADC. The JESD PLL MODE register bit located in the JESD analog page must also be set accordingly.<br>001 = Default after reset (Eight active lanes)<br>See <a href="#">Table 54</a> for valid combinations for register bits JESD FILTER along with JESD MODE. |

**Table 54. Valid Combinations for JESD FILTER and JESD MODE Bits**

| REGISTER BIT JESD FILTER | REGISTER BIT JESD MODE | DECIMATION FACTOR                   | NUMBER OF ACTIVE LANES PER DEVICE |
|--------------------------|------------------------|-------------------------------------|-----------------------------------|
| 000                      | 100                    | No decimation                       | Four lanes are active             |
| 000                      | 010                    | No decimation                       | Four lanes are active             |
| 000                      | 001                    | No decimation (default after reset) | Eight lanes are active            |
| 111                      | 001                    | 4X (1Q)                             | Four lanes are active             |
| 110                      | 001                    | 2X                                  | Four lanes are active             |
| 110                      | 010                    | 2X                                  | Two lanes are active              |
| 100                      | 001                    | 4X                                  | Two lanes are active              |
| 111                      | 010                    | 4X (1Q)                             | Two lanes are active              |
| 100                      | 010                    | 4X                                  | One lane is active                |

### 8.5.2.5.3 Register 2h (address = 2h), JESD Digital Page (6900h)

**Figure 118. Register 2h**

| 7                   | 6 | 5 | 4               | 3               | 2    | 1    | 0    |
|---------------------|---|---|-----------------|-----------------|------|------|------|
| LINK LAYER TESTMODE |   |   | LINK LAYER RPAT | LMFC MASK RESET | 0    | 0    | 0    |
| R/W-0h              |   |   | R/W-0h          | R/W-0h          | W-0h | W-0h | W-0h |

**Table 55. Register 2h Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|---------------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | LINK LAYER TESTMODE | R/W  | 0h    | These bits generate a pattern according to clause 5.3.3.8.2 of the JESD204B document.<br>000 = Normal ADC data<br>001 = D21.5 (high-frequency jitter pattern)<br>010 = K28.5 (mixed-frequency jitter pattern)<br>011 = Repeat initial lane alignment (generates a K28.5 character and continuously repeats lane alignment sequences)<br>100 = 12 octet RPAT jitter pattern<br>All others = Not used |
| 4   | LINK LAYER RPAT     | R/W  | 0h    | This bit changes the running disparity in the modified RPAT pattern test mode (only when the link layer test mode = 100).<br>0 = Normal operation<br>1 = Changes disparity                                                                                                                                                                                                                          |
| 3   | LMFC MASK RESET     | R/W  | 0h    | Mask LMFC reset coming to digital block.<br>0 = LMFC reset is not masked<br>1 = Ignore LMFC reset request                                                                                                                                                                                                                                                                                           |
| 2-0 | 0                   | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                                                        |

**8.5.2.5.4 Register 3h (address = 3h), JESD Digital Page (6900h)**
**Figure 119. Register 3h**

| 7                | 6               | 5 | 4 | 3 | 2 | 1                 | 0 |
|------------------|-----------------|---|---|---|---|-------------------|---|
| FORCE LMFC COUNT | LMFC COUNT INIT |   |   |   |   | RELEASE ILANE SEQ |   |
| R/W-0h           | R/W-0h          |   |   |   |   | R/W-0h            |   |

**Table 56. Register 3h Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                            |
|-----|-------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | FORCE LMFC COUNT  | R/W  | 0h    | This bit forces the LMFC count.<br>0 = Normal operation<br>1 = Enables using a different starting value for the LMFC counter                                                                                                                                                                                                                                                           |
| 6-2 | LMFC COUNT INIT   | R/W  | 0h    | When SYSREF transmits to the digital block, the LMFC count resets to 0 and K28.5 stops transmitting when the LMFC count reaches 31. The initial value that the LMFC count resets to can be set using LMFC COUNT INIT. In this manner, the receiver can be synchronized early because it receives the LANE ALIGNMENT SEQUENCE early. The FORCE LMFC COUNT register bit must be enabled. |
| 1-0 | RELEASE ILANE SEQ | R/W  | 0h    | These bits delay the generation of the lane alignment sequence by 0, 1, 2 or 3 multi frames after the code group synchronization.<br>00 = 0<br>01 = 1<br>10 = 2<br>11 = 3                                                                                                                                                                                                              |

**8.5.2.5.5 Register 5h (address = 5h), JESD Digital Page (6900h)**
**Figure 120. Register 5h**

| 7             | 6    | 5    | 4    | 3    | 2    | 1    | 0    |
|---------------|------|------|------|------|------|------|------|
| SCRAMBLE EN   | 0    | 0    | 0    | 0    | 0    | 0    | 0    |
| R/W-Undefined | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h |

**Table 57. Register 5h Field Descriptions**

| Bit | Field       | Type | Reset     | Description                                                                                         |
|-----|-------------|------|-----------|-----------------------------------------------------------------------------------------------------|
| 7   | SCRAMBLE EN | R/W  | Undefined | Scramble enable bit in the JESD204B interface.<br>0 = Scrambling disabled<br>1 = Scrambling enabled |
| 6-0 | 0           | W    | 0h        | Must write 0                                                                                        |

### 8.5.2.5.6 Register 6h (address = 6h), JESD Digital Page (6900h)

**Figure 121. Register 6h**

| 7    | 6    | 5    | 4                          | 3 | 2 | 1 | 0 |
|------|------|------|----------------------------|---|---|---|---|
| 0    | 0    | 0    | FRAMES PER MULTI FRAME (K) |   |   |   |   |
| W-0h | W-0h | W-0h | R/W-8h                     |   |   |   |   |

**Table 58. Register 6h Field Descriptions**

| Bit | Field                      | Type | Reset | Description                                                                                              |
|-----|----------------------------|------|-------|----------------------------------------------------------------------------------------------------------|
| 7-5 | 0                          | W    | 0h    | Must write 0                                                                                             |
| 4-0 | FRAMES PER MULTI FRAME (K) | R/W  | 8h    | These bits set the number of multi frames.<br>Actual K is the value in hex + 1 (that is, 0Fh is K = 16). |

### 8.5.2.5.7 Register 7h (address = 7h), JESD Digital Page (6900h)

**Figure 122. Register 7h**

| 7    | 6    | 5    | 4    | 3        | 2    | 1    | 0    |
|------|------|------|------|----------|------|------|------|
| 0    | 0    | 0    | 0    | SUBCLASS | 0    | 0    | 0    |
| W-0h | W-0h | W-0h | W-0h | R/W-1h   | W-0h | W-0h | W-0h |

**Table 59. Register 7h Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                  |
|-----|----------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | 0        | W    | 0h    | Must write 0                                                                                                                                                 |
| 3   | SUBCLASS | R/W  | 1h    | This bit sets the JESD204B subclass.<br>000 = Subclass 0 backward compatible with JESD204A<br>001 = Subclass 1 deterministic latency using the SYSREF signal |
| 2-0 | 0        | W    | 0h    | Must write 0                                                                                                                                                 |

### 8.5.2.5.8 Register 16h (address = 16h), JESD Digital Page (6900h)

**Figure 123. Register 16h**

| 7    | 6    | 5      | 4          | 3    | 2    | 1    | 0    |
|------|------|--------|------------|------|------|------|------|
| 1    | 0    | 0      | LANE SHARE | 0    | 0    | 0    | 0    |
| W-1h | W-0h | R/W-0h | W-0h       | W-0h | W-0h | W-0h | W-0h |

**Table 60. Register 16h Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                                                                                                                 |
|-----|------------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | 1          | W    | 1h    | Must write 1                                                                                                                                                                                                                |
| 6-5 | 0          | W    | 0h    | Must write 0                                                                                                                                                                                                                |
| 4   | LANE SHARE | R/W  | 0h    | When using decimate-by-4, the data of both channels are output over one lane (LMFS = 1241).<br>0 = Normal operation (each channel uses one lane)<br>1 = Lane sharing is enabled, both channels share one lane (LMFS = 1241) |
| 3-0 | 0          | W    | 0h    | Must write 0                                                                                                                                                                                                                |

**8.5.2.5.9 Register 31h (address = 31h), JESD Digital Page (6900h)**
**Figure 124. Register 31h**

|                     |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|
| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DA_BUS_REORDER[7:0] |   |   |   |   |   |   |   |
| R/W-0h              |   |   |   |   |   |   |   |

**Table 61. Register 31h Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                          |
|-----|---------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DA_BUS_REORDER[7:0] | R/W  | 0h    | Use these bits to program output connections between data streams and output lanes in decimate-by-2 and decimate-by-4 mode. <a href="#">Table 14</a> lists the supported combinations of these bits. |

**8.5.2.5.10 Register 32h (address = 32h), JESD Digital Page (6900h)**
**Figure 125. Register 32h**

|                     |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|
| 7                   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DB_BUS_REORDER[7:0] |   |   |   |   |   |   |   |
| R/W-0h              |   |   |   |   |   |   |   |

**Table 62. Register 32h Field Descriptions**

| Bit | Field               | Type | Reset | Description                                                                                                                                                                                          |
|-----|---------------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DB_BUS_REORDER[7:0] | R/W  | 0h    | Use these bits to program output connections between data streams and output lanes in decimate-by-2 and decimate-by-4 mode. <a href="#">Table 14</a> lists the supported combinations of these bits. |

**8.5.2.6 JESD Analog Page (6A00h) Registers**
**8.5.2.6.1 Register 12h (address = 12h), JESD Analog Page (6A00h)**
**Figure 126. Register 12h**

|                |   |   |   |   |   |                   |      |
|----------------|---|---|---|---|---|-------------------|------|
| 7              | 6 | 5 | 4 | 3 | 2 | 1                 | 0    |
| SEL EMP LANE 1 |   |   |   |   |   | ALWAYS<br>WRITE 1 | 0    |
| R/W-0h         |   |   |   |   |   | W-0h              | W-0h |

**Table 63. Register 12h-15h Field Descriptions**

| Bit | Field          | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                             |
|-----|----------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | SEL EMP LANE 1 | R/W  | 0h    | Selects the amount of de-emphasis for the JESD output transmitter. The de-emphasis value in dB is measured as the ratio between the peak value after the signal transition to the settled value of the voltage in one bit period.<br>000000 = 0 dB<br>000001 = –1 dB<br>000011 = –2 dB<br>000111 = –4.1 dB<br>001111 = –6.2 dB<br>011111 = –8.2 dB<br>111111 = –11.5 dB |
| 1   | ALWAYS WRITE 1 | W    | 0h    | 1 = Always write 1                                                                                                                                                                                                                                                                                                                                                      |
| 0   | 0              | W    | 0h    | 0 = Must write 0                                                                                                                                                                                                                                                                                                                                                        |

### 8.5.2.6.2 Registers 13h-15h (address = 13h-15h), JESD Analog Page (6A00h)

**Figure 127. Register 13h**

| 7              | 6 | 5 | 4 | 3 | 2 | 1    | 0    |
|----------------|---|---|---|---|---|------|------|
| SEL EMP LANE 0 |   |   |   |   |   | 0    | 0    |
| R/W-0h         |   |   |   |   |   | W-0h | W-0h |

**Figure 128. Register 14h**

| 7              | 6 | 5 | 4 | 3 | 2 | 1    | 0    |
|----------------|---|---|---|---|---|------|------|
| SEL EMP LANE 2 |   |   |   |   |   | 0    | 0    |
| R/W-0h         |   |   |   |   |   | W-0h | W-0h |

**Figure 129. Register 15h**

| 7              | 6 | 5 | 4 | 3 | 2 | 1    | 0    |
|----------------|---|---|---|---|---|------|------|
| SEL EMP LANE 3 |   |   |   |   |   | 0    | 0    |
| R/W-0h         |   |   |   |   |   | W-0h | W-0h |

**Table 64. Register 13h-15h Field Descriptions**

| Bit | Field                                 | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                             |
|-----|---------------------------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | SEL EMP LANE x (where x = 0, 2, or 3) | R/W  | 0h    | Selects the amount of de-emphasis for the JESD output transmitter. The de-emphasis value in dB is measured as the ratio between the peak value after the signal transition to the settled value of the voltage in one bit period.<br>000000 = 0 dB<br>000001 = –1 dB<br>000011 = –2 dB<br>000111 = –4.1 dB<br>001111 = –6.2 dB<br>011111 = –8.2 dB<br>111111 = –11.5 dB |
| 1-0 | 0                                     | W    | 0h    | 0 = Must write 0                                                                                                                                                                                                                                                                                                                                                        |

### 8.5.2.6.3 Register 16h (address = 16h), JESD Analog Page (6A00h)

**Figure 130. Register 16h**

| 7    | 6    | 5    | 4    | 3    | 2    | 1             | 0 |
|------|------|------|------|------|------|---------------|---|
| 0    | 0    | 0    | 0    | 0    | 0    | JESD PLL MODE |   |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h        |   |

**Table 65. Register 16h Field Descriptions**

| Bit | Field         | Type | Reset | Description                                                                                                                                                                                                                                                                              |
|-----|---------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | 0             | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                             |
| 1-0 | JESD PLL MODE | R/W  | 0h    | These bits select the JESD PLL multiplication factor and must match the JESD MODE setting.<br>00 = 20X mode, four lanes per ADC<br>01 = Not used<br>10 = 40X mode<br>11 = Not used<br><a href="#">Table 14</a> lists a programming summary of the DDC modes and JESD link configuration. |

### 8.5.2.6.4 Register 17h (address = 17h), JESD Analog Page (6A00h)

**Figure 131. Register 17h**

| 7    | 6         | 5          | 4    | 3          | 2    | 1    | 0    |
|------|-----------|------------|------|------------|------|------|------|
| 0    | PLL RESET | LANE PDN 1 | 0    | LANE PDN 0 | 0    | 0    | 0    |
| W-0h | R/W-0h    | R/W-0h     | W-0h | R/W-0h     | W-0h | W-0h | W-0h |

**Table 66. Register 17h Field Descriptions**

| Bit | Field      | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                              |
|-----|------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | 0          | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                             |
| 6   | PLL RESET  | R/W  | 0h    | Pulse this bit after powering up the device; see <a href="#">Table 75</a> .<br>0 = Default<br>0 → 1 → 0 = The PLL RESET bit is pulsed.                                                                                                                                                                                                                                   |
| 5   | LANE PDN 1 | R/W  | 0h    | This bit powers down unused SERDES lanes DA0, DA3, DB0, and DB3 in certain LMFS settings (applicable for LMFS = 4244, 2242, 2441, 4211, and 2221). Powering down unused lanes puts the SERDES buffers in tri-state mode and saves approximately 15-mA current on the IOVDD supply.<br>00 : Default<br>11 : DA0, DB0, DA3, and DB3 are powered down<br>Others: Do not use |
| 4   | 0          | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                             |
| 3   | LANE PDN 0 | R/W  | 0h    | This bit powers down unused SERDES lanes DA0, DA3, DB0, and DB3 in certain LMFS settings (applicable for LMFS = 4244, 2242, 2441, 4211, and 2221). Powering down unused lanes puts the SERDES buffers in tri-state mode and saves approximately 15-mA current on the IOVDD supply.<br>00 : Default<br>11 : DA0, DB0, DA3, and DB3 are powered down<br>Others: Do not use |
| 2-0 | 0          | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                             |

### 8.5.2.6.5 Register 1Ah (address = 1Ah), JESD Analog Page (6A00h)

**Figure 132. Register 1Ah**

| 7    | 6    | 5    | 4    | 3    | 2    | 1        | 0    |
|------|------|------|------|------|------|----------|------|
| 0    | 0    | 0    | 0    | 0    | 0    | FOVR CHA | 0    |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h   | W-0h |

**Table 67. Register 1Ah Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                             |
|-----|----------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | 0        | W    | 0h    | Must write 0                                                                                                                                            |
| 1   | FOVR CHA | R/W  | 0h    | Outputs FOVR signal for channel A on the PDN pin. FOVR CHA EN (register 1Bh, bit 3) must be enabled.<br>0 = Normal operation<br>1 = FOVR on the PDN pin |
| 0   | 0        | W    | 0h    | Must write 0                                                                                                                                            |

### 8.5.2.6.6 Register 1Bh (address = 1Bh), JESD Analog Page (6A00h)

**Figure 133. Register 1Bh**

| 7          | 6 | 5 | 4    | 3           | 2    | 1    | 0    |
|------------|---|---|------|-------------|------|------|------|
| JESD SWING |   |   | 0    | FOVR CHA EN | 0    | 0    | 0    |
| R/W-0h     |   |   | W-0h | R/W-0h      | W-0h | W-0h | W-0h |

**Table 68. Register 1Bh Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                 |
|-----|-------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | JESD SWING  | R/W  | 0h    | Selects output amplitude VOD (mVpp) of the JESD transmitter (for all lanes)<br>0 = 860 mVpp<br>1 = 810 mVpp<br>2 = 770 mVpp<br>3 = 745 mVpp<br>4 = 960 mVpp<br>5 = 930 mVpp<br>6 = 905 mVpp<br>7 = 880 mVpp |
| 4   | 0           | W    | 0h    | Must write 0                                                                                                                                                                                                |
| 3   | FOVR CHA EN | R/W  | 0h    | Enables overwrite of PDN pin with the FOVR signal from ChA.<br>0 = Normal operation<br>1 = PDN is being overwritten                                                                                         |
| 2-0 | 0           | R/W  | 0h    | Must write 0                                                                                                                                                                                                |

### 8.5.2.7 Offset Read Page (JESD BANK PAGE SEL = 6100h, JESD BANK PAGE SEL1 = 0000h) Registers

#### 8.5.2.7.1 Register 068h (address = 068h), Offset Read Page

**Figure 134. Register 068h**

| 7           | 6                 | 5 | 4 | 3 | 2           | 1              | 0    |
|-------------|-------------------|---|---|---|-------------|----------------|------|
| FREEZE CORR | DC OFFSET CORR BW |   |   |   | BYPASS CORR | ALWAYS WRITE 1 | 0    |
| R/W-0h      | R/W-0h            |   |   |   | R/W-0h      | R/W-0h         | W-0h |

**Table 69. Register 068h Field Descriptions**

| Bit | Field             | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----|-------------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | FREEZE CORR       | R/W  | 0h    | Offset correction block is enabled by default. Set this bit to freeze the block.<br>0 = Default after reset<br>1 = Offset correction block is frozen<br>See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details.                                                                                                                                                                                                                                                                                                                                                          |
| 6-3 | DC OFFSET CORR BW | R/W  | 0h    | These bits allow the user to program the 3-dB bandwidth of the notch filter centered around $k \times f_s / 4$ ( $k = 0, 1, 2$ ). The notch filter is a first-order digital filter with 3-dB bandwidth:<br>3-dB bandwidth normalized to $f_s$<br>0 = 2.99479E-07<br>1 = 1.4974E-07<br>2 = 7.48698E-08<br>3 = 3.74349E-08<br>4 = 1.87174E-08<br>5 = 9.35872E-09<br>6 = 4.67936E-09<br>7 = 2.33968E-09<br>8 = 1.16984E-09<br>9 = 5.8492E-10<br>10 = 2.9246E-10<br>11 = 1.4623E-10<br>For example, at $f_s = 1$ GSPS, if DC OFFSET CORR BW is set to 1, the notch filter has a 3-dB bandwidth of 149.74 Hz. |
| 2   | BYPASS CORR       | R/W  | 0h    | 0 = Default after reset<br>1 = Offset correction block is bypassed<br>See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details.                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 1   | ALWAYS WRITE 1    | R/W  | 0h    | Always write 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0   | 0                 | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

#### 8.5.2.7.2 Register 069h (address = 069h), Offset Read Page

**Figure 135. Register 069h**

| 7    | 6    | 5    | 4    | 3    | 2    | 1    | 0           |
|------|------|------|------|------|------|------|-------------|
| 0    | 0    | 0    | 0    | 0    | 0    | 0    | EXT CORR EN |
| W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h      |

**Table 70. Register 069h Field Descriptions**

| Bit | Field       | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                     |
|-----|-------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | 0           | W    | 0h    | Must write 0                                                                                                                                                                                                                                                                                                                                    |
| 0   | EXT CORR EN | R/W  | 0h    | Enables loading of external estimate into offset correction block.<br>0 = Default after reset (device uses internal estimate for offset correction)<br>1 = External estimate can be loaded by using the ADC <sub>x</sub> _LOAD_EXT_EST register bits<br>See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details. |

### 8.5.2.7.3 Registers 074h, 076h, 078h, 7Ah (address = 074h, 076h, 078h, 7Ah), Offset Read Page

**Figure 136. Registers 074h, 076h, 078h, 7Ah**

|                        |   |   |   |   |   |   |   |
|------------------------|---|---|---|---|---|---|---|
| 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ADCx_CORR_INT_EST[7:0] |   |   |   |   |   |   |   |
| R/W-0h                 |   |   |   |   |   |   |   |

**Table 71. Registers 074h, 076h, 078h, 7Ah Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                                                                                                                                              |
|-----|------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADCx_CORR_INT_EST[7:0] | R/W  | 0h    | Internal estimate for all four interleaving ADC cores of the dc offset corrector block can be read from these bits. Keep the R/W bit set to 1 when reading from these registers. See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details. |

### 8.5.2.7.4 Registers 075h, 077h, 079h, 7Bh (address = 075h, 077h, 079h, 7Bh), Offset Read Page

**Figure 137. Registers 075h, 077h, 079h, 7Bh**

|      |      |      |      |      |                         |   |   |
|------|------|------|------|------|-------------------------|---|---|
| 7    | 6    | 5    | 4    | 3    | 2                       | 1 | 0 |
| 0    | 0    | 0    | 0    | 0    | ADCx_CORR_INT_EST[10:8] |   |   |
| W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h                  |   |   |

**Table 72. Registers 075h, 077h, 079h, 7Bh Field Descriptions**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                                                                                              |
|-----|-------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-3 | 0                       | W    | 0h    | Must write 0                                                                                                                                                                                                                                                             |
| 2-0 | ADCx_CORR_INT_EST[10:8] | R/W  | 0h    | Internal estimate for all four interleaving ADC cores of the dc offset corrector block can be read from these bits. Keep the R/W bit set to 1 when reading from these registers. See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details. |

### 8.5.2.8 Offset Load Page (JESD BANK PAGE SEL= 6100h, JESD BANK PAGE SEL1 = 0500h) Registers

#### 8.5.2.8.1 Registers 00h, 04h, 08h, 0Ch (address = 00h, 04h, 08h, 0Ch), Offset Load Page

**Figure 138. Registers 00h, 04h, 08h, 0Ch**

|                        |   |   |   |   |   |   |   |
|------------------------|---|---|---|---|---|---|---|
| 7                      | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ADCx_LOAD_EXT_EST[7:0] |   |   |   |   |   |   |   |
| R/W-0h                 |   |   |   |   |   |   |   |

**Table 73. Registers 00h, 04h, 08h, 0Ch Field Descriptions**

| Bit | Field                  | Type | Reset | Description                                                                                                                                                                                      |
|-----|------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADCx_LOAD_EXT_EST[7:0] | R/W  | 0h    | External estimate can be loaded into the dc offset corrector blocks for all four interleaving ADC cores. See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details. |

### 8.5.2.8.2 Registers 01h, 05h, 09h, 0Dh (address = 01h, 05h, 09h, 0Dh), Offset Load Page

**Figure 139. Registers 01h, 05h, 09h, 0Dh**

| 7    | 6    | 5    | 4    | 3    | 2                       | 1 | 0 |
|------|------|------|------|------|-------------------------|---|---|
| 0    | 0    | 0    | 0    | 0    | ADCx_LOAD_EXT_EST[10:8] |   |   |
| W-0h | W-0h | W-0h | W-0h | W-0h | R/W-0h                  |   |   |

**Table 74. Registers 01h, 05h, 09h, 0Dh Field Descriptions**

| Bit | Field                   | Type | Reset | Description                                                                                                                                                                                      |
|-----|-------------------------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-3 | 0                       | W    | 0h    | Must write 0                                                                                                                                                                                     |
| 2-0 | ADCx_CORR_INT_EST[10:8] | R/W  | 0h    | External estimate can be loaded into the dc offset corrector blocks for all four interleaving ADC cores. See the <a href="#">DC Offset Correction Block in the ADS54J60</a> section for details. |

## 9 Application and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

#### 9.1.1 Start-Up Sequence

The steps described in [Table 75](#) are recommended as the power-up sequence with the ADS54J60 in 20X mode (LMFS = 8224).

**Table 75. Initialization Sequence**

| STEP | SEQUENCE                                                                     | DESCRIPTION                                                                                                         | PAGE BEING PROGRAMMED         | COMMENT                                                                                                                                 |
|------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 1    | Power-up the device                                                          | Bring up IOVDD to 1.15 V before applying power to DVDD. Bring up DVDD to 1.9 V, AVDD to 1.9 V, and AVDD3V to 3.0 V. | —                             | See the <a href="#">Power Sequencing and Initialization</a> section for power sequence requirements.                                    |
| 2    | Reset the device                                                             | <b>Hardware reset</b>                                                                                               |                               |                                                                                                                                         |
|      |                                                                              | Apply a hardware reset by pulsing pin 48 (low → high → low).                                                        | —                             | A hardware reset clears all registers to their default values.                                                                          |
|      |                                                                              | <b>Register writes are equivalent to a hardware reset.</b>                                                          |                               |                                                                                                                                         |
|      |                                                                              | Write address 0-000h with 81h.                                                                                      | General register              | Reset registers in the ADC and master pages of the analog bank.<br>This bit is a self-clearing bit.                                     |
|      |                                                                              | Write address 4-001h with 00h and address 4-002h with 00h.                                                          | Unused page                   | Clear any unwanted content from the unused pages of the JESD bank.                                                                      |
|      |                                                                              | Write address 4-003h with 00h and address 4-004h with 68h.                                                          | —                             | Select the main digital page of the JESD bank.                                                                                          |
|      |                                                                              | Write address 6-0F7h with 01h for channel A.                                                                        | Main digital page (JESD bank) | Use the DIG RESET register bit to reset all pages in the JESD bank.<br>This bit is a self-clearing bit.                                 |
| 3    | Performance modes                                                            | Write address 6-000h with 01h, then address 6-000h with 00h.                                                        |                               | Pulse the PULSE RESET register bit for channel A.                                                                                       |
|      |                                                                              | Write address 0-011h with 80h.                                                                                      | —                             | Select the master page of the analog bank.                                                                                              |
|      |                                                                              | Write address 0-059h with 20h.                                                                                      | Master page (analog bank)     | Set the ALWAYS WRITE 1 bit.                                                                                                             |
| 4    | Program desired registers for decimation options and JESD link configuration | <b>Default register writes for DDC modes and JESD link configuration (LMFS 8224).</b>                               |                               |                                                                                                                                         |
|      |                                                                              | Write address 4-003h with 00h and address 4-004h with 69h.                                                          | —                             | Select the JESD digital page.                                                                                                           |
|      |                                                                              | Write address 6-000h with 80h.                                                                                      | JESD digital page (JESD bank) | Set the CTRL K bit for both channels by programming K according to the SYSREF signal later on in the sequence.                          |
|      |                                                                              | JESD link is configured with LMFS = 8224 by default with no decimation.                                             |                               | See <a href="#">Table 14</a> for configuring the JESD digital page registers for the desired LMFS and programming appropriate DDC mode. |
|      |                                                                              | Write address 4-003h with 00h and address 4-004h with 6Ah.                                                          | —                             | Select the JESD analog page.                                                                                                            |
|      |                                                                              | JESD link is configured with LMFS = 8224 by default with no decimation.                                             | JESD analog page (JESD bank)  | See <a href="#">Table 14</a> for configuring the JESD analog page registers for the desired LMFS and programming appropriate DDC mode.  |
|      |                                                                              | Write address 6-017h with 40h.                                                                                      |                               | PLL reset.                                                                                                                              |
|      |                                                                              | Write address 6-017h with 00h.                                                                                      |                               | PLL reset clear.                                                                                                                        |
|      |                                                                              | Write address 4-003h with 00h and address 4-004h with 68h.                                                          | —                             | Select the main digital page.                                                                                                           |
|      |                                                                              | JESD link is configured with LMFS = 8224 by default with no decimation.                                             | Main digital page (JESD bank) | See <a href="#">Table 14</a> for configuring the main digital page registers for the desired LMFS and programming appropriate DDC mode. |
|      |                                                                              | Write address 6-000h with 01h and address 6-000h with 00h.                                                          |                               | Pulse the PULSE RESET register bit. All settings programmed in the main digital page take effect only after this bit is pulsed.         |

**Table 75. Initialization Sequence (continued)**

| STEP | SEQUENCE                                                       | DESCRIPTION                                                | PAGE BEING PROGRAMMED         | COMMENT                                                                                             |
|------|----------------------------------------------------------------|------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------------------------------------------|
| 5    | Set the value of K and the SYSREF signal frequency accordingly | Write address 4-003h with 00h and address 4-004h with 69h. | —                             | Select the JESD digital page.                                                                       |
|      |                                                                | Write address 6-006h with XXh (choose the value of K).     | JESD digital page (JESD bank) | See the <a href="#">SYSREF Signal</a> section to choose the correct frequency for SYSREF.           |
| 6    | JESD lane alignment                                            | Pull the SYNCB pin (pin 63) low.                           | —                             | Transmit K28.5 characters.                                                                          |
|      |                                                                | Pull the SYNCB pin high.                                   |                               | After the receiver is synchronized, initiate an ILA phase and subsequent transmissions of ADC data. |

### 9.1.2 Hardware Reset

Figure 140 and Table 76 show the timing for a hardware reset.

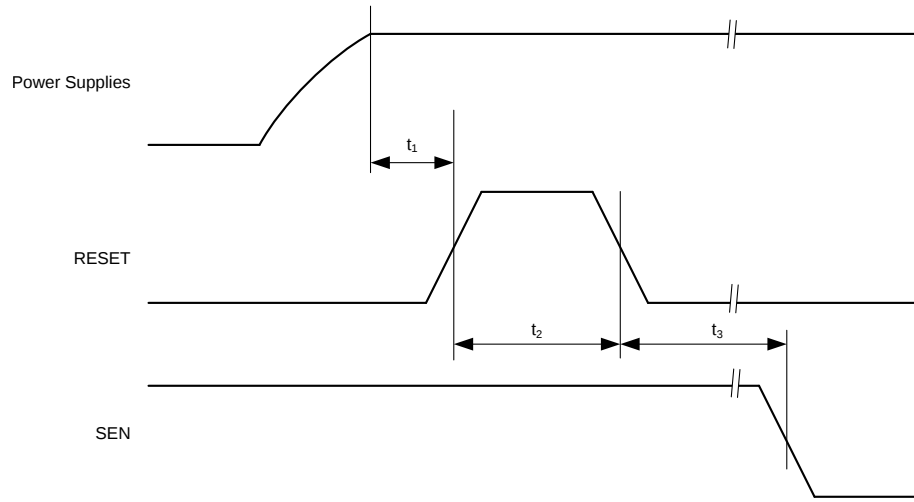


Figure 140. Hardware Reset Timing Diagram

Table 76. Timing Requirements for Figure 140

|                |                                                                | MIN | TYP | MAX | UNIT |
|----------------|----------------------------------------------------------------|-----|-----|-----|------|
| t <sub>1</sub> | Power-on delay: delay from power up to active high RESET pulse | 1   |     |     | ms   |
| t <sub>2</sub> | Reset pulse duration: active high RESET pulse duration         | 10  |     |     | ns   |
| t <sub>3</sub> | Register write delay: delay from RESET disable to SEN active   | 100 |     |     | ns   |

### 9.1.3 SNR and Clock Jitter

The signal-to-noise ratio (SNR) of the ADC is limited by three different factors: quantization noise, thermal noise, and jitter, as shown in Equation 4. The quantization noise is typically not noticeable in pipeline converters and is 98 dB for a 16-bit ADC. The thermal noise limits the SNR at low input frequencies and the clock jitter sets the SNR for higher input frequencies.

$$SNR_{ADC}[dBc] = -20 \log \sqrt{\left(10^{-\frac{SNR_{Quantization\ Noise}}{20}}\right)^2 + \left(10^{-\frac{SNR_{Thermal\ Noise}}{20}}\right)^2 + \left(10^{-\frac{SNR_{Jitter}}{20}}\right)^2} \quad (4)$$

The SNR limitation resulting from sample clock jitter can be calculated by Equation 5:


$$SNR_{Jitter}[dBc] = -20 \log(2\pi \times f_{in} \times T_{Jitter}) \quad (5)$$

The total clock jitter ( $T_{Jitter}$ ) has two components: the internal aperture jitter (130 fs) is set by the noise of the clock input buffer and the external clock jitter.  $T_{Jitter}$  can be calculated by Equation 6:

$$T_{Jitter} = \sqrt{(T_{Jitter, Ext\_Clock\_Input})^2 + (T_{Aperture\_ADC})^2} \quad (6)$$

External clock jitter can be minimized by using high-quality clock sources and jitter cleaners as well as band-pass filters at the clock input. A faster clock slew rate also improves the ADC aperture jitter.


The ADS54J60 has a thermal noise of approximately 71.1 dBFS and an internal aperture jitter of 120 fs. The SNR, depending on the amount of external jitter for different input frequencies, is shown in Figure 141.

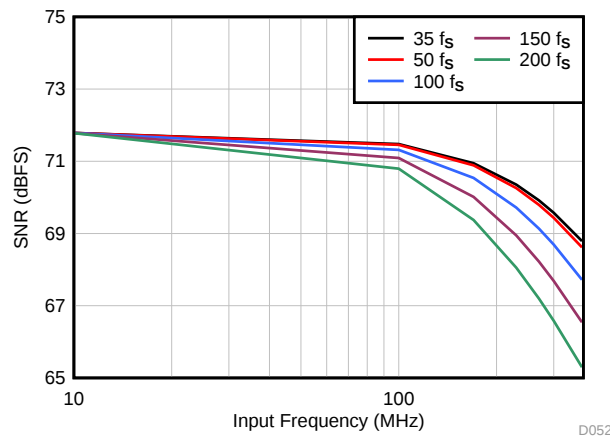

**Figure 141. SNR versus Input Frequency and External Clock Jitter**

#### 9.1.4 DC Offset Correction Block in the ADS54J60

The ADS54J60 employs eight dc offset correction blocks (four per channel, one per interleaving core). Figure 142 shows a dc correction block diagram.

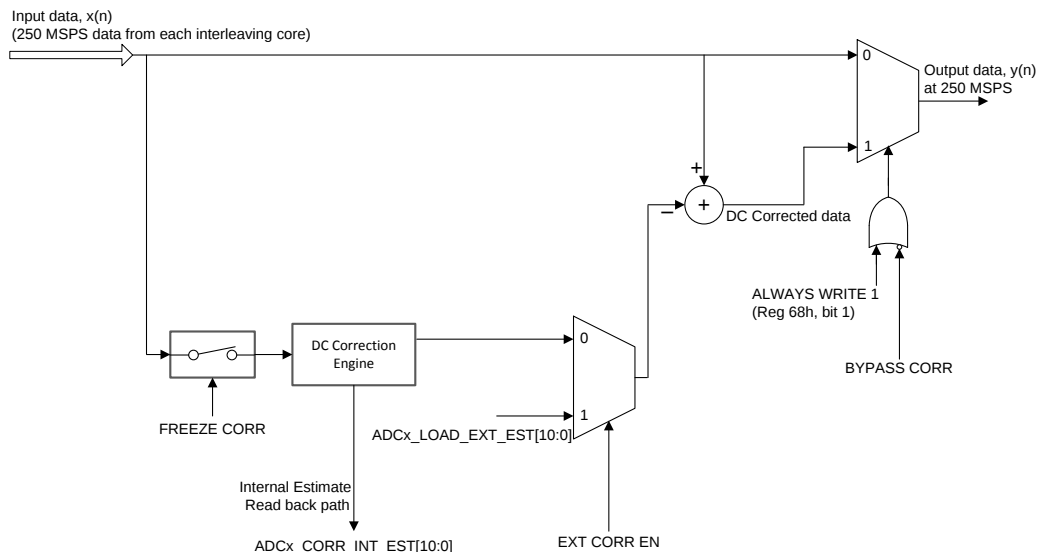


**Figure 142. DC Offset Correction Block Diagram**

The purpose of the dc offset correction block is to correct the dc offset of interleaving cores that mainly arise from the amplifier in the first pipeline stage. Any mismatch in dc offset among interleaving cores results in spurs at  $f_s / 4$  and  $f_s / 2$ . The dc offset correction blocks estimate and correct the dc offset of an individual core, to the ideal mid-code value, and thereby remove the effect of offset mismatch.

The dc offset correction block can correct the dc offset of an individual core up to  $\pm 1024$  codes.

In applications involving dc-coupling between the ADC and the driver, the dc offset correction block can either be *bypassed* or *frozen* because the block cannot distinguish the external dc signal from the internal dc offset. Figure 143 shows that when bypassed, the internal dc mismatch appears at dc,  $f_s / 4$ , and  $f_s / 2$  frequency points and can be as big as  $-40$  dBFS.

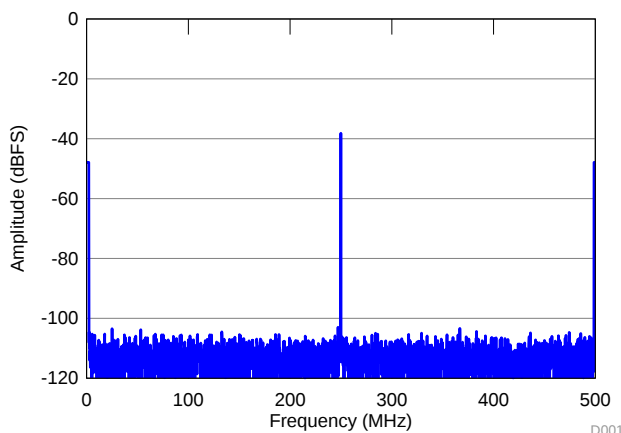

**Figure 143. FFT After Bypassing the DC Offset Correction Block**


#### 9.1.4.1 Freezing the DC Offset Correction Block

After device is powered up, the dc offset correction block estimates the internal dc offset with the idle channel input before the block is frozen. When frozen, the correction block holds the last estimated value that belongs to the internal dc offset. After the correction block is frozen, an external signal can be applied.

#### 9.1.4.2 Effect of Temperature

The internal dc offset of the individual cores changes with temperature, resulting in  $f_s / 4$  and  $f_s / 2$  spurs appearing again in the spectrum at a different temperature.

Figure 144 shows a variation of the  $f_s / 4$  spur over temperature for a typical device.

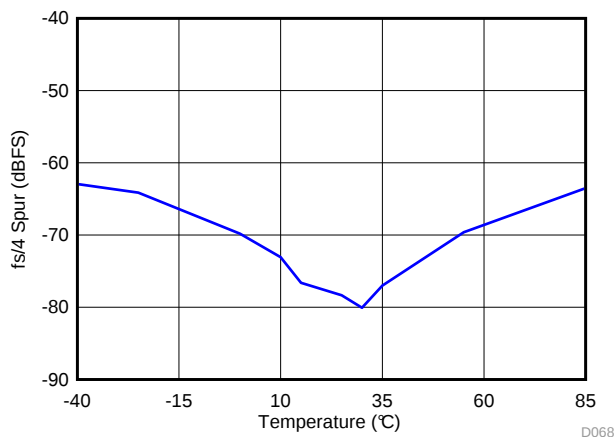

NOTE: The offset correction block was frozen at room temperature, then the temperature was varied from  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

**Figure 144. Variation of the  $f_s / 4$  Spur Over Temperature**

Although some systems can accept such a variation in the  $f_s / 4$  and  $f_s / 2$  spurs across temperature, other systems may require the internal dc offset profile to be calibrated with temperature. To achieve this calibration, the device provides an option to read the internal estimate values from the correction block for each of the interleaving cores and also to load the values back to the correction block. For calibration, after power up, a temperature sweep can be performed with the idle channel input and the internal dc offset can be read back using the ADCx\_CORR\_INT\_EST register bits for salient temperature points. Then during operation, when temperature changes, the corresponding estimates can be externally loaded to the correction block using the ADCx\_LOAD\_EXT\_EST register bits.

The dc offset corrector block is enabled by default. For a given channel, the device can disable and freeze the block, read the estimate of the block, and load the external estimate.

Table 77 lists an example of required SPI writes for reading an internal estimate of the dc offset correction block, and then loading the estimate back to the corrector.

**Table 77. Format (16-Bit Address, 8-Bit Data)**

| STEP                                            | ADDRESS (Hex) <sup>(1)</sup>                                               | DATA (Hex) | COMMENT                                                                               |
|-------------------------------------------------|----------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------|
| Reading an internal estimate from both channels | 4-005                                                                      | 01         | This setting disables broadcast mode (channel A and B can be individually programmed) |
|                                                 | 4-004                                                                      | 61         | Selects offset read page (61000000h)                                                  |
|                                                 | 4-003                                                                      | 00         |                                                                                       |
|                                                 | 4-002                                                                      | 00         |                                                                                       |
|                                                 | 4-001                                                                      | 00         |                                                                                       |
|                                                 | Data from the offset read page can be read as below (keep the R/W bit = 1) |            |                                                                                       |
|                                                 | E-074                                                                      | xx         | Reading the internal estimate [7:0] for core 0, channel A on the SDOUT pin            |
|                                                 | E-075                                                                      | xx         | Reading the internal estimate [10:8] for core 0, channel A on the SDOUT pin           |
|                                                 | E-076                                                                      | xx         | Reading the internal estimate [7:0] for core 1, channel A on the SDOUT pin            |
|                                                 | E-077                                                                      | xx         | Reading the internal estimate [10:8] for core 1, channel A on the SDOUT pin           |
|                                                 | E-078                                                                      | xx         | Reading the internal estimate [7:0] for core 2, channel A on the SDOUT pin            |
|                                                 | E-079                                                                      | xx         | Reading the internal estimate [10:8] for core 2, channel A on the SDOUT pin           |
|                                                 | E-07A                                                                      | xx         | Reading the internal estimate [7:0] for core 3, channel A on the SDOUT pin            |
|                                                 | E-07B                                                                      | xx         | Reading the internal estimate [10:8] for core 3, channel A on the SDOUT pin           |
|                                                 | F-074                                                                      | xx         | Reading the internal estimate [7:0] for core 0, channel B on the SDOUT pin            |
|                                                 | F-075                                                                      | xx         | Reading the internal estimate [10:8] for core 0, channel B on the SDOUT pin           |
|                                                 | F-076                                                                      | xx         | Reading the internal estimate [7:0] for core 1, channel B on the SDOUT pin            |
|                                                 | F-077                                                                      | xx         | Reading the internal estimate [10:8] for core 1, channel B on the SDOUT pin           |
|                                                 | F-078                                                                      | xx         | Reading the internal estimate [7:0] for core 2, channel B on the SDOUT pin            |
|                                                 | F-079                                                                      | xx         | Reading the internal estimate [10:8] for core 2, channel B on the SDOUT pin           |
|                                                 | F-07A                                                                      | xx         | Reading the internal estimate [7:0] for core 3, channel B on the SDOUT pin            |
|                                                 | F-07B                                                                      | xx         | Reading the internal estimate [10:8] for core 3, channel B on the SDOUT pin           |


(1) The address field is represented in four hex bits in a-bcd format, where a contains information about the R/W, M, P, and CH bits, and bcd contain the actual address of the register.

**Table 77. Format (16-Bit Address, 8-Bit Data) (continued)**


| STEP                                                | ADDRESS<br>(Hex) <sup>(1)</sup> | DATA (Hex) | COMMENT                                                                           |
|-----------------------------------------------------|---------------------------------|------------|-----------------------------------------------------------------------------------|
| Loading an<br>external estimate<br>to both channels | 6-069                           | 01         | Enables the external correction bit located in the offset read page for channel A |
|                                                     | 7-069                           | 01         | Enables the external correction bit located in the offset read page for channel B |
|                                                     | 4-004                           | 61         | Change page to offset load page (61000500h)                                       |
|                                                     | 4-003                           | 00         |                                                                                   |
|                                                     | 4-002                           | 05         |                                                                                   |
|                                                     | 4-001                           | 00         |                                                                                   |
|                                                     | 6-000                           | xx         | Loading the external estimate [7:0] for core 0, channel A through SPI writes      |
|                                                     | 6-001                           | xx         | Loading the external estimate [10:8] for core 0, channel A through SPI writes     |
|                                                     | 6-004                           | xx         | Loading the external estimate [7:0] for core 1, channel A through SPI writes      |
|                                                     | 6-005                           | xx         | Loading the external estimate [10:8] for core 1, channel A through SPI writes     |
|                                                     | 6-008                           | xx         | Loading the external estimate [7:0] for core 2, channel A through SPI writes      |
|                                                     | 6-009                           | xx         | Loading the external estimate [10:8] for core 2, channel A through SPI writes     |
|                                                     | 6-00C                           | xx         | Loading the external estimate [7:0] for core 3, channel A through SPI writes      |
|                                                     | 6-00D                           | xx         | Loading the external estimate [10:8] for core 3, channel A through SPI writes     |
|                                                     | 7-000                           | xx         | Loading the external estimate [7:0] for core 0, channel B through SPI writes      |
|                                                     | 7-001                           | xx         | Loading the external estimate [10:8] for core 0, channel B through SPI writes     |
|                                                     | 7-004                           | xx         | Loading the external estimate [7:0] for core 1, channel B through SPI writes      |
|                                                     | 7-005                           | xx         | Loading the external estimate [10:8] for core 1, channel B through SPI writes     |
|                                                     | 7-008                           | xx         | Loading the external estimate [7:0] for core 2, channel B through SPI writes      |
|                                                     | 7-009                           | xx         | Loading the external estimate [10:8] for core 2, channel B through SPI writes     |
|                                                     | 7-00C                           | xx         | Loading the external estimate [7:0] for core 3, channel B through SPI writes      |
|                                                     | 7-00D                           | xx         | Loading the external estimate [10:8] for core 3, channel B through SPI writes     |

### 9.1.5 Idle Channel Histogram

Figure 145 shows a histogram of output codes when no signal is applied at the analog inputs of the ADS54J60. When the dc offset correction block of the device is bypassed, Figure 146 shows that the output code histogram becomes multi-modal with as many as four peaks because the ADS54J60 is a 4-way interleaved ADC with each ADC core having a different internal dc offset.

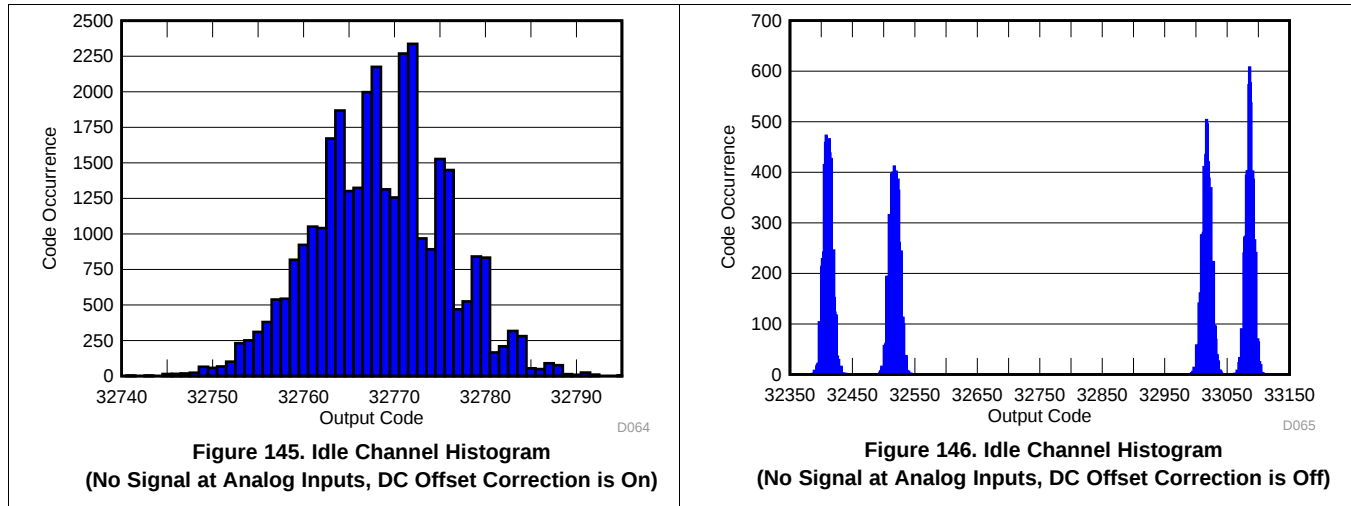


When the dc offset correction block is frozen (instead of being bypassed), as shown in Figure 147, the output code histogram improves (compared to when bypassed). However, when temperature changes, the dc offset difference among interleaving cores may increase, resulting in increased spacing between peaks in the histogram.

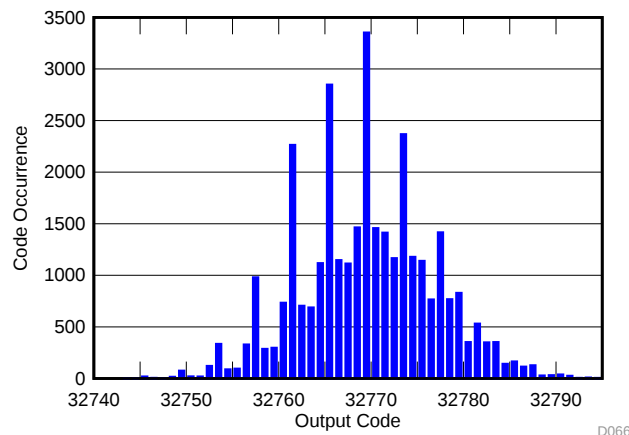

**Figure 147. Idle Channel Histogram**  
(No Signal at Analog Inputs, DC Offset Correction is Frozen)

## 9.2 Typical Application

The ADS54J60 is designed for wideband receiver applications demanding excellent dynamic range over a large input frequency range. A typical schematic for an ac-coupled receiver is shown in [Figure 148](#).


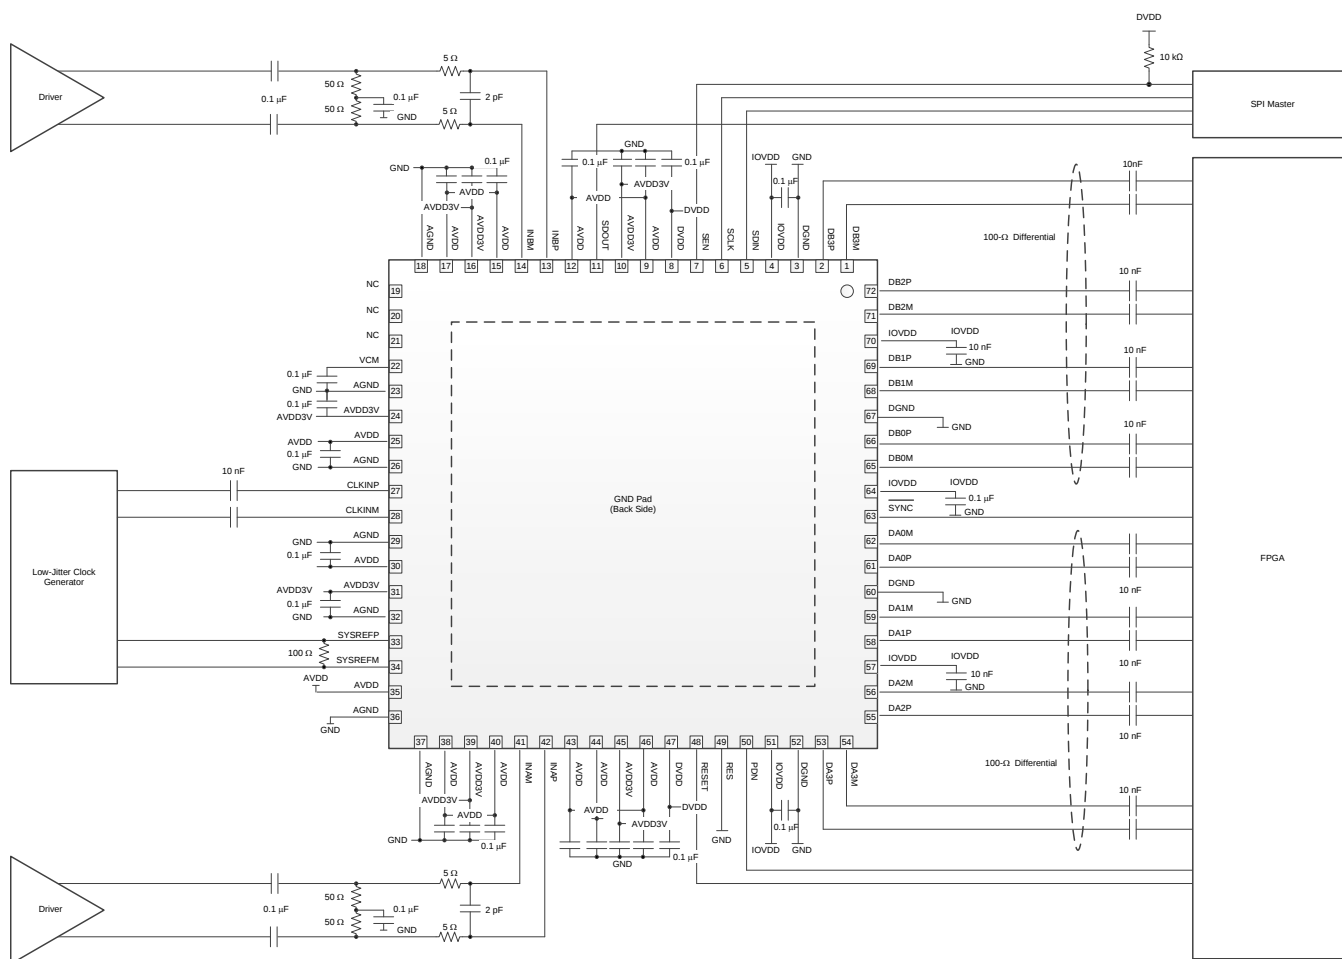


## Typical Application (continued)

### 9.2.1 Design Requirements

#### 9.2.1.1 Transformer-Coupled Circuits

Typical applications involving transformer-coupled circuits are discussed in this section. To achieve good phase and amplitude balances at the ADC inputs, surface-mount transformers can be used (for example, for frequencies up to 300 MHz, ADT1-1WT or WBC1-1 can be used and for higher input frequencies TC1-1-13M+ can be used). When designing dc driving circuits, the ADC input impedance must be considered. [Figure 149](#) and [Figure 150](#) show the impedance ( $Z_{IN} = R_{IN} \parallel C_{IN}$ ) across the ADC input pins.

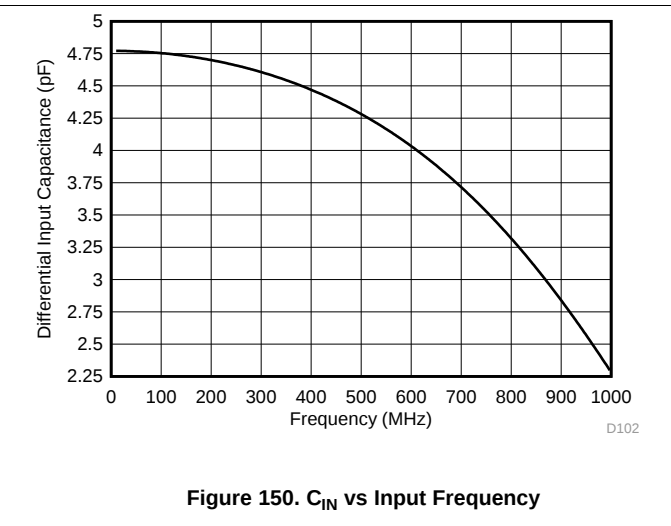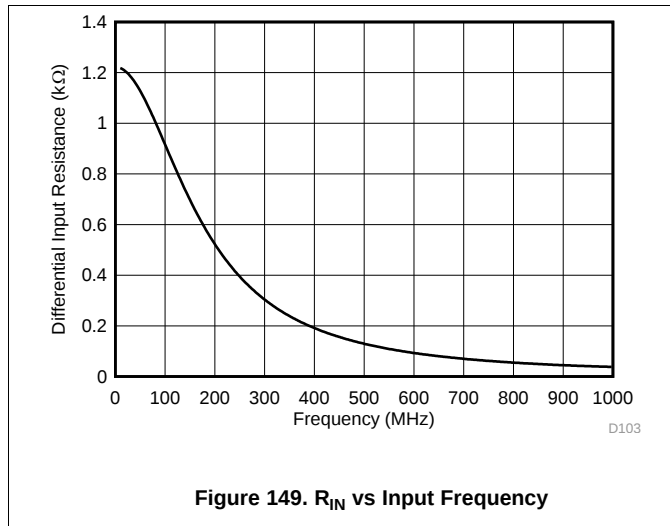

By using the simple drive circuit of [Figure 151](#), uniform performance can be obtained over a wide frequency range. The buffers present at the analog inputs of the device help isolate the external drive source from the switching currents of the sampling circuit.

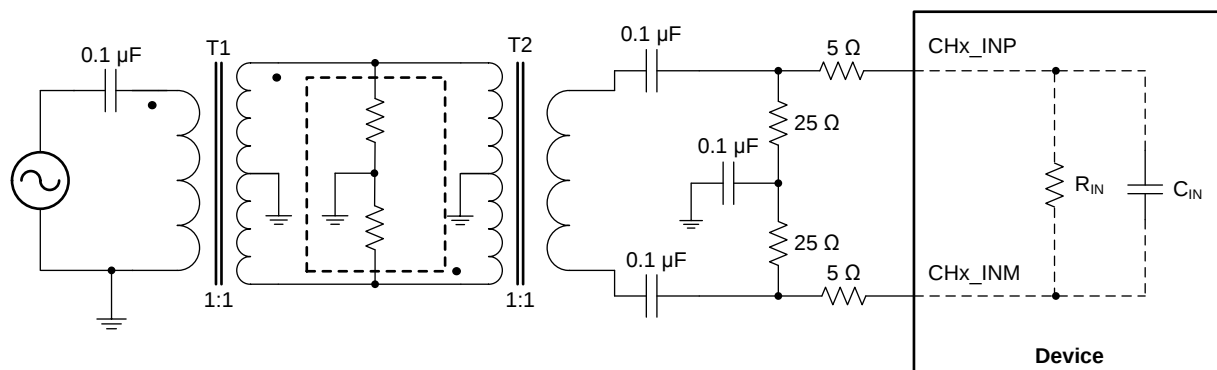


Figure 151. Input Drive Circuit


### 9.2.2 Detailed Design Procedure

For optimum performance, the analog inputs must be driven differentially. This architecture improves common-mode noise immunity and even-order harmonic rejection. A small resistor (5 Ω to 10 Ω) in series with each input pin is recommended to damp out ringing caused by package parasitics, as shown in [Figure 151](#).

## Typical Application (continued)

### 9.2.3 Application Curves

Figure 152 and Figure 153 show the typical performance at 170 MHz and 230 MHz, respectively.

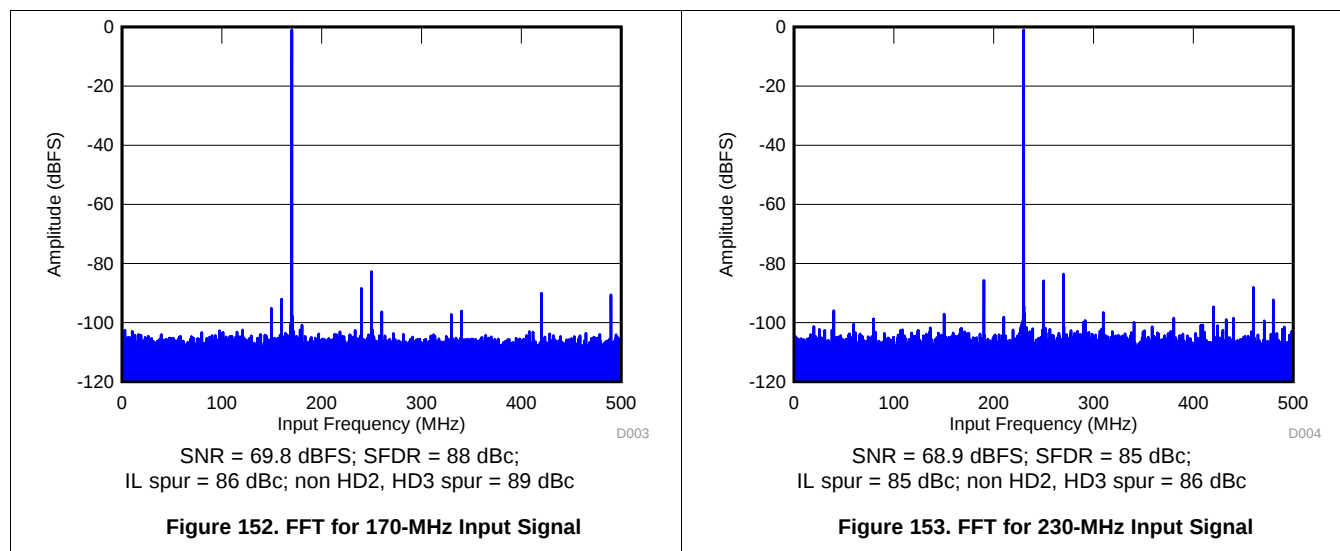


## 10 Power Supply Recommendations

The device requires a 1.15-V nominal supply for IOVDD, a 1.9-V nominal supply for DVDD, a 1.9-V nominal supply for AVDD, and a 3.0-V nominal supply for AVDD3V. For detailed information regarding the operating voltage minimum and maximum specifications of different supplies, see the [Recommended Operating Conditions](#) table.

## 10.1 Power Sequencing and Initialization

Figure 154 shows the suggested power-up sequencing for the device. Note that the 1.15-V IOVDD supply must rise before the 1.9-V DVDD supply. If the 1.9-V DVDD supply rises before the 1.15-V IOVDD supply, then the internal default register settings may not load properly. The other supplies (the 3-V AVDD3V and the 1.9-V AVDD), can come up in any order during the power sequence. The power supplies can ramp up at any rate and there is no hard requirement for the time delay between IOVDD ramp up to DVDD ramp-up (can be in orders of microseconds but is recommend to be a few milliseconds).

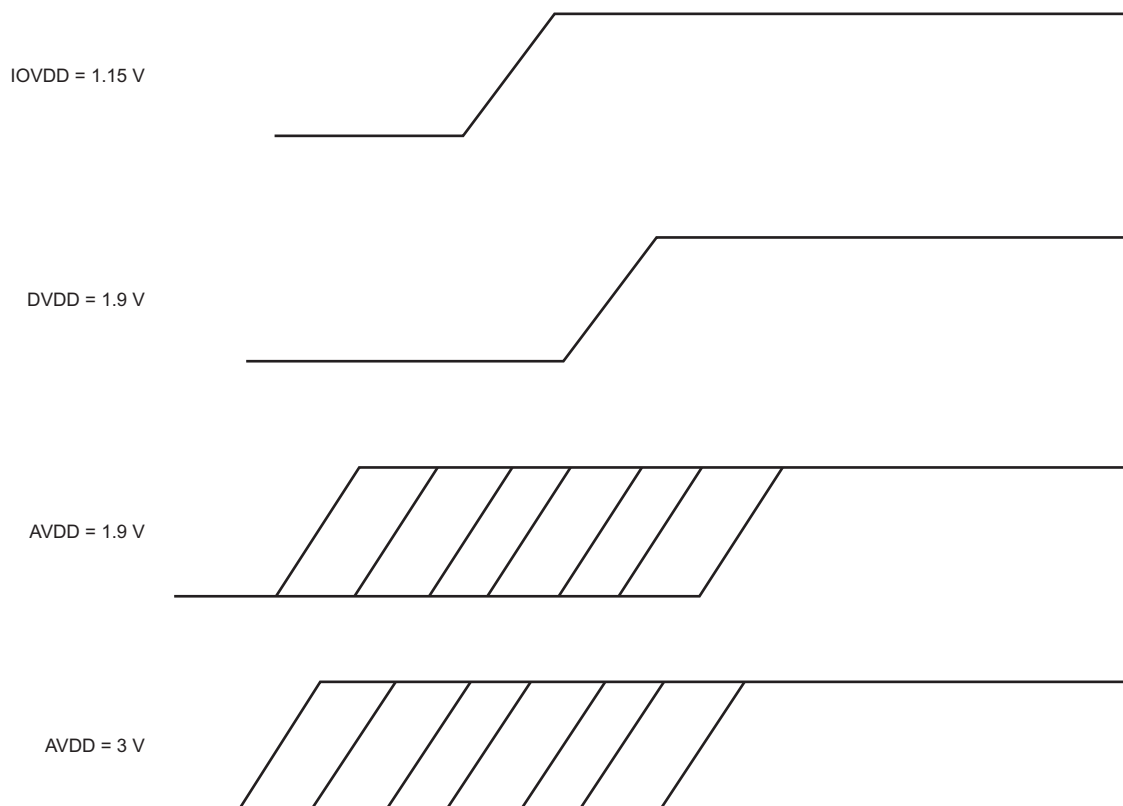

**Figure 154. Power Sequencing for the ADS54Jxx Family of Devices**

## 11 Layout

### 11.1 Layout Guidelines

The device evaluation module (EVM) layout can be used as a reference layout to obtain the best performance. A layout diagram of the EVM top layer is provided in [Figure 155](#). A complete layout of the EVM is available at the [ADS54J60 EVM folder](#). Some important points to remember during board layout are:

- Analog inputs are located on opposite sides of the device pinout to ensure minimum crosstalk on the package level. To minimize crosstalk onboard, the analog inputs must exit the pinout in opposite directions, as illustrated in the reference layout of [Figure 155](#) as much as possible.
- In the device pinout, the sampling clock is located on a side perpendicular to the analog inputs in order to minimize coupling between them. This configuration is also maintained on the reference layout of [Figure 155](#) as much as possible.
- Keep digital outputs away from the analog inputs. When these digital outputs exit the pinout, the digital output traces must not be kept parallel to the analog input traces because this configuration can result in coupling from the digital outputs to the analog inputs and degrade performance. All digital output traces to the receiver [such as a field-programmable gate array (FPGA) or an application-specific integrated circuit (ASIC)] must be matched in length to avoid skew among outputs.
- At each power-supply pin (AVDD, DVDD, or AVDDD3V), keep a 0.1- $\mu$ F decoupling capacitor close to the device. A separate decoupling capacitor group consisting of a parallel combination of 10- $\mu$ F, 1- $\mu$ F, and 0.1- $\mu$ F capacitors can be kept close to the supply source.

---

#### NOTE

The PDN and SDOUT traces must be routed away from the analog input traces. When the PDN and SDOUT pins are programmed to carry OVR information, the proximity of these pins to the analog input traces may result in degradation of ADC performance because of coupling. For best performance, the PDN and SDOUT traces must not overlap or cross the path of the analog input traces even if routed on different layers of the PCB.

---

## 11.2 Layout Example

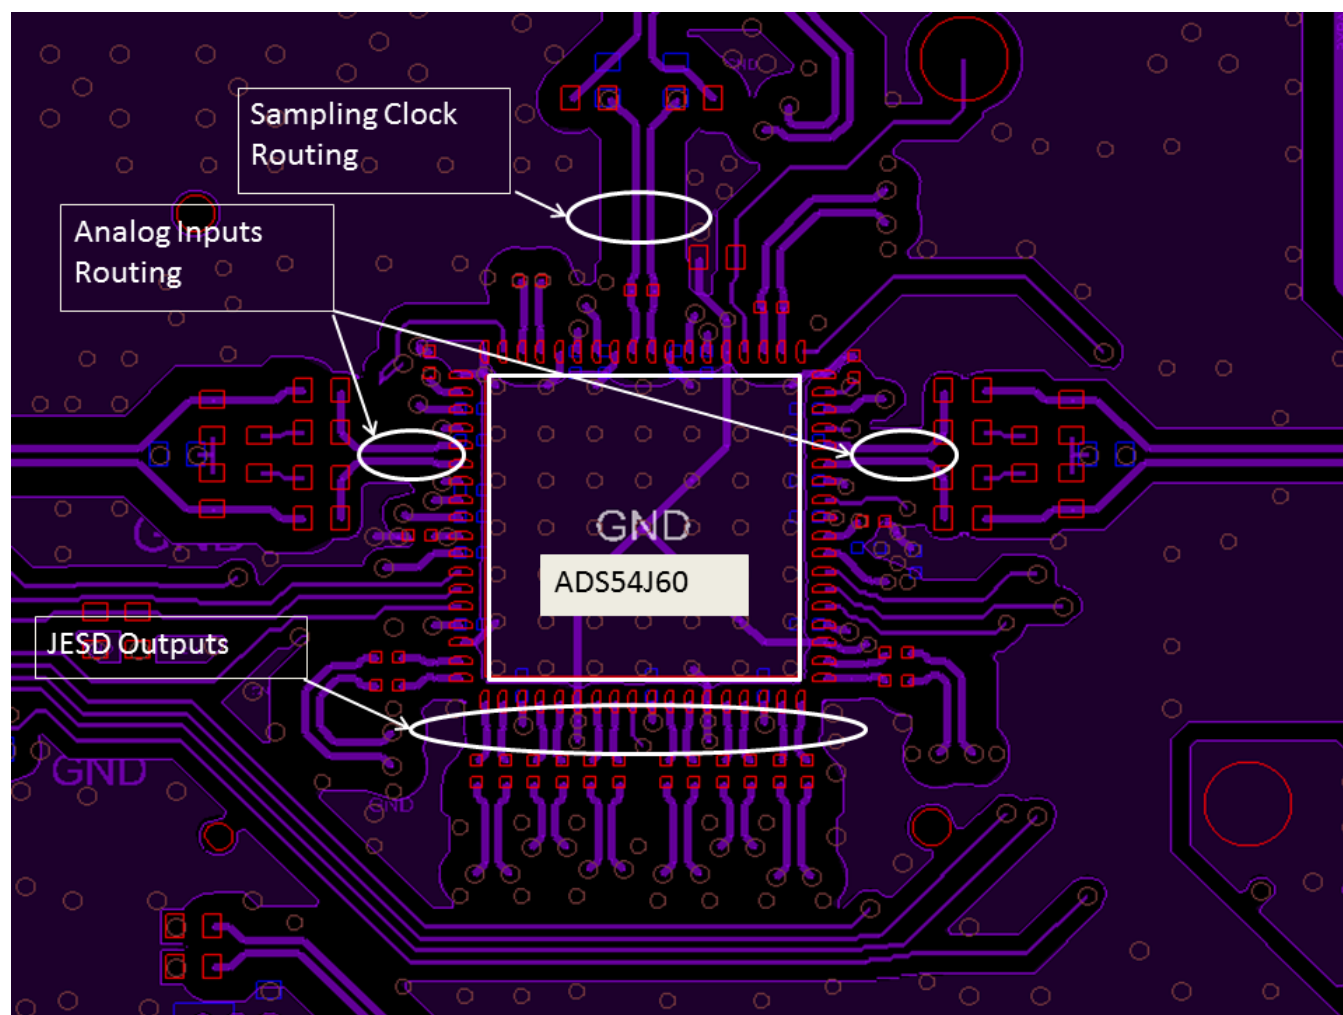


Figure 155. ADS54J60 EVM layout

## 12 デバイスおよびドキュメントのサポート

### 12.1 ドキュメントのサポート

#### 12.1.1 関連資料

関連資料については、を参照してください。

- テキサス・インスツルメンツ、『[ADS54J20 2 チャンネル、12 ビット、1.0GSPS、A/D コンバータ](#)』データシート
- テキサス・インスツルメンツ、『[ADS54J40 2 チャンネル、14 ビット、1.0GSPS、A/D コンバータ](#)』データシート
- テキサス・インスツルメンツ、『[ADS54J42 2 チャンネル、14 ビット、625MSPS、A/D コンバータ](#)』データシート
- テキサス・インスツルメンツ、『[ADS54J66 4 チャンネル、14 ビット、500MSPS、DDC 内蔵 A/D コンバータ](#)』データシート (英語)
- テキサス・インスツルメンツ、『[ADS54J69 2 チャンネル、16 ビット、500MSPS、A/D コンバータ](#)』データシート
- テキサス・インスツルメンツ、『[ADS54J60EVM](#)』ユーザー・ガイド

### 12.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の「アラートを受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 12.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.4 商標

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.5 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

### 12.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier  | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|-----------------|------------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">ADS54J60IRMP</a>  | Active        | Production           | VQFN (RMP)   72 | 168   JEDEC TRAY (5+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |
| ADS54J60IRMP.A                | Active        | Production           | VQFN (RMP)   72 | 168   JEDEC TRAY (5+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |
| ADS54J60IRMPG4                | Active        | Production           | VQFN (RMP)   72 | 168   JEDEC TRAY (5+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |
| ADS54J60IRMPG4.A              | Active        | Production           | VQFN (RMP)   72 | 168   JEDEC TRAY (5+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |
| <a href="#">ADS54J60IRMPT</a> | Active        | Production           | VQFN (RMP)   72 | 250   SMALL T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |
| ADS54J60IRMPT.A               | Active        | Production           | VQFN (RMP)   72 | 250   SMALL T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 85    | AZ54J60             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.


Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

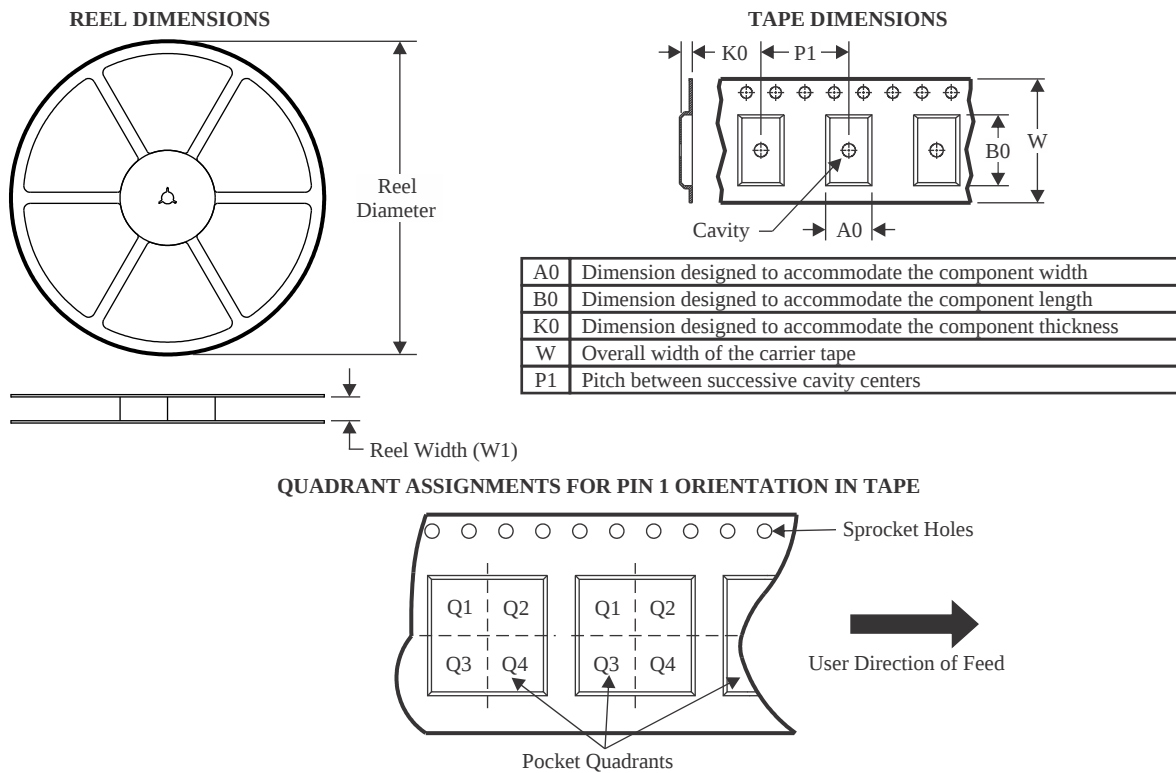

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|-----|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| ADS54J60IRMPT | VQFN         | RMP             | 72   | 250 | 180.0              | 24.4               | 10.25   | 10.25   | 2.25    | 16.0    | 24.0   | Q2            |


## TAPE AND REEL BOX DIMENSIONS

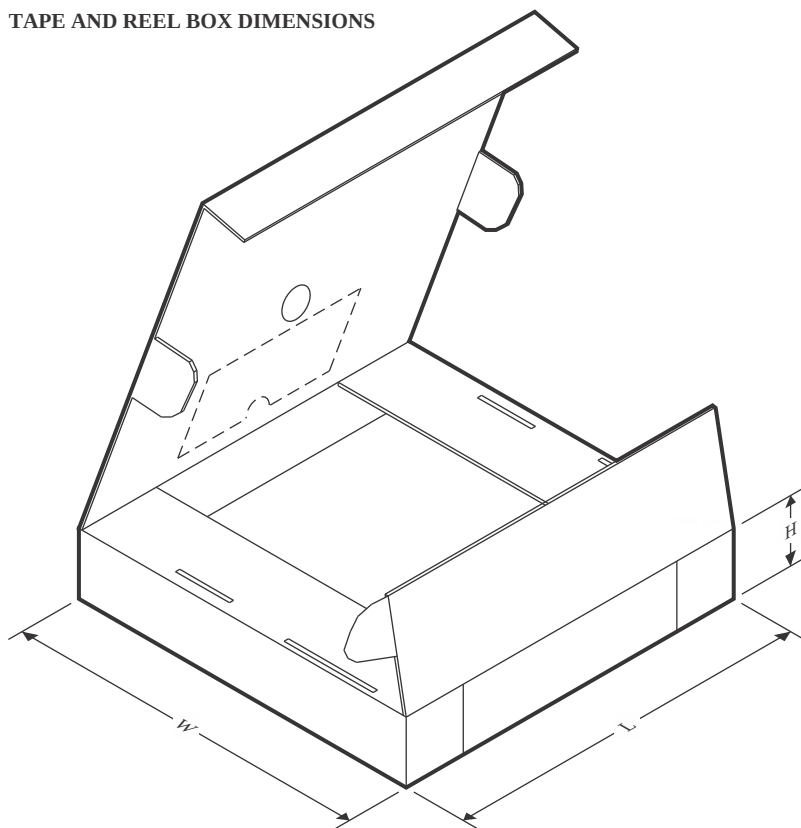

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|-----|-------------|------------|-------------|
| ADS54J60IRMPT | VQFN         | RMP             | 72   | 250 | 213.0       | 191.0      | 55.0        |

## TRAY

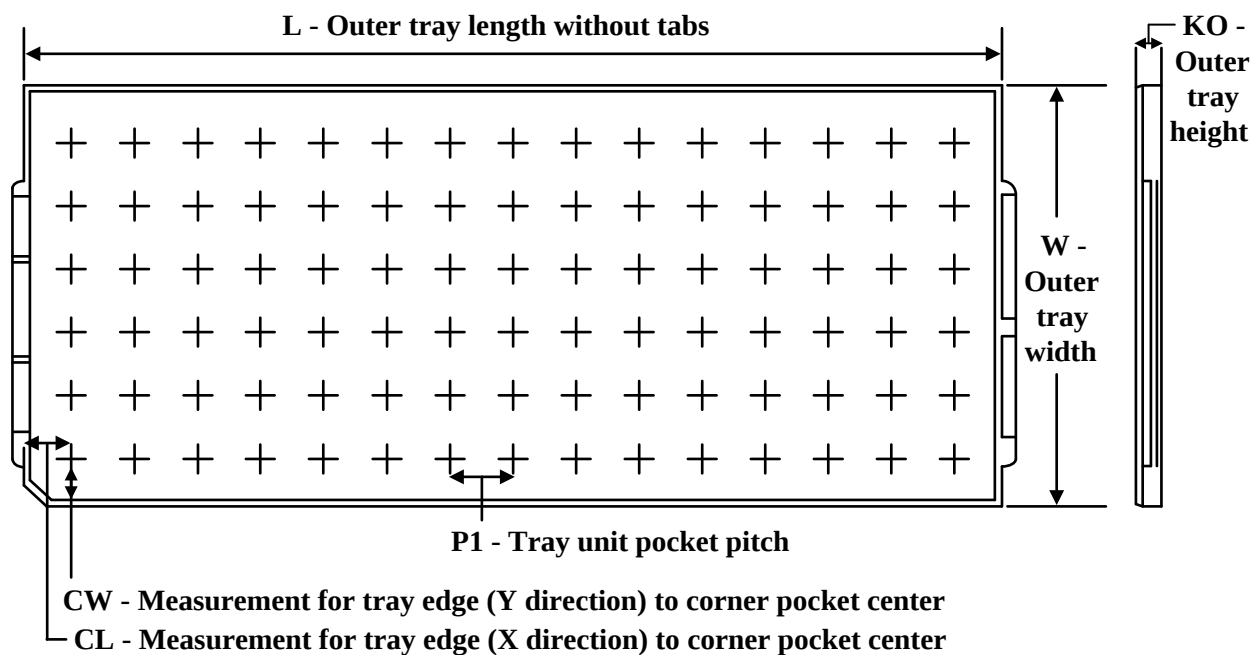

Chamfer on Tray corner indicates Pin 1 orientation of packed units.

\*All dimensions are nominal


| Device           | Package Name | Package Type | Pins | SPQ | Unit array matrix | Max temperature (°C) | L (mm) | W (mm) | K0 (μm) | P1 (mm) | CL (mm) | CW (mm) |
|------------------|--------------|--------------|------|-----|-------------------|----------------------|--------|--------|---------|---------|---------|---------|
| ADS54J60IRMP     | RMP          | VQFNP        | 72   | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| ADS54J60IRMP.A   | RMP          | VQFNP        | 72   | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| ADS54J60IRMPG4   | RMP          | VQFNP        | 72   | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |
| ADS54J60IRMPG4.A | RMP          | VQFNP        | 72   | 168 | 8 X 21            | 150                  | 315    | 135.9  | 7620    | 14.65   | 11      | 11.95   |

## PACKAGE OUTLINE

**RMP0072A**

### VQFN - 0.9 mm max height

VQFN

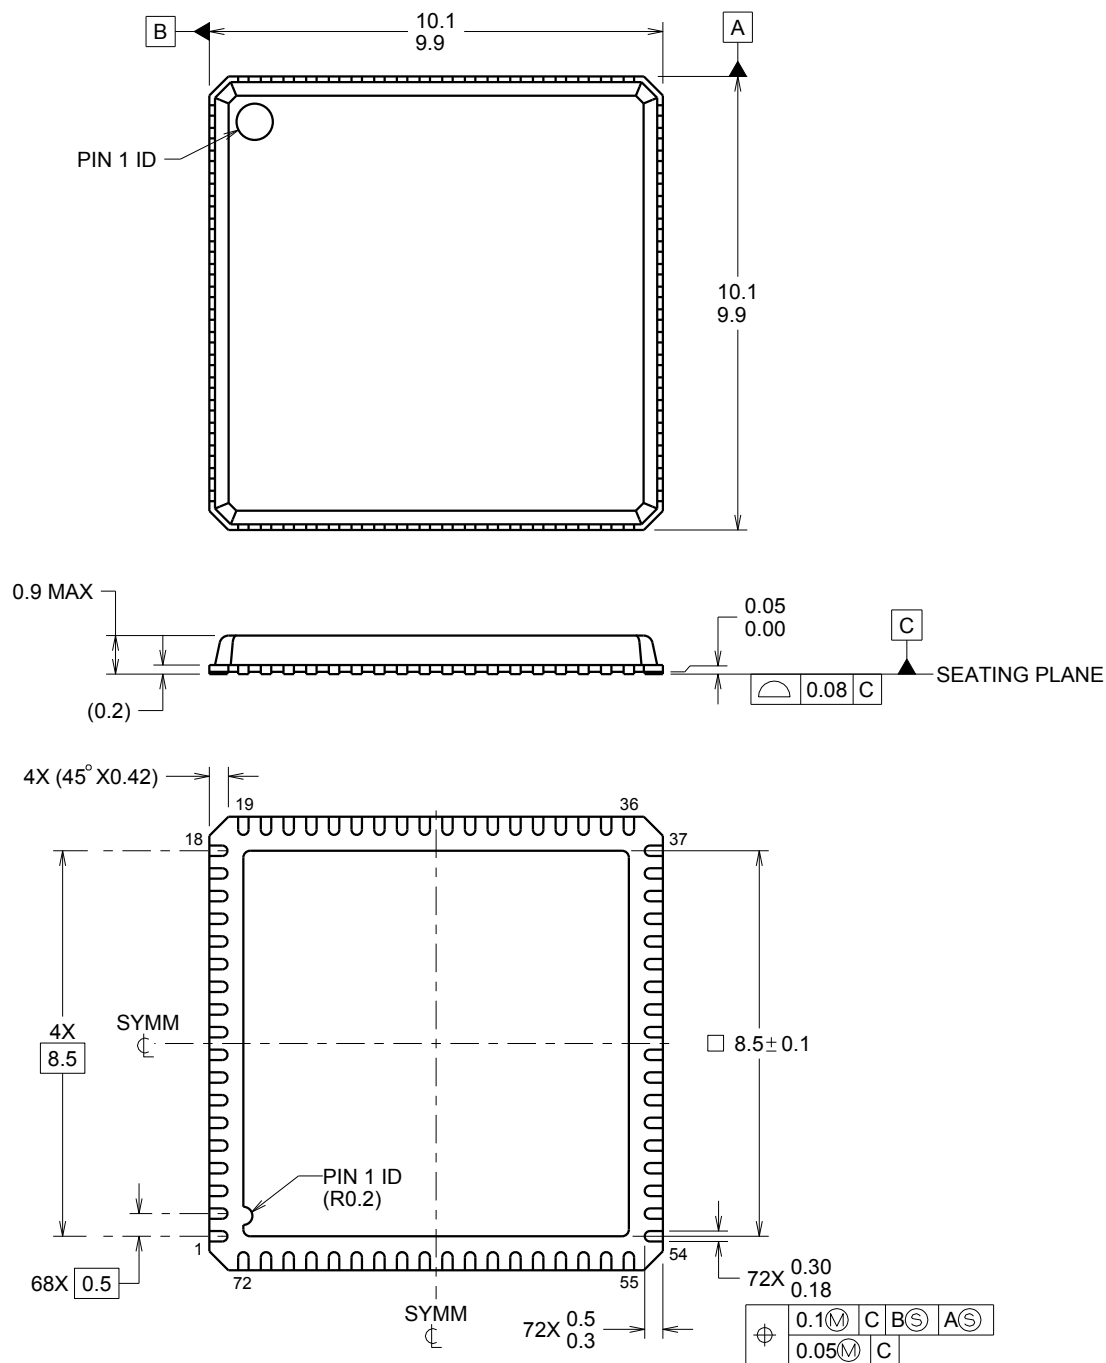

4221047/B 02/2014

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


RMP0072A

VQFN - 0.9 mm max height

VQFN

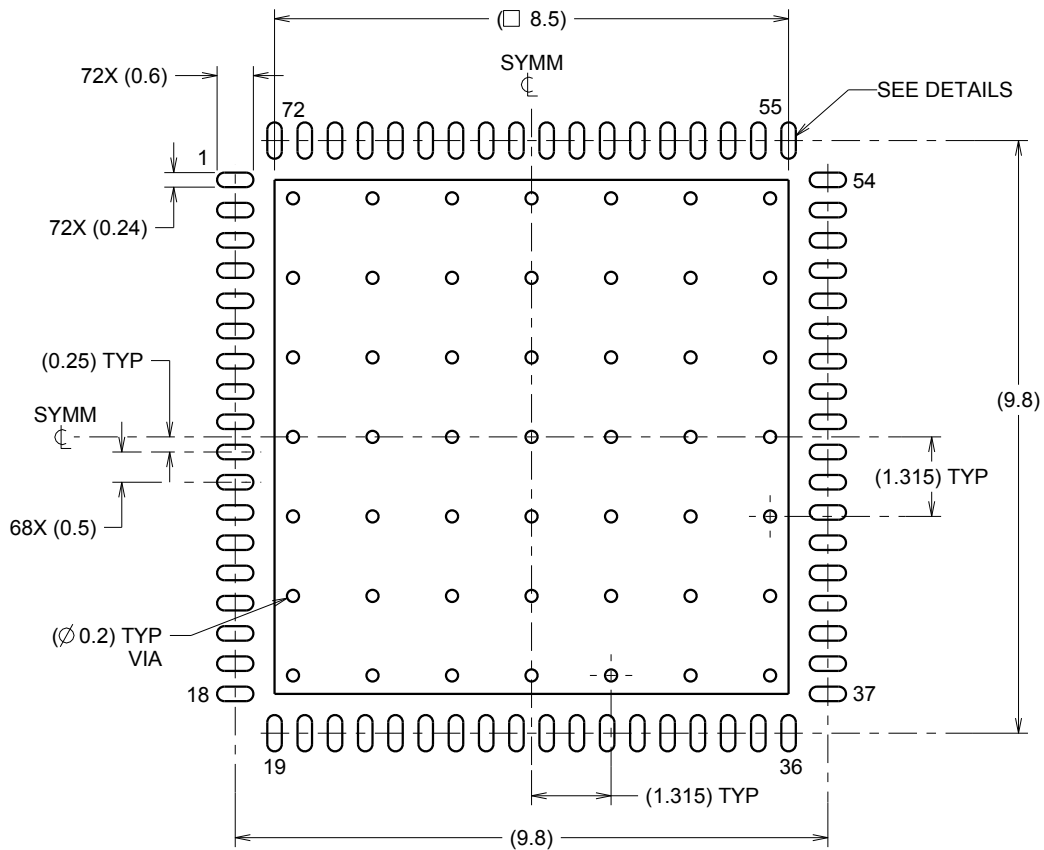

LAND PATTERN EXAMPLE  
SCALE:8X

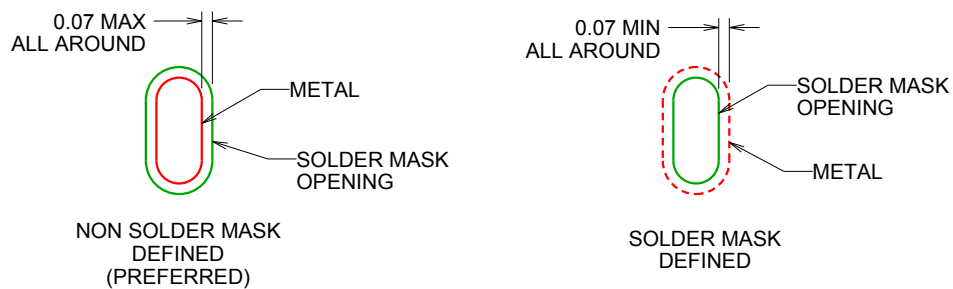

SOLDER MASK DETAILS

4221047/B 02/2014

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see QFN/SON PCB application report in literature No. SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).

# EXAMPLE STENCIL DESIGN

RMP0072A

VQFN - 0.9 mm max height

VQFN

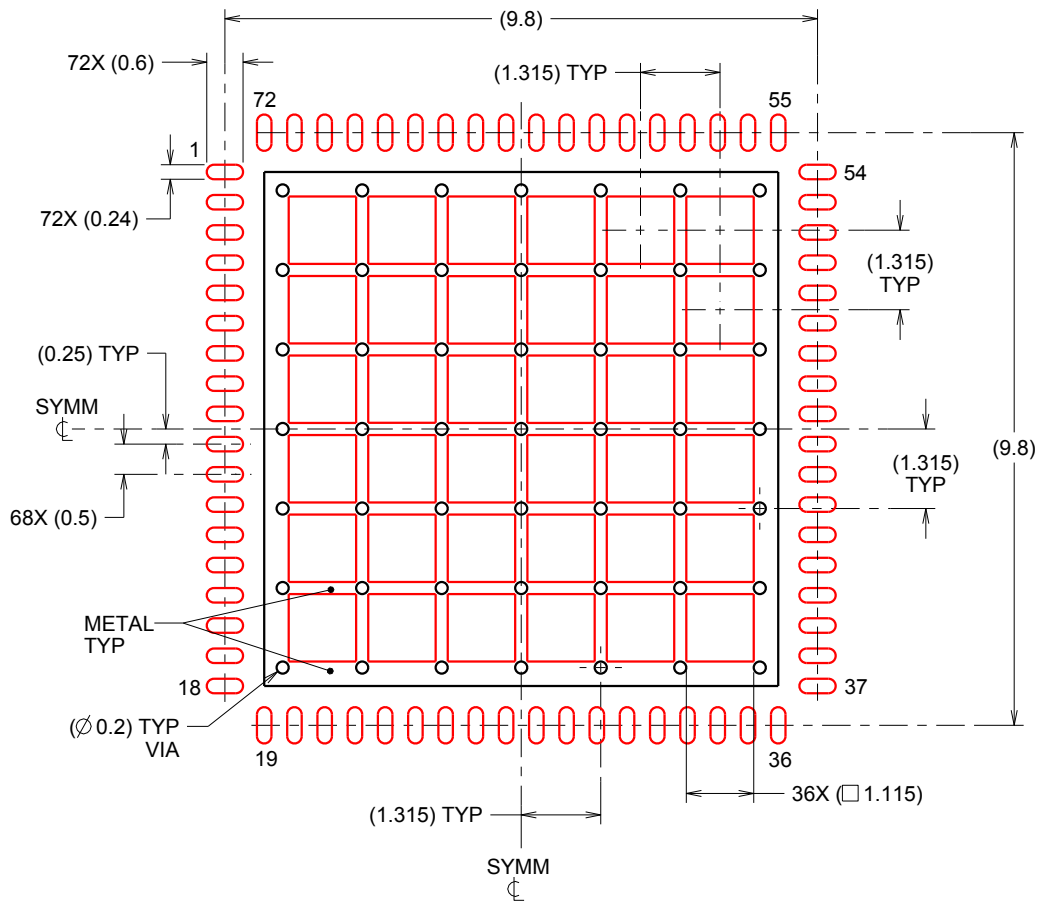

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
62% PRINTED SOLDER COVERAGE BY AREA  
SCALE:8X

4221047/B 02/2014

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated