

DACx0504 クワッド、16/14/12 ビット、内部リファレンス電圧搭載の SPI 電圧出力 DAC

1 特長

- 性能
 - INL: 16ビット分解能で最大値 ± 1 LSB
 - TUE: FSR最大値の $\pm 0.1\%$
- 2.5Vの高精度内部基準電圧を搭載
 - 初期精度: ± 5 mV (最大値)
 - 低ドリフト: 2ppm/°C (標準値)
- 高い駆動能力: 電源レールから0.5Vで20mA
- 柔軟な出力構成
 - ユーザーがゲインを選択可能: 2、1、 $\frac{1}{2}$
 - ゼロ・スケールまたは中間スケールにリセット
- 広い動作範囲
 - 電源: 2.7V~5.5V
 - 温度: -40°C~125°C
- 50MHz、SPI互換のシリアル・インターフェイス
 - 4線式モード、1.7V~5.5V動作
 - デイジー・チェーン動作
 - CRCエラー・チェック
- 低消費電力: 5.5Vで0.7mA/チャンネル
- 小型のパッケージ: 3mm×3mm、16ピンのWQFN

2 アプリケーション

- 光学ネットワーク機器
- ワイヤレス・インフラ
- 産業用オートメーション
- データ収集システム

3 概要

DAC80504、DAC70504、DAC60504 (DACx0504) は、16、14、12 ビット分解能の低消費電力、4 チャンネル、バッファ付き電圧出力のデジタル/アナログ・コンバータ (DAC) のピン互換ファミリです。DACx0504には、低ドリフト、2.5Vの内部基準電圧が搭載されており、ほとんどのアプリケーションでは外付けの高精度基準電圧が不要になります。ユーザーがゲイン構成を選択可能で、フルスケールの出力電圧は 1.25V (ゲイン = $\frac{1}{2}$)、2.5V (ゲイン = 1)、または 5V (ゲイン = 2) です。これらのデバイスは 2.7V~5.5V の単電源で動作し、単調性が規定されており、 ± 1 LSB INL の高い線形性を実現します。

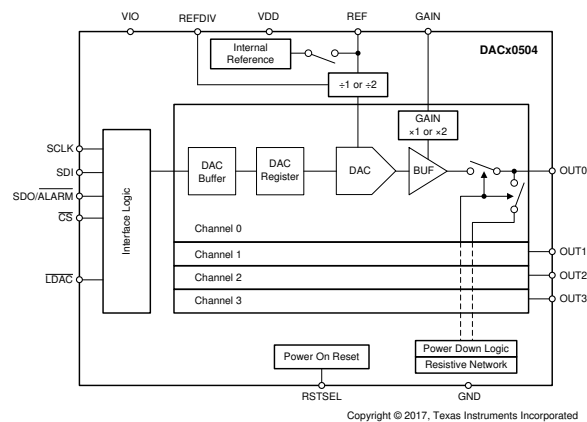
DACx0504との通信は、4線式のシリアル・インターフェイスで行われ、最大50MHzのクロック速度で動作します。VIOピンにより、1.7V~5.5Vのシリアル・インターフェイス動作が可能です。DACx0504の柔軟なインターフェイスにより、広い範囲の業界標準マイクロプロセッサやマイクロコントローラと動作可能です。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ(公称)
DACx0504	WQFN (16)	3.00mm×3.00mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にあるパッケージ・オプションについての付録を参照してください。

ブロック概略図



目次

1	特長	1	9.4	Device Functional Modes.....	26
2	アプリケーション	1	9.5	Programming.....	29
3	概要	1	9.6	Register Map.....	31
4	改訂履歴	2	10	Application and Implementation	37
5	概要 (続き)	4	10.1	Application Information.....	37
6	Device Comparison Table	5	10.2	Typical Application	39
7	Pin Configuration and Functions	6	11	Power Supply Recommendations	41
8	Specifications	7	12	Layout	41
8.1	Absolute Maximum Ratings	7	12.1	Layout Guidelines	41
8.2	ESD Ratings.....	7	12.2	Layout Example	41
8.3	Recommended Operating Conditions.....	7	13	デバイスおよびドキュメントのサポート	42
8.4	Thermal Information	8	13.1	ドキュメントのサポート	42
8.5	Electrical Characteristics.....	8	13.2	関連リンク	42
8.6	Typical Characteristics	11	13.3	ドキュメントの更新通知を受け取る方法.....	42
9	Detailed Description	21	13.4	コミュニティ・リソース	42
9.1	Overview	21	13.5	商標	42
9.2	Functional Block Diagram	21	13.6	静電気放電に関する注意事項	42
9.3	Feature Description.....	22	13.7	Glossary	42
			14	メカニカル、パッケージ、および注文情報	42

4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Revision B (September 2018) から Revision C に変更	Page
• データシートに DAC60504 デバイスを追加	4
• Changed TUE values for DAC70504 in Electrical Characteristics	8
• Changed Full-scale error values for DAC70504 in Electrical Characteristics	8
• Changed Gain error values for DAC70504 in Electrical Characteristics	8
• Changed channel-to-channel dc crosstalk values for DAC70504 in Electrical Characteristics	9
• Changed reference output drift values for DAC70504 in Electrical Characteristics	10
• Changed reference thermal hysteresis values for DAC70504 in Electrical Characteristics	10
• Deleted Figure 58, DAC70504 Solder Heat Reflow Reference Voltage Shift.....	24
• Changed reset value for VERSIONID from 10 to 11 in Table 10, DEVICE ID Field Descriptions	32

Revision A (December 2017) から Revision B に変更	Page
• 「製品情報」からDAC80504の製品プレビューを削除	1
• 「特長」の TUE を $\pm 0.14\%$ から $\pm 0.1\%$ に変更.....	4
• DAC80504 を追加、「特長」の低ドリフトを 5ppm/°Cから 2ppm/°Cに変更.....	4
• Deleted Product Preview for DAC80504 from <i>Device Comparison Table</i>	5
• Added Added TUE DAC80504. All Gains row in Electrical Characteristics	8
• Added Added Full-scale error DAC80504. All Gains row in Electrical Characteristics	8
• Added Added Gain error DAC80504. All Gains row in Electrical Characteristics	8
• Changed Short circuit current, DAC code = full scale, output shorted to GND in Electrical Characteristics TYP from 35 mA to 30 mA	9
• Changed Short circuit current, DAC code = zero scale, output shorted to V _{DD} in Electrical Characteristics TYP from 30 mA to 35 mA	9
• Added Channel-to channel dc crosstalk, Measured channel at midscale. Adjacent channel at full scale. DAC80504 in Electrical Characteristics	9

• Added Channel-to-channel crosstalk, Measured channel at midscale. All other channels at full scale. DAC80504 in Electrical Characteristics	9
• Added Added Reference output drift, DAC80504 in Electrical Characteristics	10
• Added Reference thermal hysteresis, DAC80504. First cycle in Electrical Characteristics	10
• Changed some graphs in Typical Characteristics	11
• Added Figure 59, Solder Heat Reflow Reference Voltage Shift.....	24
• Added t_{LDACS} and t_{LDACH} to Table 7	29
• Added 010 (12-bit) to D14:12 Description in Table 10	32

2017年8月発行のものから更新
Page

• 事前情報から混在ステータスに 変更	4
---------------------------	---

5 概要（続き）


DACx0504 にはパワー・オン・リセット回路が組み込まれており、DAC をパワー・オンしてから、デバイスへ有効なコードが書き込まれるまで DAC 出力をゼロ・スケールまたは中間スケールに維持します。これらのデバイスの消費電流は 5.5V 時に 0.7mA/チャンネルと低いため、バッテリー動作の機器に適した選択肢です。チャンネルごとのパワーダウン機能により、デバイスの消費電流は 15 μ A に低下します。

DACx0504 は -40 $^{\circ}$ C $\sim$ +125 $^{\circ}$ C の温度範囲で動作が規定されており、小型の 3mm $\times$ 3mm QFN パッケージで供給されます。

6 Device Comparison Table

DEVICE	RESOLUTION	REFERENCE
DAC80504	16-Bit	Internal (default) or External
DAC70504	14-Bit	Internal (default) or External
DAC60504	12-Bit	Internal (default) or External

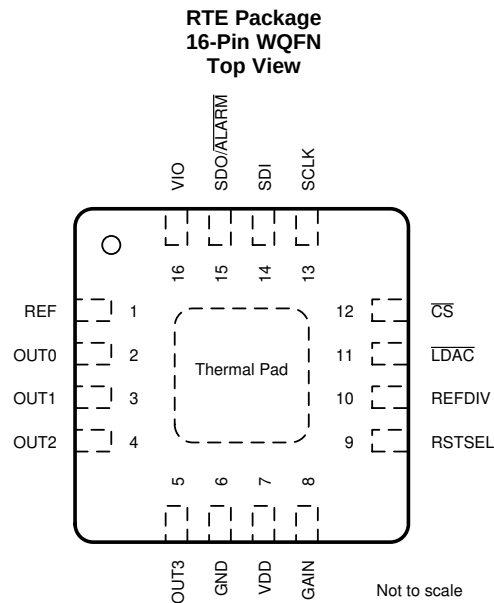7 Pin Configuration and Functions



Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
REF	1	I/O	When using internal reference, this is the reference output voltage pin (default). When using an external reference, this is the reference input pin to the device.
OUT0	2	O	Analog output voltage from DAC 0.
OUT1	3	O	Analog output voltage from DAC 1.
OUT2	4	O	Analog output voltage from DAC 2.
OUT3	5	O	Analog output voltage from DAC 3.
GND	6	GND	Ground reference point for all circuitry on the device.
VDD	7	PWR	Analog supply voltage (2.7 V to 5.5 V).
GAIN	8	I	Sets the gain configuration after a power-up or reset event. When tied to GND, the initial buffer amplifier gain for all four channels is set to 1. When tied to V _{IO} the initial buffer amplifier gain is 2. Changing the state of this pin after power-up does not affect the device operation.
RSTSEL	9	I	Reset select pin. When tied to GND all four DACs reset to zero scale. When connected to V _{IO} all four DACs reset to midscale.
REFDIV	10	I	Sets the reference divider configuration after a power-up or reset event. When tied to GND, the reference voltage is not divided down. When tied to V _{IO} the reference voltage is divided by 2. Changing the state of this pin after power-up does not affect the device operation.
LDAC	11	I	A high-to-low transition on the LDAC pin causes the DAC outputs of those channels configured in synchronous mode to update simultaneously. The pin can be tied permanently to GND.
CS	12	I	Active low serial data enable. This input is the frame synchronization signal for the serial data. When the signal goes low, it enables the serial interface input shift register.
SCLK	13	I	Serial interface clock.
SDI	14	I	Serial interface data input. Data are clocked into the input shift register on each falling edge of the SCLK pin.
SDO/ALARM	15	O	Serial interface data output (default). The SDO pin is in high impedance when CS pin is high. Data are clocked out of the input shift register on either rising or falling edges of the SCLK pin as specified by the FSDO bit. Alternatively the pin can be configured as an ALARM open-drain output to indicate a CRC or reference alarm event. If configured as ALARM a 10 kΩ, pull-up resistor to V _{IO} is required.
VIO	16	PWR	IO supply voltage (1.7 V to 5.5 V). This pin sets the I/O operating voltage for the serial interface.
Thermal Pad	–	–	The thermal pad is located on the bottom-side of the QFN package. The thermal pad should be connected to any internal PCB ground plane using multiple vias for good thermal performance.

8 Specifications

8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
Supply voltage	V _{DD} to GND	–0.3	6	V
	V _{IO} to GND	–0.3	6	
Pin voltage	DAC outputs to GND	–0.3	V _{DD} + 0.3	V
	REF to GND	–0.3	V _{DD} + 0.3	
	Digital pins to GND	–0.3	V _{IO} + 0.3	
Input current	Input current to any pin except supply pins	–10	10	mA
Temperature	Operating free-air, T _A	–40	125	°C
	Junction, T _J	–40	150	
	Storage, T _{stg}	–60	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

8.2 ESD Ratings

		VALUE	UNIT
V _(ESD) Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±3000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	±1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
POWER SUPPLY						
V _{DD}	Analog supply voltage		2.7		5.5	V
V _{IO}	IO supply voltage		1.7		5.5	
DIGITAL INPUTS						
Digital input voltage			0		V _{IO}	V
REFERENCE INPUT						
V _{REFIN}	V _{DD} = 2.7 V to 3.3 V	Reference divider disabled	1.2		(V _{DD} – 0.2)/2	V
		Reference divider enabled	2.4		V _{DD} – 0.2	
	V _{DD} = 3.3 V to 5.5 V	Reference divider disabled	1.2		V _{DD} /2	
		Reference divider enabled	2.4		V _{DD}	
TEMPERATURE						
T _A	Operating free-air temperature		–40		125	°C

8.4 Thermal Information

THERMAL METRIC ⁽¹⁾		DACx0504	UNIT
		RTE (WQFN)	
		16 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	33.3	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	29.5	°C/W
R _{θJB}	Junction-to-board thermal resistance	7.3	°C/W
ψ _{JT}	Junction-to-top characterization parameter	0.2	°C/W
ψ _{JB}	Junction-to-board characterization parameter	7.4	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	0.9	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

8.5 Electrical Characteristics

all minimum and maximum specifications at V_{DD} = 2.7 V to 5.5 V, V_{IO} = 1.7 V to 5.5 V, V_{REFIN} = 1.25 V to 5.5 V, R_{LOAD} = 2 kΩ to GND, C_{LOAD} = 200 pF to GND, digital inputs at V_{IO} or GND, and T_A = –40°C to +125°C (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
STATIC PERFORMANCE⁽¹⁾					
Resolution	DAC80504	16			Bits
	DAC70504	14			
	DAC60504	12			
INL Integral nonlinearity	DAC80504		±0.5	±1	LSB
	DAC70504		±0.5	±1	
	DAC60504		±0.5	±1	
DNL Differential nonlinearity	DAC80504, specified 16-bit monotonic		±0.5	±1	LSB
	DAC70504, specified 14-bit monotonic		±0.5	±1	
	DAC60504, specified 12-bit monotonic		±0.5	±1	
TUE Total unadjusted error			±0.05	±0.1	%FSR
Offset error			±0.75	±1.5	mV
Zero-code error	DAC code = zero scale		0.5	1.5	mV
Full-scale error			±0.05	±0.1	%FSR
Gain error			±0.05	±0.1	%FSR
Offset error drift			±1		μV/°C
Zero-code error drift			±2		μV/°C
Full-scale error drift			±2		ppm of FSR/°C
Gain error drift			±1		ppm of FSR/°C
Output voltage drift over time	T _A = 25°C, DAC code = midscale, 1600 hours		20		ppm of FSR

- (1) Static performance specified with DAC outputs unloaded for all gain options, unless otherwise noted. End point fit between codes. 16-bit: Code 256 to 65280, 14-bit: Code 128 to 16127, 12-bit: Code 16 to 4031.

Electrical Characteristics (continued)

all minimum and maximum specifications at $V_{DD} = 2.7\text{ V to }5.5\text{ V}$, $V_{IO} = 1.7\text{ V to }5.5\text{ V}$, $V_{REFIN} = 1.25\text{ V to }5.5\text{ V}$, $R_{LOAD} = 2\text{ k}\Omega$ to GND, $C_{LOAD} = 200\text{ pF to GND}$, digital inputs at V_{IO} or GND, and $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
INTERNAL REFERENCE						
V _{REFOUT}	Reference output voltage	T _A = 25°C	2.495	2.5	2.505	V
	Reference output drift			2	5	ppm/°C
	Reference output impedance			0.1		Ω
	Reference output noise	0.1 Hz to 10 Hz		15		μV _{PP}
	Reference output noise density	10 kHz, REF _{LOAD} = 10 nF		130		nV/√Hz
	Reference load current			±5		mA
	Reference load regulation	Source and sink		100		μV/mA
	Reference line regulation			20		μV/V
	Reference output drift over time	T _A = 25°C, 1600 hours		4.8		ppm
	Reference thermal hysteresis	First cycle		50		ppm
		Additional cycle		18		
DIGITAL INPUTS						
V _{IH}	High-level input voltage		0.7 × V _{IO}			V
V _{IL}	Low-level input voltage		0.3 × V _{IO}			V
	Input current		±2			μA
	Input pin capacitance		2			pF
DIGITAL OUTPUTS						
V _{OH}	High-level output voltage	I _{LOAD} = 0.2 mA	V _{IO} – 0.4			V
V _{OL}	Low-level output voltage	I _{LOAD} = –0.2 mA	0.4			V
	Output pin capacitance		4			pF
POWER SUPPLY REQUIREMENTS						
I _{DD}	V _{DD} supply current	Active mode, internal reference enabled, gain = 1, DAC code = full scale, outputs unloaded, SPI static		2.8	3.6	mA
		Active mode, internal reference disabled, gain = 1, DAC code = full scale, outputs unloaded, SPI static		2.3	3	
			Power-down		15	
I _{IO}	V _{IO} supply current			2	3	μA

8.6 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V, gain = 2, DAC outputs unloaded (unless otherwise noted)

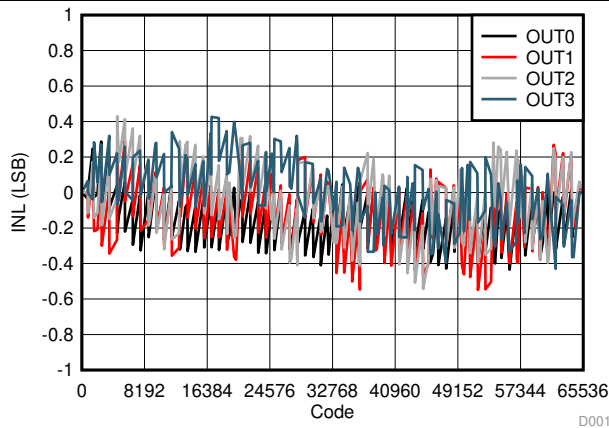


Figure 1. Integral Linearity Error vs Digital Input Code

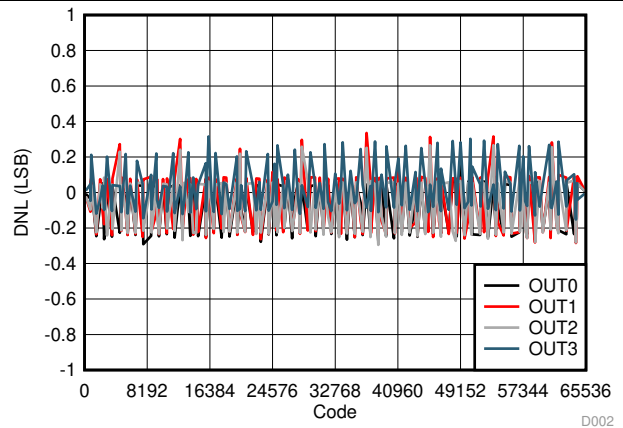


Figure 2. Differential Linearity Error vs Digital Input Code

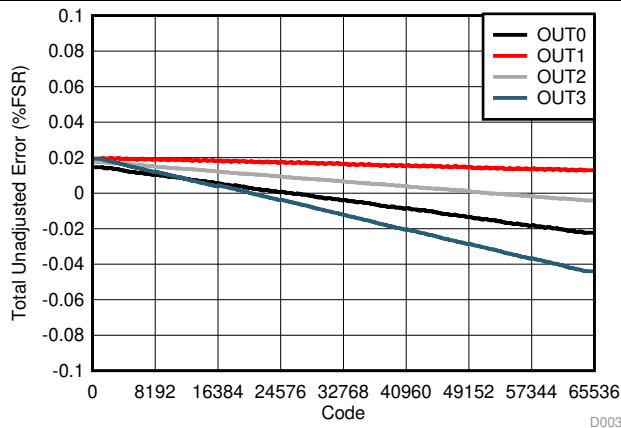


Figure 3. Total Unadjusted Error vs Digital Input Code

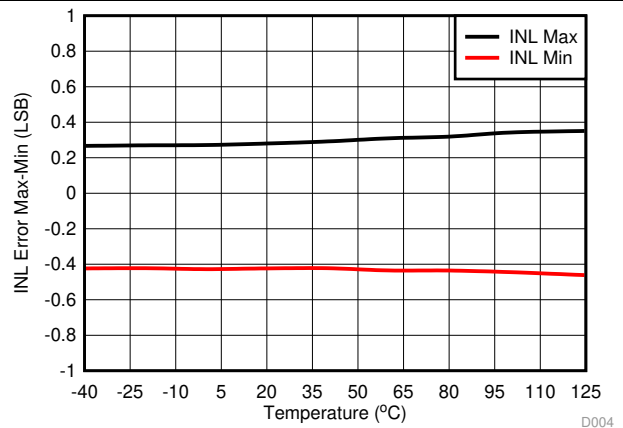


Figure 4. Integral Linearity Error vs Temperature

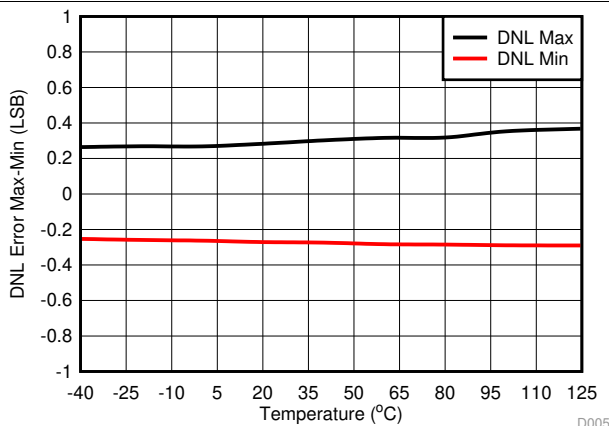


Figure 5. Differential Linearity Error vs Temperature

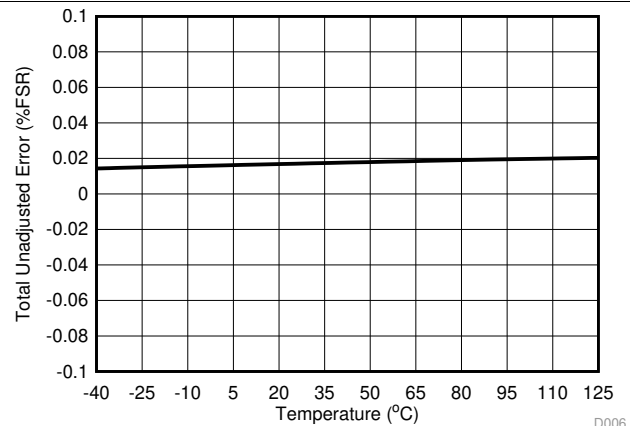


Figure 6. Total Unadjusted Error vs Temperature

Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V, gain = 2, DAC outputs unloaded (unless otherwise noted)

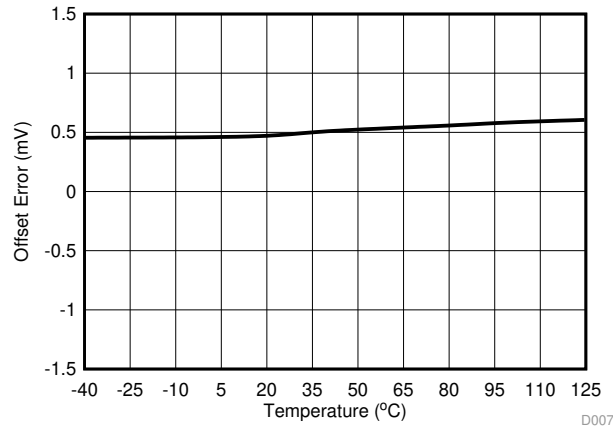


Figure 7. Offset Error vs Temperature

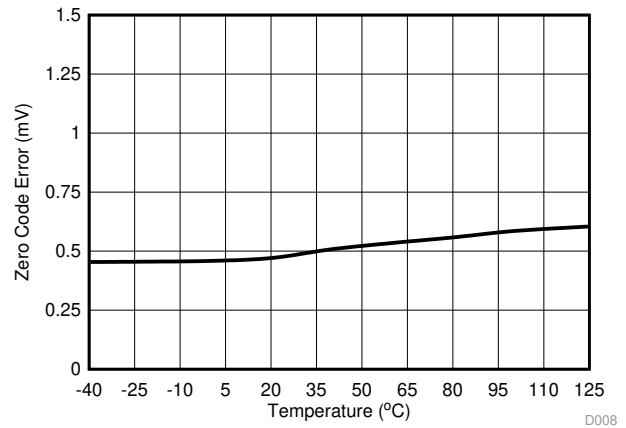


Figure 8. Zero Code Error vs Temperature

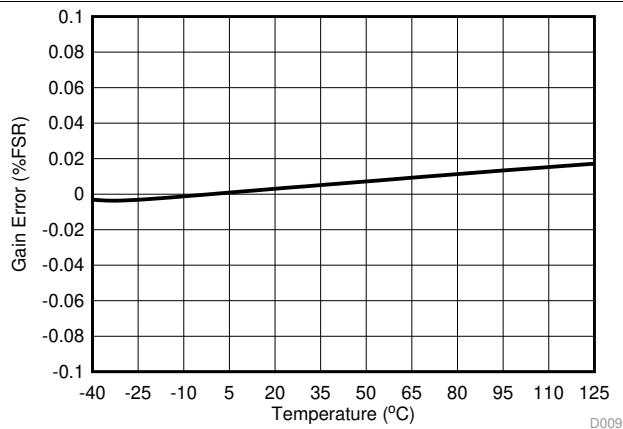


Figure 9. Gain Error vs Temperature



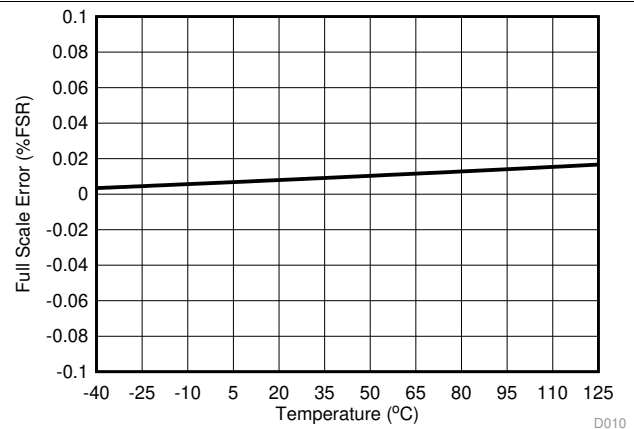


Figure 10. Full Scale Error vs Temperature

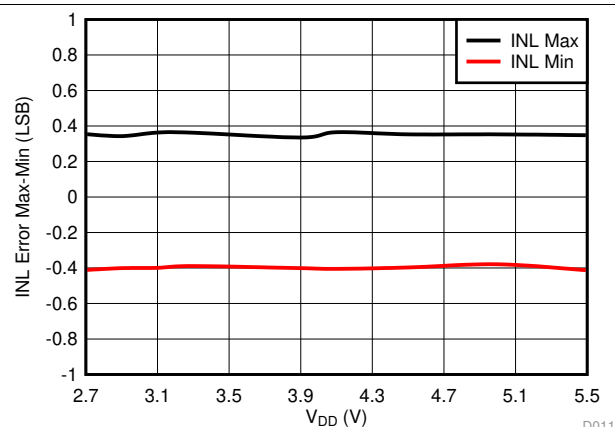

Gain = 1

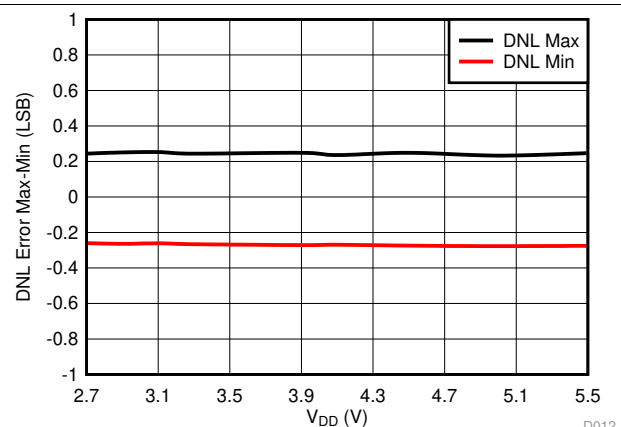Figure 11. Integral Linearity Error vs Supply Voltage




Gain = 1

Figure 12. Differential Linearity Error vs Supply Voltage


Typical Characteristics (continued)

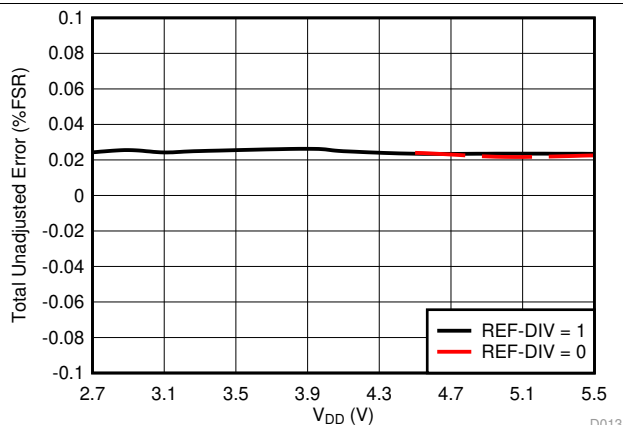at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)




Gain = 1

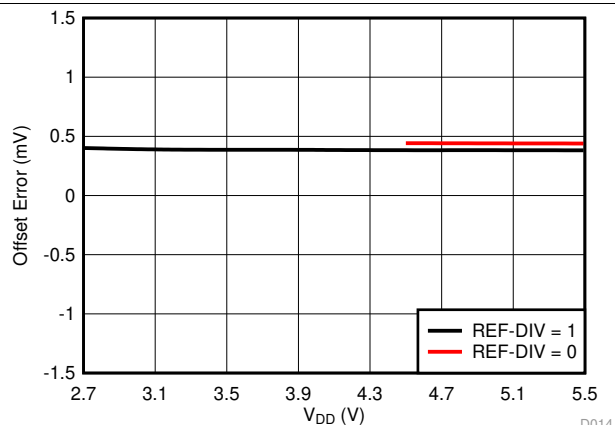Figure 13. Total Unadjusted Error vs Supply Voltage




Gain = 1

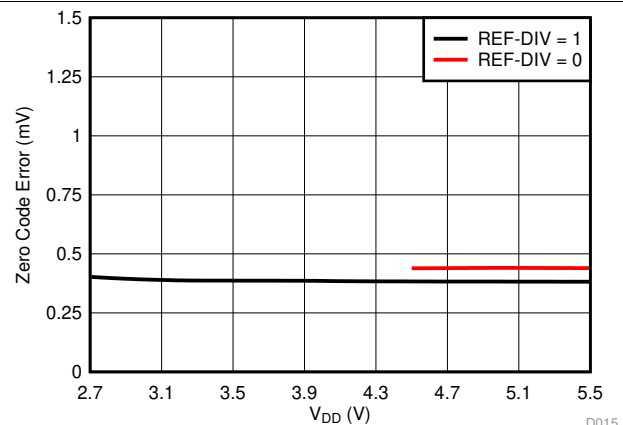Figure 14. Offset Error vs Supply Voltage




Gain = 1

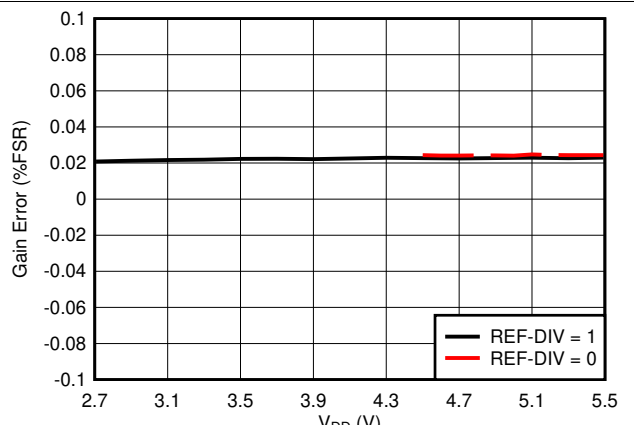Figure 15. Zero Code Error vs Supply Voltage




Gain = 1

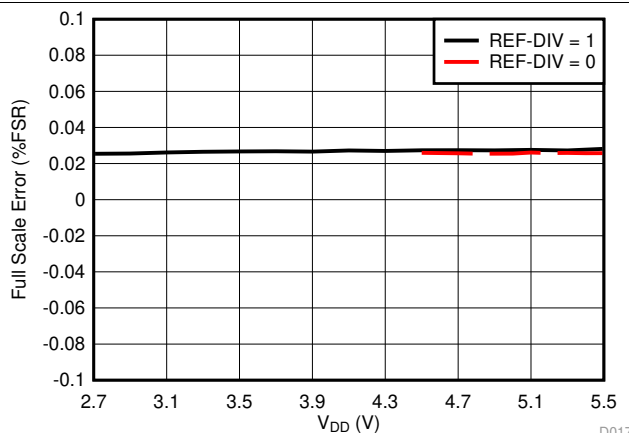Figure 16. Gain Error vs Supply Voltage



Gain = 1

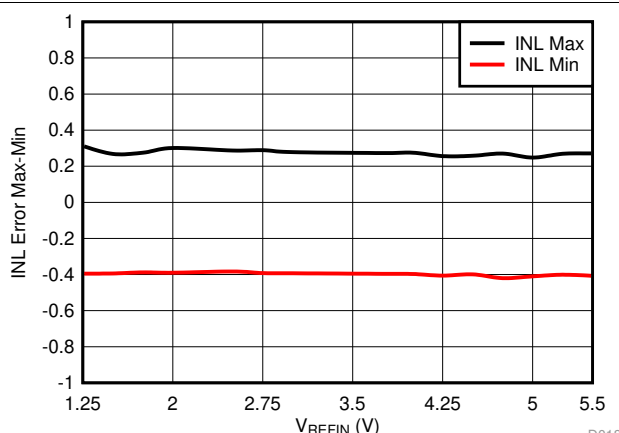Figure 17. Full Scale Error vs Supply Voltage




Gain = 1

Figure 18. Integral Linearity Error vs Reference Voltage


Typical Characteristics (continued)

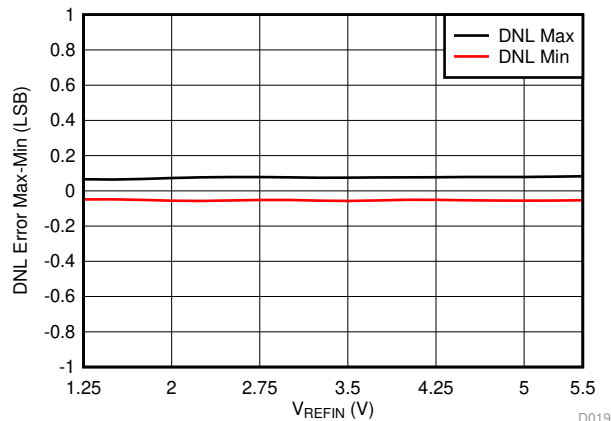at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)




Gain = 1

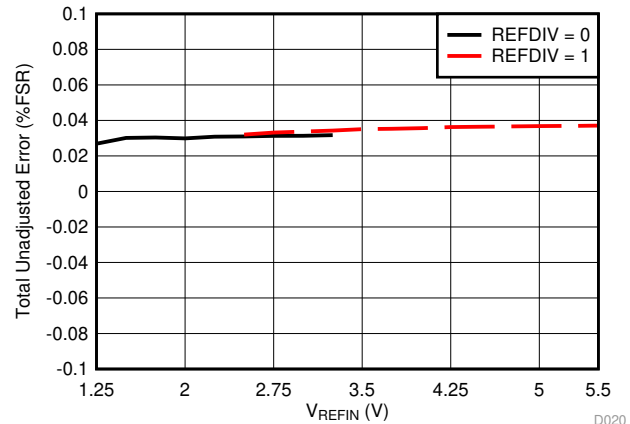Figure 19. Differential Linearity Error vs Reference Voltage




Gain = 1

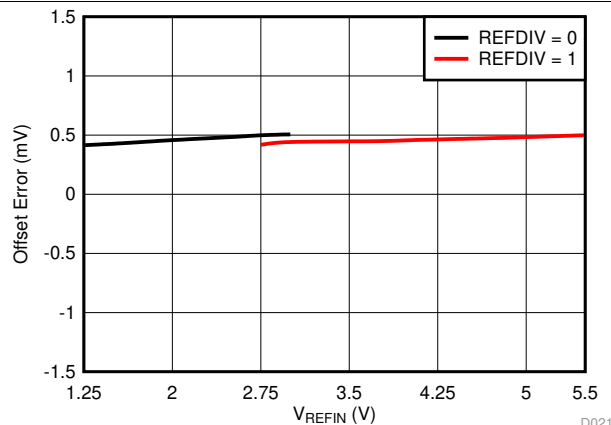Figure 20. Total Unadjusted Error vs Reference Voltage




Gain = 1

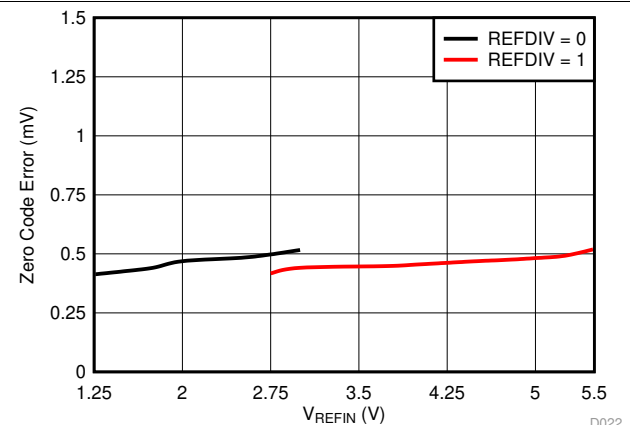Figure 21. Offset Error vs Reference Voltage




Gain = 1

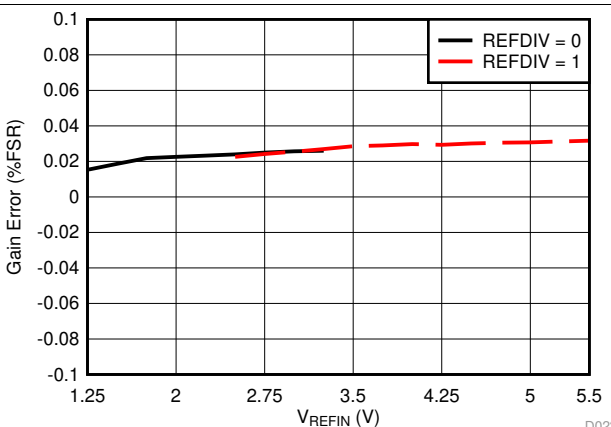Figure 22. Zero Code Error vs Reference Voltage



Gain = 1

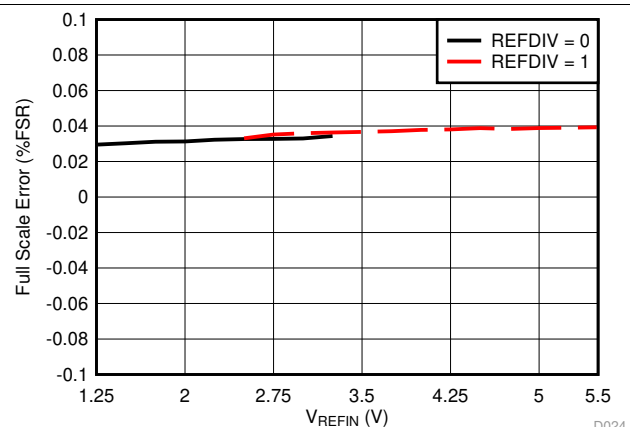Figure 23. Gain Error vs Reference Voltage



Gain = 1

Figure 24. Full Scale Error vs Reference Voltage

Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V, gain = 2, DAC outputs unloaded (unless otherwise noted)

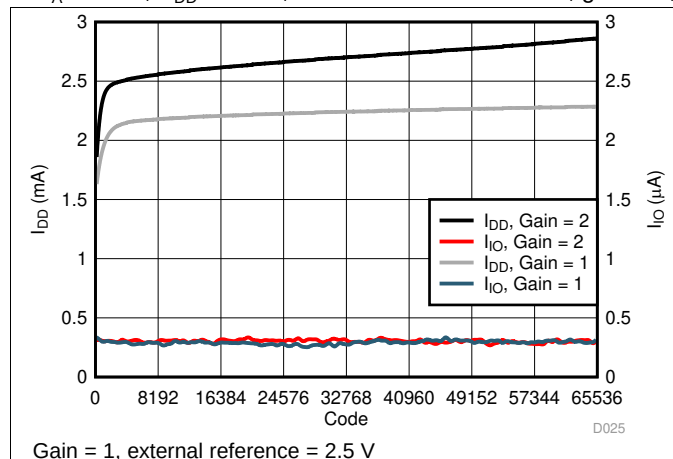


Figure 25. Supply Current With External Reference vs Digital Input Code

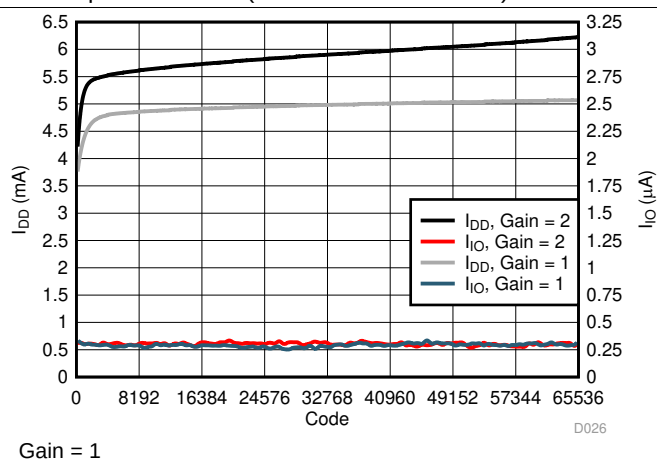


Figure 26. Supply Current With Internal Reference vs Digital Input Code

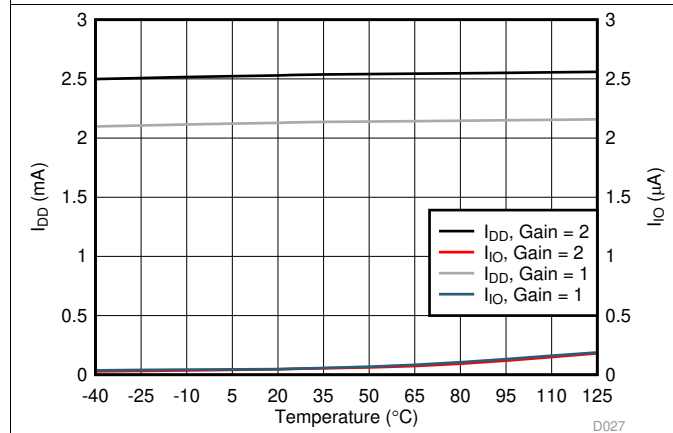


Figure 27. Supply Current With External Reference vs Temperature

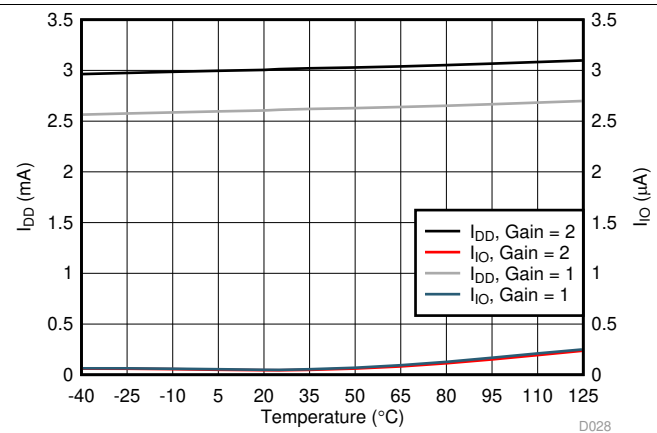


Figure 28. Supply Current With Internal Reference vs Temperature

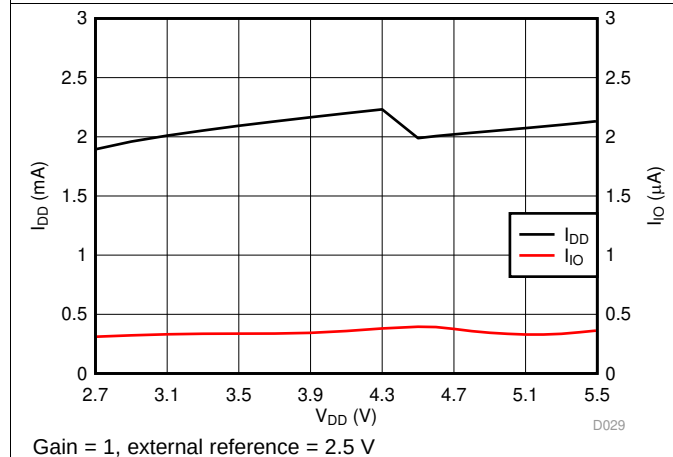


Figure 29. Supply Current With External Reference vs Supply Voltage

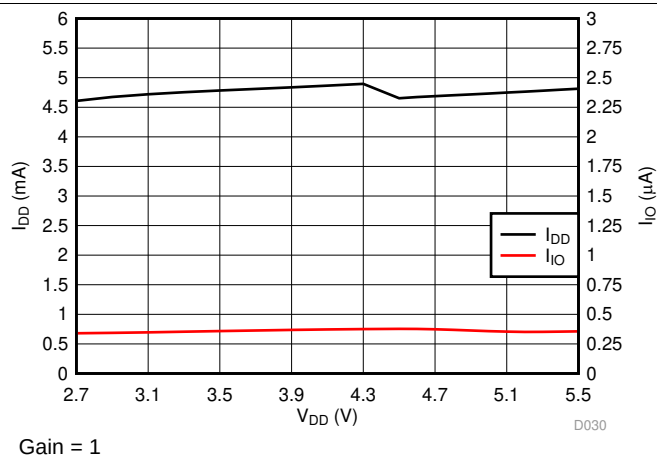


Figure 30. Supply Current With Internal Reference vs Supply Voltage

Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V, gain = 2, DAC outputs unloaded (unless otherwise noted)

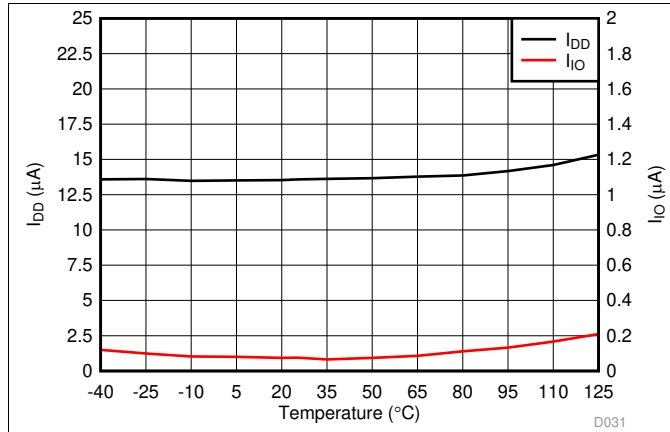


Figure 31. Supply Current and Input Current vs Temperature

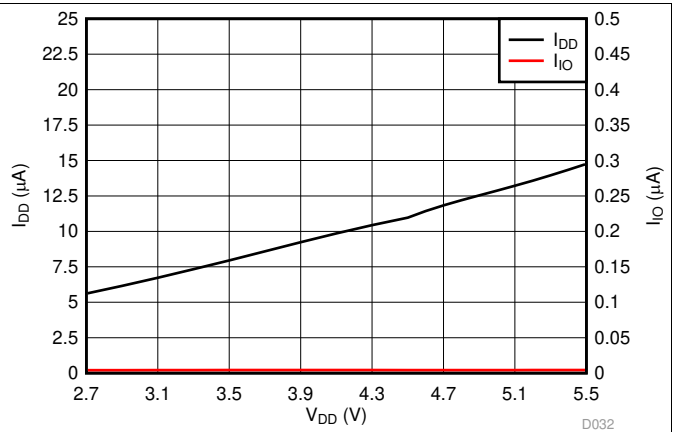


Figure 32. Supply Current and Input Current vs Supply Voltage

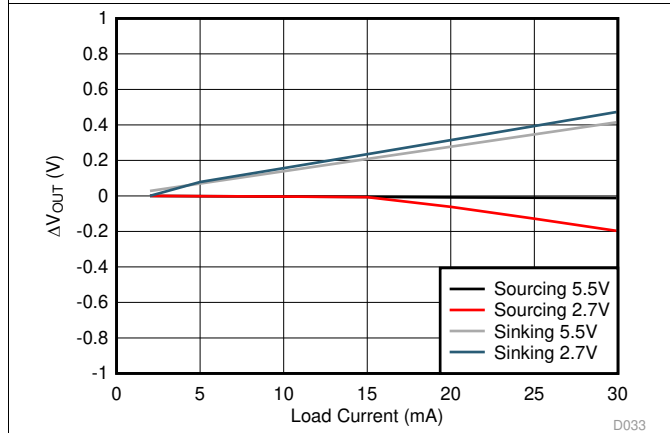


Figure 33. Headroom/Footroom vs Load Current

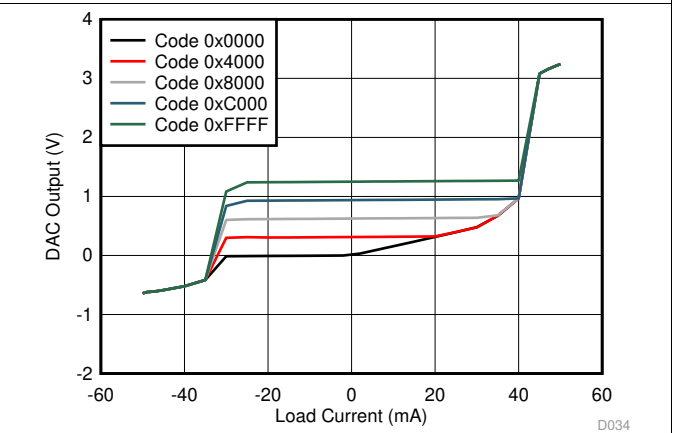


Figure 34. Source and Sink Capability With Gain = $\frac{1}{2}$

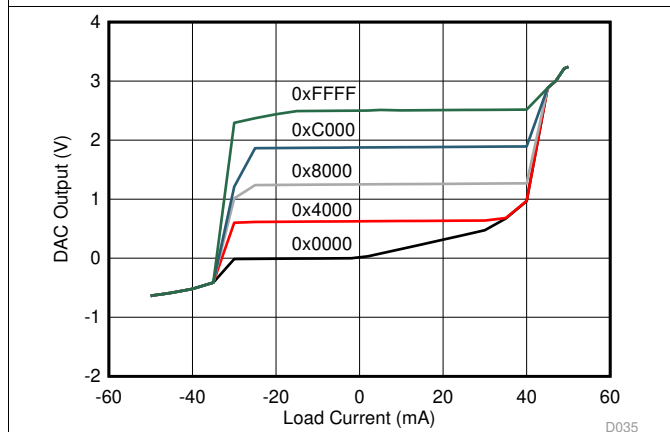


Figure 35. Source and Sink Capability With Gain = 1


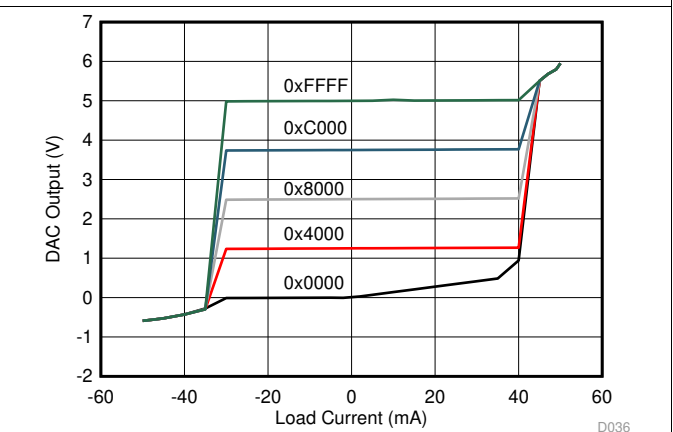


Figure 36. Source and Sink Capability With Gain = 2

Typical Characteristics (continued)

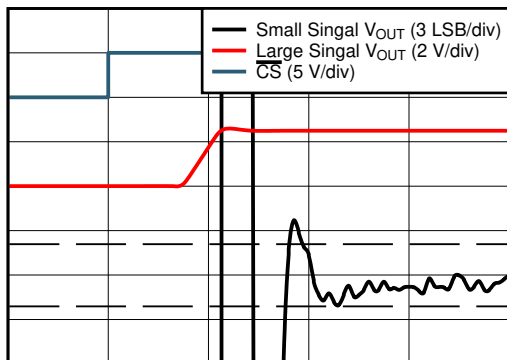at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)




Time (2 μsec/div)

D037

Gain = 1

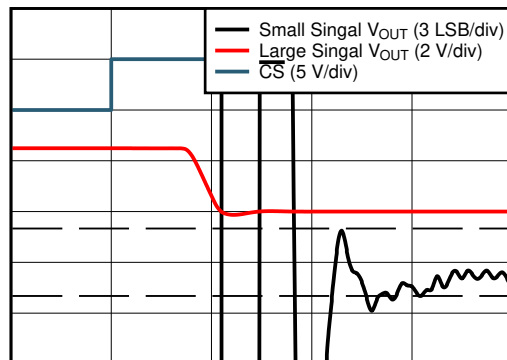Figure 37. Full-Scale Settling Time, Rising Edge




Time (2 μsec/div)

D038

Gain = 1

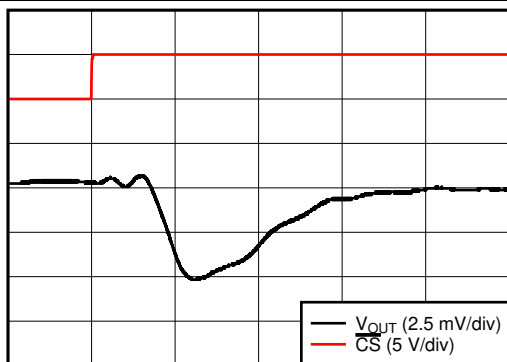Figure 38. Full-Scale Settling Time, Falling Edge




Time (0.5 μs/div)

D039

Gain = 1

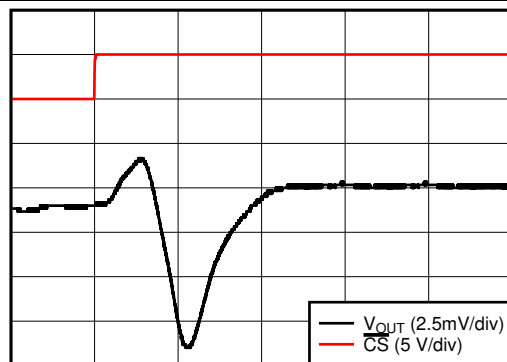Figure 39. Glitch Impulse, Falling Edge, 1 LSB Step




Time (0.5 μs/div)

D040

Gain = 1

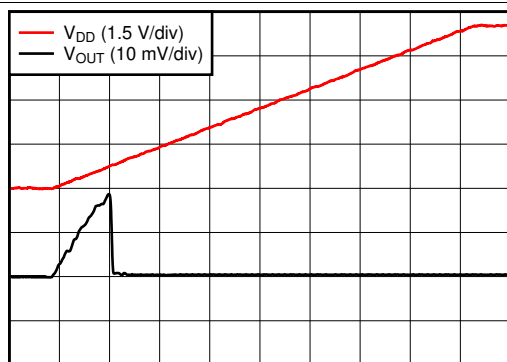Figure 40. Glitch Impulse, Rising Edge, 1 LSB Step




Time (600 μs/div)

D041

Gain = 1

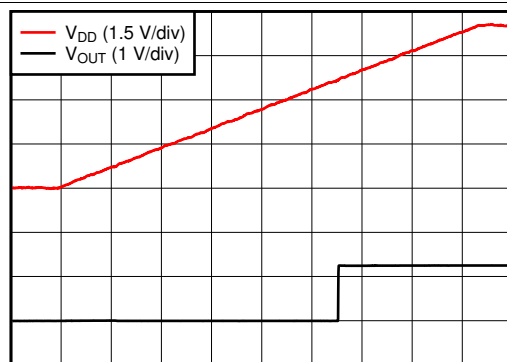Figure 41. Power-On, Reset to Zero Scale



Time (600 μs/div)


D042

Gain = 1

Figure 42. Power-On, Reset to Midscale

Typical Characteristics (continued)

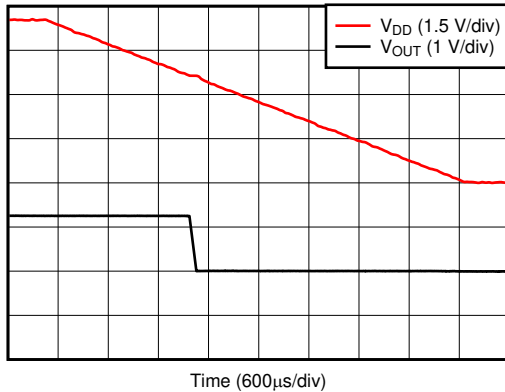
at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)



Gain = 1, DAC code at midscale

Figure 43. V_{DD} Power-Down

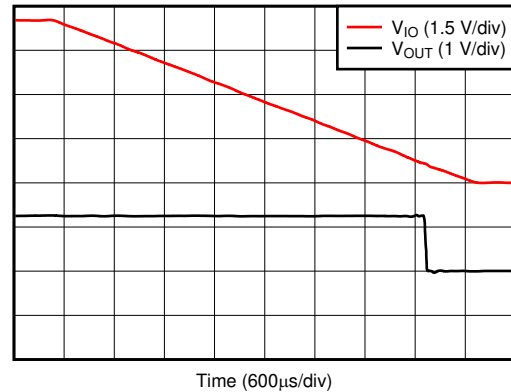
D044



Gain = 1, DAC code at midscale

Figure 44. V_{IO} Power-Down

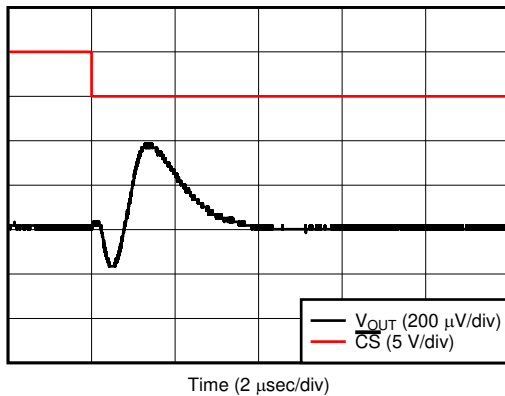
D060



Gain = 1, measured DAC at midscale,
all other DACs switch from code 32 to full scale

Figure 45. Channel to Channel Crosstalk

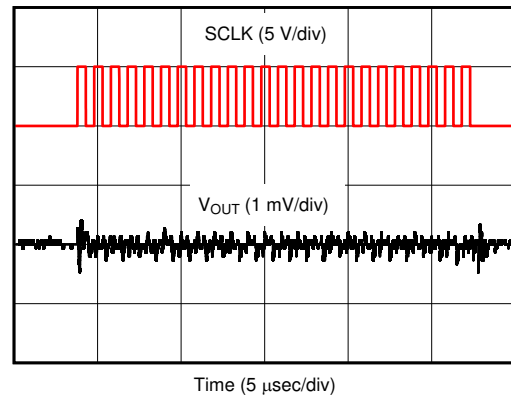
D045



Gain = 1, DAC code at midscale

Figure 46. Clock Feedthrough With SCLK = 1 MHz

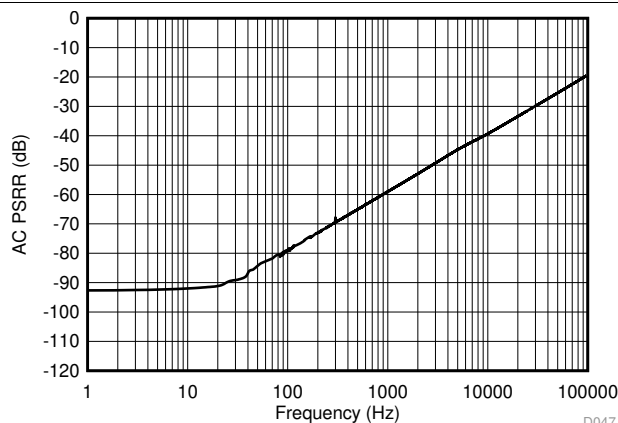
D046



Gain = 1, $V_{DD} = 5\text{ V} + 200\text{ mV}_{PP}$ (Sinusoid), DAC code at fullscale

Figure 47. DAC Output AC PSRR vs Frequency

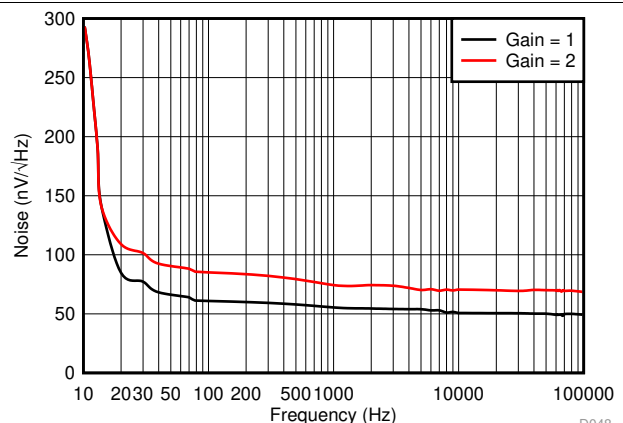D047




External reference = 2.5 V , DAC code at midscale

Figure 48. DAC Output Noise Density vs Frequency

D048

Typical Characteristics (continued)

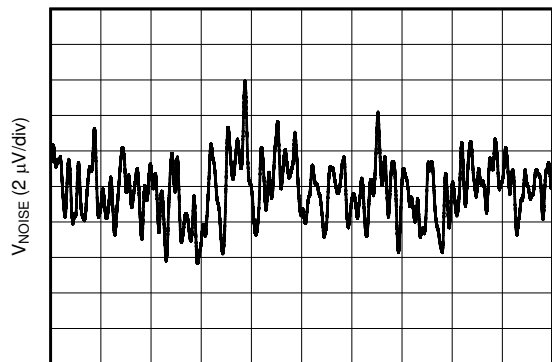
at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)



D049

Gain = 1, external reference = 2.5 V , DAC code at midscale

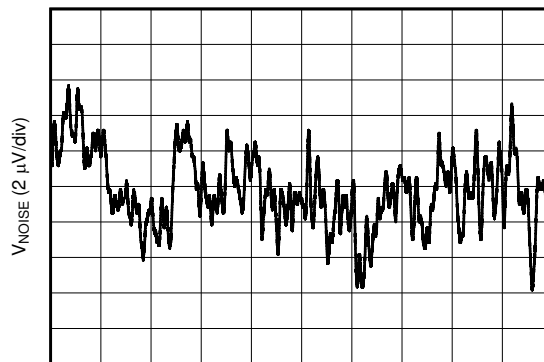
**Figure 49. DAC Output Noise With External Reference
0.1 Hz to 10 Hz**



D050


Gain = 1, DAC code at midscale

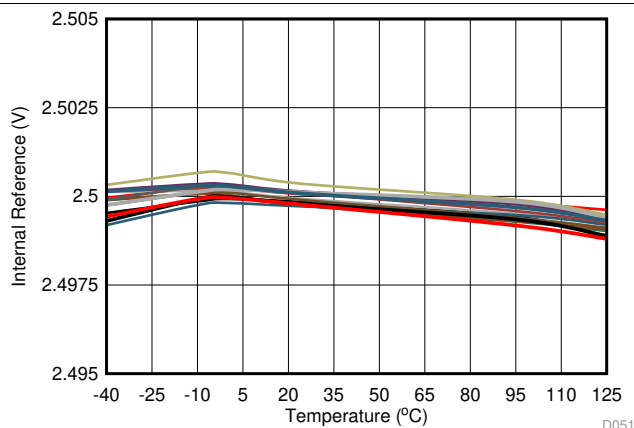**Figure 50. DAC Output Noise With Internal Reference
0.1 Hz to 10 Hz**




D051

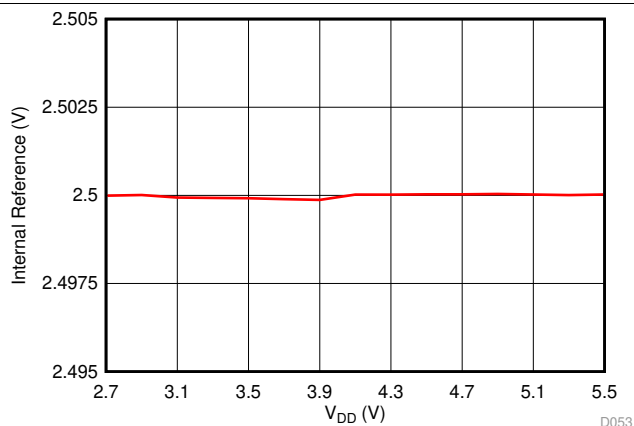Figure 51. Internal Reference Voltage vs Temperature




D053

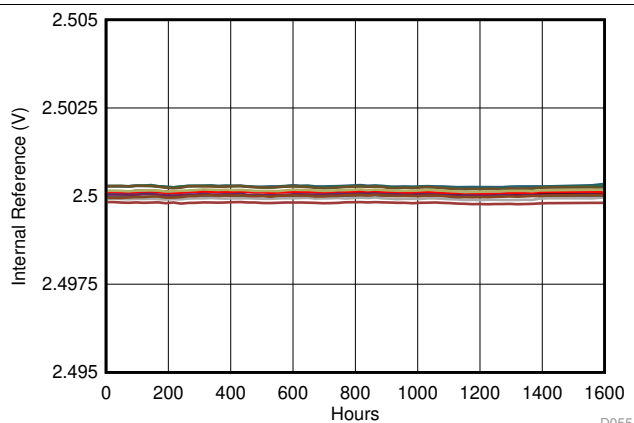Figure 52. Internal Reference Voltage vs Supply Voltage



D055

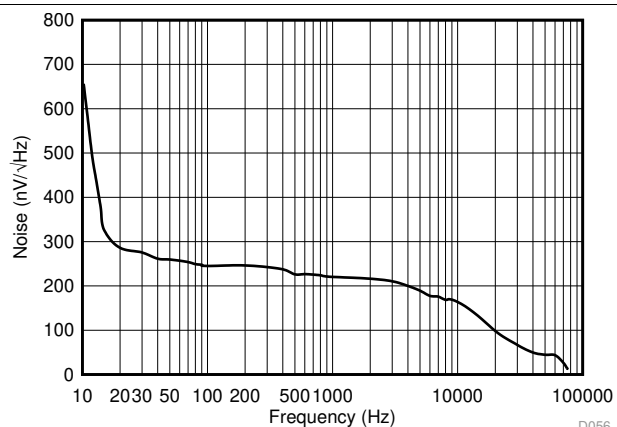Figure 53. Internal Reference Voltage vs Time




D056

Figure 54. Internal Reference Noise Density vs Frequency

Typical Characteristics (continued)

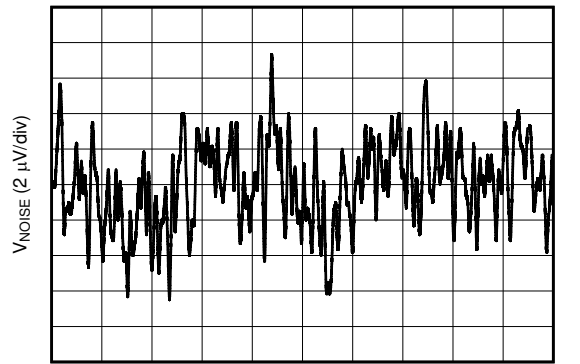
at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.5\text{ V}$, internal reference = 2.5 V , gain = 2, DAC outputs unloaded (unless otherwise noted)



0.1 Hz to 10 Hz

D057

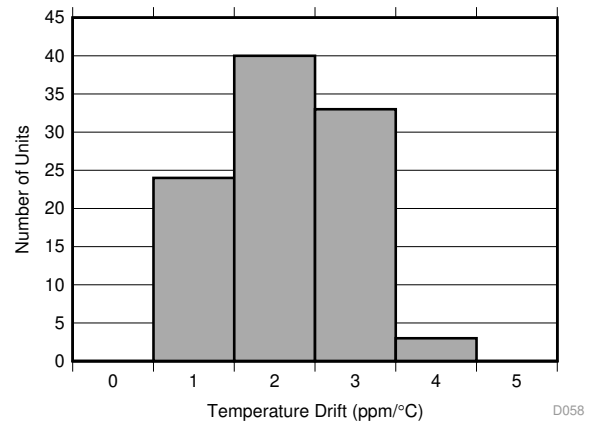Figure 55. Internal Reference Noise



D058

Figure 56. Internal Reference Temperature Drift Histogram

9 Detailed Description

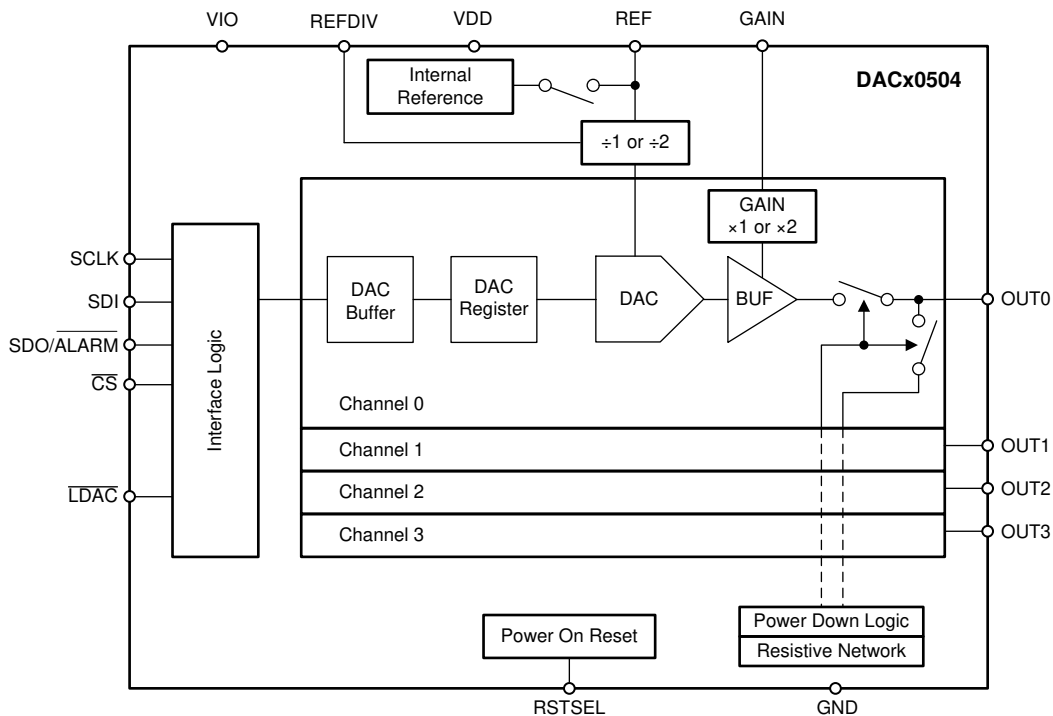
9.1 Overview

The DACx0504 is a pin-compatible family of low-power, four-channel, buffered voltage-output digital-to-analog converters (DACs) with 16-, 14-, and 12-bit resolution. The DACx0504 include a 2.5-V internal reference and user-selectable gain configuration, providing full-scale output voltages of 1.25 V (gain = $\frac{1}{2}$), 2.5 V (gain = 1), or 5 V (gain = 2). The device operates from a single 2.7 V to 5.5 V supply, is specified monotonic, and provides high linearity of ± 1 LSB INL.

Communication to the DACx0504 is performed through a 4-wire serial interface that supports stand-alone and daisy-chain operation. The optional frame-error checking provides added robustness to the DACx0504 serial interface.

The DACx0504 incorporates a power-on-reset circuit and RSTSEL pin that powers up and maintains the DAC outputs at either zero scale or midscale until a valid code is written to the device.

9.2 Functional Block Diagram




Copyright © 2017, Texas Instruments Incorporated

9.3 Feature Description

9.3.1 Digital-to-Analog Converter (DAC)

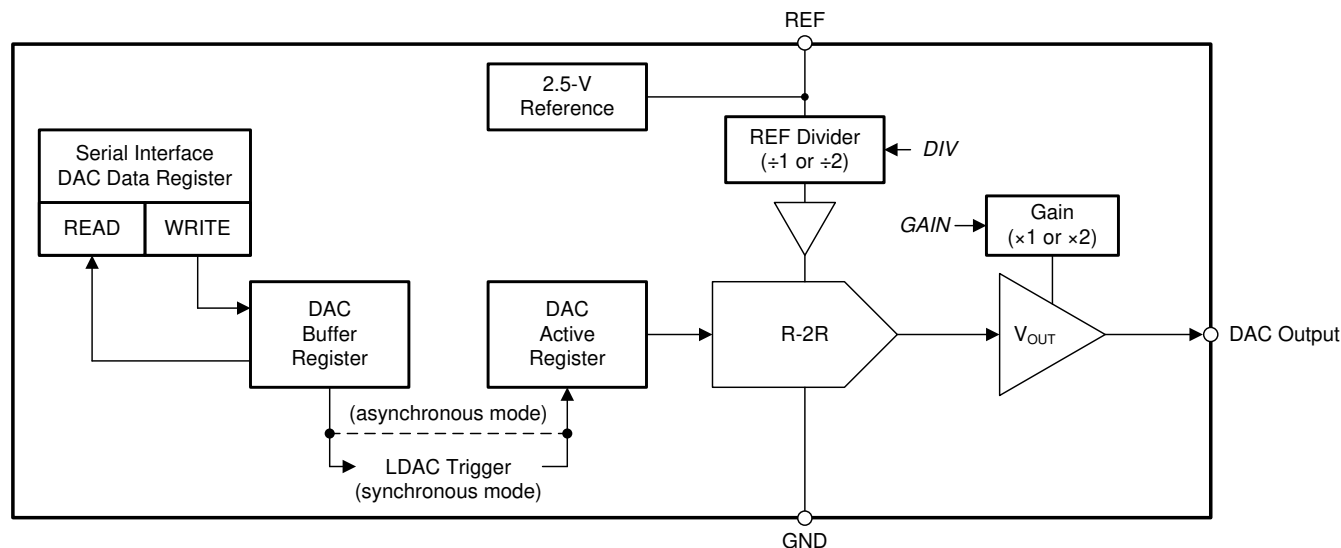Each output channel in the DACx0504 consists of an R-2R ladder architecture followed by an output buffer amplifier. Figure 57 shows a block diagram of the DAC architecture.



Copyright © 2017, Texas Instruments Incorporated

Figure 57. DACx0504 DAC Block Diagram

9.3.1.1 DAC Transfer Function

The input data are written to the individual DAC data registers in straight binary format. After a power-on or a reset event, all DAC registers are set to either zero code or midscale code, as determined by the RSTSEL pin. The DAC transfer function is given by Equation 1.

$$V_{OUT} = \frac{CODE}{2^n} \times \frac{V_{REF}}{DIV} \times GAIN$$

where

- CODE = decimal equivalent of the binary code that is loaded to the DAC register. CODE ranges from 0 to $2^n - 1$.
- V_{REF} = DAC reference voltage. Either V_{REFOUT} from the internal 2.5 V reference or V_{REFIN} if using an external one.
- n = resolution in bits. Either 16 (DAC80504), 14 (DAC70504), or 12 (DAC60504).
- DIV = 1 or 2 as set by the REFDIV pin after a reset event or by the REF-DIV bit in the GAIN register.
- GAIN = 1 or 2 as set by the GAIN pin after a reset event or by the BUFF-GAIN bit for that DAC channel in the GAIN register.

(1)

Feature Description (continued)

9.3.1.2 Output Amplifiers

The DACx0504 output buffer amplifier is capable of generating rail-to-rail voltages on its output, giving a maximum output range of 0 V to V_{DD} . Each buffer amplifier is capable of driving a load of 2 k Ω in parallel with 10 nF to GND.

The full-scale output voltage for each channel is determined by the reference voltage (V_{REF}), the reference divider setting (DIV), and the output buffer gain for that channel (GAIN), as shown in [Table 1](#). After a power-up or reset event the DIV and GAIN settings are set by the REFDIV and GAIN pins, respectively. During normal operation the DIV and GAIN settings can be reconfigured through the REF-DIV and BUFF-GAIN bit (see [Equation 1](#)). The GAIN setting for each output channel can be individually configured thus enabling independent output voltage ranges for each DAC output.

Table 1. DAC Output Range Configuration

DIV SETTING	GAIN SETTING	DAC OUTPUT RANGE
$\div 2$	$\times 1$	0 V to $\frac{1}{2} \times V_{REF}$
$\div 1$	$\times 1$	Not recommended
$\div 2$	$\times 2$	0 V to V_{REF}
$\div 1$	$\times 2$	0 V to $2 \times V_{REF}$

9.3.1.3 DAC Register Structure

Data written to the DAC data registers is initially stored in the DAC buffer registers. Transfer of data from the DAC buffer registers to the active DAC registers can be configured to happen immediately (asynchronous mode) or initiated by an LDAC trigger (synchronous mode). Once the DAC active registers are updated, the DAC outputs change to their new values. When the host reads from a DAC Data register, the value held in the DAC buffer register is returned (not the value held in the DAC active register).

9.3.1.3.1 DAC Register Synchronous and Asynchronous Updates

The update mode for each DAC channel is determined by the status of its corresponding SYNC-EN bit. In asynchronous mode, a write to the DAC data register results in an immediate update of the DAC active register and DAC output on $\overline{CS}$ rising edge. In synchronous mode, writing to the DAC data register does not automatically update the DAC output. Instead the update occurs only after an LDAC trigger event. An LDAC trigger is generated either through the LDAC bit in the TRIGGER register or by the LDAC pin. The synchronous update mode enables simultaneous update of multiple DAC outputs. In both update modes a minimum wait time of 1 μ s is required between DAC output updates.

9.3.1.3.2 Broadcast DAC Register

The DAC broadcast register enables a simultaneous update of multiple DAC outputs with the same value with a single register write. Each DAC channel can be configured to update or remain unaffected by a broadcast command by setting the corresponding DAC-BROADCAST-EN bit in the SYNC register. A register write to the BROADCAST-DATA register forces those DAC channels that have been configured for broadcast operation to update their outputs. The DAC outputs update to the broadcast value on $\overline{CS}$ rising edge independently of their synchronous mode configuration.

9.3.2 Internal Reference

The DACx0504 includes a 2.5 V precision bandgap reference enabled by default. Operation from an external reference is supported by disabling the internal reference in the CONFIG register. The internal reference is externally available at the REF pin.

A minimum 150 nF capacitor is recommended between the reference output and GND for noise filtering.

9.3.2.1 Reference Divider

The reference voltage to the device, either from the internal reference or an external one can be divided by a factor of two by tying the REFDIV pin high at power-up or by setting the REF-DIV bit in the GAIN register to 1 during normal operation. The reference voltage divider provides additional flexibility in setting the full-scale output voltage for each DAC output and must be configured to make certain that there is sufficient headroom from V_{DD} to the DAC operating reference voltage (V_{REF}/DIV). See the [Recommended Operating Conditions](#) table for more information.

Improper configuration of the reference divider issues a reference alarm condition. In this case, the reference buffer is shut down, and all the DAC outputs go to 0 V. The DAC data registers are unaffected by the alarm condition thus enabling the DAC output to return to normal operation once the reference divider is configured correctly. The reference alarm status can be read from the REF-ALM bit in the STATUS register. Additionally by setting ALM-EN = 1 and ALM-SEL = 1 in the CONFIG register, the SDO/ALARM pin is configured as a reference alarm pin.

9.3.2.2 Solder Heat Reflow

A known behavior of IC reference voltage circuits is the shift induced by the soldering process. [Figure 58](#) shows the effect of solder heat reflow for the DACx0504 internal reference.

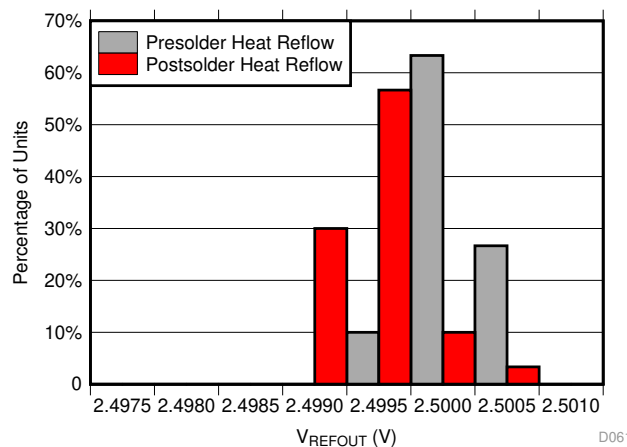


Figure 58. Solder Heat Reflow Reference Voltage Shift

9.3.3 Device Reset Options

9.3.3.1 Power-on-Reset (POR)

The DACx0504 includes a power-on reset function that controls the output voltage at power up. After the V_{DD} and V_{IO} supplies have been established a POR event is issued. The POR causes all registers to initialize to their default values and communication with the device is valid only after a 250 μ s power-on-reset delay. The default value for all DACs is either zero-code or midscale-code as determined by the RSTSEL pin. Each DAC channel remains at the power-up voltage until a valid command is written to it.

The POR circuit requires specific supply levels to discharge the internal capacitors and to reset the device on power up, as indicated in Figure 59 and Figure 60. In order to initiate a POR event, V_{DD} or V_{IO} must be below their corresponding low thresholds for at least 100 μ s. If V_{DD} and V_{IO} remain above their specified high threshold a POR event will not occur. When the supplies drop below their high threshold but remain over the lower one (shown as the undefined region), the device may or may not reset under all specified temperature and power-supply conditions.

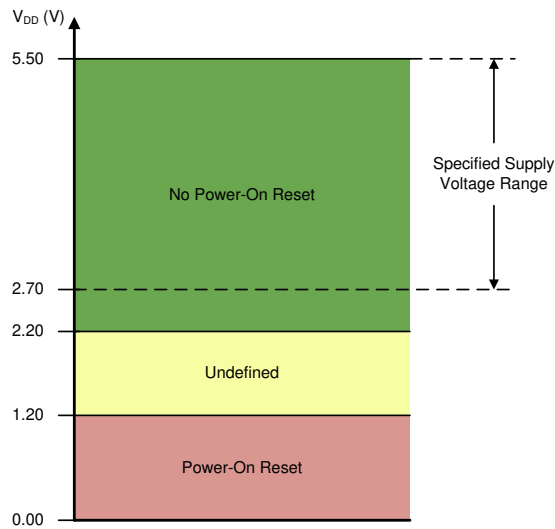


Figure 59. Threshold Levels for V_{DD} POR Circuit

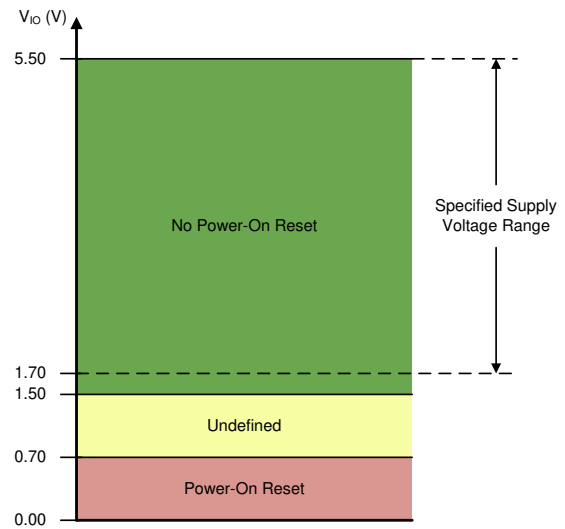


Figure 60. Threshold Levels for V_{IO} POR Circuit

9.3.3.2 Software Reset

A device software reset event is initiated by writing the reserved code 0x1010 to SOFT-RESET in the TRIGGER register. The software reset command is triggered on the $\overline{CS}$ rising edge of the instruction. A software reset initiates a POR event.

9.4 Device Functional Modes

9.4.1 Stand-Alone Operation

A serial interface access cycle is initiated by asserting the $\overline{CS}$ pin low. The serial clock SCLK can be a continuous or gated clock. SDI data are clocked on SCLK falling edges. A regular serial interface access cycle is 24 bits long with error checking disabled and 32 bits long with error checking enabled, thus the $\overline{CS}$ pin must stay low for at least 24 or 32 SCLK falling edges. The access cycle ends when the $\overline{CS}$ pin is de-asserted high. If the access cycle contains less than the minimum clock edges, the communication is ignored. If the access cycle contains more than the minimum clock edges are present, only the last 24 or 32 bits are used by the device. When CS is high, the SCLK and SDI signals are blocked and the SDO pin is in a Hi-Z state.

In an error checking disabled access cycle (24-bits long) the first byte input to SDI is the instruction cycle which identifies the request as a read or write command and the 4-bit address to be accessed. The following bits in the cycle form the data cycle, as shown in [Table 2](#).

Table 2. Serial Interface Access Cycle

BIT	FIELD	DESCRIPTION
23	RW	Identifies the communication as a read or write command to the addressed register. R/W = 0 sets a write operation. R/W = 1 sets a read operation.
22:20	Reserved	Reserved bits. Must be filled with zeros.
19:16	A[3:0]	Register address. Specifies the register to be accessed during the read or write operation.
15:0	DI[15:0]	Data cycle bits. If a write command, the data cycle bits are the values to be written to the register with address A[3:0]. If a read command, the data cycle bits are don't care values.

A read operation is initiated by issuing a read command access cycle. After the read command, a second access cycle must be issued to get the requested data, as shown in [Table 3](#). Data are clocked out on SDO pin either on the falling edge or rising edge of SCLK according to the FSDO bit in the CONFIG register.

Table 3. SDO Output Access Cycle

BIT	FIELD	DESCRIPTION
23	RW	Echo RW from previous access cycle.
22:20	Reserved	Echo bits 22:20 from previous access cycle (all zeros).
19:16	A[3:0]	Echo address from previous access cycle.
15:0	DO[15:0]	Readback data requested on previous access cycle.

9.4.2 Daisy-Chain Operation

For systems that contain more than one DACx0504 devices, the SDO pin can be used to daisy-chain them together. Daisy-chain operation is useful in reducing the number of serial interface lines.

The first falling edge on the $\overline{CS}$ pin starts the operation cycle. If more than 24 SCLK pulses are applied while the $\overline{CS}$ pin is kept low, the data ripples out of the shift register and is clocked out on the SDO pin either on the falling edge or rising edge of SCLK according to the FSDO bit. By connecting the SDO output of the first device in the chain, a multiple-device interface is constructed. Each device in the system requires 24 clock pulses. As a result the total number of clock cycles must be equal to $24 \times N$, where N is the total number of DACx0504 devices in the daisy chain. When the serial transfer to all devices is complete the $\overline{CS}$ signal is taken high. This action transfers the data from the serial peripheral interface (SPI) shift registers to the internal registers of each device in the daisy chain and prevents any further data from being clocked into the input shift register.

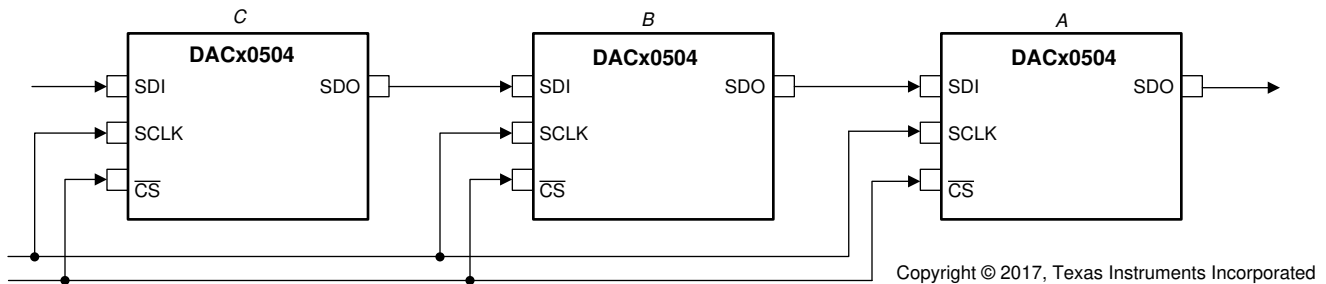


Figure 61. Daisy-Chain Layout

9.4.3 Frame Error Checking

If the DACx0504 is used in a noisy environment, error checking can be used to check the integrity of SPI data communication between the device and the host processor. This feature can be enabled by setting the CRC-EN bit in the CONFIG register.

The error checking scheme is based on the CRC-8-ATM (HEC) polynomial $x^8 + x^2 + x + 1$ (that is, 100000111). When error checking is enabled, the serial interface access cycle width is 32 bits. The normal 24-bit SPI data are appended with an 8-bit CRC polynomial by the host processor before feeding it to the device, as shown in Table 4. In all serial interface readback operations the CRC polynomial is output on the SDO pin as part of the 32-bit cycle.

Table 4. Error Checking Serial Interface Access Cycle

BIT	FIELD	DESCRIPTION
31	RW	Identifies the communication as a read or write command to the addressed register. R/W = 0 sets a write operation. R/W = 1 sets a read operation.
30	CRC-ERROR	Reserved bit. Set to zero.
29:28	Reserved	Reserved bits. Must be filled with zeros.
27:24	A[3:0]	Register address. Specifies the register to be accessed during the read or write operation.
23:8	DI[15:0]	Data cycle bits. If a write command, the data cycle bits are the values to be written to the register with address A[3:0]. If a read command, the data cycle bits are don't care values.
7:0	CRC	8-bit CRC polynomial.

The DACx0504 decodes the 32-bit access cycle to compute the CRC remainder on $\overline{CS}$ rising edges. If no error exists, the CRC remainder is zero and data are accepted by the device.

A write operation failing the CRC check causes the data to be ignored by the device. After the write command, a second access cycle can be issued to determine the error checking result (CRC-ERROR bit) on the SDO pin, as shown in [Table 5](#). Additionally, by setting ALM-EN = 1 and ALM-SEL = 0 in the CONFIG register, the SDO/ALARM pin is configured as a CRC alarm pin.

Table 5. Write Operation Error Checking Cycle

BIT	FIELD	DESCRIPTION
31	RW	Echo RW from previous access cycle (RW = 0).
30	CRC-ERROR	Returns a 1 when a CRC error is detected, 0 otherwise.
29:28	Reserved	Echo bits 29:28 from previous access cycle (all zeros).
27:24	A[3:0]	Echo address from previous access cycle.
23:8	DO[15:0]	Echo data from previous access cycle.
7:0	CRC	Calculated CRC value of bits 31:8.

A read operation must be followed by a second access cycle to get the requested data on the SDO pin. The error check result (CRC-ERROR bit) from the read command is output on the SDO pin, as shown in [Table 6](#). As in the case of a write operation failing the CRC check, the SDO/ALARM pin if configured as a CRC alarm pin can be used to indicate a read command CRC failure.

Table 6. Read Operation Error Checking Cycle

BIT	FIELD	DESCRIPTION
31	RW	Echo RW from previous access cycle (RW = 1).
30	CRC-ERROR	Returns a 1 when a CRC error is detected, 0 otherwise.
29:28	Reserved	Echo bits 29:28 from previous access cycle (all zeros).
27:24	A[3:0]	Echo address from previous access cycle.
23:8	DO[15:0]	Readback data requested on previous access cycle.
7:0	CRC	Calculated CRC value of bits 31:8.

9.4.4 Power-Down Mode

The DACx0504 DAC output amplifiers and internal reference can be independently powered down through the CONFIG register. At power-up all output channels and the device internal reference are active by default. A DAC output channel in power-down mode is connected internally to GND through a 1-k Ω resistor.




9.5 Programming

The DACx0504 is controlled through a flexible four-wire serial interface that is compatible with SPI type interfaces used on many microcontrollers and DSP controllers. The interface provides read and write access to all DACx0504 registers and can also be configured to daisy-chain multiple devices for write operations. The DACx0504 incorporates an optional error checking mode to validate SPI data communication integrity in noisy environments. [Table 7](#) shows the SPI timing requirements. [Figure 62](#) and [Figure 63](#) show the SPI write and read timing diagrams, respectively. [Figure 64](#) shows the digital logic timing diagram.

Table 7. Programming Timing Requirements⁽¹⁾

		V _{IO} = 1.7 V to 2.7 V			V _{IO} = 2.7 V to 5.5 V			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
SERIAL INTERFACE – WRITE OPERATION								
f _{SCLK}	SCLK frequency	50			50			MHz
t _{SCLKHIGH}	SCLK high time	9			9			ns
t _{SCLKLOW}	SCLK low time	9			9			ns
t _{SDIS}	SDI setup	5			5			ns
t _{SDIH}	SDI hold	10			10			ns
t _{CSS}	$\overline{CS}$ to SCLK falling edge setup	13			13			ns
t _{CSH}	SCLK falling edge to $\overline{CS}$ rising edge	10			10			ns
t _{CSHIGH}	$\overline{CS}$ high time	15			15			ns
t _{CSIGNORE}	SCLK falling edge to $\overline{CS}$ ignore	7			7			ns
SERIAL INTERFACE – READ AND DAISY CHAIN OPERATION, FSDO = 0								
f _{SCLK}	SCLK frequency	12			18			MHz
t _{SCLKHIGH}	SCLK high time	35			25			ns
t _{SCLKLOW}	SCLK low time	35			25			ns
t _{SDIS}	SDI setup	5			5			ns
t _{SDIH}	SDI hold	10			10			ns
t _{CSS}	$\overline{CS}$ to SCLK falling edge setup	32			20			ns
t _{CSH}	SCLK falling edge to $\overline{CS}$ rising edge	10			10			ns
t _{CSHIGH}	$\overline{CS}$ high time	15			15			ns
t _{SDODLY}	SDO output delay from SCLK rising edge	3.5			33.5			ns
t _{SDODZ}	SDO driven to tri-state	0			30			ns
t _{CSIGNORE}	SCLK falling edge to $\overline{CS}$ ignore	7			7			ns
SERIAL INTERFACE – READ AND DAISY CHAIN OPERATION, FSDO = 1								
f _{SCLK}	SCLK frequency	20			25			MHz
t _{SCLKHIGH}	SCLK high time	22			18			ns
t _{SCLKLOW}	SCLK low time	22			18			ns
t _{SDIS}	SDI setup	5			5			ns
t _{SDIH}	SDI hold	10			10			ns
t _{CSS}	$\overline{CS}$ to SCLK falling edge setup	32			20			ns
t _{CSH}	SCLK falling edge to $\overline{CS}$ rising edge	10			10			ns
t _{CSHIGH}	$\overline{CS}$ high time	15			15			ns
t _{SDODLY}	SDO output delay from SCLK falling edge	3.5			45			ns
t _{SDODZ}	SDO driven to tri-state	0			30			ns
t _{CSIGNORE}	SCLK falling edge to $\overline{CS}$ ignore	7			7			ns
DIGITAL LOGIC								
t _{RSTDLYPOR}	POR reset delay	170			250			μs
t _{DACWAIT}	Sequential DAC output updates	1			1			μs
t _{LDACS}	$\overline{LDAC}$ setup	0			0			ns
t _{LDACH}	$\overline{LDAC}$ hold	5			5			ns

(1) All input signals are specified at $t_R = t_F = 1 \text{ ns/V}$ (10% to 90% of V_{IO}), timed from a voltage level of $(V_{IL} + V_{IH}) / 2$, $V_{DD} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{IO} = 1.7 \text{ V to } 5.5 \text{ V}$, $V_{REFIN} = 1.25 \text{ V to } 5.5 \text{ V}$, SDO loaded with 20 pF, and $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ (unless otherwise noted)

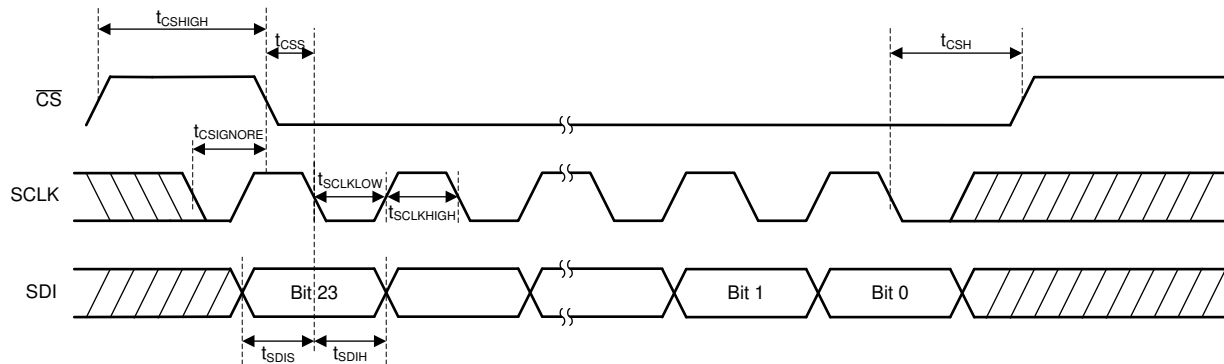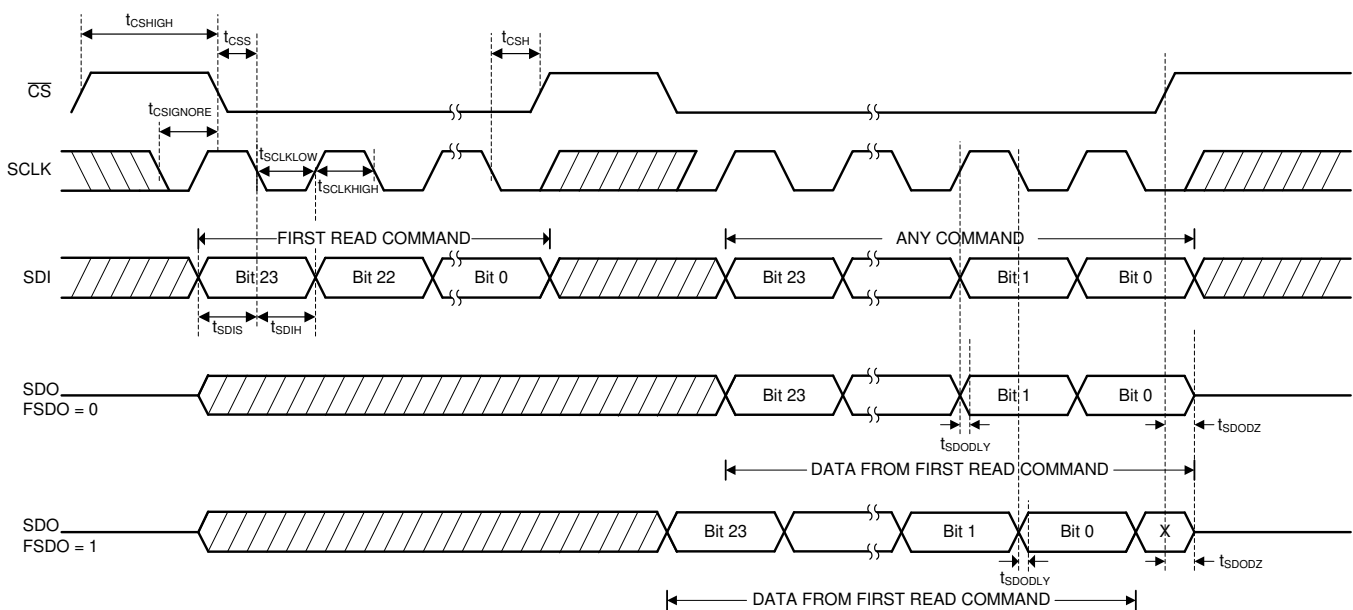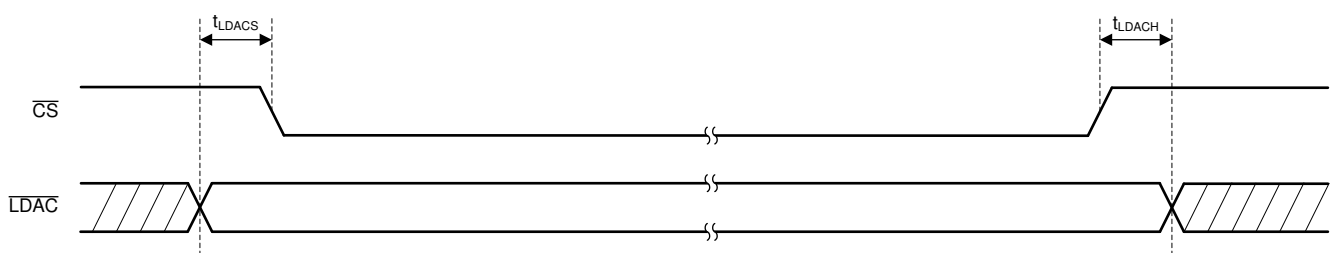
Figure 62. Serial Interface Write Timing Diagram

Figure 63. Serial Interface Read Timing Diagram

Figure 64. Digital Logic Timing Diagram

9.6 Register Map

Table 8. Register Map

REGISTER	TYPE	RESET	ADDRESS BITS				DATA BITS															
			A3	A2	A1	A0	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
NOP	W	0000	0	0	0	0	NOP															
DEVICE ID	R	—	0	0	0	1	DEVICEID														VERSIONID	
SYNC	R/W	FF00	0	0	1	0	RESERVED			DACx-BRDCAST-EN				RESERVED				DACx-SYNC-EN				
CONFIG	R/W	0000	0	0	1	1	RESERVED	ALM SEL	ALM EN	CRC EN	F SDO	D SDO	REF PWD WN	RESERVED			DACx-PWDWN					
GAIN	R/W	0000	0	1	0	0	RESERVED					REF DIV-EN	RESERVED			BUFFx-GAIN						
TRIGGER	W	0000	0	1	0	1	RESERVED										L DAC	SOFT-RESET[3:0]				
BRDCAST	R/W	0000	0	1	1	0	BRDCAST-DATA[15:0]															
STATUS	R/W	0000	0	1	1	1	RESERVED														REF ALM	
DAC0	R/W	0000	1	0	0	0	DAC0-DATA[15:0]															
DAC1	R/W	0000	1	0	0	1	DAC1-DATA[15:0]															
DAC2	R/W	0000	1	0	1	0	DAC2-DATA[15:0]															
DAC3	R/W	0000	1	0	1	1	DAC3-DATA[15:0]															
All Others	—	—	—	—	—	—	RESERVED															

9.6.1 NOP Register (address = 0x00) [reset = 0x0000]

Figure 65. NOP Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
NOP															
W															

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 9. NOP Register Field Descriptions

Bit	Field	Type	Reset	Description
15:0	NOP	W	0x0000	No operation. Write 0000h for proper no-operation command

9.6.2 DEVICE ID Register (address = 0x01) [reset = 0x---]

Figure 66. DEVICE ID Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DEVICEID														VERSIONID	
R														R	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 10. DEVICE ID Field Descriptions

Bit	Field	Type	Reset	Description
15:2	DEVICEID	R	----	Device ID: D15 Reserved - 0 D14:12 Resolution - 000 (16-bit); 001 (14-bit); 010 (12-bit) D11:4 Channels - 0100 (4 channels) D7 Reset - Determined by RSTSEL pin. 0 (reset to zero); 1 (reset to midscale) D6:2 Reserved - 00101
1:0	VERSIONID	R	11	Version ID. Subject to change

9.6.3 SYNC Register (address = 0x2) [reset = 0xFF00]

Figure 67. SYNC Register

15	14	13	12	11	10	9	8
Reserved				DAC3-BRDCAST-EN	DAC2-BRDCAST-EN	DAC1-BRDCAST-EN	DAC0-BRDCAST-EN
—				R/W	R/W	R/W	R/W
7	6	5	4	3	2	1	0
Reserved				DAC3-SYNC-EN	DAC2-SYNC-EN	DAC1-SYNC-EN	DAC0-SYNC-EN
—				R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 11. SYNC Register Field Descriptions

Bit	Field	Type	Reset	Description
15:12	Reserved	—	1111	Reserved for factory use
11	DAC3-BRDCAST-EN	R/W	1	When set to 1 the corresponding DAC is set to update its output after a serial interface write to the BRDCAST register. When cleared to 0 the corresponding DAC output remains unaffected after a serial interface write to the BRDCAST register.
10	DAC2-BRDCAST-EN	R/W	1	
9	DAC1-BRDCAST-EN	R/W	1	
8	DAC0-BRDCAST-EN	R/W	1	
7:4	Reserved	—	0000	Reserved for factory use
3	DAC3-SYNC-EN	R/W	0	When set to 1 the corresponding DAC output is set to update in response to an LDAC trigger (synchronous mode). When cleared to 0 the corresponding DAC output is set to update immediately on a $\overline{CS}$ rising edge (asynchronous mode).
2	DAC2-SYNC-EN	R/W	0	
1	DAC1-SYNC-EN	R/W	0	
0	DAC0-SYNC-EN	R/W	0	

9.6.4 CONFIG Register (address = 0x3) [reset = 0x0000]

Figure 68. CONFIG Register

15	14	13	12	11	10	9	8
Reserved	ALM-SEL	ALM-EN	CRC-EN	FSDO	DSDO	REF-PWDWN	
—	R/W	R/W	R/W	R/W	R/W	R/W	
7	6	5	4	3	2	1	0
Reserved				DAC3-PWDWN	DAC2-PWDWN	DAC1-PWDWN	DAC0-PWDWN
—				R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 12. CONFIG Register Field Descriptions

Bit	Field	Type	Reset	Description
15:14	Reserved	—	00	Reserved for factory use
13	ALM-SEL	R/W	0	ALARM select. 0: ALARM pin is CRC-ERROR 1: ALARM pin is REF-ALARM
12	ALM-EN	R/W	0	Configure SDO/ALARM pin. When 1: SDO/ALARM pin is an active-low, open-drain, alarm pin. An external 10 kΩ pullup resistor to V _{IO} is required. FSDO and DSDO bits are ignored. When 0: SDO/ALARM pin is a serial interface, push-pull, SDO pin
11	CRC-EN	R/W	0	CRC enable bit. Set to 1 to enable CRC. Set to 0 to disable
10	FSDO	R/W	0	Fast SDO bit (half-cycle speedup). When 0, SDO updates on an SCLK rising edge. When 1, SDO updates a half-cycle earlier, during an SCLK falling edge.
9	DSDO	R/W	0	Disable SDO bit. When 1, SDO is always tri-stated. When 0, SDO is driven while $\overline{CS}$ is low, and tri-stated while $\overline{CS}$ is high
8	REF-PWDWN	R/W	0	When set to 1 disables the device internal reference
7:4	Reserved	—	0000	Reserved for factory use
3	DAC3-PWDWN	R/W	0	When set to 1 the corresponding DAC is set in power-down mode and its output is connected to GND through a 1 kΩ internal resistor.
2	DAC2-PWDWN	R/W	0	
1	DAC1-PWDWN	R/W	0	
0	DAC0-PWDWN	R/W	0	

9.6.5 GAIN Register (address = 0x04) [reset = 0x---]

Figure 69. GAIN Register

15	14	13	12	11	10	9	8
Reserved							REFDIV-EN
—							R/W
7	6	5	4	3	2	1	0
Reserved				BUFF3-GAIN	BUFF2-GAIN	BUFF1-GAIN	BUFF0-GAIN
—				R/W	R/W	R/W	R/W

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 13. GAIN Register Field Descriptions

Bit	Field	Type	Reset	Description
15:9	Reserved	—	0	Reserved for factory use.
8	REFDIV-EN	R/W	0/1	When set to 1 the reference voltage is internally divided by a factor of 2. When cleared to 0 the reference voltage is unaffected. Default value is determined by the REFDIV pin.
7:4	Reserved	—	0000	Reserved for factory use
3	BUFF3-GAIN	R/W	0/1	When set to 1 the buffer amplifier for corresponding DAC has a gain of 2. When cleared to 0 the buffer amplifier for corresponding DAC has a gain of 1. Default value is determined by the GAIN pin.
2	BUFF2-GAIN	R/W	0/1	
1	BUFF1-GAIN	R/W	0/1	
0	BUFF0-GAIN	R/W	0/1	

9.6.6 TRIGGER Register (address = 0x05) [reset = 0x0000]

Figure 70. TRIGGER Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Reserved											LDAC	SOFT-RESET[3:0]			
—											W	W			

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 14. TRIGGER Register Field Descriptions

Bit	Field	Type	Reset	Description
15:5	Reserved	—	0	Reserved for factory use.
4	LDAC	W	0	Set this bit to 1 to synchronously load those DACs that have been set in synchronous mode in the SYNC register.
3:0	SOFT-RESET[3:0]	W	0x0	When set to the reserved code 1010 resets the device to its default state.

9.6.7 BRDCAST Register (address = 0x6) [reset = 0x0000]

Figure 71. BRDCAST Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
BRDCAST-DATA[15:0]															
R/W															

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 15. BRDCAST Register Field Descriptions

Bit	Field	Type	Reset	Description
15:0	BRDCAST-DATA[15:0]	R/W	0x0000	Writing to the BRDCAST register forces those DAC channels that have been set to broadcast in the SYNC register to update their active data register with the BRDCAST-DATA value. Data are MSB aligned in straight binary format and follows the format below: DAC80504: { DATA[15:0] } DAC70504: { DATA[13:0], x, x } DAC60504: { DATA[11:0], x, x, x, x } x – Don't care bits

9.6.8 STATUS Register (address = 0x7) [reset = 0x0000]

Figure 72. STATUS Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Reserved														REF-ALM	
—														R/W	

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 16. STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
15:1	Reserved	—	0	Reserved for factory use.
0	REF-ALM	R	0	Reference alarm bit. Reads 1 when the difference between V_{REF}/DIV and V_{DD} is below the required minimum analog threshold. Reads 0 otherwise.

9.6.9 DACx Register (address = 0x8 to 0xF) [reset = 0x0000 or 0x8000]

Figure 73. DACx Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DACx-DATA[15:0]															
R/W															

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

Table 17. DACx Register Field Descriptions

Bit	Field	Type	Reset	Description
15:0	DACx-DATA[15:0]	R/W	0x0000 or 0x8000	Stores the 16- or 14-bit data to be loaded to DACx in MSB aligned straight binary format. The default value is determined by the RSTSEL pin. Data follows the format below: DAC80504: { DATA[15:0] } DAC70504: { DATA[13:0], x, x } DAC60504: { DATA[11:0], x, x, x, x } x – Don't care bits

10 Application and Implementation

NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

10.1 Application Information

The high linearity, small package size and wide temperature range make the DACx0504 suitable in applications such as optical networking, wireless infrastructure, industrial automation and data acquisition systems. The device incorporates a 2.5 V internal reference with an internal reference divider circuit that enables full-scale DAC output voltages of 1.25 V, 2.5 V, or 5 V.

10.1.1 Interfacing to a Microcontroller

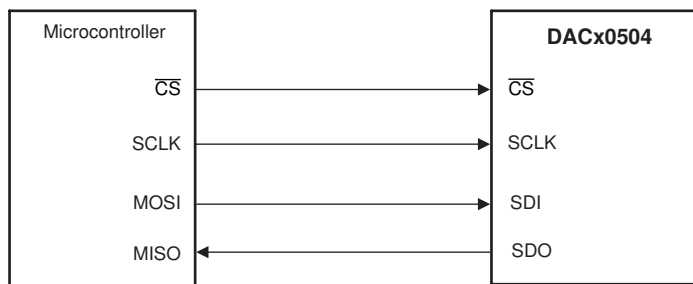Figure 74 displays a typical serial interface that may be observed when connecting the DACx0504 SPI serial interface to a (master) microcontroller type platform. The setup for the interface is as follows: the microcontroller output SPI CLK drives the SCLK pin of the DACx0504, while the DACx0504 SDI pin is driven by the MOSI pin of the microcontroller. The $\overline{\text{CS}}$ pin of the DACx0504 can be asserted from a general program input/output pin of the microcontroller. When data are to be transmitted to the DACx0504, the $\overline{\text{CS}}$ pin is taken low. The data from the microcontroller is then transmitted to the DACx0504, totaling 24 bits latched into the DACx0504 device through the falling edge of SCLK. $\overline{\text{CS}}$ is then brought high after the completed write. The DACx0504 requires data with the MSB as the first bit received.



Copyright © 2017, Texas Instruments Incorporated

Figure 74. Typical Serial Interface

Application Information (continued)

10.1.2 Programmable Current Source Circuit

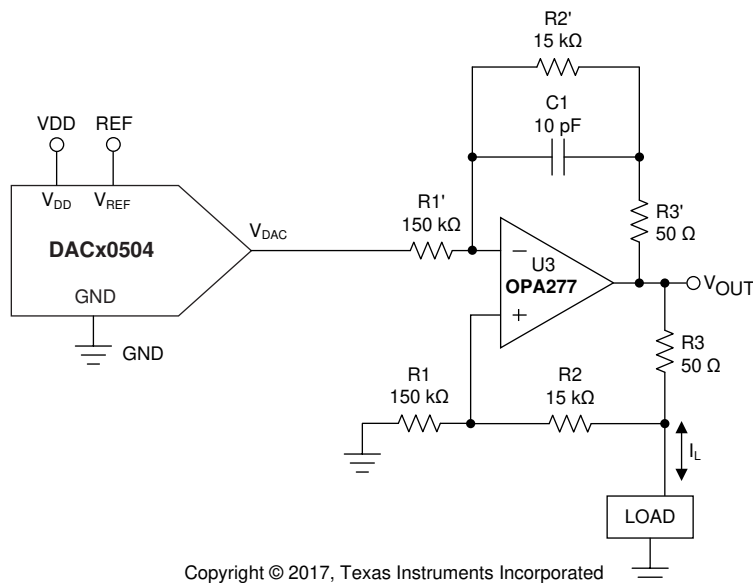
The DACx0504 can be integrated into the circuit in [Figure 75](#) to implement an improved Howland current pump for precise voltage to current conversions. Bidirectional current flow and high voltage compliance are two features of the circuit. With a matched resistor network, the load current of the circuit is shown by [Equation 2](#).

$$I_L = \frac{(R2 + R3) / R1}{R3} \times V_{REF} \times \frac{CODE}{2^n} \quad (2)$$

The value of R3 in [Equation 2](#) can be reduced to increase the output current drive of U3. U3 can drive ± 20 mV in both directions with voltage compliance limited up to 15 V by the U3 voltage supply. Elimination of the circuit compensation capacitor C1 in the circuit is not suggested as a result of the change in the output impedance Z_O , according to [Equation 3](#).

$$Z_O = \frac{(R1')(R3)(R1 + R2)}{R1(R2' + R3') - R1'(R2 + R3)} \quad (3)$$

As shown in [Equation 3](#), with matched resistors, Z_O is infinite and the circuit is optimum for use as a current source. However, if unmatched resistors are used, Z_O is positive or negative with negative output impedance being a potential cause of oscillation. Therefore, by incorporating C1 into the circuit, possible oscillation problems are eliminated. The value of C1 can be determined for critical applications; for most applications, however, a value of several pF is suggested.



Copyright © 2017, Texas Instruments Incorporated

Figure 75. Programmable Bidirectional Current Source Circuit

10.2 Typical Application

The DACx0504 is designed for single-supply operation; however, a bipolar output is also possible using the circuit shown in Figure 76.

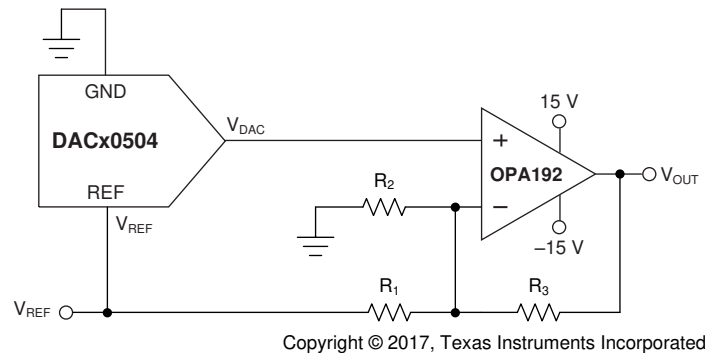


Figure 76. Bipolar Operation Using the DACx0504

10.2.1 Design Requirements

The circuit shown in Figure 76 gives a bipolar output voltage at V_{OUT} . When GAIN = 1, V_{OUT} can be calculated using Equation 4:

$$V_{OUT}(\text{CODE}) = \left[\left(V_{REF} \times \frac{\text{CODE}}{2^n} \right) \left(1 + \frac{R_3}{R_2} + \frac{R_3}{R_1} \right) - \left(V_{REF} \times \frac{R_3}{R_1} \right) \right]$$

where

- $V_{OUT}(\text{CODE})$ = output voltage versus code
- CODE = 0 to $2^n - 1$. This is the digital code loaded to the DAC
- V_{REF} = reference voltage applied to the DACx0504
- n = resolution in bits

(4)

Table 18. Design Parameters

PARAMETER	VALUE
V_{OUT}	± 10 V
V_{REF}	2.5 V
n	12

10.2.2 Detailed Design Procedure

The bipolar output span can be calculated through Equation 4 by defining a few parameters, the first being the value for the reference voltage. Once a reference voltage is chosen, the gain resistors can be set accordingly by determining the desired V_{OUT} at code 0 and code 2^n . For a V_{REF} of 2.5 V and a desired output voltage range of ± 10 V the calculation is as follows.

CODE = 0:

$$V_{OUT}(0) = - \left(V_{REF} \times \frac{R_3}{R_1} \right) = - \left(2.5\text{V} \times \frac{R_3}{R_1} \right)$$

(5)

Setting the equation to minimum output span, $V_{OUT}(0) = -10$ V, will reduce the equation to: $R_3/R_1 = 4$:

CODE = 4096:

Setting the equation to maximum output scan, $V_{OUT}(4096) = 10$ V, and $R_3/R_1 = 4$ will reduce the equation to: $R_3/R_2 = 3$

It is important to note that the maximum code of a 12-bit DAC is 4095; code 4096 was used to simplify the equation above. For practical use, the true output span will encompass a range of -10 V to $(10 \text{ V} - 1 \text{ LSB})$, which in this case is -10 V to 9.995 V.

10.2.3 Application Curve

The ± 10 V output span with a reference voltage of 2.5 V can be achieved by using values of 30 k Ω , 10 k Ω , and 7.5 k Ω for R3, R2, and R1, respectively. A curve to illustrate this output span is shown in [Figure 77](#). For this example, 1% tolerance resistors were used in evaluating bipolar operation.

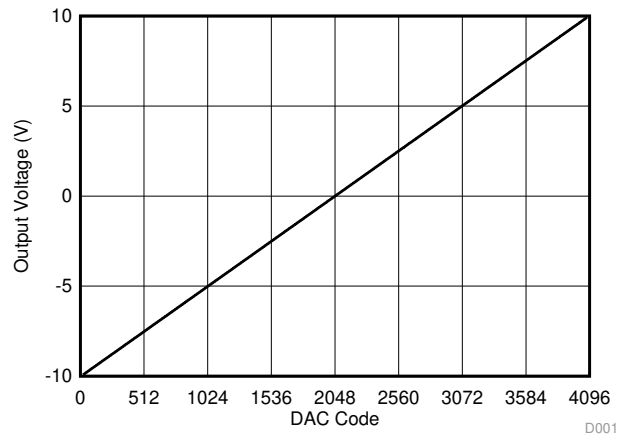


Figure 77. Bipolar Operation

11 Power Supply Recommendations

The DACx0504 operates within the specified V_{DD} supply range of 2.7 V to 5.5 V, and V_{IO} supply range of 1.7 V to 5.5 V. The DACx0504 does not require specific supply sequencing.

The V_{DD} supply must be well-regulated and low-noise. Switching power supplies and dc-dc converters often have high-frequency glitches or spikes riding on the output voltage. In addition, digital components can create similar high-frequency spikes. This noise can easily couple into the DAC output voltage through various paths between the power connections and analog output. In order to further minimize noise from the power supply, include a 1- μ F to 10- μ F capacitor and 0.1- μ F bypass capacitor. The current consumption on the V_{DD} pin, the short-circuit current limit, and the load current for the device is listed in the [Electrical Characteristics](#). The power supply must meet the aforementioned current requirements.

12 Layout

12.1 Layout Guidelines

A precision analog component requires careful layout, the list below provides some insight into good layout practices.

- Bypass all power supply pins to ground with a low-ESR ceramic bypass capacitor. The typical recommended bypass capacitance is 0.1- μ F to 0.22- μ F ceramic with a X7R or NP0 dielectric.
- Place power supplies and REF bypass capacitors close to the pins to minimize inductance and optimize performance.
- Use a high-quality ceramic type NP0 or X7R for its optimal performance across temperature, and very low dissipation factor.
- The digital and analog sections must have proper placement with respect to the digital pins and analog pins of the DACx0504 device. The separation of analog and digital blocks minimizes coupling into neighboring blocks, as well as interaction between analog and digital return currents.

12.2 Layout Example

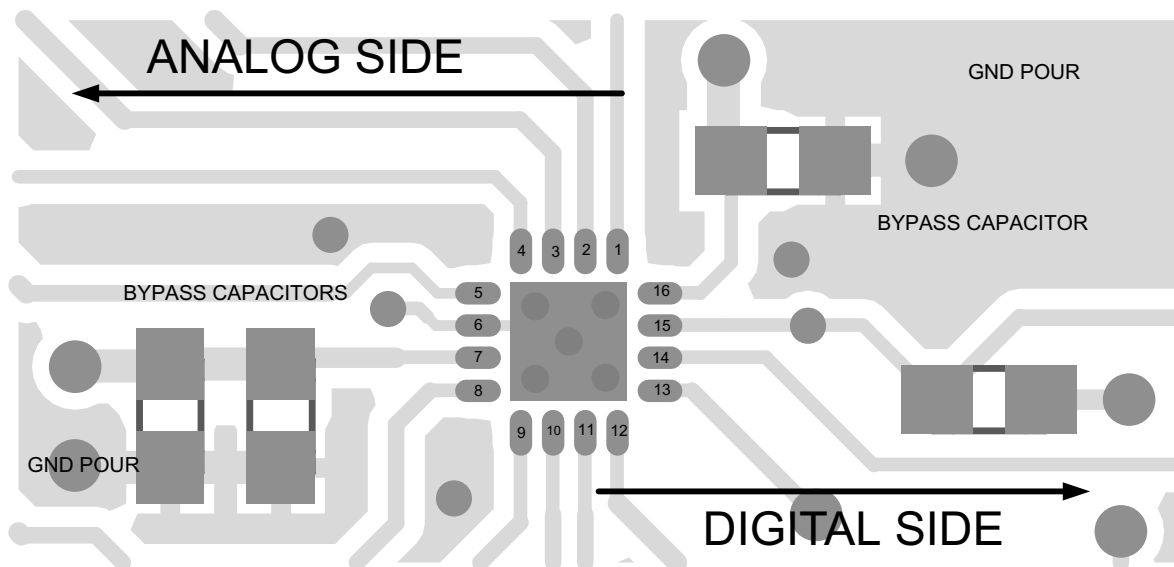


Figure 78. DACx0504 Layout Example

13 デバイスおよびドキュメントのサポート

13.1 ドキュメントのサポート

13.1.1 関連資料

関連資料については、以下を参照してください。『[DACx0504 評価モジュール・ユーザー・ガイド](#)』

13.2 関連リンク

表 19 に、クイック・アクセス・リンクの一覧を示します。カテゴリには、技術資料、サポートおよびコミュニティ・リソース、ツールとソフトウェア、およびご注文へのクイック・アクセスが含まれます。

表 19. 関連リンク

製品	プロダクト・フォルダ	ご注文はこちら	技術資料	ツールとソフトウェア	サポートとコミュニティ
DAC80504	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
DAC70504	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
DAC60504	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック

13.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#)のデバイス製品フォルダを開いてください。右上の「アラートを受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

13.4 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ オンライン・コミュニティ *TIのE2E (Engineer-to-Engineer) コミュニティ*。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

設計サポート *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

13.5 商標

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

13.6 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

13.7 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

14 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
DAC60504BRTER	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTER.A	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTER.B	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTERG4.A	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTERG4.B	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTE	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTE.A	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC60504BRTE.B	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	654B
DAC70504RTER	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC70504RTER.A	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC70504RTER.B	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC70504RTET	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC70504RTET.A	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC70504RTET.B	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	70504
DAC80504RTER	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	(80504, 854)
DAC80504RTER.B	Active	Production	WQFN (RTE) 16	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	(80504, 854)
DAC80504RTET	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	(80504, 854)
DAC80504RTET.B	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	(80504, 854)
DAC80504RTETG4.B	Active	Production	WQFN (RTE) 16	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	80504

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

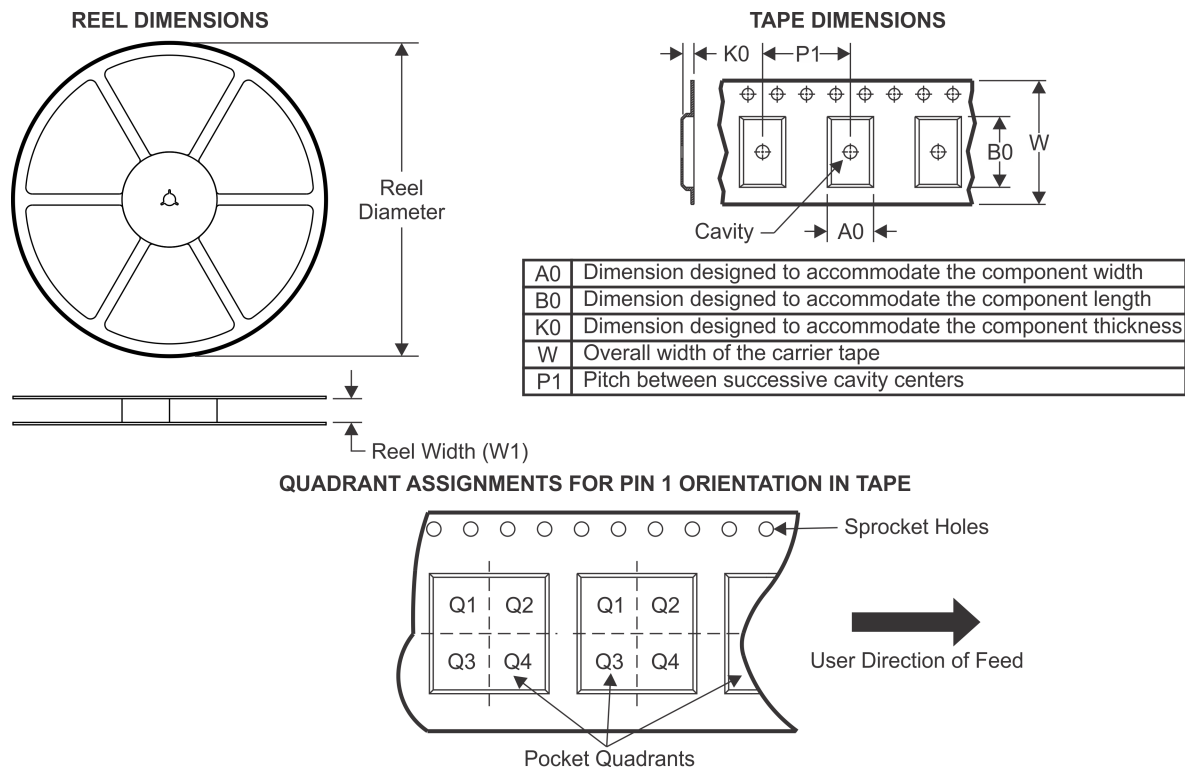
⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DAC60504BRTER	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
DAC60504BRTET	WQFN	RTE	16	250	180.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
DAC70504RTER	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
DAC70504RTET	WQFN	RTE	16	250	180.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
DAC80504RTER	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2
DAC80504RTET	WQFN	RTE	16	250	180.0	12.4	3.3	3.3	1.0	8.0	12.0	Q2

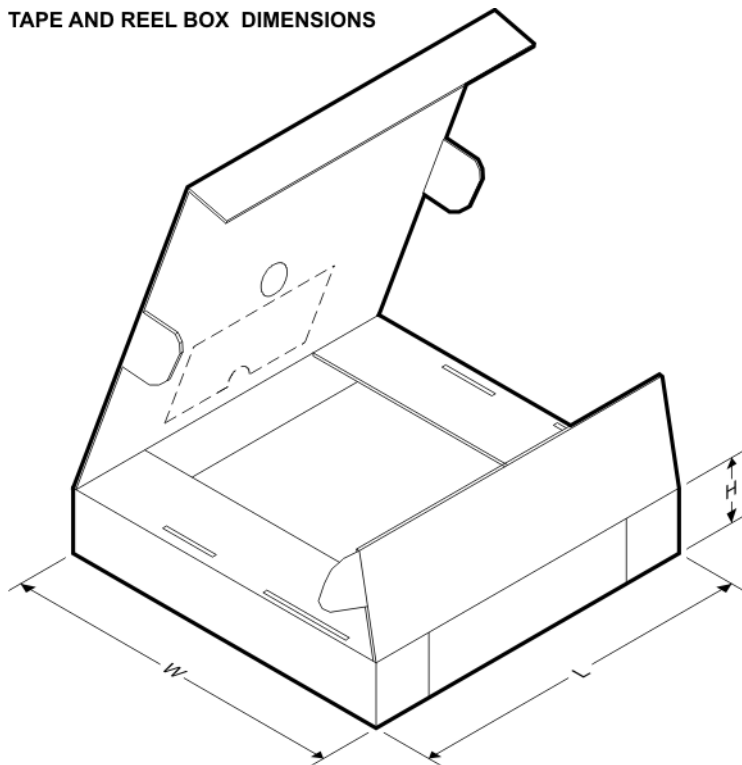TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DAC60504BRTER	WQFN	RTE	16	3000	367.0	367.0	38.0
DAC60504BRTET	WQFN	RTE	16	250	213.0	191.0	35.0
DAC70504RTER	WQFN	RTE	16	3000	367.0	367.0	38.0
DAC70504RTET	WQFN	RTE	16	250	213.0	191.0	35.0
DAC80504RTER	WQFN	RTE	16	3000	367.0	367.0	38.0
DAC80504RTET	WQFN	RTE	16	250	213.0	191.0	35.0

GENERIC PACKAGE VIEW


RTE 16

WQFN - 0.8 mm max height

3 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

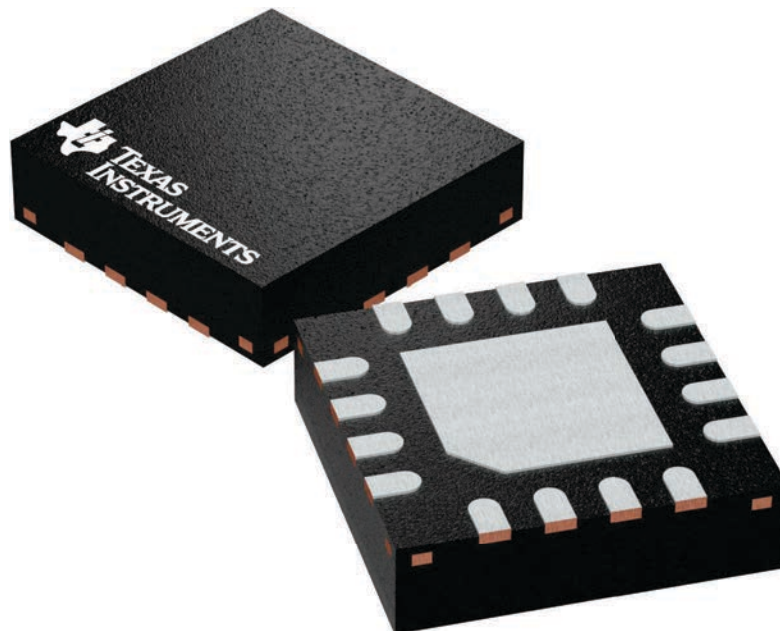

4225944/A




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT

RTE0016D

WQFN - 0.8 mm max height

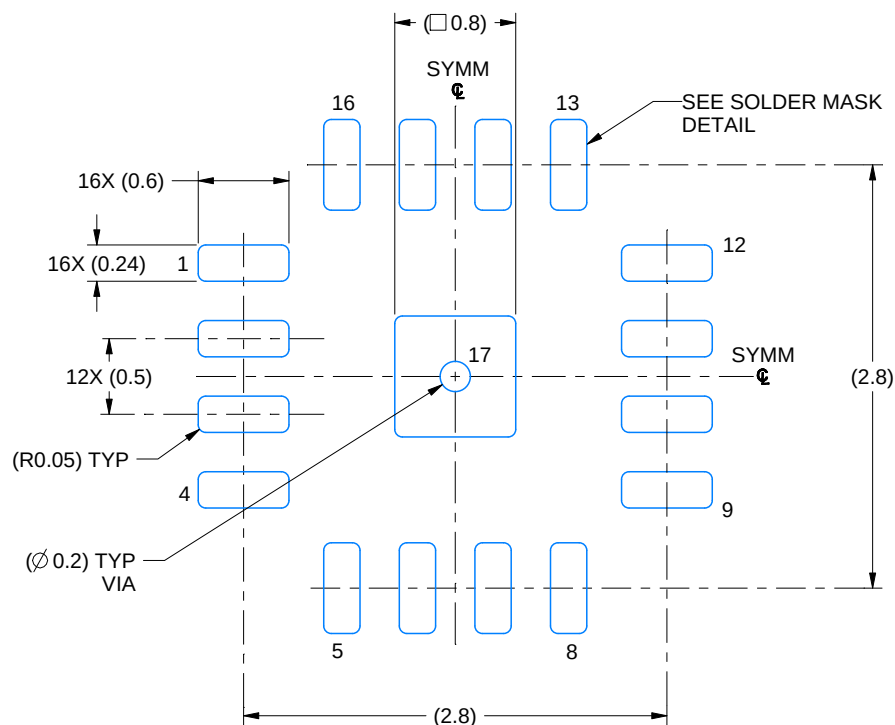PLASTIC QUAD FLATPACK - NO LEAD



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 20X



SOLDER MASK DETAILS

4219118/A 11/2018

NOTES: (continued)


- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RTE0016D

WQFN - 0.8 mm max height

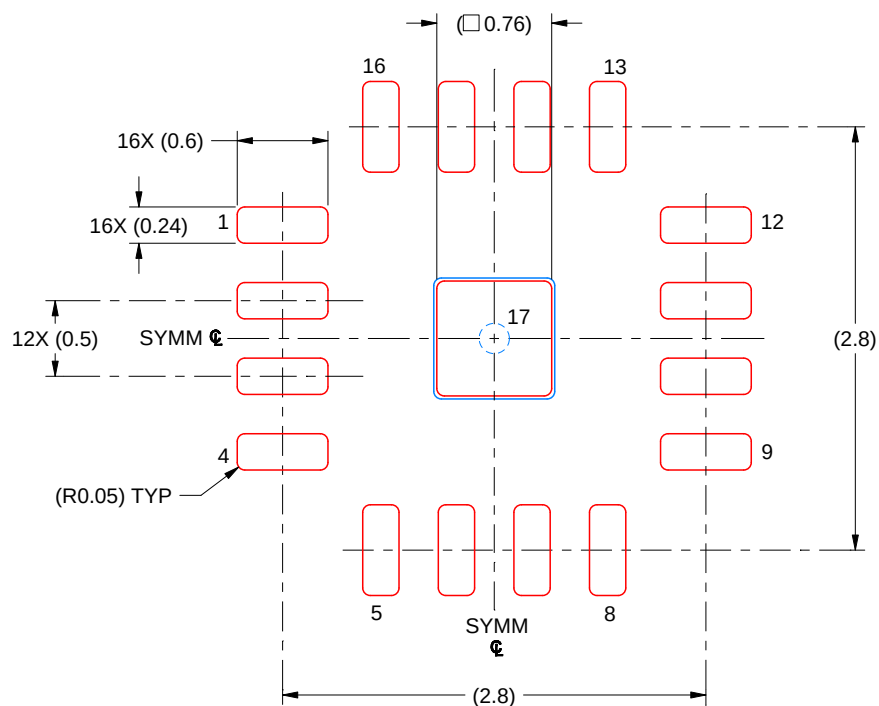PLASTIC QUAD FLATPACK - NO LEAD



SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 20X

EXPOSED PAD 17
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4219118/A 11/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated