

INA848 超低ノイズ ($1.5\text{nV}/\sqrt{\text{Hz}}$)、広帯域幅計測アンプ 固定ゲイン = 2000

1 特長

- 固定ゲイン 2000 V/V
- フィルタリングのための内部ノードへのアクセス
- 超低ノイズ: 入力電圧ノイズ: $1.5\text{nV}/\sqrt{\text{Hz}}$ (最大値)
- 高精度のスーパーベータ入力性能:
 - 低いオフセット電圧: $35\mu\text{V}$ (最大値)
 - 低い入力オフセット電圧ドリフト: $0.45\mu\text{V}/^\circ\text{C}$ (最大値)
 - 低い入力バイアス電流: 25nA (標準値)
 - 小さいゲインドリフト: $5\text{ppm}/^\circ\text{C}$ (最大値)
- 帯域幅: 2.8MHz
- スルーレート: $45\text{V}/\mu\text{s}$
- 同相除去: 132dB (最小値)
- 電源電圧範囲:
 - 単一電源: $8\text{V} \sim 36\text{V}$
 - デュアル電源: $\pm 4\text{V} \sim \pm 18\text{V}$
- 仕様温度範囲: $-40^\circ\text{C} \sim +125^\circ\text{C}$
- パッケージ: 8 ピン SOIC

2 アプリケーション

- 外科用機器
- 心電図 (ECG)
- 超音波スキャナ
- 半導体試験装置
- データ・アキュイジション (DAQ)
- 振動解析

3 概要

INA848 は、超小型、高速、差動入力信号などの高精度測定向けに最適化された固定ゲイン計測アンプです。TI のスーパーベータ・トポロジは、非常に低い入力バイアス電流と電流ノイズを実現します。適切にマッチングされたトランジスタにより、非常に低いオフセットおよびオフセット・ドリフトを実現できます。内部抵抗のマッチングにより、全入力電圧範囲で 132dB の高い同相除去比と、 $5\text{ppm}/^\circ\text{C}$ (最大値) の非常に低いゲイン・ドリフト誤差を実現します。

INA848 の電流帰還トポロジは、2000 の固定ゲインで 2.8MHz の広い帯域幅が得られるため、以後のゲイン段が不要になります。ノイズ・フロアが $1.3\text{nV}/\sqrt{\text{Hz}}$ と非常に低いため、高分解能の A/D コンバータ (ADC) と接続するときの等価ビット数 (ENOB) の影響を最小化できます。INA848 は、ゲイン段 (ピン 2 と 3) の間にフィルタを追加して十分な信号整合性を維持するという柔軟性を備えています。


これらの INA848 独自の機能により、ハイエンド医療用計測機器、脳波計、振動センシング、変位測定など、高精度の測定が必要なアプリケーションに適しています。

このデバイスは、 $8\text{V} \sim 36\text{V}$ の単一電源、または $\pm 4\text{V} \sim \pm 18\text{V}$ のデュアル電源用に設計されています。


製品情報

部品番号 ⁽¹⁾	パッケージ	本体サイズ (公称)
INA848	SOIC (8)	4.90mm × 3.91mm

- (1) 提供されているすべてのパッケージについては、データシートの末尾にあるパッケージ・オプションについての付録を参照してください。

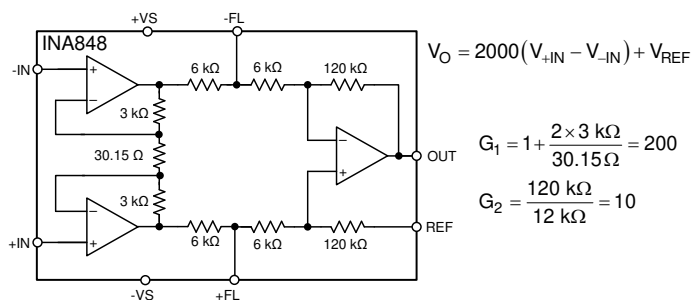

INA818 の簡略化された内部回路図

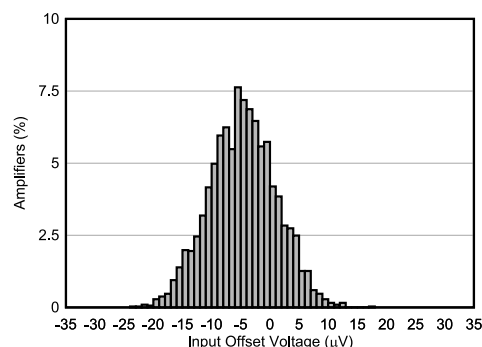

入力オフセット電圧ドリフトの代表的な分布



Table of Contents

1 特長	1	8.4 Device Functional Modes.....	16
2 アプリケーション	1	9 Application and Implementation	17
3 概要	1	9.1 Application Information.....	17
4 Revision History	2	9.2 Typical Application.....	19
5 Device Comparison Table	3	10 Power Supply Recommendations	23
6 Pin Configuration and Functions	3	11 Layout	23
7 Specifications	4	11.1 Layout Guidelines.....	23
7.1 Absolute Maximum Ratings	4	11.2 Layout Example.....	24
7.2 ESD Ratings	4	12 Device and Documentation Support	25
7.3 Recommended Operating Conditions	4	12.1 Documentation Support.....	25
7.4 Thermal Information	5	12.2 Receiving Notification of Documentation Updates..	25
7.5 Electrical Characteristics	5	12.3 サポート・リソース.....	25
7.6 Typical Characteristics.....	7	12.4 Trademarks.....	25
8 Detailed Description	13	12.5 静電気放電に関する注意事項.....	25
8.1 Overview.....	13	12.6 用語集.....	25
8.2 Functional Block Diagram.....	13	13 Mechanical, Packaging, and Orderable	
8.3 Feature Description.....	14	Information	25


4 Revision History

DATE	REVISION	NOTES
September 2020	*	Initial release

5 Device Comparison Table

DEVICE	DESCRIPTION
INA821	35- μ V V_{OS} , 0.4 μ V/ $^{\circ}$ C V_{OS} drift, 7-nV/ $\sqrt{\text{Hz}}$ Noise, HighBandwidth, Precision Instrumentation Amplifier
INA819	35- μ V V_{OS} , 0.4 μ V/ $^{\circ}$ C V_{OS} Drift, 8-nV/ $\sqrt{\text{Hz}}$ Noise, Low-Power, Precision Instrumentation Amplifier
INA333	25- μ V V_{OS} , 0.1 μ V/ $^{\circ}$ C V_{OS} drift, 1.8-V to 5-V, RRO, 50- μ A I_Q , chopper-stabilized INA
PGA280	20-mV to $\pm$ 10-V programmable gain IA with 3-V or 5-V differential output; analog supply up to $\pm$ 18 V
PGA112	Precision programmable gain op amp with SPI

6 Pin Configuration and Functions

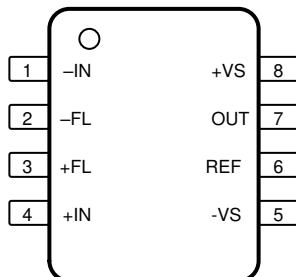

6-1. D Package, 8-Pin SOIC, Top View

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
-IN	1	I	Negative (inverting) input
+IN	4	I	Positive (noninverting) input
OUT	7	O	Output
-FL	2	I	Negative Filter Terminal.
+FL	3	I	Positive Filter Terminal.
REF	6	I	Reference input. This pin must be driven by a low impedance source.
-VS	5	—	Negative supply
+VS	8	—	Positive supply

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

			MIN	MAX	UNIT
V_S	Supply voltage	Single supply, $V_S = (+V_S)$		40	V
		Dual supply, $V_S = (+V_S) - (-V_S)$		± 20	
V_{IN}	Signal input pins	Common Mode ⁽²⁾	$(-V_S) - 0.5$	$(+V_S) + 0.5$	V
		Differential ⁽³⁾		± 0.5	
V_{REF}	VREF pin		$(-V_S) - 0.5$	$(+V_S) + 0.5$	V
V_{FL}	Filter input pins +FL, -FL		$(-V_S) - 0.5$	$(+V_S) + 0.5$	V
V_O	Signal output pins maximum voltage		$(-V_S) - 0.5$	$(+V_S) + 0.5$	V
I_O	Signal output pins maximum current		-50	50	mA
I_S	Output short-circuit ⁽⁴⁾		-50	50	mA
T_A	Operating temperature ⁽⁵⁾			125	°C
T_J	Junction temperature ⁽⁵⁾			175	°C
T_{stg}	Storage temperature			150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to the power-supply rails. Input signals that swing more than 0.5 V beyond the supply rails must be current-limited to 10 mA or less.
- (3) Input terminals are anti-parallel diode-clamped to each other. Input signals that cause differential voltages of swing more than ± 0.5 V must be current-limited to 10 mA or less.
- (4) Short-circuit to $V_S / 2$.
- (5) As a result of the quiescent current, a supply voltage and load-dependent self-heating of the device must be considered.

7.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	± 2000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾	± 750	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_S	Supply voltage	Single supply, $V_S = (+V_S)$	8	36	V
		Dual supply, $V_S = (+V_S) - (-V_S)$	± 4	± 18	
T_A	Specified temperature		-40	125	°C

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		INA848	UNIT
		D (SOIC)	
		8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	119.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	66.3	°C/W
R _{θJB}	Junction-to-board thermal resistance	61.9	°C/W
ψ _{JT}	Junction-to-top characterization parameter	20.5	°C/W
ψ _{JB}	Junction-to-board characterization parameter	61.4	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics

at T_A = 25°C, V_S = ±15 V, R_L = 10 kΩ, G = 2000 (fixed) and V_{REF} = 0 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
INPUT						
V _{OSI}	Input offset voltage			±10	±35	μV
		T _A = −40°C to +125°C ⁽¹⁾			±80	
	Input offset voltage drift	T _A = −40°C to +125°C		±0.1	±0.45	μV/°C
PSRR	Power-supply rejection ratio	±4 V ≤ (V _S) ≤ ±18 V	125	150		dB
Z _{in}	Input impedance			1 7		GΩ pF
	RFI filter, −3-dB frequency			250		MHz
V _{CM}	Operating input voltage ⁽³⁾	V _S = ±4 V to ±18 V	(−V _S) + 2.5		(+V _S) − 2.5	V
		V _S = ±4 V to ±18 V, T _A = −40°C to +125°C	See Figure 7-9			
CMRR	Common-mode rejection ratio	At dc to 60 Hz, RTI (−V _S) + 2.5 V < V _{CM} < (+V _S) − 2.5 V	132	150		dB
		At 50 kHz, RTI (−V _S) + 2.5 V < V _{CM} < (+V _S) − 2.5 V		110		
BIAS CURRENT						
I _B	Input bias current	V _{CM} = V _S / 2		25	50	nA
	Input bias current drift	T _A = −40°C to +125°C		40		pA/°C
I _{OS}	Input offset current	V _{CM} = V _S / 2		2	10	nA
	Input offset current drift	T _A = −40°C to +125°C		10		pA/°C
NOISE VOLTAGE						
e _{NI}	Input voltage noise	f = 1 kHz, R _S = 0 Ω		1.3	1.5 ⁽²⁾	nV/√Hz
		f _B = 0.1 Hz to 10 Hz, R _S = 0 Ω		55		nV _{PP}
I _n	Input current noise	f = 1 kHz		1.85		pA/√Hz
		f _B = 0.1 Hz to 10 Hz		75		pA _{PP}
GAIN						
G	First stage gain			200		V/V
	Subtractor stage gain			10		V/V
GE	Total gain error	V _O = ±10 V		0.05	0.15 ^{(1) (2)}	%
	Total gain drift	T _A = −40°C to +125°C			5 ^{(1) (2)}	ppm/°C
	Total gain nonlinearity	V _O = −10 V to +10 V, no load		10		ppm

7.5 Electrical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $G = 2000$ (fixed) and $V_{REF} = 0\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
THD+N	Total harmonic distortion and noise	f = 20 kHz, V _O = 10 V _{pp}		−109		dBc
HD2	Second-order harmonic distortion	f = 20 kHz, V _O = 10 V _{pp}		−112		dBc
HD3	Third-order harmonic distortion	f = 20 kHz, V _O = 10 V _{pp}		−119		dBc
THD+N	Total harmonic distortion and noise	R _L = 1 MΩ, f = 20 kHz, V _O = 10 V _{pp}		−111		dBc
HD2	Second-order harmonic distortion	R _L = 1 MΩ, f = 20 kHz, V _O = 10 V _{pp}		−117		dBc
HD3	Third-order harmonic distortion	R _L = 1 MΩ, f = 20 kHz, V _O = 10 V _{pp}		−118		dBc
OUTPUT						
	Output voltage swing		(−V _S) + 0.15	(+V _S) − 0.15		V
C _L	Load capacitance	In stable condition		1000		pF
I _{SC}	Short-circuit current	Continuous to V _S / 2		±30		mA
FREQUENCY RESPONSE						
BW	Bandwidth, −3 dB			2.8		MHz
SR	Slew rate	V _{STEP} = 10 V	35 ⁽¹⁾	45		V/μs
t _S	Settling time	0.01%, V _{STEP} = 10 V		0.5		μs
		0.001%, V _{STEP} = 10 V		0.9		
REFERENCE INPUT						
R _{IN}	Input impedance			132		kΩ
I _{IN}	Input current			6.5		μA
	Reference input voltage		−V _S		+V _S	V
	Gain to output			1		V/V
	Reference gain error			0.01		%
FILTER INPUTS						
R _{FIL}	Input impedance, filter terminal			6		kΩ
	Voltage range, filter terminal		−V _S		+V _S	V
POWER SUPPLY						
I _Q	Quiescent current	V _{IN} = 0 V		6.2	6.6	mA
		T _A = −40°C to +85°C			7.9	
		T _A = −40°C to +125°C			8.8	


(1) Specified by characterization.

(2) Specified by design.

(3) The input voltage range depends on the common-mode voltage, differential voltage, gain, and reference voltage.


7.6 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{\text{REF}} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

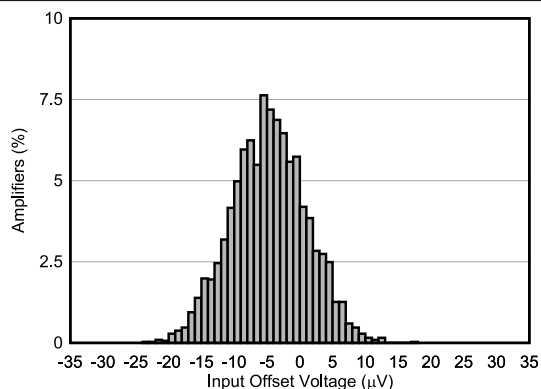


N = 3172, mean = $-4.678\text{ }\mu\text{V}$, std dev = $5.715\text{ }\mu\text{V}$

7-1. Typical Distribution of Input Offset Voltage

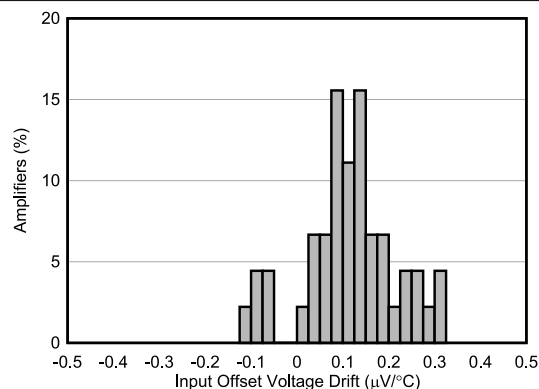


N = 45, mean = $0.116\text{ }\mu\text{V}/^\circ\text{C}$, std dev = $0.102\text{ }\mu\text{V}/^\circ\text{C}$

7-2. Typical Distribution of Input Offset Voltage Drift

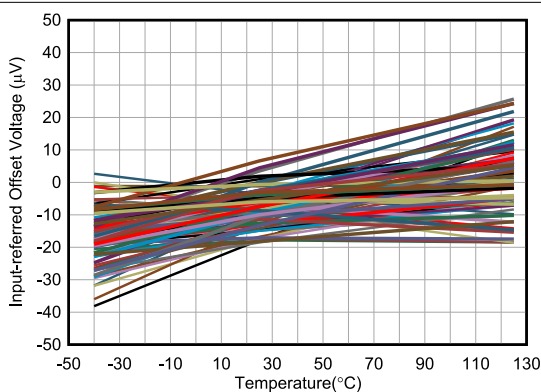


N = 48

7-3. Input-referred Offset Voltage vs Temperature

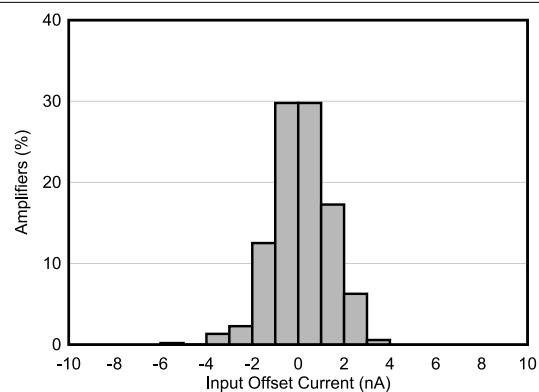


N = 527, mean = 0.1369 nA , std dev = 1.222 nA

7-4. Typical Distribution of Input Offset Current

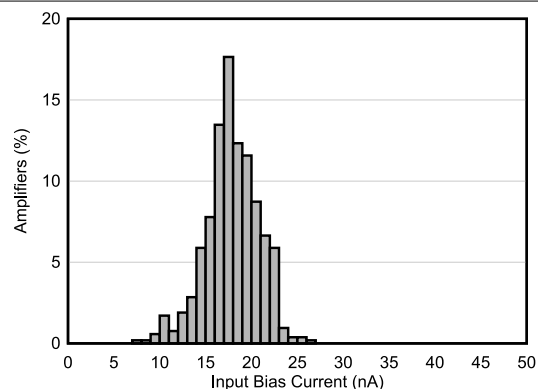

N = 527, mean = 17.876 nA , std dev = 2.875 nA

7-5. Typical Distribution of Input Bias Current

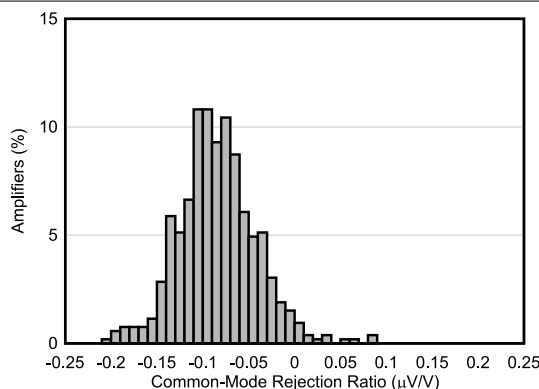


N = 527, mean = $-0.0840\text{ }\mu\text{V}/\text{V}$, std dev = $0.0420\text{ }\mu\text{V}/\text{V}$


7-6. Typical CMRR Distribution

7.6 Typical Characteristics (continued)


at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{\text{REF}} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

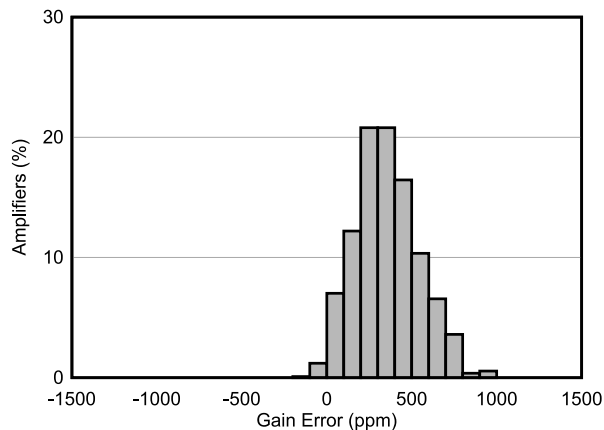


7-7. Typical Distribution of Gain Error

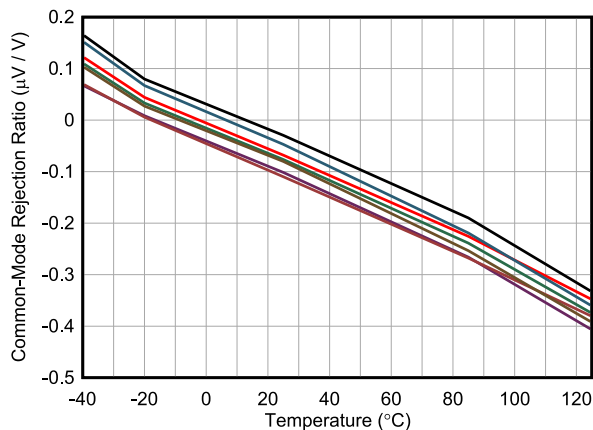


7-8. CMRR vs Temperature

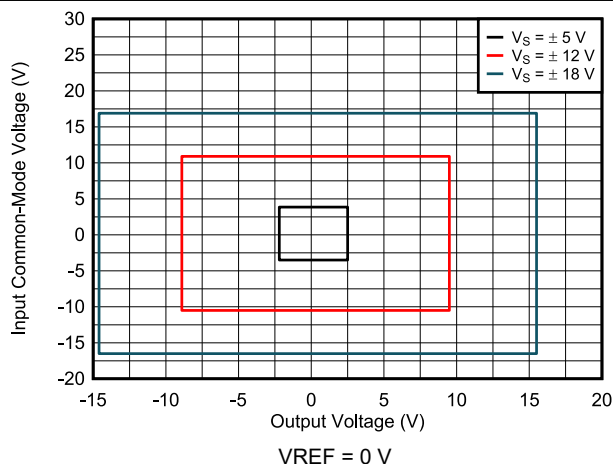


7-9. Input Common-Mode Voltage vs Output Voltage

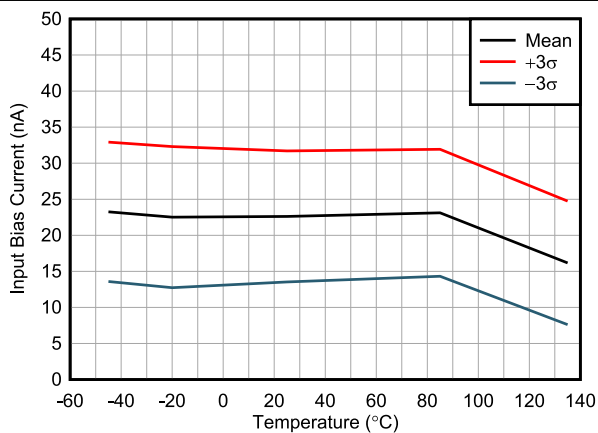

7-10. Input Bias Current vs Temperature

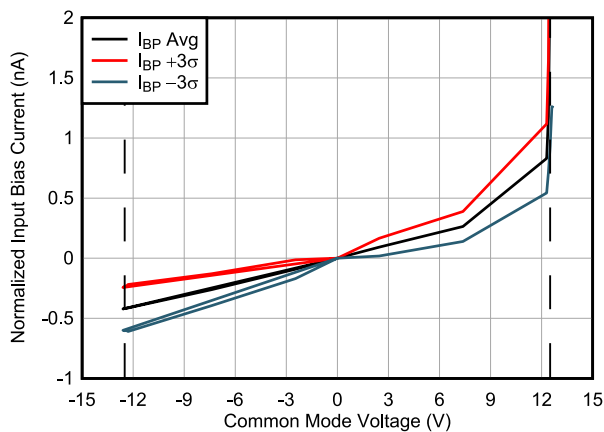


7-11. Positive Input Bias Current vs Input Common-Mode Voltage

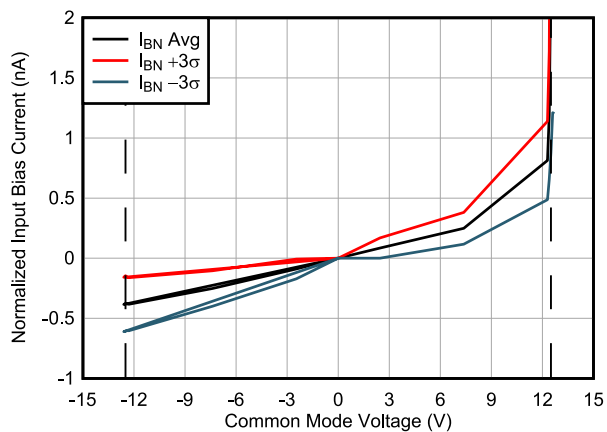


7-12. Negative Input Bias Current vs Input Common-Mode Voltage

7.6 Typical Characteristics (continued)


at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{\text{REF}} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

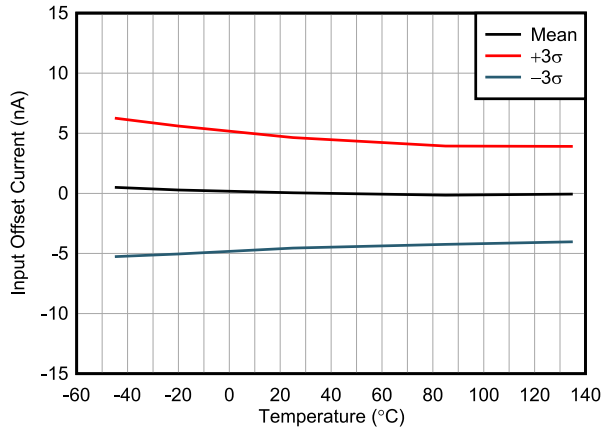


7-13. Input Offset Current vs Temperature

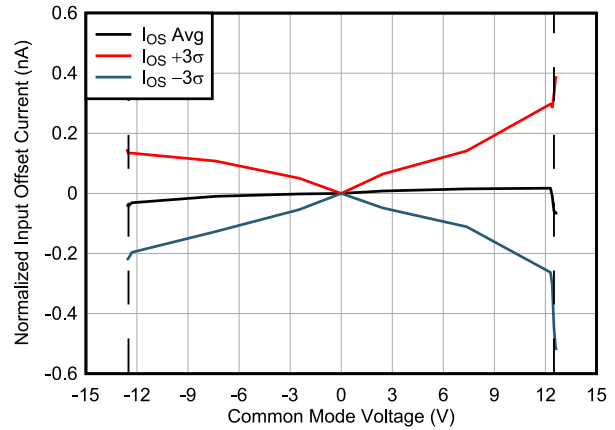


7-14. Input Offset Current vs Input Common-Mode Voltage

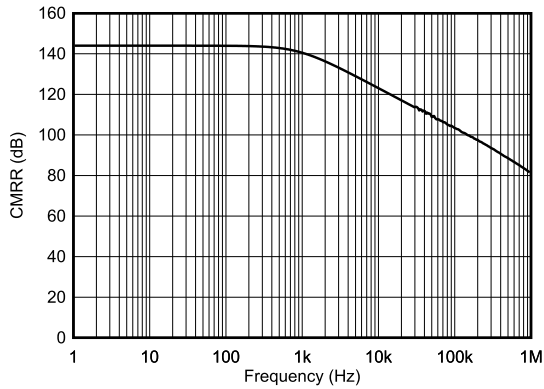


7-15. CMRR vs Frequency (RTI)

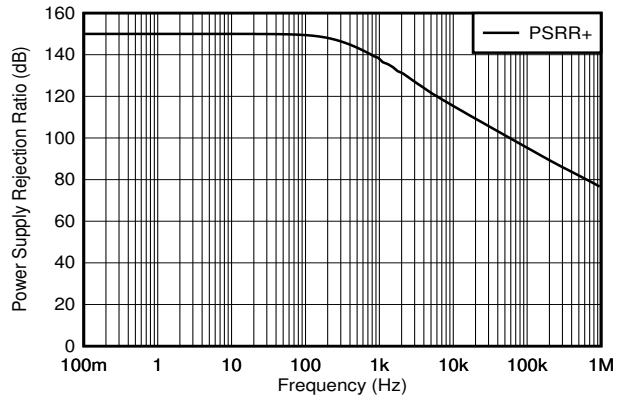

7-16. Positive PSRR vs Frequency (RTI)

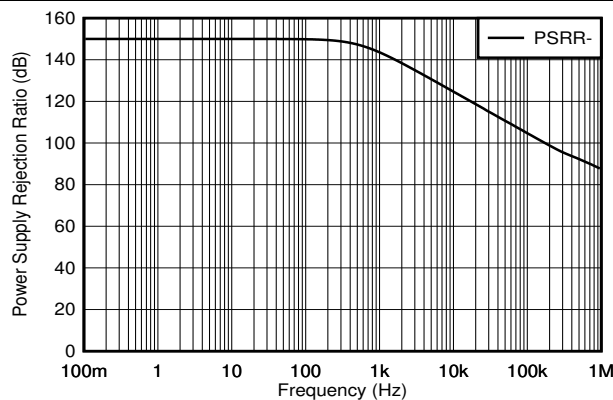


7-17. Negative PSRR vs Frequency (RTI)

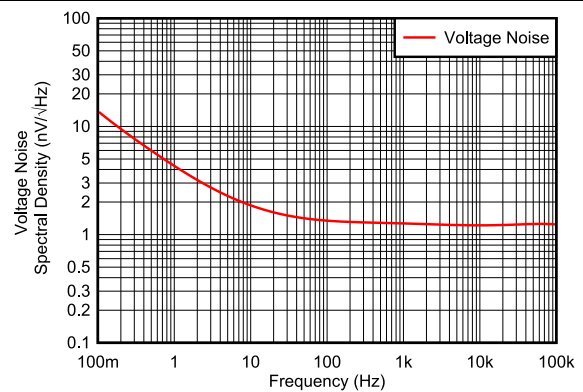


7-18. Voltage Noise Spectral Density vs Frequency (RTI)

7.6 Typical Characteristics (continued)


at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{REF} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

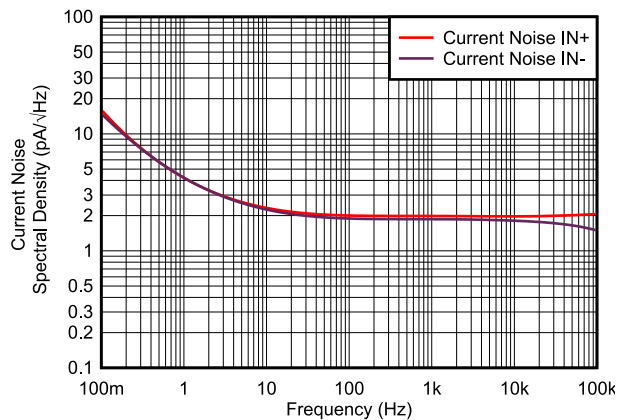

7-19. Current Noise Spectral Density vs Frequency (RTI)

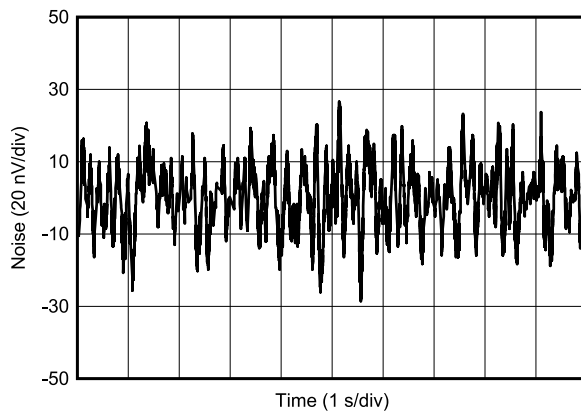


7-20. 0.1-Hz to 10-Hz RTI Voltage Noise

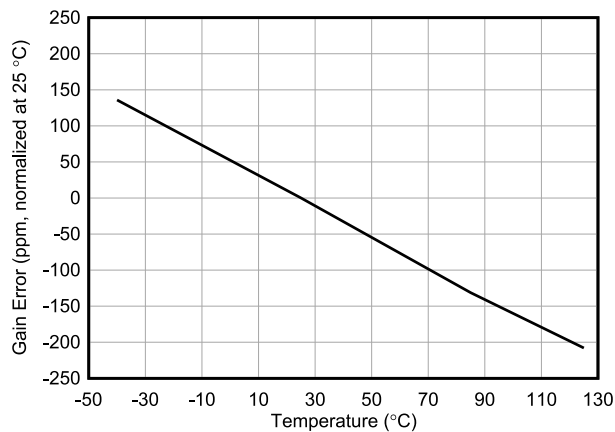


No Load


7-21. Gain Error vs Temperature

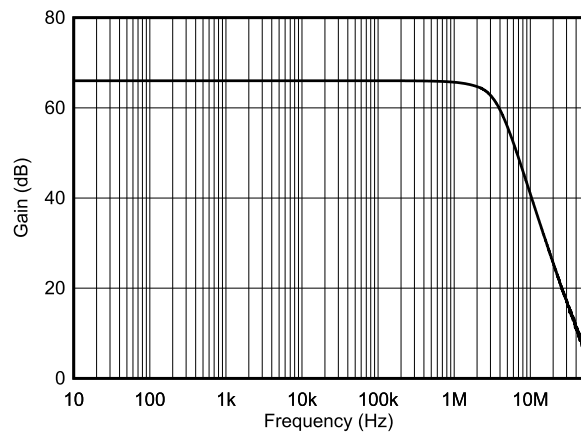

7-22. Closed Loop Gain vs Frequency

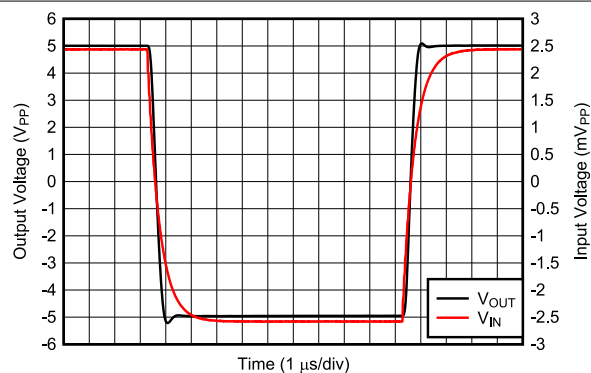


7-23. Large-Signal Step Response

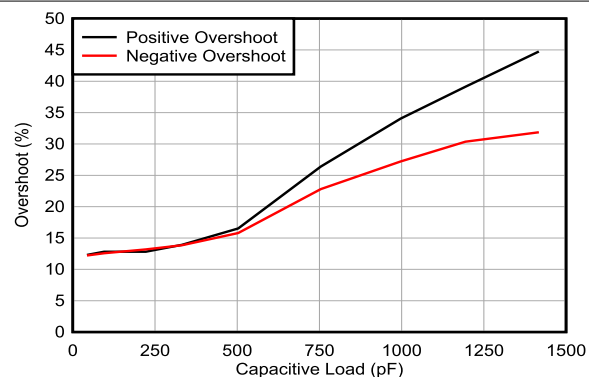


7-24. Small Signal Response vs Capacitive Loads

7.6 Typical Characteristics (continued)


at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{\text{REF}} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

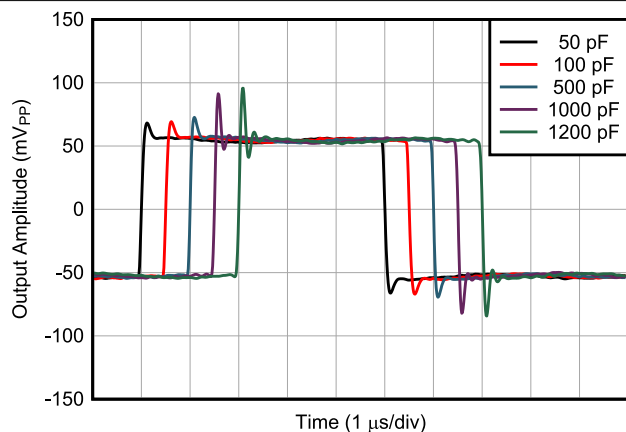


7-25. Small Signal Response

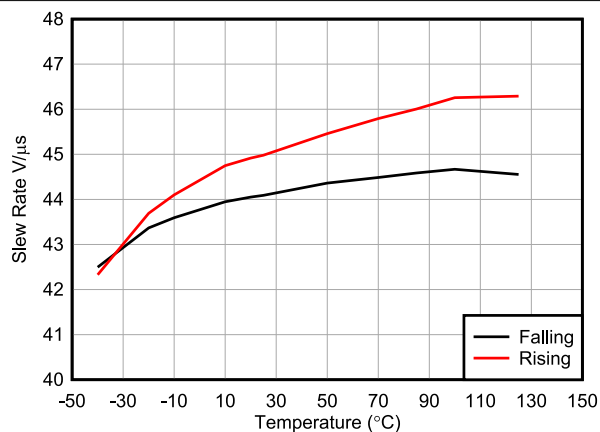


7-26. Slew Rate vs Temperature

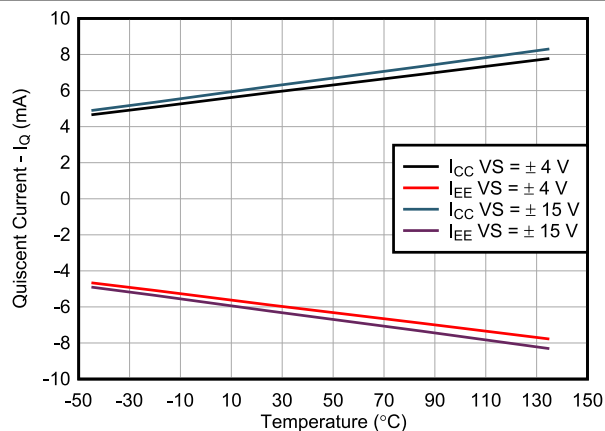


7-27. Supply Current vs Temperature

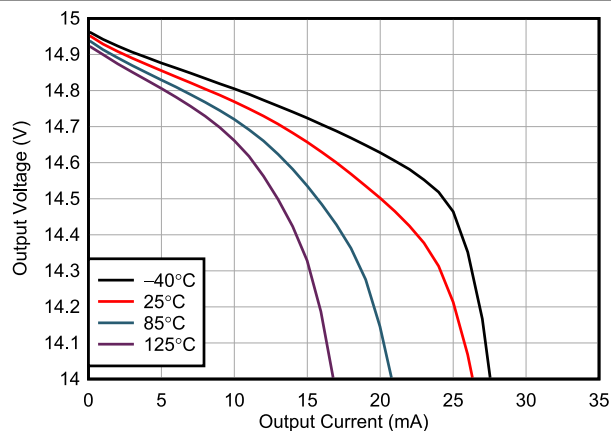

7-28. Positive Output Voltage Swing vs Output Current

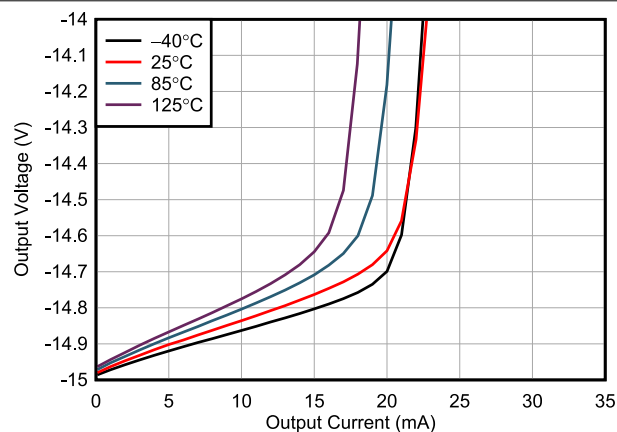


7-29. Negative Output Voltage Swing vs Output Current

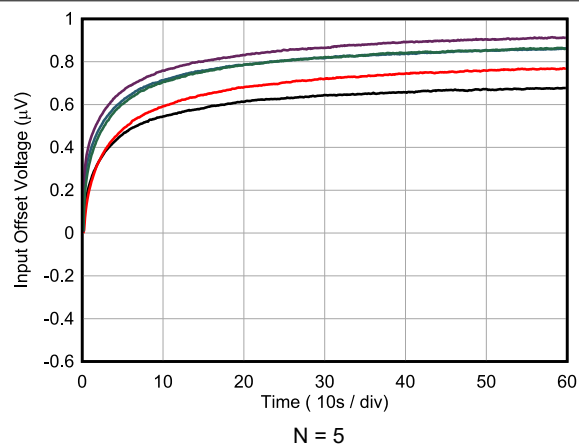

7-30. Input-Referred Offset Voltage vs Settling Time

7.6 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{ V}$, $R_L = 10\text{ k}\Omega$, $V_{\text{REF}} = 0\text{ V}$, and $G = 2000$ (unless otherwise noted)

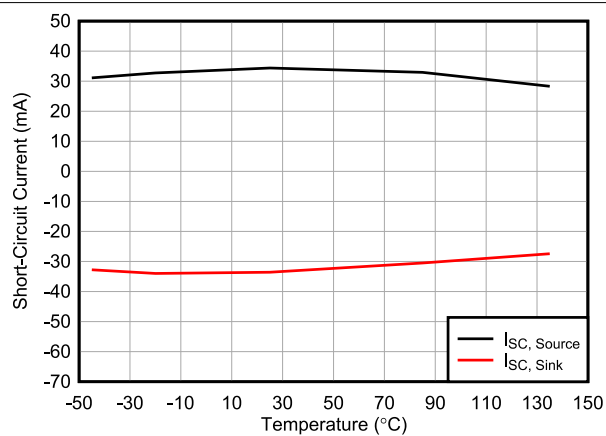

7-31. Short Circuit Current (Source + Sink) vs Temperature


8 Detailed Description

8.1 Overview

The INA848 is a monolithic precision instrumentation amplifier incorporating a current-feedback input stage and a four-resistor difference amplifier output stage. The differential input voltage is buffered by Q_1 and Q_2 and is forced across R_G , which causes a signal current to flow through R_G , R_1 , and R_2 . The output difference amplifier (A_3) removes the common-mode component of the input signal and refers the output signal to the REF pin. The V_{BE} and voltage drop across R_1 and R_2 produce output voltages on A_1 and A_2 that are approximately 0.8 V lower than the input voltages.

In common instrumentation amplifiers, an external gain resistor is used to set the gain. However, this external gain resistor affects the gain drift due to the mismatch in temperature coefficient between the external and internal resistors. The INA848 integrates the gain setting resistor with a fixed gain of 2000, thus matching the temperature drifts of the resistor network. This integration results in an total gain accuracy of 5 ppm/°C (maximum).

8.2 Functional Block Diagram

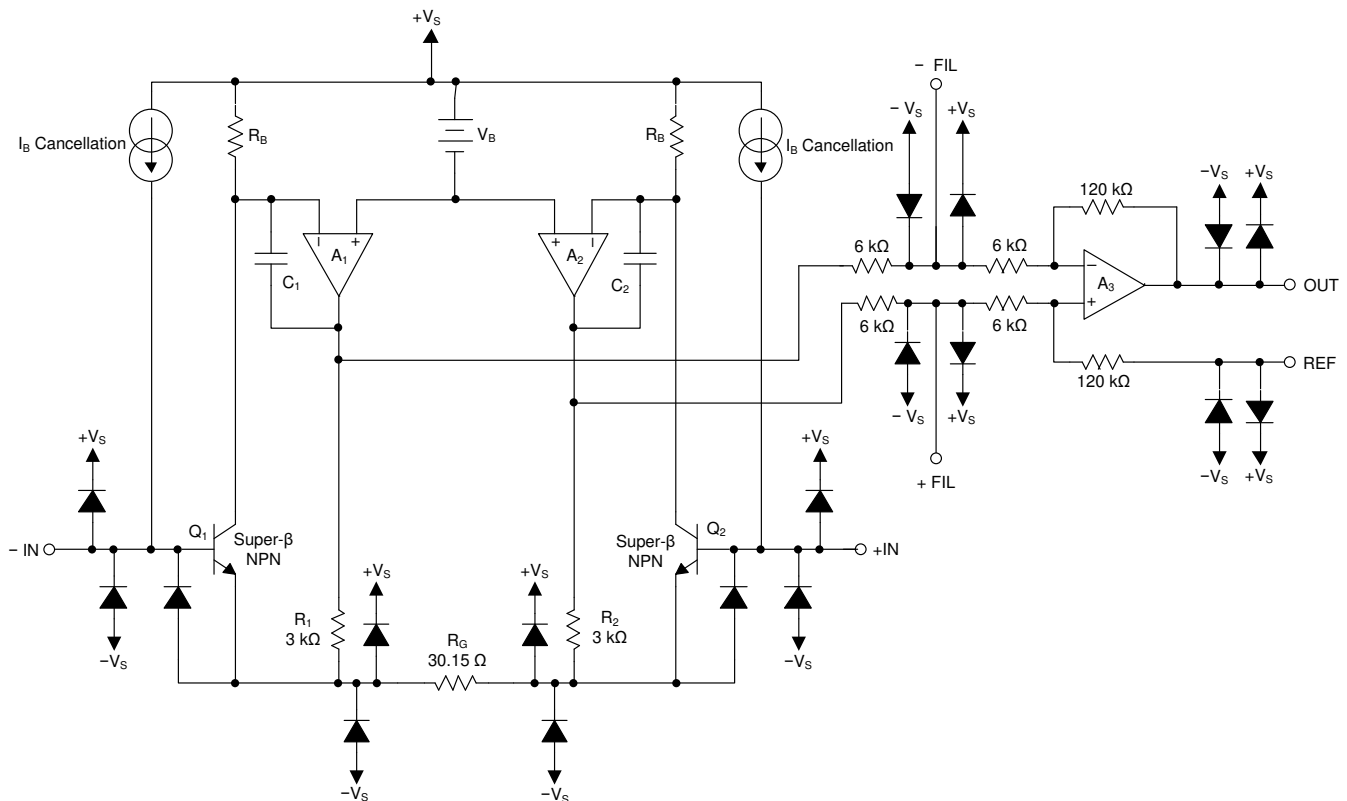

8.3 Feature Description

8.3.1 Topology

The INA848 is designed with TI's modern bipolar process that features super-beta input transistors.

Traditional bipolar transistors feature excellent voltage noise and offset drift, but suffer a tradeoff in high input bias current and high input bias current noise.

TI's super-beta transistors offer the benefits of low voltage noise, low offset voltage drift with an additional improvement in reduction of the input bias current noise.

As shown in [Figure 8-1](#), the INA848 is designed with a current feedback input stage that is optimized for high bandwidth in high gains. The device consists of three operational amplifiers configured at the front with a gain stage that integrates the gain resistor. This input stage preamplifies the differential input signal at a gain of 200. The output stage with the difference amplifier provides additional amplification of a gain of 10.

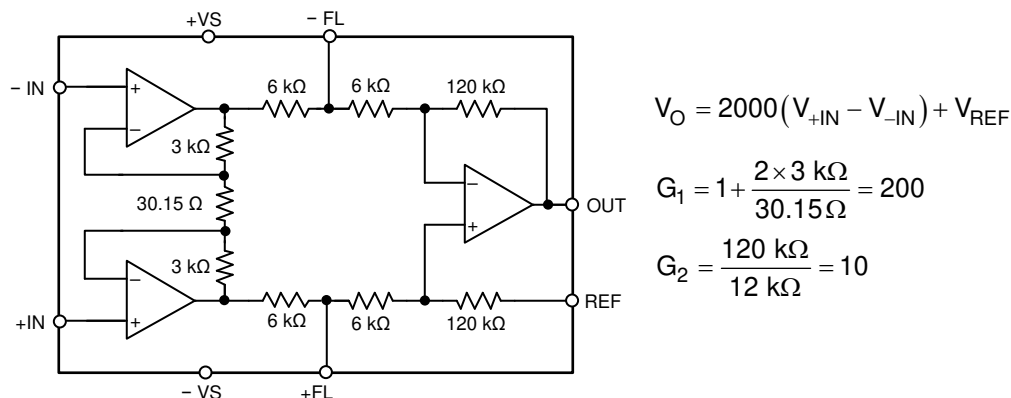


Figure 8-1. Simplified Diagram of the INA848 With Gain and Output Equations

8.3.2 Input Common-Mode Range

The typical three-op-amp topology gains up the input differential signal in the front stage and rejects the common-mode signals in the back end at the difference amplifier stage. The difficulty in particular is to excel driving high gains, and thus tiny input signals, and still be able to reject high common-mode signals. A low-noise instrumentation amplifier such as the INA848 is designed for such requirements, with the ability to measure the smallest input signals surrounded by noisy or large common-mode voltages.

The methodology here is achieved by splitting up the gain stages. The front end preamplifies the input signal at a gain of 200, and the difference amplifier further amplifiers at a gain of 10. The resulting advantage is that the common-mode range versus the differential signal is improved compared to single gain stage approach, as shown in [Figure 8-2](#).

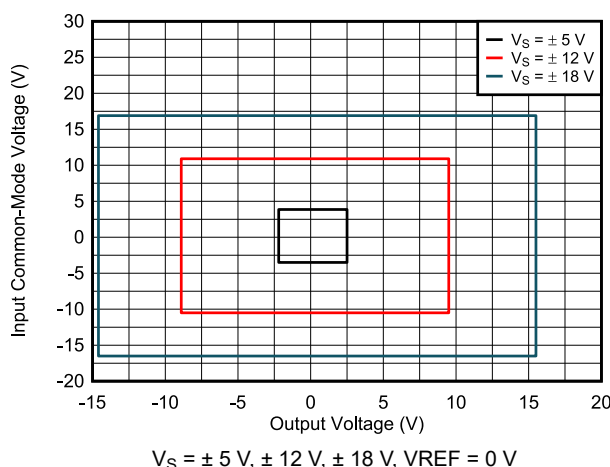


Figure 8-2. Input Common-Mode Voltage vs Output Voltage

The INA848 gives the super-beta input stage features very low input bias current as compared to standard bipolar technology. The low input bias current and current noise make the INA848 an excellent choice for high-performance applications. See [Figure 7-10](#) through [Figure 7-12](#) for reference.

8.3.3 Input Protection

The inputs of the INA848 device are individually protected for voltages up to ± 20 V which is stated in [セクション 7.1](#). If these rating cannot be met, additional protection circuitry must be considered at the input pins to minimize the current flowing in case of fault.

During an input overvoltage condition, current flows through the input protection diodes into the power supplies; see [図 8-3](#). If the power supplies are unable to sink current, then Zener diode clamps (ZD1 and ZD2) must be placed on the power supplies to provide a current pathway to ground.

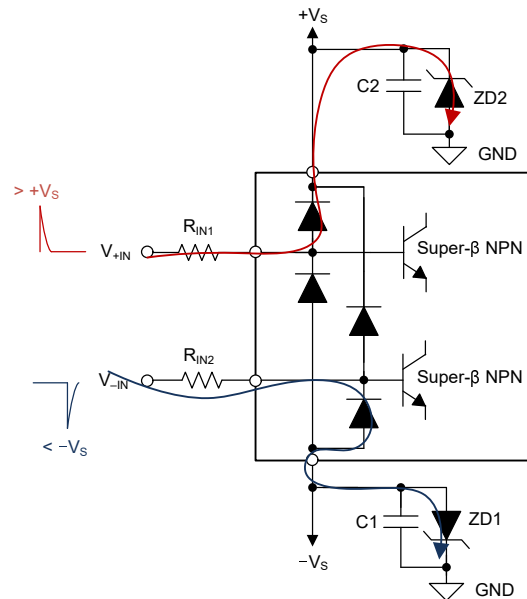


図 8-3. Input Current Path During an Overvoltage Condition

For an overvoltage condition, use an external resistor (R_{IN1} , R_{IN2}) to limit the current. The following equation gives the calculation for the protection resistors:

$$R_{IN1} = \frac{(V_{+IN}) - (+V_S)}{I_{MAX}} \quad (1)$$

where:

- V_{+IN} is the maximum input voltage
- $+V_S$ is the positive supply rail
- I_{MAX} is the maximum current allowed = 10 mA

Calculate R_{IN2} using the same method, substituting with V_{-IN} , $-V_S$, and $-I_{MAX}$.

Any additional resistance to the input pins adds more noise to the system. For more details, see [セクション 9.2.2.2](#).

8.4 Device Functional Modes

The INA848 has a single functional mode and is operational when the power supply voltage is greater than 4.5 V (± 2.25 V). The maximum power-supply voltage for the INA848 is 36 V (± 18 V).

9 Application and Implementation

Note

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

9.1 Application Information

9.1.1 Filter Pin

The INA848 allows access between the two amplification stages. In applications surrounded from high input noise, adding filter stages can be of high benefit. [図 9-1](#) and [図 9-2](#) show two different filter scenarios that help filter out undesired differential signals.

9.1.1.1 RC Filter Network

In environments where known high-frequency noise must be eliminated, use a low-pass filter containing a capacitor, and optionally, a resistor.

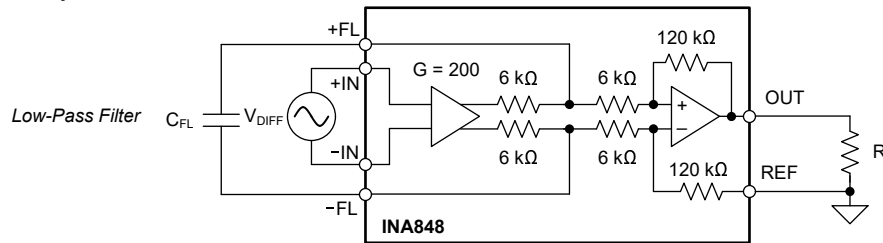


図 9-1. Low-pass Filter

The –3-dB cross frequency is determined given following equation:

$$f_{FL1} = \frac{1}{2\pi \cdot 6k\Omega \cdot C_{FL}} \quad (2)$$

Where 6 kΩ represents the internal resistor network. Use the [Analog Engineer's Calculator](#) for fast and easy bode plot visualization.

9.1.1.2 RLC Filter Network

In environments where a known, narrow-frequency band must be attenuated, a series LC filter network can be added between the filter pins, as shown in [図 9-2](#). The connection adds to the internal resistor network, and results in a RLC filter network that is also commonly known as bandstop filter.

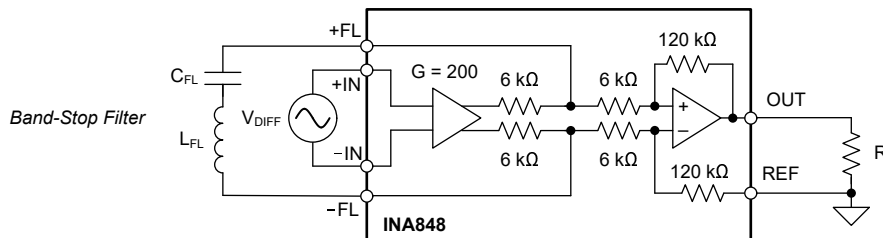


図 9-2. Bandstop Filter

Use [式 3](#) to calculate the middle frequency of the filter:

$$f_{FL2} = \frac{1}{2\pi \cdot \sqrt{C_{FL} \cdot L_{FL}}} \quad (3)$$

In general, the width of the stopband is between one and two decades, meaning that the highest attenuation is between 10 to 100 around the middle frequency. This indication is commonly defined as the quality factor (Q factor) of the filter and is calculated by:


$$Q = \frac{1}{R} \cdot \sqrt{\frac{L_{FL}}{C_{FL}}} \quad (4)$$

The resistor is given by the internal resistor of 6 kΩ; therefore, the damping factor of the filter can further be affected of the series resistance of the inductor L_{FL} . For stable operation of the filter, choose an inductor in the range of 100 μH.

9.1.2 Input Bias Current Return Path

The input impedance of the INA848 is extremely high (approximately 100 GΩ). However, a path must be provided for the input bias current of both inputs. This input bias current is typically 25 nA. High input impedance means that this input bias current changes little with varying input voltage.

Input circuitry must provide a path for this input bias current for proper operation. [Figure 9-3](#) shows various provisions for an input bias current path. Without a bias current path, the inputs float to a potential that exceeds the common-mode range of the INA848, and the input amplifiers saturate. If the differential source resistance is low, the bias current return path connects to one input (as shown in the thermocouple example in [Figure 9-3](#)). With a higher source impedance, using two equal resistors provides a balanced input with possible advantages of a lower input offset voltage as a result of bias current, and better high-frequency common-mode rejection.

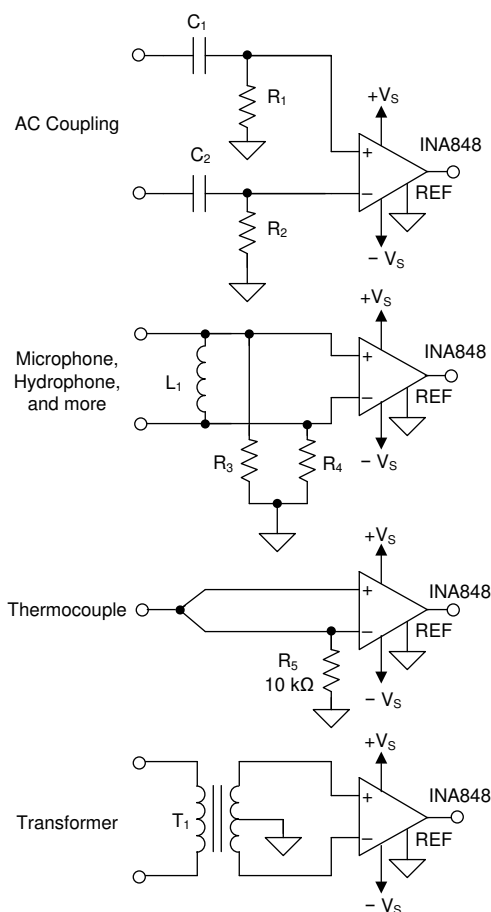

NOTE: Center tap in the transformer provides bias current return.

Figure 9-3. Providing an Input Common-Mode Current Path

9.2 Typical Application

Figure 9-4 shows a typical application for the INA848.

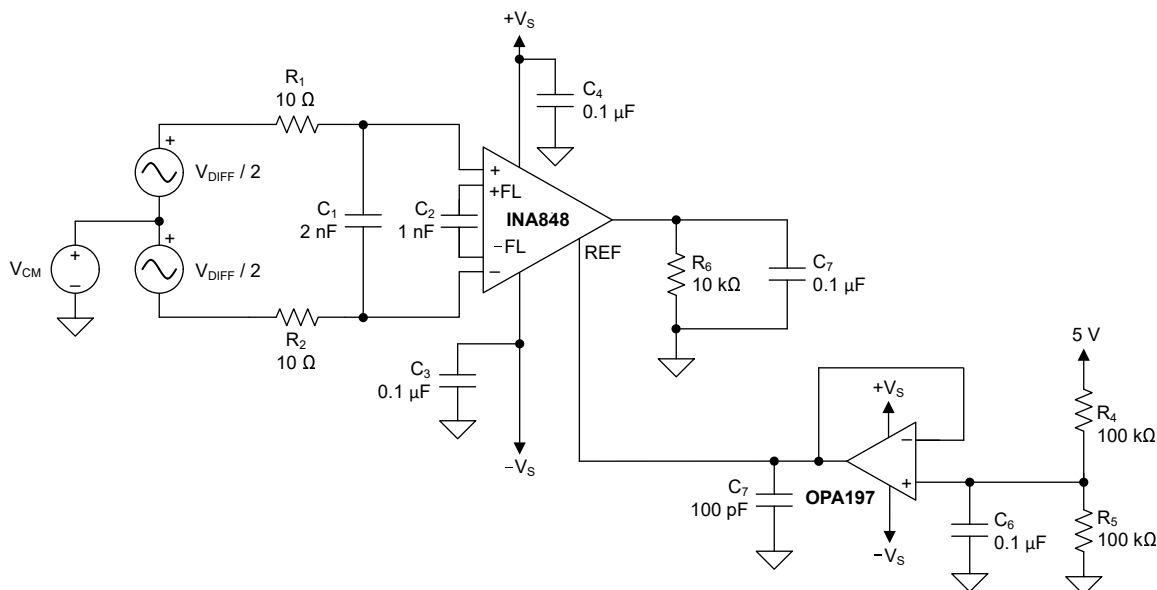


Figure 9-4. Sensor Conditioning ($V_{DIFF} < 5 \text{ mV}$, $V_{S\pm} = 15 \text{ V}$)

9.2.1 Design Requirements

For this application, the design requirements are:

- Differential input signal of $V_{DIFF} = 2.5 \text{ mV}$
- Common-mode input voltage of $V_{CM} = 10 \text{ V}$
- Power-supply voltage of $V_S = \pm 15 \text{ V}$
- Reference voltage buffered to $V_{REF} = 2.5 \text{ V}$
- Output range within 0 V to 5 V
- First-order filter stage with -3-dB frequency of 27 kHz

9.2.2 Detailed Design Procedure

9.2.2.1 Reference Pin

The output voltage of the INA848 is developed with respect to the voltage on the reference pin (REF.)

The voltage source applied to the reference pin of the INA848 must have a low output impedance ($R_{REF} > 5\ \Omega$). Any additional resistance at the reference pin creates an imbalance in the four resistors of the internal difference amplifier, resulting in degraded common-mode rejection ratio (CMRR).

Voltage reference devices are an excellent option for providing a low-impedance voltage source for the reference pin. However, if a resistor voltage divider generates a reference voltage, the divider must be buffered by an op amp, as shown in [Figure 9-5](#), to avoid CMRR degradation.

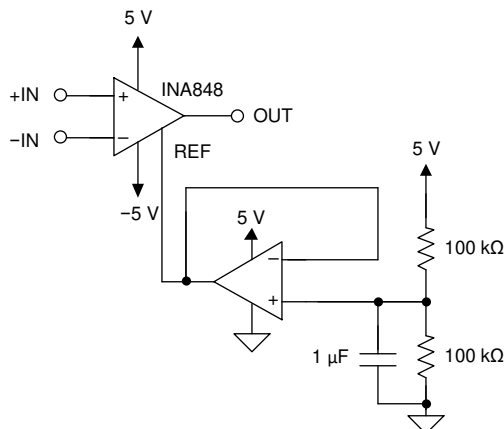


Figure 9-5. Buffer to drive the Reference Voltage

Often in dual-supply operation, the reference pin connects to the low-impedance system ground. The degradation effect of common-mode rejection ratio is thus negligible as long as the output voltage (V_{OUT}) is referred to the reference pin (REF).

In single-supply operation, the output signal is offset to a precise midsupply level (for example, 2.5 V in a 5-V supply environment). In applications where the output voltage is offset to a reference voltage but referred to system ground, the degradation effect of common-mode rejection ratio must be considered.

9.2.2.2 Noise Analysis

Low-noise instrumentation amplifiers such as the INA848 are designed to serve stringent and sensitive applications, such as surgical tools, microphones or other precision monitoring systems. A thorough noise analysis is a key element in the design process.

TI's super-beta transistors offer the benefits of low voltage noise and low current noise, thus allowing the INA848 excellent noise performance.

Figure 9-6 shows a simplified noise model including the gain stages of the INA848.

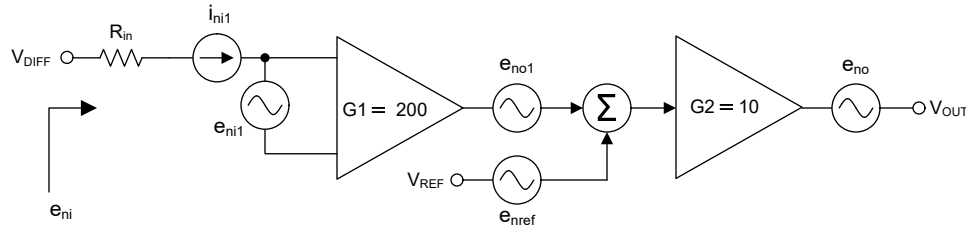


Figure 9-6. Simplified Noise Model

To get the total input-referred noise, e_{ni} , consider the source resistance seen by the positive and negative input pins of the instrumentation amplifier. The key elements that must be considered for a noise analysis in an instrumentation amplifier are:

- Current noise density i_{ni1} of the INA, see [セクション 7.5](#)
- Voltage noise density e_{ni1} of the INA, see [セクション 7.5](#)
- Voltage noise density caused by source resistance $i_{ni} \times R_{in}$
- Resistor noise from source resistance e_{nRin} , given by: $\sqrt{R_{in}} \times 4.04 \text{ nV}/\sqrt{\text{Hz}}$
- Reference voltage noise e_{nref}

The noise sources are uncorrelated (that is, the noise signal is unpredictable). The result of multiple uncorrelated noise sources is the square root of the sum of their squares (RSS). Thus, the total RTI noise density, e_{ni} , in $\text{nV}/\sqrt{\text{Hz}}$ can be derived from the following equation:

$$e_{ni} = \sqrt{e_{ni1}^2 + e_{n(Rin)}^2 + (i_{ni1} \cdot R_{in})^2 + \left(\frac{e_{n(REF)}}{G1}\right)^2} \quad (5)$$

9.2.2.2.1 Reference Voltage Noise Contribution

Figure 9-7 shows the noise model of the reference buffer circuit given by Figure 9-5 using the OPA197 amplifier.

To compute the total noise for the reference buffer circuit, consider the thermal noise of the divider (that is a parallel network from noise perspective), the amplifier voltage noise (that is, $e_{nOPA} = 5.5 \text{ nV}/\sqrt{\text{Hz}}$), and the voltage noise developed from the current noise of the amplifier (that is, $i_{nOPA} = 1.5 \text{ fA}/\sqrt{\text{Hz}}$) through the divider.

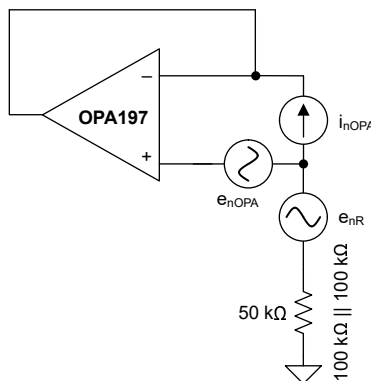


Figure 9-7. Reference Voltage Noise Model

Thus the total reference noise can be derived from following equation:

$$e_{n(REF)} = \sqrt{e_{nOPA}^2 + (\sqrt{R} \cdot 4.04 \text{ nV}/\sqrt{\text{Hz}})^2 + (i_{nOPA} \cdot R)^2} \quad (6)$$

The reference noise is divided by the first gain stage of 200 at the INA848 to compute the input-referred noise. For reference noise less than $80 \text{ nV}/\sqrt{\text{Hz}}$, this contribution can be neglected in the analysis. The given example results in a total reference noise of $29 \text{ nV}/\sqrt{\text{Hz}}$, and thus is neglected.

9.2.3 Application Curves

From Figure 9-6, the source resistance is shown to be one main contributor. Figure 9-8 plots all the individual noise contributors depending on the source resistance. The reference voltage noise is negligible.

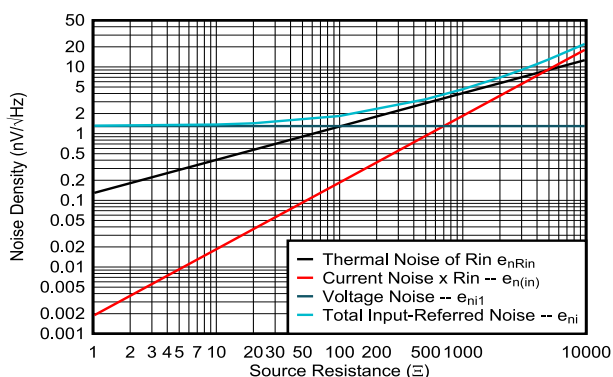


Figure 9-8. Noise Density vs Source Resistance

If the source resistance is below 20Ω , the voltage noise of the INA (typically $1.3 \text{ nV}/\sqrt{\text{Hz}}$) is dominating. If the source resistance is increasing ($> 20 \Omega$) the thermal noise of the source resistance is dominating. At this point the low-noise advantage of the INA848 does not provide additional value. In applications with even higher source resistance ($> 1 \text{ k}\Omega$), the current noise of the INA starts to dominate, and thus, should be optimized.

10 Power Supply Recommendations

The nominal performance of the INA848 is specified with a supply voltage of ± 15 V and midsupply reference voltage. The device operates using power supplies from ± 4 V (8 V) to ± 18 V (36 V) and non-midsupply reference voltages with excellent performance.

CAUTION

Supply voltages higher than 40 V (± 20 V) can permanently damage the device. Parameters that vary over supply voltage or temperature are shown in [セクション 7.6](#) of this data sheet.



11 Layout

11.1 Layout Guidelines

For best operational performance of the device, use good PCB layout practices, including:

- Take care to make sure that both input paths are well-matched for source impedance and capacitance to avoid converting common-mode signals into differential signals.
- Noise propagates into analog circuitry through the power pins of the circuit as a whole and of the device. Bypass capacitors reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
 - Connect low-ESR, 0.1- μ F ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from +VS to ground is applicable for single-supply applications.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better than in parallel with the noisy trace.
- Place the external components (filter components, load) as close to the device as possible.
- Use ground layer to minimize the parasitic inductance of the board.
- Keep the traces as short as possible.

11.2 Layout Example

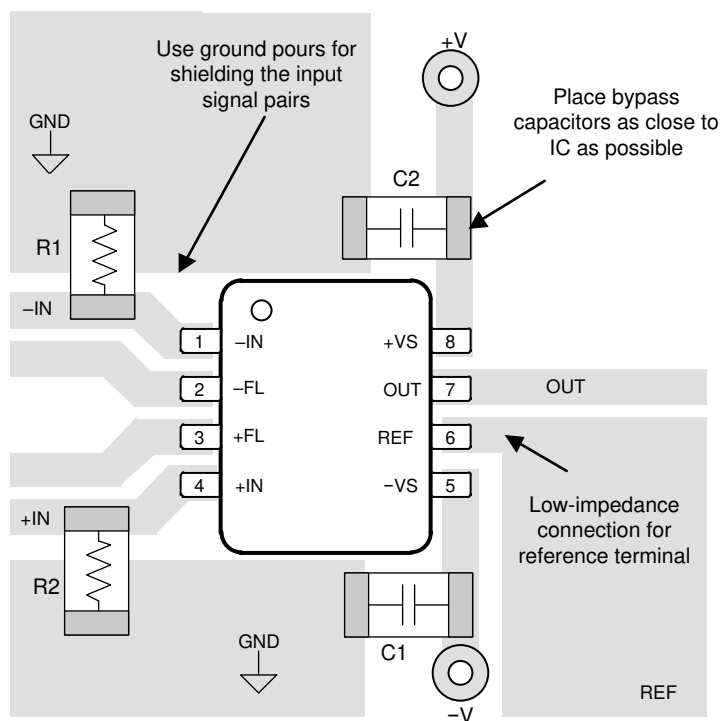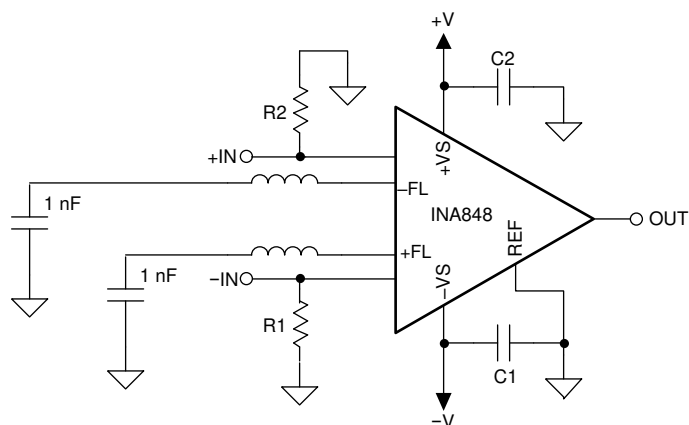

11-1. Example Schematic and Associated PCB Layout
(inductors and capacitors shown on FL pins are optional)

12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [REF50xx Low-Noise, Very Low Drift, Precision Voltage Reference](#)
- Texas Instruments, [OPA191 Low-Power, Precision, 36-V, e-trim CMOS Amplifier](#)
- Texas Instruments, [TINA-TI software folder](#)
- Texas Instruments, [INA Common-Mode Range Calculator](#)

12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.3 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

12.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

12.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい ESD 対策をとらないと、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

12.6 用語集

TI 用語集 この用語集には、用語や略語の一覧および定義が記載されています。

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
INA848ID	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	INA848
INA848ID.B	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	INA848
INA848IDR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	INA848
INA848IDR.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	INA848

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
INA848IDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
INA848IDR	SOIC	D	8	2500	356.0	356.0	35.0

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
INA848ID	D	SOIC	8	75	506.6	8	3940	4.32
INA848ID.B	D	SOIC	8	75	506.6	8	3940	4.32



D0008A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



4214825/C 02/2019

NOTES:


1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

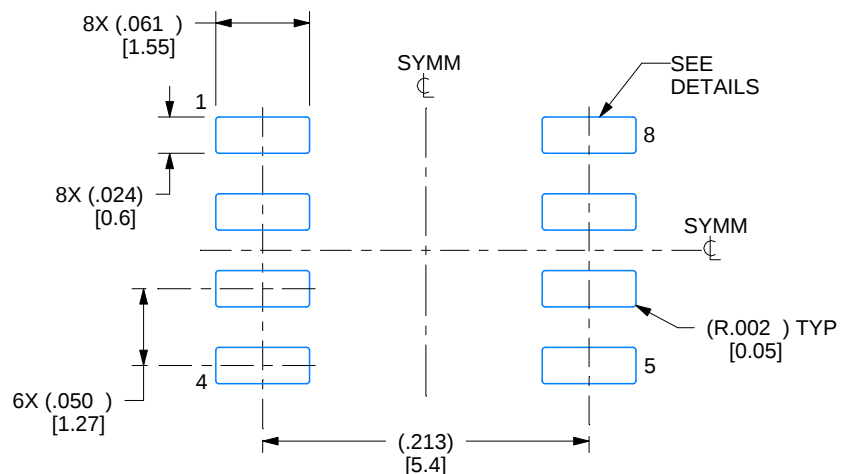

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated