

JFE2140 超低ノイズ、マッチング、デュアル、低ゲート電流、ディスクリート、オーディオ、N チャンネル JFET



1 特長

- 超低ノイズ:
 - 電圧ノイズ:
 - 1kHz, $I_{DS} = 5\text{mA}$ で $0.9\text{nV}/\sqrt{\text{Hz}}$
 - 1kHz, $I_{DS} = 2\text{mA}$ で $1.1\text{nV}/\sqrt{\text{Hz}}$
 - 電流ノイズ: 1kHz で $1.6\text{fA}/\sqrt{\text{Hz}}$
- 小さい V_{GS} ミスマッチ: 4mV (最大値)
- 低ゲート電流: 10pA (最大値)
- 低入力容量: $V_{DS} = 5\text{V}$ で 13pF
- ゲート - ドレイン間およびゲート - ソース間の高ブレークダウン電圧: -40V
- 高相互コンダクタンス: 30mS
- パッケージ: SOIC、2mm × 2mm WSON

2 アプリケーション

- マイクロフォン入力
- ハイドロフォンと海洋機器
- DJ コントローラ、ミキサ、その他の DJ 機器
- 業務用オーディオ・ミキサ / 制御卓
- ギター・アンプ / その他楽器用アンプ
- 状況監視センサ

3 概要

JFE2140 は、テキサス・インスツルメンツの最新の高性能アナログ・バイポーラ・プロセスで構築された Burr-Brown™ オーディオのマッチドペア・ディスクリート JFET です。JFE2140 は、従来のディスクリート JFET テクノロジーでは利用できなかった性能を備えています。JFE2140 はすべての電流範囲にわたって優れたノイズ性能を発揮します。その際、静止電流は $50\mu\text{A} \sim 20\text{mA}$ に設定できます。5mA でバイアスすると、入力換算ノイズ $0.9\text{nV}/\sqrt{\text{Hz}}$ が得

られ、超高入力インピーダンス (1TΩ 超) で超低ノイズ性能を実現します。また、JFET 間のマッチングが $\pm 4\text{mV}$ であることがテストされており、差動ペア構成に適した低オフセットおよび高 CMRR 性能を提供しています。また、JFE2140 は、個別のクランプノードに接続されたダイオードも内蔵しており、高リーク率の非線形外部ダイオードを追加せずに保護機能を提供します。

JFE2140 は 40V という高いドレイン - ソース間電圧と、最低 -40V までのゲート - ソース間およびゲート - ドレイン間電圧に耐えます。温度範囲は $-40^\circ\text{C} \sim +125^\circ\text{C}$ と規定されています。

パッケージ情報


部品番号	パッケージ (1)	パッケージ・サイズ (2)
JFE2140	D (SOIC, 8)	4.9mm × 6mm
	DSG (WSON, 8)	2mm × 2mm

- 利用可能なすべてのパッケージについては、データシートの末尾にあるパッケージ・オプションについての付録を参照してください。
- パッケージ・サイズ (長さ×幅) は公称値であり、該当する場合はピンも含まれます。


デバイスの概要

パラメータ		値
V_{GSS}	ゲート・ソース間ブレークダウン電圧	-40V
V_{DSS}	ドレイン・ソース間ブレークダウン電圧	$\pm 40\text{V}$
C_{ISS}	入力容量	13pF
$V_{GS1} - V_{GS2}$	差動ゲート - ソース間電圧マッチング (最大値)	$\pm 4\text{mV}$
T_J	接合部温度	$-40^\circ\text{C} \sim +125^\circ\text{C}$
I_{DSS}	ドレイン・ソース間飽和電流	18mA



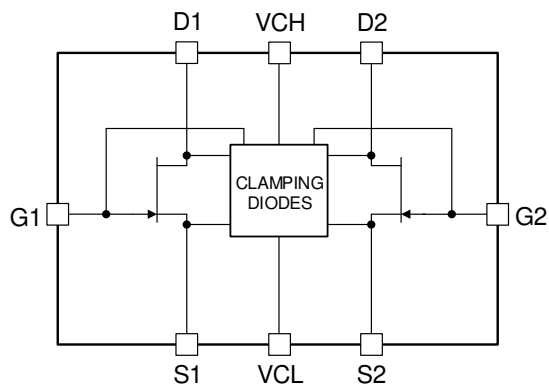

概略回路図

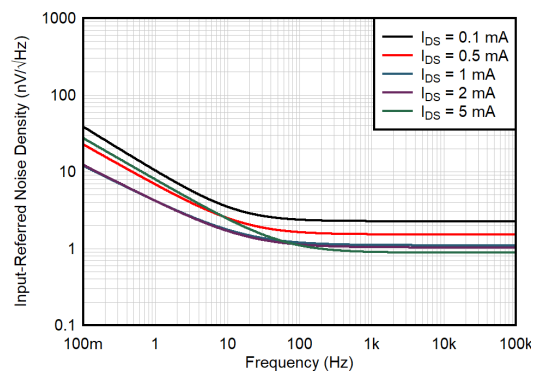

超低入力電圧ノイズ

Table of Contents

1 特長	1	8.3 Feature Description	12
2 アプリケーション	1	8.4 Device Functional Modes	13
3 概要	1	9 Application and Implementation	14
4 Revision History	3	9.1 Application Information.....	14
5 Pin Configuration and Functions	4	9.2 Typical Applications.....	18
6 Specifications	5	9.3 Power Supply Recommendations.....	21
6.1 Absolute Maximum Ratings.....	5	9.4 Layout.....	21
6.2 ESD Ratings.....	5	10 Device and Documentation Support	22
6.3 Recommended Operating Conditions.....	5	10.1 Device Support.....	22
6.4 Thermal Information.....	5	10.2 Documentation Support.....	23
6.5 Electrical Characteristics.....	6	10.3 ドキュメントの更新通知を受け取る方法.....	23
6.6 Typical Characteristics.....	7	10.4 サポート・リソース.....	23
7 Parameter Measurement Information	11	10.5 Trademarks.....	23
7.1 AC Measurement Configurations.....	11	10.6 静電気放電に関する注意事項.....	23
8 Detailed Description	12	10.7 用語集.....	23
8.1 Overview.....	12	11 Mechanical, Packaging, and Orderable Information	23
8.2 Functional Block Diagram.....	12		

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision A (March 2022) to Revision B (August 2023)	Page
• DSG (WS0N, 8) パッケージのステータスをプレビューから量産データ (アクティブ) に変更.....	1
• 「電気的特性」と一致するように「デバイスの概要」表のパラメータの説明を「ゲート・ソース間電圧」から「ゲート・ソース間ブレイクダウン電圧」に、「ドレイン・ソース間電圧」から「ドレイン・ソース間ブレイクダウン電圧」に変更。.....	1
• 「製品概要」表のパラメータの説明、「差動ゲート - ソース間電圧マッチング」に「最大値」を追加。.....	1
• Added values for DSG (WS0N, 8) package to <i>Thermal Information table</i>	5
• Added condition " $V_{DS} = 5\text{ V}$ " to Figure 6-7, <i>Gate Current vs Gate-to-Source Voltage</i>	7
• Added clarification that the threshold voltage is equivalent to the gate-to-source cutoff voltage (V_{GSC}) in <i>Common-Source Amplifier</i>	15
• Added JFE2140EVM user's guide and JFE2140 Ultra-Low-Noise Preamplifier application note to <i>Related Documentation</i>	23

Changes from Revision * (August 2021) to Revision A (March 2022)	Page
• Changed ESD JEDEC specification to JS-002	5
• Changed gate-to-source voltages from -1.2 V to -1.3 V ($100\text{ }\mu\text{A}$), -0.9 V to -1.1 V (2 mA)	6
• Changed Y-axis range from 0 to 33 to 0 to 16 on Figure 6-1, <i>Drain-to-Source Current vs Gate-to-Source Voltage</i>	7

5 Pin Configuration and Functions

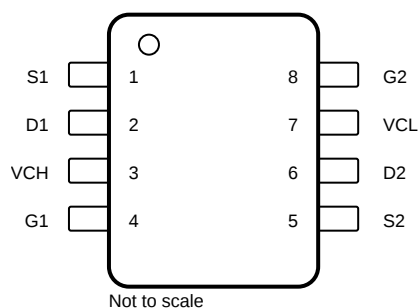


图 5-1. D Package, 8-Pin SOIC (Top View)

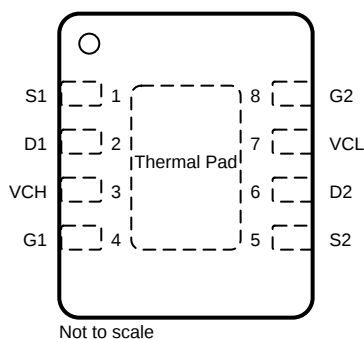


图 5-2. DSG Package, 8-Pin WSON (Top View)

表 5-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
D1	2	Output	Drain, channel 1
D2	6	Output	Drain, channel 2
G1	4	Input	Gate, channel 1
G2	8	Input	Gate, channel 2
S1	1	Output	Source, channel 1
S2	5	Output	Source, channel 2
VCH	3	—	Positive diode clamp voltage. Float this pin if clamp diodes are not used.
VCL	7	—	Negative diode clamp voltage. Float this pin if clamp diodes are not used.
Thermal Pad	Thermal Pad	—	Exposed thermal pad. This pad is internally connected to the V_{CL} node. Connect this pad to the same node as V_{CL} or leave floating.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)^{(1) (2)}

		MIN	MAX	UNIT
V_{DS}	Drain-to-source voltage	–40	40	V
V_{GS}, V_{GD}	Gate-to-source voltage, gate-to-drain voltage	–40	0.1	V
V_{VCH}	Voltage between VCH to D, G, or S		40	V
V_{VCL}	Voltage between VCL to D, G, or S	–40		
I_{VCL}, I_{VCH}	Clamp diode current	DC		20
		50-ms pulse ⁽³⁾		200
I_{DS}	Drain-to-source current	–50	50	mA
I_{GS}, I_{GD}	Gate-to-source current, gate-to-drain current	–20	20	mA
T_A	Ambient temperature	–55	150	°C
T_J	Junction temperature	–55	150	°C
T_{stg}	Storage temperature	–55	175	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) All gate, drain and source voltages are referred to the same-channel JFET (that is, V_{GS} applies to both V_{G1S1} and V_{G2S2}).
- (3) Maximum diode current pulse specified for 50 ms at 1% duty cycle.

6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±500

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
I_{DS}	Drain-to-source current	0.02		I_{DSS}	mA
V_{GS}	Gate-to-source voltage	–1.2		0	V
T_J	Specified temperature	–40		125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		JFE2140		UNIT
		D (SOIC)	DSG (WSON)	
		8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	139.8	84.2	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	80.0	104.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	83.2	49.6	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	29.1	6.9	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	82.4	49.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	26.5	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

at $T_A = 25^\circ\text{C}$, $I_{DS} = 2\text{ mA}$, $V_{DS} = 10\text{ V}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT	
NOISE								
e _n	Input-referred noise	I _{DS} = 100 μA	f = 1 kHz	2.5			nV/√Hz	
			f = 10 Hz	5.4				
			f = 0.1 Hz to 10 Hz	0.26			μV _{PP}	
		I _{DS} = 2 mA	f = 1 kHz	1.1			nV/√Hz	
			f = 10 Hz	2.4				
			f = 0.1 Hz to 10 Hz	0.12			μV _{PP}	
e _i	Input current noise, each input	f = 1 kHz, I _{DS} = 2 mA, V _{DS} = 5 V		1.6			fA/√Hz	
INPUT CURRENT								
I _G	Input gate current	V _{DS} = 2 V, V _{VCH} = 5 V, V _{VCL} = −5 V		1	±10	pA		
		V _{DS} = 0 V, V _{GS} = −30 V		0.2	±60			
			T _A = −40°C to +85°C	0.85			nA	
			T _A = −40°C to +125°C	9				
INPUT VOLTAGE								
V _{GSS}	Gate-to-source breakdown voltage	V _{DS} = 0 V, I _G = −100 μA		−40			V	
V _{GSC}	Gate-to-source cutoff voltage	V _{DS} = 10 V, I _{DS} = 0.1 μA		−1.5	−1.15	−0.9	V	
V _{GS}	Gate-to-source voltage	I _{DS} = 100 μA		−1.3	−0.85	−0.7	V	
		I _{DS} = 2 mA		−1.1	−0.6	−0.5		
ΔV _{GS}	Differential V _{GS} mismatch	I _{DS} = 2 mA		1		4	mV	
			T _A = −40°C to +125°C	1.1		4.2		
	Differential V _{GS} mismatch drift	T _A = −40°C to +125°C		1.7			±10	μV/°C
INPUT IMPEDANCE								
R _{IN}	Gate input resistance	V _{GS} = −30 V to −1 V, V _{DS} = 0 V		1			TΩ	
C _{ISS}	Input capacitance	V _{DS} = 0 V		17			pF	
		V _{DS} = 5 V		13				
OUTPUT								
I _{DSS}	Drain-to-source saturation current	V _{GS} = 0 V		12	18	23	mA	
			T _A = −40°C to +125°C	10		28		
	Drain-to-source saturation current ratio	V _{GS} = 0 V, I _{DSS1} / I _{DSS2}		0.95	1	1.05		
	Transconductance	I _{DS} = 100 μA		2.1			mS	
		I _{DS} = 2 mA		10				
G _{FS}	Full conduction transconductance	V _{GS} = 0 V		24	30		mS	
V _{DSS}	Drain-to-source breakdown voltage	I _{DS} = 100 μA		40	43		V	
C _{OSS}	Output capacitance	I _{DS} = 2 mA		4.5			pF	

6.6 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $I_{DS} = 2\text{ mA}$, common-source configuration, and $V_{DS} = 10\text{ V}$ (unless otherwise noted)

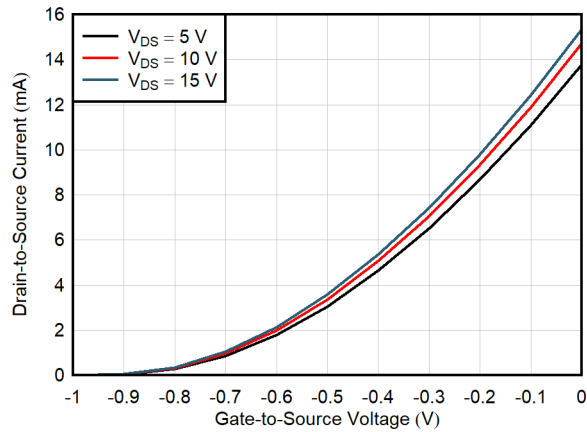


FIG 6-1. Drain-to-Source Current vs Gate-to-Source Voltage

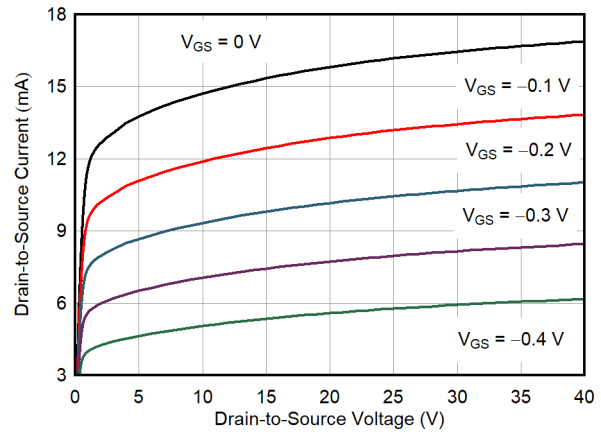


FIG 6-2. Drain-to-Source Current vs Drain-to-Source Voltage

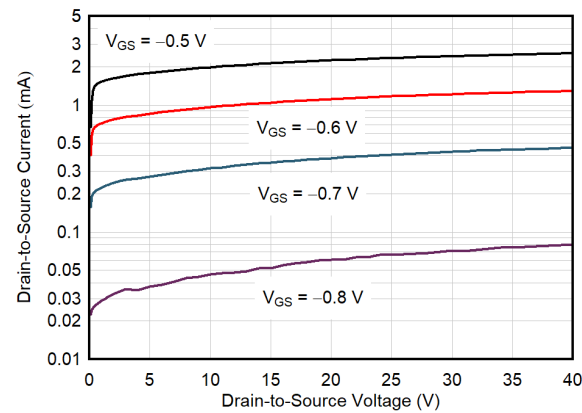


FIG 6-3. Drain-to-Source Current vs Drain-to-Source Voltage

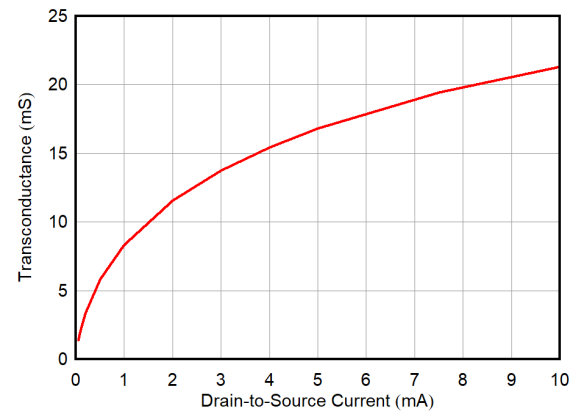


FIG 6-4. Common Source Transconductance vs Drain-to-Source Current

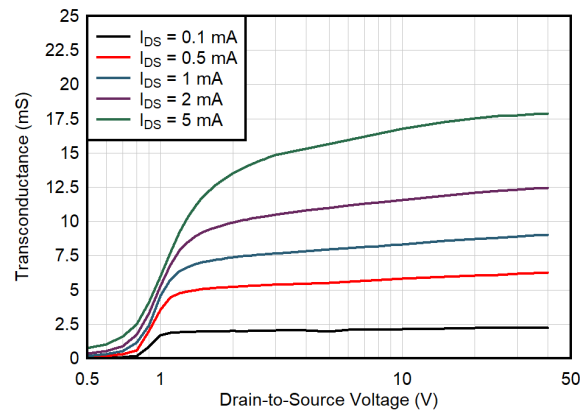


FIG 6-5. Common Source Transconductance vs Drain-to-Source Voltage

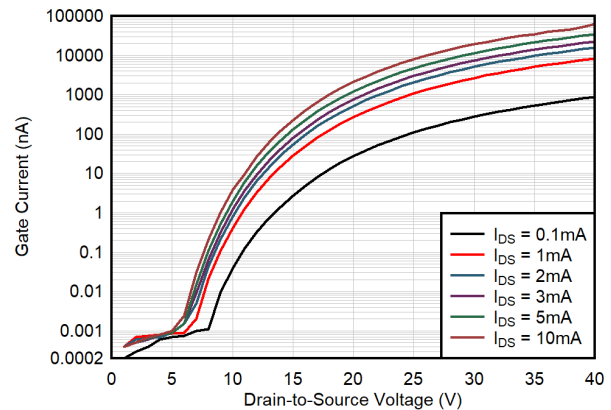


FIG 6-6. Gate Current vs Drain-to-Source Voltage

6.6 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $I_{DS} = 2\text{ mA}$, common-source configuration, and $V_{DS} = 10\text{ V}$ (unless otherwise noted)

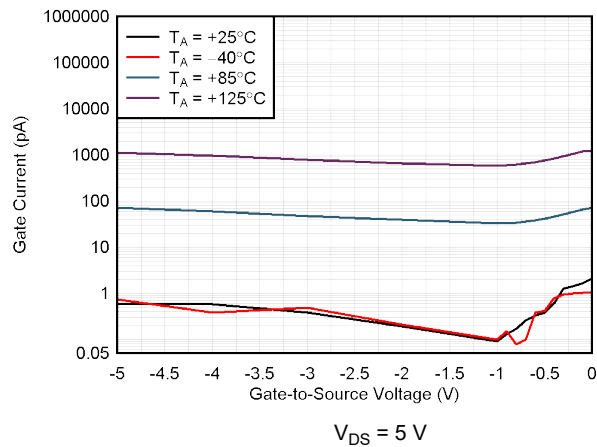


Figure 6-7. Gate Current vs Gate-to-Source Voltage

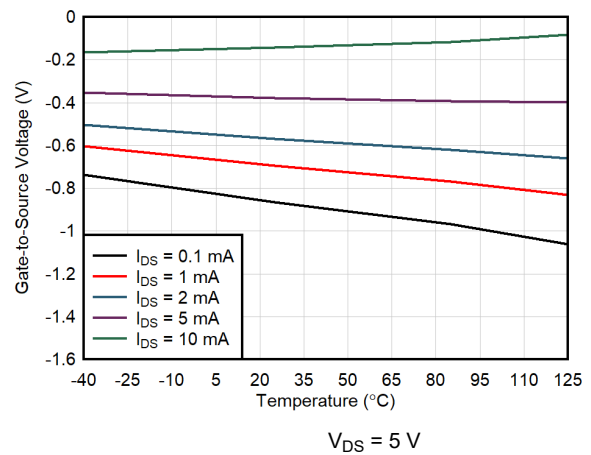


Figure 6-8. Gate-to-Source Voltage vs Temperature

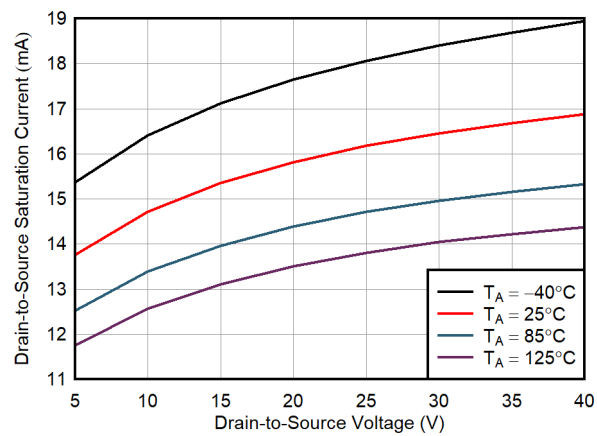


Figure 6-9. I_{DSS} vs Drain-to-Source Voltage

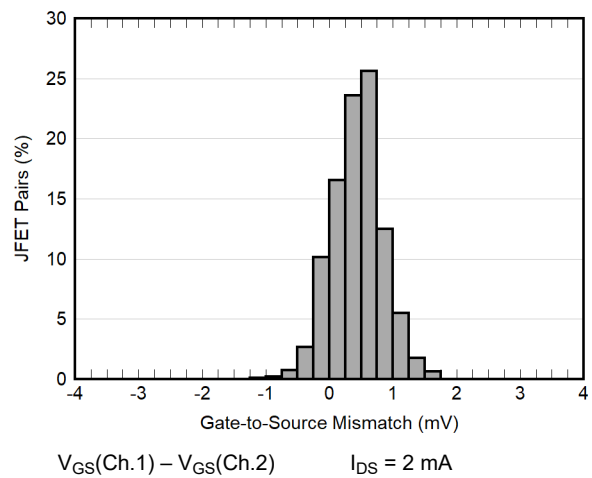


Figure 6-10. V_{GS} Mismatch Histogram

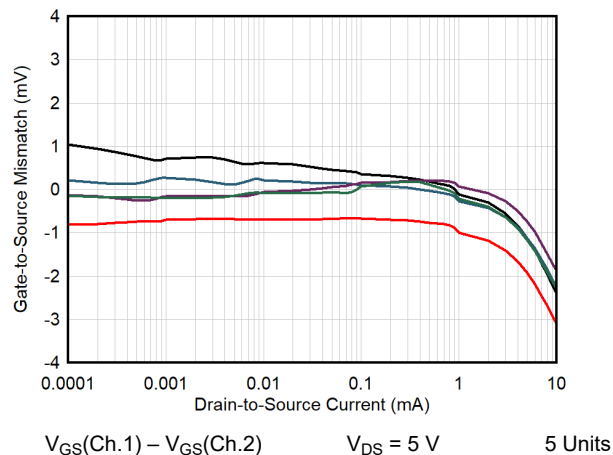


Figure 6-11. V_{GS} Mismatch vs Drain-to-Source Current


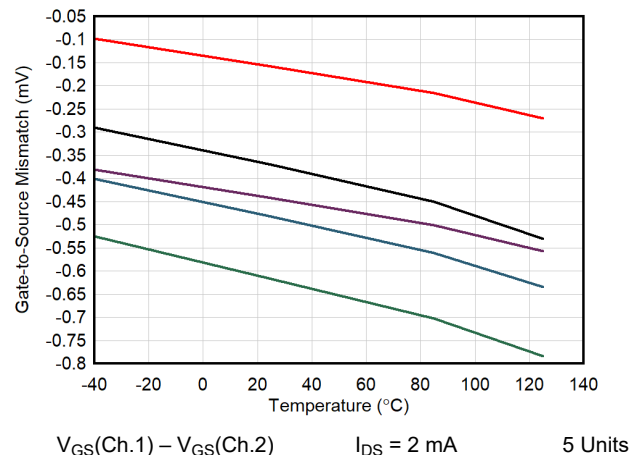


Figure 6-12. V_{GS} Mismatch vs Temperature


6.6 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $I_{DS} = 2\text{ mA}$, common-source configuration, and $V_{DS} = 10\text{ V}$ (unless otherwise noted)

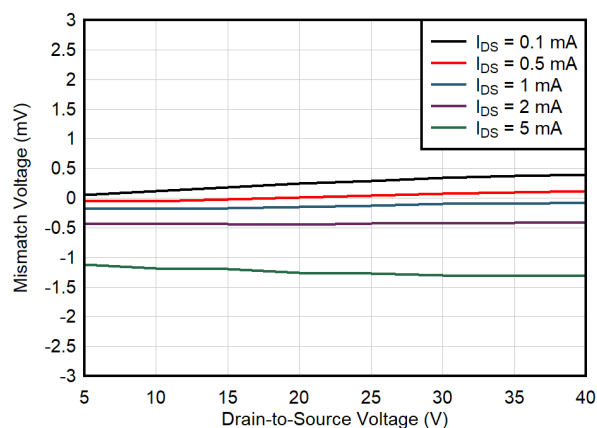


$V_{GS}(\text{Ch.1}) - V_{GS}(\text{Ch.2})$


6-13. V_{GS} Mismatch vs V_{DS}

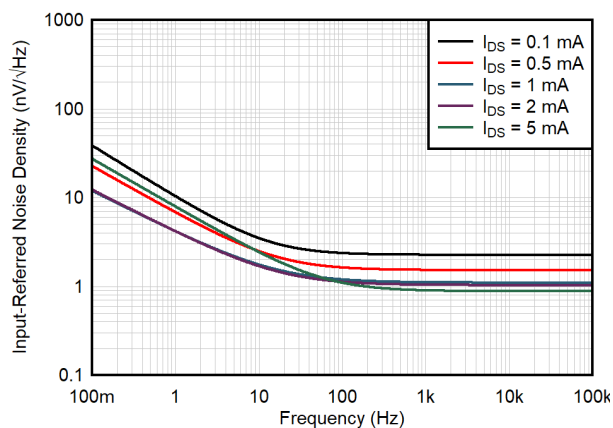

6-14. Input-Referred Noise Density vs Frequency

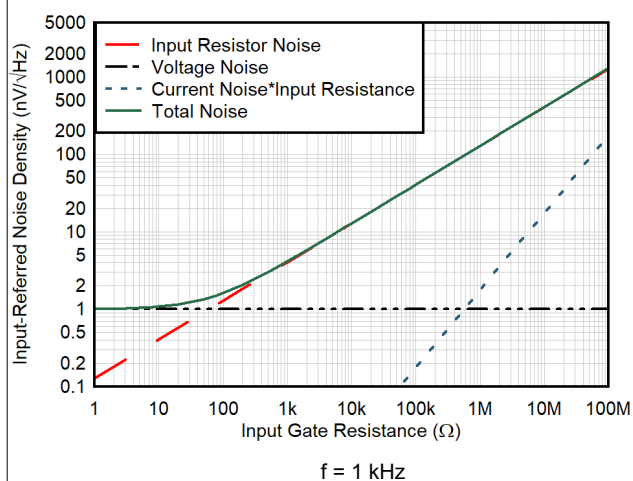

6-15. Noise Density Contributors vs Input Gate Resistance

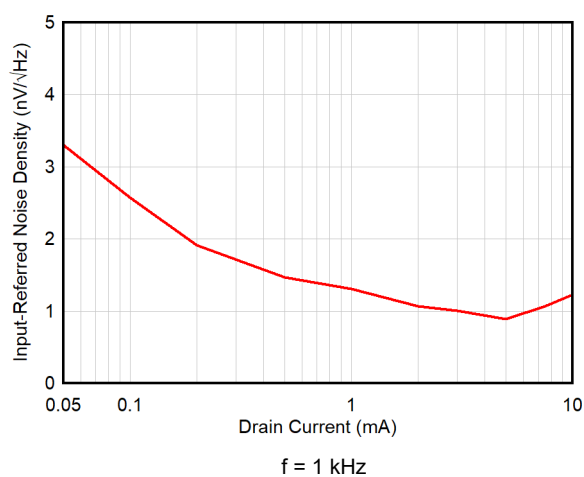

6-16. Input-Referred Noise Spectral Density vs Drain-to-Source Current

6.6 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $I_{DS} = 2\text{ mA}$, common-source configuration, and $V_{DS} = 10\text{ V}$ (unless otherwise noted)

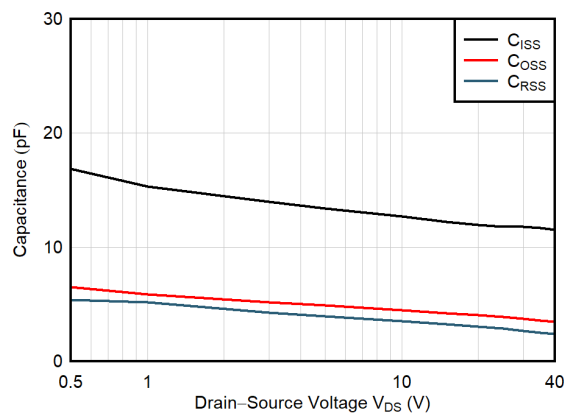


FIG 6-17. Input, Output, and Reverse Transfer Capacitance vs Drain-to-Source Voltage

7 Parameter Measurement Information

7.1 AC Measurement Configurations

The circuit configuration used for noise measurements is seen in [Figure 7-1](#). The nominal I_{DS} current is configured in the schematic by calibrating V_- . After I_{DS} is fixed, the V_{DS} voltage is set by calibrating V_+ . For input-referred noise data, the gain of the circuit is calibrated from V_{IN} to V_{OUT} and used for the input-referred gain calculation.

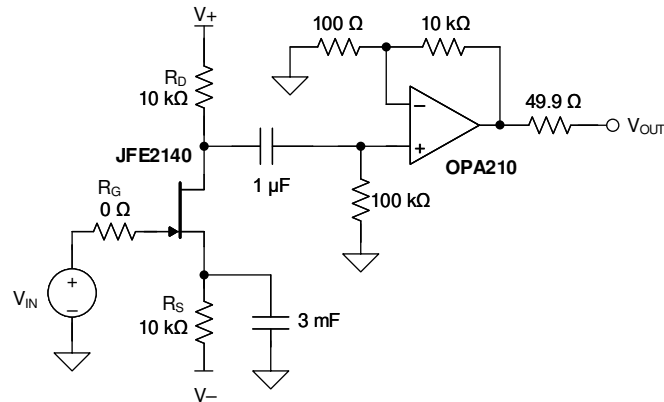



Figure 7-1. AC Measurement Reference Schematic

8 Detailed Description

8.1 Overview

The JFE2140 is a ultra-low noise, matched-input pair N-type JFET designed to create low-noise gain stages for very high output impedance sensors or microphones. Advanced, high precision processing technology gives the JFE2140 tight channel-to-channel matching, extremely low-noise performance, a high g_m/C_{ISS} ratio, and ultra-low gate-current performance. The integrated Input-protection diodes clamp high-voltage spurious input signals without the need for additional input diodes that can add leakage current or distortion-creating nonlinear capacitance. The JFE2140 provides a next-generation device to implement low-noise amplifiers for piezoelectric sensors, transducers, large-area condenser microphones, and hydrophones in small-package options.

8.2 Functional Block Diagram

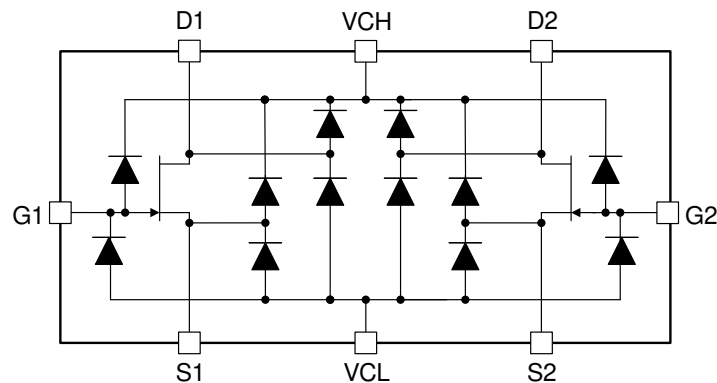

8.3 Feature Description

8.3.1 Precision Matching

The JFE2140 features matched-pair, n-type JFET transistors fabricated on a high-precision analog process. Precision matching between opposite JFETs is required in differential-pair configurations, where any mismatch between input devices results in gain and common-mode rejection degradation. Precision matching also minimizes offset voltages that produce excessive error voltages in high-gain, dc-coupled composite amplifiers. Matching distribution for a production lot of units can be seen in [Figure 6-10](#).

8.3.2 Ultra-Low Noise

Junction field effect transistors (JFETs) are commonly used as an input stage in high-input-impedance, low-noise designs in audio, SONAR, vibration analysis, and other technologies. The JFE2140 is a new generation JFET device that offers very low noise performance at the lowest possible current consumption in high-input-impedance amplifier designs. The JFE2140 is manufactured on a high-performance analog process technology, giving tighter process parameter control than a standard JFET.

Designs that feature operational amplifiers (op amps) as the primary gain stage are common, but these designs are not able to achieve the lowest possible noise as a result of the inherent challenges and tradeoffs required from a full operational amplifier design. Noise in JFET designs can be evaluated in two separate regions: low-frequency flicker noise and wideband thermal noise. Flicker, or $1/f$ noise, is extremely important for systems that require signal gain at frequencies less than 100 Hz. The JFE2140 achieves extremely low $1/f$ noise in this range. Thermal noise is noise in the region greater than 1 kHz and depends on the gain, or g_m , of the circuit. The g_m is a function of the drain-to-source bias current; therefore, thermal noise is also a function of drain-to-source bias current. [Figure 6-14](#) shows both $1/f$ and thermal noise with multiple bias conditions measured using the circuit shown in [Figure 7-1](#).

Noise is typically modeled as a voltage source (voltage noise) and current source (current noise) on the input. The $1/f$ and thermal noise can be represented as voltage noise. Current noise is dominated by current flow into the gate, and is called *shot noise*. The JFE2140 features extremely low gate current, and therefore, extremely low current noise. [Figure 6-15](#) shows how source impedance on the input is the dominant noise source. In nearly all cases, noise created as a result of current noise is negligible.

8.3.3 Low Gate Current

The JFE2140 features a maximum gate current of 10 pA at room temperature, making the device an excellent choice for maximizing the gain and dynamic range from extremely high impedance sensors. Additionally, any noise contributions as a result of gate current are minimized because of the negligible shot noise at low current levels. As with all JFET devices, when the drain-to-source voltage increases, the gate current also increases. Keep the drain-to-source voltage to less than 5 V for the lowest gate input current operation.

8.3.4 Input Protection

The JFE2140 features input protection diodes that are used for surge clamping and ESD events. The diodes are rated to withstand high current surges for short times, steering current from the gate (G) pin to the VCH and VCL pins. The diodes also feature very low leakage, removing the need for external protection devices that can have high leakage currents or nonlinear capacitance that degrade the distortion performance.

8.4 Device Functional Modes

The JFE2140 functionality is identical to standard N-channel depletion JFET devices. The gate-to-source (V_{GS}) voltage, drain-to-source voltage (V_{DS}) and drain-to-source current (I_{DS}) determine the region of operation.

- For $V_{GS} < V_{GSC}$: JFE2140 conduction channel is closed; I_{DS} is only determined by junction leakage current.
- For $V_{GS} > V_{GSC}$: Two modes of operation can exist depending on V_{DS} . When V_{DS} is less than the linear (saturation) region threshold (see [Figure 8-1](#)), the device operates in the linear region, meaning that the device behaves as a resistor connected from drain-to-source with minimal variation from any changes in V_{GS} . When V_{DS} is greater than the linear (saturation) region threshold, I_{DS} has a strong dependence on V_{GS} , where the relationship is described by the parameter g_m .

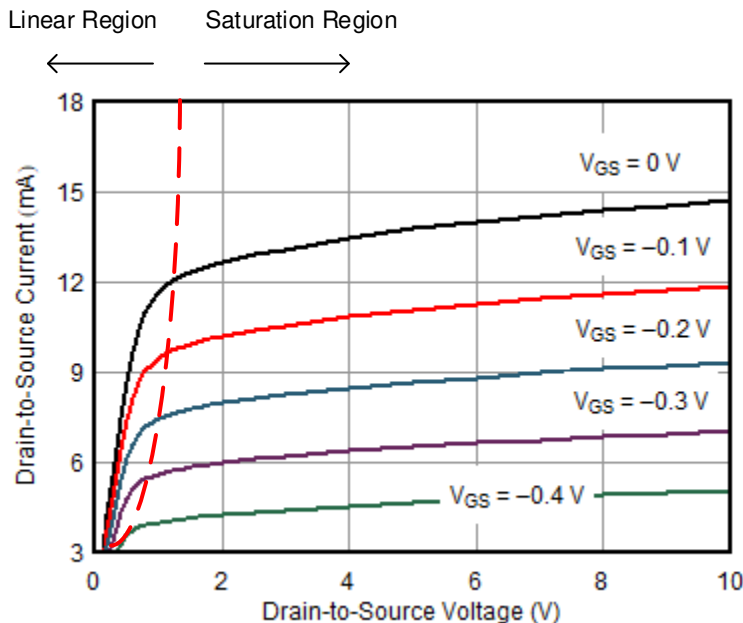


Figure 8-1. V_{DS} vs I_{DS}

9 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 Input Protection Diodes

The JFE2140 features diodes that are used to help clamp voltage surges that can occur on the input sensor to the gate. The diodes are connected between the gates, sources, and drains of each JFET to two separate pins, VCL and VCH. The clamping mechanism works by *steering* current from the gate into the VCL or VCH nodes when the voltage at the gate, source or drain is less than VCL or greater than VCH. [Figure 9-1](#) shows an example of a microphone input circuit where a dc blocking capacitor operates with a large dc voltage. When the microphone input is dropped or shorted, the dc blocking capacitor discharges into the VCL or VCH nodes, thus helping eliminate large signal transient voltages on the gate. There are also clamping diodes from the drain and source to VCL and VCH, respectively. The clamping diodes can withstand high surge currents up to 200 mA for 50 ms; however, limit dc current to less than 20 mA.

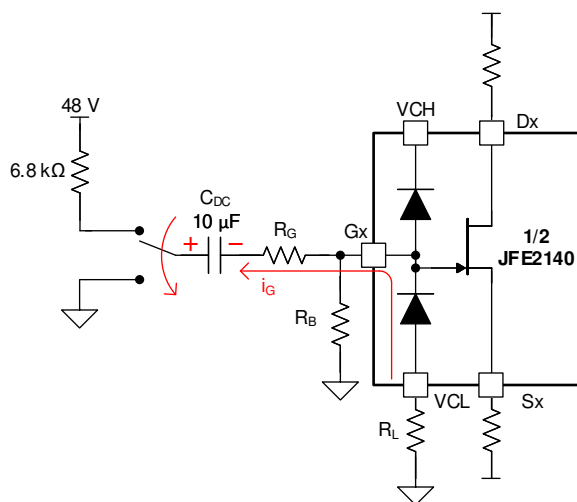


Figure 9-1. JFE2140 Clamping Diode Example

The example in [Figure 9-1](#) shows the diode clamp used to protect the JFET against overvoltage in a phantom-powered microphone circuit. Phantom power typically delivers 48 V through a 6.8-kΩ pullup resistor to a microphone or dynamic load. If the microphone is disconnected, dc blocking capacitor C_{DC} can be biased up to 48 V. If the input to the capacitor is then shorted to ground (shown by the switch in [Figure 9-1](#)), the gate voltage can exceed the absolute maximum rating for V_{GS} . In this case, the blocking diode is used, along with current limiting resistors R_G and R_L , to clamp the gate voltage to a safe level. Be aware that the thermal noise of R_G couples directly into the gate input; therefore, make sure to minimize the resistance of R_G .

The clamping diodes are not required for operation. The V_{GS} voltage can withstand -40 V, so clamping is not required if the V_{GS} voltage is kept greater than this limit. If the diodes are not needed, leave the VCL and VCH nodes floating.

9.1.2 Cascode Configuration

The JFE2140 can be configured as a *cascoded* JFET front end. Cascode refers to using a second transistor in-series with the input transistor; see [Figure 9-2](#) for an example.

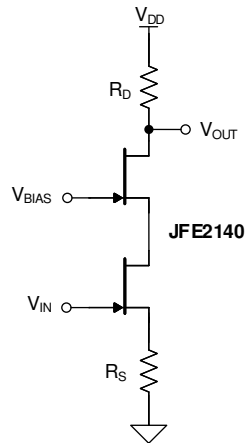


Figure 9-2. JFE2140 connected in Cascode Configuration

Using a cascode configuration, as shown in [Figure 9-2](#), increases the output impedance of the stage, resulting in higher gain, as well as buffers the input node from gate current that flows when the V_{DS} voltages are higher. The V_{BIAS} node must be forced to a voltage greater than what is required to allow both JFETs to remain in the saturated region. A JFET is not required to be used as the cascode device; the benefits of cascoding can be realized with other transistor types, while still maintaining the low-noise, high-impedance benefits of the JFE2140.

9.1.3 Common-Source Amplifier

The common-source amplifier is a commonly used open-loop gain stage for JFET amplifiers, the basic circuit is shown in [Figure 9-3](#).

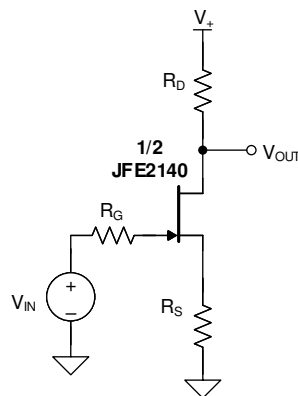


Figure 9-3. Common-Source Amplifier

The equation for gain of the circuit in [Figure 9-3](#) is shown in [Equation 1](#).

$$\frac{V_{OUT}}{V_{IN}} = - \frac{gm \cdot R_D}{1 + gm \cdot R_S} \quad (1)$$

Generally, higher gain results in improved noise performance. Gain increases as the bias current is increased as a result of increasing gm (see [Figure 6-4](#)). As a result, the input-referred noise decreases as bias current is increased (see [Figure 6-14](#)). Any JFET design must make a tradeoff between current consumption and noise

performance. The JFE2140, however, delivers significantly lower noise performance than most operational amplifiers at the same current consumption. The bias current (I_{DS}) is set by the value of the source resistor, R_S , and the threshold voltage, V_T , of the JFE2140. For JFETs, this threshold voltage is equivalent to the gate-to-source cutoff voltage, V_{GSC} . A graph showing nominal I_{DS} vs R_S is shown in [Figure 9-4](#).

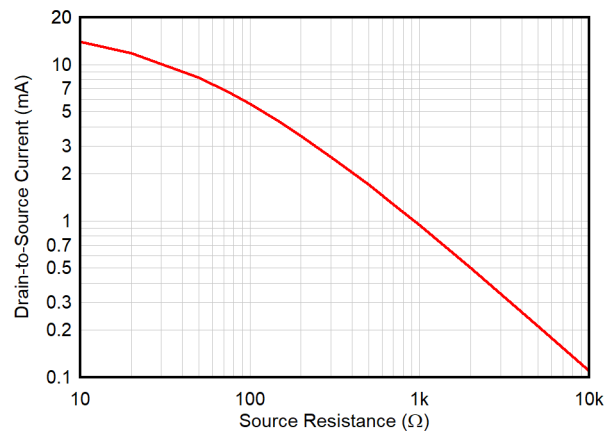


Figure 9-4. Drain-to-Source Current vs R_S , $V_{DS} = 5\text{ V}$

The bias current varies according to the resistor and threshold voltage tolerances. Additionally, thermal noise associated with R_S couples directly into the gain of the circuit, degrading the overall noise performance. To improve the circuit in [Figure 9-5](#), use a current-source biasing scheme. Current-source biasing removes the JFET threshold variation from the biasing scheme, and allows for lower-value filtering capacitance (C_S) for equivalent filtering due to the high output impedance of current sources.

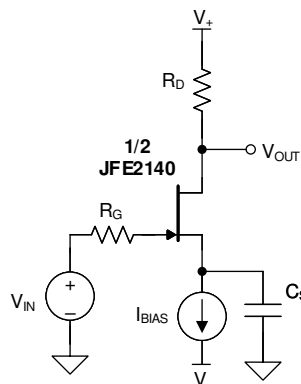


Figure 9-5. Common-Source Amplifier With Current-Source Biasing

9.1.4 Composite Amplifiers

The JFE2140 can be configured to provide a low-noise, high-input impedance front-end stage for a typical op amp. Open-loop transistor gain stages shown previously suffer from wide gain variations that are dependent on the forward transconductance of the JFE2140. When precision gain is required, the composite amplifier (JFET front-end + operational amplifier) achieves excellent results by allowing for a fixed gain determined by external resistors, and improving the noise and bandwidth of the operational amplifier. The JFE2140 gain stage provides a boost to the open-loop performance of the system, extending the bandwidth beyond what the operational amplifier alone can provide, and gives a high-input impedance, ultra-low noise input stage to interface with high source impedance microphones.

Figure 9-6 shows a generic schematic representation of a voltage-feedback composite amplifier. The component requirements and tradeoffs are listed in Table 9-1.

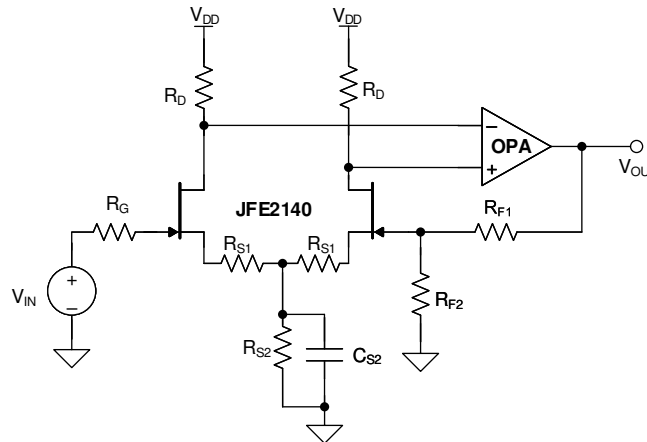


Figure 9-6. Low Noise, High Input Impedance Composite Amplifier

The gain of Figure 9-6 can be calculated using the following equation:

$$A = 1 + \frac{R_{F1}}{R_{F2}} \quad (2)$$

Table 9-1. Composite Amplifier Component List and Function

COMPONENT	DESCRIPTION
R_{S1}	Degeneration resistors. These resistors reduce the overall gain of the JFET stage, but improve the linearity performance. Also, when used in differential configurations (see OPA1637 reference design), the resistors reduce CMRR errors that occur as a result of input mismatch voltages.
R_{S2}	Bias-current setting resistor. This resistor, along with R_{S1} , determine the bias current when using resistive biasing (see Figure 9-4). Be aware that both R_{S1} and R_{S2} resistance directly impact noise performance.
R_G	Gate resistor. This resistor is used to help limit current flow into the gate in overvoltage cases. For improved dc precision, match R_G to the equivalent parallel resistance of $R_{S1} \parallel R_{S2}$. Use the low resistance values to minimize the thermal noise impact on the circuit.
R_D	Drain resistor. This resistor sets the JFET stage gain in common source biasing, along with g_m and $R_{S1} + R_{S2}$. Higher resistance increases gain, but lowers the nominal V_{DS} voltage.
R_{F1}	Feedback resistor 1. Along with R_{F2} , this resistor sets the gain of the composite amplifier.
R_{F2}	Feedback resistor 2. Along with R_{F1} , this resistor sets the gain of the composite amplifier.
R_{S2}	Source resistor 2. Along with R_{S1} , this resistor sets the dc bias current where the JFET is nominally operated.
C_S	Source capacitor. This capacitor reduces the noise coupling from R_{S2} .

9.2 Typical Applications

9.2.1 Low-Noise, Low-Power, High-Input-Impedance Composite Amplifier

The JFE2140 can be configured to provide a low-noise, high-input impedance single-ended amplifier stage that can be optimized for ultra-low noise performance at low power levels. This configuration is designed for battery-powered audio applications such as guitar pedals, amplifiers and handheld recorders. The OPA1692, a low-power, dual audio amplifier, is used for the composite voltage-feedback amplifier, as well as a *rail-splitting* amplifier that centers the ground voltage between the battery positive and negative voltage.

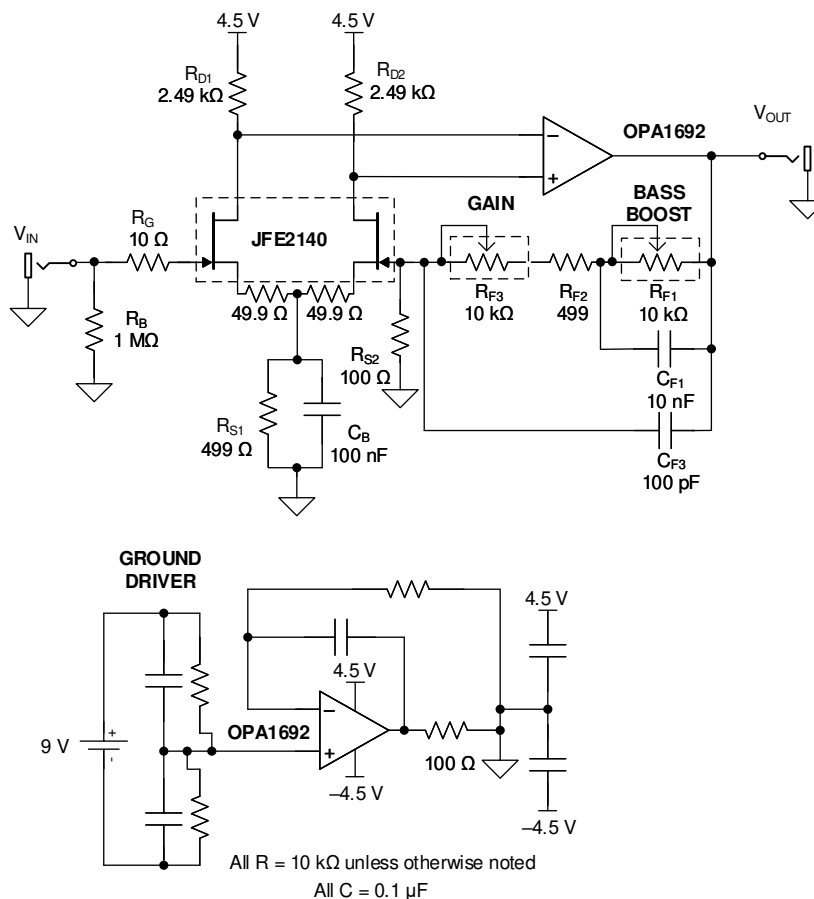


FIG 9-7. Low-Noise, Low-Power, High-Input-Impedance Composite Amplifier

9.2.1.1 Design Requirements



PARAMETER	DESIGN GOAL
Gain	15 dB to 40 dB nominal with low-frequency boost
Frequency response	1 Hz to 20 kHz
Noise	< 3 nV/√Hz at 1 kHz
Total current consumption	< 4 mA
Input current	< 100 pA

9.2.1.2 Detailed Design Procedure

This design provides single-ended, adjustable gain from 15 dB to 40 dB with extremely high input impedance at a very low frequency response. The power consumption is optimized for battery-powered audio applications.

- The JFE2140 is configured as a differential pair in a voltage-feedback composite amplifier. This configuration allows for low-frequency gain without large dc-blocking capacitors.
- The bias current is set by selecting the desired bias current and noise tradeoff (see [Figure 6-16](#)). To set the bias current point, adjust the source resistance according to [Figure 9-4](#).
- After the bias current is selected, set the JFET stage gain as high as possible. To avoid pushing the device into the linear region of operation, use the largest drain resistor ($R_{D1,2}$) possible while maintaining a minimum of 1 V across the drain-to-source nodes.
- The overall gain can be configured with the feedback resistors R_{F1} , R_{F2} and R_{F3} . Capacitor C_{F3} can be required depending on the gain configuration for amplifier stability; use amplifier stability best practices to maintain stability at both maximum and minimum gain configurations.

9.2.1.3 Application Curves

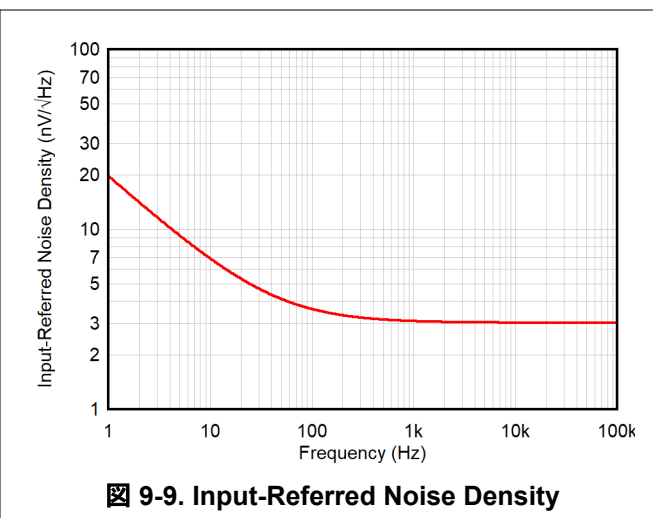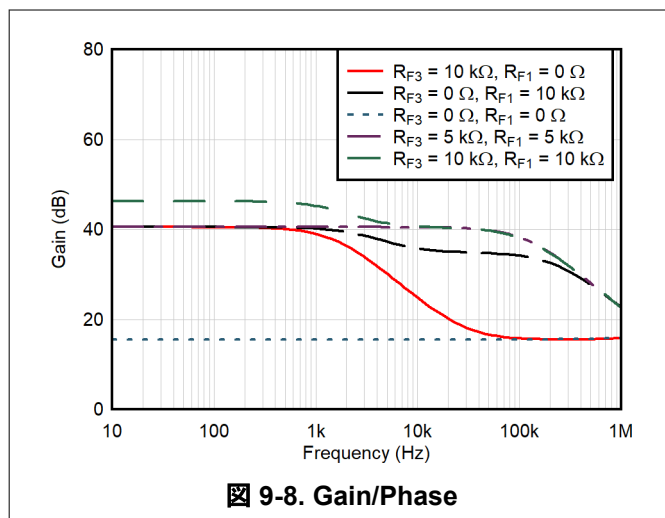

9.2.2 Differential Front-End Design

Differential pair architectures are useful for differential small signal amplification where high common-mode voltage rejection (CMRR) is required. In typical differential amplifiers or fully-differential amplifiers (FDA), the tolerance of the resistors alone dominates the CMRR performance. In addition, these amplifiers cannot be configured with high input impedance because of the requirement of input resistors. When used on the front-end of an FDA, the precision-matching on the JFE2140 removes the requirement of extremely low resistor matching ($< 1\%$) by creating a matched-input gain stage. In addition, high input impedance significantly reduces the effects of source impedance mismatch on CMRR performance, creating a differential input designed for noisy environments that are common in professional audio.



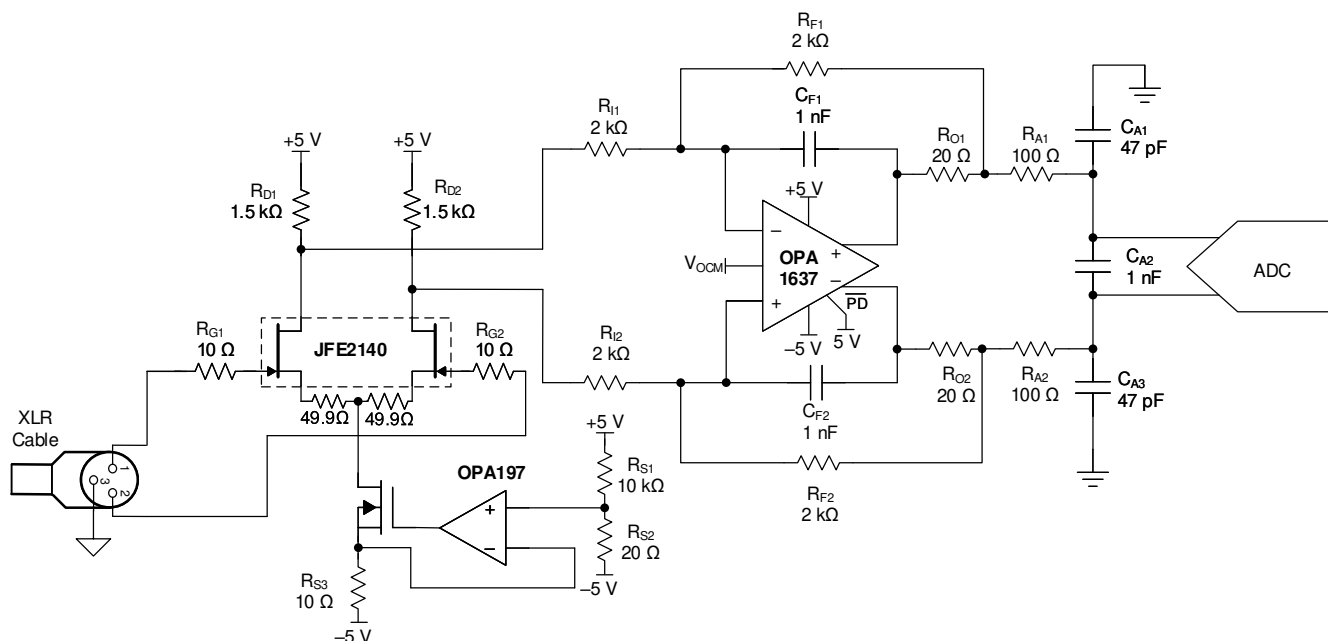


FIG 9-10. The JFE2140 as a High Input Impedance Front End for the OPA1637

9.2.2.1 Application Curves

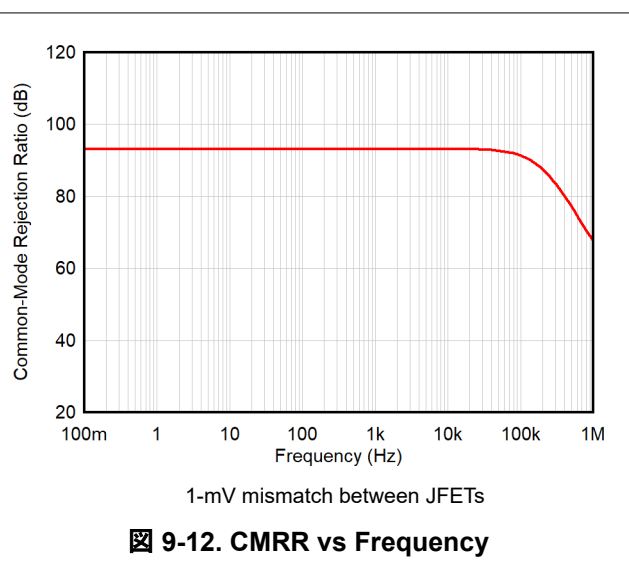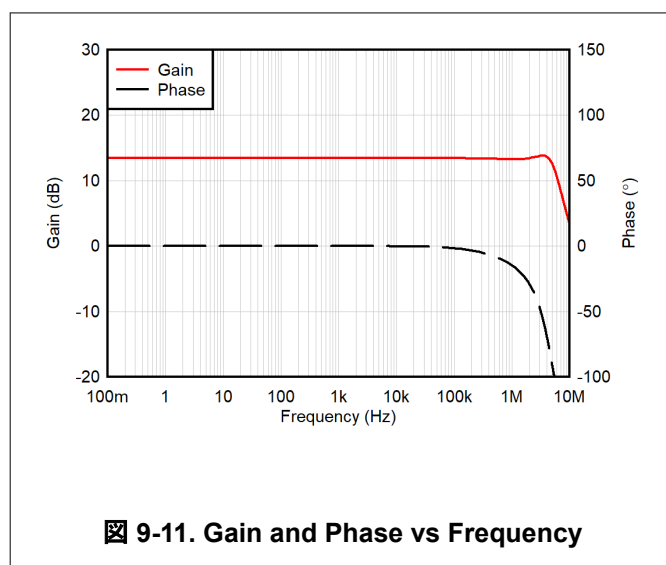

9.3 Power Supply Recommendations

The JFE2140 is a dual, matched JFET transistor pair with clamping diodes. There are no specific power-supply connections; however, take care not to exceed any absolute maximum voltages on any of the pins if system supply voltages greater than or equal to 40 V are used.


9.4 Layout

9.4.1 Layout Guidelines

For best operational performance of the device, use good printed-circuit board (PCB) layout practices, including:

- Reduce parasitic coupling by running the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible.
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Keep high impedance input signals away from noisy traces.
- Make sure supply voltages are adequately filtered.
- Minimize distance between source-connected and drain-connected components to the JFE2140.
- Consider a driven, low-impedance guard ring around the critical gate traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.
- Clean the PCB following board assembly for best performance.
- Any precision integrated circuit can experience performance shifts resulting from moisture ingress into the plastic package. Following any aqueous PCB cleaning process, bake the PCB assembly to remove moisture introduced into the device packaging during the cleaning process. A low temperature, post-cleaning bake at 85°C for 30 minutes is sufficient for most circumstances.

9.4.2 Layout Example

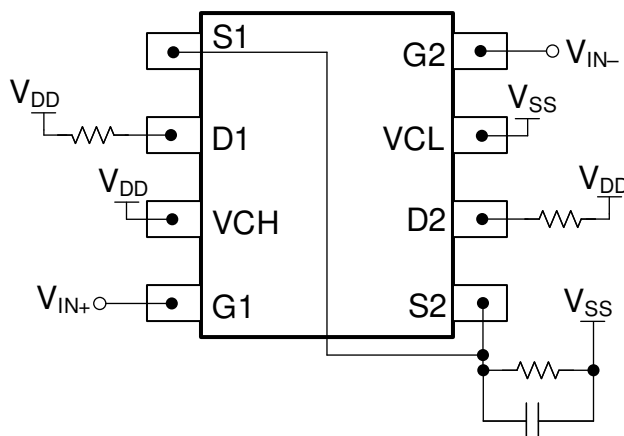

9-13. JFE2140 Layout Example: Differential Pair Configuration

10 Device and Documentation Support

10.1 Device Support

10.1.1 Development Support

10.1.1.1 PSpice® for TI

PSpice® for TI は、アナログ回路の性能評価に役立つ設計およびシミュレーション環境です。レイアウトと製造に移る前に、サブシステムの設計とプロトタイプ・ソリューションを作成することで、開発コストを削減し、市場投入までの期間を短縮できます。

10.1.1.2 TINA-TI™ シミュレーション・ソフトウェア (無償ダウンロード)

TINA-TI™ シミュレーション・ソフトウェアは、SPICE エンジンに基づいた単純かつ強力な、使いやすい回路シミュレーション・プログラムです。TINA-TI シミュレーション・ソフトウェアは、TINA™ ソフトウェアのすべての機能を持つ無償バージョンで、パッシブ・モデルとアクティブ・モデルに加えて、マクロモデルのライブラリがプリロードされています。TINA-TI シミュレーション・ソフトウェアには、SPICE の標準的な DC 解析、過渡解析、周波数ドメイン解析などの全機能に加え、追加の設計機能が搭載されています。

TINA-TI シミュレーション・ソフトウェアは設計ツールとシミュレーション Web ページから無料でダウンロードでき、ユーザーが結果をさまざまな方法でフォーマットできる、広範な後処理機能を備えています。仮想計測器により、入力波形を選択し、回路ノード、電圧、および波形をプローブして、動的なクイック・スタート・ツールを作成できます。

注

これらのファイルを使用するには、TINA ソフトウェアまたは TINA-TI ソフトウェアがインストールされている必要があります。[TINA-TI™ ソフトウェア・フォルダ](#)から、無償の TINA-TI シミュレーション・ソフトウェアをダウンロードしてください。

10.1.1.3 TI のリファレンス・デザイン

TI のリファレンス・デザインは、TI の高精度アナログ・アプリケーション専門家により作成されたアナログ・ソリューションです。TI のリファレンス・デザインは、動作原理、部品の選択、シミュレーション、完全な PCB 回路図およびレイアウト、部品表、測定済みの性能を提供します。TI のリファレンス・デザインは、<http://www.ti.com/ww/en/analog/precision-designs/> からオンラインで入手できます。

10.1.1.4 フィルタ設計ツール

フィルタ設計ツールは単純で強力な、使いやすいアクティブ・フィルタ設計プログラムです。フィルタ設計ツールを使用すると、TI のベンダ・パートナーからの TI 製オペアンプやパッシブ・コンポーネントを使用して、最適なフィルタ設計を作成できます。

フィルタ設計ツールは、設計ツールとシミュレーション Web ページから Web 対応ツールとして利用でき、包括的な複数段アクティブ・フィルタ・ソリューションをわずか数分で設計、最適化、シミュレーションできます。

10.2 Documentation Support

10.2.1 Related Documentation

For related documentation see the following:

- Texas Instruments, [JFE2140 Ultra-Low-Noise Preamplifier application note](#)
- Texas Instruments, [JFE2140 Evaluation Module user's guide](#)
- Texas Instruments, [OPAx202 Precision, Low-Noise, Heavy Capacitive Drive, 36-V Operational Amplifiers data sheet](#)
- Texas Instruments, [OPAx210 2.2-nV/√Hz Precision, Low-Power, 36-V Operational Amplifiers data sheet](#)
- Texas Instruments, [OPA1692 Low-Power, Low-Noise and Low-Distortion SoundPlus™ Audio Operational Amplifiers data sheet](#)
- Texas Instruments, [OPAx197 36-V, Precision, Rail-to-Rail Input/Output, Low Offset Voltage Operational Amplifiers data sheet](#)

10.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#) のデバイス製品フォルダを開いてください。「更新の通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

10.4 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

10.5 Trademarks

Burr-Brown™, TINA-TI™, and TI E2E™ are trademarks of Texas Instruments.

TINA™ is a trademark of DesignSoft, Inc.

PSpice® is a registered trademark of Cadence Design Systems, Inc.

すべての商標は、それぞれの所有者に帰属します。

10.6 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

10.7 用語集

テキサス・インスツルメンツ用語集 この用語集には、用語や略語の一覧および定義が記載されています。

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
JFE2140DR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	JF2140
JFE2140DR.B	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	JF2140
JFE2140DSGR	Active	Production	WSON (DSG) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2J9U
JFE2140DSGR.B	Active	Production	WSON (DSG) 8	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2J9U

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
JFE2140DR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
JFE2140DSGR	WSO	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
JFE2140DR	SOIC	D	8	2500	356.0	356.0	35.0
JFE2140DSGR	WSO	DSG	8	3000	210.0	185.0	35.0




D0008A

PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

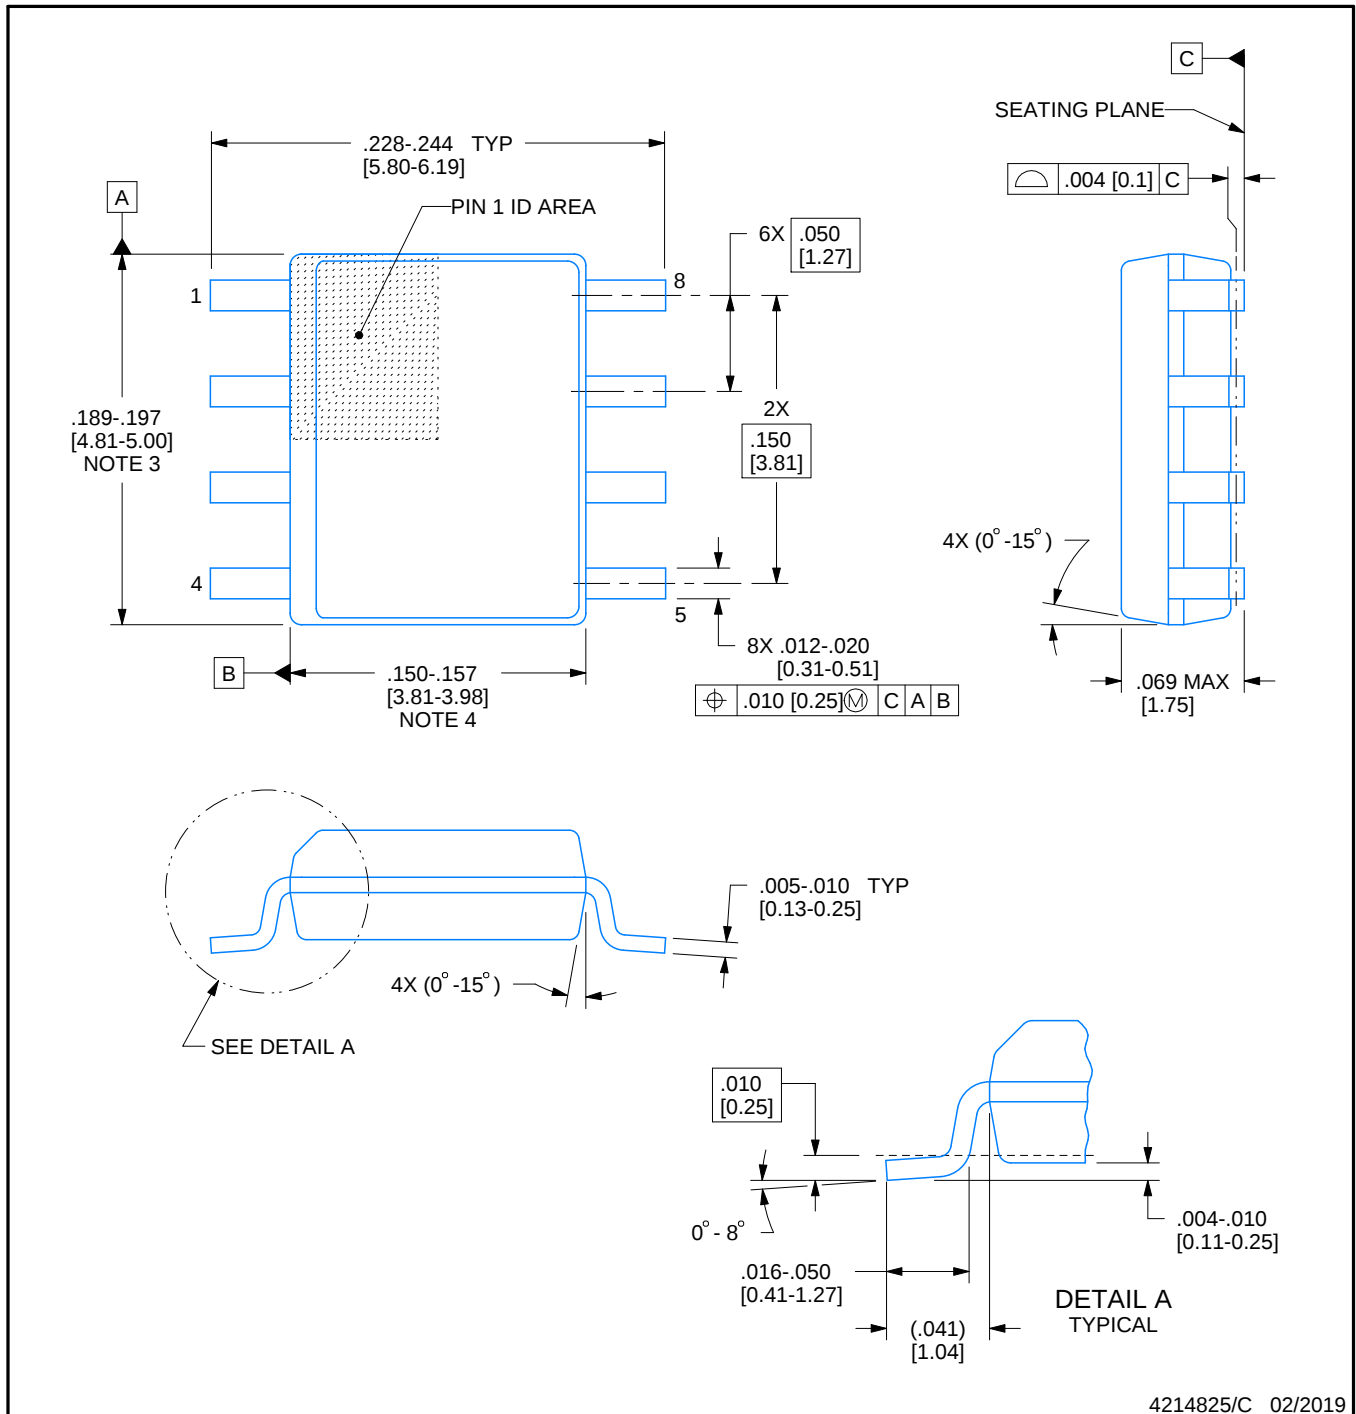

4214825/C 02/2019

NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW


DSG 8

WSON - 0.8 mm max height



2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

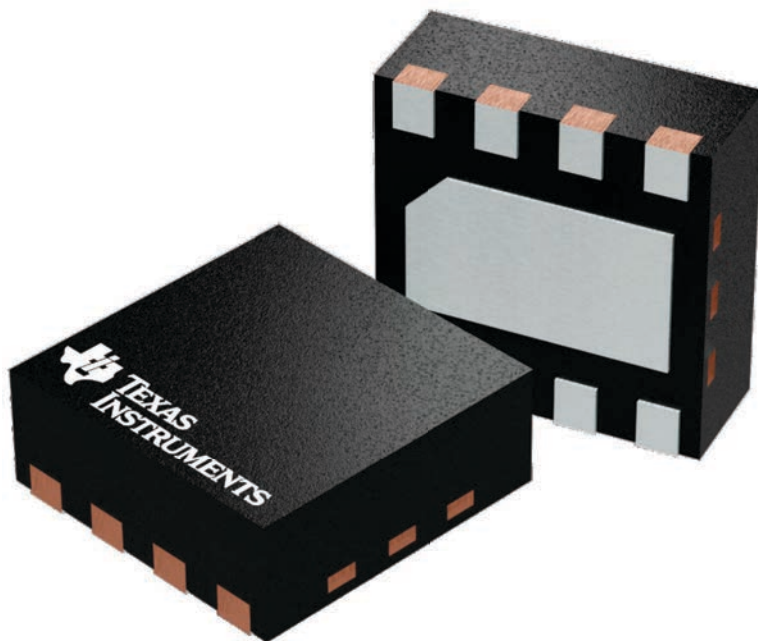

4224783/A

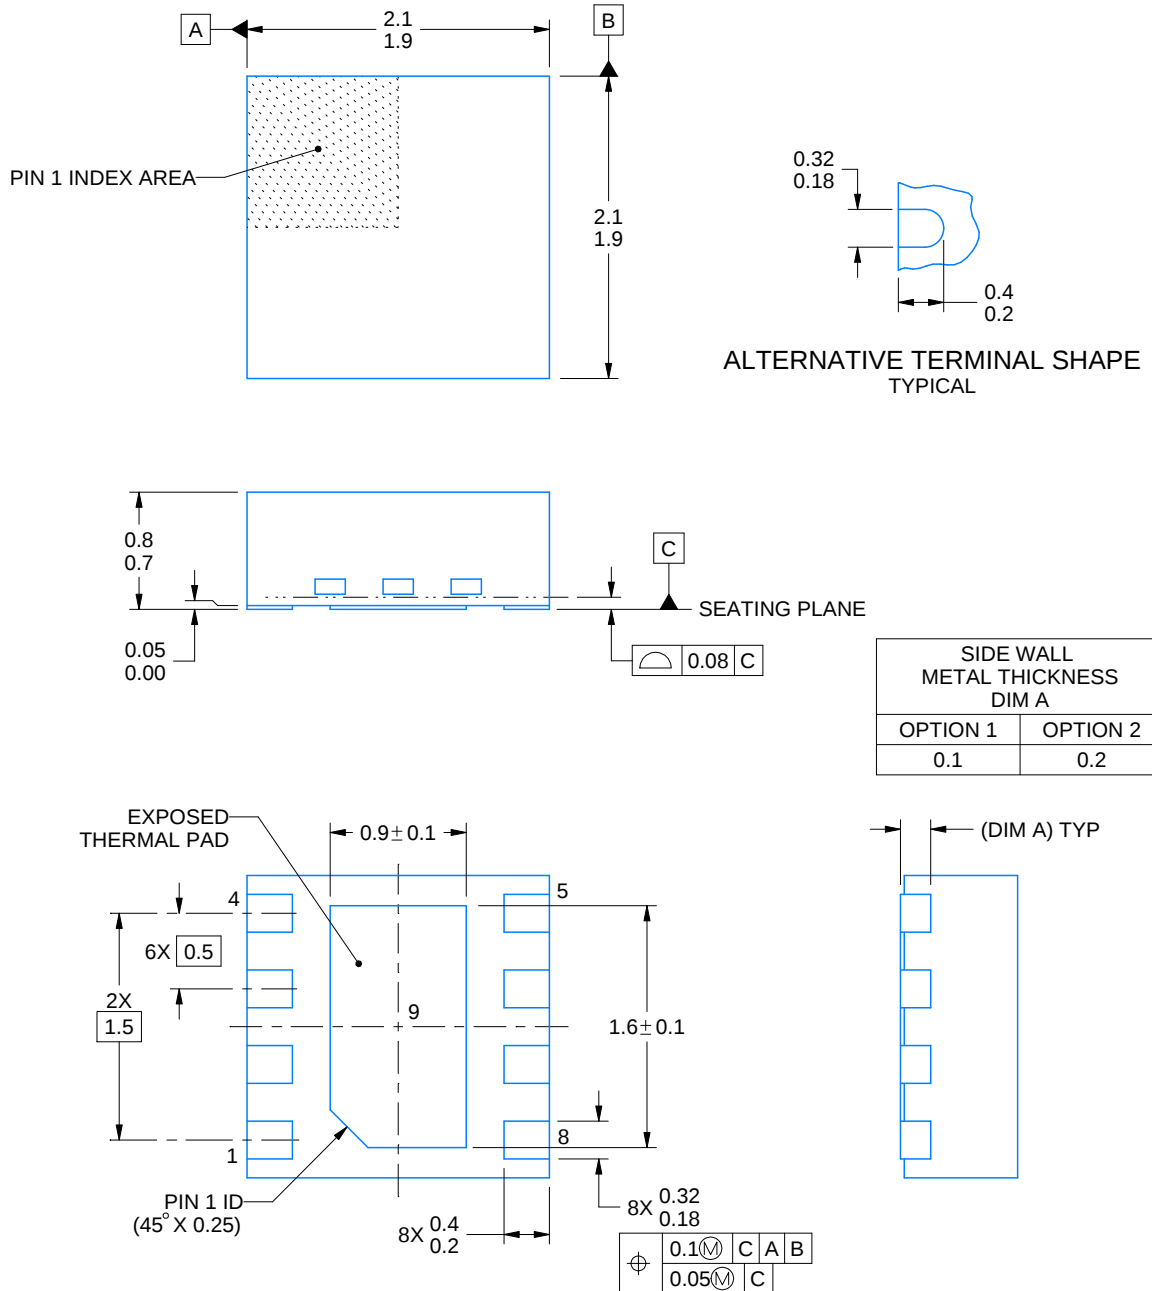

4218900/E 08/2022

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


DSG0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

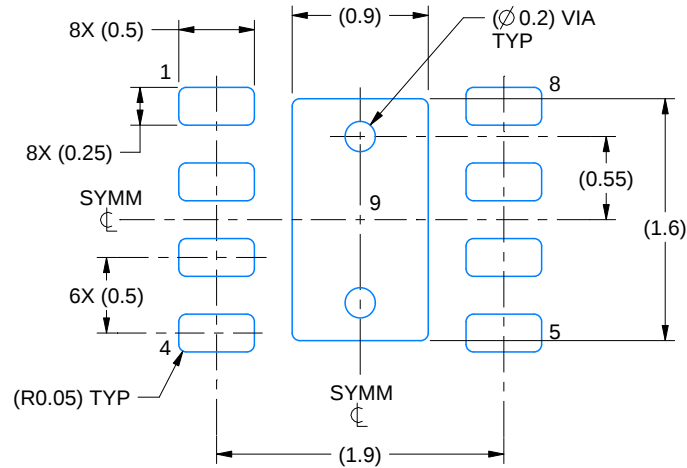

LAND PATTERN EXAMPLE
SCALE:20X

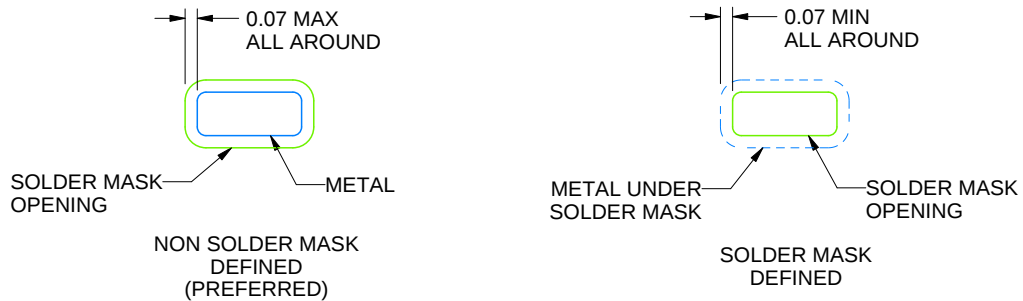

SOLDER MASK DETAILS

4218900/E 08/2022

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slue271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

DSG0008A

WSN - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

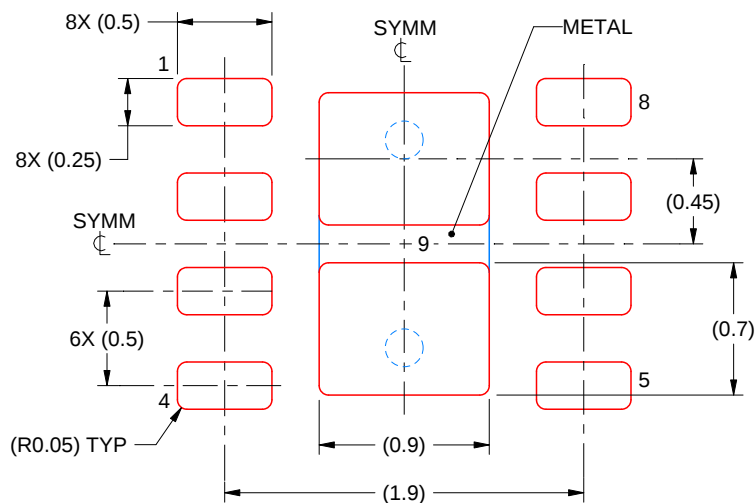

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:25X

4218900/E 08/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとしします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated