

# LMH0324 3G/HD/SD SDIデュアル出力適応型ケーブル・イコライザ

## 1 特長

- ST 424(3G)、ST 292(HD)、ST 259(SD)をサポート
- DVB-ASIおよびAES10 (MADI)と互換
- 適応型ケーブル・イコライザ
- ケーブルの到達範囲(Belden 1694A)
  - 2.97Gbpsで200m
  - 1.485Gbpsで280m
  - 270Mbpsで600m
- 低消費電力: 78mW (標準値)
- パワー・セーブ・モード: 15mW
- オンチップの入力終端(75Ωのシングルエンド)
- 入力リターン・ロス・ネットワークを内蔵
- ディエンファシス付きのデュアル100Ω出力ドライバ
- 独立した出力パワー・ダウン制御
- 信号スプリッタ・モードをサポート(-6dBの開始振幅)
- ケーブル長インジケータ
- デジタルMUTE<sub>REF</sub>スレッシュホールド
- 2.5Vまたは1.8V電源で動作
- 制御ピン、SPI、またはSMBusインターフェイスにより構成可能
- 4mm×4mmの24ピンQFNパッケージ
- 動作温度範囲: -40°C ~ +85°C

## 2 アプリケーション

- SMPTE互換のシリアル・デジタル・インターフェイス(SDI)
- 放送用ビデオ・ルータ、スイッチャ、モニタ
- DVB-ASIおよび分配アンプ
- デジタル・ビデオ処理および編集

## 3 概要

LMH0324は低消費電力でデュアル出力の、到達範囲の長い適応型ケーブル・イコライザです。75Ωの同軸ケーブル上で伝送されるSDIデータを平衡化するように設計されています。このイコライザは、125Mbps~2.97Gbpsの広いデータ速度範囲で動作します。このイコライザにはアクティブ・センシング回路が内蔵されており、堅牢な性能を保証し、入力信号の開始振幅の変化に対する耐性が強化されています。

LMH0324は低い消費電力で、長い距離のケーブルに対応できます。電力管理により、入力信号が存在しないときはさらに消費電力を減らすことができます。

LMH0324には2つの差動シリアル・データ出力があり、ファンアウト・バッファ処理を柔軟に行うことができます。出力ドライバではディエンファシスをプログラム可能で、LMH0324の出力で基板の配線損失を補償できます。LMH0324の動作状態はピン制御により設定可能です。デバイスの他の設定は、SPIまたはSMBusインターフェイスによりプログラムできます。


LMH0324は、LMH1219 (リクロックを内蔵した12Gbpsの適応型ケーブル・イコライザ)とピン互換です。このピン互換により、3Gbpsのイコライザを、リクロックを内蔵した12Gbpsのイコライザへ簡単にアップグレードできます。

### 製品情報<sup>(1)</sup>

| 型番      | パッケージ    | 本体サイズ(公称)     |
|---------|----------|---------------|
| LMH0324 | QFN (24) | 4.00mm×4.00mm |

(1) 提供されているすべてのパッケージについては、巻末の注文情報を参照してください。

### ブロック概略図

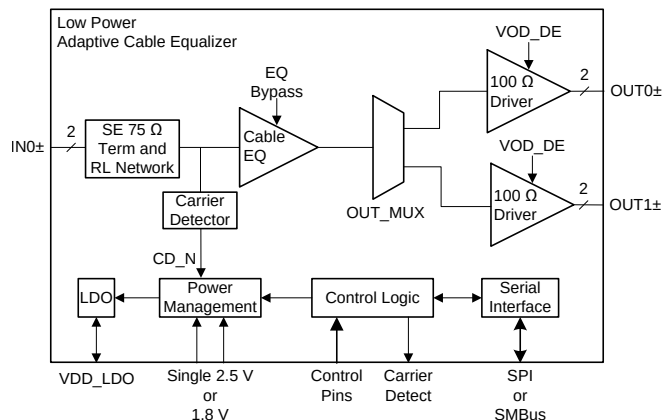

## 目次

|          |                                                                |           |           |                                             |           |
|----------|----------------------------------------------------------------|-----------|-----------|---------------------------------------------|-----------|
| <b>1</b> | <b>特長</b> .....                                                | <b>1</b>  | 7.2       | Functional Block Diagram .....              | <b>12</b> |
| <b>2</b> | <b>アプリケーション</b> .....                                          | <b>1</b>  | 7.3       | Feature Description .....                   | <b>13</b> |
| <b>3</b> | <b>概要</b> .....                                                | <b>1</b>  | 7.4       | Device Functional Modes .....               | <b>16</b> |
| <b>4</b> | <b>改訂履歴</b> .....                                              | <b>2</b>  | 7.5       | LMH0324 Register Map .....                  | <b>21</b> |
| <b>5</b> | <b>Pin Configuration and Functions</b> .....                   | <b>3</b>  | <b>8</b>  | <b>Application and Implementation</b> ..... | <b>26</b> |
| <b>6</b> | <b>Specifications</b> .....                                    | <b>5</b>  | 8.1       | Application Information .....               | <b>26</b> |
| 6.1      | Absolute Maximum Ratings .....                                 | <b>5</b>  | 8.2       | Typical Application .....                   | <b>26</b> |
| 6.2      | ESD Ratings .....                                              | <b>5</b>  | <b>9</b>  | <b>Power Supply Recommendations</b> .....   | <b>30</b> |
| 6.3      | Recommended Operating Conditions .....                         | <b>5</b>  | <b>10</b> | <b>Layout</b> .....                         | <b>31</b> |
| 6.4      | Thermal Information .....                                      | <b>6</b>  | 10.1      | Layout Guidelines .....                     | <b>31</b> |
| 6.5      | Electrical Characteristics .....                               | <b>6</b>  | 10.2      | Layout Example .....                        | <b>31</b> |
| 6.6      | Recommended SMBus Interface AC Timing Specifications .....     | <b>9</b>  | <b>11</b> | <b>デバイスおよびドキュメントのサポート</b> .....             | <b>32</b> |
| 6.7      | Serial Parallel Interface (SPI) AC Timing Specifications ..... | <b>9</b>  | 11.1      | ドキュメントの更新通知を受け取る方法 .....                    | <b>32</b> |
| 6.8      | Typical Characteristics .....                                  | <b>10</b> | 11.2      | コミュニティ・リソース .....                           | <b>32</b> |
| <b>7</b> | <b>Detailed Description</b> .....                              | <b>12</b> | 11.3      | 商標 .....                                    | <b>32</b> |
| 7.1      | Overview .....                                                 | <b>12</b> | 11.4      | 静電気放電に関する注意事項 .....                         | <b>32</b> |
|          |                                                                |           | 11.5      | Glossary .....                              | <b>32</b> |
|          |                                                                |           | <b>12</b> | <b>メカニカル、パッケージ、および注文情報</b> .....            | <b>32</b> |

## 4 改訂履歴

### Revision A (May 2016) から Revision B に変更

**Page**


- データシートの最初の公開リリース、リファレンス・デザイン用のナビゲータ・リンクを上端に追加 ..... **1**

### 2016年4月発行のものから更新

**Page**

- Deleted min and max VOD\_DE amplitude specification when VOD\_DE = Level F ..... **8**
- Changed typical VOD\_DE amplitude specifications for Levels F, R, and L ..... **8**
- Changed DEM value and DEM register settings in [Table 4](#) to match correct VOD\_DE pin logic levels ..... **14**
- 追加 new row for VOD = 5, DEM = 5 setting in [表 9](#) ..... **28**

## 5 Pin Configuration and Functions

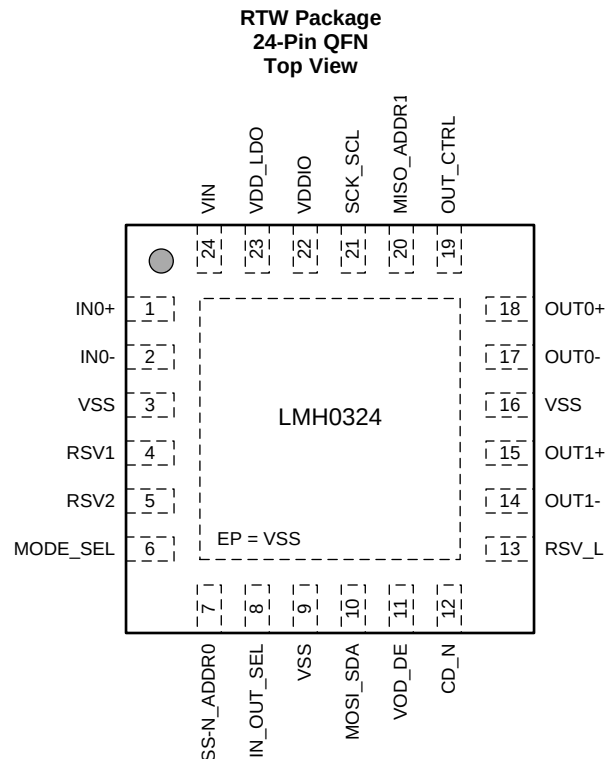

### Pin Functions

| PIN                          |     | I/O <sup>(1)</sup> | DESCRIPTION                                                                                                                                                                                                                                               |
|------------------------------|-----|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                         | NO. |                    |                                                                                                                                                                                                                                                           |
| High Speed Differential I/Os |     |                    |                                                                                                                                                                                                                                                           |
| IN0+                         | 1   | I, Analog          | Single-ended complementary inputs, 75-Ω internal termination from IN0+ or IN0- to internal common mode voltage and return loss compensation network. Requires external 4.7-μF AC coupling capacitors for SMPTE video applications.                        |
| IN0-                         | 2   | I Analog           |                                                                                                                                                                                                                                                           |
| RSV1                         | 4   |                    | Reserved pins.<br>Do not connect.                                                                                                                                                                                                                         |
| RSV2                         | 5   |                    |                                                                                                                                                                                                                                                           |
| OUT0+                        | 18  | O, Analog          | Differential complementary outputs with 100-Ω internal termination. Requires external 4.7-μF AC coupling capacitors. Output driver OUT0± can be disabled under user control.                                                                              |
| OUT0-                        | 17  | O, Analog          |                                                                                                                                                                                                                                                           |
| OUT1+                        | 15  | O, Analog          | Differential complementary outputs with 100-Ω internal termination. Requires external 4.7-μF AC coupling capacitors. Output driver OUT1± can be disabled under user control.                                                                              |
| OUT1-                        | 14  | O, Analog          |                                                                                                                                                                                                                                                           |
| Control Pins                 |     |                    |                                                                                                                                                                                                                                                           |
| CD_N                         | 12  | O, LVCMOS, OD      | CD_N is the carrier detect. CD_N is pulled LOW when signal is detected and adaptation is completed. CD_N is an open drain output. It requires an external resistor to logic supply.<br>CD_N is tolerant to 3.3 V when VDDIO is powered from 2.5 V supply. |
| IN_OUT_SEL                   | 8   | I, 4-LEVEL         | IN_OUT_SEL selects the signal flow at input port IN0 to output ports. See <a href="#">Table 2</a> for details. This pin setting can be overridden by register control.                                                                                    |
| OUT_CTRL                     | 19  | I, 4-LEVEL         | OUT_CTRL selects the equalized or un-equalized signal from IN0 to OUT0± and OUT1±. See <a href="#">Table 3</a> for details. This pin setting can be overridden by register control.                                                                       |
| VOD_DE                       | 11  | I, 4-LEVEL         | VOD_DE selects the driver output amplitude and de-emphasis level for both OUT0± and OUT1±. See <a href="#">Table 4</a> for details. This pin setting can be overridden by register control.                                                               |
| MODE_SEL                     | 6   | I, 4-LEVEL         | MODE_SEL enables SPI or SMBus serial control interface. See <a href="#">Table 5</a> for details.                                                                                                                                                          |

(1) Note: I = Input, O=Output, IO=Input or Output, OD=Open Drain, LVCMOS=2-State Logic, 4-LEVEL=4-State Logic

**Pin Functions (continued)**

| PIN                                                                |          | I/O <sup>(1)</sup> | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------|----------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                                               | NO.      |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Serial Control Interface (SPI Mode), MODE_SEL = F (Float)          |          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SS_N                                                               | 7        | I, LVCMOS          | SS_N is the Slave Select. When SS_N is at logic Low, it enables SPI access to the LMH0324 slave device. SS_N is a LVCMOS input referenced to VDDIO.                                                                                                                                                                                                                                                                             |
| MISO                                                               | 20       | O, LVCMOS          | MISO is the SPI serial data output from the LMH0324 slave device. MISO is a LVCMOS output referenced to VDDIO.                                                                                                                                                                                                                                                                                                                  |
| MOSI                                                               | 10       | I, LVCMOS          | MOSI is used as the SPI serial data input to the LMH0324 slave device. MOSI is LVCMOS input referenced to VDDIO.                                                                                                                                                                                                                                                                                                                |
| SCK                                                                | 21       | I, LVCMOS          | SCK is the SPI serial input clock to the LMH0324 slave device. SCK is LVCMOS referenced to VDDIO.                                                                                                                                                                                                                                                                                                                               |
| Serial Control Interface (SMBus MODE) , MODE_SEL = L (1 kΩ to VSS) |          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| ADDR0                                                              | 7        | Strap, 4-LEVEL     | ADDR[1:0] are SMBus address straps to select one of the 16 supported SMBus addresses. ADDR[1:0] are 4-level straps and are read into the device at power up.                                                                                                                                                                                                                                                                    |
| ADDR1                                                              | 20       | Strap, 4-LEVEL     |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SDA                                                                | 10       | IO, LVCMOS, OD     | SMBus bi-directional open drain data line to or from the LMH0324 slave device. SDA is an open drain IO and requires an external 2 kΩ to 5 kΩ pull-up resistor to the SMBus termination voltage. SDA is 3.3 V tolerant when VDDIO is powered from 2.5 V.                                                                                                                                                                         |
| SCL                                                                | 21       | I, LVCMOS, OD      | SMBus input clock to the LMH0324 slave device. It is driven by a LVCMOS open drain driver from the SMBus master. SCL requires an external 2 kΩ to 5 kΩ pull-up resistor to the SMBus termination voltage. SCL is 3.3 V tolerant when VDDIO is powered from 2.5 V.                                                                                                                                                               |
| Power                                                              |          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| VSS                                                                | 3, 9, 16 | I, Ground          | Ground reference.                                                                                                                                                                                                                                                                                                                                                                                                               |
| VIN                                                                | 24       | I, Power           | VIN is connected to an external power supply. It accepts either 2.5 V ± 5% or 1.8 V ± 5%. When VIN is powered from 2.5 V, VDD_LDO is the output of an on-chip LDO regulator and requires a bypass capacitor to VSS. When VIN is powered from 1.8 V, for lower power operation, both VIN and VDD_LDO should be connected to 1.8 V supply.                                                                                        |
| VDDIO                                                              | 22       | I, Power           | VDDIO powers the LVCMOS IO and 4-level input logic. VDDIO should be connected to 2.5 V ± 5% or 1.8 V ± 5%. VDDIO must always be greater than or equal to VIN. For SMBus access, VDDIO must be 2.5 V ± 5%.                                                                                                                                                                                                                       |
| VDD_LDO                                                            | 23       | IO, Power          | VDD_LDO is the output of the internal 1.8 V LDO regulator when VIN is connected to 2.5 V supply. VDD_LDO output requires external 1-μF and 0.1-μF bypass capacitors to VSS. The internal LDO is designed to power internal circuitry only. VDD_LDO is an input when VIN is powered from 1.8 V for lower power operation. When VIN is connected to a 1.8 V supply, both VIN and VDD_LDO should be connected to the 1.8 V supply. |
| RSV_L                                                              | 13       | I                  | For pin compatibility with the LMH1219 (11.88 Gbps Ultra-HD adaptive cable equalizer with integrated reclocker), connect RSV_L to a 2.5 V supply with a 0.1-μF bypass capacitor. For low power operation, tie RSV_L to VSS. See <a href="#">Power Supply Recommendations</a> for details.                                                                                                                                       |
| EP                                                                 |          | I, Ground          | EP is the exposed pad at the bottom of the QFN package. The exposed pad must be connected to the ground plane through a via array. See <a href="#">Figure 26</a> for details.                                                                                                                                                                                                                                                   |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                                                                                                      | MIN  | MAX  | UNIT |
|------------------------------------------------------------------------------------------------------|------|------|------|
| Supply Voltage for 2.5-V Mode (VIN, VDDIO)                                                           | −0.5 | 2.75 | V    |
| Supply Voltage for 1.8-V Mode (VIN, VDD_LDO, VDDIO)                                                  | −0.5 | 2.0  | V    |
| 4-Level Input/Output Voltage for 2.5 V Supply (IN_OUT_SEL, OUT_CTRL, VOD_DE, MODE_SEL, ADDR0, ADDR1) | −0.5 | 2.75 | V    |
| 4-Level Input/Output Voltage for 1.8 V Supply (IN_OUT_SEL, OUT_CTRL, VOD_DE, MODE_SEL, ADDR0, ADDR1) | −0.5 | 2.0  | V    |
| SMBus Input/Output Voltage (SDA, SCL) <sup>(2)</sup>                                                 | −0.5 | 4.0  | V    |
| SPI Input/Output Voltage for 2.5 V Supply (SS_N, MISO, MOSI, and SCK)                                | −0.5 | 2.75 | V    |
| SPI Input/Output Voltage for 1.8 V Supply (SS_N, MISO, MOSI, and SCK)                                | −0.5 | 2.0  | V    |
| Input Voltage (IN0±)                                                                                 | −0.5 | 2.75 | V    |
| Input Current (IN0±)                                                                                 | −30  | 30   | mA   |
| Junction Temperature                                                                                 |      | 125  | °C   |
| Storage temperature                                                                                  | −65  | 150  | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) SDA and SCL is 3.3 V tolerant when VDDIO is 2.5 V.

### 6.2 ESD Ratings

|                                            |                                                                                | VALUE | UNIT |
|--------------------------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±4500 | V    |
|                                            | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |      |

- (1) JEDEC document JEP155 states that 500 V HBM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 500 V HBM is possible with the necessary precautions. Pins listed as ±4500 V may actually have higher performance.
- (2) JEDEC document JEP157 states that 250 V CDM allows safe manufacturing with a standard ESD control process. Manufacturing with less than 250 V CDM is possible with the necessary precautions. Pins listed as ±1500 V may actually have higher performance.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                |                                                               |                              | MIN   | NOM | MAX   | UNIT  |
|--------------------------------|---------------------------------------------------------------|------------------------------|-------|-----|-------|-------|
| 2.5 V Supplies                 | VIN, VDDIO to VSS                                             |                              | 2.375 | 2.5 | 2.625 | V     |
| 1.8 V Supplies                 | VIN, VDDIO , VDD_LDO to VSS                                   |                              | 1.71  | 1.8 | 1.89  | V     |
| VDD <sub>SMBUS</sub>           | SMBus: SDA, SCL Open Drain Termination Voltage, VDDIO = 2.5 V |                              | 2.375 |     | 3.6   | V     |
| V <sub>LAUNCH</sub>            | Source Launch Amplitude before Coax                           |                              | 0.72  | 0.8 | 0.88  | Vp-p  |
|                                | Splitter Mode                                                 |                              | 0.36  | 0.4 | 0.44  |       |
| T <sub>JUNCTION</sub>          | Operating Junction Temperature                                |                              |       |     | 100   | °C    |
| T <sub>AMBIENT</sub>           | Ambient Temperature                                           |                              | −40   | 25  | 85    | °C    |
| N <sub>PS</sub> <sup>(1)</sup> | Supply Noise                                                  | 50 Hz to 1 MHz, Sinusoidal   |       | <20 |       | mVp-p |
|                                |                                                               | 1.1 MHz to 6 GHz, Sinusoidal |       | <10 |       |       |

- (1) The sum of the DC supply voltage and AC supply noise should not exceed the recommended supply voltage range.

## 6.4 Thermal Information

| THERMAL METRIC <sup>(1)(2)</sup> |                                              | LMH0324   | UNIT |
|----------------------------------|----------------------------------------------|-----------|------|
|                                  |                                              | RTW (QFN) |      |
|                                  |                                              | 24 PINS   |      |
| R <sub>θJA</sub>                 | Junction-to-ambient thermal resistance       | 33.2      | °C/W |
| R <sub>θJC(top)</sub>            | Junction-to-case (top) thermal resistance    | 28.8      | °C/W |
| R <sub>θJB</sub>                 | Junction-to-board thermal resistance         | 11.2      | °C/W |
| ψ <sub>JT</sub>                  | Junction-to-top characterization parameter   | 0.3       | °C/W |
| ψ <sub>JB</sub>                  | Junction-to-board characterization parameter | 11.3      | °C/W |
| R <sub>θJC(bot)</sub>            | Junction-to-case (bottom) thermal resistance | 2.2       | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report ([SPRA953](#)).
- (2) No heat sink is assumed for these estimations. Depending on the application, a heat sink, faster air flow, and/or reduced ambient temperature (<85°C) may be required in order to maintain the maximum junction temperature specified in [Electrical Characteristics](#).

## 6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

| PARAMETER             |                                    | TEST CONDITIONS                                                                                 | MIN  | TYP | MAX  | UNIT |
|-----------------------|------------------------------------|-------------------------------------------------------------------------------------------------|------|-----|------|------|
| <b>POWER</b>          |                                    |                                                                                                 |      |     |      |      |
| PD <sub>1P8V</sub>    | Power Consumption <sup>(1)</sup>   | Measured with PRBS-10, VOD = Default, only OUT0 enabled, 2.97 Gbps, VIN=VDD_LDO=VDDIO=1.8 V     |      | 78  |      | mW   |
|                       |                                    | Measured with PRBS-10, VOD = Default, OUT0 and OUT1 enabled, 2.97 Gbps, VIN=VDD_LDO=VDDIO=1.8 V |      | 100 |      | mW   |
| PD <sub>Z1P8V</sub>   | Power Consumption <sup>(1)</sup>   | Power Save Mode: No input signal, VIN=VDD_LDO=VDDIO=1.8 V                                       |      | 15  |      | mW   |
| PD <sub>2P5V</sub>    | Power Consumption <sup>(1)</sup>   | Measured with PRBS-10, 2.97 Gbps, VOD = Default, only OUT0 enabled, VIN=VDDIO=2.5 V             |      | 128 |      | mW   |
|                       |                                    | Measured with PRBS-10, 2.97 Gbps, VOD = Default, OUT0 and OUT1 enabled, VIN=VDDIO=2.5 V         |      | 147 |      | mW   |
| PD <sub>Z2P5V</sub>   | Power Consumption <sup>(1)</sup>   | Power Save Mode: No input signal, VIN=VDDIO=2.5 V                                               |      | 28  |      | mW   |
| IDD                   | Current Consumption <sup>(1)</sup> | Measured at 1.8 V supply with PRBS-10, 2.97 Gbps, VOD = Default, only OUT0 enabled              |      | 43  | 55   | mA   |
|                       |                                    | Measured at 2.5 V supply with PRBS-10, 2.97 Gbps, VOD = Default, only OUT0 enabled              |      | 51  | 71   |      |
| IDD <sub>Z_1P8V</sub> | Current Consumption <sup>(1)</sup> | Forced Power Save Mode: MODE_SEL = LEVEL-H, Measured at 1.8 V supply, VIN=VDD_LDO=VDDIO=1.8 V   |      | 4   | 10   | mA   |
| V <sub>LDO</sub>      | LDO 1.8 V Output Voltage           | VIN = VDDIO = 2.5 V                                                                             | 1.71 | 1.8 | 1.89 | V    |

- (1) Measured with RSV\_L tied to VSS.

## Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                                                                                     |                                                    | TEST CONDITIONS                                                   | MIN         | TYP         | MAX | UNIT  |
|-----------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------|-------------|-------------|-----|-------|
| LVCMOS DC SPECIFICATIONS                                                                      |                                                    |                                                                   |             |             |     |       |
| V <sub>IH</sub>                                                                               | High Level Input Voltage                           | 2-Level Input (SS_N, SCK, MOSI), VDDIO = 2.5 V or 1.8 V           | 0.7 x VDDIO | VDDIO + 0.3 |     | V     |
|                                                                                               |                                                    | 2-Level Input (SCL, SDA), VDDIO = 2.5 V                           | 0.7 x VDDIO | 3.6         |     |       |
| V <sub>IL</sub>                                                                               | Low Level Input Voltage                            | 2-Level Input (SS_N, SCK, MOSI) VDDIO = 2.5 V or 1.8 V            | -0.3        | 0.3 x VDDIO |     | V     |
|                                                                                               |                                                    | 2-Level Input (SCL, SDA), VDDIO = 2.5 V                           | 0           | 0.3 x VDDIO |     |       |
| V <sub>OH</sub>                                                                               | High Level Output Voltage                          | I <sub>OH</sub> = -2 mA, (MISO), VDDIO = 2.5 V or 1.8 V           | 0.8 x VDDIO | VDDIO       |     | V     |
| V <sub>OL</sub>                                                                               | Low Level Output Voltage                           | I <sub>OL</sub> = 2 mA, (MISO), VDDIO = 2.5 V or 1.8 V            | 0           | 0.2 x VDDIO |     | V     |
|                                                                                               |                                                    | I <sub>OL</sub> = 3 mA, (CD_N, SCL, SDA), VDDIO = 2.5 V           | 0           | 0.4         |     |       |
| I <sub>IH</sub>                                                                               | Input High Leakage Current                         | SPI Mode: LVCMOS (SS_N, SCK, MOSI), Vinput = VDDIO                |             |             | 15  | μA    |
|                                                                                               |                                                    | SMBus Mode: LVCMOS (CD_N, SCL, SDA), Vinput = VDDIO               |             |             | 10  |       |
| I <sub>IL</sub>                                                                               | Input Low Leakage Current                          | SPI Mode: LVCMOS (SS_N), Vinput = VSS                             | -40         |             |     | μA    |
|                                                                                               |                                                    | SPI Mode: LVCMOS (SCK, MOSI), Vinput = VSS                        | -15         |             |     |       |
|                                                                                               |                                                    | SMBus Mode: LVCMOS (CD_N, SCL, SDA), Vinput = VSS                 | -10         |             |     |       |
| 4-LEVEL LOGIC DC SPECIFICATIONS (REFERENCE TO VDDIO, APPLY TO ALL 4-LEVEL INPUT CONTROL PINS) |                                                    |                                                                   |             |             |     |       |
| V <sub>4_LVL_H</sub>                                                                          | LEVEL-H Input Voltage                              | External pull-up 1 kΩ to VDDIO                                    |             | VDDIO       |     | V     |
| V <sub>4_LVL_F</sub>                                                                          | LEVEL-F Default Voltage                            | Float, VDDIO = 2.5 V or 1.8 V                                     |             | 2/3 x VDDIO |     | V     |
| V <sub>4_LVL_R</sub>                                                                          | LEVEL-R Input Voltage                              | External pull-down 20 kΩ to VSS, VDDIO = 2.5 V or 1.8 V           |             | 1/3 x VDDIO |     | V     |
| V <sub>4_LVL_L</sub>                                                                          | LEVEL-L Input Voltage                              | External pull-down 1 kΩ to VSS                                    |             | 0           |     | V     |
| I <sub>4_LVL_IH</sub>                                                                         | Input High Leakage Current                         | 4-Levels (IN_OUT_SEL, OUT_CTRL, VOD_DE, MODE_SEL), Vinput = VDDIO | 20          | 45          | 80  | μA    |
|                                                                                               |                                                    | SMBus Mode: 4-Levels (ADDR0, ADDR1), Vinput = VDDIO               | 20          | 45          | 80  |       |
| I <sub>4_LVL_IL</sub>                                                                         | Input Low Leakage Current                          | 4-Levels (IN_OUT_SEL, OUT_CTRL, VOD_DE, MODE_SEL), Vinput = VSS   | -160        | -93         | -40 | μA    |
|                                                                                               |                                                    | SMBus Mode: 4-Levels (ADDR0, ADDR1), Vinput = VSS                 | -160        | -93         | -40 |       |
| RECEIVER SPECIFICATIONS (IN0+)                                                                |                                                    |                                                                   |             |             |     |       |
| R <sub>IN0_TERM</sub>                                                                         | DC Input Termination                               | IN0+ and IN0- to VSS                                              | 63          | 75          | 87  | Ω     |
| RL <sub>IN0</sub>                                                                             | Input Return Loss Reference to 75 Ω <sup>(2)</sup> | S11, 5 MHz to 1.485 GHz                                           |             | -20         |     | dB    |
|                                                                                               |                                                    | S11, 1.485 GHz to 3 GHz                                           |             | -18         |     |       |
| V <sub>IN0_CM</sub>                                                                           | IN0 DC Common Mode Voltage                         | Input common mode voltage at IN0+ to VSS                          |             | 1.4         |     | V     |
| V <sub>WANDER</sub>                                                                           | Input DC Wander                                    | SD signal at IN0+, Input launch amplitude = 0.8 Vp-p              |             | 100         |     | mVp-p |
|                                                                                               |                                                    | HD, 3G signal at IN0+, Input launch amplitude = 0.8 Vp-p          |             | 50          |     | mVp-p |

(2) This parameter was measured with an LMH0324-18EVM.

## Electrical Characteristics (continued)

over operating free-air temperature range (unless otherwise noted)

| PARAMETER                              |                                                              | TEST CONDITIONS                                                                         | MIN | TYP  | MAX  | UNIT         |
|----------------------------------------|--------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----|------|------|--------------|
| <b>OUTPUT DRIVERS (OUT0± OR OUT1±)</b> |                                                              |                                                                                         |     |      |      |              |
| VOD                                    | Output Differential Voltage <sup>(3)</sup>                   | 8T pattern, see <a href="#">Figure 6</a> , VOD_DE = LEVEL-H<br>SD, HD, and 3G           |     | 410  |      | mVp-p        |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 6</a> , VOD_DE = LEVEL-F<br>SD, HD, and 3G           | 485 | 560  | 620  |              |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 6</a> , VOD_DE = LEVEL-R<br>SD, HD, and 3G           |     | 635  |      |              |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 6</a> , VOD_DE = LEVEL-L<br>SD, HD, and 3G           |     | 810  |      |              |
| VOD <sub>DE</sub>                      | De-emphasized Output Differential Voltage <sup>(3)</sup>     | 8T pattern, see <a href="#">Figure 7</a> , VOD_DE = LEVEL-H<br>SD, HD, and 3G           |     | 410  |      |              |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 7</a> , VOD_DE = LEVEL-F Default<br>SD, HD, and 3G   |     | 500  |      |              |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 7</a> , VOD_DE = LEVEL-R<br>SD, HD, and 3G           |     | 480  |      |              |
|                                        |                                                              | 8T pattern, see <a href="#">Figure 7</a> , VOD_DE = LEVEL-L<br>SD, HD, and 3G           |     | 480  |      |              |
| R <sub>OUT_TERM</sub>                  | DC Output Differential Termination                           | Measured across OUTn+ and OUTn-                                                         | 80  | 100  | 120  | Ω            |
| t <sub>R</sub> /t <sub>F</sub>         | Output Rise or Fall Time <sup>(4)</sup>                      | 20% - 80% using 8T Pattern 270 Mbps, 1.485 Gbps, 2.97 Gbps, measured after 1 inch trace |     | 45   |      | ps           |
| D <sub>R</sub>                         | Input Data Rate                                              |                                                                                         | 125 |      |      | Mbps<br>Gbps |
|                                        |                                                              |                                                                                         |     |      | 2.97 |              |
| JIT <sub>RATE</sub>                    | Jitter for Various Cable Length <sup>(4)</sup>               | 2.97 Gbps B1694A: 0 – 150 m                                                             |     | 0.25 |      | UI           |
|                                        |                                                              | 2.97 Gbps B1694A: 150 m                                                                 |     | 0.25 | 0.4  |              |
|                                        |                                                              | 2.97 Gbps B1694A: 150 - 200 m                                                           |     | 0.55 |      |              |
|                                        |                                                              | 1.485 Gbps B1694A: 0 – 200 m                                                            |     | 0.2  |      |              |
|                                        |                                                              | 1.485 Gbps B1694A: 200 m                                                                |     | 0.2  | 0.35 |              |
|                                        |                                                              | 1.485 Gbps B1694A: 200 – 300 m                                                          |     | 0.55 |      |              |
|                                        |                                                              | 270 Mbps B1694A: 0 – 400 m                                                              |     | 0.2  |      |              |
|                                        |                                                              | 270 Mbps B1694A: 400 m                                                                  |     | 0.15 | 0.3  |              |
| T <sub>ADAPT</sub>                     | Equalizer Adapt Time - Signal detect to Adaptation Completed | PRBS-10, Belden 1694A coax cable, nominal launch amplitude of 0.8 Vpp, 2.97 Gbps        |     | 5    |      | ms           |
|                                        |                                                              |                                                                                         |     |      |      |              |

(3) ATE production tested with DC method.

(4) This parameter was measured with an LMH0324-18EVM.



## 6.6 Recommended SMBus Interface AC Timing Specifications

over recommended operating supply and temperature ranges (unless otherwise noted) <sup>(1)(2) (3)</sup>

|                     |                                                                                              |  | MIN | NOM | MAX | UNIT |
|---------------------|----------------------------------------------------------------------------------------------|--|-----|-----|-----|------|
| F <sub>SCL</sub>    | SMBus SCL Frequency                                                                          |  | 10  |     | 400 | kHz  |
| T <sub>BUF</sub>    | Bus Free Time between Stop and Start Condition                                               |  | 1.3 |     |     | μs   |
| T <sub>HD:STA</sub> | Hold time after (Repeated) Start Condition. After this period, the first clock is generated. |  | 0.6 |     |     | μs   |
| T <sub>SU:STA</sub> | Repeated Start Condition Setup Time                                                          |  | 0.6 |     |     | μs   |
| T <sub>SU:STO</sub> | Stop Condition Setup Time                                                                    |  | 0.6 |     |     | μs   |
| T <sub>HD:DAT</sub> | Data Hold Time                                                                               |  | 0   |     |     | ns   |
| T <sub>SU:DAT</sub> | Data Setup Time                                                                              |  | 100 |     |     | ns   |
| T <sub>LOW</sub>    | Clock Low Period                                                                             |  | 1.3 |     |     | μs   |
| T <sub>HIGH</sub>   | Clock High Period                                                                            |  | 0.6 |     |     | μs   |
| T <sub>R</sub>      | Clock/Data Rise Time                                                                         |  |     |     | 300 | ns   |
| T <sub>F</sub>      | Clock/Data Fall Time                                                                         |  |     |     | 300 | ns   |

(1) These parameters support SMBus 2.0 specifications.

(2) These parameters are not production tested.


(3) See [Figure 1](#) for timing diagrams.

## 6.7 Serial Parallel Interface (SPI) AC Timing Specifications


over recommended operating supply and temperature ranges (unless otherwise noted) <sup>(1)</sup>

|                   |                              |  | MIN                     | NOM | MAX | UNIT |
|-------------------|------------------------------|--|-------------------------|-----|-----|------|
| F <sub>SCK</sub>  | SPI SCK Frequency            |  |                         | 10  | 20  | MHz  |
| T <sub>SCK</sub>  | SCK Period                   |  | 50                      |     |     | ns   |
| T <sub>PH</sub>   | SCK Pulse Width High         |  | 0.40 × T <sub>SCK</sub> |     |     | ns   |
| T <sub>PL</sub>   | SCK Pulse Width Low          |  | 0.40 × T <sub>SCK</sub> |     |     | ns   |
| T <sub>SU</sub>   | MOSI Setup Time              |  | 4                       |     |     | ns   |
| T <sub>H</sub>    | MOSI Hold Time               |  | 4                       |     |     | ns   |
| T <sub>SSSU</sub> | SS_N Setup Time              |  | 14                      |     |     | ns   |
| T <sub>SSH</sub>  | SS_N Hold Time               |  | 4                       |     |     | ns   |
| T <sub>SSOF</sub> | SS_N Off Time                |  | 1                       |     |     | μs   |
| T <sub>ODZ</sub>  | MISO Driven-to-Tristate Time |  |                         | 20  |     | ns   |
| T <sub>OZD</sub>  | MISO Tristate-to-Driven Time |  |                         | 10  |     | ns   |
| T <sub>OD</sub>   | MISO Output Delay Time       |  |                         | 15  |     | ns   |

(1) See [Figure 2](#) for timing diagrams.

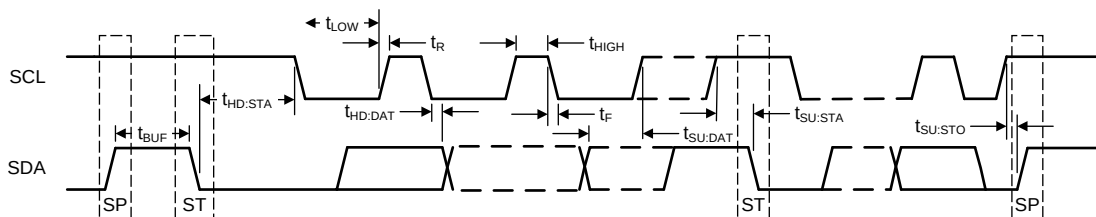


**Figure 1. SMBus Timing Parameters**

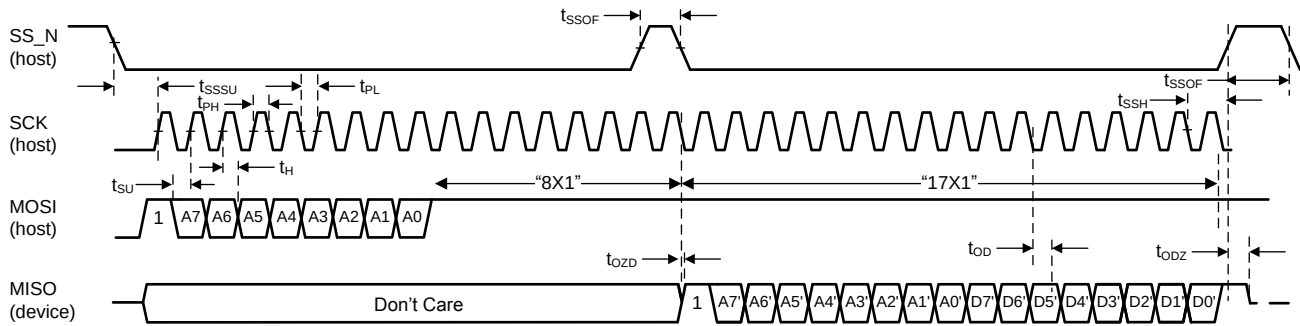


**Figure 2. SPI Timing Parameters**

## 6.8 Typical Characteristics


Typical device characteristics at  $T_A = 25^\circ\text{C}$  and  $V_{IN} = V_{DDIO} = 2.5\text{ V}$ , unless otherwise noted.

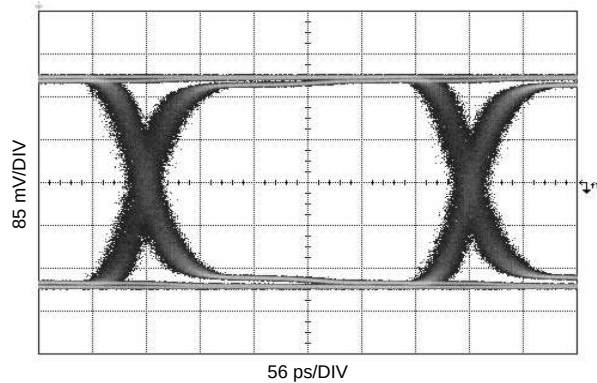


**Figure 3. 2.97 Gbps, Input: 150 m Belden 1694A PRBS10**

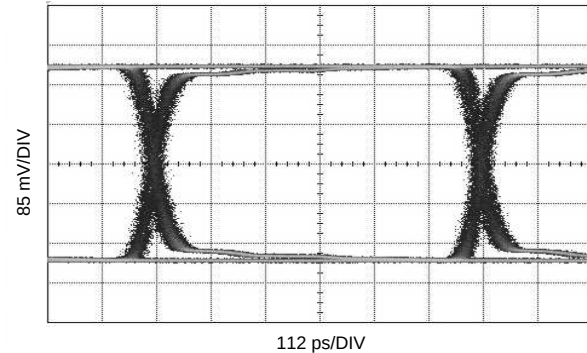

**Figure 4. 1.485 Gbps, Input: 200 m Belden 1694A PRBS10**

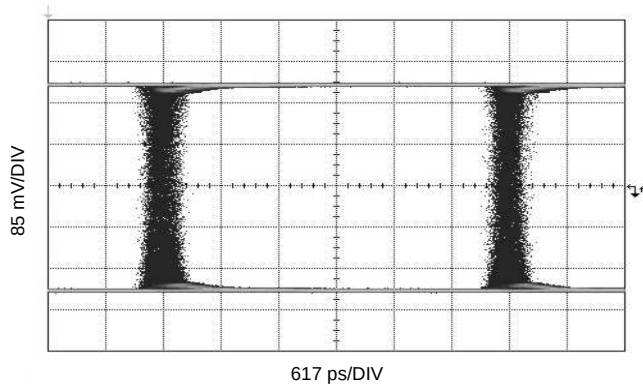


**Figure 5. 270 Mbps, Input: 400 m Belden 1694A PRBS10**

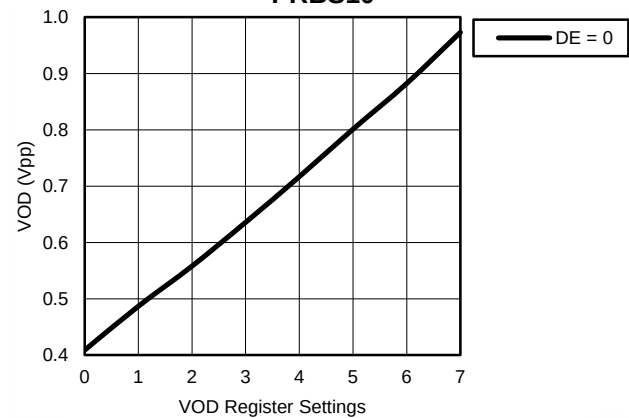

**Figure 6. VOD vs. VOD and DEM Register Settings**

## Typical Characteristics (continued)

Typical device characteristics at  $T_A = 25^\circ\text{C}$  and  $V_{IN} = V_{DDIO} = 2.5\text{ V}$ , unless otherwise noted.

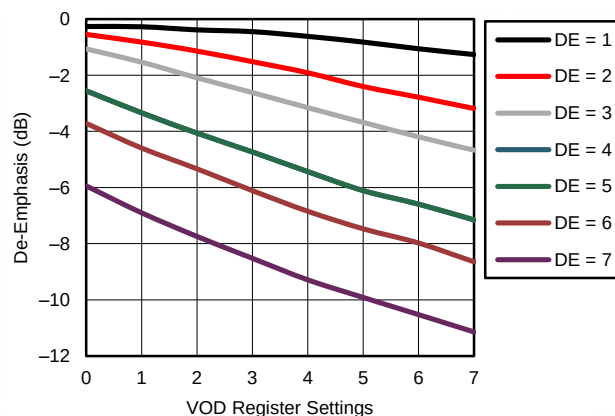

**Figure 7. De-emphasis vs. VOD and DEM Register Settings**

## 7 Detailed Description


### 7.1 Overview

The LMH0324 is an adaptive cable equalizer designed to equalize serial digital video data transmitted over long distance of coaxial cable, such as Belden 1694A. It is designed with high gain equalization boost implemented with low power and low noise circuitry, supporting 3G/HD/SD SDI video transport over high loss coaxial cable.

It is designed to support common video data rates from 125 Mbps to 2.97 Gbps, compatible to SMPTE video standards ST-424, ST-344, ST-292, ST-259, and DVB-ASI.

The LMH0324 automatically selects the correct level of equalization boost based on the signal quality of the input signal. It offers two output drivers that support fan-out buffering. Programmable de-emphasis is available to reduce the inter-symbol interference jitter caused by the printed circuit board traces connecting the drivers to their downstream receivers.

### 7.2 Functional Block Diagram

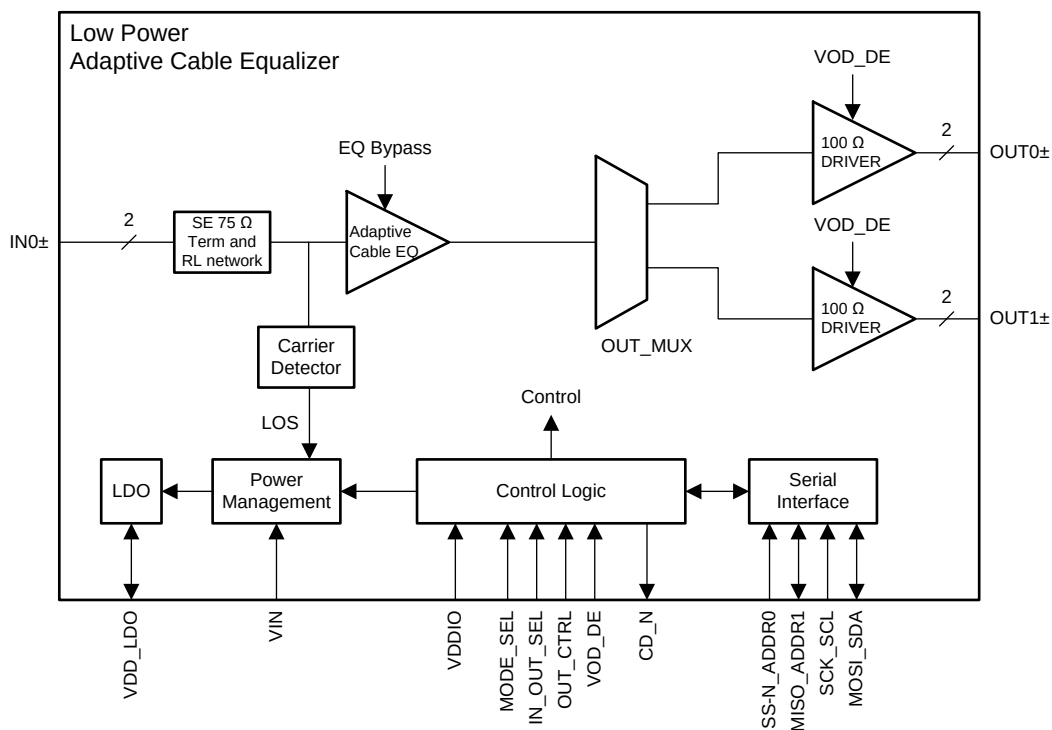

## 7.3 Feature Description

The LMH0324 consists of several key blocks:

- [4-Level Input Configuration Pins](#)
- [Carrier Detect](#)
- [Adaptive Cable Equalizer](#)
- [Launch Amplitude](#)
- [Input-Output Mux Selection](#)
- [Output Function Control](#)
- [Output Driver Amplitude and De-Emphasis Control](#)

### 7.3.1 4-Level Input Configuration Pins

The 4-level input configuration pins use a resistor divider to provide four logic states for each control pin. There is an internal 30-k $\Omega$  pullup and a 60-k $\Omega$  pulldown connected to the control pin that sets the default voltage at  $2/3 \times VDDIO$ . These resistors, together with the external resistor, combine to achieve the desired voltage level. By using the 1-k $\Omega$  pull-down, 20-k $\Omega$  pulldown, no connect, and 1-k $\Omega$  pullup, the optimal voltage levels for each of the four input states are achieved as shown in [Table 1](#).

**Table 1. 4-Level Control Pin Settings**

| LEVEL | SETTING                   | RESULTING PIN VOLTAGE |
|-------|---------------------------|-----------------------|
| H     | Tie 1 k $\Omega$ to VDDIO | VDDIO                 |
| F     | Float (leave pin open)    | $2/3 \times VDDIO$    |
| R     | Tie 20 k $\Omega$ to VSS  | $1/3 \times VDDIO$    |
| L     | Tie 1 k $\Omega$ to VSS   | 0                     |

Typical 4-Level Input Thresholds:

- Internal Threshold between L and R =  $0.2 \times VDDIO$
- Internal Threshold between R and F =  $0.5 \times VDDIO$
- Internal Threshold between F and H =  $0.8 \times VDDIO$

### 7.3.2 Carrier Detect

An internal Carrier Detector circuit is used to monitor the presence or absence of the input signal. When the input signal amplitude exceeds the carrier detector's threshold, adaptation is activated, and CD\_N is pulled low at the end of adaptation. When the input signal amplitude is below the carrier detector's threshold, input equalization circuitry is powered down and the CD\_N is pulled high to indicate absence of input signal. The LMH0324 high gain adaptive cable equalizer supports long cable reach. As a result, the carrier detector threshold is sensitive, and system designers need to pay close attention to the PCB layout to avoid excessive crosstalk from interfering with the carrier detection.

In the absence of input signal, the LMH0324 automatically goes into Power Save Mode to conserve power consumption. When valid signal is detected, the LMH0324 automatically exits the Power Save Mode and returns to the normal operating mode. An LED can be connected to CD\_N through a current limiting resistor to provide visual indication of the carrier detection.

### 7.3.3 Adaptive Cable Equalizer

INO+ is the input to the adaptive cable equalizer. It has an on-chip 75- $\Omega$  termination to the input common mode voltage and includes a series return loss compensation network for meeting stringent SMPTE return loss requirements. It is designed for AC coupling, requiring a 4.7- $\mu$ F AC coupling capacitor for minimizing base-line wander due to the rare-occurring pathological bit pattern. The cable equalizer is designed with high gain and low noise circuitry to compensate for the insertion loss of a coaxial cable, such as Belden 1694A, which is widely used in broadcast video infrastructures.

Internal control loops are used to monitor the input signal quality and automatically select the optimum equalization boost and DC offset compensation. The LMH0324 is designed to handle the stringent pathological pattern defined in the SMPTE RP 198 and SMPTE RP 178 standards.

### 7.3.4 Launch Amplitude

The LMH0324 is designed to equalize data transmitted through a coaxial cable driven by a SMPTE compatible cable driver with launch amplitude of 800 mVp-p  $\pm$  10%. In applications where a 1:2 passive splitter is used, the signal amplitude is reduced by half due to the 6 dB insertion loss of the splitter. The LMH0324 is designed to support -6 dB splitter mode, enabled by SPI or SMBus serial interface.

### 7.3.5 Input-Output Mux Selection

By default, the LMH0324 input-to-output signal flow and data rate selection are configured by the IN\_OUT\_SEL pin logic settings shown in [Table 2](#). These settings can be overridden via register control by applying the appropriate override bit values.

**Table 2. IN\_OUT\_SEL Pin Settings**

| LEVEL | DEFINITION                       |
|-------|----------------------------------|
| H     | IN0 to OUT0 and OUT1             |
| F     | IN0 to OUT0 (with OUT1 disabled) |
| R     | Reserved                         |
| L     | Reserved                         |

### 7.3.6 Output Function Control

By default, the LMH0324 output function control for OUT0 and OUT1 is configured by the OUT\_CTRL pin logic settings shown in [Table 3](#). These settings can be overridden via register control by applying the appropriate override bit values.

**Table 3. OUT\_CTRL Pin Settings**

| LEVEL | DEFINITION                                                           |
|-------|----------------------------------------------------------------------|
| H     | Equalizer Bypass<br>Raw data at IN0+ is routed to the output drivers |
| F     | Normal Data<br>Equalized data is routed to the output drivers        |
| R     | Reserved                                                             |
| L     | Reserved                                                             |

### 7.3.7 Output Driver Amplitude and De-Emphasis Control

The VOD\_DE control pin selects the output amplitude and de-emphasis settings for both OUT0 $\pm$  and OUT1 $\pm$ . It offers users the capability to select higher output amplitude and de-emphasis level for longer board trace that connects the drivers to their downstream receivers. Driver de-emphasis provides transmitter equalization to reduce the ISI caused by the board trace.


By default, the output driver VOD and de-emphasis settings are configured by the VOD\_DE pin logic settings shown in [Table 4](#). These settings can be overridden via register control. Through register programming, the output amplitude and de-emphasis level can be individually set for OUT0 $\pm$  and OUT1 $\pm$ . SPI and SMBus register programming provide a wider range of output amplitude and de-emphasis levels.

**Table 4. Recommended VOD\_DE Pin and Register Settings for Different FR4 Trace Lengths<sup>(1)</sup>**

| VOD_DE LEVEL | VOD REG SETTING<br>OUT0 $\pm$ : 0x30[5]=1, 0x30[2:0]<br>OUT1 $\pm$ : 0x32[5]=1, 0x32[2:0] | DEM REG SETTING<br>OUT0 $\pm$ : 0x31[6]=1, 0x31[2:0]<br>OUT1 $\pm$ : 0x33[6]=1, 0x33[2:0] | VOD (mVpp) <sup>(2)</sup> | VOD <sub>DE</sub> (mVpp) <sup>(2)</sup> | DEM (dB) | FR4 TRACE LENGTH (inches) |
|--------------|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------|----------|---------------------------|
| H            | 0                                                                                         | 0                                                                                         | 410                       | 410                                     | 0        | 0 – 1                     |
| F            | 2                                                                                         | 2                                                                                         | 560                       | 500                                     | -0.9     | 2 – 4                     |
| R            | 3                                                                                         | 3                                                                                         | 635                       | 480                                     | -2.4     | 5 – 6                     |
| L            | 5                                                                                         | 5                                                                                         | 810                       | 480                                     | -6.1     | 7 – 8                     |

(1) The output drivers are capable of providing higher VOD and DEM levels (max settings are 7). For more VOD and de-emphasis levels, refer to [Table 9](#).

(2) See [Figure 8](#).

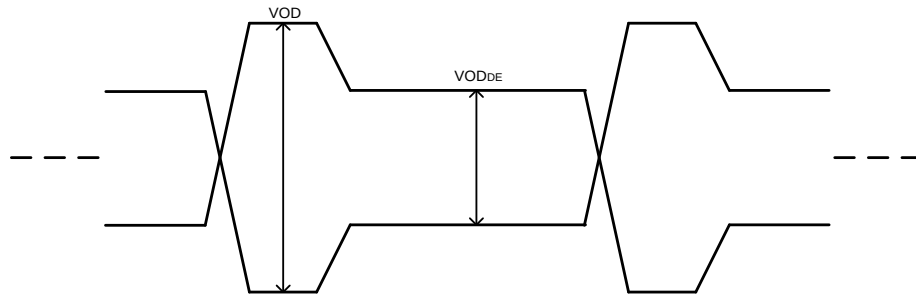

**Figure 8. VOD and VOD<sub>DE</sub> Levels**

### 7.3.8 Additional Programmability

The LMH0324 supports extended programmability through the use of an SPI or SMBus serial control interface. Such added programmability includes:

- Cable Length Indicator (CLI).
- Digital MUTE<sub>REF</sub>

#### 7.3.8.1 Cable Length Indicator (CLI)

The Cable Length Indicator (CLI) indicates the length of the coaxial cable attached to IN0+. CLI is accessible through CableEQ/Driver Page Reg 0x25[5:0]. The 6-bit setting ranges in decimal value from 0 to 55 (000000'b to 110111'b binary), corresponding to approximately 0 to 600 m of Belden 1694A cable.

#### 7.3.8.2 Digital MUTE<sub>REF</sub>

Digital MUTE<sub>REF</sub> CableEQ/Driver Page Reg 0x03[5:0] sets the threshold for the maximum cable length to be equalized before muting the outputs. The MUTE<sub>REF</sub> register value is directly proportional to the cable length being equalized. MUTE<sub>REF</sub> is data rate dependent. Follow the steps below to set MUTE<sub>REF</sub> register setting for any desired SDI rate:

1. Connect the desired input cable length at which the driver output needs to be muted.
2. Send video pattern at IN0+ at the SD rate (270 Mbps). At SD, the Cable Length Indicator (CLI) has the largest dynamic range.
3. Read back Cable EQ/Driver Page Reg 0x25[5:0] to record the CLI value.
4. Copy the CLI value, and write this value to Digital MUTE<sub>REF</sub> Cable EQ/Driver Page Reg 0x03[5:0].

## 7.4 Device Functional Modes

The LMH0324 operates in one of two modes: System Management Bus (SMBus) or Serial Peripheral Interface (SPI) mode. In order to determine the mode of operation, the proper setting must be applied to the MODE\_SEL pin at power-up, as detailed in [Table 5](#).

**Table 5. MODE\_SEL Pin Settings**

| LEVEL | DEFINITION                                                                     |
|-------|--------------------------------------------------------------------------------|
| H     | Forced Power Save Mode, only SPI is enabled (all other circuitry powered down) |
| F     | Select SPI Interface for register access                                       |
| R     | Reserved for factory testing – do not use                                      |
| L     | Select SMBus Interface for register access                                     |

### NOTE

Changing logic states between LEVEL-L and LEVEL-H after power up is not allowed.

### 7.4.1 System Management Bus (SMBus) Mode

If MODE\_SEL = L, the LMH0324 is in SMBus mode. In SMBus mode, Pins 10 and 21 are configured as SDA and SCL. Pins 7 and 20 act as 4-level address straps for ADDR0 and ADDR1 at power up to determine the 7-bit slave address of the LMH0324, as shown in [Table 6](#).

**Table 6. SMBus Device Slave Addresses<sup>(1)</sup>**

| ADDR0<br>(LEVEL) | ADDR1<br>(LEVEL) | 7-BIT SLAVE<br>ADDRESS [HEX] | 8-BIT WRITE<br>COMMAND [HEX] |
|------------------|------------------|------------------------------|------------------------------|
| L                | L                | 1D                           | 3A                           |
| L                | R                | 1E                           | 3C                           |
| L                | F                | 1F                           | 3E                           |
| L                | H                | 20                           | 40                           |
| R                | L                | 21                           | 42                           |
| R                | R                | 22                           | 44                           |
| R                | F                | 23                           | 46                           |
| R                | H                | 24                           | 48                           |
| F                | L                | 25                           | 4A                           |
| F                | R                | 26                           | 4C                           |
| F                | F                | 27                           | 4E                           |
| F                | H                | 28                           | 50                           |
| H                | L                | 29                           | 52                           |
| H                | R                | 2A                           | 54                           |
| H                | F                | 2B                           | 56                           |
| H                | H                | 2C                           | 58                           |

- (1) The 8-bit write command consists of the 7-bit slave address (Bits 7:1) with 0 appended to the LSB to indicate an SMBus write. For example, if the 7-bit slave address is 0x1D (001 1101'b), the 8-bit write command is 0x3A (0011 1010'b).




### 7.4.1.1 SMBus Read and Write Transactions

SMBus is a two-wire serial interface through which various system component chips can communicate with the master. Slave devices are identified by having a unique device address. The two-wire serial interface consists of SCL and SDA signals. SCL is a clock output from the master to all of the slave devices on the bus. SDA is a bidirectional data signal between the master and slave devices. The LMH0324 SMBus SCL and SDA signals are open drain and require external pull-up resistors.

#### Start and Stop:


The master generates start and stop patterns at the beginning and end of each transaction.

- Start: High to low transition (falling edge) of SDA while SCL is high.
- Stop: Low to high transition (rising edge) of SDA while SCL is high.

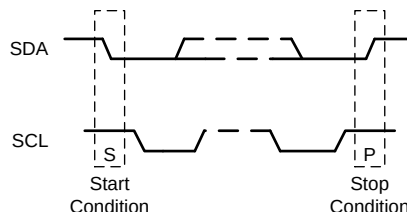

**Figure 9. Start and Stop Conditions**

The master generates nine clock pulses for each byte transfer. The 9th clock pulse constitutes the ACK cycle. The transmitter releases SDA to allow the receiver to send the ACK signal. An ACK is recorded when the device pulls SDA low, while a NACK is recorded if the line remains high.

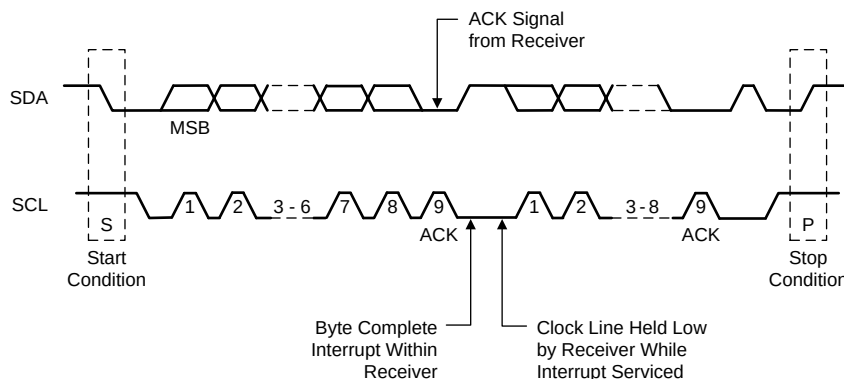


**Figure 10. Acknowledge (ACK)**

#### 7.4.1.1.1 SMBus Write Operation Format

Writing data to a slave device consists of three parts, as illustrated in [Figure 11](#):

1. The master begins with a start condition, followed by the slave device address with the  $\overline{R/\overline{W}}$  bit set to 0'b.
2. After an ACK from the slave device, the 8-bit register word address is written.
3. After an ACK from the slave device, the 8-bit data is written, followed by a stop condition.

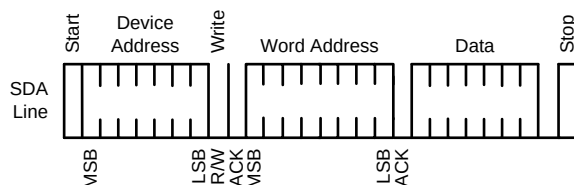


**Figure 11. SMBus Write Operation**

#### 7.4.1.1.2 SMBus Read Operation Format

Reading data from a slave device consists of four parts, as illustrated in Figure 12:

1. The master begins with a start condition, followed by the slave device address with the R/W bit set to 0'b.
2. After an ACK from the slave device, the 8-bit register word address is written.
3. After an ACK from the slave device, the master initiates a re-start condition, followed by the slave address with the R/W bit set to 1'b.
4. After an ACK from the slave device, the 8-bit data is read back. The last ACK is high if there are no more bytes to read, and the last read is followed by a stop condition.

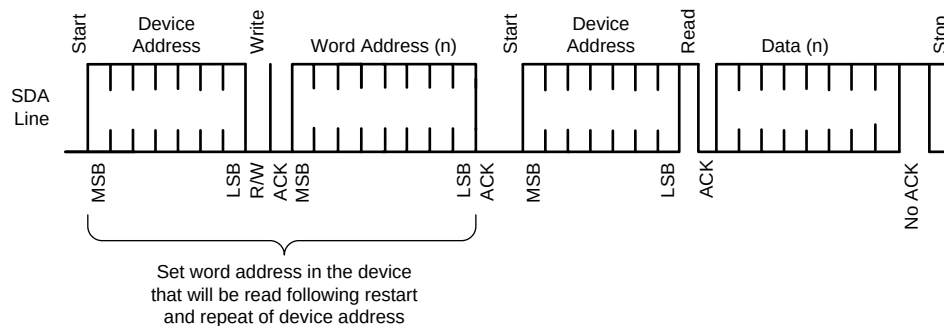

**Figure 12. SMBus Read Operation**

#### 7.4.2 Serial Peripheral Interface (SPI) Mode

If MODE\_SEL = F or H, the LMH0324 is in SPI mode. In SPI mode, the following pins are used for SPI bus communication:

- MOSI (pin 10): Master Output Slave Input
- MISO (pin 20): Master Input Slave Output
- SS\_N (pin 7): Slave Select (active low)
- SCK (pin 21): Serial clock (input to the LMH0324 slave device)

##### 7.4.2.1 SPI Read and Write Transactions

Each SPI transaction to a single device is 17 bits long and is framed by SS\_N when asserted low. The MOSI input is ignored, and the MISO output is floated whenever SS\_N is de-asserted (high).

The bits are shifted in left-to-right. The first bit is  $\overline{R/W}$ , which is 1'b for "read" and 0'b for "write." Bits A7-A0 are the 8-bit register address, and bits D7-D0 are the 8-bit read or write data. The previous SPI command, address, and data are shifted out on MISO as the current command, address, and data are shifted in on MOSI. In all SPI transactions, the MISO output signal is enabled asynchronously when SS\_N asserts low. The contents of a single MOSI or MISO transaction frame are shown in Table 7.


**Table 7. 17-Bit Single SPI Transaction Frame**

| $\overline{R/W}$ | A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|

##### 7.4.2.1.1 SPI Write Transaction Format

For SPI writes, the  $\overline{R/W}$  bit is 0'b. SPI write transactions are 17 bits per device, and the command is executed on the rising edge of SS\_N. The SPI transaction always starts on the rising edge of the clock.

The signal timing for a SPI Write transaction is shown in Figure 13. The "prime" values on MISO (for example, A7') reflect the contents of the shift register from the previous SPI transaction and are *don't-care* for the current transaction.

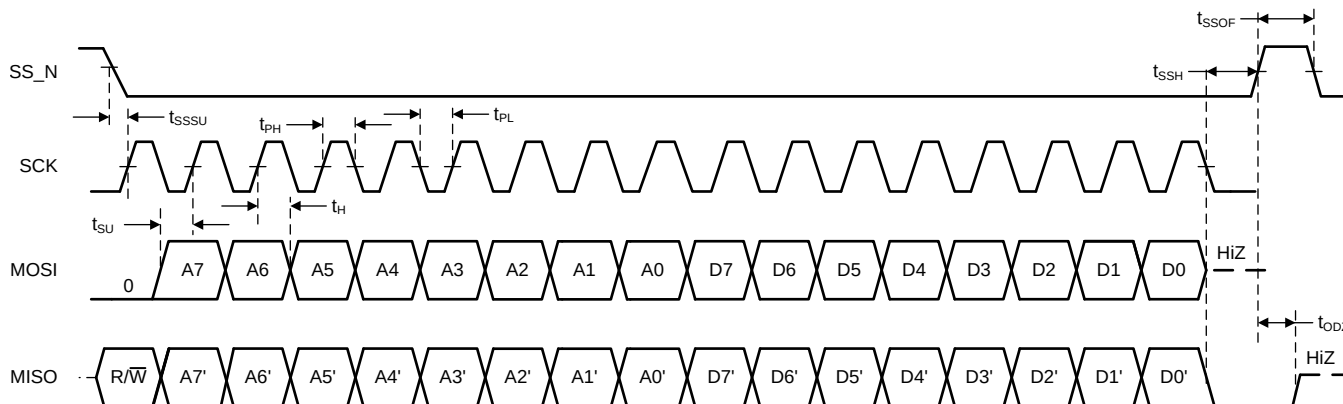


**Figure 13. Signal Timing for a SPI Write Transaction**

#### 7.4.2.1.2 SPI Read Transaction Format

A SPI read transaction is 34 bits per device and consists of two 17-bit frames. The first 17-bit read transaction frame shifts in the address to be read, followed by a dummy transaction second frame to shift out 17-bit read data. The R/W bit is 1'b for the read transaction, as shown in [Figure 14](#).


The first 17 bits from the read transaction specifies 1-bit of R/W and 8-bits of address A7-A0 in the first 8 bits. The eight 1's following the address are ignored. The second dummy transaction acts like a read operation on address 0xFF and needs to be ignored. However, the transaction is necessary in order to shift out the read data D7-D0 in the last 8 bits of the MISO output. As with the SPI Write, the “prime” values on MISO during the first 16 clocks are *don't-care* for this portion of the transaction. The values shifted out on MISO during the last 17 clocks reflect the read address and 8-bit read data for the current transaction.

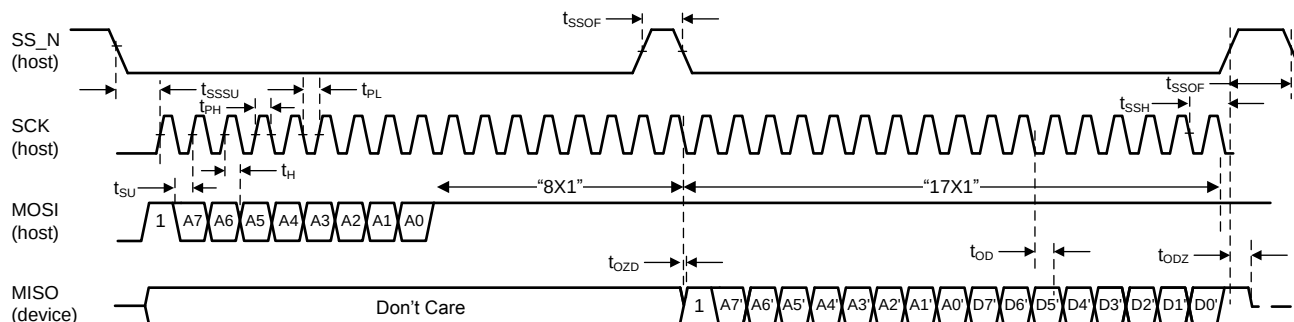

**Figure 14. Signal Timing for a SPI Read Transaction**

### 7.4.2.2 SPI Daisy Chain

The LMH0324 supports SPI daisy-chaining among multiple devices, as shown in [Figure 15](#).

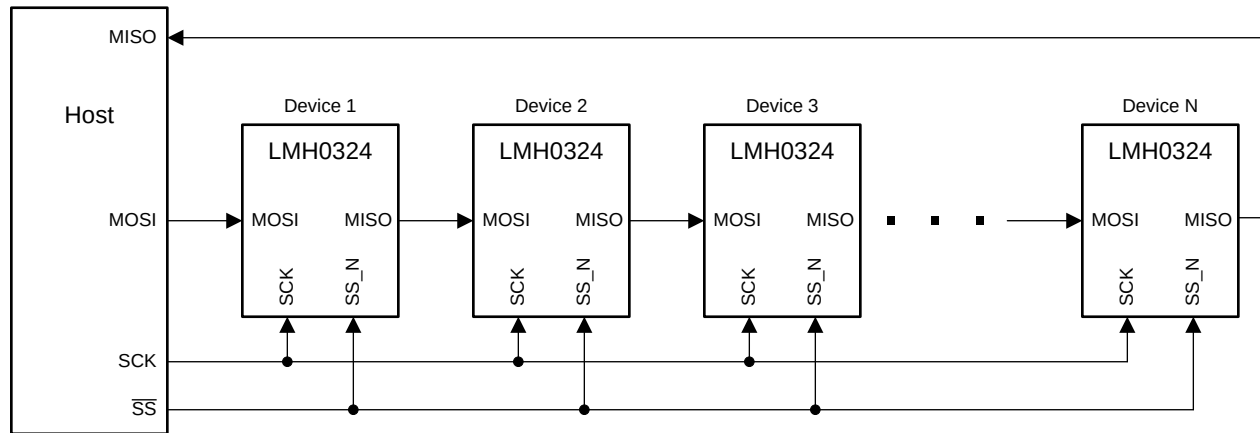

**Figure 15. Daisy-Chain Configuration**

Each LMH0324 device is directly connected to the SCK and SS\_N pins of the host. The first LMH0324 device in the chain is connected to the host's MOSI pin, and the last device in the chain is connected to the host's MISO pin. The MOSI pin of each intermediate LMH0324 device in the chain is connected to the MISO pin of the previous LMH0324 device, thereby creating a serial shift register. In a daisy-chain configuration of N x LMH0324 devices, the host conceptually sees a shift register of length 17 x N for a basic SPI transaction, during which SS\_N is asserted low for 17 x N clock cycles.

## 7.5 LMH0324 Register Map

The LMH0324 register set definition is divided into two register pages. These register pages are used to control different aspects of the LMH0324 functionality. A brief summary of the pages is shown below:

1. **Share Register Page:** This page corresponds to global parameters, such as LMH0324 device ID. This is the default page at start-up.
2. **CableEQ/Drivers Register Page:** This page corresponds to IN0 Cable EQ and both OUT0 and OUT1 driver output settings. Access this page by setting Reg 0xFF[2:0] = 101'b.

Please note the following about the LMH0324 default register values in the register map:

- Default register values were read after power-up with no active inputs applied to IN0.
- Default register values for Reserved "Read-Only" bits may vary dynamically from part to part.

### 7.5.1 Share Register Page

| Address | Register Name                  | Bit | Field              | Default | Type | Description                                                                                                                |
|---------|--------------------------------|-----|--------------------|---------|------|----------------------------------------------------------------------------------------------------------------------------|
| 0x00    | Reserved                       | 7:0 | Reserved           | 0x00    | R    | Reserved                                                                                                                   |
| 0x01    | Reserved                       | 7:0 | Reserved           | 0x40    | R    | Reserved                                                                                                                   |
| 0x02    | Reserved                       | 7:0 | Reserved           | 0x02    | RW   | Reserved                                                                                                                   |
| 0x03    | Reserved                       | 7:0 | Reserved           | 0x00    | RW   | Reserved                                                                                                                   |
| 0x04    | Reserved                       | 7:0 | Reserved           | 0x01    | RW   | Reserved                                                                                                                   |
| 0x05    | Reserved                       | 7:0 | Reserved           | 0x00    | RW   | Reserved                                                                                                                   |
| 0x06    | Reserved                       | 7:0 | Reserved           | 0x00    | RW   | Reserved                                                                                                                   |
| 0x07    | Reserved                       | 7:0 | Reserved           | 0x04    | RW   | Reserved                                                                                                                   |
| 0x08    | Reserved                       | 7:0 | Reserved           | 0x11    | RW   | Reserved                                                                                                                   |
| 0x09    | Reserved                       | 7:0 | Reserved           | 0x00    | R    | Reserved                                                                                                                   |
| 0xE2    | Reset Share/Channel Regs       | 7:5 | Reserved           | 0x10    | R    | Reserved                                                                                                                   |
|         |                                | 4   | reset_done         |         | R    | 1 = Internal state machine register initialization done.<br>0 = Internal state machine register initialization not done.   |
|         |                                | 3:1 | Reserved           |         | RW   | Reserved                                                                                                                   |
|         |                                | 0   | reset_init         |         | RW   | 1 = Initialize internal state machine register settings.                                                                   |
| 0xF0    | Device Revision                | 7:0 | Version            | 0x02    | R    | Device Revision                                                                                                            |
| 0xF1    | Device ID                      | 7:0 | Device_ID          | 0x81    | R    | For LMH0324, Device ID = 0x81                                                                                              |
| 0xFF    | Register Communication Control | 7:6 | Reserved           | 0x00    | RW   | Reserved                                                                                                                   |
|         |                                | 5:4 | Reserved           |         | RW   | Reserved                                                                                                                   |
|         |                                | 3   | Reserved           |         | RW   | Reserved                                                                                                                   |
|         |                                | 2   | page_select_enable |         | RW   | 0 = The shared registers are enabled.<br>1 = Enables communication access to the Register Page specified in Reg 0xFF[1:0]. |
|         |                                | 1:0 | page_select        |         | RW   | Enable communication access to a specific Register Page<br>01 = CableEQ/Drivers Register Page<br>Other values are invalid  |

**LMH0324**

JAJSL4B – APRIL 2016 – REVISED JUNE 2018

[www.ti.com](http://www.ti.com)
**7.5.2 CableEQ/Drivers Register Page**

| Address | Register Name                         | Bit | Field                    | Default | Type | Description                                                                                                                                                                                                                                      |
|---------|---------------------------------------|-----|--------------------------|---------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x00    | Reset<br>CableEQ/Drivers<br>Registers | 7   | adapt_cd                 | 0x08    | RW   | CD_N pin status<br>0 = CD_N indicates when Coarse Adaptation is done<br>1 = CD_N indicates carrier detect                                                                                                                                        |
|         |                                       | 6   | Reserved                 |         | RW   | Reserved                                                                                                                                                                                                                                         |
|         |                                       | 5   | reg_power_save_ov        |         | RW   | IN0 Power Save Override Control for Cable EQ<br>0 = Disable Power Save mode override. Automatic power save mode when no input signal detected.<br>1 = Enable Power Save mode override. Power Save mode control set by value in Reg 0x00[4:3].    |
|         |                                       | 4:3 | reg_power_save           |         | RW   | IN0 Auto Power Save mode control for Cable EQ if Reg 0x00[5] = 1<br>00 = Enable Power Save mode when no input signal is detected<br>01 = Disable auto Power Save mode<br>10 = Reserved<br>11 = Force Power Save mode                             |
|         |                                       | 2   | rst_cableEQ/Drivers_regs |         | RW   | Reset registers (self-clearing)<br>0 = Normal operation<br>1 = Reset CableEQ/Drivers Registers. Register re-initialization procedure required after resetting the CableEQ/Drivers Registers. Refer to the LMH0324 Programming Guide for details. |
|         |                                       | 1:0 | Reserved                 |         | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x01    | EQ Observation Status                 | 7:1 | Reserved                 | 0x80    | R    | Reserved                                                                                                                                                                                                                                         |
|         |                                       | 0   | adaptation_status        |         | R    | 0 = Adaptation not completed<br>1 = Adaptation completed                                                                                                                                                                                         |
| 0x02    | Rate and Driver Observation Status    | 7   | Reserved                 | 0x07    | R    | Reserved                                                                                                                                                                                                                                         |
|         |                                       | 6   | IN0 Carrier Detect       |         | R    | Carrier Detect Status of IN0<br>0 = No signal present at IN0<br>1 = Signal present at IN0                                                                                                                                                        |
|         |                                       | 5:3 | freq_rate_det            |         | R    | Readback of rate detected<br>001 = 125M-270M<br>010 = 1.5G-3G                                                                                                                                                                                    |
|         |                                       | 2   | power_save_status        |         | R    | Observation Bit<br>0 = Power Save Mode is Inactive<br>1 = Power Save Mode is Active                                                                                                                                                              |
|         |                                       | 1   | mute_tx1                 |         | R    | Observation Bit<br>0 = OUT1 Driver is Active<br>1 = OUT1 Driver is in Mute<br>Note: When muted, driver output remains at common mode voltage.                                                                                                    |
|         |                                       | 0   | mute_tx0                 |         | R    | Observation Bit<br>0 = OUT0 Driver is Active<br>1 = OUT0 Driver is in Mute<br>Note: When muted, driver output remains at common mode voltage.                                                                                                    |
| 0x03    | MUTERef Control                       | 7:6 | Reserved                 | 0x3F    | RW   | Reserved                                                                                                                                                                                                                                         |
|         |                                       | 5:0 | MUTERef                  |         | RW   | Digital MUTERef: Sets the threshold at which output will be muted. See <a href="#">Digital MUTE<sub>REF</sub></a> .                                                                                                                              |
| 0x04    | Reserved                              | 7:0 | Reserved                 | 0x00    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x05    | Reserved                              | 7:0 | Reserved                 | 0x00    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x06    | Reserved                              | 7:0 | Reserved                 | 0xA0    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x07    | Reserved                              | 7:0 | Reserved                 | 0x24    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x08    | Reserved                              | 7:0 | Reserved                 | 0x27    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x09    | Reserved                              | 7:0 | Reserved                 | 0x01    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x0A    | Reserved                              | 7:0 | Reserved                 | 0x05    | RW   | Reserved                                                                                                                                                                                                                                         |
| 0x0B    | Reserved                              | 7:0 | Reserved                 | 0x37    | RW   | Reserved                                                                                                                                                                                                                                         |

| Address | Register Name          | Bit | Field         | Default | Type | Description                                                                                                                                                       |
|---------|------------------------|-----|---------------|---------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x0C    | Reserved               | 7:0 | Reserved      | 0x01    | RW   | Reserved                                                                                                                                                          |
| 0x0D    | Reserved               | 7:0 | Reserved      | 0x25    | RW   | Reserved                                                                                                                                                          |
| 0x0E    | Reserved               | 7:0 | Reserved      | 0x37    | RW   | Reserved                                                                                                                                                          |
| 0x0F    | Reserved               | 7:0 | Reserved      | 0x02    | RW   | Reserved                                                                                                                                                          |
| 0x10    | Reserved               | 7:0 | Reserved      | 0x0A    | RW   | Reserved                                                                                                                                                          |
| 0x11    | Reserved               | 7:0 | Reserved      | 0x02    | RW   | Reserved                                                                                                                                                          |
| 0x12    | Reserved               | 7:0 | Reserved      | 0x08    | RW   | Reserved                                                                                                                                                          |
| 0x13    | Reserved               | 7:0 | Reserved      | 0x04    | RW   | Reserved                                                                                                                                                          |
| 0x14    | Reserved               | 7:0 | Reserved      | 0x3C    | RW   | Reserved                                                                                                                                                          |
| 0x15    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x16    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x17    | Reserved               | 7:0 | Reserved      | 0x08    | RW   | Reserved                                                                                                                                                          |
| 0x18    | Reserved               | 7:0 | Reserved      | 0x01    | RW   | Reserved                                                                                                                                                          |
| 0x19    | Reserved               | 7:0 | Reserved      | 0x08    | RW   | Reserved                                                                                                                                                          |
| 0x1A    | Reserved               | 7:0 | Reserved      | 0x01    | RW   | Reserved                                                                                                                                                          |
| 0x1B    | Reserved               | 7:0 | Reserved      | 0xA7    | RW   | Reserved                                                                                                                                                          |
| 0x1C    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x1D    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x1E    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x1F    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x20    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x21    | Reserved               | 7:0 | Reserved      | 0xC0    | RW   | Reserved                                                                                                                                                          |
| 0x22    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x23    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x24    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x25    | Cable Length Indicator | 7:6 | Reserved      | 0x00    | R    | Reserved                                                                                                                                                          |
|         |                        | 5:0 | CLI           |         | R    | Readback of the Cable Length Indicator after adaptation is completed. See <a href="#">Cable Length Indicator (CLI)</a> .                                          |
| 0x26    | Reserved               | 7:0 | Reserved      | 0x05    | R    | Reserved                                                                                                                                                          |
| 0x27    | EQ Bypass Override     | 7:4 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
|         |                        | 3   | eq_bypass_ov  |         | RW   | Override eq_bypass value to analog core<br>0 = Disable EQ Bypass override<br>1 = Enable EQ Bypass override. Value of EQ Bypass Control determined by Reg 0x27[2]. |
|         |                        | 2   | eq_bypass_val |         | RW   | Override value of eq_bypass<br>0 = Do not Bypass Cable EQ. Use Adaptive EQ<br>1 = Bypass Cable EQ                                                                 |
|         |                        | 1:0 | Reserved      |         | RW   | Reserved                                                                                                                                                          |
| 0x28    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |
| 0x29    | Reserved               | 7:0 | Reserved      | 0x20    | R    | Reserved                                                                                                                                                          |
| 0x2A    | Reserved               | 7:0 | Reserved      | 0x40    | RW   | Reserved                                                                                                                                                          |
| 0x2B    | Reserved               | 7:0 | Reserved      | 0x89    | RW   | Reserved                                                                                                                                                          |
| 0x2C    | Reserved               | 7:0 | Reserved      | 0x0B    | RW   | Reserved                                                                                                                                                          |
| 0x2D    | Reserved               | 7:0 | Reserved      | 0x20    | RW   | Reserved                                                                                                                                                          |
| 0x2E    | Reserved               | 7:0 | Reserved      | 0x00    | R    | Reserved                                                                                                                                                          |
| 0x2F    | Reserved               | 7:0 | Reserved      | 0x00    | RW   | Reserved                                                                                                                                                          |

**LMH0324**

JAJSL4B – APRIL 2016 – REVISED JUNE 2018

[www.ti.com](http://www.ti.com)

| Address | Register Name            | Bit | Field        | Default | Type | Description                                                                                                                                                                                         |
|---------|--------------------------|-----|--------------|---------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0x30    | OUT0 Output Control      | 7   | tx0_mute_ov  | 0x0A    | RW   | OUT0 Mute Override Control<br>0 = Disable OUT0 Mute Override Control<br>1 = Enable OUT0 Mute Override Control by value in Reg 0x30[6].                                                              |
|         |                          | 6   | tx0_mute_val |         | RW   | 0 = Normal Operation<br>1 = Mute OUT0 if Reg 0x30[7] = 1                                                                                                                                            |
|         |                          | 5   | tx0_vod_ov   |         | RW   | OUT0 VOD Override Control<br>0 = VOD settings for OUT0 determined by VOD_DE pin<br>1 = Override VOD pin settings for OUT0. VOD settings for OUT0 are controlled by Reg 0x30[2:0]                    |
|         |                          | 4:3 | Reserved     |         | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 2:0 | tx0_vod      |         | RW   | VOD settings with DE = 0 for OUT0 if Reg 0x30[5] = 1. See <a href="#">Figure 6</a> .                                                                                                                |
|         |                          |     |              |         |      |                                                                                                                                                                                                     |
| 0x31    | OUT0 De-Emphasis Control | 7   | Reserved     | 0x01    | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 6   | tx0_dem_ov   |         | RW   | OUT0 De-Emphasis Override Control<br>0 = De-emphasis for OUT0 determined by VOD_DE pin<br>1 = Override De-emphasis settings for OUT0. De-emphasis settings for OUT0 are controlled by Reg 0x31[2:0] |
|         |                          | 5   | tx0_PD_ov    |         | RW   | OUT0 Power Down Override Control<br>0 = Disable OUT0 Power Down Override Control<br>1 = Enable OUT0 Power Down Override Control by value in Reg 0x31[4].                                            |
|         |                          | 4   | tx0_PD       |         | RW   | 0 = Normal Operation<br>1 = Power Down OUT0 if Reg 0x31[5] = 1                                                                                                                                      |
|         |                          | 3   | Reserved     |         | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 2:0 | tx0_dem      |         | RW   | De-emphasis settings for OUT0 if Reg 0x31[6] = 1. See <a href="#">Figure 7</a> .                                                                                                                    |
| 0x32    | OUT1 Output Control      | 7   | tx1_mute_ov  | 0x0A    | RW   | OUT1 Mute Override Control<br>0 = Disable OUT1 Mute Override Control<br>1 = Enable OUT1 Mute Override Control by value in Reg 0x32[6].                                                              |
|         |                          | 6   | tx1_mute_val |         | RW   | 0 = Normal Operation<br>1 = Mute OUT1 if Reg 0x32[7] = 1                                                                                                                                            |
|         |                          | 5   | tx1_vod_ov   |         | RW   | OUT1 VOD Override Control<br>0 = VOD settings for OUT1 determined by VOD_DE pin<br>1 = Override VOD pin settings for OUT1. VOD settings for OUT1 are controlled by Reg 0x32[2:0]                    |
|         |                          | 4:3 | Reserved     |         | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 2:0 | tx1_vod      |         | RW   | VOD settings with DE = 0 for OUT1 if Reg 0x32[5] = 1. See <a href="#">Figure 6</a> .                                                                                                                |
|         |                          |     |              |         |      |                                                                                                                                                                                                     |
| 0x33    | OUT1 De-emphasis Control | 7   | Reserved     | 0x11    | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 6   | tx1_dem_ov   |         | RW   | OUT1 De-Emphasis Override Control<br>0 = De-emphasis for OUT1 determined by VOD_DE pin<br>1 = Override De-emphasis settings for OUT1. De-emphasis settings for OUT1 are controlled by Reg 0x33[2:0] |
|         |                          | 5   | tx1_PD_ov    |         | RW   | OUT1 Power Down Override Control<br>0 = Disable OUT1 Power Down Override Control<br>1 = Enable OUT1 Power Down Override Control by value in Reg 0x33[4].                                            |
|         |                          | 4   | tx1_PD       |         | RW   | 0 = Normal Operation<br>1 = Power Down OUT1 if Reg 0x33[5] = 1                                                                                                                                      |
|         |                          | 3   | Reserved     |         | RW   | Reserved                                                                                                                                                                                            |
|         |                          | 2:0 | tx1_dem      |         | RW   | De-emphasis settings for OUT1 if Reg 0x33[6] = 1. See <a href="#">Figure 7</a> .                                                                                                                    |
| 0x34    | Splitter_Reg             | 7   | hi_gain_mode | 0x17    | RW   | -6 dB Launch Amplitude Adaptation Mode<br>0 = Enable EQ adaptation to operate with nominal 800 mV launch amplitude<br>1 = Enable EQ adaptation to operate with 400 mV launch amplitude              |
|         |                          | 6:0 | Reserved     |         |      | Reserved                                                                                                                                                                                            |



| Address | Register Name | Bit | Field    | Default | Type | Description |
|---------|---------------|-----|----------|---------|------|-------------|
| 0x35    | Reserved      | 7:0 | Reserved | 0x61    | RW   | Reserved    |
| 0x36    | Reserved      | 7:0 | Reserved | 0x02    | RW   | Reserved    |
| 0x37    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x38    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x39    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x3A    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x3B    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x3C    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x3D    | Reserved      | 7:0 | Reserved | 0x7F    | RW   | Reserved    |
| 0x3E    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x3F    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x40    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x41    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x42    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x43    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x44    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x45    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x46    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x47    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x48    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x49    | Reserved      | 7:0 | Reserved | 0x01    | R    | Reserved    |
| 0x4A    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x4B    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x4C    | Reserved      | 7:0 | Reserved | 0x00    | R    | Reserved    |
| 0x4D    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x4E    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x4F    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x50    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x51    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x52    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x53    | Reserved      | 7:0 | Reserved | 0x00    | RW   | Reserved    |
| 0x54    | Reserved      | 7:0 | Reserved | 0x0F    | R    | Reserved    |

## 8 Application and Implementation

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

#### 8.1.1 General Guidance for SMPTE Applications

SMPTE specifies the requirements for the Serial Digital Interface to transport digital video over coaxial cables. One of the requirements is meeting return loss, which specifies how closely the port resembles 75-Ω impedance across a specified frequency band. The SMPTE specifications also defines the use of AC coupling capacitors for transporting uncompressed serial data streams with heavy low frequency content. The use of 4.7-μF AC coupling capacitors is recommended to avoid low frequency DC wander. Refer to 表 8 for design requirements.

### 8.2 Typical Application

The LMH0324 is a low-power SDI equalizer that supports SDI data rates from 125 Mbps to 2.97 Gbps. 图 16 shows a typical implementation of the LMH0324 as a SDI adaptive cable equalizer. Signal attenuated by a long coax cable is applied to the LMH0324 at the BNC port. Equalized data is output at OUT0± and OUT1± to a downstream video processor.

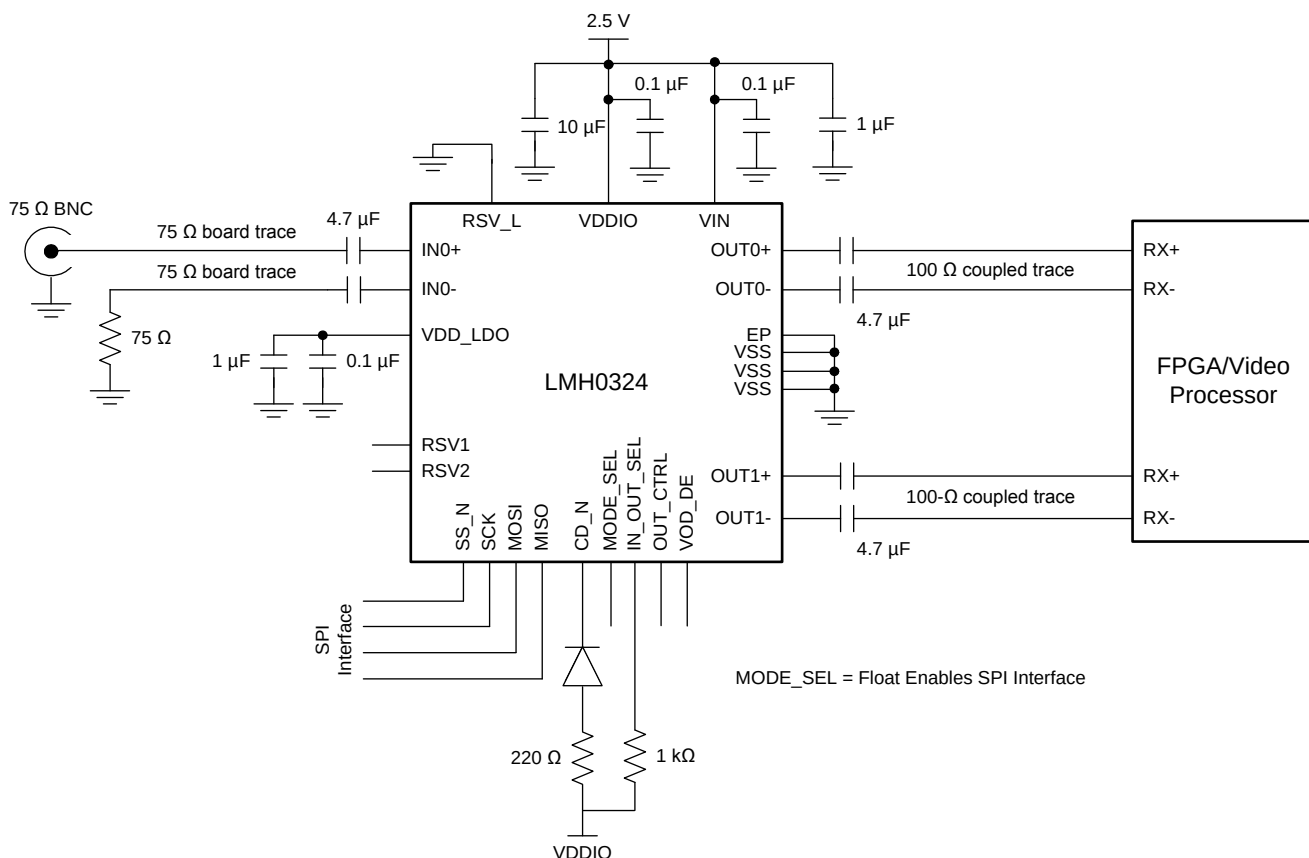


图 16. LMH0324 SPI Mode Connection Diagram

## Typical Application (continued)

### 8.2.1 Design Requirements

**表 8. LMH0324 Design Requirements**

| DESIGN PARAMETER                                     | REQUIREMENTS                                                                                                                                                                                                                                                                |
|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input AC coupling capacitors                         | AC coupling capacitor at IN0+ should be a 4.7- $\mu$ F surface mount ceramic capacitor. IN0- should be AC terminated with 4.7 $\mu$ F and 75 $\Omega$ to VSS.                                                                                                               |
| High speed board trace for IN0                       | IN0+ and IN0- should be routed with uncoupled board traces with 75- $\Omega$ characteristic impedance.                                                                                                                                                                      |
| BNC connector                                        | High performance BNC capable to support 2.97 Gbps should be used. Footprint of the BNC should be designed to achieve 75- $\Omega$ characteristic impedance. For achieving best return loss performance, the BNC should be placed as close to the LMH0324 device as possible |
| Output AC coupling capacitors                        | Both OUT0 $\pm$ and OUT1 $\pm$ require AC coupling capacitors. 4.7- $\mu$ F capacitors are recommended.                                                                                                                                                                     |
| High speed board trace for OUT0 $\pm$ and OUT1 $\pm$ | OUT0 $\pm$ and OUT1 $\pm$ should be routed with coupled board traces with 100- $\Omega$ differential impedance.                                                                                                                                                             |
| Use of SPI or SMBus interface                        | Set MODE_SEL to Level-F (pin unconnected) for SPI. Set MODE_SEL to Level-L (connect 1 k $\Omega$ to VSS) for SMBus. SMBus is 3.3 V tolerant if VDDIO is powered from 2.5 V.                                                                                                 |

### 8.2.2 Detailed Design Procedure

The following general design procedure is recommended:

1. Select a suitable power supply voltage for the LMH0324. It can be powered from a single 2.5 V or 1.8 V supply. See [Power Supply Recommendations](#) for details.
2. Check that the power supply meets the DC and AC requirements in the [Recommended Operating Conditions](#).
3. Select the proper pull-high or pull-low resistors for IN\_OUT\_SEL and OUT\_CTRL for setting the signal path.
4. If -6 dB launch amplitude or other expanded programmable features are needed, select the use of SPI or SMBus by setting the proper pull-high or pull-low resistor for the MODE\_SEL pin.
5. Choose a high quality 75- $\Omega$  BNC that is capable to support 2.97 Gbps applications. Consult a BNC supplier regarding insertion loss, impedance specifications, and recommended BNC footprint for meeting SMPTE return loss requirements.
6. Depending on the length and insertion loss of the output traces for OUT0 $\pm$  and OUT1 $\pm$ , select the proper pull-high or pull-low resistors for VOD\_DE to set the output amplitude and de-emphasis settings. Refer to [Table 4](#) for details.
7. Choose a small 0402 surface mount ceramic capacitors for the AC coupling and bypass capacitors.
8. Use proper footprint for BNC and AC coupling capacitors. Anti-pads are commonly used in power and VSS planes under these landing pads to achieve optimum return loss.

### 8.2.3 Recommended VOD and DE Register Settings

[表 9](#) shows recommended output amplitude and de-emphasis register settings for most applications.

**表 9. VOD and DE Register Settings**


| VOD REG SETTING<br>OUT0 $\pm$ : 0x30[5]=1, 0x30[2:0]<br>OUT1 $\pm$ : 0x32[5]=1, 0x32[2:0] | DEM REG SETTING<br>OUT0 $\pm$ : 0x31[6]=1, 0x31[2:0]<br>OUT1 $\pm$ : 0x33[6]=1, 0x33[2:0] | VOD (mVpp) | DEM (dB) |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------|----------|
| 0                                                                                         | 0                                                                                         | 410        | 0        |
| 1                                                                                         | 1                                                                                         | 486        | -0.1     |
| 2                                                                                         | 1                                                                                         | 560        | -0.1     |
| 2                                                                                         | 2                                                                                         | 560        | -0.9     |
| 3                                                                                         | 1                                                                                         | 635        | -0.3     |
| 3                                                                                         | 2                                                                                         | 635        | -1.3     |
| 3                                                                                         | 3                                                                                         | 635        | -2.4     |
| 4                                                                                         | 1                                                                                         | 716        | -0.5     |

**表 9. VOD and DE Register Settings (continued)**



| VOD REG SETTING<br>OUT0±: 0x30[5]=1, 0x30[2:0]<br>OUT1±: 0x32[5]=1, 0x32[2:0] | DEM REG SETTING<br>OUT0±: 0x31[6]=1, 0x31[2:0]<br>OUT1±: 0x33[6]=1, 0x33[2:0] | VOD (mVpp) | DEM (dB) |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------|------------|----------|
| 4                                                                             | 2                                                                             | 716        | -1.8     |
| 4                                                                             | 3                                                                             | 716        | -3.0     |
| 4                                                                             | 4                                                                             | 716        | -4.0     |
| 5                                                                             | 1                                                                             | 810        | -0.8     |
| 5                                                                             | 2                                                                             | 810        | -2.4     |
| 5                                                                             | 3                                                                             | 810        | -3.6     |
| 5                                                                             | 4                                                                             | 810        | -4.6     |
| 5                                                                             | 5                                                                             | 810        | -6.1     |
| 6                                                                             | 1                                                                             | 880        | -1.0     |
| 6                                                                             | 2                                                                             | 880        | -2.7     |
| 6                                                                             | 3                                                                             | 880        | -4.0     |
| 6                                                                             | 4                                                                             | 880        | -5.0     |
| 6                                                                             | 5                                                                             | 880        | -6.5     |
| 7                                                                             | 1                                                                             | 973        | -1.2     |
| 7                                                                             | 2                                                                             | 973        | -3.1     |
| 7                                                                             | 3                                                                             | 973        | -4.6     |
| 7                                                                             | 4                                                                             | 973        | -5.7     |
| 7                                                                             | 5                                                                             | 973        | -7.1     |

### 8.2.4 Application Performance Plots

The LMH0324 performance was measured with the test setups shown in 图 17.

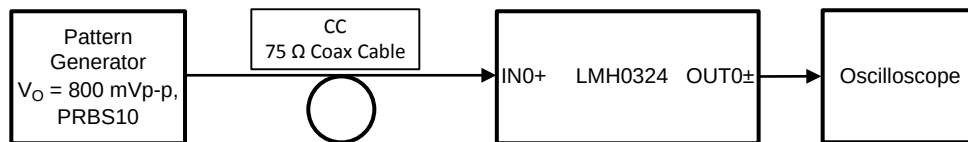
**图 17. Test Setup for LMH0324 Cable Equalizer (IN0+)**

The eye diagrams in this subsection show how the LMH0324 improves overall signal integrity in the data path when different cable lengths are used at IN0+.

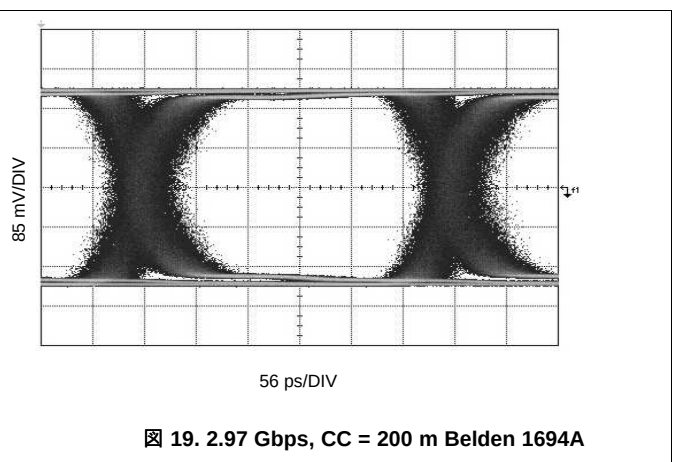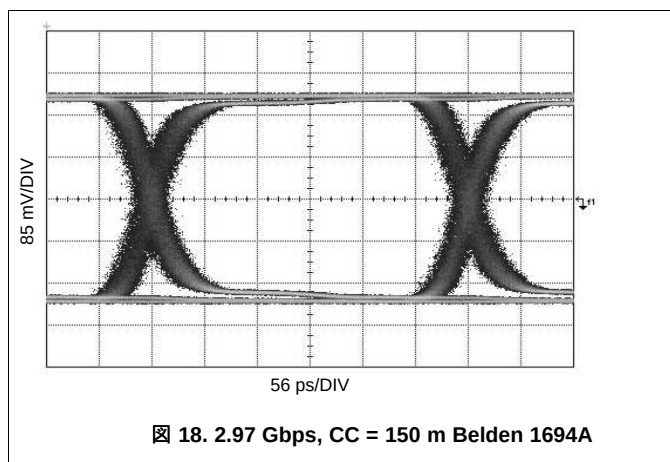

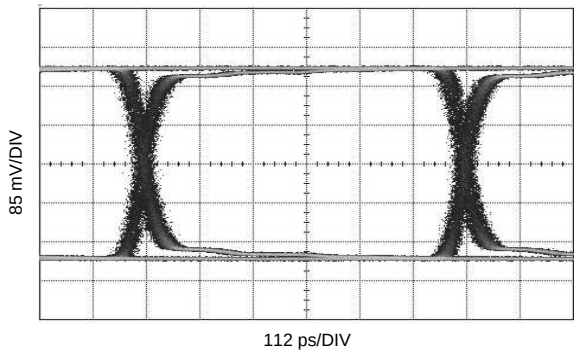


FIG 20. 1.485 Gbps, CC = 200 m Belden 1694A

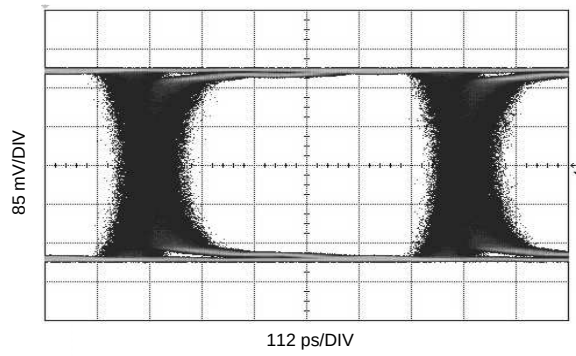


FIG 21. 1.485 Gbps, CC = 280 m Belden 1694A

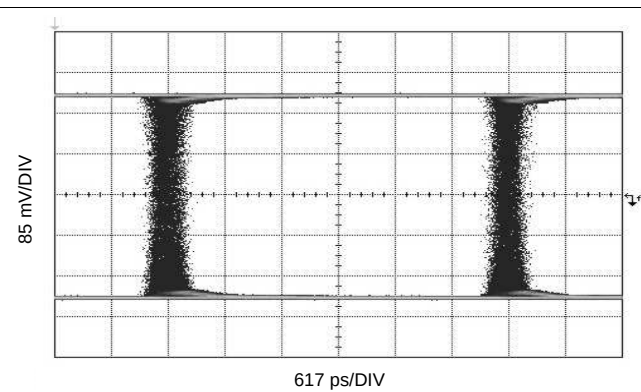


FIG 22. 270 Mbps, CC = 400 m Belden 1694A


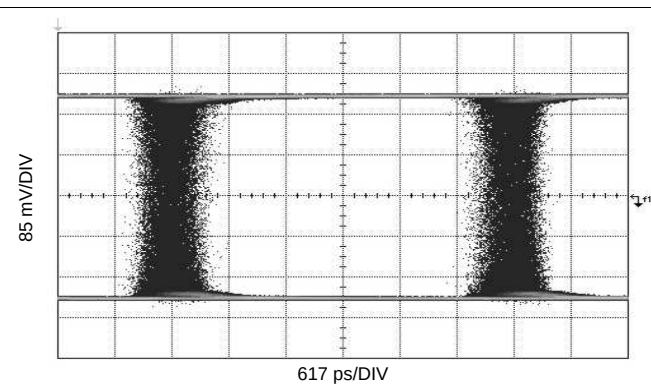


FIG 23. 270 Mbps, CC = 600 m Belden 1694A


## 9 Power Supply Recommendations

The LMH0324 is designed to provide flexibility in supply rails. There are two ways to power the LMH0324:

- **Single 2.5 V Supply Mode:** This mode offers ease of use and pin compatibility with the LMH1219 (11.88 Gbps Ultra-HD Adaptive Cable Equalizer with Integrated Reclocker). The internal circuitry receives power from the on-chip 1.8 V regulator. In this mode, 2.5 V is applied to VIN, VDDIO, and RSV\_L. This mode supports SPI or SMBus serial interface. See [Figure 24](#) for more details.
- **Single 1.8 V Supply Mode:** This mode provides the lowest power consumption. In this mode, 1.8 V is connected to VIN, VDD\_LDO and VDDIO. RSV\_L is tied to VSS. In this mode, SPI is supported, but SMBus serial interface is not. *In Single 1.8 V Supply Mode, the LMH0324 is not drop-in compatible with the LMH1219.* See [Figure 25](#) for more details.

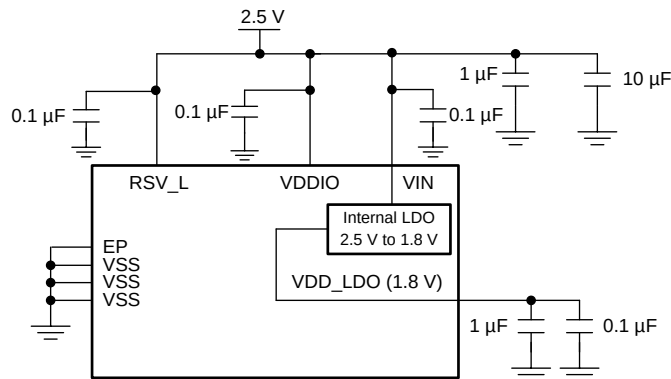

**Figure 24. Single 2.5 V Supply Mode - Compatible with LMH1219**

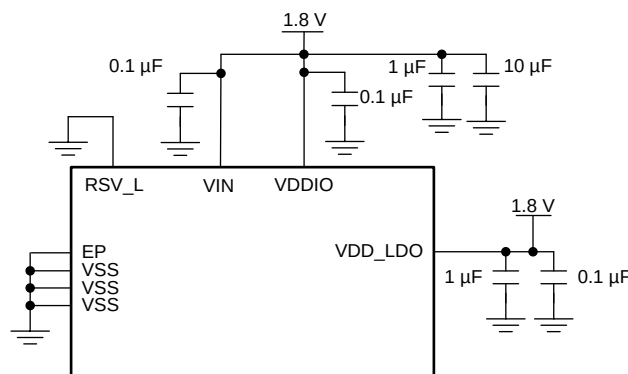

**Figure 25. Single 1.8 V Supply Mode - Not Compatible with LMH1219**

For power supply de-coupling, 0.1-µF surface-mount ceramic capacitors are recommended to be placed close to each supply pin to VSS. Larger bulk capacitors (for example, 10 µF and 1 µF) are recommended to be placed close to each LMH0324 device. Good supply bypassing requires low inductance capacitors. This can be achieved through an array of multiple small body size surface-mount bypass capacitors in order to keep low supply impedance. Better results can be achieved through the use of a buried capacitor formed by a VDD and VSS plane separated by 2-4 mil dielectric in a printed circuit board.

## 10 Layout

### 10.1 Layout Guidelines


The following layout guidelines are recommended for the LMH0324:

1. Choose a suitable board stack-up that supports 75-Ω single-ended trace and 100-Ω differential trace routing on the board's top layer. This is typically done with a Layer 2 ground plane reference for the 100-Ω differential traces and a second ground plane at Layer 3 reference for the 75-Ω single-ended traces.
2. Use single-ended uncoupled trace designed with 75-Ω impedance for signal routing to IN0+ and IN0-. The trace width is typically 8-10 mil reference to a ground plane at Layer 3.
3. Place anti-pad (ground relief) on the power and ground planes directly under the 4.7-μF AC coupling capacitor and IC landing pads to minimize parasitic capacitance. The size of the anti-pad depends on the board stack-up and can be determined by a 3-dimension electromagnetic simulation tool.
4. Use a well-designed BNC footprint to ensure the BNC's signal landing pad achieves 75-Ω characteristic impedance. BNC suppliers usually provide recommendations on BNC footprint for best results.
5. Keep trace length short between the BNC and IN0+. The trace routing for IN0+ and IN0- should be symmetrical, approximately equal lengths and equal loading.
6. Use coupled differential traces with 100-Ω impedance for signal routing to OUT0± and OUT1±. They are usually 5-8 mil trace width reference to a ground plane at Layer 2.
7. The exposed pad EP of the package should be connected to the ground plane through an array of vias. These vias are solder-masked to avoid solder flow into the plated-through holes during the board manufacturing process.
8. Connect each supply pin (VIN, VDDIO, VDD\_LDO, VSS) to the power or ground planes with a short via. The via is usually placed tangent to the supply pins' landing pads with the shortest trace possible.
9. Power supply bypass capacitors should be placed close to the supply pins. They are commonly placed at the bottom layer and share the ground of the EP.

### 10.2 Layout Example

The following example layout demonstrates the high speed signal trace routing to the LMH0324.

1. BNC footprint and anti-pad: Consult BNC manufacturer for proper size.
2. Anti-pad under passive components.
3. 75-Ω single-ended trace.
4. 100-Ω coupled trace.
5. Vias with solder mask.

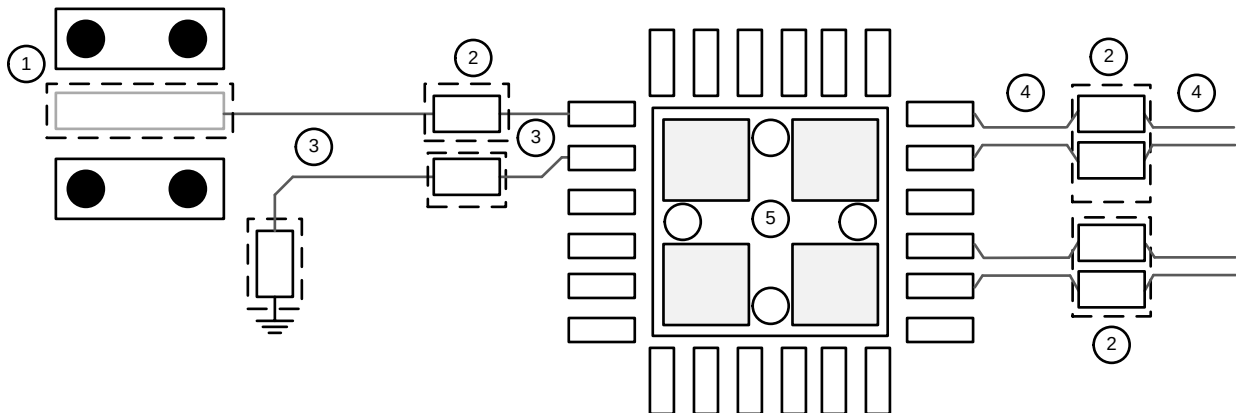

✎ 26. LMH0324 PCB Layout Example

## 11 デバイスおよびドキュメントのサポート

### 11.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 11.2 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ オンライン・コミュニティ** *TIのE2E (Engineer-to-Engineer) コミュニティ*。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

**設計サポート** *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

### 11.3 商標

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 11.4 静電気放電に関する注意事項



これらのデバイスは、限定的なESD (静電破壊) 保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

### 11.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。



## PACKAGING INFORMATION

| Orderable part number       | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">LMH0324RTWR</a> | Active        | Production           | WQFN (RTW)   24 | 3000   LARGE T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |
| LMH0324RTWR.A               | Active        | Production           | WQFN (RTW)   24 | 3000   LARGE T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |
| LMH0324RTWR.B               | Active        | Production           | WQFN (RTW)   24 | 3000   LARGE T&R      | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |
| <a href="#">LMH0324RTWT</a> | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |
| LMH0324RTWT.A               | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |
| LMH0324RTWT.B               | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | SN                                   | Level-3-260C-168 HR               | -40 to 85    | L0324A2             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMH0324RTWR | WQFN         | RTW             | 24   | 3000 | 330.0              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |
| LMH0324RTWT | WQFN         | RTW             | 24   | 250  | 177.8              | 12.4               | 4.3     | 4.3     | 1.3     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

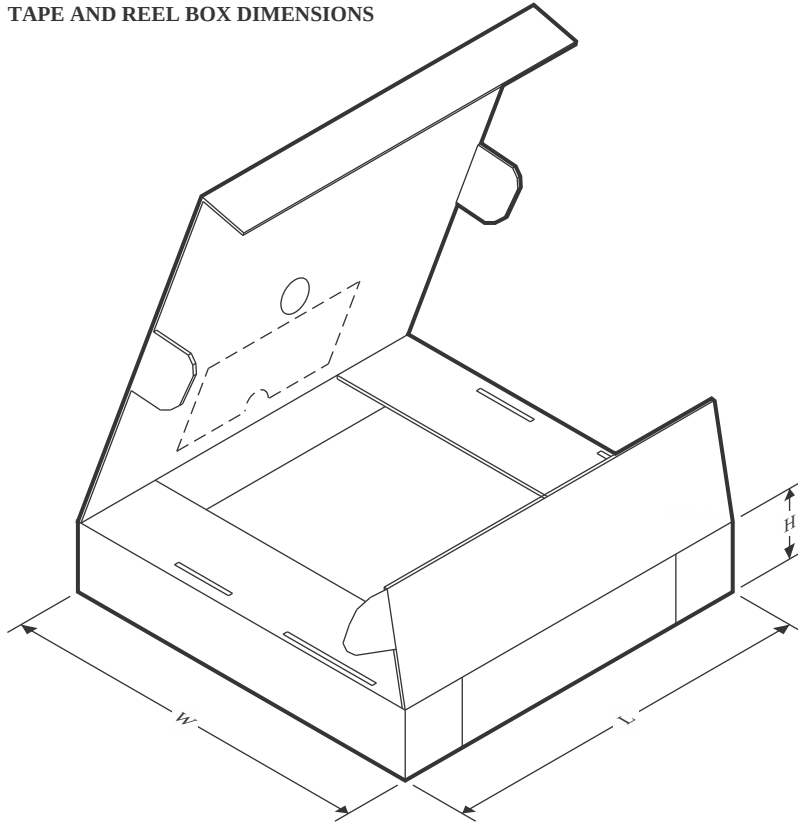

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMH0324RTWR | WQFN         | RTW             | 24   | 3000 | 356.0       | 356.0      | 36.0        |
| LMH0324RTWT | WQFN         | RTW             | 24   | 250  | 208.0       | 191.0      | 35.0        |




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT



RTW0024A

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

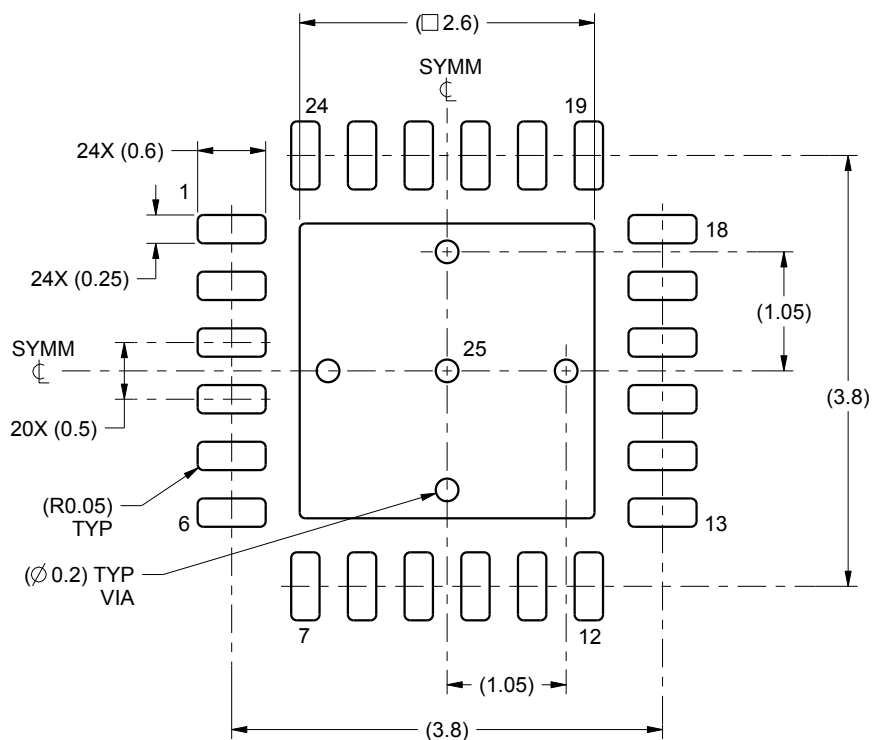

LAND PATTERN EXAMPLE  
SCALE:15X

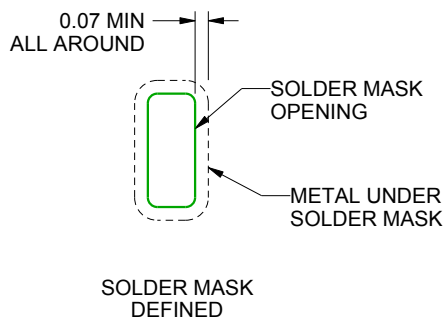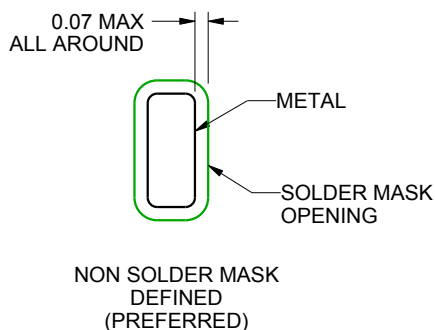

SOLDER MASK DETAILS

4222815/A 03/2016


NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).

RTW0024A

### WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

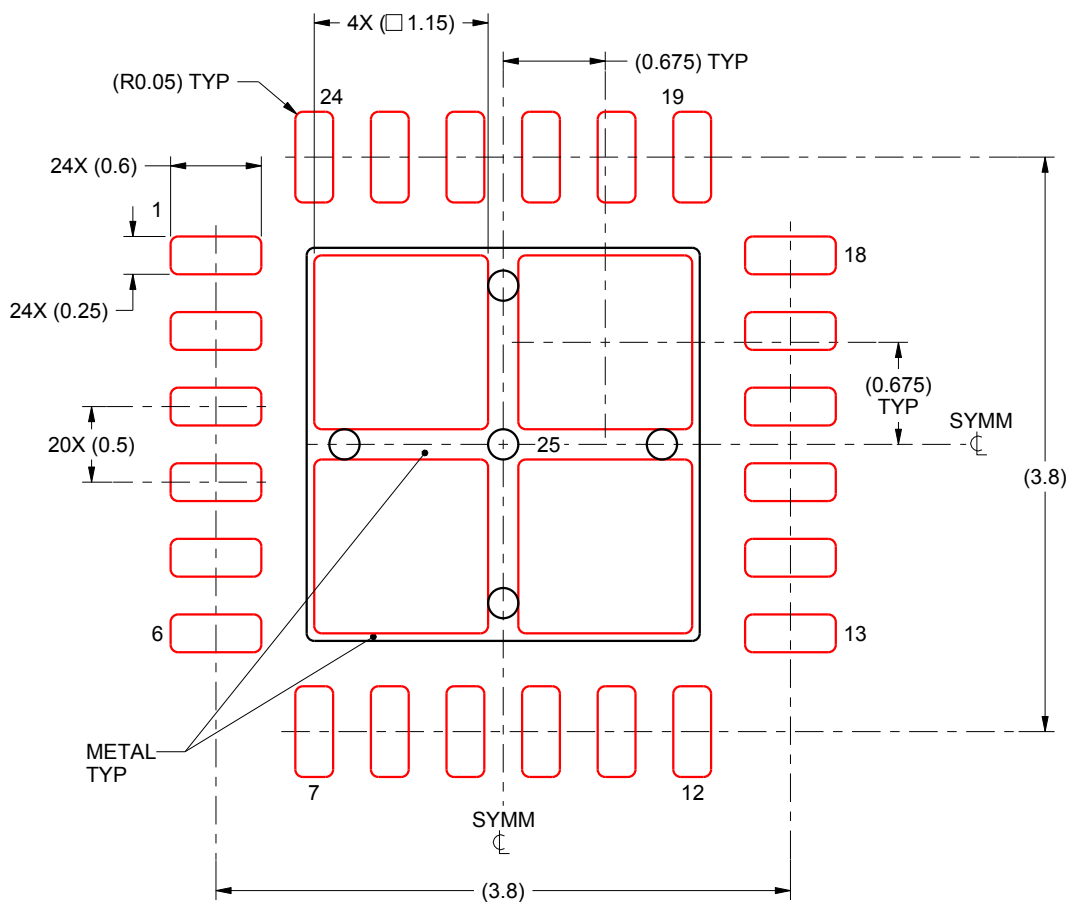

## SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 25:  
78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:20X

4222815/A 03/2016

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated