



OPAx188-Q1高精度、低ノイズ、レール・ツー・レール出力、36V、ゼロドリフト、車載用グレード・オペアンプ

1 特長

- 車載アプリケーションに対応
- 下記内容でAEC-Q100認定済み：
 - OPA188-Q1デバイス温度グレード1: -40°C ~ +125°C
 - OPA2188-Q1デバイス温度グレード2: -40°C ~ +105°C
 - デバイスHBM ESD分類レベル1C
 - デバイスCDM ESD分類レベルC5
- 広い電源電圧範囲: $\pm 2V \sim \pm 18V$
- 低いオフセット電圧: 25 μV (最大値)
- ゼロドリフト: 0.03 $\mu V/^\circ C$
- 低ノイズ: 8.8nV/ $\sqrt{Hz}$
 - 0.1Hz ~ 10Hzのノイズ: 0.25 μV_{pp}
- 非常に優れたDC精度
 - PSRR: 142dB
 - CMRR: 146dB
 - オープンループ・ゲイン: 136dB
- ゲイン帯域幅: 2MHz
- 静止電流: 510 μA (最大値)
- 広い電源電圧範囲: $\pm 2V \sim \pm 18V$
- レール・ツー・レール出力
- 入力に負のレールも含む
- RFIフィルタ付きの入力

2 アプリケーション

- HEV/EVのパワートレイン
 - DC/DCコンバータ
 - トラクション・インバータ
- 高精度の安全性とセンシング: (ブレーキ、位置、乗客の在席の検出)
- 高精度の監督と監視

3 概要

OPAx188-Q1オペアンプ・ファミリは、TI独自のゼロ・ドリフト技術により、低いオフセット電圧(最大値25 μV)と、時間や温度に対してほぼ**ゼロのドリフト係数**を実現しています。この小型で高精度、低静止電流のアンプ・ファミリは入力インピーダンスが高く、レールから15mV以内のレール・ツー・レール出力を提供します。入力同相範囲には、負のレールも含まれます。4V ~ 36V ($\pm 2V \sim \pm 18V$)の単電源またはデュアル電源を使用できます。


OPA188-Q1とOPA2188-Q1は、いずれもVSSOP-8で供給されます。単一チャネル・バージョン(OPA188-Q1)は-40°C ~ +125°C、デュアル・チャネル・バージョン(OPA2188-Q1)は-40°C ~ +105°Cで完全に動作が規定されています。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ(typ)
OPA188-Q1	VSSOP (8)	3.00mm×3.00mm
OPA2188-Q1		

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にあるパッケージ・オプションについての付録を参照してください。

オフセット電圧の製造分布

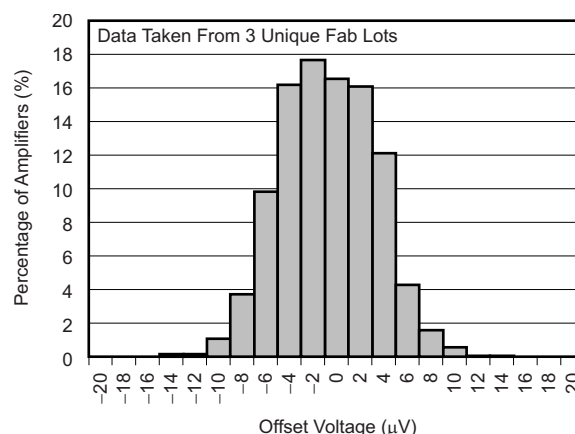

目次

1	特長	1	8.3	Feature Description	19
2	アプリケーション	1	8.4	Device Functional Modes	22
3	概要	1	9	Application and Implementation	23
4	改訂履歴	2	9.1	Application Information	23
5	Device Comparison Table	3	9.2	Typical Applications	23
5.1	Portfolio Comparison	3	10	Power Supply Recommendations	27
6	Pin Configuration and Functions	4	11	Layout	28
7	Specifications	6	11.1	Layout Guidelines	28
7.1	Absolute Maximum Ratings	6	11.2	Layout Example	28
7.2	ESD Ratings	6	12	デバイスおよびドキュメントのサポート	29
7.3	Recommended Operating Conditions	6	12.1	デバイス・サポート	29
7.4	Thermal Information	6	12.2	ドキュメントのサポート	29
7.5	Electrical Characteristics: High-Voltage Operation ..	7	12.3	関連リンク	29
7.6	Electrical Characteristics: Low-Voltage Operation ...	9	12.4	ドキュメントの更新通知を受け取る方法	29
7.7	Typical Characteristics: Table of Graphs	11	12.5	コミュニティ・リソース	29
7.8	Typical Characteristics	12	12.6	商標	30
8	Detailed Description	18	12.7	静電気放電に関する注意事項	30
8.1	Overview	18	12.8	Glossary	30
8.2	Functional Block Diagram	18	13	メカニカル、パッケージ、および注文情報	30

4 改訂履歴

日付	改訂内容	注
2017年4月	*	初版

5 Device Comparison Table


5.1 Portfolio Comparison

Zero-Drift Amplifier Portfolio

VERSION	PRODUCT	OFFSET VOLTAGE (μV , maximum)	OFFSET VOLTAGE DRIFT ($\mu\text{V}/^\circ\text{C}$, maximum)	BANDWIDTH (MHz)	INPUT VOLTAGE NOISE (μV_{PP} , $f = 0.1 \text{ Hz to } 10 \text{ Hz}$)
Single	OPA188-Q1 (4 V to 36 V)	± 25	± 0.085	2	0.25
	OPA333 (5 V)	± 10	± 0.05	0.35	1.1
	OPA378 (5 V)	± 50	± 0.25	0.9	0.4
	OPA735 (12 V)	± 5	± 0.05	1.6	2.5
Dual	OPA2188-Q1 (4 V to 36 V)	± 25	± 0.085	2	0.25
	OPA2333 (5 V)	± 10	± 0.05	0.35	1.1
	OPA2378 (5 V)	± 50	± 0.25	0.9	0.4
	OPA2735 (12 V)	± 5	± 0.05	1.6	2.5
Quad	OPA4330 (5 V)	± 50	± 0.25	0.35	1.1

6 Pin Configuration and Functions

**OPA188-Q1 DGK Package
8-Pin VSSOP
Top View**

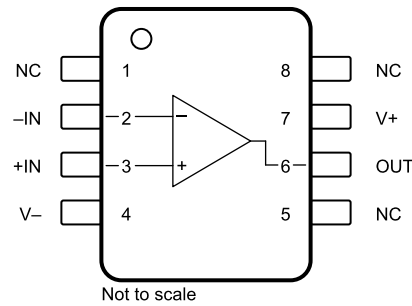


(1) NC = no connection.

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
+IN	3	I	Noninverting input
-IN	2	I	Inverting input
NC	1, 5, 8	—	No internal connection (can be left floating)
OUT	6	O	Output
V+	7	—	Positive (highest) power supply
V-	4	—	Negative (lowest) power supply

**OPA2188-Q1 DGK Package
8-Pin VSSOP
Top View**

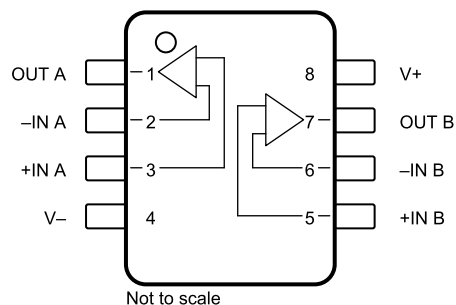

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
+IN A	3	I	Noninverting input, channel A
+IN B	5	I	Noninverting input, channel B
-IN A	2	I	Inverting input, channel A
-IN B	6	I	Inverting input, channel B
OUT A	1	O	Output, channel A
OUT B	7	O	Output, channel B
V+	8	—	Positive (highest) power supply
V-	4	—	Negative (lowest) power supply

7 Specifications

7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

			MIN	MAX	UNIT
Voltage	Supply	Split-supply		±20	V
		Single-supply		40	
	Signal input pins ⁽²⁾		(V ₋) – 0.5	(V ₊) + 0.5	
		Differential		±0.7	
Current	Signal input pins ⁽²⁾			±10	mA
	Output short-circuit ⁽³⁾			Continuous	
Temperature	OPA188-Q1, T _J			150	°C
	OPA2188-Q1, T _J			125	°C
	Storage, T _{stg}		–65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails should be current-limited to 10 mA or less.
- (3) Short-circuit to ground, V₋ or V₊.

7.2 ESD Ratings

		VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 ⁽¹⁾	±1500
		Charged-device model (CDM), per AEC Q100-011	±750

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted) R_L = 10 kΩ connected to V_S / 2⁽¹⁾, and V_{CM} = V_{OUT} = V_S / 2⁽¹⁾

			MIN	NOM	MAX	UNIT
V _S	Operating voltage range	Split-supply	±2		±18	V
		Single-supply	4		36	
T _A	OPA188-Q1 Temperature Grade 1: Specified temperature range		–40		125	°C
	OPA2188-Q1 Temperature Grade 2: Specified temperature range		–40		105	

- (1) V_S / 2 = midsupply.

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾		OPA188-Q1	OPA2188-Q1	UNIT
		DGK (VSSOP)	DGK (VSSOP)	
		8 PINS	8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	171.7	163.2	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	62.7	57.4	°C/W
R _{θJB}	Junction-to-board thermal resistance	93.0	83.4	°C/W
Ψ _{JT}	Junction-to-top characterization parameter	9.0	6.6	°C/W
Ψ _{JB}	Junction-to-board characterization parameter	91.4	82.0	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

7.5 Electrical Characteristics: High-Voltage Operation

at $T_A = 25^\circ\text{C}$, $V_S = \pm 4\text{ V}$ to $\pm 18\text{ V}$ ($V_S = 8\text{ V}$ to 36 V), $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ ⁽¹⁾, and $V_{CM} = V_{OUT} = V_S / 2$ ⁽¹⁾
(unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
OFFSET VOLTAGE						
V _{OS}	Input offset voltage			±6	±25	μV
dV _{IO} /dT	Input offset voltage drift	OPA188-Q1 T _A = −40°C to 125°C		±0.03	±0.085	μV/°C
		OPA2188-Q1 T _A = −40°C to 105°C		±0.03	±0.085	μV/°C
PSRR	Power-supply rejection ratio	OPA188-Q1 V _S = 4 V to 36 V T _A = −40°C to 125°C		±0.075	±0.3	μV/V
		OPA2188-Q1 V _S = 4 V to 36 V T _A = −40°C to 105°C		±0.075	±0.3	μV/V
Long-term stability ⁽²⁾				4		μV
INPUT BIAS CURRENT						
I _B	Input bias current	V _{CM} = V _S / 2		±160	±1400	pA
		OPA188-Q1 T _A = −40°C to 125°C			±18	nA
		OPA2188-Q1 T _A = −40°C to 105°C			±18	nA
I _{OS}	Input offset current	V _{CM} = V _S / 2		±320	±2800	pA
		OPA188-Q1 T _A = −40°C to 125°C			±6	nA
		OPA2188-Q1 T _A = −40°C to 105°C			±6	nA
NOISE						
e _n	Input voltage noise	f = 0.1 Hz to 10 Hz		250		nV _{PP}
		f = 0.1 Hz to 10 Hz		40		nV _{rms}
	Input voltage noise density	f = 1 kHz		8.8		nV/√Hz
i _n	Input current noise density	f = 1 kHz		7		fA/√Hz
INPUT VOLTAGE RANGE						
V _{CM}	Common-mode voltage range	OPA188-Q1 T _A = −40°C to 125°C	V−		(V+) − 1.5	V
		OPA2188-Q1 T _A = −40°C to 105°C	V−		(V+) − 1.5	V
CMRR	Common-mode rejection ratio	(V−) < V _{CM} < (V+) − 1.5 V	120	134		dB
		(V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±18 V	130	146		dB
		OPA188-Q1 (V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±18 V, T _A = −40°C to 125°C	120	126		dB
		OPA2188-Q1 (V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±18 V, T _A = −40°C to 105°C	120	126		dB
INPUT IMPEDANCE						
Z _{ID}	Differential			100 6		MΩ pF
Z _{IC}	Common-mode			6 9.5		10 ¹² Ω pF
OPEN-LOOP GAIN						
A _{OL}	Open-loop voltage gain	(V−) + 0.5 V < V _O < (V+) − 0.5 V	130	136		dB
		OPA188-Q1 (V−) + 0.5 V < V _O < (V+) − 0.5 V T _A = −40°C to 125°C	120	126		dB
		OPA2188-Q1 (V−) + 0.5 V < V _O < (V+) − 0.5 V T _A = −40°C to 105°C	120	126		dB
FREQUENCY RESPONSE						

(1) $V_S / 2 = \text{midsupply}$.

(2) 1000-hour life test at 125°C demonstrated randomly distributed variation in the range of measurement limits at approximately $4\text{ }\mu\text{V}$.

OPA188-Q1, OPA2188-Q1

JAJSD37 – APRIL 2017

www.ti.com
Electrical Characteristics: High-Voltage Operation (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 4\text{ V}$ to $\pm 18\text{ V}$ ($V_S = 8\text{ V}$ to 36 V), $R_L = 10\text{ k}\Omega$ connected to $V_S / 2^{(1)}$, and $V_{CM} = V_{OUT} = V_S / 2^{(1)}$
(unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
GBW	Gain-bandwidth product			2		MHz
SR	Slew rate	$G = 1$		0.8		V/ μs
t_S	Settling time	0.1%	$V_S = \pm 18\text{ V}$, $G = 1$, 10-V step	20		μs
		0.01%	$V_S = \pm 18\text{ V}$, $G = 1$, 10-V step	27		μs
t_{OR}	Overload recovery time	$V_{IN} \times G = V_S$		1		μs
THD+N	Total harmonic distortion + noise	1 kHz, $G = 1$, $V_{OUT} = 1 V_{RMS}$		0.0001%		
OUTPUT						
Voltage output swing from rail		No load		6	15	mV
		$R_L = 10\text{ k}\Omega$		220	250	mV
		OPA188-Q1 $R_L = 10\text{ k}\Omega$, $T_A = -40^\circ\text{C}$ to 125°C		310	350	mV
		OPA2188-Q1 $R_L = 10\text{ k}\Omega$, $T_A = -40^\circ\text{C}$ to 105°C		310	350	mV
I_{SC}	Short-circuit current	Sinking		-18		mA
		Sourcing		16		mA
R_O	Open-loop output resistance	$f = 1\text{ MHz}$, $I_O = 0\text{ mA}$		120		Ω
C_{LOAD}	Capacitive load drive			1		nF
POWER SUPPLY						
I_Q		$V_S = \pm 4\text{ V}$ to $V_S = \pm 18\text{ V}$		450	510	μA
		OPA188-Q1 $I_O = 0\text{ mA}$ $T_A = -40^\circ\text{C}$ to 125°C			600	μA
		OPA2188-Q1 $I_O = 0\text{ mA}$ $T_A = -40^\circ\text{C}$ to 105°C			600	μA

7.6 Electrical Characteristics: Low-Voltage Operation

at $T_A = 25^\circ\text{C}$, $V_S = \pm 2\text{ V}$ to $\pm 4\text{ V}$ ($V_S = 4\text{ V}$ to $< 8\text{ V}$), $R_L = 10\text{ k}\Omega$ connected to $V_S / 2^{(1)}$, and $V_{CM} = V_{OUT} = V_S / 2^{(1)}$ (unless otherwise noted)

PARAMETER		CONDITIONS	MIN	TYP	MAX	UNIT
OFFSET VOLTAGE						
V _{OS}	Input offset voltage			±6	±25	μV
dV _{IO} /dT	Input offset voltage drift	OPA188-Q1 T _A = −40°C to 125°C		±0.03	±0.085	μV/°C
		OPA2188-Q1 T _A = −40°C to 105°C		±0.03	±0.085	μV/°C
PSRR	Power-supply rejection ratio	OPA188-Q1 V _S = 4 V to 36 V T _A = −40°C to 125°C		0.075	0.3	μV/V
		OPA2188-Q1 V _S = 4 V to 36 V T _A = −40°C to 105°C		0.075	0.3	μV/V
Long-term stability ⁽²⁾				4		μV
INPUT BIAS CURRENT						
I _B	Input bias current			±160	±1400	pA
		OPA188-Q1 T _A = −40°C to 125°C			±18	nA
		OPA2188-Q1 T _A = −40°C to 105°C			±18	nA
I _{OS}	Input offset current			±320	±2800	pA
		OPA188-Q1 T _A = −40°C to 125°C			±6	nA
		OPA2188-Q1 T _A = −40°C to 105°C			±6	nA
NOISE						
e _n	Input voltage noise	f = 0.1 Hz to 10 Hz		250		nV _{PP}
		f = 0.1 Hz to 10 Hz		40		nV _{rms}
Input voltage noise density		f = 1 kHz		8.8		nV/√Hz
i _n	Input current noise density	f = 1 kHz		7		fA/√Hz
INPUT VOLTAGE RANGE						
V _{CM}	Common-mode voltage range	OPA188-Q1 T _A = −40°C to 125°C	V−		(V+) − 1.5	V
		OPA2188-Q1 T _A = −40°C to 105°C	V−		(V+) − 1.5	V
CMRR	Common-mode rejection ratio	(V−) < V _{CM} < (V+) − 1.5 V	106	114		dB
		(V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±2 V	114	120		dB
		OPA188-Q1 (V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±2 V, T _A = −40°C to 125°C	110	120		dB
		OPA2188-Q1 (V−) + 0.5 V < V _{CM} < (V+) − 1.5 V V _S = ±2 V, T _A = −40°C to 105°C	110	120		dB
INPUT IMPEDANCE						
Z _{ID}	Differential			100 6		MΩ pF
Z _{IC}	Common-mode			6 9.5		10 ¹² Ω pF
OPEN-LOOP GAIN						

(1) $V_S / 2 = \text{midsupply}$.

(2) 1000-hour life test at 125°C demonstrated randomly distributed variation in the range of measurement limits at approximately $4\text{ }\mu\text{V}$.

OPA188-Q1, OPA2188-Q1

JAJSD37 – APRIL 2017

www.tij.co.jp
Electrical Characteristics: Low-Voltage Operation (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 2\text{ V}$ to $< \pm 4\text{ V}$ ($V_S = 4\text{ V}$ to $< 8\text{ V}$), $R_L = 10\text{ k}\Omega$ connected to $V_S / 2^{(1)}$, and $V_{CM} = V_{OUT} = V_S / 2^{(1)}$
(unless otherwise noted)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
A_{OL} Open-loop voltage gain	$(V-) + 0.5\text{ V} < V_O < (V+) - 0.5\text{ V}$ $R_L = 5\text{ k}\Omega$	110	120		dB
	$(V-) + 0.5\text{ V} < V_O < (V+) - 0.5\text{ V}$	120	130		dB
	OPA188-Q1 $(V-) + 0.5\text{ V} < V_O < (V+) - 0.5\text{ V}$ $T_A = -40^\circ\text{C}$ to 125°C	110	120		dB
	OPA2188-Q1 $(V-) + 0.5\text{ V} < V_O < (V+) - 0.5\text{ V}$ $T_A = -40^\circ\text{C}$ to 105°C	110	120		dB
FREQUENCY RESPONSE					
GBW Gain-bandwidth product			2		MHz
SR Slew rate	$G = 1$		0.8		V/ μs
t_{OR} Overload recovery time	$V_{IN} \times G = V_S$		1		μs
THD+N Total harmonic distortion + noise	1 kHz, $G = 1$, $V_{OUT} = 1\text{ V}_{RMS}$		0.0001%		
OUTPUT					
Voltage output swing from rail	No load		6	15	mV
	$R_L = 10\text{ k}\Omega$		220	250	mV
	OPA188-Q1 $R_L = 10\text{ k}\Omega$, $T_A = -40^\circ\text{C}$ to 125°C		310	350	mV
	OPA2188-Q1 $R_L = 10\text{ k}\Omega$, $T_A = -40^\circ\text{C}$ to 105°C		310	350	mV
I_{SC} Short-circuit current	Sinking		-18		mA
	Sourcing		16		mA
R_O Open-loop output resistance	$f = 1\text{ MHz}$, $I_O = 0\text{ mA}$		120		Ω
C_{LOAD} Capacitive load drive			1		nF
POWER SUPPLY					
I_Q Quiescent current (per amplifier)	$V_S = \pm 2\text{ V}$ to $V_S = \pm 4\text{ V}$		425	485	μA
	OPA188-Q1 $I_O = 0\text{ mA}$ $T_A = -40^\circ\text{C}$ to 125°C			575	μA
	OPA2188-Q1 $I_O = 0\text{ mA}$ $T_A = -40^\circ\text{C}$ to 105°C			575	μA

7.7 Typical Characteristics: Table of Graphs

7.7.1 Table of Graphs

表 1. Typical Characteristic Graphs

DESCRIPTION	FIGURE
Offset Voltage Production Distribution	Figure 1
Offset Voltage Drift Distribution	Figure 2
Offset Voltage vs Temperature	Figure 3
Offset Voltage vs Common-Mode Voltage	Figure 4 , Figure 5
Offset Voltage vs Power Supply	Figure 6
Open-Loop Gain and Phase vs Frequency	Figure 7
Closed-Loop Gain vs Frequency	Figure 8
I_B and I_{OS} vs Common-Mode Voltage	Figure 9
Input Bias Current vs Temperature	Figure 10
Output Voltage Swing vs Output Current (Maximum Supply)	Figure 11
CMRR and PSRR vs Frequency (Referred-to-Input)	Figure 12
CMRR vs Temperature	Figure 13 , Figure 14
PSRR vs Temperature	Figure 15
0.1-Hz to 10-Hz Noise	Figure 16
Input Voltage Noise Spectral Density vs Frequency	Figure 17
THD+N Ratio vs Frequency	Figure 18
THD+N vs Output Amplitude	Figure 19
Quiescent Current vs Supply Voltage	Figure 20
Quiescent Current vs Temperature	Figure 21
Open-Loop Gain vs Temperature	Figure 22
Open-Loop Output Impedance vs Frequency	Figure 23
Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)	Figure 24 , Figure 25
No Phase Reversal	Figure 26
Positive Overload Recovery	Figure 27
Negative Overload Recovery	Figure 28
Small-Signal Step Response (100 mV)	Figure 29 , Figure 30
Large-Signal Step Response	Figure 31 , Figure 32
Large-Signal Settling Time (10-V Positive Step)	Figure 33
Large-Signal Settling Time (10-V Negative Step)	Figure 34
Short-Circuit Current vs Temperature	
Maximum Output Voltage vs Frequency	Figure 35
EMIRR IN+ vs Frequency	Figure 36

7.8 Typical Characteristics

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

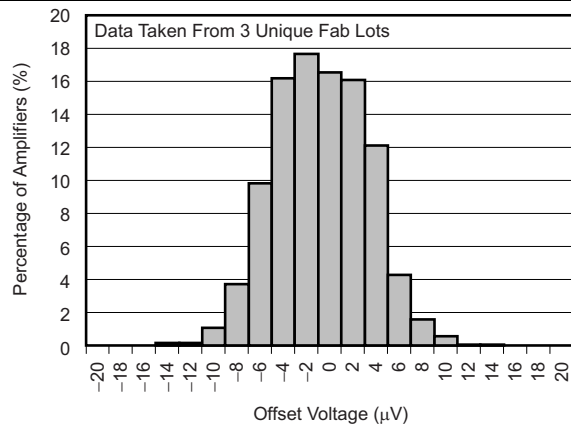


图 1. Offset Voltage Production Distribution


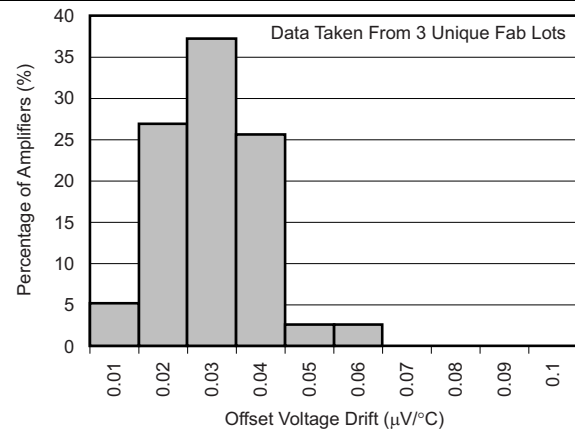


图 2. Offset Voltage Drift Distribution

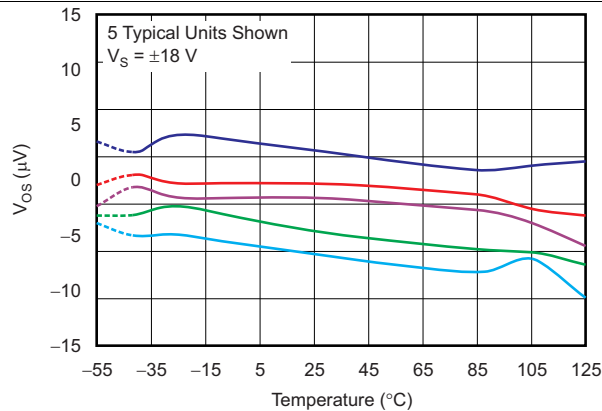

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

图 3. Offset Voltage vs Temperature

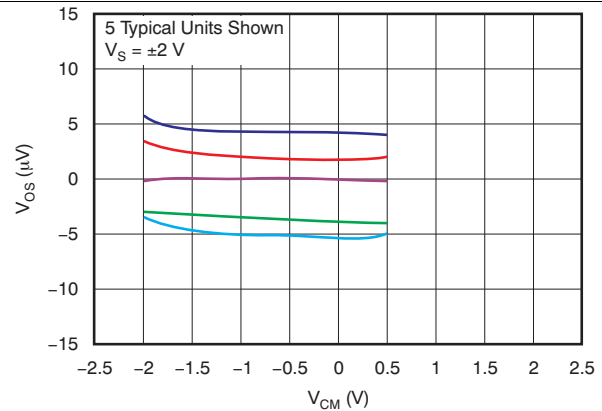


图 4. Offset Voltage vs Common-Mode Voltage

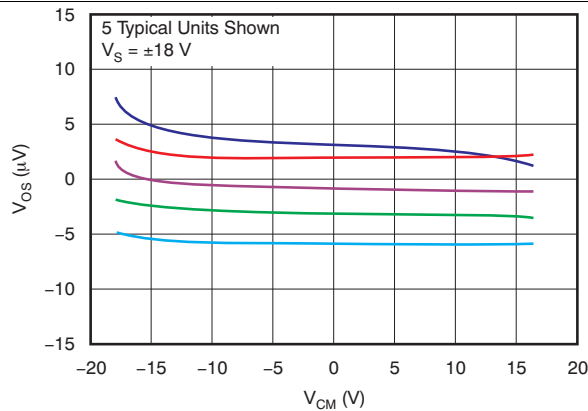


图 5. Offset Voltage vs Common-Mode Voltage

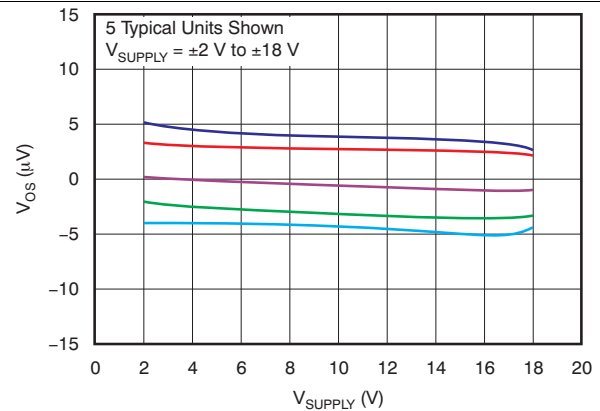


图 6. Offset Voltage vs Power Supply

Typical Characteristics (continued)

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

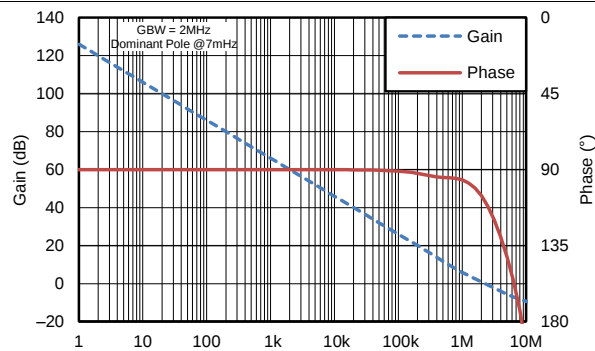


Figure 7. Open-Loop Gain and Phase vs Frequency

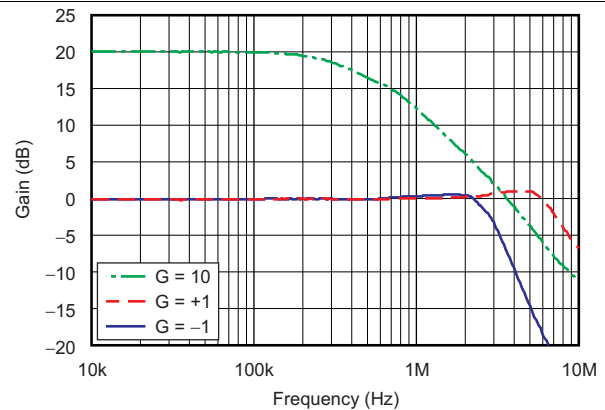


Figure 8. Closed-Loop Gain vs Frequency


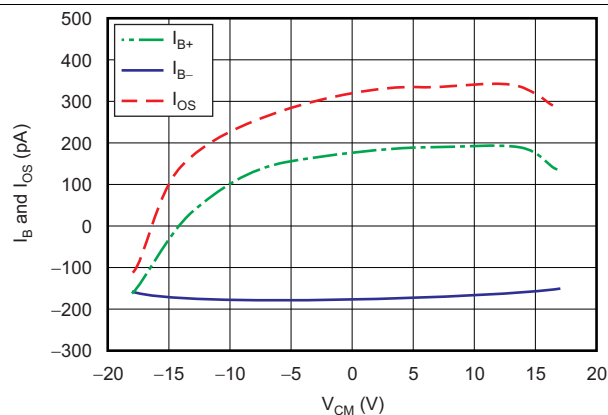



Figure 9. I_B and I_{OS} vs Common-Mode Voltage

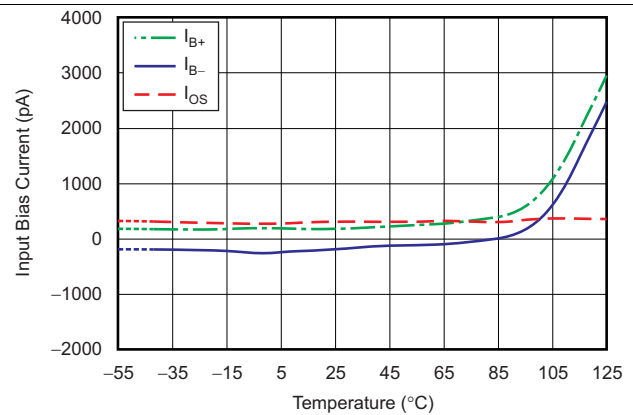

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$

OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

Figure 10. Input Bias Current vs Temperature

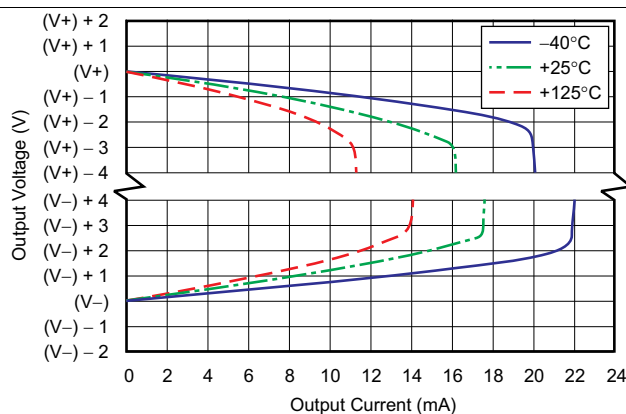

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$

OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

Figure 11. Output Voltage Swing vs Output Current (Maximum Supply)


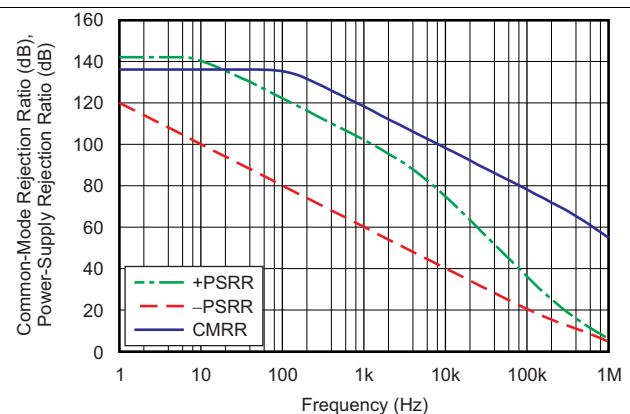


Figure 12. CMRR and PSRR vs Frequency (Referred-to-Input)


Typical Characteristics (continued)

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

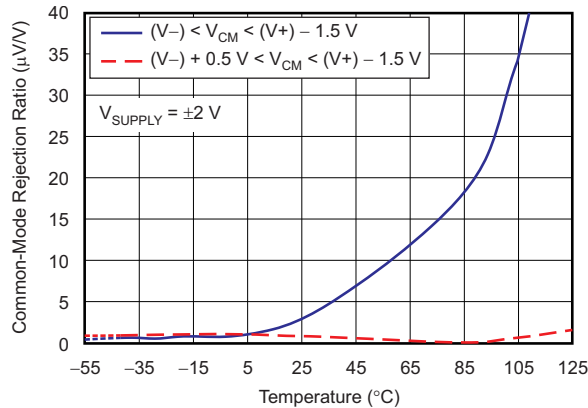


OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

FIG 13. CMRR vs Temperature

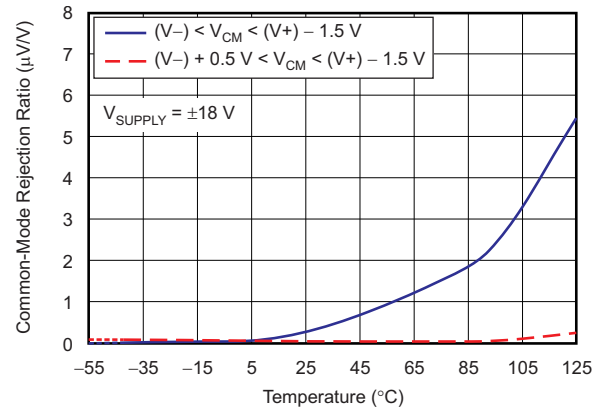


OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

FIG 14. CMRR vs Temperature

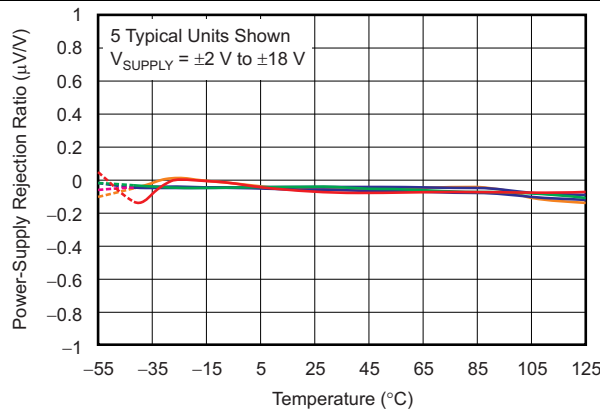

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

FIG 15. PSRR vs Temperature

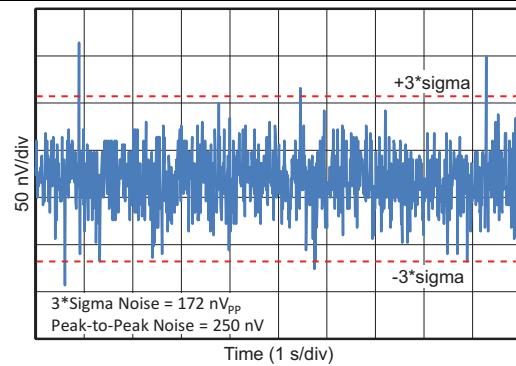

C016

FIG 16. 0.1-Hz to 10-Hz Noise

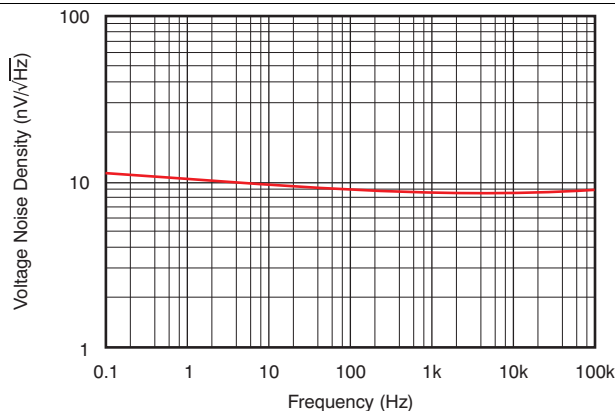


FIG 17. Input Voltage Noise Spectral Density vs Frequency

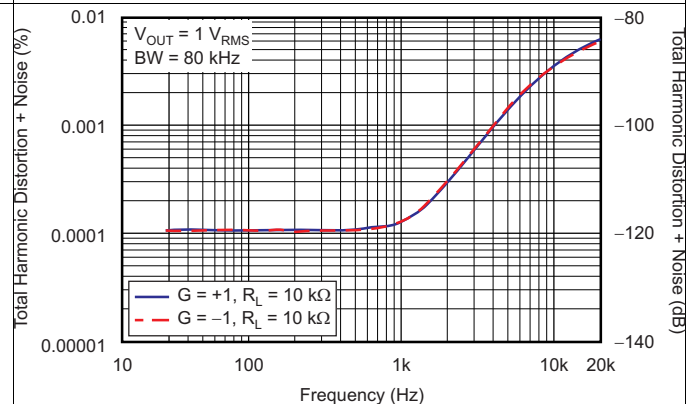


FIG 18. THD+N Ratio vs Frequency

Typical Characteristics (continued)

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

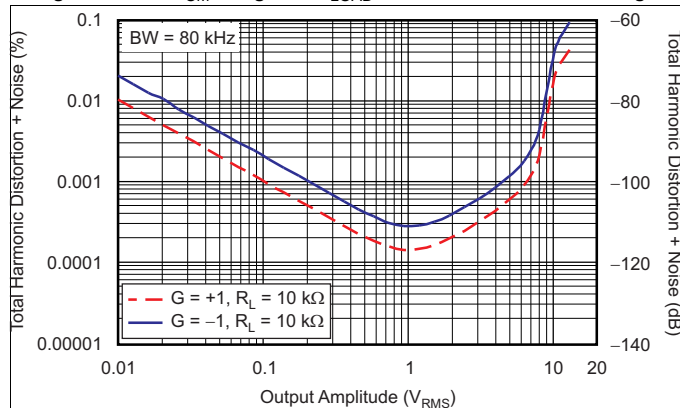


FIG 19. THD+N vs Output Amplitude



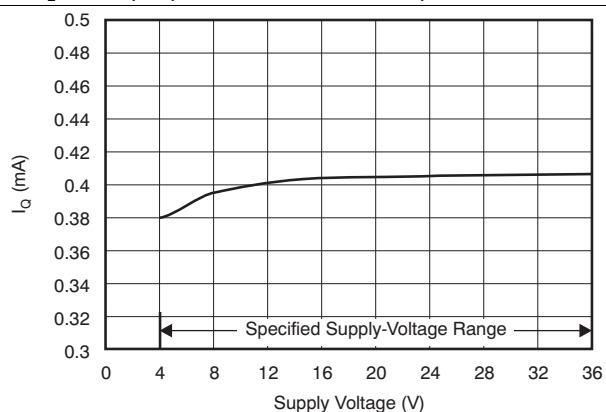


FIG 20. Quiescent Current vs Supply Voltage

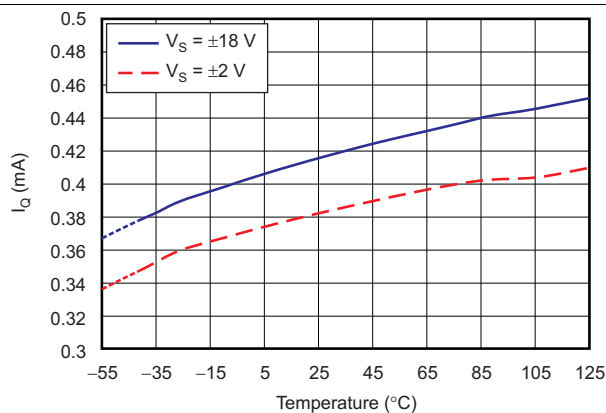

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

FIG 21. Quiescent Current vs Temperature

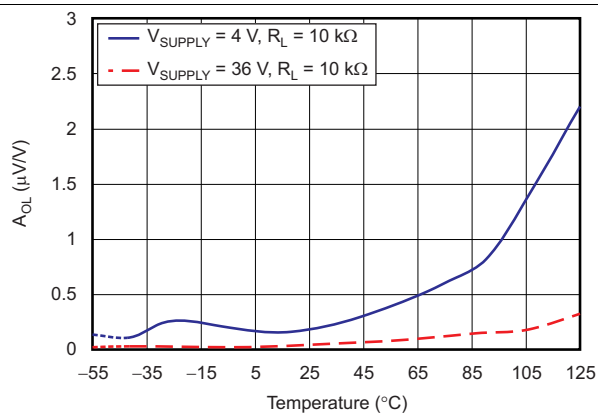

OPA188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$
OPA2188-Q1 is specified from $T_A = -40^\circ\text{C}$ to $+105^\circ\text{C}$

FIG 22. Open-Loop Gain vs Temperature

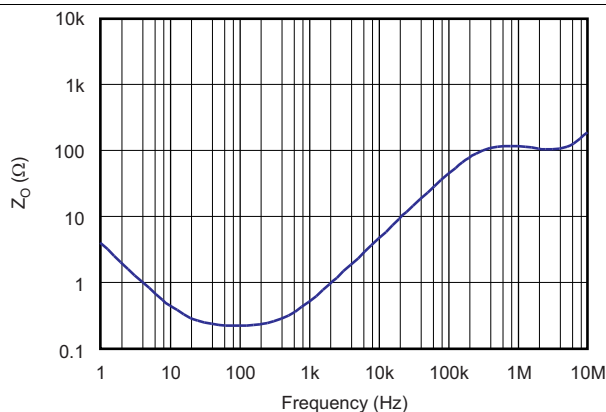


FIG 23. Open-Loop Output Impedance vs Frequency

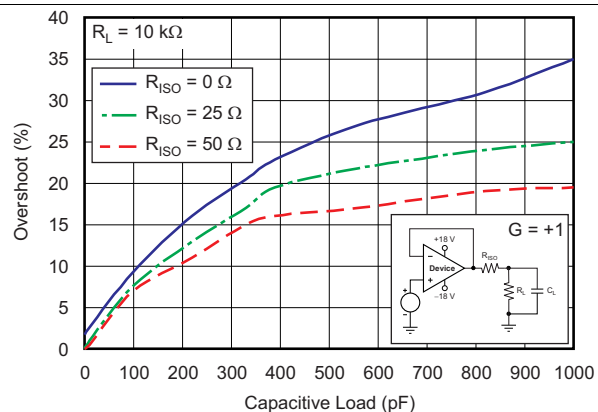


FIG 24. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)

Typical Characteristics (continued)

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

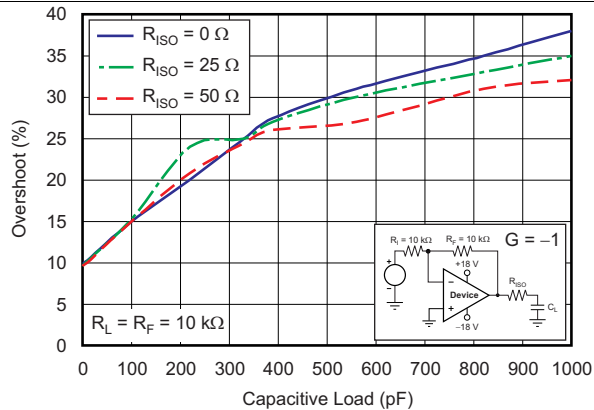


FIG 25. Small-Signal Overshoot vs Capacitive Load (100-mV Output Step)

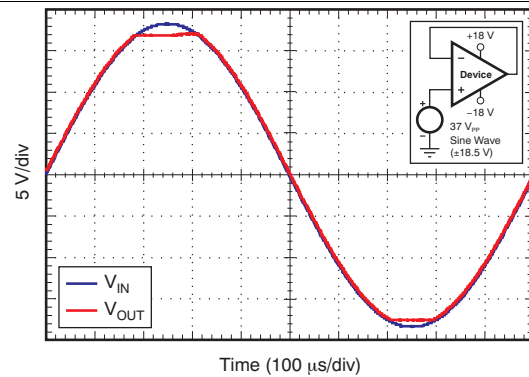


FIG 26. No Phase Reversal

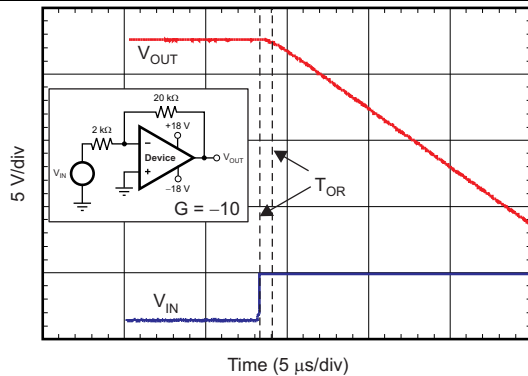


FIG 27. Positive Overload Recovery

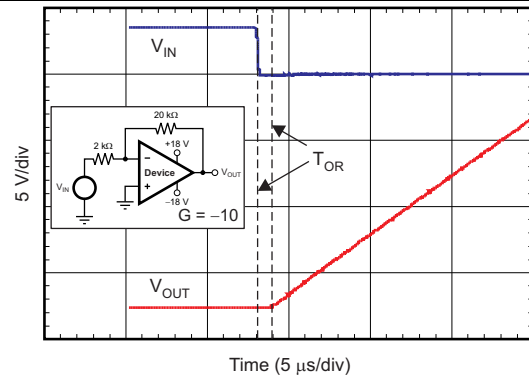


FIG 28. Negative Overload Recovery

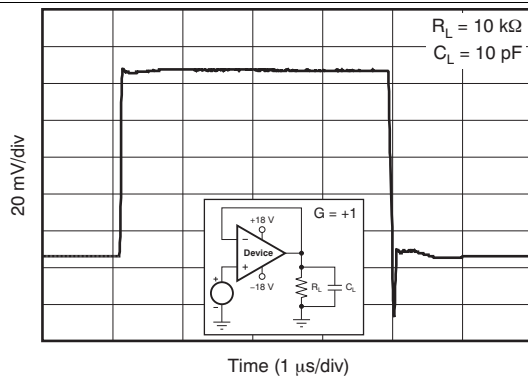


FIG 29. Small-Signal Step Response (100 mV)

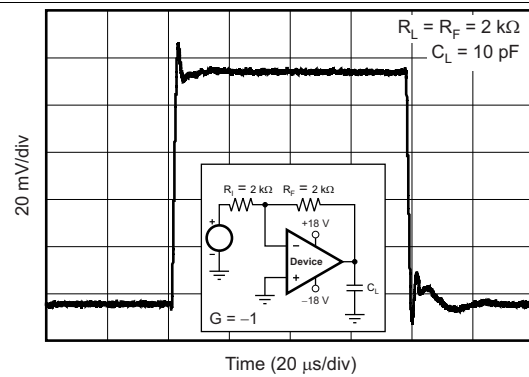


FIG 30. Small-Signal Step Response (100 mV)

Typical Characteristics (continued)

at $V_S = \pm 18\text{ V}$, $V_{CM} = V_S / 2$, $R_{LOAD} = 10\text{ k}\Omega$ connected to $V_S / 2$, and $C_L = 100\text{ pF}$ (unless otherwise noted)

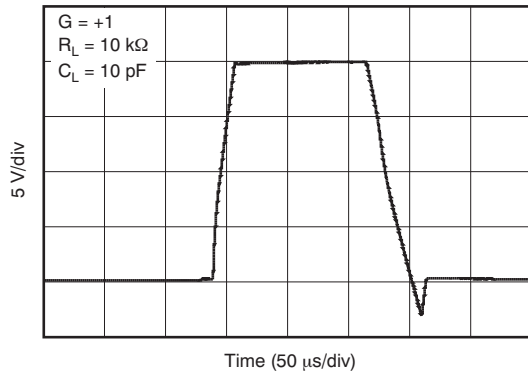


Figure 31. Large-Signal Step Response

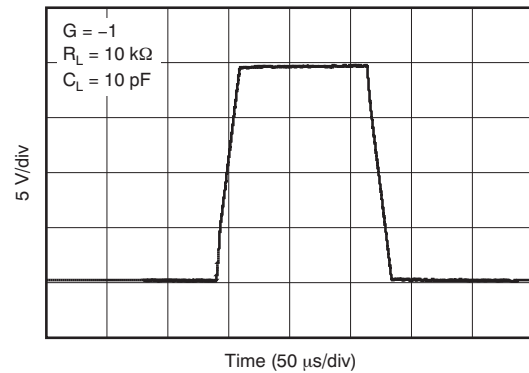


Figure 32. Large-Signal Step Response

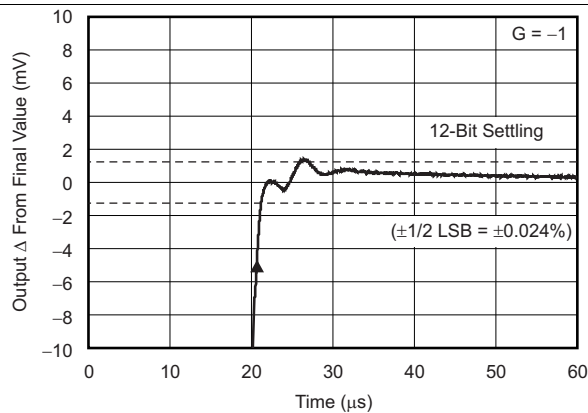


Figure 33. Large-Signal Settling Time (10-V Positive Step)

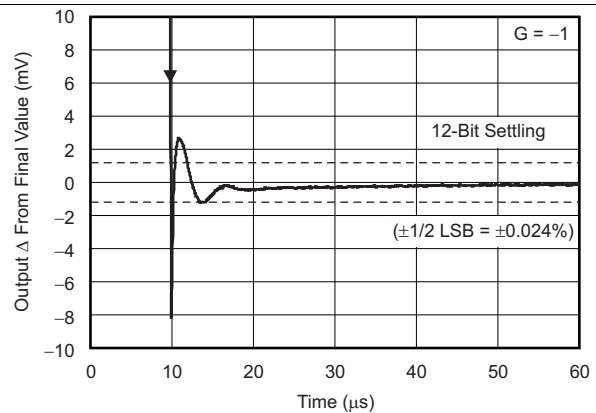


Figure 34. Large-Signal Settling Time (10-V Negative Step)

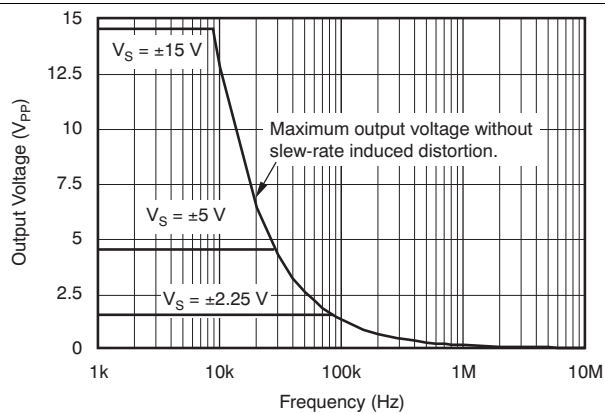


Figure 35. Maximum Output Voltage vs Frequency

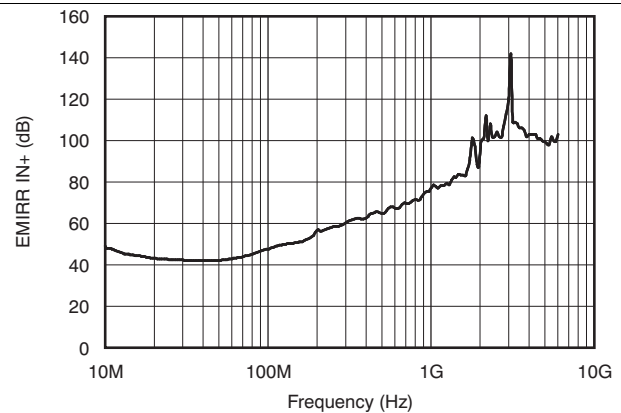


Figure 36. EMIRR IN+ vs Frequency

8 Detailed Description


8.1 Overview

The OPAx188-Q1 operational amplifier series combines precision offset and drift with excellent overall performance, making the device ideal for many precision applications. The precision offset drift of only 0.085 $\mu\text{V}/^\circ\text{C}$ provides stability over the entire temperature range. In addition, this device offers excellent overall performance with high CMRR, PSRR, and A_{OL} . As with all amplifiers, applications with noisy or high-impedance power supplies require decoupling capacitors close to the device pins. In most cases, 0.1- μF capacitors are adequate.

The OPAx188-Q1 device is part of a family of zero-drift, low-power, rail-to-rail output operational amplifiers. These devices operate from 4 V to 36 V, are unity-gain stable, and are suitable for a wide range of general-purpose applications. The zero-drift architecture provides ultra-low input offset voltage and near-zero input offset voltage drift over temperature and time. This choice of architecture also offers outstanding ac performance, such as ultra-low broadband noise and zero flicker noise.

8.2 Functional Block Diagram

图 37 shows a representation of the proprietary OPAx188-Q1 architecture. 表 2 lists the active and passive component counts for this device. The component count allows for accurate reliability calculations.

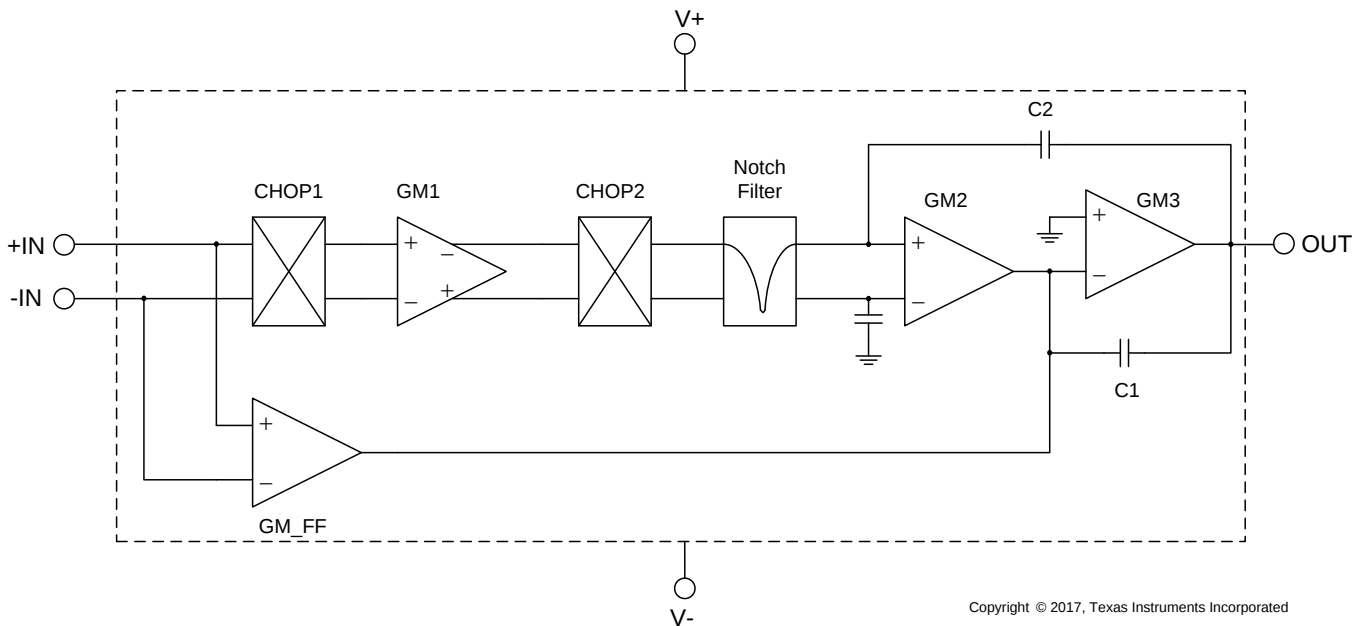

Copyright © 2017, Texas Instruments Incorporated

图 37. Functional Block Diagram

表 2. Component Count

COMPONENT	COUNT
Transistors	636
Diodes	5
Resistors	41
Capacitors	72

8.3 Feature Description

The OPAx188-Q1 series is unity-gain stable and free from unexpected output phase reversal. This device series uses a proprietary, periodic zero-drift technique to provide low input offset voltage and very low input offset voltage drift over temperature. For lowest offset voltage and precision performance, optimize circuit layout and mechanical conditions. Avoid temperature gradients that create thermoelectric (Seebeck) effects in the thermocouple junctions formed from connecting dissimilar conductors. Cancel these thermally-generated potentials by ensuring the potentials are equal on both input pins. Other layout and design considerations include:

- Use low thermoelectric-coefficient conditions (avoid dissimilar metals).
- Thermally isolate components from power supplies or other heat sources.
- Shield the operational amplifier and input circuitry from air currents, such as cooling fans.

Follow these guidelines to reduce the likelihood of junctions being at different temperatures, which may cause thermoelectric voltages of 0.1 $\mu\text{V}/^\circ\text{C}$ or higher, depending on the materials used.

8.3.1 Operating Characteristics

The OPAx188-Q1 is specified for operation from 4 V to 36 V (± 2 V to ± 18 V). Many specifications apply from -40°C to $+125^\circ\text{C}$. Parameters that can exhibit significant variance with regard to operating voltage or temperature are presented in [Typical Characteristics](#).

8.3.2 Phase-Reversal Protection

The OPAx188-Q1 series has an internal phase-reversal protection. Many op amps exhibit a phase reversal when the input is driven beyond the linear common-mode range. This condition is most often encountered in noninverting circuits when the input is driven beyond the specified common-mode voltage range, causing the output to reverse into the opposite rail. The OPAx188-Q1 series input prevents phase reversal with excessive common-mode voltage. Instead, the output limits into the appropriate rail; [Figure 38](#) shows this performance.

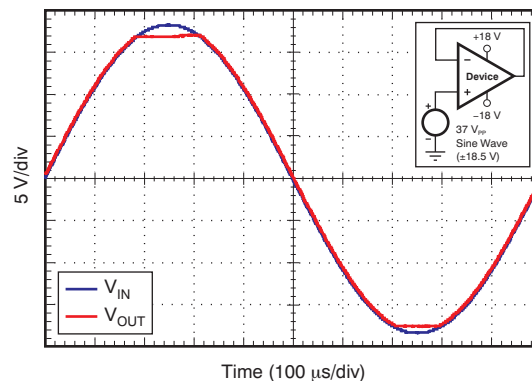


Figure 38. No Phase Reversal

8.3.3 Input Bias Current Clock Feedthrough

Zero-drift amplifiers (such as the OPAx188-Q1 series) use switching on the inputs to correct for the intrinsic offset and drift of the amplifier. Charge injection from the integrated switches on the inputs can introduce very short transients in the input bias current of the amplifier. The extremely short duration of these pulses prevents the devices from being amplified. However, the devices may be coupled to the output of the amplifier through the feedback network. The most effective method to prevent transients in the input bias current from producing additional noise at the amplifier output is to use a low-pass filter such as an RC network.

8.3.4 Internal Offset Correction

The OPAx188-Q1 op amp series uses an auto-calibration technique with a time-continuous 750-kHz op amp in the signal path. This amplifier is zero-corrected every 3 μs using a proprietary technique. Upon power up, the amplifier requires approximately 100 μs to achieve the specified V_{OS} accuracy. This design has no aliasing or flicker noise.

Feature Description (continued)

8.3.5 EMI Rejection

The OPAx188-Q1 series uses integrated electromagnetic interference (EMI) filtering to reduce the effects of EMI interference from sources such as wireless communications and densely-populated boards with a mix of analog signal chain and digital components. EMI immunity can be improved with circuit design techniques; the OPAx188-Q1 series benefits from these design improvements. Texas Instruments™ has developed the ability to accurately measure and quantify the immunity of an operational amplifier over a broad frequency spectrum extending from 10 MHz to 6 GHz. [Figure 39](#) shows the results of this testing on the OPAx188-Q1. [Table 3](#) lists the EMIRR IN+ values for the OPAx188-Q1 devices at particular frequencies commonly encountered in real-world applications. Applications listed in [Table 3](#) may be centered on or operated near the particular frequency shown. Detailed information can also be found in [EMI Rejection Ratio of Operational Amplifiers](#), available for download from www.ti.com.

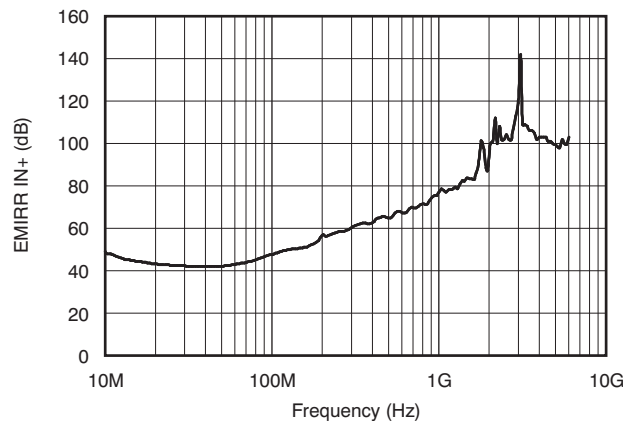




Figure 39. EMIRR Testing

Table 3. OPAx188-Q1 EMIRR IN+ for Frequencies of Interest

FREQUENCY	APPLICATION OR ALLOCATION	EMIRR IN+
400 MHz	Mobile radio, mobile satellite, space operation, weather, radar, ultra-high frequency (UHF) applications	62.2 dB
900 MHz	Global system for mobile communications (GSM) applications, radio communication, navigation, GPS (to 1.6 GHz), GSM, aeronautical mobile, UHF applications	74.7 dB
1.8 GHz	GSM applications, mobile personal communications, broadband, satellite, L-band (1 GHz to 2 GHz)	100.7 dB
2.4 GHz	802.11b, 802.11g, 802.11n, <i>Bluetooth</i> ®, mobile personal communications, industrial, scientific and medical (ISM) radio band, amateur radio and satellite, S-band (2 GHz to 4 GHz)	102.4 dB
3.6 GHz	Radiolocation, aero communication and navigation, satellite, mobile, S-band	104.8 dB
5 GHz	802.11a, 802.11n, aero communication and navigation, mobile communication, space and satellite operation, C-band (4 GHz to 8 GHz)	100.3 dB

8.3.6 Capacitive Load and Stability

The device dynamic characteristics are optimized for a range of common operating conditions. The combination of low closed-loop gain and high capacitive loads decreases the amplifier phase margin and can lead to gain peaking or oscillations. As a result, larger capacitive loads must be isolated from the output. The simplest way to achieve this isolation is to add a small resistor (for example, R_{OUT} equal to 50 Ω) in series with the output. [Figure 40](#) and [Figure 41](#) show graphs of small-signal overshoot versus capacitive load for several values of R_{OUT} . For details of analysis techniques and application circuits, see [Feedback Plots Define Op Amp AC Performance](#), available for download from www.ti.com.

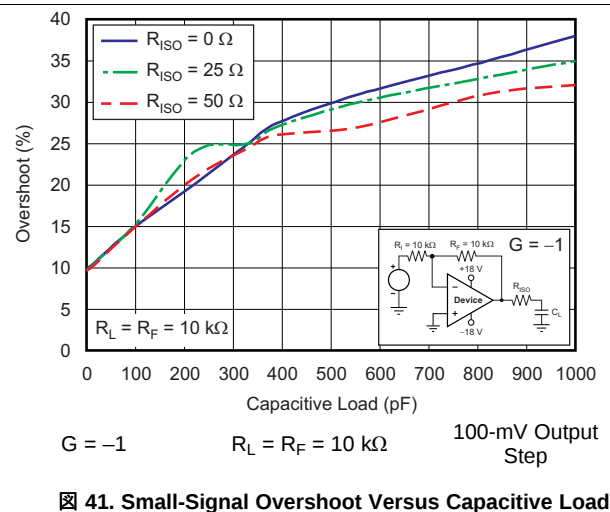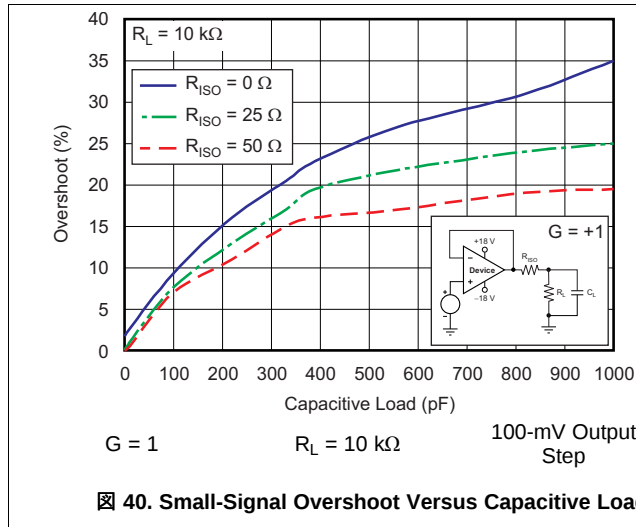

8.3.7 Electrical Overstress

Designers often ask questions about the capability of an operational amplifier to withstand electrical overstress. These questions tend to focus on the device inputs, but may involve the supply voltage pins or the output pin. Each of these different pin functions have electrical stress limits determined by the voltage breakdown characteristics of the particular semiconductor fabrication process and specific circuits connected to the pin. Additionally, internal electrostatic discharge (ESD) protection is built into these circuits to protect them from accidental ESD events both before and during product assembly.

Having a good understanding of this basic ESD circuitry and its relevance to an electrical overstress event is helpful. See [Figure 42](#) for an illustration of the ESD circuits contained in the OPAx188-Q1 (indicated by the dashed line area). The ESD protection circuitry involves several current-steering diodes connected from the input and output pins and routed back to the internal power-supply lines, where the diodes meet at an internal absorption device of the operational amplifier. This protection circuitry is intended to remain inactive during normal circuit operation.

An ESD event produces a short-duration, high-voltage pulse that is transformed into a short-duration, high-current pulse while discharging through a semiconductor device. The ESD protection circuits are designed to provide a current path around the operational amplifier core to prevent damage. The energy absorbed by the protection circuitry is dissipated as heat.

When an ESD voltage develops across two or more amplifier device pins, current flows through one or more steering diodes. Depending on the path that the current takes, the absorption device may activate. The absorption device has a trigger, or threshold voltage, that is above the normal operating voltage of the OPAx188-Q1 but below the device breakdown voltage level. When this threshold is exceeded, the absorption device quickly activates and clamps the voltage across the supply rails to a safe level.


When the operational amplifier connects into a circuit (such as [Figure 42](#) shows), the ESD protection components are intended to remain inactive and do not become involved in the operation of the application circuit. However, circumstances may arise where an applied voltage exceeds the operating voltage range of a given pin. If this condition occurs, there is a risk that some internal ESD protection circuits may be biased on and conduct current. Any such current flow occurs through steering-diode paths and rarely involves the absorption device.

[Figure 42](#) shows a specific example where the input voltage, V_{IN} , exceeds the positive supply voltage ($+V_S$) by 500 mV or more. Much of what happens in the circuit depends on the supply characteristics. If $+V_S$ can sink the current, one of the upper-input steering diodes conducts and directs current to $+V_S$. Excessively high current levels can flow with increasingly higher V_{IN} . As a result, the data sheet specifications recommend that applications limit the input current to 10 mA.

If the supply is not capable of sinking the current, V_{IN} may begin sourcing current to the operational amplifier, and then take over as the source of positive supply voltage. The danger in this case is that the voltage can rise to levels that exceed the absolute maximum ratings of the operational amplifier.

Another common question involves what happens to the amplifier if an input signal is applied to the input while the power supplies ($+V_S$ or $-V_S$) are at 0 V. Again, this question depends on the supply characteristic while at 0 V, or at a level below the input signal amplitude. If the supplies appear as high impedance, then the operational amplifier supply current may be supplied by the input source through the current-steering diodes. This state is not a normal bias condition; the amplifier will not operate normally. If the supplies are low impedance, then the current through the steering diodes can become quite high. The current level depends on the ability of the input source to deliver current, and any resistance in the input path.

If there is any uncertainty about the ability of the supply to absorb this current, external zener diodes may be added to the supply pins, as shown in [Figure 42](#). The zener voltage must be selected such that the diode does not turn on during normal operation. However, the zener voltage must be low enough so that the zener diode conducts if the supply pin begins to rise above the safe operating supply voltage level.

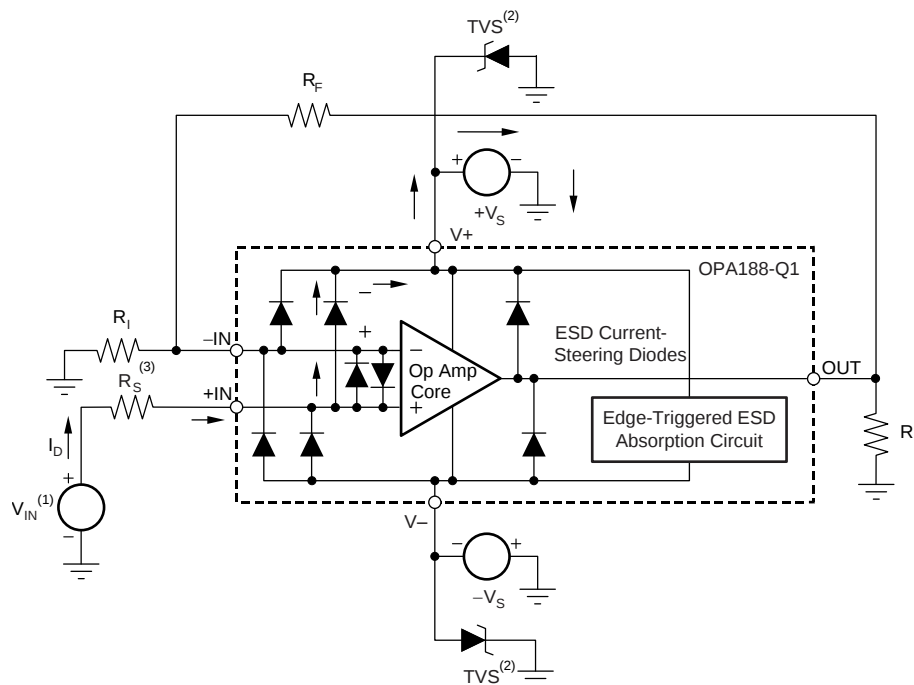

Copyright © 2017, Texas Instruments Incorporated

- (1) $V_{IN} = +V_S + 500 \text{ mV}$.
- (2) TVS: $+V_{S(max)} > V_{TVSBR(min)} > +V_S$.
- (3) Suggested value is approximately 1 k Ω .

Figure 42. Equivalent Internal ESD Circuitry Relative to a Typical Circuit Application

The OPAx188-Q1 series input terminals are protected from excessive differential voltage with back-to-back diodes, as shown in [Figure 42](#). In most circuit applications, the input protection circuitry has no consequence. However, in low-gain and $G = 1$ circuits, fast-ramping input signals can forward-bias these diodes because the output of the amplifier cannot respond rapidly enough to the input ramp. If the input signal is fast enough to create this forward-bias condition, the input signal current must be limited to 10 mA or less. If the input signal current is not inherently limited, an input series resistor can be used to limit the signal input current. This input series resistor degrades the low-noise performance of the OPAx188-Q1 series. [Figure 42](#) shows an example configuration that implements a current-limiting feedback resistor.

8.4 Device Functional Modes

The OPAx188-Q1 series has a single functional mode, and is operational when the power-supply voltage is greater than 4.5 V ($\pm 2.25 \text{ V}$). The maximum power supply voltage for the OPAx188-Q1 family is 36 V ($\pm 18 \text{ V}$).

9 Application and Implementation

注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information


The OPAx188-Q1 operational amplifiers combine precision offset and drift with excellent overall performance, making the series ideal for many precision applications. The precision offset drift of only $0.085 \mu\text{V}/^\circ\text{C}$ provides stability over the entire temperature range. In addition, the device pairs excellent CMRR, PSRR, and A_{OL} dc performance with outstanding low-noise operation. As with all amplifiers, applications with noisy or high-impedance power supplies require decoupling capacitors close to the device pins. In most cases, $0.1\text{-}\mu\text{F}$ capacitors are adequate.

The following application examples highlight only a few of the circuits where the OPAx188-Q1 series can be used.

9.2 Typical Applications

9.2.1 High-Side Voltage-to-Current (V-I) Converter

The circuit shown in [Figure 43](#) is a high-side voltage-to-current (V-I) converter. The converter translates an input voltage of 0 V to 2 V to an output current of 0 mA to 100 mA. [Figure 44](#) shows the measured transfer function for this circuit. The low offset voltage and offset drift of the OPA2188-Q1 facilitate excellent dc accuracy for the circuit.

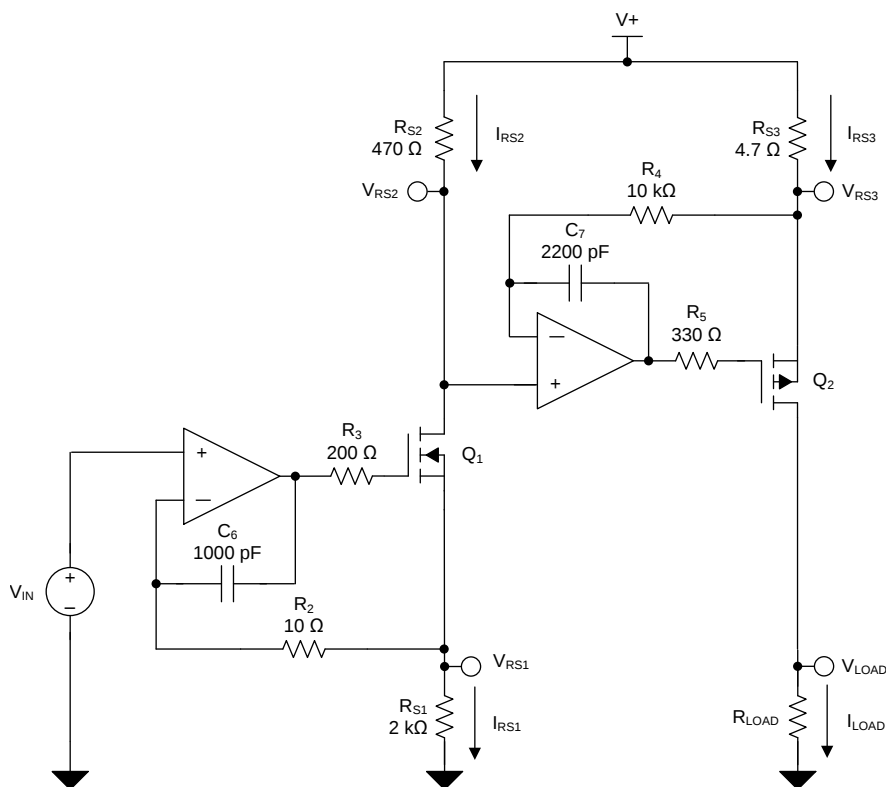

Copyright © 2017, Texas Instruments Incorporated

Figure 43. High-Side Voltage-to-Current (V-I) Converter

Typical Applications (continued)

9.2.1.1 Design Requirements

The design requirements are:

- Supply voltage: 5 V dc
- Input: 0 V to 2 V dc
- Output: 0 mA to 100 mA dc

9.2.1.2 Detailed Design Procedure

The V-I transfer function of the circuit is based on the relationship between the input voltage, V_{IN} , and the three current sensing resistors, R_{S1} , R_{S2} , and R_{S3} . The relationship between V_{IN} and R_{S1} determines the current that flows through the first stage of the design. The current gain from the first stage to the second stage is based on the relationship between R_{S2} and R_{S3} .

For a successful design, pay close attention to the dc characteristics of the operational amplifier chosen for the application. To meet the performance goals, this application benefits from an operational amplifier with low offset voltage, low temperature drift, and rail-to-rail output. The OPAx188-Q1 CMOS operational amplifier is a high-precision, ultra-low offset, ultra-low drift amplifier, optimized for low-voltage, single-supply operation, with an output swing to within 15 mV of the positive rail. The devices in the OPAx188-Q1 family use chopping techniques to provide low initial offset voltage and near-zero drift over time and temperature. Low offset voltage and low drift reduce the offset error in the system, making this device appropriate for precise dc control. The rail-to-rail output stage of the OPAx188-Q1 makes sure that the output swing of the operational amplifier is able to fully control the gate of the MOSFET devices within the supply rails.

A detailed error analysis, design procedure, and additional measured results are given in reference design TIPD102, a step-by-step process to design a [High-Side Voltage-to-Current \(V-I\) Converter](#).



For step-by-step design procedure, circuit schematics, bill of materials, PCB files, simulation results, and test results, refer to [TI Precision Design TIPD102, High-Side Voltage-to-Current \(V-I\) Converter](#) (SLAU502).

9.2.1.3 Application Curves

Figure 44 shows the measured transfer function for the high-side voltage-to-current converter shown in Figure 43.

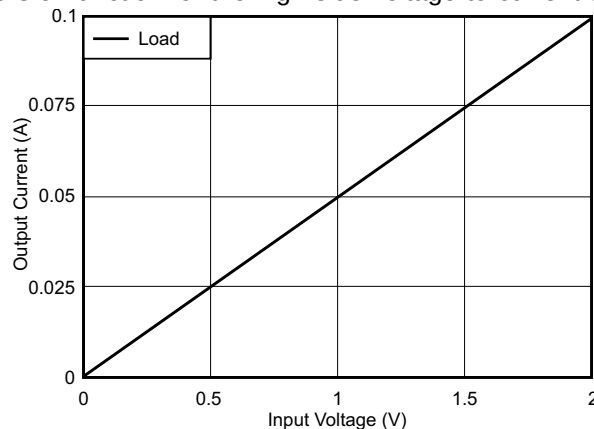



Figure 44. Measured Transfer Function for High-Side V-I Converter

9.2.2 Discrete INA + Attenuation for ADC With 3.3-V Supply

注

The TINA-TI files shown in the following sections require that either the TINA software (from DesignSoft™) or TINA-TI software be installed. Download the free TINA-TI software from the [TINA-TI folder](#).

Figure 45 shows an example of how the OPA188-Q1 series is used as a high-voltage, high-impedance front-end for a precision, discrete instrumentation amplifier with attenuation. The INA159 provides the attenuation that allows this circuit to easily interface with 3.3-V or 5-V analog-to-digital converters (ADCs). Click the following link to download the TINA-TI file: [Discrete INA](#).

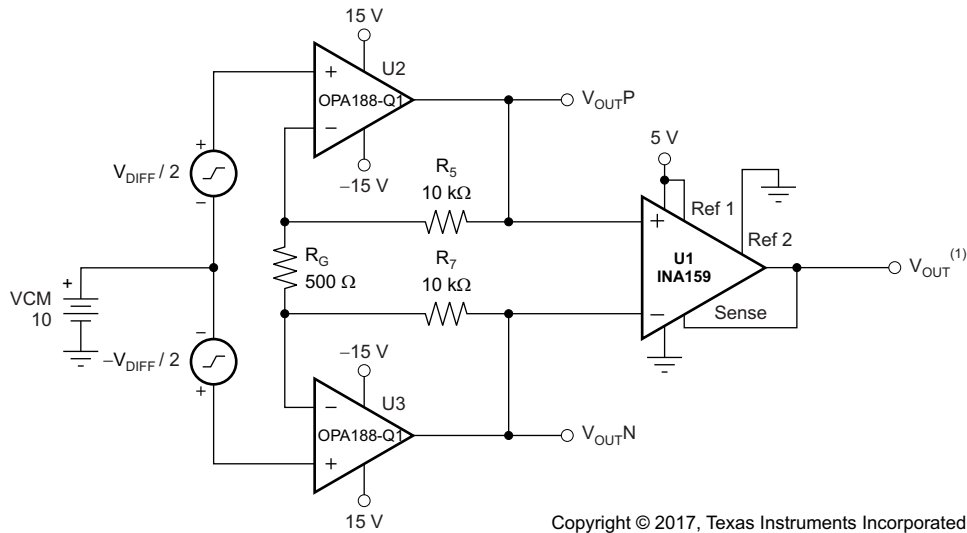


Copyright © 2017, Texas Instruments Incorporated

$$(1) \quad V_{OUT} = V_{DIFF} \times (41 / 5) + (Ref\ 1) / 2.$$

Figure 45. Discrete INA + Attenuation for ADC With 3.3-V Supply

9.2.3 Bridge Amplifier

Figure 46 shows the basic configuration for a bridge amplifier. Click the following link to download the TINA-TI file: [Bridge Amplifier Circuit](#).

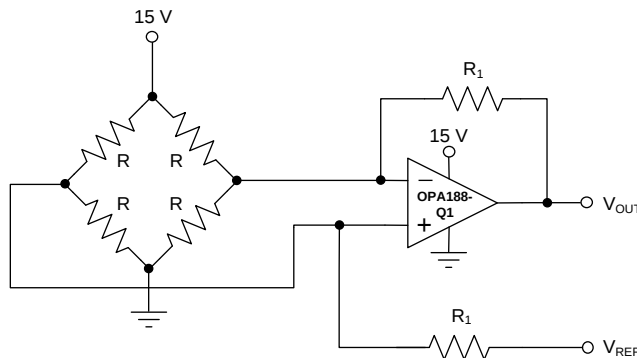


Copyright © 2017, Texas Instruments Incorporated

Figure 46. Bridge Amplifier

9.2.4 Low-Side Current Monitor



 47 shows the OPAx188-Q1 configured in a low-side current-sensing application. The load current (I_{LOAD}) creates a voltage drop across the shunt resistor (R_{SHUNT}). This voltage is amplified by the OPAx188-Q1, with a gain of 201. The load current is set from 0 A to 500 mA, which corresponds to an output voltage range from 0 V to 10 V. The output range can be adjusted by changing the shunt resistor or gain of the configuration. Click the following link to download the TINA-TI file: [Current-Sensing Circuit](#).

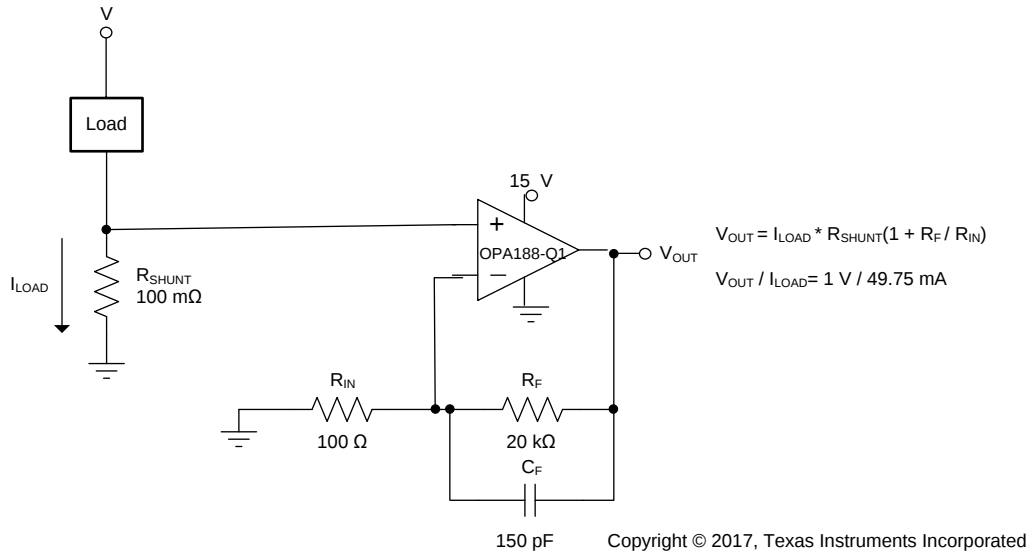

 47. Low-Side Current Monitor

9.2.5 Programmable Power Supply



 48 shows the OPA188-Q1 configured as a precision programmable power supply using the 16-bit, voltage output DAC8581 and the OPA548 high-current amplifier. This application amplifies the digital-to-analog converter (DAC) voltage by a value of five, and handles a large variety of capacitive and current loads. The OPA188-Q1 in the front-end provides precision and low drift across a wide range of inputs and conditions. Click the following link to download the TINA-TI file: [Programmable Power-Supply Circuit](#).

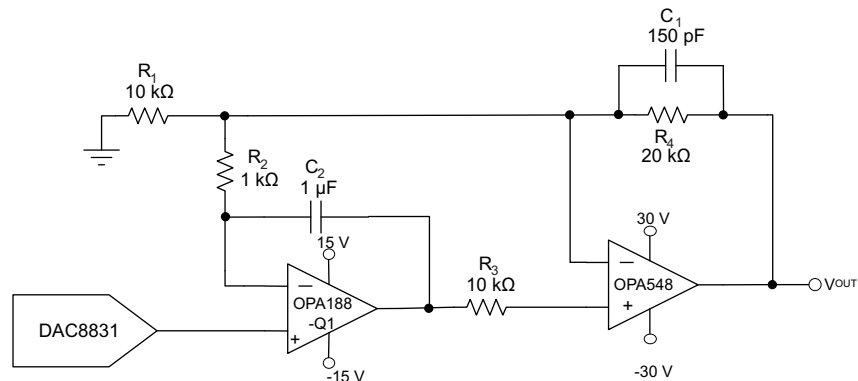

 48. Programmable Power Supply

9.2.6 RTD Amplifier With Linearization

See [Analog Linearization Of Resistance Temperature Detectors](#) for an in-depth analysis of [Figure 49](#). Click the following link to download the TINA-TI file: [RTD Amplifier with Linearization](#).

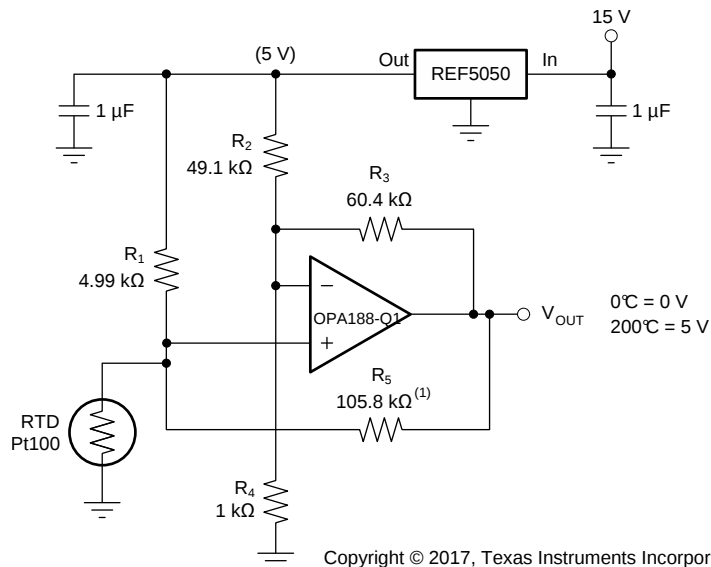

(1) R_5 provides positive-varying excitation to linearize output.

Figure 49. RTD Amplifier With Linearization

10 Power Supply Recommendations

The OPAx188-Q1 series is specified for operation from 4 V to 36 V (± 2 V to ± 18 V); many specifications apply from -40°C to $+125^\circ\text{C}$. [Typical Characteristics](#) presents parameters that can exhibit significant variance with regard to operating voltage or temperature.

注意

Supply voltages larger than 40 V can permanently damage the device (see the [Absolute Maximum Ratings](#)).

Place 0.1- μF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see [Layout](#).



11 Layout

11.1 Layout Guidelines

For best operational performance of the device, use good printed circuit board (PCB) layout practices, including:

- Low-ESR, 0.1- μ F ceramic bypass capacitors must be connected between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable to single-supply applications.
- To reduce parasitic coupling, run the input traces as far away from the supply lines as possible.
- A ground plane helps distribute heat and reduces EMI noise pickup.
- Place the external components as close to the device as possible. This configuration prevents parasitic errors (such as the Seebeck effect) from occurring.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.

11.2 Layout Example

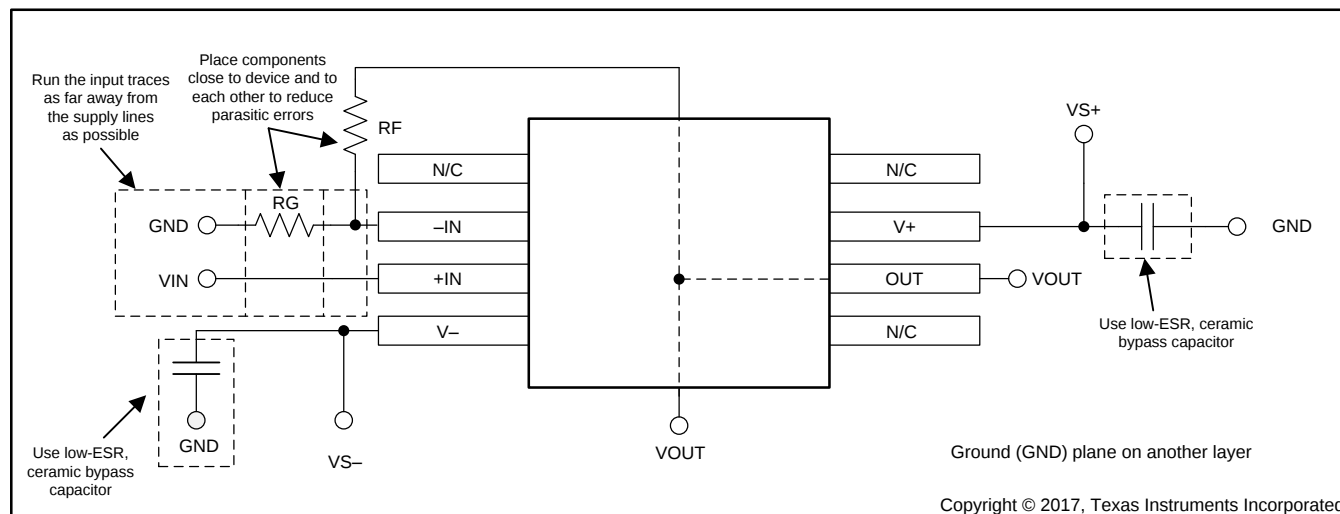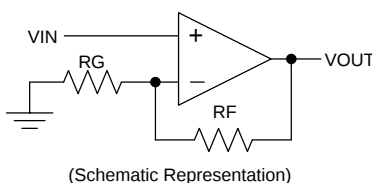

✎ 50. Layout Example

12 デバイスおよびドキュメントのサポート

12.1 デバイス・サポート

12.1.1 開発サポート

12.1.1.1 TINA-TI™(無償のダウンロード・ソフトウェア)

TINA™ は、SPICEエンジンをベースにした単純かつ強力な、使いやすい回路シミュレーション・プログラムです。また、TINA-TIは、TINA-TIソフトウェアのフル機能を持つ無償バージョンで、パッシブ・モデルとアクティブ・モデルに加えて、マクロ・モデルのライブラリがプリロードされています。TINA-TIには、SPICEの標準的なDC解析、過渡解析、周波数ドメイン解析などの全機能に加え、追加の設計機能が搭載されています。

TINA-TIは無償でダウンロードでき、ユーザーが結果をさまざまな方法でフォーマットできる、広範な後処理機能を備えています。仮想計測器により、入力波形を選択し、回路ノード、電圧、および波形をプローブして、動的なクイック・スタート・ツールを作成できます。

12.2 ドキュメントのサポート

12.2.1 関連資料

関連資料については、以下を参照してください:

- 『オペアンプのEMI除去率』(SBOA128)
- 『フィードバック・プロットによるオペアンプAC性能の定義』(SBOA015)
- 『抵抗温度検出器のアナログ線形化』(SLYT442)
- 『ハイサイドの電圧/電流(V-I)コンバータ』(SLAU502)

12.3 関連リンク

表 4 に、クイック・アクセス・リンクの一覧を示します。カテゴリには、技術資料、サポートおよびコミュニティ・リソース、ツールとソフトウェア、およびサンプル注文またはご購入へのクイック・アクセスが含まれます。

表 4. 関連リンク

製品	プロダクト・フォルダ	ご注文はこちら	技術資料	ツールとソフトウェア	サポートとコミュニティ
OPA188-Q1	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック
OPA2188-Q1	ここをクリック	ここをクリック	ここをクリック	ここをクリック	ここをクリック

12.4 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

12.5 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ オンライン・コミュニティ TIのE2E (*Engineer-to-Engineer*) コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることが出来ます。

設計サポート TIの設計サポート 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

12.6 商標

Texas Instruments, E2E are trademarks of Texas Instruments.
 TINA-TI is a trademark of Texas Instruments, Inc and DesignSoft, Inc.
Bluetooth is a registered trademark of Bluetooth SIG, Inc.
 DesignSoft, TINA are trademarks of DesignSoft, Inc.

12.7 静電気放電に関する注意事項



すべての集積回路は、適切なESD保護方法を用いて、取扱いと保存を行うようにして下さい。

静電気放電はわずかな性能の低下から完全なデバイスの故障に至るまで、様々な損傷を与えます。高精度の集積回路は、損傷に対して敏感であり、極めてわずかなパラメータの変化により、デバイスに規定された仕様に適合しなくなる場合があります。

12.8 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA188AQDGKRQ1	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	188
OPA188AQDGKRQ1.B	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	188
OPA2188AQDGKRQ1	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	2188
OPA2188AQDGKRQ1.B	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	2188

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF OPA188-Q1, OPA2188-Q1 :



- Catalog : [OPA188](#), [OPA2188](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product



VSSOP - 1.1 mm max height

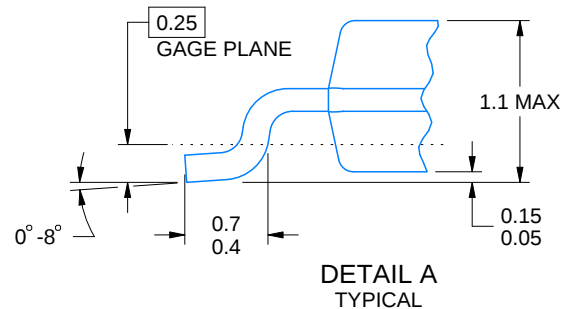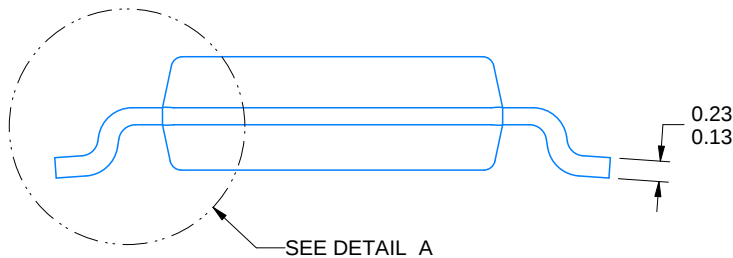[illegible]

PowerPAD is a trademark of Texas Instruments.


- 
- TEXAS
INSTRUMENTS
www.ti.com

EXAMPLE BOARD LAYOUT

DGK0008A

™ VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

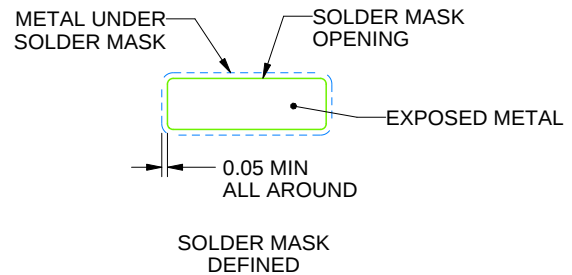

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適したテキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されているテキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかるテキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated