



## TLV170x 2.2V 至 36V 低功耗比较器


### 1 特性

- 电源范围：  
+2.2V 至 +36V 或  $\pm 1.1V$  至  $\pm 18V$
- 低静态电流：  
每个比较器 55 $\mu A$
- 输入共模范围包括两个电源轨
- 低传播延迟：560ns
- 低输入偏移电压：300 $\mu V$
- 集电极开路输出：
  - 最大可高出负电源 36V 且不受电源电压影响
- 工业温度范围：  
-40°C 至 +125°C
- 小型封装：
  - 单通道：SC70-5、SOT-23-5 和 SOT553-5
  - 双通道：VSSOP-8、X2QFN-8
  - 四通道：TSSOP-14

### 2 应用范围

- 过压和欠压检测器
- 窗口比较器
- 过流检测器
- 零交叉检测器
- 针对以下应用的系统监控：
  - 电源
  - 白色家电
  - 工业传感器
  - 汽车
  - 医疗

TLV1702 作为窗口比较器

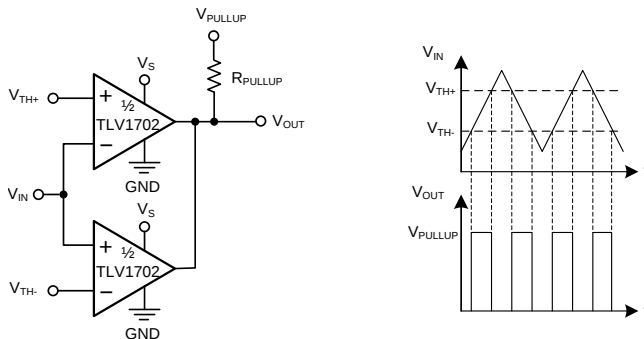

### 3 说明

TLV170x 系列器件提供宽电源范围、轨到轨输入、低静态电流和低传播延迟。所有这些特性均符合行业标准，采用极小封装，借此，这些器件得以成为目前市场上可提供的最佳通用比较器。

集电极开路输出具有能够将输出拉至任意电压轨（最高可高出负电源 +36V）的优势，且不受 TLV170x 电源电压影响。

这些器件均可提供单通道 (TLV1701)、双通道 (TLV1702) 和四通道 (TLV1704) 三种版本。低输入偏移电压、低输入偏置电流、低电源电流和开集配置使得 TLV170x 系列能够灵活处理从简单电压检测到驱动单个继电器的大多数应用。

所有器件的额定工作温度均在扩展的工业温度范围 -40°C 到 +125°C 内。


器件信息<sup>(1)</sup>

| 器件型号    | 封装                       | 封装尺寸 (标称值)      |
|---------|--------------------------|-----------------|
| TLV1701 | SOT553 (5)               | 1.20mm × 1.60mm |
|         | SC-70 (5)                | 1.25mm × 2.00mm |
|         | SOT-23 (5)               | 1.60mm × 2.90mm |
| TLV1702 | X2QFN (8)                | 1.50mm × 1.50mm |
|         | VSSOP (8) <sup>(2)</sup> | 3.00mm × 3.00mm |
| TLV1704 | TSSOP (14)               | 4.40mm × 5.00mm |

(1) 要了解所有可用封装，请见数据表末尾的封装选项附录。

(2) VSSOP 封装与 MSOP 封装相同。

稳定传播延迟与温度

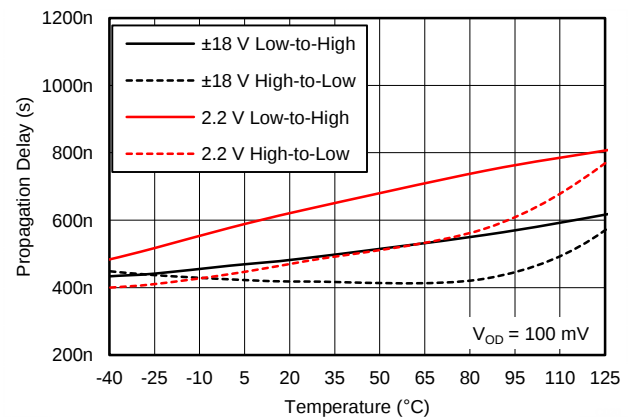

## 目录

|          |                                                |           |           |                                              |           |
|----------|------------------------------------------------|-----------|-----------|----------------------------------------------|-----------|
| <b>1</b> | <b>特性</b> .....                                | <b>1</b>  | 8.3       | Feature Description .....                    | 12        |
| <b>2</b> | <b>应用范围</b> .....                              | <b>1</b>  | 8.4       | Device Functional Modes .....                | 12        |
| <b>3</b> | <b>说明</b> .....                                | <b>1</b>  | <b>9</b>  | <b>Applications and Implementation</b> ..... | <b>13</b> |
| <b>4</b> | <b>修订历史记录</b> .....                            | <b>2</b>  | 9.1       | Application Information .....                | 13        |
| <b>5</b> | <b>Device Comparison</b> .....                 | <b>4</b>  | 9.2       | Typical Application .....                    | 13        |
| <b>6</b> | <b>Pin Configuration and Functions</b> .....   | <b>5</b>  | <b>10</b> | <b>Power Supply Recommendations</b> .....    | <b>14</b> |
| <b>7</b> | <b>Specifications</b> .....                    | <b>6</b>  | <b>11</b> | <b>Layout</b> .....                          | <b>15</b> |
| 7.1      | Absolute Maximum Ratings .....                 | 6         | 11.1      | Layout Guidelines .....                      | 15        |
| 7.2      | ESD Ratings .....                              | 6         | 11.2      | Layout Example .....                         | 15        |
| 7.3      | Recommended Operating Conditions .....         | 6         | <b>12</b> | <b>器件和文档支持</b> .....                         | <b>16</b> |
| 7.4      | Thermal Information: TLV1701 .....             | 6         | 12.1      | 文档支持 .....                                   | 16        |
| 7.5      | Thermal Information: TLV1702 and TLV1704 ..... | 7         | 12.2      | 相关链接 .....                                   | 16        |
| 7.6      | Electrical Characteristics .....               | 7         | 12.3      | 社区资源 .....                                   | 16        |
| 7.7      | Switching Characteristics .....                | 7         | 12.4      | 商标 .....                                     | 16        |
| 7.8      | Typical Characteristics .....                  | 8         | 12.5      | 静电放电警告 .....                                 | 16        |
| <b>8</b> | <b>Detailed Description</b> .....              | <b>11</b> | 12.6      | 术语表 .....                                    | 16        |
| 8.1      | Overview .....                                 | 11        | <b>13</b> | <b>机械、封装和可订购信息</b> .....                     | <b>16</b> |
| 8.2      | Functional Block Diagram .....                 | 11        |           |                                              |           |

## 4 修订历史记录

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| <b>Changes from Revision C (December 2014) to Revision D</b> | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| • 已将文档状态从“混合状态”更改为“量产数据” .....                               | <b>1</b>    |
| • 已将 TLV1702 RUG 封装的状态更改为量产数据 .....                          | <b>1</b>    |

| <b>Changes from Revision B (October 2014) to Revision C</b>                                                                  | <b>Page</b> |
|------------------------------------------------------------------------------------------------------------------------------|-------------|
| • TLV1701 DCK 封装已从预览更改为量产数据 .....                                                                                            | <b>1</b>    |
| • Changed Handling Ratings table to ESD Ratings table, and moved storage temperature to Absolute Maximum Ratings table ..... | <b>6</b>    |

| <b>Changes from Revision A (September 2014) to Revision B</b>                                                                | <b>Page</b> |
|------------------------------------------------------------------------------------------------------------------------------|-------------|
| • 更改了器件信息表中的脚注 2: 已将 TLV1701 添加到可用器件列表中 .....                                                                                | <b>1</b>    |
| • Added TLV1701 to list of production data packages in footnote for the <i>Pin Configuration and Functions</i> section ..... | <b>5</b>    |
| • Added TLV1701 row to $V_{(ESD)}$ parameter in Handling Ratings table .....                                                 | <b>6</b>    |

**Changes from Original (December 2013) to Revision A**
**Page**


|                                                                                                                                              |    |
|----------------------------------------------------------------------------------------------------------------------------------------------|----|
| • 已将文档格式更改为符合最新的数据表标准；添加了新章节并移动了现有章节.....                                                                                                    | 1  |
| • TLV1704 PW (TSSOP-14) 封装已从预览更改为量产数据.....                                                                                                   | 1  |
| • 在集电极开路输出特性中添加了分项 .....                                                                                                                     | 1  |
| • 在 <a href="#">说明</a> 部分添加了第二段 .....                                                                                                        | 1  |
| • 已从 <a href="#">说明</a> 部分中删除封装信息；冗余信息 .....                                                                                                 | 1  |
| • Changed Related Products table to Device Comparison table, moved from page 1, and added TLV370x family.....                                | 4  |
| • Added TLV1701, TLV1702 RUG, and TLV704 package drawings .....                                                                              | 5  |
| • Added thermal information for TLV1702 RUG, TLV1704 PW, and all TLV1701 packages .....                                                      | 6  |
| • Moved switching characteristics parameters from Electrical Characteristics table to new <a href="#">Switching Characteristics</a> table .. | 7  |
| • Changed all typical values in <a href="#">Switching Characteristics</a> table.....                                                         | 7  |
| • Changed title for <a href="#">Figure 1</a> .....                                                                                           | 8  |
| • Changed <a href="#">Figure 8</a> .....                                                                                                     | 8  |
| • Changed <a href="#">Figure 9</a> .....                                                                                                     | 8  |
| • Changed <a href="#">Figure 10</a> .....                                                                                                    | 8  |
| • Changed <a href="#">Figure 11</a> .....                                                                                                    | 8  |
| • Changed <a href="#">Figure 12</a> .....                                                                                                    | 8  |
| • Changed <a href="#">Figure 13</a> .....                                                                                                    | 9  |
| • Changed <a href="#">Figure 14</a> .....                                                                                                    | 9  |
| • Changed <a href="#">Application Information</a> and moved section .....                                                                    | 13 |
| • Deleted <i>Application Examples</i> section .....                                                                                          | 13 |

## 5 Device Comparison


| DEVICE                  | FEATURES                                               |
|-------------------------|--------------------------------------------------------|
| <a href="#">TLV3201</a> | 40-ns, 40- $\mu$ A, push-pull comparator               |
| <a href="#">TLV3202</a> |                                                        |
| <a href="#">TLV3501</a> | 4.5-ns, rail-to-rail, push-pull, high-speed comparator |
| <a href="#">TLV3502</a> |                                                        |
| <a href="#">TLV3401</a> | Nanopower open-drain output comparator                 |
| <a href="#">TLV3402</a> |                                                        |
| <a href="#">TLV3404</a> |                                                        |
| <a href="#">TLV3701</a> | Nanopower push-pull output comparator                  |
| <a href="#">TLV3702</a> |                                                        |
| <a href="#">TLV3704</a> |                                                        |
| <a href="#">REF3325</a> | 3.9- $\mu$ A, SC70-3 voltage reference                 |
| <a href="#">REF3330</a> |                                                        |
| <a href="#">REF3333</a> |                                                        |

## 6 Pin Configuration and Functions


**TLV1701**  
DBV (SOT-23-5), DCK (SC70-5), DRL (SOT553-5) Packages  
Top View




**TLV1702**  
DGK (VSSOP-8) Package  
Top View

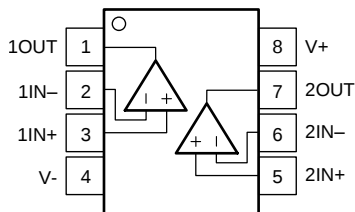

**TLV1702**  
RUG (X2QFN-8) Package  
Top View



**TLV1704**  
PW (TSSOP-14) Package  
Top View

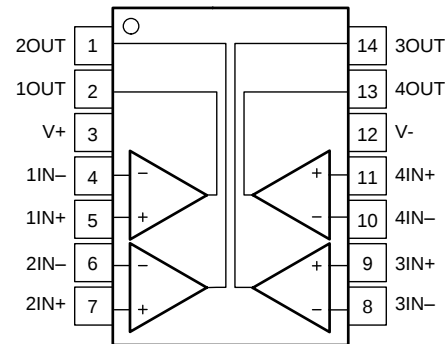

### Pin Functions

| NAME | PIN NO.                  |                     |               | I/O | DESCRIPTION                     |
|------|--------------------------|---------------------|---------------|-----|---------------------------------|
|      | TLV1701<br>DBV, DCK, DRL | TLV1702<br>DGK, RUG | TLV1704<br>PW |     |                                 |
| IN+  | 1                        | —                   | —             | I   | Noninverting input              |
| 1IN+ | —                        | 3                   | 5             | I   | Noninverting input, channel 1   |
| 2IN+ | —                        | 5                   | 7             | I   | Noninverting input, channel 2   |
| 3IN+ | —                        | —                   | 9             | I   | Noninverting input, channel 3   |
| 4IN+ | —                        | —                   | 11            | I   | Noninverting input, channel 4   |
| IN-  | 3                        | —                   | —             | I   | Inverting input                 |
| 1IN- | —                        | 2                   | 4             | I   | Inverting input, channel 1      |
| 2IN- | —                        | 6                   | 6             | I   | Inverting input, channel 2      |
| 3IN- | —                        | —                   | 8             | I   | Inverting input, channel 3      |
| 4IN- | —                        | —                   | 10            | I   | Inverting input, channel 4      |
| OUT  | 4                        | —                   | —             | O   | Output                          |
| 1OUT | —                        | 1                   | 2             | O   | Output, channel 1               |
| 2OUT | —                        | 7                   | 1             | O   | Output, channel 2               |
| 3OUT | —                        | —                   | 14            | O   | Output, channel 3               |
| 4OUT | —                        | —                   | 13            | O   | Output, channel 4               |
| V+   | 5                        | 8                   | 3             | —   | Positive (highest) power supply |
| V-   | 2                        | 4                   | 12            | —   | Negative (lowest) power supply  |

## 7 Specifications

### 7.1 Absolute Maximum Ratings<sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted)

|                                     |                        | MIN              | MAX              | UNIT |
|-------------------------------------|------------------------|------------------|------------------|------|
| Supply voltage                      |                        |                  | +40 (±20)        | V    |
| Signal input pins                   | Voltage <sup>(2)</sup> | $(V_{S-}) - 0.5$ | $(V_{S+}) + 0.5$ | V    |
|                                     | Current <sup>(2)</sup> |                  | ±10              | mA   |
| Output short-circuit <sup>(3)</sup> |                        | Continuous       |                  | mA   |
| Operating temperature range         |                        | –55              | +150             | °C   |
| Junction temperature, $T_J$         |                        |                  | 150              | °C   |
| Storage temperature, $T_{stg}$      |                        | –65              | +150             | °C   |

- (1) Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input pins are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails must be current limited to 10 mA or less.
- (3) Short-circuit to ground; one comparator per package.

### 7.2 ESD Ratings

|                     |                         |                                                                                | VALUE | UNIT |
|---------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| TLV1701 and TLV1702 |                         |                                                                                |       |      |
| V <sub>(ESD)</sub>  | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|                     |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |      |
| TLV1704             |                         |                                                                                |       |      |
| V <sub>(ESD)</sub>  | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1000 | V    |
|                     |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                            | MIN        | NOM | MAX      | UNIT |
|--------------------------------------------|------------|-----|----------|------|
| Supply voltage $V_S = (V_{S+}) - (V_{S-})$ | 2.2 (±1.1) |     | 36 (±18) | V    |
| Specified temperature                      | –40        |     | 125      | °C   |

### 7.4 Thermal Information: TLV1701

| THERMAL METRIC <sup>(1)</sup> |                                              | TLV1701      |            |             | UNIT |
|-------------------------------|----------------------------------------------|--------------|------------|-------------|------|
|                               |                                              | DRL (SOT553) | DCK (SC70) | DBV (SOT23) |      |
|                               |                                              | 5 PINS       | 5 PINS     | 5 PINS      |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 271.5        | 283.6      | 233.1       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 115.6        | 94.1       | 156.4       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 89.7         | 61.3       | 60.6        | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 17.6         | 1.9        | 35.7        | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 89.2         | 60.5       | 59.7        | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | N/A          | N/A        | N/A         | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Thermal Information: TLV1702 and TLV1704

| THERMAL METRIC <sup>(1)</sup> |                                              | TLV1702   |             | TLV1704    | UNIT |
|-------------------------------|----------------------------------------------|-----------|-------------|------------|------|
|                               |                                              | RUG (QFN) | DGK (VSSOP) | PW (TSSOP) |      |
|                               |                                              | 8 PINS    | 8 PINS      | 14 PINS    |      |
| $\theta_{JA}$                 | Junction-to-ambient thermal resistance       | 205.6     | 199         | 128.1      | °C/W |
| $\theta_{JCTop}$              | Junction-to-case (top) thermal resistance    | 77.1      | 89.5        | 56.5       | °C/W |
| $\theta_{JB}$                 | Junction-to-board thermal resistance         | 107.0     | 120.4       | 69.9       | °C/W |
| $\psi_{JT}$                   | Junction-to-top characterization parameter   | 2.0       | 22.0        | 9.1        | °C/W |
| $\psi_{JB}$                   | Junction-to-board characterization parameter | 107.0     | 118.7       | 69.3       | °C/W |
| $\theta_{JCbott}$             | Junction-to-case (bottom) thermal resistance | N/A       | N/A         | N/A        | °C/W |

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.6 Electrical Characteristics

at  $T_A = +25^\circ\text{C}$ ,  $V_S = +2.2\text{ V}$  to  $+36\text{ V}$ ,  $C_L = 15\text{ pF}$ ,  $R_{PULLUP} = 5.1\text{ k}\Omega$ ,  $V_{CM} = V_S / 2$ , and  $V_S = V_{PULLUP}$  (unless otherwise noted)

| PARAMETER            |                                 | TEST CONDITIONS                                                        | MIN | TYP                                         | MAX  | UNIT  |
|----------------------|---------------------------------|------------------------------------------------------------------------|-----|---------------------------------------------|------|-------|
| OFFSET VOLTAGE       |                                 |                                                                        |     |                                             |      |       |
| V <sub>OS</sub>      | Input offset voltage            | T <sub>A</sub> = 25°C, V <sub>S</sub> = 2.2 V                          |     | ±0.5                                        | ±3.5 | mV    |
|                      |                                 | T <sub>A</sub> = 25°C, V <sub>S</sub> = 36 V                           |     | ±0.3                                        | ±2.5 | mV    |
|                      |                                 | T <sub>A</sub> = −40°C to +125°C                                       |     |                                             | ±5.5 | mV    |
| dV <sub>OS</sub> /dT | Input offset voltage drift      | T <sub>A</sub> = −40°C to +125°C                                       |     | ±4                                          | ±20  | μV/°C |
| PSRR                 | Power-supply rejection ratio    |                                                                        |     | 15                                          | 100  | μV/V  |
|                      |                                 | T <sub>A</sub> = −40°C to +125°C                                       |     | 20                                          |      | μV/V  |
| INPUT VOLTAGE RANGE  |                                 |                                                                        |     |                                             |      |       |
| V <sub>CM</sub>      | Common-mode voltage range       | T <sub>A</sub> = −40°C to +125°C                                       |     | (V−)                                        | (V+) | V     |
| INPUT BIAS CURRENT   |                                 |                                                                        |     |                                             |      |       |
| I <sub>B</sub>       | Input bias current              |                                                                        |     | 5                                           | 15   | nA    |
|                      |                                 | T <sub>A</sub> = −40°C to +125°C                                       |     |                                             | 20   | nA    |
| I <sub>OS</sub>      | Input offset current            |                                                                        |     | 0.5                                         |      | nA    |
| C <sub>LOAD</sub>    | Capacitive load drive           |                                                                        |     | See <a href="#">Typical Characteristics</a> |      |       |
| OUTPUT               |                                 |                                                                        |     |                                             |      |       |
| V <sub>O</sub>       | Voltage output swing from rail  | I <sub>O</sub> ≤ 4 mA, input overdrive = 100 mV, V <sub>S</sub> = 36 V |     |                                             | 900  | mV    |
|                      |                                 | I <sub>O</sub> = 0 mA, input overdrive = 100 mV, V <sub>S</sub> = 36 V |     |                                             | 600  | mV    |
| I <sub>SC</sub>      | Short circuit sink current      |                                                                        |     | 20                                          |      | mA    |
|                      | Output leakage current          | V <sub>IN+</sub> > V <sub>IN−</sub>                                    |     | 70                                          |      | nA    |
| POWER SUPPLY         |                                 |                                                                        |     |                                             |      |       |
| V <sub>S</sub>       | Specified voltage range         |                                                                        |     | 2.2                                         | 36   | V     |
| I <sub>Q</sub>       | Quiescent current (per channel) | I <sub>O</sub> = 0 A                                                   |     | 55                                          | 75   | μA    |
|                      |                                 | I <sub>O</sub> = 0 A, T <sub>A</sub> = −40°C to +125°C                 |     |                                             | 100  | μA    |

## 7.7 Switching Characteristics

at  $T_A = +25^\circ\text{C}$ ,  $V_S = +2.2\text{ V}$  to  $+36\text{ V}$ ,  $C_L = 15\text{ pF}$ ,  $R_{PULLUP} = 5.1\text{ k}\Omega$ ,  $V_{CM} = V_S / 2$ , and  $V_S = V_{PULLUP}$  (unless otherwise noted)

| PARAMETER | TEST CONDITIONS                     | MIN                      | TYP | MAX | UNIT |
|-----------|-------------------------------------|--------------------------|-----|-----|------|
| $t_{pHL}$ | Propagation delay time, high-to-low | Input overdrive = 100 mV |     | 460 | ns   |
| $t_{pLH}$ | Propagation delay time, low-to-high | Input overdrive = 100 mV |     | 560 | ns   |
| $t_R$     | Rise time                           | Input overdrive = 100 mV |     | 365 | ns   |
| $t_F$     | Fall time                           | Input overdrive = 100 mV |     | 240 | ns   |

## 7.8 Typical Characteristics

at  $T_A = +25^\circ\text{C}$ ,  $V_S = +5\text{ V}$ ,  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$ , and input overdrive = 100 mV (unless otherwise noted)

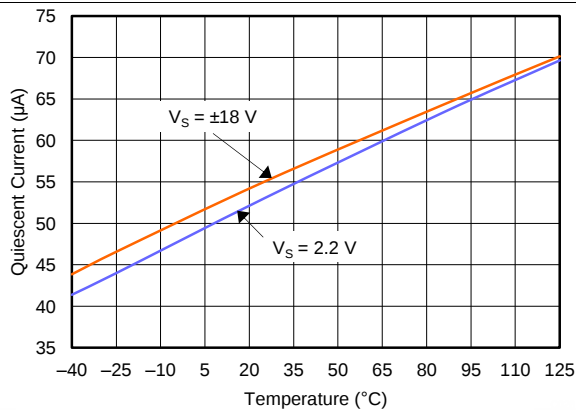


Figure 1. Quiescent Current vs Temperature

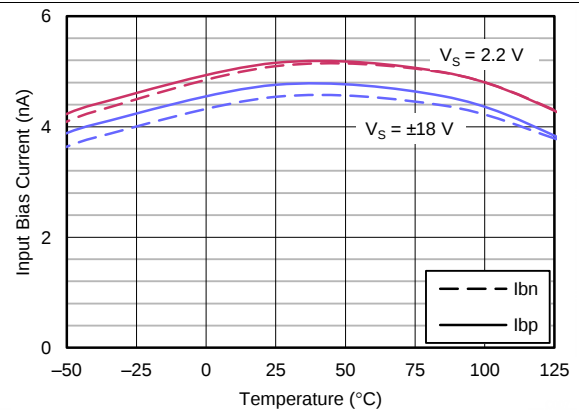


Figure 2. Input Bias Current vs Temperature

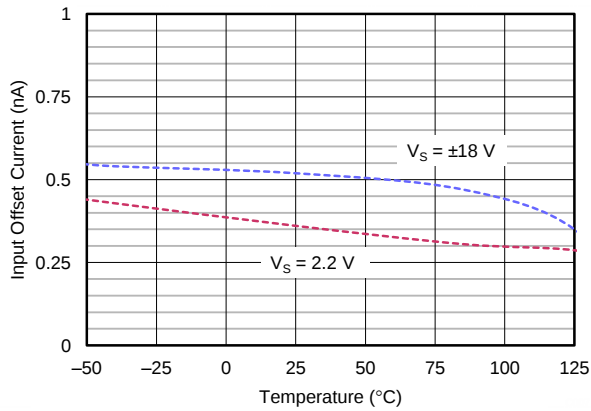


Figure 3. Input Offset Current vs Temperature

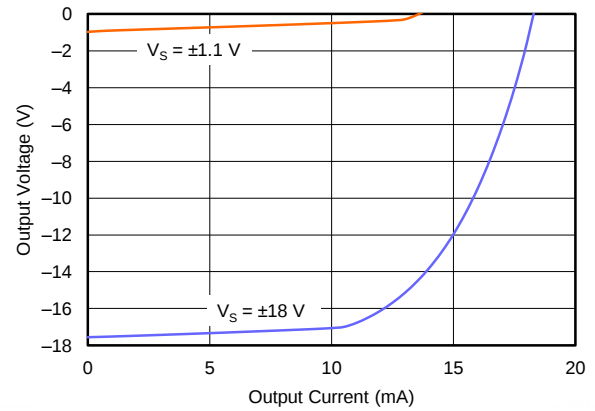


Figure 4. Output Voltage vs Output Current

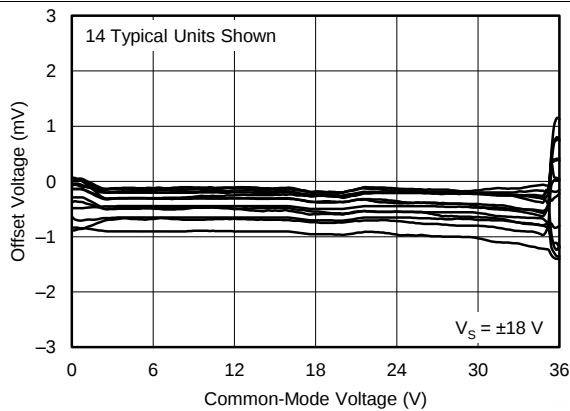


Figure 5. Offset Voltage vs Common-Mode Voltage


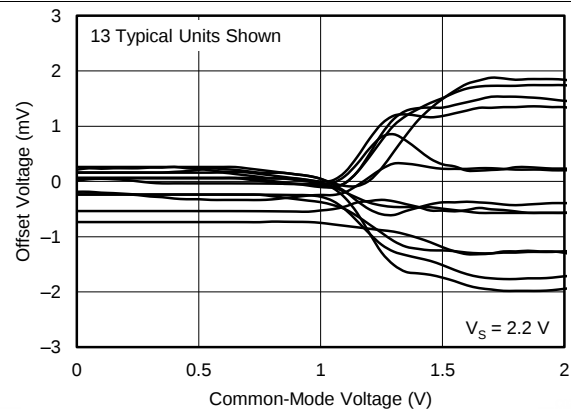



Figure 6. Offset Voltage vs Common-Mode Voltage

## Typical Characteristics (continued)


at  $T_A = +25^\circ\text{C}$ ,  $V_S = +5\text{ V}$ ,  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$ , and input overdrive = 100 mV (unless otherwise noted)

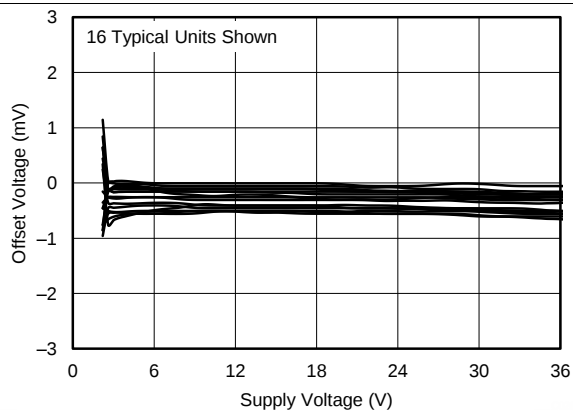


**Figure 7. Offset Voltage vs Supply Voltage**

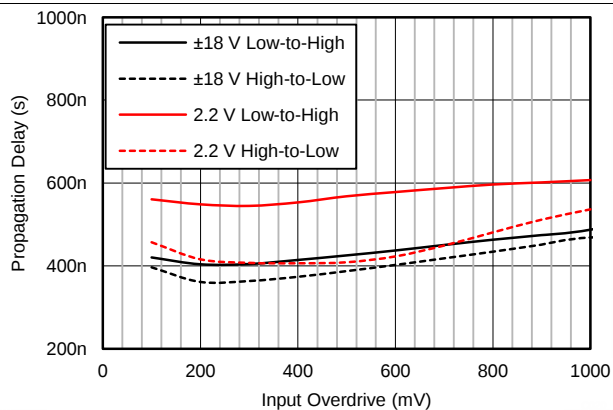


**Figure 8. Propagation Delay vs Input Overdrive**

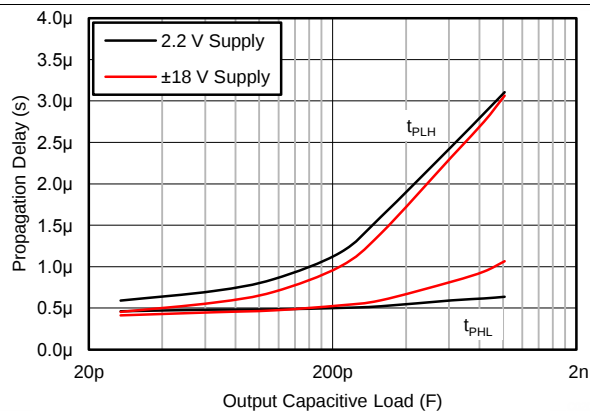


**Figure 9. Propagation Delay vs Capacitive Load**

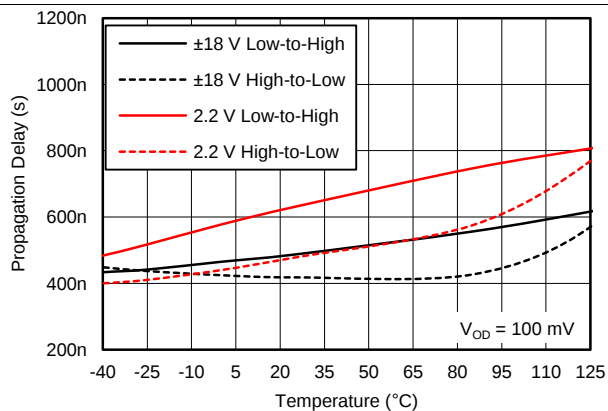

**Figure 10. Propagation Delay vs Temperature**

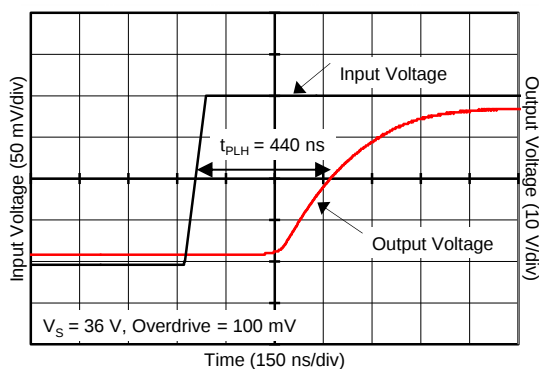

**Figure 11. Propagation Delay ( $T_{\text{PLH}}$ )**

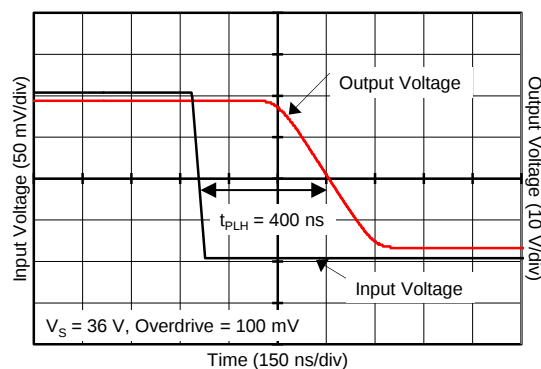

**Figure 12. Propagation Delay ( $T_{\text{PHL}}$ )**

## Typical Characteristics (continued)

at  $T_A = +25^\circ\text{C}$ ,  $V_S = +5\text{ V}$ ,  $R_{\text{PULLUP}} = 5.1\text{ k}\Omega$ , and input overdrive = 100 mV (unless otherwise noted)

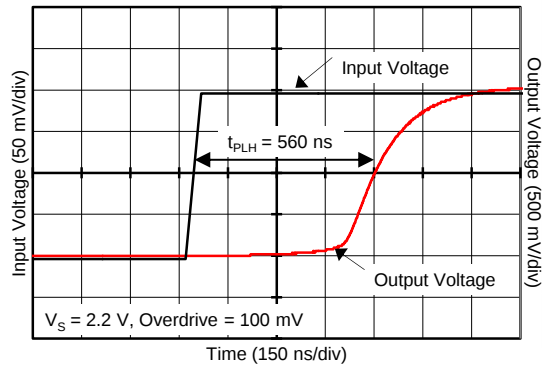


Figure 13. Propagation Delay ( $T_{\text{pLH}}$ )

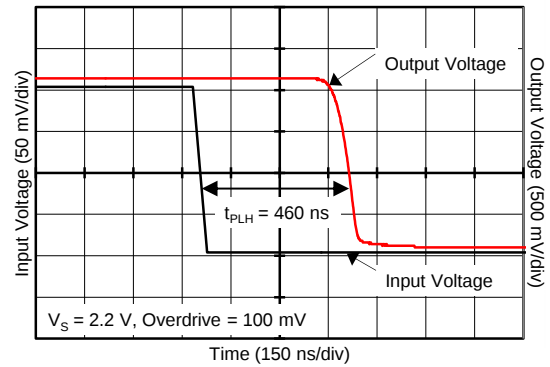


Figure 14. Propagation Delay ( $T_{\text{pHL}}$ )

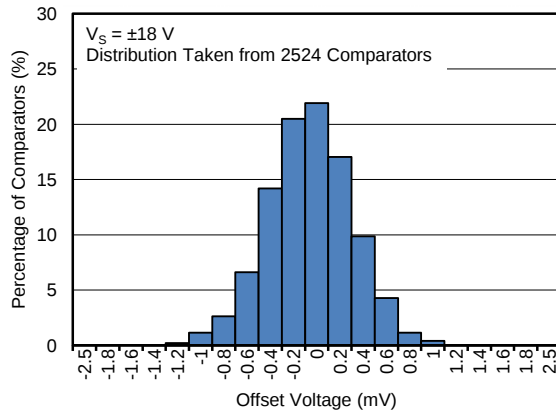


Figure 15. Offset Voltage Production Distribution

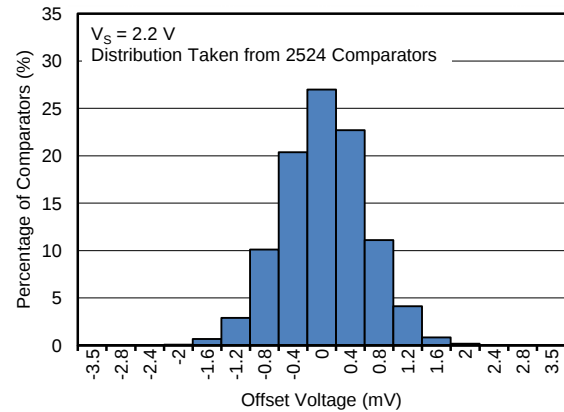


Figure 16. Offset Voltage Production Distribution

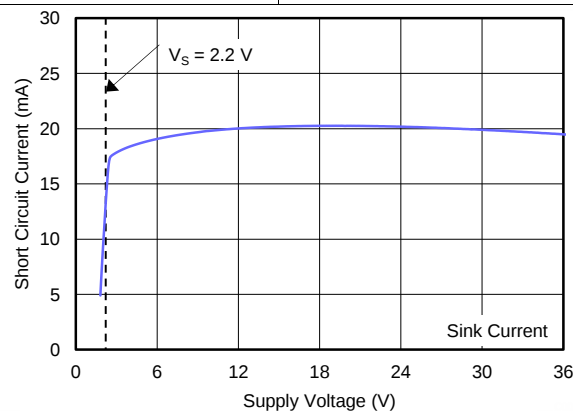



Figure 17. Short-Circuit Current vs Supply Voltage

## 8 Detailed Description

### 8.1 Overview

The TLV170x comparators features rail-to-rail input and output on supply voltages as high as 36 V. The rail-to-rail input stage enables detection of signals close to the supply and ground. The open collector configuration allows the device to be used in wired-OR configurations, such as a window comparator. A low supply current of 55  $\mu\text{A}$  per channel with small, space-saving packages, makes these comparators versatile for use in a wide range of applications, from portable to industrial.


### 8.2 Functional Block Diagram

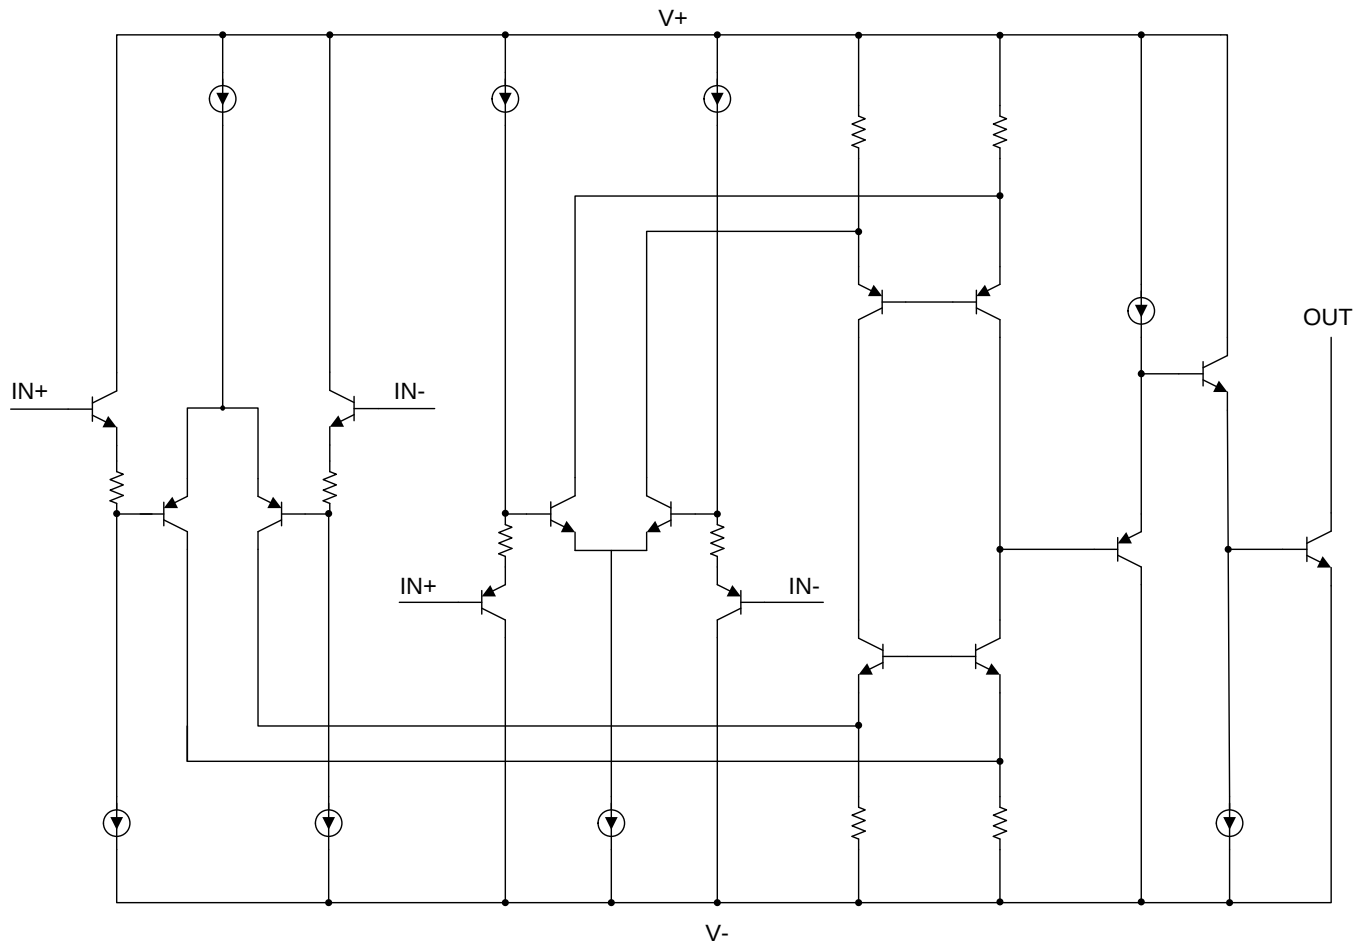

## 8.3 Feature Description

### 8.3.1 Comparator Inputs

The TLV170x are rail-to-rail input comparators, with an input common-mode range that includes the supply rails. The TLV170x is designed to prevent phase inversion when the input pins exceed the supply voltage. Figure 18 shows the TLV170x response when input voltages exceed the supply, resulting in no phase inversion.

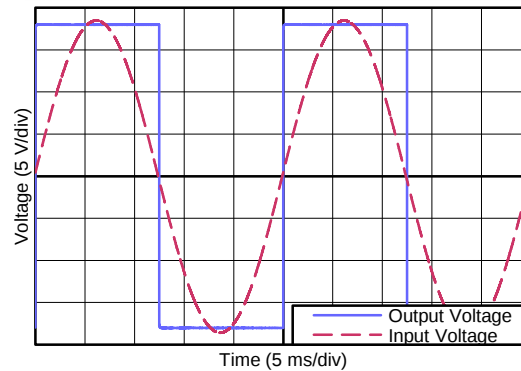


**Figure 18. No Phase Inversion: Comparator Response to Input Voltage (Propagation Delay Included)**

## 8.4 Device Functional Modes

### 8.4.1 Setting Reference Voltage

Using a stable reference is important when setting the transition point for the TLV170x. The REF3333, as shown in Figure 19, provides a 3.3-V reference voltage with low drift and only 3.9  $\mu$ A of quiescent current.

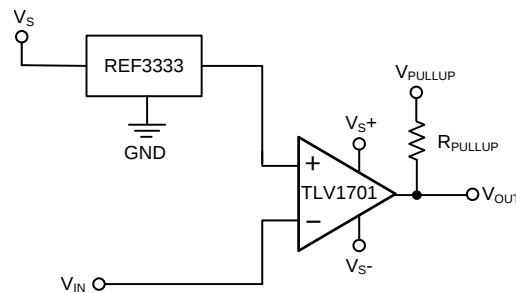

**Figure 19. Reference Voltage for the TLV170x**

## 9 Applications and Implementation

### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TLV170x can be used in a wide variety of applications, such as zero crossing detectors, window comparators, over and undervoltage detectors, and high-side voltage sense circuits.

### 9.2 Typical Application

Comparators are used to differentiate between two different signal levels. For example, a comparator differentiates between an overtemperature and normal-temperature condition. However, noise or signal variation at the comparison threshold causes multiple transitions. This application example sets upper and lower hysteresis thresholds to eliminate the multiple transitions caused by noise.

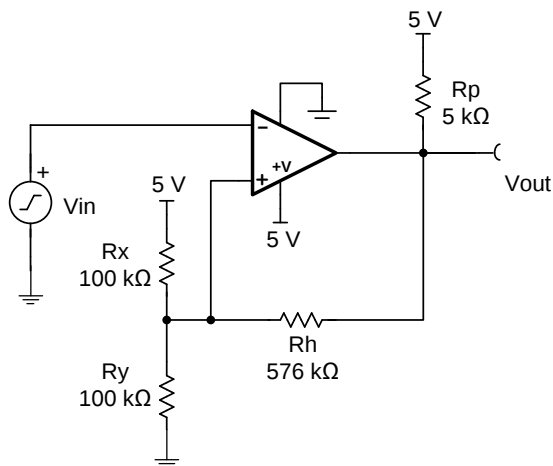


Figure 20. Comparator Schematic with Hysteresis

#### 9.2.1 Design Requirements

The design requirements are as follows:

- Supply voltage: 5 V
- Input: 0 V to 5 V
- Lower threshold (VL) = 2.3 V  $\pm$  0.1 V
- Upper threshold (VH) = 2.7 V  $\pm$  0.1 V
- VH – VL = 2.4 V  $\pm$  0.1 V
- Low power consumption

## Typical Application (continued)

### 9.2.2 Detailed Design Procedure

Make a small change to the comparator circuit to add hysteresis. Hysteresis uses two different threshold voltages to avoid the multiple transitions introduced in the previous circuit. The input signal must exceed the upper threshold (VH) to transition low, or below the lower threshold (VL) to transition high.

**Figure 20** illustrates hysteresis on a comparator. Resistor Rh sets the hysteresis level. An open-collector output stage requires a pullup resistor (Rp). The pullup resistor creates a voltage divider at the comparator output that introduces an error when the output is at logic high. This error can be minimized if  $R_h > 100R_p$ .


When the output is at a logic high (5 V), Rh is in parallel with Rx (ignoring Rp). This configuration drives more current into Ry, and raises the threshold voltage (VH) to 2.7 V. The input signal must drive above  $V_H = 2.7$  V to cause the output to transition to logic low (0 V).

When the output is at logic low (0 V), Rh is in parallel with Ry. This configuration reduces the current into Ry, and reduces the threshold voltage to 2.3 V. The input signal must drive below  $V_L = 2.3$  V to cause the output to transition to logic high (5 V).

For more details on this design and other alternative devices that can be used in place of the TLV1702, refer to Precision Design [TIPD144](#), *Comparator with Hysteresis Reference Design*.

### 9.2.3 Application Curve

**Figure 21** shows the upper and lower thresholds for hysteresis. The upper threshold is 2.76 V and the lower threshold is 2.34 V, both of which are close to the design target.

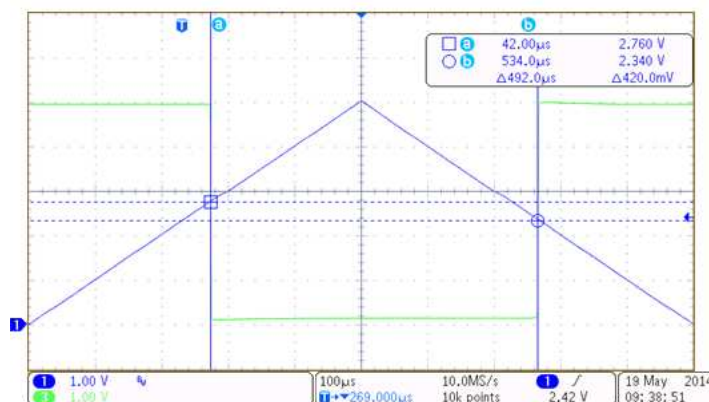

**Figure 21. TLV1701 Upper and Lower Threshold with Hysteresis**

## 10 Power Supply Recommendations

The TLV170x is specified for operation from 2.2 V to 36 V ( $\pm 1.1$  to  $\pm 18$  V); many specifications apply from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . Parameters that can exhibit significant variance with regard to operating voltage or temperature are presented in the [Typical Characteristics](#) section.

### CAUTION

Supply voltages larger than 40 V can permanently damage the device; see the [Absolute Maximum Ratings](#).

Place 0.1-μF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement; see the [Layout Guidelines](#) section.


## 11 Layout

### 11.1 Layout Guidelines


Comparators are very sensitive to input noise. For best results, maintain the following layout guidelines:

- Use a printed circuit board (PCB) with a good, unbroken low-inductance ground plane. Proper grounding (use of ground plane) helps maintain specified performance of the TLV170x.
- To minimize supply noise, place a decoupling capacitor (0.1- $\mu$ F ceramic, surface-mount capacitor) as close as possible to  $V_S$  as shown in Figure 22.
- On the inputs and the output, keep lead lengths as short as possible to avoid unwanted parasitic feedback around the comparator. Keep inputs away from the output.
- Solder the device directly to the PCB rather than using a socket.
- For slow-moving input signals, take care to prevent parasitic feedback. A small capacitor (1000 pF or less) placed between the inputs can help eliminate oscillations in the transition region. This capacitor causes some degradation to propagation delay when the impedance is low. Run the topside ground plane between the output and inputs.
- Run the ground pin ground trace under the device up to the bypass capacitor, shielding the inputs from the outputs.

### 11.2 Layout Example

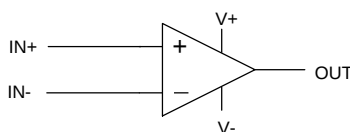

(Schematic Representation)

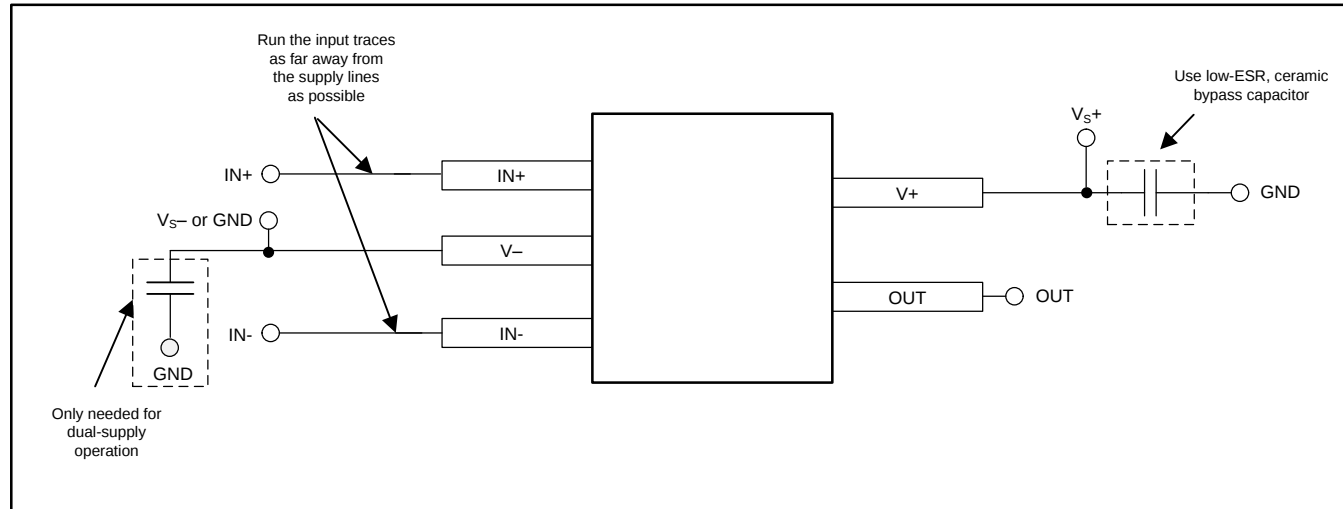

**Figure 22. Comparator Board Layout**

## 12 器件和文档支持

### 12.1 文档支持

#### 12.1.1 相关文档

[TIDU020](#) — 高精度设计，采用滞后参考设计的比较器。

[SBOS392](#) — REF3333 数据手册

### 12.2 相关链接

**表 1** 列出了快速访问链接。范围包括技术文档、支持与社区资源、工具和软件，并且可以快速访问样片或购买链接。

**表 1. 相关链接**

| 器件      | 产品文件夹                 | 样片与购买                 | 技术文档                  | 工具与软件                 | 支持与社区                 |
|---------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| TLV1701 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| TLV1702 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| TLV1704 | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |

### 12.3 社区资源

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ Online Community** *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At [e2e.ti.com](http://e2e.ti.com), you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

### 12.4 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.6 术语表

[SLYZ022](#) — *TI 术语表*。

这份术语表列出并解释术语、首字母缩略词和定义。

## 13 机械、封装和可订购信息

以下页中包括机械、封装和可订购信息。 这些信息是针对指定器件可提供的最新数据。 这些数据会在无通知且不对本文档进行修订的情况下发生改变。 欲获得该数据表的浏览器版本，请查阅左侧的导航栏。

## PACKAGING INFORMATION

| Orderable part number           | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|---------------------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV1701AIDBVR</a>   | Active        | Production           | SOT-23 (DBV)   5  | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | ZAYF                |
| TLV1701AIDBVR.B                 | Active        | Production           | SOT-23 (DBV)   5  | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ZAYF                |
| TLV1701AIDBVRG4.B               | Active        | Production           | SOT-23 (DBV)   5  | 3000   LARGE T&R      | -           | Call TI                              | Call TI                           | -40 to 125   | ZAYF                |
| <a href="#">TLV1701AIDBVT</a>   | Active        | Production           | SOT-23 (DBV)   5  | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-1-260C-UNLIM                | -40 to 125   | ZAYF                |
| TLV1701AIDBVT.B                 | Active        | Production           | SOT-23 (DBV)   5  | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | ZAYF                |
| <a href="#">TLV1701AIDCKR</a>   | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| TLV1701AIDCKR.B                 | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| <a href="#">TLV1701AIDCKRG4</a> | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| TLV1701AIDCKRG4.B               | Active        | Production           | SC70 (DCK)   5    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| <a href="#">TLV1701AIDCKT</a>   | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU   SN                          | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| TLV1701AIDCKT.B                 | Active        | Production           | SC70 (DCK)   5    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | SIR                 |
| <a href="#">TLV1701AIDRLR</a>   | Active        | Production           | SOT-5X3 (DRL)   5 | 4000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | SIS                 |
| TLV1701AIDRLR.B                 | Active        | Production           | SOT-5X3 (DRL)   5 | 4000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | SIS                 |
| <a href="#">TLV1701AIDRLT</a>   | Active        | Production           | SOT-5X3 (DRL)   5 | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | SIS                 |
| TLV1701AIDRLT.B                 | Active        | Production           | SOT-5X3 (DRL)   5 | 250   SMALL T&R       | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | SIS                 |
| <a href="#">TLV1702AIDGK</a>    | Active        | Production           | VSSOP (DGK)   8   | 80   TUBE             | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| TLV1702AIDGK.B                  | Active        | Production           | VSSOP (DGK)   8   | 80   TUBE             | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| <a href="#">TLV1702AIDGKR</a>   | Active        | Production           | VSSOP (DGK)   8   | 2500   LARGE T&R      | Yes         | NIPDAU   SN<br>  NIPDAUAG            | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| TLV1702AIDGKR.B                 | Active        | Production           | VSSOP (DGK)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| TLV1702AIDGKRG4                 | Active        | Production           | VSSOP (DGK)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| TLV1702AIDGKRG4.B               | Active        | Production           | VSSOP (DGK)   8   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125   | 1702                |
| <a href="#">TLV1702AIRUGR</a>   | Active        | Production           | X2QFN (RUG)   8   | 3000   LARGE T&R      | Yes         | Call TI   Nipdauag                   | Level-1-260C-UNLIM                | -40 to 125   | FC                  |
| TLV1702AIRUGR.B                 | Active        | Production           | X2QFN (RUG)   8   | 3000   LARGE T&R      | Yes         | NIPDAUAG                             | Level-1-260C-UNLIM                | -40 to 125   | FC                  |
| <a href="#">TLV1704AIPW</a>     | Active        | Production           | TSSOP (PW)   14   | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |
| TLV1704AIPW.B                   | Active        | Production           | TSSOP (PW)   14   | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |
| <a href="#">TLV1704AIPWR</a>    | Active        | Production           | TSSOP (PW)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |
| TLV1704AIPWR.B                  | Active        | Production           | TSSOP (PW)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |
| TLV1704AIPWRG4                  | Active        | Production           | TSSOP (PW)   14   | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TLV1704AIPWRG4.B      | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | TL1704              |

- <sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).
- <sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- <sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- <sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- <sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- <sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV1701, TLV1702, TLV1704 :**

- Automotive : [TLV1701-Q1](#), [TLV1702-Q1](#), [TLV1704-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

**TAPE AND REEL INFORMATION**


\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV1701AIDBVR   | SOT-23       | DBV             | 5    | 3000 | 178.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV1701AIDBVT   | SOT-23       | DBV             | 5    | 250  | 180.0              | 8.4                | 3.2     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| TLV1701AIDCKR   | SC70         | DCK             | 5    | 3000 | 180.0              | 8.4                | 2.3     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV1701AIDCKRG4 | SC70         | DCK             | 5    | 3000 | 178.0              | 9.0                | 2.4     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV1701AIDCKT   | SC70         | DCK             | 5    | 250  | 180.0              | 8.4                | 2.3     | 2.5     | 1.2     | 4.0     | 8.0    | Q3            |
| TLV1701AIDRLR   | SOT-5X3      | DRL             | 5    | 4000 | 180.0              | 8.4                | 1.98    | 1.78    | 0.69    | 4.0     | 8.0    | Q3            |
| TLV1701AIDRLT   | SOT-5X3      | DRL             | 5    | 250  | 180.0              | 8.4                | 1.98    | 1.78    | 0.69    | 4.0     | 8.0    | Q3            |
| TLV1702AIDGKR   | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| TLV1702AIDGKRG4 | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| TLV1702AIRUGR   | X2QFN        | RUG             | 8    | 3000 | 180.0              | 8.4                | 1.6     | 1.6     | 0.66    | 4.0     | 8.0    | Q2            |
| TLV1704AIPWR    | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV1704AIPWRG4  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV1701AIDBVR   | SOT-23       | DBV             | 5    | 3000 | 208.0       | 191.0      | 35.0        |
| TLV1701AIDBVT   | SOT-23       | DBV             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TLV1701AIDCKR   | SC70         | DCK             | 5    | 3000 | 210.0       | 185.0      | 35.0        |
| TLV1701AIDCKRG4 | SC70         | DCK             | 5    | 3000 | 190.0       | 190.0      | 30.0        |
| TLV1701AIDCKT   | SC70         | DCK             | 5    | 250  | 210.0       | 185.0      | 35.0        |
| TLV1701AIDRLR   | SOT-5X3      | DRL             | 5    | 4000 | 202.0       | 201.0      | 28.0        |
| TLV1701AIDRLT   | SOT-5X3      | DRL             | 5    | 250  | 202.0       | 201.0      | 28.0        |
| TLV1702AIDGKR   | VSSOP        | DGK             | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| TLV1702AIDGKRG4 | VSSOP        | DGK             | 8    | 2500 | 353.0       | 353.0      | 32.0        |
| TLV1702AIRUGR   | X2QFN        | RUG             | 8    | 3000 | 202.0       | 201.0      | 28.0        |
| TLV1704AIPWR    | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| TLV1704AIPWRG4  | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |

## TUBE



\*All dimensions are nominal

| Device         | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TLV1702AIDGK   | DGK          | VSSOP        | 8    | 80  | 330    | 6.55   | 500    | 2.88   |
| TLV1702AIDGK.B | DGK          | VSSOP        | 8    | 80  | 330    | 6.55   | 500    | 2.88   |
| TLV1704AIPW    | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TLV1704AIPW.B  | PW           | TSSOP        | 14   | 90  | 530    | 10.2   | 3600   | 3.5    |



## SOT-23 - 1.45 mm max height

## SMALL OUTLINE TRANSISTOR



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X



SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR




SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/K 08/2024

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


DGK0008A



# PACKAGE OUTLINE

## VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

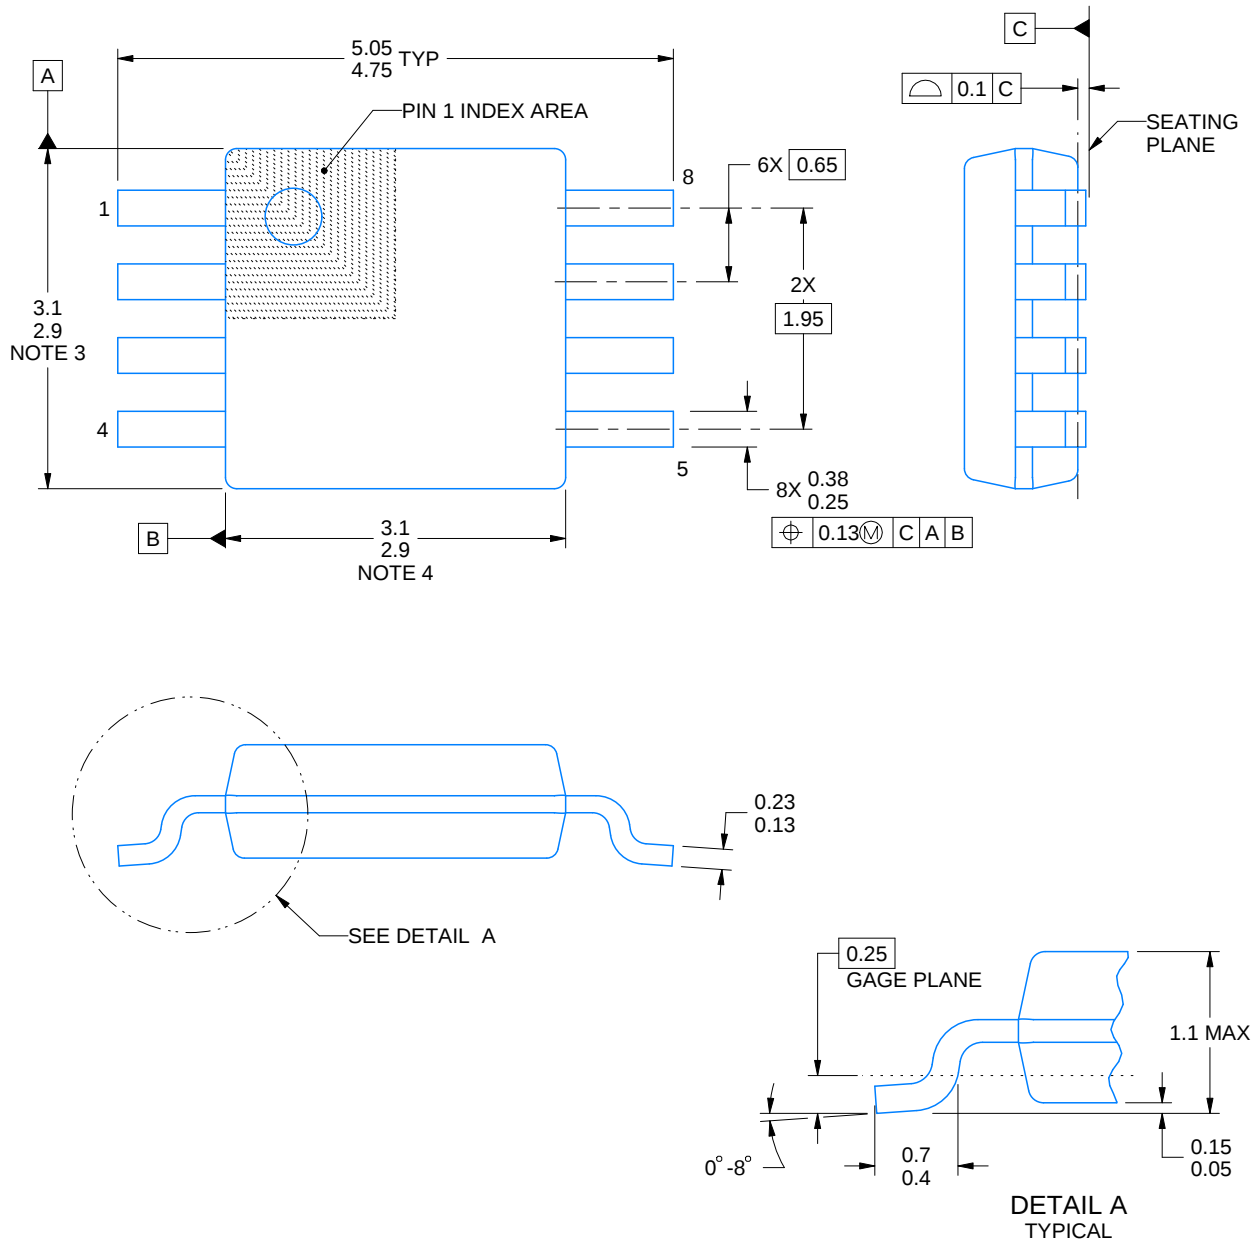

4214862/A 04/2023

### NOTES:

PowerPAD is a trademark of Texas Instruments.

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT


DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

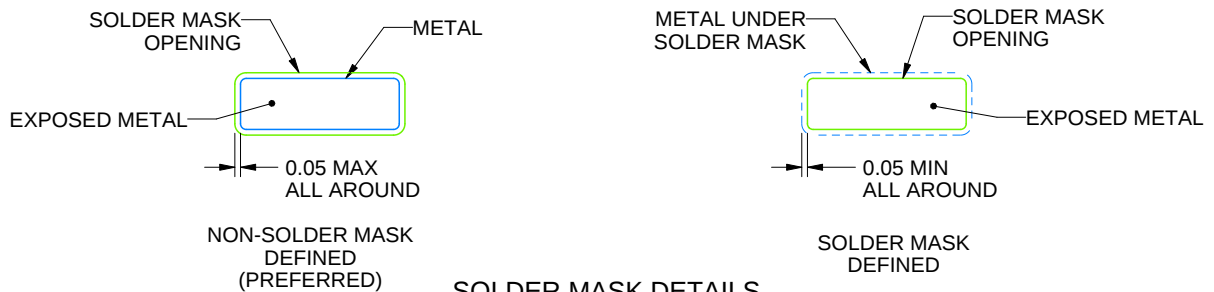

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

## EXAMPLE STENCIL DESIGN

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.




# EXAMPLE BOARD LAYOUT


DRL0005A

SOT - 0.6 mm max height

PLASTIC SMALL OUTLINE

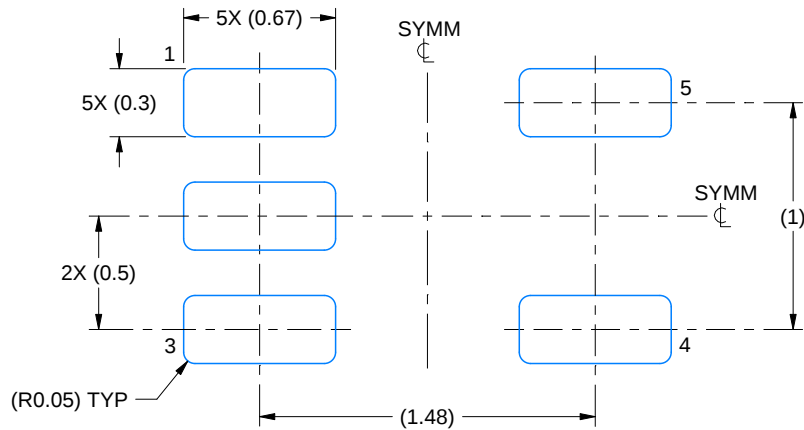

LAND PATTERN EXAMPLE  
SCALE:30X

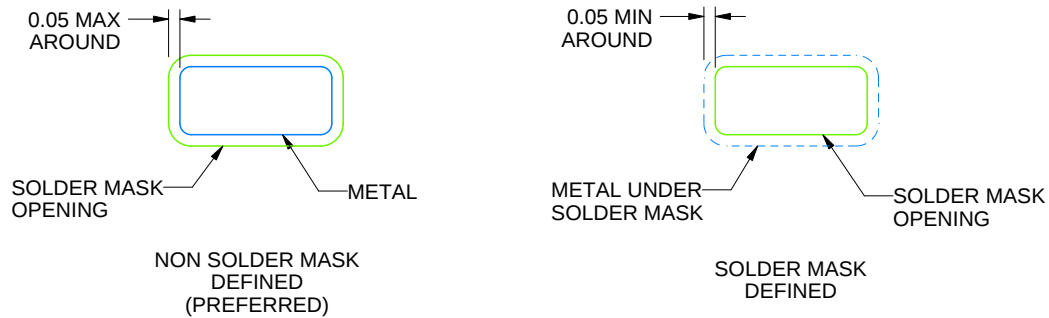

SOLDERMASK DETAILS

4220753/E 11/2024

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DRL0005A

SOT - 0.6 mm max height

PLASTIC SMALL OUTLINE

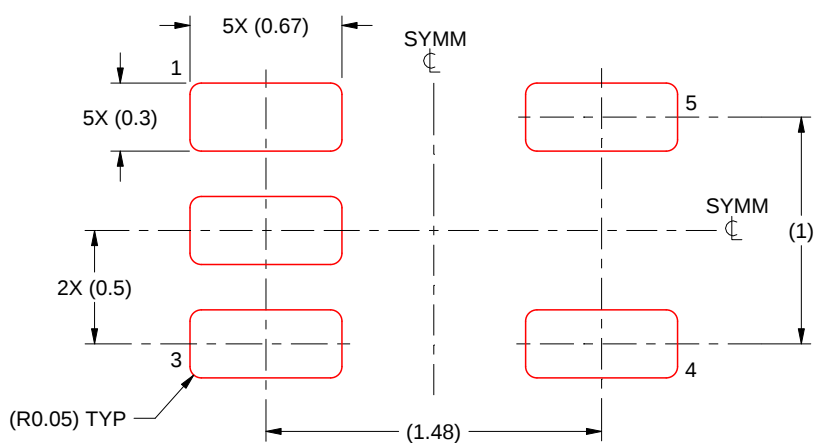

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
SCALE:30X


4220753/E 11/2024

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
8. Board assembly site may have different recommendations for stencil design.

RUG (S-PQFP-N8)

PLASTIC QUAD FLATPACK

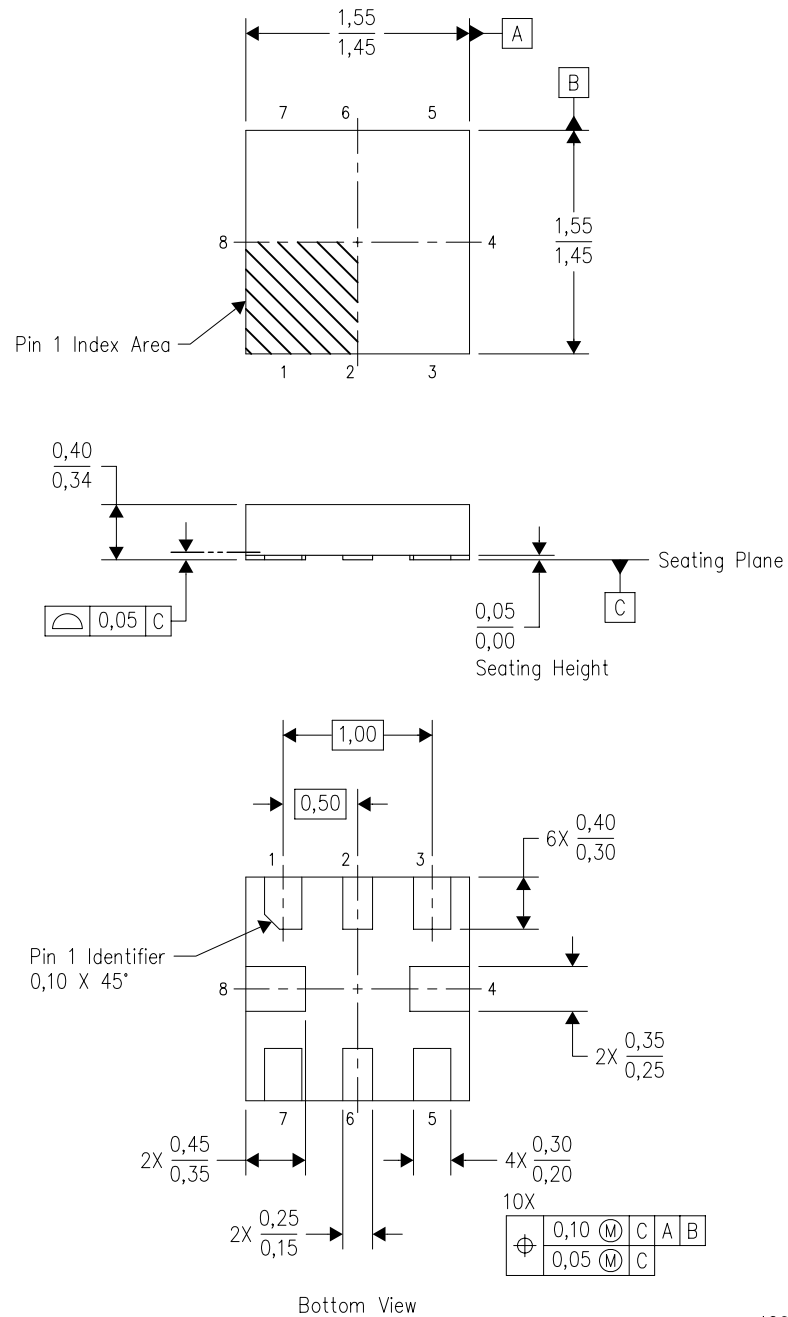

4208528-2/B 04/2008


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. QFN (Quad Flatpack No-Lead) package configuration.
  - D. This package complies to JEDEC MO-288 variation X2ECD.




4214834/G 11/2024

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-203.
4. Support pin may differ or may not be present.
5. Lead width does not comply with JEDEC.
6. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25mm per side

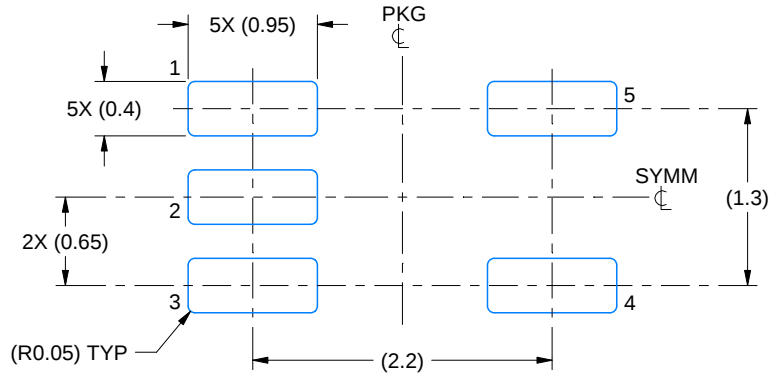

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

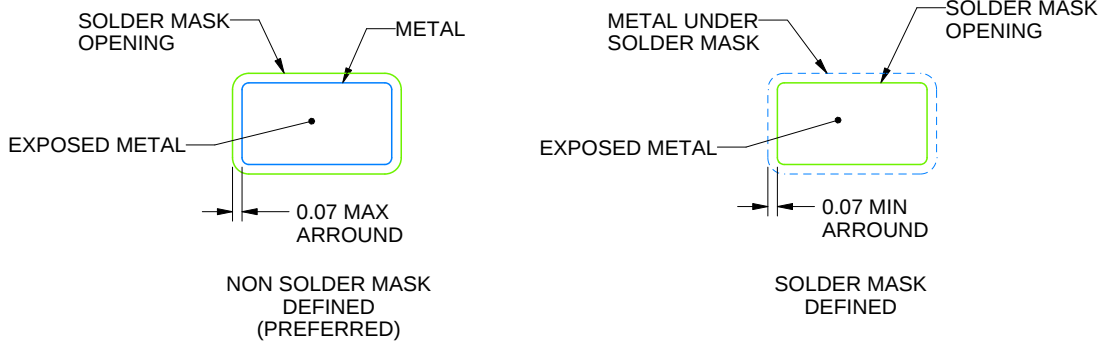

SOLDER MASK DETAILS

4214834/G 11/2024

NOTES: (continued)

7. Publication IPC-7351 may have alternate designs.
8. Solder mask tolerances between and around signal pads can vary based on board fabrication site.




SOLDER PASTE EXAMPLE  
BASED ON 0.125 THICK STENCIL  
SCALE:18X

4214834/G 11/2024

NOTES: (continued)

9. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
10. Board assembly site may have different recommendations for stencil design.



4220202/B 12/2023

## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X



SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
版权所有 © 2025，德州仪器 (TI) 公司