

TPL7407L 40V 7 通道低侧驱动器

查询样片: **TPL7407L**

特性

- **600mA** 额定漏极电流（每通道）
- **7 通道达灵顿 (Darlington) 阵列**（例如 **ULN2003A**）的 **CMOS** 引脚到引脚改进
- 功耗（极低 V_{OL} ）
 - 电流为 **100mA** 时， V_{OL} 低于达灵顿 (**Darlington**) 阵列的四分之一
- 每通道小于 **10nA** 的极低输出泄露
- 扩展环境温度范围：
 $T_A = -40^{\circ}\text{C}$ 至 **125°C**
- 高压输出 **40V**
- 与 **1.8V** 至 **5.0V** 微控制器和逻辑接口兼容
- 用于感应反冲保护的内部自振荡二极管
- 输入下拉电阻器可实现三态输入驱动器
- 用来消除嘈杂环境中寄生运行的输入电阻电容 (**RC**) 缓冲器
- 电感负载驱动器应用
- 静电放电 (**ESD**) 保护性能超过 **JESD 22** 规范要求
 - **2kV** 人体模型 (**HBM**)，**500V** 充电器件模型 (**CDM**)
- 采用 **16** 引脚小外形尺寸集成电路 (**SOIC**) 和薄型小外形尺寸 (**TSSOP**) 封装

应用范围

- 电感负载
 - 继电器
 - 单极步进 & 有刷直流电机
 - 螺线管 & 阀门
- 发光二极管 (LED)
- 逻辑电平位移
- 栅极 & 绝缘栅双极型晶体管 (IGBT) 驱动

说明


TP7407L 是一款高压、高电流 **NMOS** 晶体管阵列。这个器件包含 **7** 个特有高压输出的 **NMOS** 晶体管，这些晶体管具有针对开关电感负载的共阴极钳位二极管。一个单个 **NMOS** 通道的最大漏极电流额定值为 **600mA**。增加的全新稳压和驱动电路在整个通用输入输出 (**GPIO**) 范围内 (**1.8V-5.0V**) 提供最大驱动强度。可将这些晶体管并联以实现更高的电流能力。

TPL7407L 的主要优势是其经提升的效率以及低于双极达灵顿 (Darlington) 器件的泄露值。借助于较低的 V_{OL} , 功率耗散比传统中继驱动器少一半, 每通道的电流少于 250mA。

器件信息

订货编号	封装 (引脚)	封装尺寸
TPL7407L	SOIC (16)	9.9mm x 3.91mm
TPL7407L	TSSOP (16)	5.0mm x 4.4mm

简化电路原理图

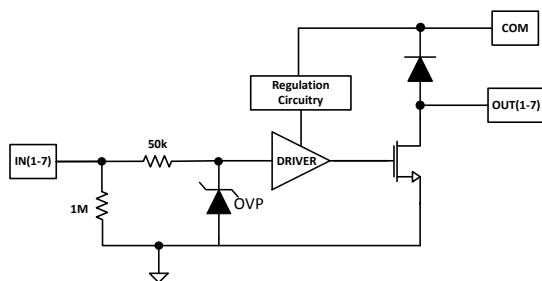

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.


PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2014, Texas Instruments Incorporated
English Data Sheet: [SLRS066](#)



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

TERMINAL CONFIGURATION AND FUNCTIONS

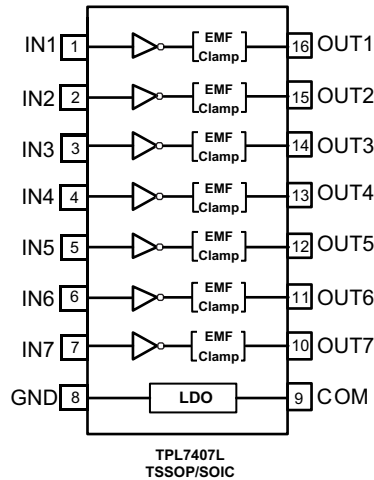

Terminal Functions

TERMINAL		DESCRIPTION
NAME	NUMBER	
IN(X)	1, 2, 3, 4, 5, 6, 7	GPIO inputs that will drive the outputs "low" (or sink current) when driven "high"
OUT(X)	16, 15, 14, 13, 12, 11, 10	Driver output that sinks currents after input is driven "high"
COM	9	Supply Pin that should be tied to 8.5V or higher for proper operation
GND	8	Ground pin

Specifications

Absolute Maximum Ratings⁽¹⁾

at 25°C free-air temperature (unless otherwise noted)

	MIN	MAX	UNIT
V_{OUT} Pins OUT1-OUT7 to GND voltage	-0.3	42	V
V_{OK} Output Clamp diode reverse voltage ⁽²⁾	-0.3	42	V
V_{COM} COM pin voltage ⁽²⁾	-0.3	42	V
V_{IN} Pins IN1-IN7 to GND voltage ⁽²⁾	-0.3	30	V
I_{DS} Continuous drain current per channel ^{(3) (4)}		600	mA
I_{OK} Output clamp current		500	mA
I_{GND} Total continuous GND-terminal current		-2	A
T_A Operating free-air temperature range	-40	125	°C
T_J Operating virtual junction temperature	-40	150	°C
T_{stg} Storage temperature range	-65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values are with respect to the GND/substrate terminal, unless otherwise noted.
- (3) Maximum power dissipation is a function of $T_J(\text{max})$, θ_{JA} , and T_A . The maximum allowable power dissipation at any allowable ambient temperature is $P_D = (T_J(\text{max}) - T_A)/\theta_{JA}$. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (4) The package thermal impedance is calculated in accordance with JEDEC 51-7.

Thermal Information

THERMAL METRIC ⁽¹⁾		TPL7407L		UNIT
		SOIC (D)	TSSOP (PW)	
		16 PINS	16 PINS	
θ_{JA}	Junction-to-ambient thermal resistance	91.9	115.2	°C/W
θ_{JCTop}	Junction-to-case (top) thermal resistance	50.1	49.5	°C/W
θ_{JB}	Junction-to-board thermal resistance	49.4	60.8	°C/W
ψ_{JT}	Junction-to-top characterization parameter	18.6	8.5	°C/W
ψ_{JB}	Junction-to-board characterization parameter	49.1	60.2	°C/W
θ_{JCbott}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).

Recommended Operating Conditions

Over operating temperature range

		MIN	NOM	MAX	UNIT
V_{OUT}	OUT1- OUT7 pin voltage for recommended operation	0		40	V
V_{COM}	COM pin voltage range for full output drive	8.5		40	V
V_{IL}	IN1- IN7 input low voltage ("Off" high impedance output)			0.9	V
V_{IH}	IN1- IN7 input high voltage ("Full Drive" low impedance output)	1.5			V
T_J	Operating virtual junction temperature	-40		125	°C
I_{DS}	Continuous drain current	0		500	mA

Electrical Characteristics

$T_J = -40^{\circ}\text{C}$ to 125°C ; Typical Values at $T_A = T_J = 25^{\circ}\text{C}$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V_{OL} (V_{DS})	OUT1- OUT7 low-level output voltage	$V_{IN} \geq 1.5\text{V}$	$I_D = 100\text{ mA}$		200	320	mV
			$I_D = 200\text{ mA}$		420	650	
$I_{OUT(OFF)}$ (I_{DS_OFF})	OUT1- OUT7 OFF-state leakage current	$V_{OUT} = 24\text{V}$, $V_{IN} \leq 1.0\text{V}$			10	500	nA
V_F	Clamp forward voltage	$I_F = 200\text{ mA}$				1.4	V
$I_{IN(off)}$	IN1- IN7 Off-state input current	$V_{INX} = 0\text{V}$ $V_{OUT} = 40\text{V}$				500	nA
$I_{IN(ON)}$	IN1- IN7 ON state input current	$V_{INX} = 1.5\text{V}-5.0\text{V}$				10	μA
I_{COM}	Static current flowing through COM pin	$V_{COM} = 8.5\text{V}-40\text{V}$			15	25	μA

Switching Characteristics

Typical Values at $T_A = T_J = 25^{\circ}\text{C}$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}	Propagation delay time, low- to high-level output	$V_{INX} \geq 1.65\text{V}$, $V_{pullup} = 24\text{V}$, $R_{pull-up} = 48\Omega$		350		ns
t_{PHL}	Propagation delay time, high- to low-level output	$V_{INX} \geq 1.65\text{V}$, $V_{pullup} = 24\text{V}$, $R_{pull-up} = 48\Omega$		350		ns
C_i	Input capacitance	$V_I = 0$, $f = 100\text{KHz}$		5		pF

Typical Characteristics

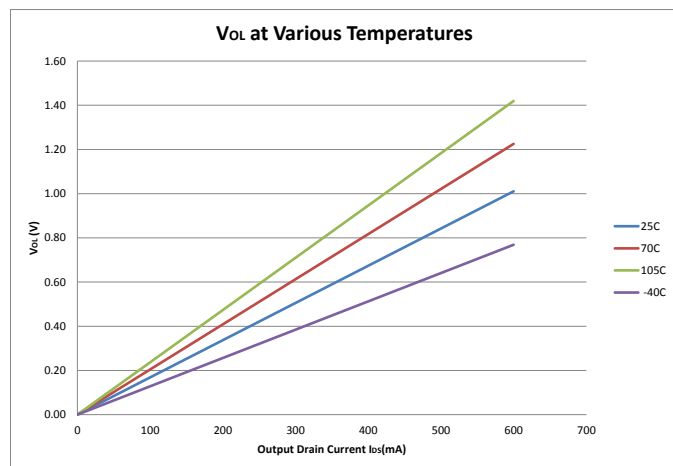
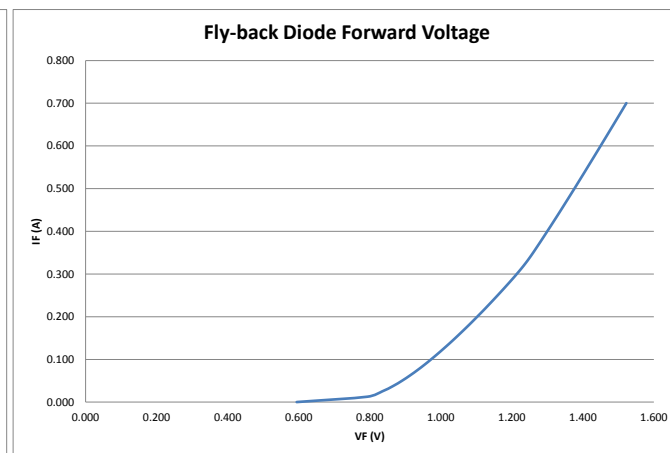
Figure 1. V_{OL} (V_{DS})

Figure 2. Flyback Diode Forward Voltage

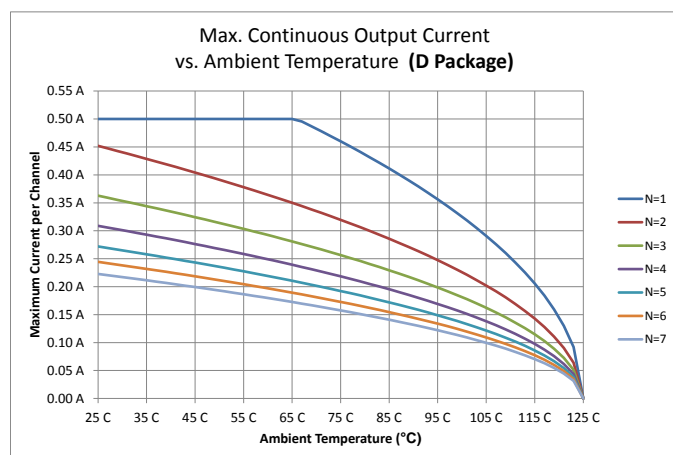


Figure 3. Maximum Output Current vs. Temperature (SOIC)

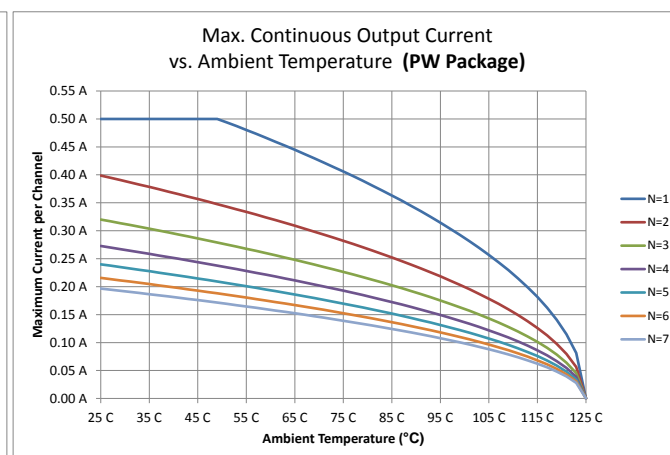


Figure 4. Maximum Output Current vs. Temperature (TSSOP)

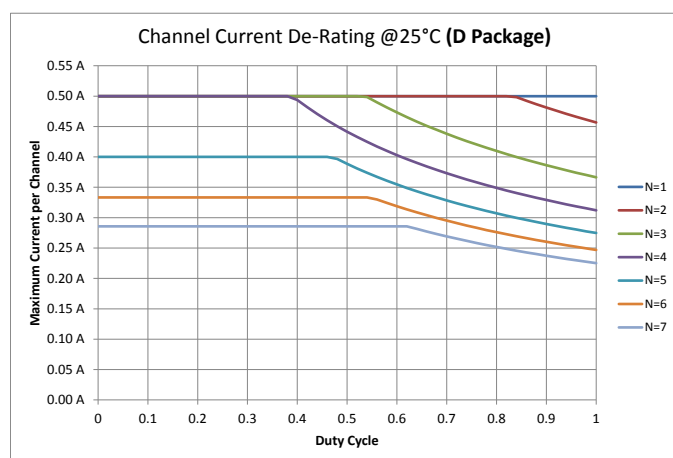


Figure 5. D Package Maximum Collector Current Vs. Duty Cycle at 25°C

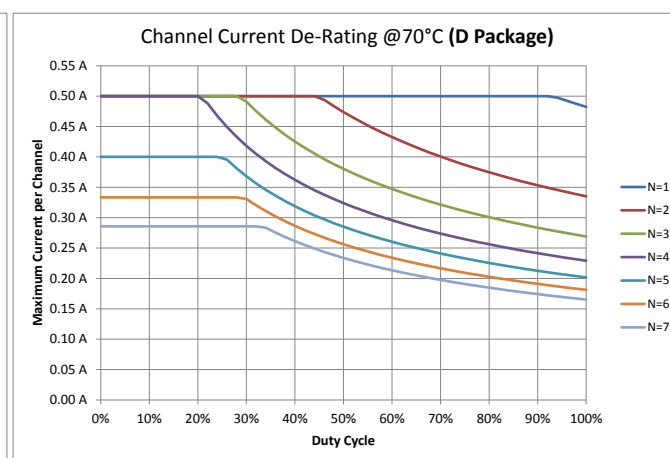


Figure 6. D Package Maximum Collector Current Vs. Duty Cycle at 70°C

Typical Characteristics (continued)

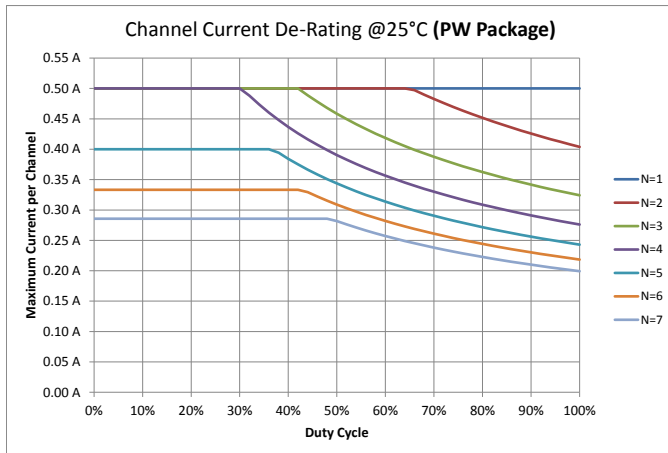


Figure 7. PW Package Maximum Collector Current Vs. Duty Cycle at 25°C

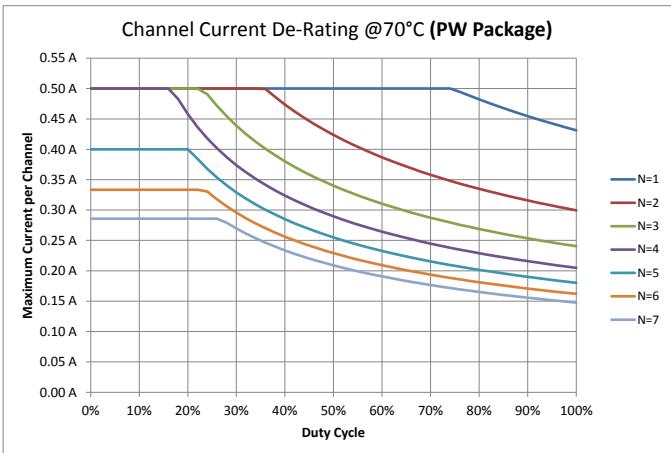


Figure 8. PW Package Maximum Collector Current Vs. Duty Cycle at 70°C

APPLICATION AND IMPLEMENTATION

TTL and other Logic Inputs

TPL7407L input interface is specified for standard 1.8V and 5V CMOS logic interface and can tolerate up to 30V. At any input voltage the output drivers will be driven at it's maximum when Vcom is greater than or equal to 8.5V.

Input RC Snubber

TPL7407L features an input RC snubber that helps prevent spurious switching in noisy environment. Connect an external 1kΩ to 5kΩ resistor in series with the input to further enhance TPL7407L's noise tolerance.

High-impedance Input Drivers

TPL7407L features a 1MΩ input pull-down resistor. The presence of this resistor allows the input drivers to be tri-stated. When a high-impedance driver is connected to a channel input the TPL7407L detects the channel input as a low level input and remains in the OFF position. The input RC snubber helps improve noise tolerance when input drivers are in the high-impedance state.

On-chip Power Dissipation

Use the below equation to calculate TPL7407L on-chip power dissipation P_D :

$$P_D = \sum_{i=1}^N V_{OLi} \times I_{Li}$$

Where:

N is the number of channels active together.

V_{OLi} is the OUT_i pin voltage for the load current I_{Li} .

(1)

Thermal Reliability

It is recommended to limit TPL7407L IC's die junction temperature to less than 125°C. The IC junction temperature is directly proportional to the on-chip power dissipation. Use the following equation to calculate the maximum allowable on-chip power dissipation for a target IC junction temperature:

$$PD_{(MAX)} = \frac{(T_{J(MAX)} - T_A)}{\theta_{JA}}$$

Where:

$T_{J(MAX)}$ is the target maximum junction temperature.

T_A is the operating ambient temperature.

θ_{JA} is the package junction to ambient thermal resistance.

(2)

Improving Package Thermal Performance

θ_{JA} value depends on the PC board layout. An external heat sink and/or a cooling mechanism, like a cold air fan, can help reduce θ_{JA} and thus improve device thermal capabilities. Refer to TI's design support web page at www.ti.com/thermal for a general guidance on improving device thermal performance.

Application Examples

Unipolar Stepper Motor Driver

Figure 9 shows an implementation of TPL7407L for driving a unipolar stepper motor. The unconnected input channels can be used for other functions. When an input pin is left open the internal 1MΩ pull down resistor pulls the respective input pin to GND potential. For higher noise immunity use an external short across an unconnected input and GND pins. The COM pin must be tied to the supply of whichever inductive load is being driven for the driver to be protected by the free-wheeling diode.

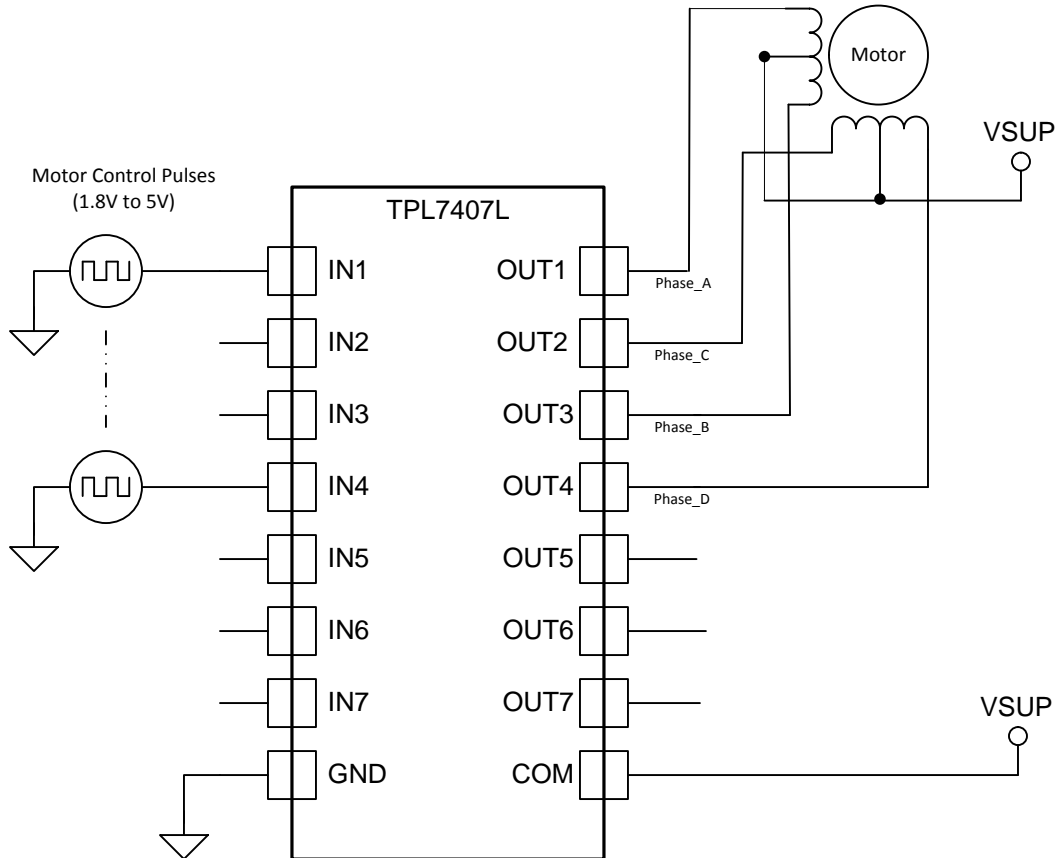


Figure 9. TPL7407L as a Stepper Motor Driver

Multi-Purpose Sink Driver

When configured as per [Figure 10](#) TPL7407L can be used as a multi-purpose driver. The output channels can be tied together to sink more current. TPL7407L can easily drive motors, relays & LEDs with little power dissipation. COM must be tied to highest load voltage, which may or may not be same as inductive load supply.

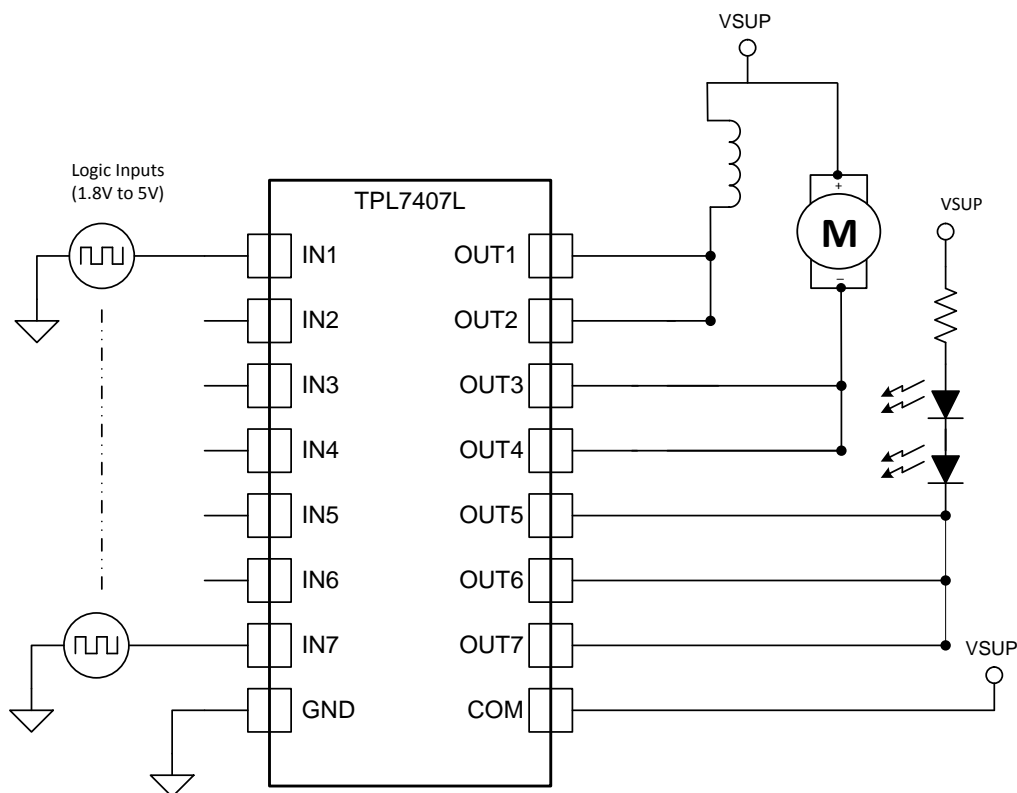


Figure 10. TPL7407L Multi-Purpose Sink Driver Application

24V Relay Driver

To drive lower resistance relays, like $<48\Omega$, connect two or more adjacent channels in parallel as shown in Figure 11. Connecting several channels in parallel lowers the channel output resistance and increases the drive current. TPL7407L can be used for driving 12V, 24V & 36V relays with similar a implementation.

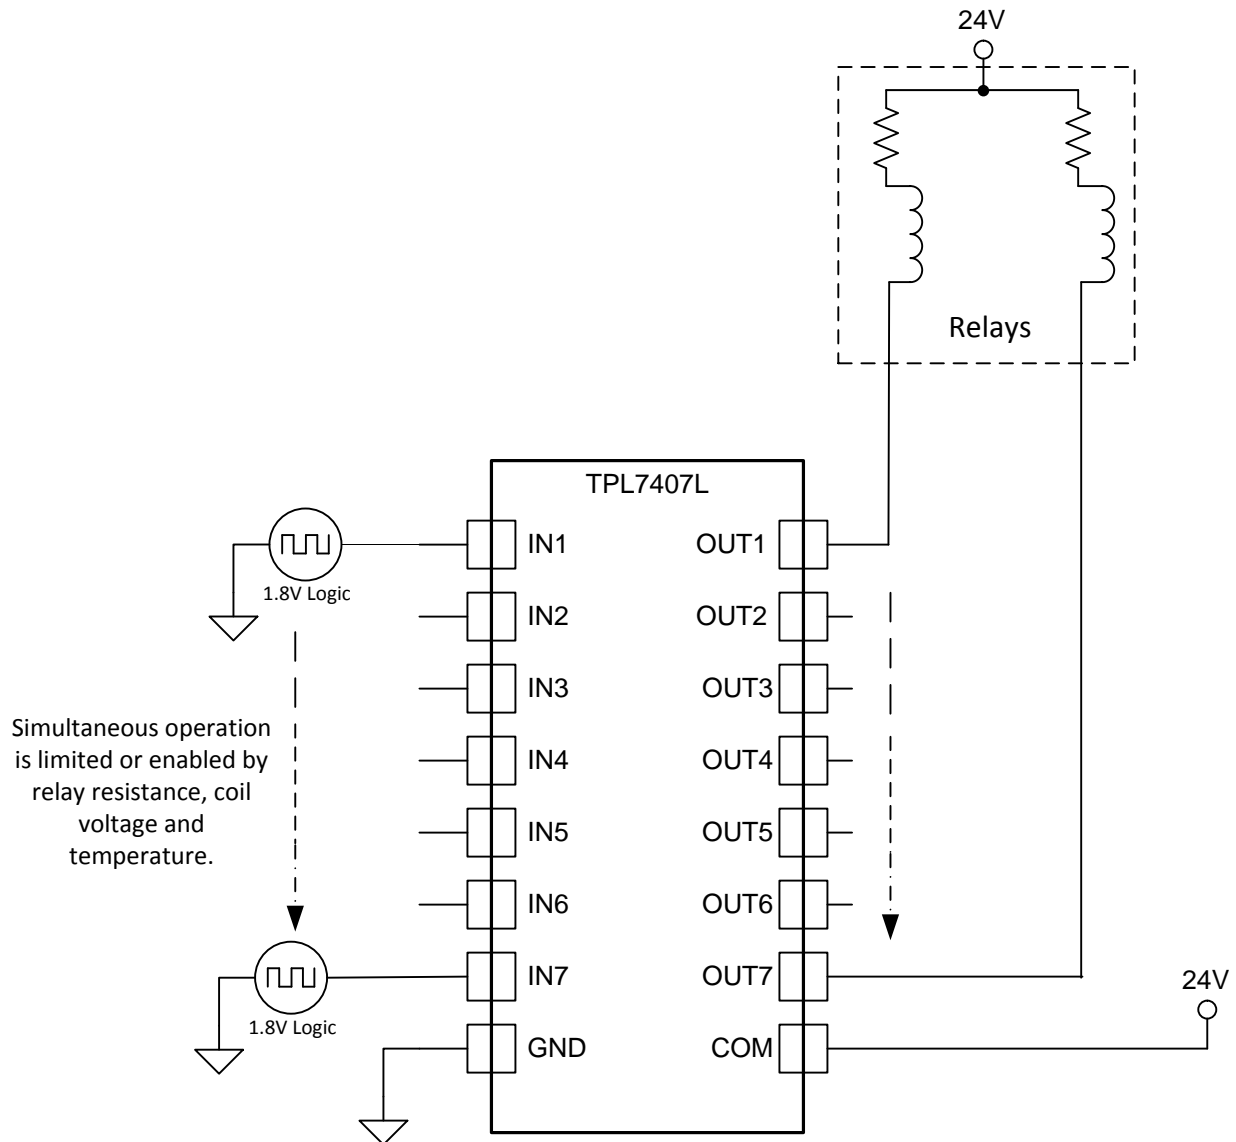


Figure 11. TPL7407L Driving 24V Relays

REVISION HISTORY

Changes from Original (January 2014) to Revision A	Page
• 初次发布完整版本。	1

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPL7407LDR	Active	Production	SOIC (D) 16	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	TPL7407L
TPL7407LDR.B	Active	Production	SOIC (D) 16	2500 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	TPL7407L
TPL7407LPWR	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	TPL7407L
TPL7407LPWR.B	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	TPL7407L

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPL7407LDR	SOIC	D	16	2500	330.0	16.8	6.5	10.3	2.1	8.0	16.0	Q1
TPL7407LPWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPL7407LDR	SOIC	D	16	2500	364.0	364.0	27.0
TPL7407LPWR	TSSOP	PW	16	2000	364.0	364.0	27.0

D (R-PDSO-G16)

PLASTIC SMALL OUTLINE



4040047-6/M 06/11

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AC.



4220204/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 [TI 的销售条款](#) 或 [ti.com](#) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
版权所有 © 2025，德州仪器 (TI) 公司