

TUSB216I USB 2.0 高速シグナル・コンディショナ、BC 1.2 コントローラ付き

1 特長

- 広い電源電圧範囲: 2.3~6.5V
- USB 切断時およびシャットダウン時の非常に低い消費電力
- USB 2.0 High Speed 信号のコンディショニングを提供
- USB 2.0、OTG 2.0、BC 1.2 に対応
- Low-Speed、Full-Speed、High-Speed 信号処理のサポート
- BC 1.2 CDP バッテリ充電コントローラを内蔵
- 特定のホストやデバイスに非依存
- 最大 5m のケーブルをサポート
 - 外付けのプルダウン抵抗により 4 つの信号ブースト (エッジ・ブーストと DC ブースト) 設定を選択可能
 - プルアップまたはプルダウンで選択可能な 3 つの RX 感度設定により、損失が大きいアプリケーションの ISI ジッタを補償
- 2 つの TUSB216I デバイスを使って最大 10m のケーブル長に対応
- スケーラブルなソリューション - 損失が大きいアプリケーションに対応するため、デバイスをデジタイズ・チェーン接続可能
- TUSB211A、212、214、217A (3.3V) とピン互換

2 アプリケーション

- ラップトップ、デスクトップまたはドッキング・ステーション
- 携帯電子機器
- タブレット
- 携帯電話
- テレビ
- アクティブ・ケーブル、延長ケーブル、バックプレーン

3 概要

TUSB216I は第 3 世代 USB 2.0 High Speed 信号コンディショナーで、伝送チャネルでの AC 損失 (容量性負荷による) および DC 損失 (抵抗損失による) を補償するように設計されています。

TUSB216I には、エッジ・ブースタにより USB 2.0 High Speed 信号の遷移エッジを高速化し、DC ブースト機能により静的電圧レベルを上げる特許取得済みの設計が採用されています。

また、TUSB216I はプリイコライゼーション機能を備えているため、レシーバ感度を高め、長いケーブルを使用するアプリケーションで ISI (符号間干渉) ジッタを補償できます。USB Low Speed および Full Speed 信号特性は、TUSB216I による影響を受けません。

TUSB216I は、パケット・タイミングを変更せず、また、伝搬遅延やレイテンシを追加せずに、信号品質を向上させることができます。


TUSB216I により、最長 5 メートルのケーブルを使用したシステムで、USB 2.0 High Speed 近端アイ・コンプライアンスに合格することが可能になります。

TUSB216I は USB On-The-Go (OTG) および Battery Charging (BC 1.2) プロトコルにも対応しています。内蔵の BC 1.2 バッテリ充電コントローラは、制御ピンを使って有効化できます。

製品情報

| 部品番号 ⁽¹⁾ | パッケージ ⁽²⁾ | 動作温度 (T _A) °C | パッケージサイズ ⁽³⁾ |
|---------------------|----------------------|---------------------------|-------------------------|
| TUSB216 | RWB (X2QFN, 12) | 0~70 | 1.6mm × 1.6mm |
| TUSB216I | | -40~85 | |
| TUSB216-Q1 | | -40~105 | |

- (1) [製品比較表](#)を参照してください。
- (2) 詳細については、[セクション 11](#)を参照してください。
- (3) パッケージサイズ (長さ×幅) は公称値であり、該当する場合はピンも含まれます。

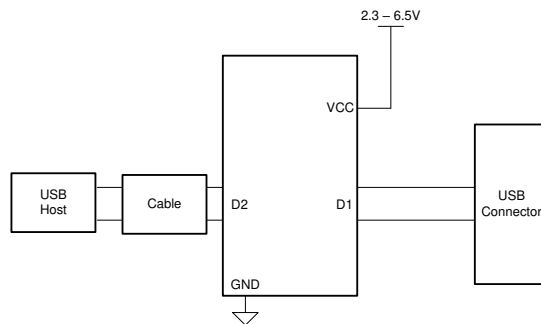

概略回路図




Table of Contents

| | | | |
|--|----------|--|-----------|
| 1 特長 | 1 | 7.4 Device Functional Modes..... | 9 |
| 2 アプリケーション | 1 | 7.5 TUSB216 Registers..... | 10 |
| 3 概要 | 1 | 8 Application and Implementation | 14 |
| 4 Device Comparison | 2 | 8.1 Application Information..... | 14 |
| 5 Pin Configuration and Functions | 3 | 8.2 Typical Application..... | 14 |
| 6 Specifications | 5 | 8.3 Power Supply Recommendations..... | 22 |
| 6.1 Absolute Maximum Ratings..... | 5 | 8.4 Layout..... | 22 |
| 6.2 ESD Ratings..... | 5 | 9 Device and Documentation Support | 23 |
| 6.3 Recommended Operating Conditions..... | 5 | 9.1 ドキュメントの更新通知を受け取る方法..... | 23 |
| 6.4 Thermal Information..... | 5 | 9.2 サポート・リソース..... | 23 |
| 6.5 Electrical Characteristics..... | 6 | 9.3 Trademarks..... | 23 |
| 6.6 Switching Characteristics..... | 7 | 9.4 静電気放電に関する注意事項..... | 23 |
| 6.7 Timing Requirements..... | 8 | 9.5 用語集..... | 23 |
| 7 Detailed Description | 9 | 10 Revision History | 23 |
| 7.1 Overview..... | 9 | 11 Mechanical, Packaging, and Orderable Information | 23 |
| 7.2 Functional Block Diagram..... | 9 | | |
| 7.3 Feature Description..... | 9 | | |

4 Device Comparison

| | TUSB211A | TUSB212 | TUSB214 | TUSB216 | TUSB217A |
|---|---|-------------|-------------|---|---|
| Industrial Variant Available | Y | Y | Y | Y | Y |
| Automotive Variant Available | Y | Y | Y | Y | Y |
| Supply (V) | 2.3 to 6.5 | 3.3 | 3.3 | 2.3 to 6.5 | 2.3 to 6.5 |
| DC Boost | Tandem with AC Boost | 3 levels | 3 levels | Tandem with AC Boost | Tandem with AC Boost |
| I2C Control | N | Y | Y | Y | Y |
| RX pre-equalization for ISI compensation | N/A | N/A | N/A | 3 levels | 3 levels |
| Charging Downstream Port (CDP) controller | N/A | N/A | Always ON | Pin Controlled | Always ON. Dynamically selected by DCP/CDP pin |
| Dedicated Charging Port (DCP) controller | N/A | N/A | N/A | N/A | Always ON. Dynamically selected by DCP/CDP pin |
| Cable length compensation for near-end high-speed eye mask Compliance (pre-channel before redriver/post-channel after redriver) (meter - gauge) | 6/3 - 28AWG (10 - 24AWG with one redriver on each end) | 4/2 - 28AWG | 4/2 - 28AWG | 6/3 - 28AWG (10 - 24AWG with one redriver on each end) | 6/3 - 28AWG (10 - 24AWG with one redriver on each end) |
| Cable length compensation for far-end high-speed eye mask Compliance (pre-channel before redriver/post-channel after redriver) (meter - gauge) | 10/8 - 26AWG (10 - 28AWG with one redriver on each end) | 8/6 - 28AWG | 8/6 - 28AWG | 10/8 - 26AWG (10 - 28AWG with one redriver on each end) | 10/8 - 26AWG (10 - 28AWG with one redriver on each end) |

5 Pin Configuration and Functions

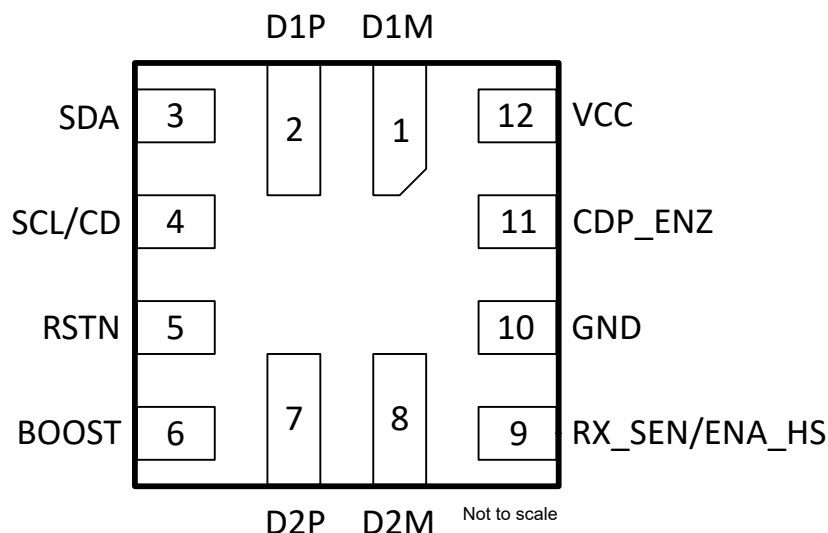

5-1. TUSB216I RWB Package, 12-Pin X2QFN (Top View)

表 5-1. Pin Functions

| PIN | | TYPE ⁽¹⁾ | INTERNAL PULLUP/PULLDOWN | DESCRIPTION |
|-------------------------------|-----|---------------------|-----------------------------|---|
| NAME | NO. | | | |
| BOOST | 6 | I | N/A | USB High-speed boost select via external pull down resistor. Both edge boost and DC boost are controlled by a single pin in non-I2C mode. In I2C mode edge boost and DC boost can be individually controlled. Sampled upon power up. Does not recognize real time adjustments. Auto selects BOOST LEVEL = 3 when left floating. |
| CDP_ENZ | 11 | I | 500 kΩ PU | Set CDP_ENZ is low to enable BC 1.2 CDP controller |
| RX_SEN ⁽³⁾ /ENA_HS | 9 | I/O | N/A | In I2C mode: Reserved for TI test purpose. In non-I2C mode: At reset: 3-level input signal RX_SEN. USB High-speed RX Sensitivity Setting to Compensate ISI Jitter H (pin is pulled high) – high RX sensitivity (high loss channel) M (pin is left floating) – medium RX sensitivity (medium loss channel) L (pin is pulled low) – low RX sensitivity (low loss channel) After reset: Output signal ENA_HS. Flag indicating that channel is in High-speed mode. Asserted upon: 1. Detection of USB-IF High-speed test fixture from an unconnected state followed by transmission of USB TEST_PACKET pattern. 2. Squelch detection following USB reset with a successful HS handshake [HS handshake is declared to be successful after single chirp J chirp K pair where each chirp is within 18 μs – 128 μs]. |

表 5-1. Pin Functions (続き)

| PIN | | TYPE ⁽¹⁾ | INTERNAL PULLUP/PULLDOWN | DESCRIPTION |
|------------------------|-----|---------------------|---|--|
| NAME | NO. | | | |
| D2P | 7 | I/O | N/A | USB High-speed positive port. |
| D2M | 8 | I/O | N/A | USB High-speed negative port. |
| GND | 10 | P | N/A | Ground |
| D1M | 1 | I/O | N/A | USB High-speed negative port.. |
| D1P | 2 | I/O | N/A | USB High-speed positive port. |
| SDA ⁽²⁾ | 3 | I/O | 500 kΩ PU 1.8 MΩ PD | I2C Mode: Bidirectional I2C data pin [7-bit I2C slave address = 0x2C]. In non I2C mode: Reserved for TI test purpose. |
| VCC | 12 | P | N/A | Supply power |
| RSTN | 5 | I | 500 kΩ PU 1.8 MΩ PD | Device disable/enable. Low – Device is at reset and in shutdown, and High - Normal operation. Recommend 0.1-μF external capacitor to GND to ensure clean power on reset if not driven. If the pin is driven, it must be held low until the supply voltage for the device reaches within specifications. |
| SCL ⁽²⁾ /CD | 4 | I/O | When RSTN asserted there is a 500 kΩ PD | In I2C mode: I2C clock pin [I2C address = 0x2C]. Non I2C mode: After reset: Output CD. Flag indicating that a USB device is attached (connection detected). Asserted from an unconnected state upon detection of DP or DM pull-up resistor. De-asserted upon detection of disconnect. |

(1) I = input, O = output, P = power

(2) Pull-up resistors for SDA and SCL pins in I²C mode should be R_{Pull-up} (depending on I2C bus voltage). If both SDA and SCL are pulled up at power-up the device enters into I²C mode.

(3) Pull-down and pull-up resistors for RX_SEN pin must follow R_{RXSEN1} and R_{RXSEN2} resistor recommendations in non I²C mode.

6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

| | | MIN | MAX | UNIT |
|---|---------------------------------|------|------|------|
| Supply voltage range | VCC | −0.3 | 7 | V |
| Voltage range USB data | DxP, DxM | −0.3 | 5.5 | V |
| Voltage range on BOOST pin | BOOST | −0.3 | 1.98 | V |
| Voltage range other pins | RX_SEN, CDP_ENZ, SDA, SCL, RSTN | −0.3 | 5.5 | V |
| Storage temperature, T _{stg} | | −65 | 150 | °C |
| Maximum junction temperature, T _{J(max)} | | | 125 | °C |

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

| | | VALUE | UNIT |
|--------------------|-------------------------|---|-------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾ | ±2000 |
| | | Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾ | ±750 |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|----------------------|--|------|-----|------|------|
| V _{CC} | Supply voltage | 2.3 | 5 | 6.5 | V |
| T _A | Operating free-air temperature (Industrial) | −40 | | 85 | °C |
| T _J | Junction temperature (Industrial) | | | 105 | °C |
| V _{I2C_BUS} | I2C Bus Voltage | 1.62 | | 3.6 | V |
| DxP, DxM | Voltage range USB data | 0 | | 3.6 | V |
| BOOST | Voltage range BOOST pin | 0 | | 1.98 | V |
| DIGITAL | Voltage range other pins (SCL, SDA, RSTN, CDP_ENZ) | 0 | | 3.6 | V |
| RX_SEN | Voltage range RX_SEN pin | 0 | | 5.0 | V |

6.4 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | RWB (X2QFN) | UNIT |
|-------------------------------|--|-------------|------|
| | | 12 PINS | |
| R _{θJA} | Junction-to-ambient thermal resistance | 137.4 | °C/W |
| R _{θJC(top)} | Junction-to-case (top) thermal resistance | 62 | °C/W |
| R _{θJB} | Junction-to-board thermal resistance | 67.2 | °C/W |
| ψ _{JT} | Junction-to-top characterization parameter | 1.9 | °C/W |
| ψ _{JB} | Junction-to-board characterization parameter | 67.3 | °C/W |
| R _{θJC(bot)} | Junction-to-case (bottom) thermal resistance | N/A | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

6.5 Electrical Characteristics

Over operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|--|---|--|-----|--------------------|------|------|
| POWER | | | | | | |
| I _{ACTIVE_HS} | High Speed Active Current | USB channel = HS mode. 480 Mbps traffic. V _{CC} supply stable, with Boost = Max | | 22 | 36 | mA |
| I _{IDLE_HS} | High Speed Idle Current | USB channel = HS mode, no traffic. V _{CC} supply stable, Boost = Max | | 22 | 36 | mA |
| I _{HS_SUSPEND} | High Speed Suspend Current | USB channel = HS Suspend mode. V _{CC} supply stable | | 0.75 | 1.4 | mA |
| I _{FS} | Full-Speed Current | USB channel = FS mode, 12 Mbps traffic, V _{cc} supply stable | | 0.75 | 1.4 | mA |
| I _{DISCONN} | Disconnect Power | Host side application. No device attachment. | | 0.80 | 1.4 | mA |
| I _{SHUTDN} | Shutdown Power | RSTN driven low, V _{CC} supply stable | | 60 | 115 | μA |
| CONTROL PIN LEAKAGE | | | | | | |
| I _{LKG_FS} | Pin failsafe leakage current for SDA, RSTN | V _{CC} = 0 V, pin at V _{IH, max} | | 10 | 15 | μA |
| I _{LKG_FS} | Pin failsafe leakage current for RX_SEN | V _{CC} = 0 V, pin at V _{IH, max} | | 6 | 15 | μA |
| I _{LKG_FS} | Pin failsafe leakage current for SCL | V _{CC} = 0 V, pin at V _{IH, max} | | | 70 | nA |
| INPUT RSTN | | | | | | |
| V _{IH} | High level input voltage | | 1.5 | | 3.6 | V |
| V _{IL} | Low-level input voltage | | 0 | | 0.5 | V |
| I _{IH} | High level input current | V _{IH} = 3.6 V, R _{PU} enabled | | | ±15 | μA |
| I _{IL} | Low level input current | V _{IL} = 0V, R _{PU} enabled | | | ±20 | μA |
| INPUT DIGITAL | | | | | | |
| V _{IH} | High level input voltage (CDP_ENZ) | | 1.5 | | 3.6 | V |
| V _{IL} | Low-level input voltage (CDP_ENZ) | | 0 | | 0.5 | V |
| I _{IL} | Low level input current | V _{IL} = 0V | | | ±20 | μA |
| I _{IH} | High level input current | V _{IH} = 3.6 V | | | ±15 | μA |
| INPUT RX_SEN (3-level input, for mid level leave pin floating) | | | | | | |
| V _{IH(Max)} | Maximum High level input voltage | VCC = 2.3V to 6.5V | | | 5.0 | V |
| V _{IH(Min)} | Minimum High level input voltage | VCC > 4.5V | 3.3 | | | V |
| | | VCC = 2.3V to 4.5V (% of VCC) | 75 | | | % |
| V _{IL} | Low level input voltage | VCC > 4.5V | | | 0.75 | V |
| | | VCC = 2.3V to 4.5V (% of VCC) | | | 15 | % |
| INPUT BOOST | | | | | | |
| R _{BOOST_LVL0} | External pulldown resistor for BOOST Level 0 | | | | 160 | Ω |
| R _{BOOST_LVL1} | External pulldown resistor for BOOST Level 1 | | 1.5 | 1.8 | 2 | kΩ |
| R _{BOOST_LVL2} | External pulldown resistor for BOOST Level 2 | | 3.4 | 3.6 | 3.96 | kΩ |
| R _{BOOST_LVL3} | External pulldown resistor for BOOST Level 3 to remove upper limit for resistor value, can be left open | | 7.5 | | | kΩ |
| OUTPUTS CD, ENA_HS | | | | | | |
| V _{OH} | High level output voltage for CD and ENA_HS | I _o = −50 μA, VCC >= 3.0V | 2.5 | | | V |
| V _{OH} | High level output voltage for CD | I _o = −25 μA, VCC = 2.3V | 1.7 | | | V |

6.5 Electrical Characteristics (続き)

Over operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-----------------------|---|---|-----|--------------------|-----|------------|
| V _{OH} | High level output voltage for ENA_HS | I _O = -25 μ A, V _{CC} = 2.3V | 1.8 | | | V |
| V _{OL} | Low level output voltage for CD and ENA_HS | I _O = 50 μ A | | | 0.3 | V |
| I²C | | | | | | |
| C _{I2C_BUS} | I ² C Bus Capacitance | | 4 | | 150 | pF |
| I _{OL} | I ² C open drain output current | V _{OL} = 0.4V | 1.5 | | | mA |
| V _{IL} | 2.3V ≤ V _{CC} ≤ 4.3V, V _{I2C_BUS} = 1.8V +/-10% | R _{Pull-up} = 1.6k Ω to 2.5k Ω , % of V _{I2C_BUS} | | | 25 | % |
| V _{IL} | V _{I2C_BUS} = 3.3V +/-10% | R _{Pull-up} = 2.8k Ω to 7k Ω , % of V _{I2C_BUS} | | | 25 | % |
| V _{IH} | 2.3V ≤ V _{CC} ≤ 4.3V, V _{I2C_BUS} = 1.8V +/-10% | R _{Pull-up} = 1.6k Ω to 2.5k Ω , % of V _{I2C_BUS} | 80 | | | % |
| V _{IH} | V _{I2C_BUS} = 3.3V +/-10% | R _{Pull-up} = 2.8k Ω to 7k Ω , % of V _{I2C_BUS} | 75 | | | % |
| R _{Pull-up} | V _{I2C_BUS} = 1.8V +/-10% | | 1.6 | 2 | 2.5 | k Ω |
| R _{Pull-up} | V _{I2C_BUS} = 3.3V +/-10% | | 2.8 | 4.7 | 7 | k Ω |
| SCL Frequency | | | | | 400 | kHz |
| DxP, DxM | | | | | | |
| C _{IO_DXX} | Capacitance to GND | Measured with VNA at 240 MHz, V _{CC} supply stable, Redriver off | | 2.5 | | pF |

(1) All typical values are at V_{CC} = 5 V, and T_A = 25°C.

6.6 Switching Characteristics

Over operating free-air temperature range (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP ⁽¹⁾ | MAX | UNIT |
|-----------------------------|----------------|--|-----|--------------------|-----|------|
| DxP, DxM USB Signals | | | | | | |
| F _{BR_DXX} | Bit Rate | USB channel = HS mode. 480 Mbps traffic. V _{CC} supply stable | | | 480 | Mbps |
| t _{R/F_DXX} | Rise/Fall time | | 100 | | | ps |

(1) All typical values are at V_{CC} = 5 V, and T_A = 25°C.

6.7 Timing Requirements

| | | MIN | NOM | MAX | UNIT |
|------------------------|---|-----|-----|------|---------|
| POWER UP TIMING | | | | | |
| T_{RSTN_PW} | Minimum width to detect a valid RSTN signal assert when the pin is actively driven low | 100 | | | μ s |
| T_{STABLE} | VCC must be stable before RSTN de-assertion | 300 | | | μ s |
| T_{READY} | Maximum time needed for the device to be ready after RSTN is de-asserted. | | | 500 | μ s |
| T_{RAMP} | V_{CC} ramp time | | | 100 | ms |
| T_{RAMP} | V_{CC} ramp time | 0.2 | | | ms |
| I2C (STD) | | | | | |
| t_{SUSTO} | Stop setup time, SCL ($T_r=600$ ns-1000ns), SDA ($T_f=6.5$ ns-106.5ns), 100kHz STD | 4 | | | μ s |
| t_{HDSTA} | Start hold time, SCL ($T_r=600$ ns-1000ns), SDA ($T_f=6.5$ ns-106.5ns), 100kHz STD | 4 | | | μ s |
| t_{SUSTA} | Start setup time, SCL ($T_r=600$ ns-1000ns), SDA ($T_f=6.5$ ns-106.5ns), 100kHz STD | 4.7 | | | μ s |
| t_{SUDAT} | Data input or False start/stop, setup time, SCL ($T_r=600$ ns-1000ns), SDA ($T_f=6.5$ ns-106.5ns), 100kHz STD | 250 | | | ns |
| t_{HDDAT} | Data input or False start/stop, hold time, SCL ($T_r=600$ ns-1000ns), SDA ($T_f=6.5$ ns-106.5ns), 100kHz STD | 5 | | | μ s |
| t_{BUF} | Bus free time between START and STOP conditions | 4.7 | | | μ s |
| t_{LOW} | Low period of the I2C clock | 4.7 | | | μ s |
| t_{HIGH} | High period of the I2C clock | 4 | | | μ s |
| t_F | Fall time of both SDA and SCL signals | | | 300 | ns |
| t_R | Rise time of both SDA and SCL signals | | | 1000 | ns |
| I2C (FM) | | | | | |
| t_{SUSTO} | Stop setup time, SCL ($T_r=180$ ns-300ns), SDA ($T_f=6.5$ ns-106.5ns), 400 kHz FM | 0.6 | | | μ s |
| t_{HDSTA} | Start hold time, SCL ($T_r=180$ ns-300ns), SDA ($T_f=6.5$ ns-106.5ns), 400 kHz FM | 0.6 | | | μ s |
| t_{SUSTA} | Start setup time, SCL ($T_r=180$ ns-300ns), SDA ($T_f=6.5$ ns-106.5ns), 400 kHz FM | 0.6 | | | μ s |
| t_{SUDAT} | Data input or False start/stop, setup time, SCL ($T_r=180$ ns-300ns), SDA ($T_f=6.5$ ns-106.5ns), 400 kHz FM | 100 | | | ns |
| t_{HDDAT} | Data input or False start/stop, hold time, SCL ($T_r=180$ ns-300ns), SDA ($T_f=6.5$ ns-106.5ns), 400 kHz FM | 0 | | | μ s |
| t_{BUF} | Bus free time between START and STOP conditions | 1.3 | | | μ s |
| t_{LOW} | Low period of the I2C clock | 1.3 | | | μ s |
| t_{HIGH} | High period of the I2C clock | 0.6 | | | μ s |
| t_F | Fall time of both SDA and SCL signals | | | 300 | ns |
| t_R | Rise time of both SDA and SCL signals | | | 300 | ns |


7 Detailed Description

7.1 Overview

The TUSB2161 is a USB High-Speed (HS) signal conditioner designed to compensate for ISI signal loss in a transmission channel. TUSB2161 has a patented design for USB Low Speed (LS) and Full Speed (FS) signals. It does not alter the signal characteristics. HS signals are compensated. The design is compatible with USB On-The-Go (OTG) and Battery Charging (BC) specifications.

Programmable signal gain through an external resistor permits fine tuning device performance to optimize signals. This helps pass USB HS electrical compliance tests at the connector. Additional RX sensitivity, tuned by external pull-up resistor and pull-down resistor, allows to overcome attenuation in cables. The TUSB2161 allows application in series to cover longer distances, or high loss transmission paths. A maximum of 4 devices can be daisy-chained.

7.2 Functional Block Diagram

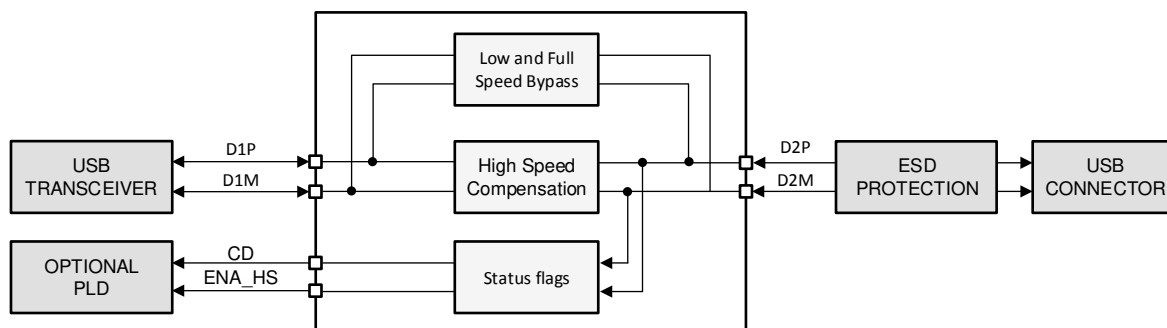

Copyright © 2018, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 High-Speed Boost

The high-speed booster (combination of edge boost and DC boost) improves the eye width for USB2.0 high-speed signals. It is direction independent and by that is compatible to OTG systems. The BOOST pin is configuring the booster strength with different values of pull down resistors to set 4 levels of boosts, alternatively the boost level can be set through the I2C register according to [セクション 7.4.6](#). Internal circuitry of the signal conditioner reduces possible overshoot.

7.3.2 RX Sensitivity

The RX_SEN pin is a tri-level pin. It is used to set the gain of the device according to system channel loss. RX sensitivity can be increased to recover incoming signals with low vertical eye opening to be able to boost weak signals and helps overcoming high attenuation.

7.4 Device Functional Modes

7.4.1 Low-Speed (LS) Mode

TUSB2161 automatically detects a LS connection and does not enable signal compensation. CD pin is asserted high but ENA_HS will be low.

7.4.2 Full-Speed (FS) Mode

TUSB2161 automatically detects a FS connection and does not enable signal compensation. CD pin is asserted high but ENA_HS will be low.

7.4.3 High-Speed (HS) Mode

TUSB2161 automatically detects a HS connection and will enable signal compensation as determined by the configuration of the RX_SEN pin and the external pull down resistance on its BOOST pin.

CD pin and ENA_HS pin are asserted high when high-speed boost is active.

7.4.4 High-Speed Downstream Port Electrical Compliance Test Mode

TUSB216I will detect HS compliance test fixture and enter downstream port high-speed eye diagram test mode. CD pin will be low and ENA_HS pin is asserted high when TUSB216I is in HS eye compliance test mode.

If RSTN pin is asserted low and de-asserted high while TUSB216I is operating in HS functional mode, TUSB216I will transition to HS eye compliance test mode and CD asserts low and ENA_HS remains high. When this occurs signal compensation is enabled.

7.4.5 Shutdown Mode

TUSB216I can be disabled when its RSTN pin is asserted low. DP, DM traces are continuous through the device in shutdown mode. The USB channel is still fully operational, but there is neither signal compensation, nor any indication from the CD pin as to the status of the channel.

表 7-1. CD and ENA_HS Pins in Different Modes

| MODE | CD | ENA_HS |
|--|------|--------|
| Low-speed | HIGH | LOW |
| Full-speed | HIGH | LOW |
| High-speed | HIGH | HIGH |
| High-speed downstream port electrical test | LOW | HIGH |
| Shutdown | LOW | LOW |

7.4.6 I²C Mode

TUSB216I supports 100 and 400 kHz I2C for device configuration, status read back and test purposes. For detail electrical and functional specifications refer to I2C Bus Specification – STANDARD and FAST MODE. This controller is enabled after SCL and SDA pins are sampled high shortly after return from shutdown. In this mode, the CSR can be accessed by I2C read/write transaction to 7-bit slave address 0x2C. It is advised to set CFG_ACTIVE bit before changing values. This halts the FSM, and reset it after all changes are made. This ensure proper startup into high-speed mode.

7.4.7 BC 1.2 Battery Charging Controller

The TUSB216I main function is a signal conditioner offering the boost and pre-equalization features to the incoming DP/DM signals. For applications in which USB host or hub does not provide USB BC charging controller functionality, the TUSB216I can perform this task when CDP_ENZ is low and BC 1.2 CDP Controller is enabled. When battery charging CDP controller feature is enabled (CDP_ENZ=low) TUSB216I supports CDP charging downstream port functionality. CDP_ENZ has an internal pull up when the pin is left unconnected CDP controller will be disabled.

表 7-2. TUSB216I Battery Charging Controller Modes

| Pin 11 (CDP_ENZ) | CDP |
|------------------|-----|
| High | NO |
| Low | YES |

7.5 TUSB216 Registers

表 7-3 lists the memory-mapped registers for the TUSB216 registers. All register offset addresses not listed in 表 7-3 should be considered as reserved locations and the register contents should not be modified.

表 7-3. TUSB216 Registers

| Offset | Acronym | Register Name | Section |
|--------|---------------|--|--------------------|
| 0x1 | EDGE_BOOST | This register is setting EDGE BOOST level. | Go |
| 0x3 | CONFIGURATION | This register is selecting device mode. | Go |

表 7-3. TUSB216 Registers (続き)

| Offset | Acronym | Register Name | Section |
|--------|----------|--|--------------------|
| 0xE | DC_BOOST | This register is setting DC BOOST level. | Go |
| 0x25 | RX_SEN | This register is setting RX Sensitivity level. | Go |

Complex bit access types are encoded to fit into small table cells. 表 7-4 shows the codes that are used for access types in this section.

表 7-4. TUSB216 Access Type Codes

| Access Type | Code | Description |
|------------------------|--------|--|
| Read Type | | |
| RH | H R | Set or cleared by hardware Read |
| Write Type | | |
| W | W | Write |
| Reset or Default Value | | |
| -n | | Value after reset or the default value |

7.5.1 EDGE_BOOST Register (Offset = 0x1) [reset = X]

EDGE_BOOST is shown in 図 7-1 and described in 表 7-5.

Return to [Summary Table](#).

This register is setting EDGE BOOST level.

図 7-1. EDGE_BOOST Register

| | | | | | | | |
|---------|---|---|---|----------|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| ACB_LVL | | | | RESERVED | | | |
| RH/W-X | | | | RH/W-X | | | |

表 7-5. EDGE_BOOST Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-----|----------|------|-------|---|
| 7-4 | ACB_LVL | RH/W | X | XXXXb (sampled at startup from BOOST pin) 0000b to 1111b range 0x0 = BOOST PIN LEVEL 0 (lowest edge boost setting) 0x3 = BOOST PIN LEVEL 1 0x6 = BOOST PIN LEVEL 2 0xA = BOOST PIN LEVEL 3 0xF = (highest edge boost setting) |
| 3-0 | RESERVED | RH/W | X | These bits are reserved bits and set by hardware at reset. When this register is modified the software should first read these reserved bits and rewrite with the same values |

7.5.2 CONFIGURATION Register (Offset = 0x3) [reset = X]

CONFIGURATION is shown in [図 7-2](#) and described in [表 7-6](#).

Return to [Summary Table](#).

This register is selecting device mode.

図 7-2. CONFIGURATION Register

| | | | | | | | |
|----------|---|---|---|---|---|---|------------|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | | | | CFG_ACTIVE |
| RH/W-X | | | | | | | RH/W-0x1 |

表 7-6. CONFIGURATION Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-----|------------|------|-------|---|
| 7-1 | RESERVED | RH/W | X | These bits are reserved bits and set by hardware at reset. When this register is modified the software should first read these reserved bits and rewrite with the same values |
| 0 | CFG_ACTIVE | RH/W | 0x1 | Configuration mode After reset, if I2C mode is true (SCL and SDA are both pulled high) set the bit to get into configuration mode and clear to return to normal mode. 0x0 = NORMAL MODE 0x1 = CONFIGURATION MODE |

7.5.3 DC_BOOST Register (Offset = 0xE) [reset = X]

DC_BOOST is shown in [図 7-3](#) and described in [表 7-7](#).

Return to [Summary Table](#).

This register is setting DC BOOST level.

図 7-3. DC_BOOST Register

| | | | | | | | |
|----------|---|---|---|---------|---|---|---|
| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | | | | DCB_LVL | | | |
| RH/W-X | | | | RH/W-X | | | |

表 7-7. DC_BOOST Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-----|----------|------|-------|--|
| 7-4 | RESERVED | RH/W | X | These bits are reserved bits and set by hardware at reset. When this register is modified the software should first read these reserved bits and rewrite with the same values |
| 3-0 | DCB_LVL | RH/W | X | XXXXb (sampled at startup from BOOST pin) 0000b to 1111b range 0x0 = BOOST PIN LEVEL 0 (lowest dc boost setting) 0x2 = BOOST PIN LEVEL 1 and 2 0x6 = BOOST PIN LEVEL 3 0xF = (highest dc boost setting) |

7.5.4 RX_SEN Register (Offset = 0x25) [reset = X]

RX_SEN is shown in [図 7-4](#) and described in [表 7-8](#).

Return to [Summary Table](#).

This register is setting RX Sensitivity level.

図 7-4. RX_SEN Register

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|---|---|---|---|---|
| RX_SEN | | | | | | | |
| RH/W-X | | | | | | | |

表 7-8. RX_SEN Register Field Descriptions

| Bit | Field | Type | Reset | Description |
|-----|--------|------|-------|---|
| 7-0 | RX_SEN | RH/W | X | XXXXb (sampled at startup from RX_SEN pin) 00000000b to 11111111b range 0x0 = RX_SEN LEVEL LOW 0x33 = RX_SEN LEVEL MID 0x66 = RX_SEN LEVEL HIGH 0xFF = (highest setting) |

8 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。


8.1 Application Information

The purpose of the TUSB216I is to re-store the signal integrity of a USB High-speed channel up to the USB connector. The loss in signal quality stems from reduced channel bandwidth due to high loss PCB trace and other components that contribute a capacitive load. This can cause the channel to fail the USB near end eye mask. Proper use of the TUSB216I can help to pass this eye mask.

A secondary purpose is to use the CD pin of the TUSB216I to control other blocks on the customer platform, if so desired.

8.2 Typical Application

A typical application for TUSB216I is shown in [Figure 8-1](#). In this setup, D2P and D2M face the USB connector while D1P and D1M face the USB host. The orientation may be reversed [that is, D2 faces transceiver and D1 faces connector].

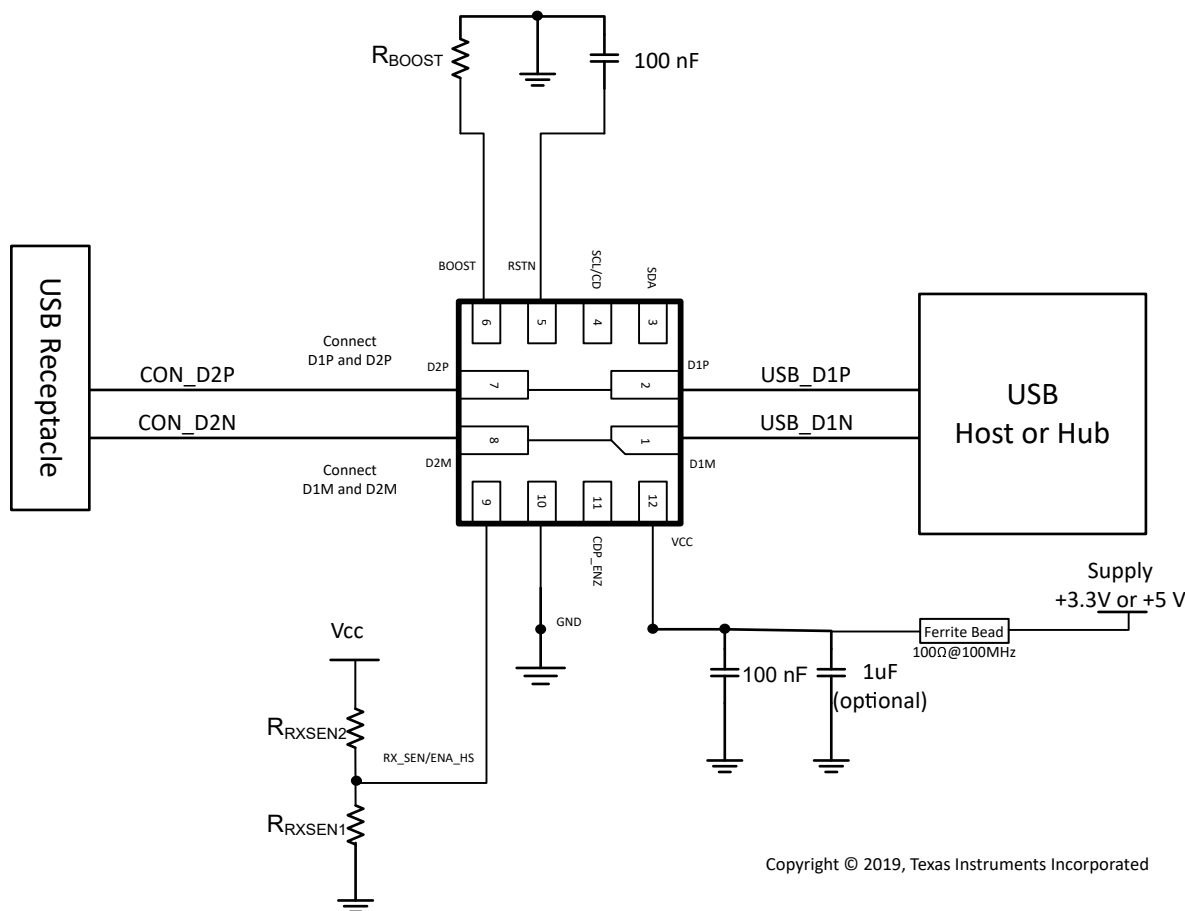

Copyright © 2019, Texas Instruments Incorporated

Figure 8-1. TUSB216I Reference Schematic (Design Example with CDP disabled), CDP_ENZ Can Be Left Floating but an Option for a Decoupling Capacitor of 0.1 μ F is Recommended So the Design is Compatible with Older Devices: TUSB211, TUSB212, TUSB214

8.2.1 Design Requirements

TUSB2161 requires a valid reset signal as described in the *Power Supply Recommendations* section. The capacitor at RSTN pin is not required if a micro controller drives the RSTN pin according to recommendations.

For this design example, use the parameters shown in 表 8-1, 表 8-2 and 表 8-3.

表 8-1. Design Parameters for 5-V Supply With High Loss System

| PARAMETER | | | | VALUE ⁽¹⁾ |
|--|-------------------------------|----------------------|--------------|---|
| V _{CC} | | | | 5 V ±10% |
| I ² C support required in system (Yes/No) | | | | No |
| Edge and DC Boost | R _{BOOST} | | BOOST Level | Boost Level 1: R _{BOOST} = 1.8 kΩ |
| | 0-Ω | | 0 | |
| | 1.8 kΩ ±1% | | 1 | |
| | 3.6 kΩ ± 1% | | 2 | |
| | Do Not Install (DNI) | | 3 | |
| RX Sensitivity | R _{RXSEN1} | R _{RXSEN2} | RX_SEN Level | High RX Sensitivity Level: R _{RXSEN1} = 37.5 kΩ R _{RXSEN2} = 12.5 kΩ |
| | 22 kΩ - 40 kΩ (27 kΩ typical) | Do Not Install (DNI) | Low | |
| | Do Not Install (DNI) | Do Not Install (DNI) | Medium | |
| | 37.5 kΩ ⁽²⁾ | 12.5 kΩ | High | |

- (1) These parameters are starting values for a high loss system. Further tuning might be required based on specific host or device as well as cable length and loss profile. These settings are not specific to a 5 V supply system could be applicable to 3.3 V supply system as well.
- (2) This resistor is needed for a 5 V supply to divide the voltage down so the RX_SEN pin voltage does not exceed 5.0 V.

表 8-2. Design Parameters for 3.3-V Supply With Low to Medium Loss System

| PARAMETER | | | | VALUE ⁽¹⁾ |
|--|-------------------------------|-------------------------------|--------------|---|
| V _{CC} | | | | 3.3 V ±10% |
| I ² C support required in system (Yes/No) | | | | No |
| Edge and DC Boost | R _{BOOST} | | BOOST Level | Boost Level 0: R _{BOOST} = 0-Ω |
| | 0-Ω | | 0 | |
| | 1.8 kΩ ±1% | | 1 | |
| | 3.6 kΩ ±1% | | 2 | |
| | Do Not Install (DNI) | | 3 | |
| RX Sensitivity | R _{RXSEN1} | R _{RXSEN2} | RX_SEN Level | Medium RX Sensitivity Level: R _{RXSEN1} = DNI R _{RXSEN2} = DNI |
| | 22 kΩ – 40 kΩ (27 kΩ typical) | Do Not Install (DNI) | Low | |
| | Do Not Install (DNI) | Do Not Install (DNI) | Medium | |
| | Do Not Install (DNI) | 22 kΩ – 40 kΩ (27 kΩ typical) | High | |

- (1) These parameters are starting values for a low to medium loss system. Further tuning might be required based on specific host or device as well as cable length and loss profile. These settings are not specific to a 3.3 V supply system could be applicable to 5 V supply system as well.

表 8-3. Design Parameters for 2.3-V to 4.3-V VBAT Supply With Low to Medium Loss System

| PARAMETER | | | | VALUE ⁽¹⁾ |
|--|-------------------------------|---------------------------|---------------------|---|
| V _{CC} | | | | 2.3 V to 4.3V |
| I ² C support required in system (Yes/No) | | | | No |
| Edge and DC Boost | | R_{BOOST} | BOOST Level | Boost Level 0: R _{BOOST} = 0-Ω |
| | | 0-Ω | 0 | |
| | | 1.8 kΩ ±1% | 1 | |
| | | 3.6 kΩ ±1% | 2 | |
| | | Do Not Install (DNI) | 3 | |
| RX Sensitivity | R_{RXSEN1} | R_{RXSEN2} | RX_SEN Level | Medium RX Sensitivity Level: R _{RXSEN1} = DNI R _{RXSEN2} = DNI |
| | 22 kΩ – 40 kΩ (27 kΩ typical) | Do Not Install (DNI) | Low | |
| | Do Not Install (DNI) | Do Not Install (DNI) | Medium | |
| | 37.5 kΩ ⁽²⁾ | 12.5 kΩ | High | |

- (1) These parameters are starting values for a low to medium loss system. Further tuning might be required based on specific host or device as well as cable length and loss profile. These settings are not specific to a 2.3 V – 4.3 V supply system could be applicable to 5 V supply system as well.
- (2) This resistor is needed for a VBAT supply (2.3 V – 4.3 V) to divide the voltage down so the RX_SEN pin voltage does not exceed 5.0 V.

8.2.2 Detailed Design Procedure

The ideal BOOST setting is dependent upon the signal chain loss characteristics of the target platform. The recommendation is to start with BOOST level 0, and then increment to BOOST level 1, and so on. Same applies to the RX sensitivity setting where it is recommended to plan for the required pads or connections to change boost settings, but to start with RX sensitivity level Low.

In order for the TUSB216I to recognize any change to the BOOST setting, the RSTN pin must be toggled. This is because the BOOST pin is latched on power up and the pin is ignored thereafter.

注

The TUSB216I compensates for extra attenuation in the signal path according to the configuration of the RX_SEN pin. This maximum recommended voltage for this pin is 5 V when selecting the highest RX sensitivity level.

Placement of the device is also dependent on the application goal. 表 8-4 summarizes our recommendations.

表 8-4. Platform Placement Guideline

| PLATFORM GOAL | SUGGESTED TUSB216I PLACEMENT |
|--|--|
| Pass USB Near End Mask at the receptacle | Close to measurement point (connector) |
| Pass USB Far End Eye Mask at the plug | Close to USB PHY |
| Cascade multiple TUSB216Is to improve device enumeration | Midway between each USB interconnect |

表 8-5. Table of Recommended Settings

| BOOST and RX_SEN settings ⁽¹⁾ for channel loss | | |
|--|---------|----------------|
| Pre-channel cable length (Between USB PHY and TUSB216I) | BOOST | RX_SEN |
| 0-3 meter | Level 0 | Medium or High |
| 2-5 meter | Level 1 | Medium or High |
| Post-channel cable length (Between TUSB216I and inter-connect) | BOOST | RX_SEN |
| 0-2 meter | Level 0 | Medium or High |
| 1-4 meter | Level 1 | Medium or High |

(1) These parameters are starting values for different cable lengths. Further tuning might be required based on specific host or device as well as cable length and loss profile.

8.2.2.1 Test Procedure to Construct USB High-speed Eye Diagram

注

USB-IF certification tests for High-speed eye masks require the *mandated use* of the USB-IF developed test fixtures. These test fixtures do not require the use of oscilloscope probes. Instead they use SMA cables. More information can be found at the USB-IF Compliance Updates Page. It is located under the *Electrical Specifications* section, ID 86 dated March 2013.

The following procedure must be followed before using any oscilloscope compliance software to construct a USB High-speed Eye Mask:

8.2.2.1.1 For a Host Side Application

1. Configure the TUSB216I to the desired BOOST setting
2. Power on (or toggle the RSTN pin if already powered on) the TUSB216I
3. Using SMA cables, connect the oscilloscope and the USB-IF host-side test fixture to the TUSB216I
4. Enable the host to transmit USB TEST_PACKET
5. Execute the oscilloscope USB compliance software.
6. Repeat the above steps in order to re-test TUSB216I with a different BOOST setting (must reset to change)

8.2.2.1.2 For a Device Side Application

1. Configure the TUSB216I to the desired BOOST setting
2. Power on (or toggle the RSTN pin if already powered on) the TUSB216I
3. Connect a USB host, the USB-IF device-side test fixture, and USB device to the TUSB216I. Ensure that the USB-IF device test fixture is configured to the 'INIT' position
4. Allow the host to enumerate the device
5. Enable the device to transmit USB TEST_PACKET
6. Using SMA cables, connect the oscilloscope to the USB-IF device-side test fixture and ensure that the device-side test fixture is configured to the 'TEST' position.
7. Execute the oscilloscope USB compliance software.
8. Repeat the above steps in order to re-test TUSB216I with a different BOOST setting (must reset to change)

8.2.3 Application Curves

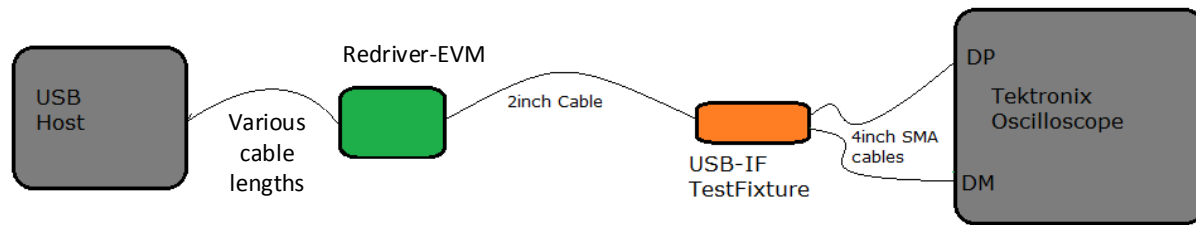


図 8-2. Near End Eye Measurement Set-Up With Pre-Channel Cable

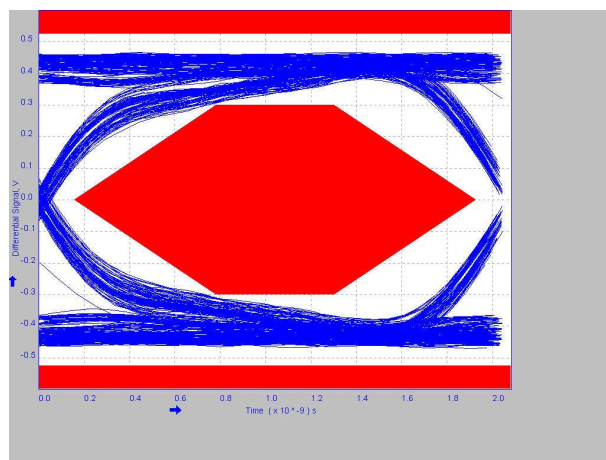


図 8-3. 2 Meter Pre-Channel Without TUSB2161

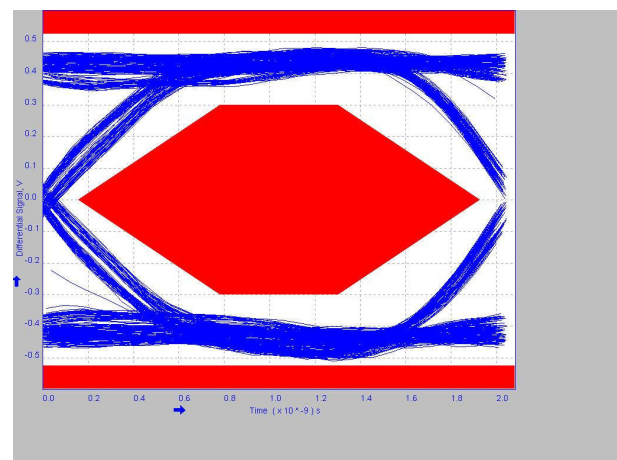


図 8-4. 2 Meter Pre-Channel With TUSB2161 BOOST=1
RX_SEN=MED

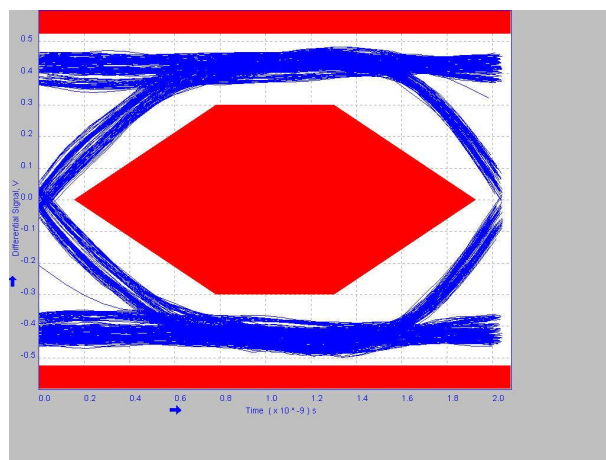


図 8-5. 2 Meter Pre-Channel With TUSB2161 BOOST=0
RX_SEN=HIGH

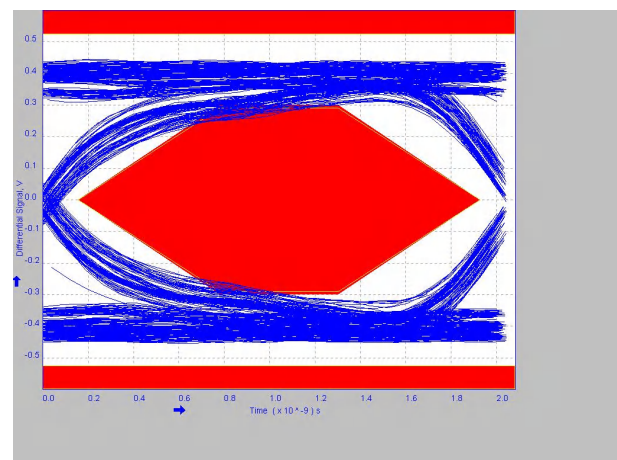


図 8-6. 3 Meter Pre-Channel Without TUSB2161

8.2.3 Application Curves (continued)

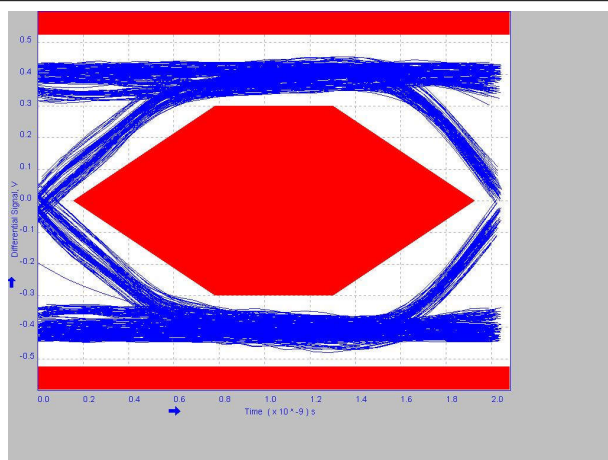


図 8-7. 3 Meter Pre-Channel With TUSB2161 BOOST=0
RX_SEN=HIGH

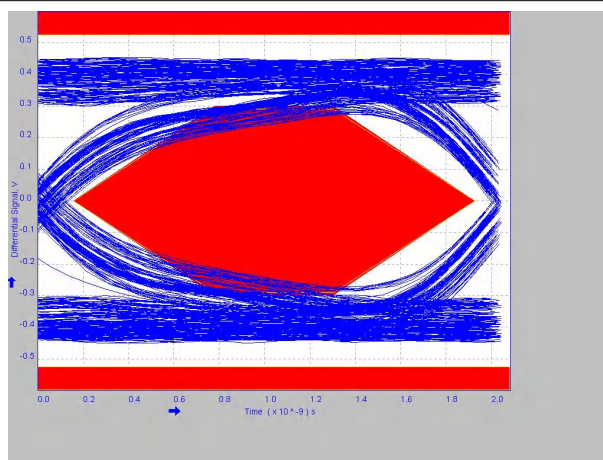


図 8-8. 5 Meter Without TUSB2161

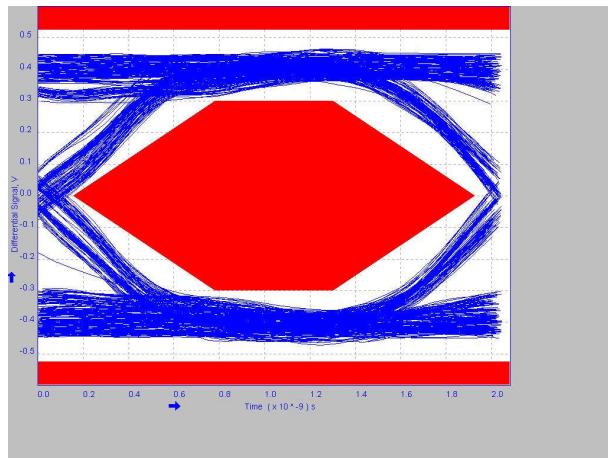


図 8-9. 5 Meter Pre-Channel With TUSB2161 BOOST=1
RX_SEN=MED



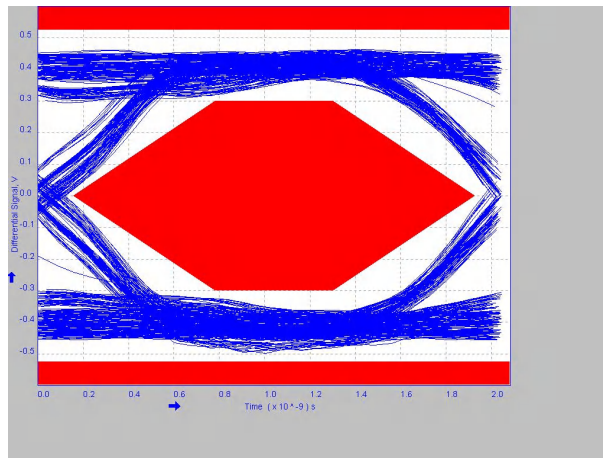


図 8-10. 5 Meter Pre-Channel With TUSB2161 BOOST=2
RX_SEN=MED


8.2.3 Application Curves

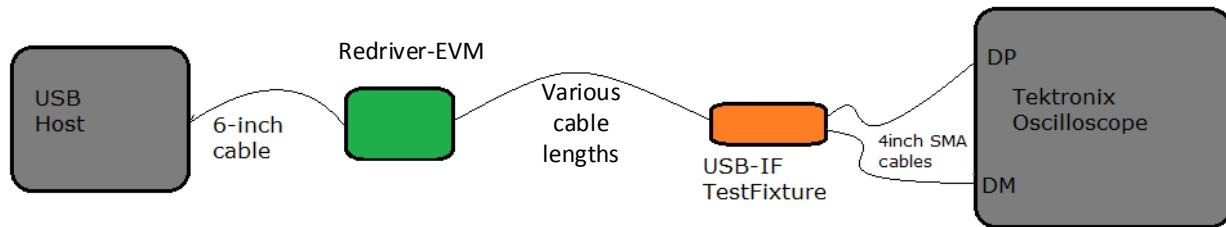


8-11. Near End Eye Measurement Set-Up With Post-Channel Cable

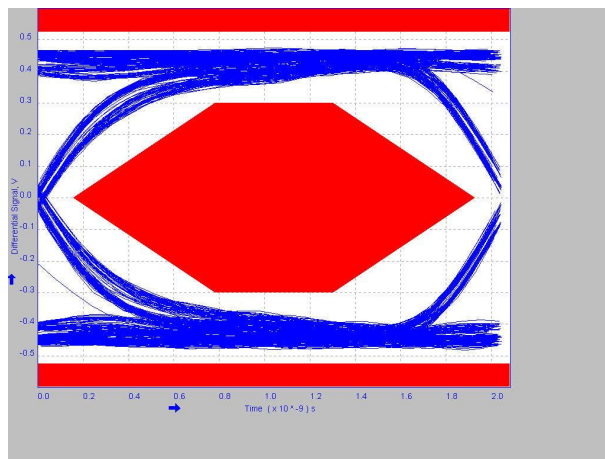


8-12. 6 Inches Post Channel Without TUSB2161

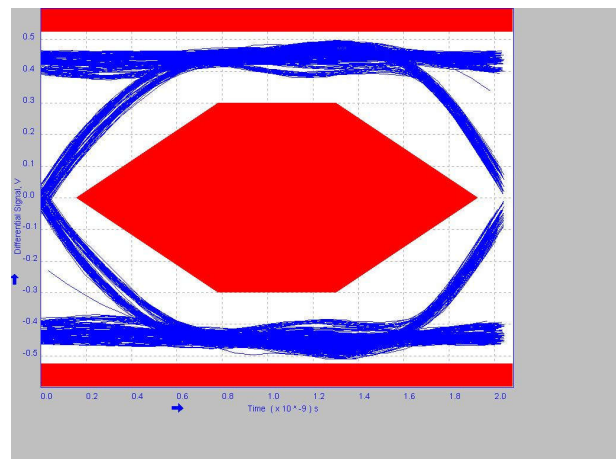

8-13. 6 Inches Post-Channel With TUSB2161 BOOST=0
RX_SEN=HIGH

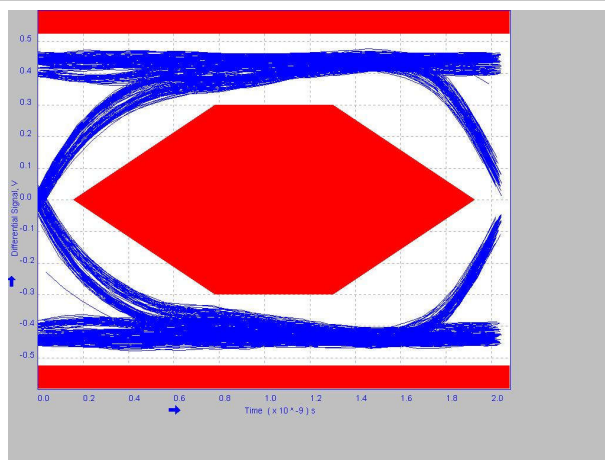

8-14. 1 Meter Post-Channel Without TUSB2161

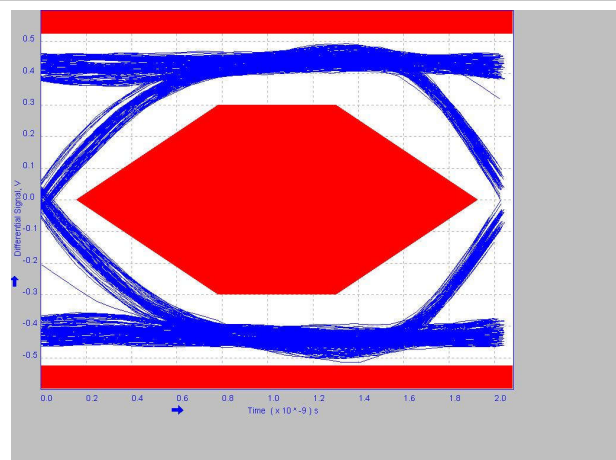

8-15. 1 Meter Post-Channel With TUSB2161 BOOST=0
RX_SEN=MED

8.2.3 Application Curves (continued)

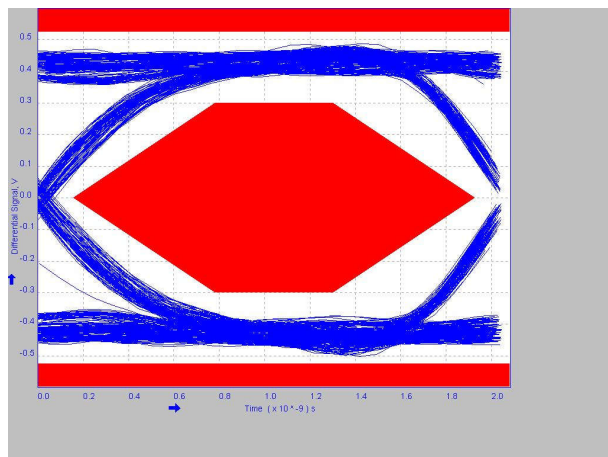


図 8-16. 1 Meter Post-Channel With TUSB2161 BOOST=0
RX_SEN=HIGH

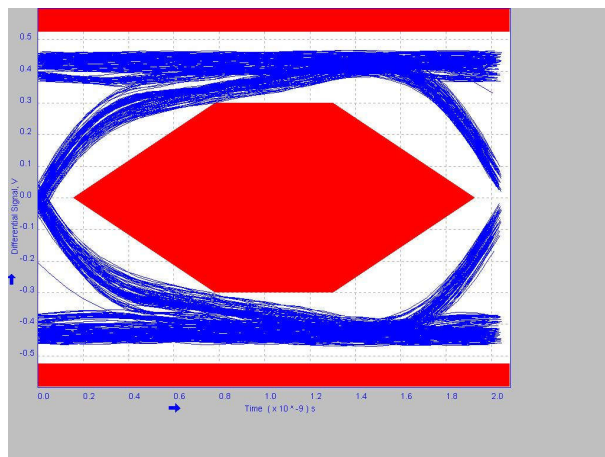


図 8-17. 2 Meter Post-Channel Without TUSB2161

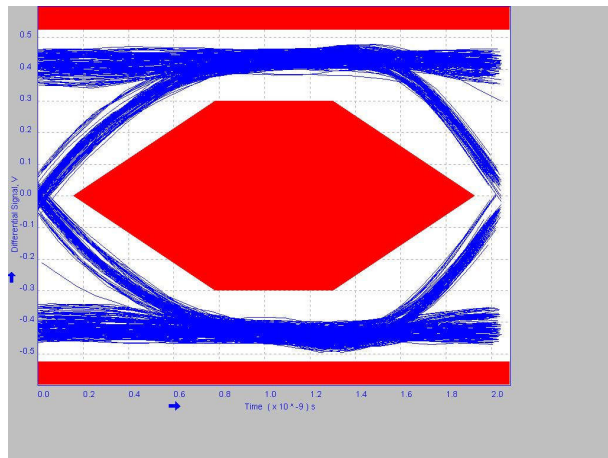


図 8-18. 2 Meter Post-Channel With TUSB2161 BOOST=1
RX_SEN=MED

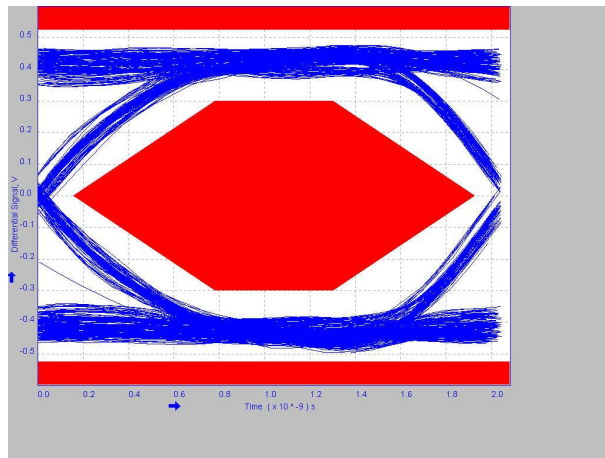


図 8-19. 2 Meter Post-Channel With TUSB2161 BOOST=1
RX_SEN=HIGH

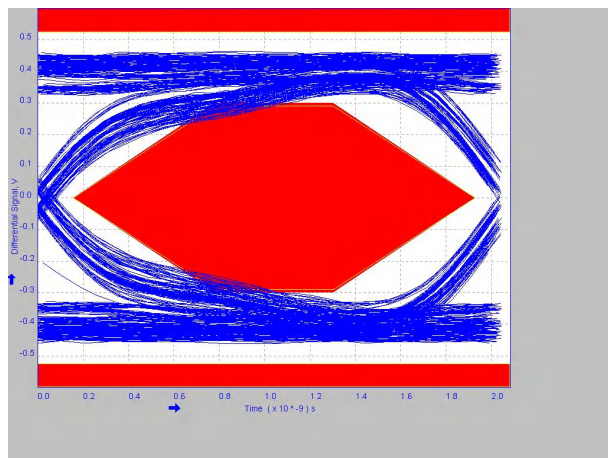


図 8-20. 4 Meter Post-Channel Without TUSB2161

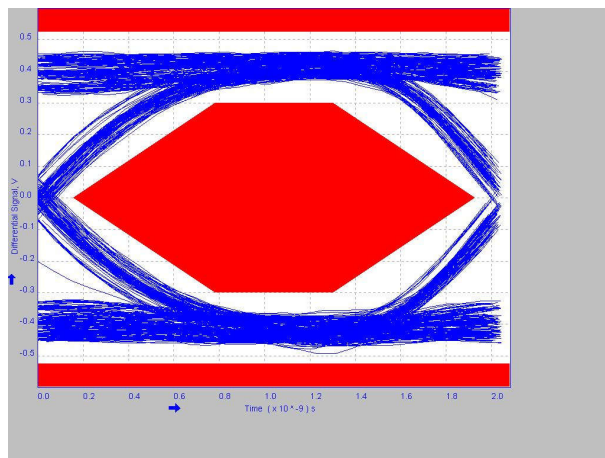


図 8-21. 4 Meter Post-Channel With TUSB2161 BOOST=2
RX_SEN=MED

8.3 Power Supply Recommendations

On power up, the interaction of the RSTN pin and power on ramp could result in digital circuits not being set correctly. The device should not be enabled until the power on ramp has settled to minimum recommended supply voltage or higher to ensure a correct power on reset of the digital circuitry. If RSTN cannot be held low by microcontroller or other circuitry until the power on ramp has settled, then an external capacitor from the RSTN pin to GND is required to hold the device in the low power reset state.

The RC time constant should be larger than five times of the power on ramp time (0 to V_{CC}). With a typical internal pullup resistance of 500 k Ω , the recommended minimum external capacitance is calculated as:

$$[\text{Ramp Time} \times 5] \div [500 \text{ k}\Omega] \quad (1)$$

8.4 Layout

8.4.1 Layout Guidelines

Although the land pattern has matched trace width to pad width, optimal impedance control is based on the user's own PCB stack-up. The recommendation is to maintain 90 Ω differential routing underneath the device.

8.4.2 Layout Example

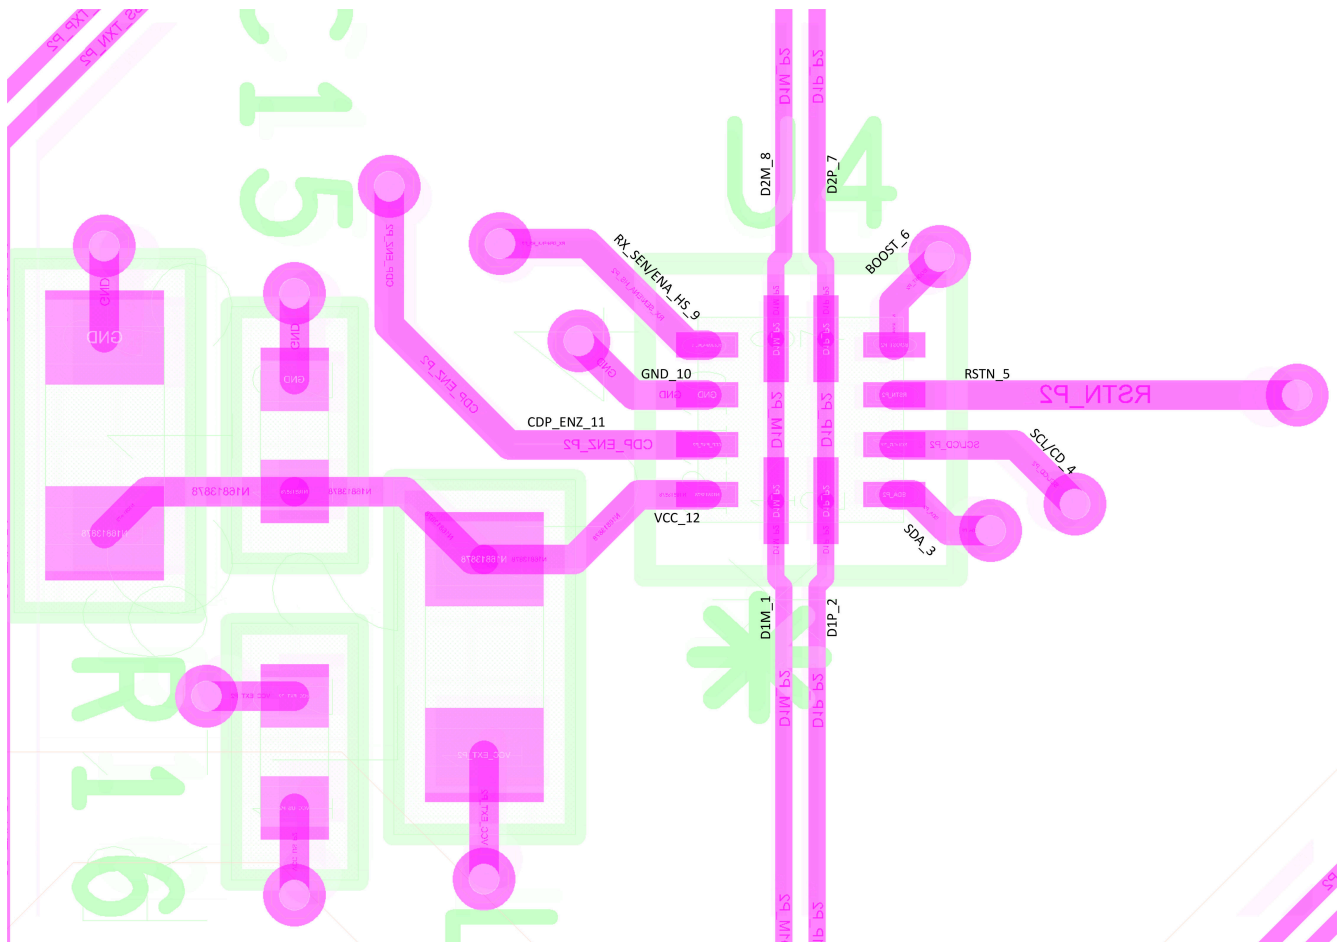


图 8-22. Layout Example

9 Device and Documentation Support

9.1 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

9.2 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

9.3 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

9.4 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

9.5 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

10 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

| Changes from Revision * (March 2021) to Revision A (December 2023) | Page |
|---|------|
| • Added <i>Device Comparison</i> section..... | 2 |
| • Added 400 kHz I2C support..... | 6 |
| • Added timing table for 400 kHz I2C Fast Mode..... | 8 |
| • Added I2C standard and fast mode support in Detailed Description..... | 10 |

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|------------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TUSB216IRWBR | Active | Production | X2QFN (RWB) 12 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 6l |
| TUSB216IRWBR.A | Active | Production | X2QFN (RWB) 12 | 3000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 6l |
| TUSB216IRWBT | Active | Production | X2QFN (RWB) 12 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 6l |
| TUSB216IRWBT.A | Active | Production | X2QFN (RWB) 12 | 250 SMALL T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | 6l |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TUSB216IRWBR | X2QFN | RWB | 12 | 3000 | 180.0 | 9.5 | 1.8 | 1.8 | 0.45 | 4.0 | 8.0 | Q1 |
| TUSB216IRWBT | X2QFN | RWB | 12 | 250 | 180.0 | 9.5 | 1.8 | 1.8 | 0.45 | 4.0 | 8.0 | Q1 |


TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TUSB216IRWBR | X2QFN | RWB | 12 | 3000 | 189.0 | 185.0 | 36.0 |
| TUSB216IRWBT | X2QFN | RWB | 12 | 250 | 189.0 | 185.0 | 36.0 |


RWB0012A



PACKAGE OUTLINE

X2QFN - 0.4 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

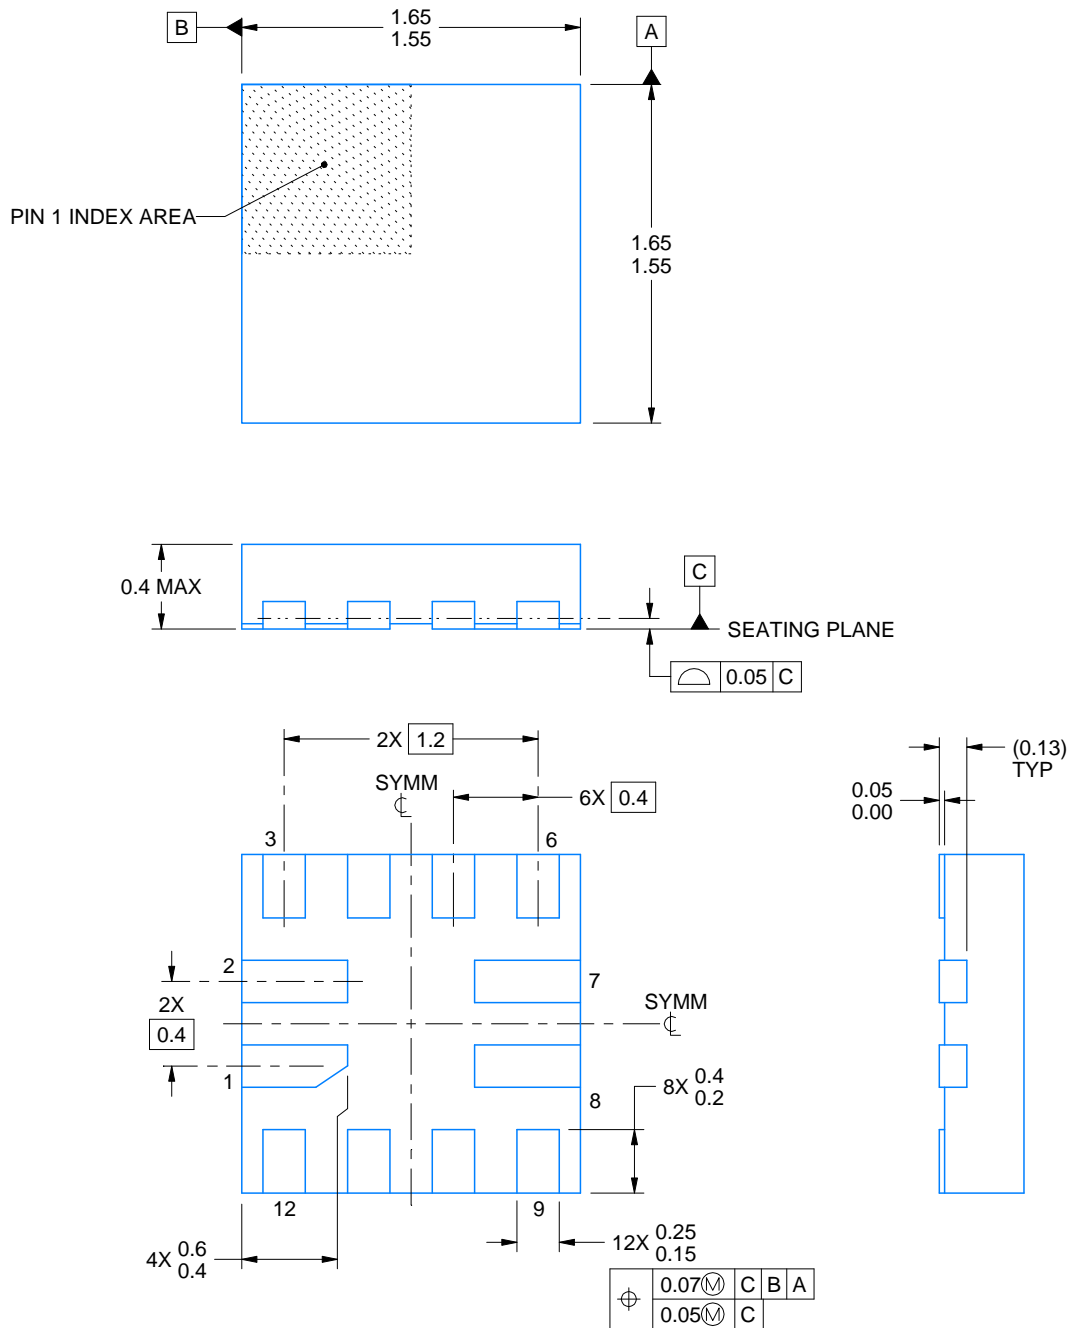

4221631/B 07/2017

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


RWB0012A

X2QFN - 0.4 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

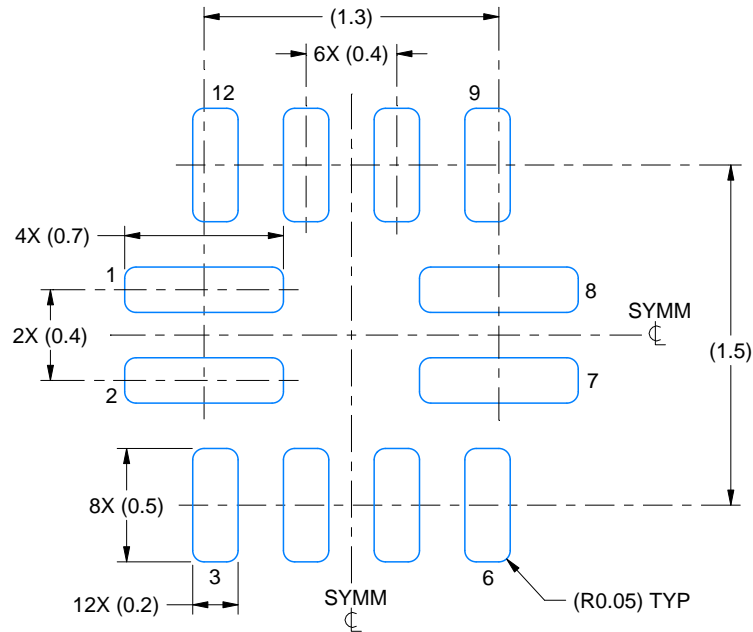

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:30X

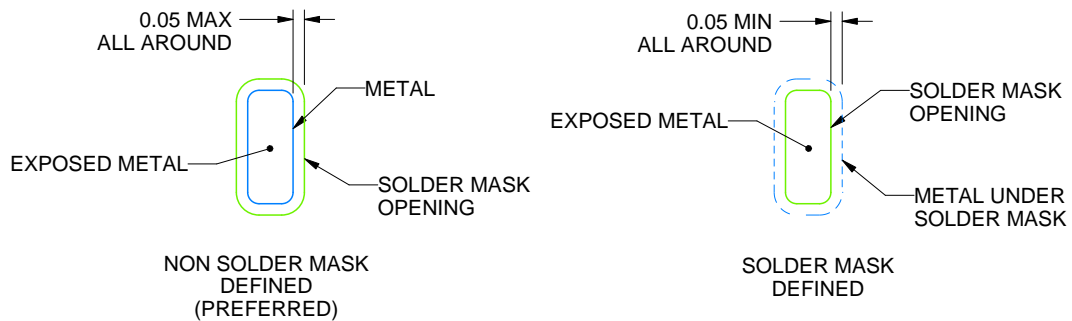

SOLDER MASK DETAILS

4221631/B 07/2017


NOTES: (continued)

3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slue271).

RWB0012A

X2QFN - 0.4 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

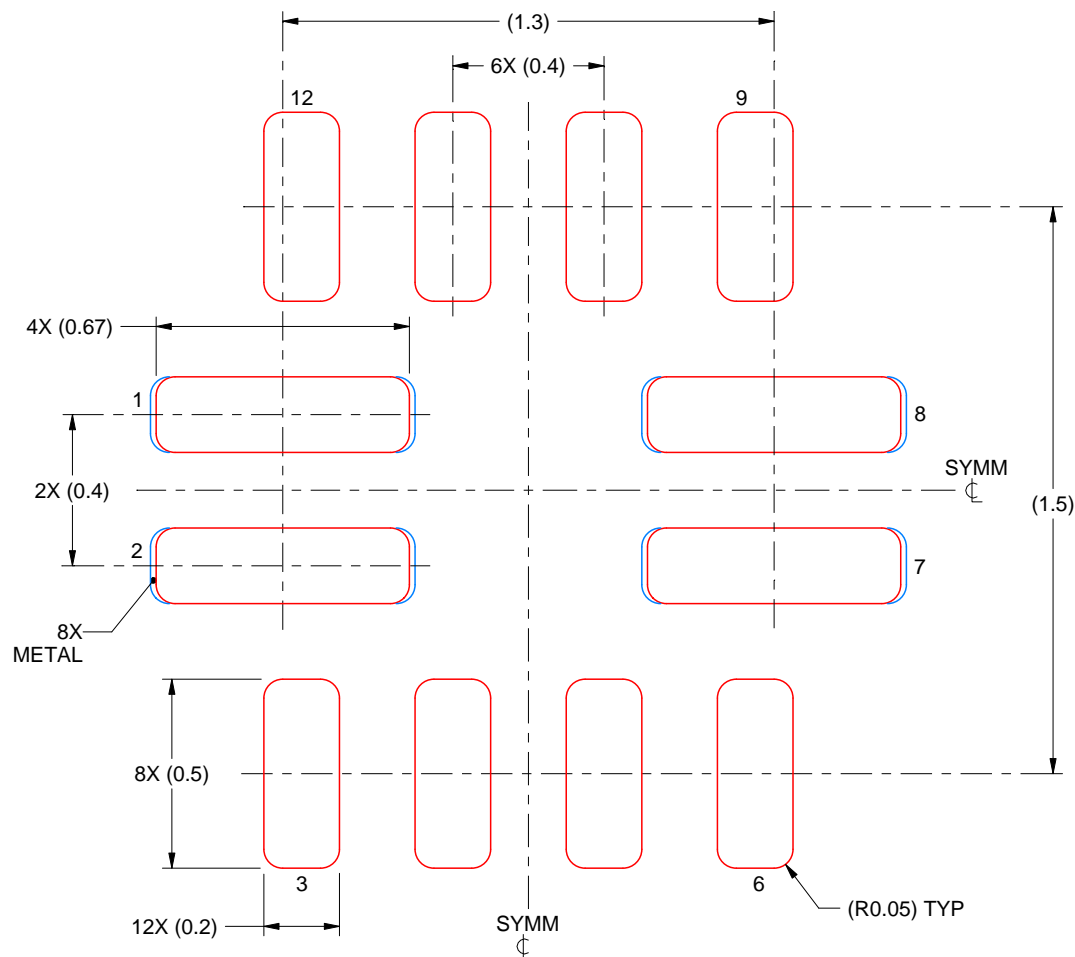

SOLDER PASTE EXAMPLE BASED ON 0.1 mm THICK STENCIL

PADS 1,2,7 & 8
96% PRINTED SOLDER COVERAGE BY AREA
SCALE:50X

4221631/B 07/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月