



TXB0304 自動方向検出機能搭載 4 ビット双方向レベル・シフタ/電圧トランスレータ

1 特長

- 完全に対称な電源電圧：A ポートで 0.9V～3.6V、B ポートで 0.9V～3.6V
- V_{CC} 絶縁機能：どちらかの V_{CC} 入力が高インピーダンス状態になると、すべての出力が高インピーダンス状態になる
- V_{CCA} を基準とする出力イネーブル (OE) 入力回路
- 低消費電力：5 μ A 以下 (I_{CCA} 、 I_{CCB})
- I_{off} により部分的パワーダウン・モードをサポート
- JESD 78、Class II準拠で100mA超のラッチアップ性能
- JESD 22を超えるESD保護
 - 8000V、人体モデル (A114-B)
 - 1000V、荷電デバイス・モデル (C101)

2 アプリケーション

- パーソナル・エレクトロニクス
- 産業用
- エンタープライズ
- 通信機器

3 概要

この4ビット非反転トランスレータは、設定可能な2つの独立した電源レールを採用しています。Aポートは V_{CCA} に追従する設計で、 V_{CCA} は 0.9V～3.6V の電源電圧に対応します。B ポートは V_{CCB} に追従する設計で、 V_{CCB} は 0.9V～3.6V の電源電圧に対応します。このため、1V、1.2V、1.5V、1.8V、2.5V、3.3V の任意の電圧ノード間での低電圧双方向変換が可能です。


TXB0304 の場合、出力イネーブル (OE) 入力が高レベルのとき、全出力が高インピーダンス状態になります。電源オンまたは電源オフ時に確実に高インピーダンス状態になるように、プルダウン抵抗を介して OE を GND に接続する必要があります。この抵抗の最小値は、ドライバの電流ソース能力によって決定します。OE デバイス制御ピンの入力回路は、 V_{CCA} から電力供給されます。このデバイスは、 I_{off} を使用する部分的パワーダウン・アプリケーション用に完全に動作が規定されています。 I_{off} 回路が出力をディセーブルにするため、電源切断時にデバイスに電流が逆流して損傷に至ることを回避できます。TXB0304 と TXBN0304 の唯一の違いは、前者は OE 信号がアクティブ High であり、後者は OE 信号がアクティブ Low であることです。

製品情報⁽¹⁾

型番	パッケージ	本体サイズ (公称)
TXB0304	RUT UQFN (12)	2.00mm × 1.70mm
	RSV UQFN (16)	2.60mm × 1.80mm

(1) 利用可能なすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

TXB0304 の代表的なアプリケーション・ブロック図

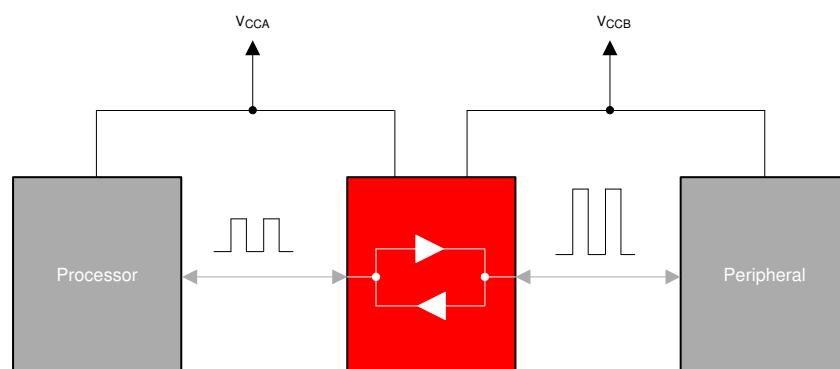

Copyright © 2016, Texas Instruments Incorporated



目次

1	特長	1	8.2	Functional Block Diagram	10
2	アプリケーション	1	8.3	Feature Description	11
3	概要	1	8.4	Device Functional Modes	11
4	改訂履歴	2	9	Application and Implementation	12
5	Pin Configuration and Functions	3	9.1	Application Information	12
6	Specifications	4	9.2	Typical Application	12
6.1	Absolute Maximum Ratings	4	10	Power Supply Recommendations	13
6.2	ESD Ratings	4	11	Layout	13
6.3	Recommended Operating Conditions	4	11.1	Layout Guidelines	13
6.4	Thermal Information	5	11.2	Layout Example	14
6.5	Electrical Characteristics	5	12	デバイスおよびドキュメントのサポート	15
6.6	Timing Requirements	6	12.1	デバイス・サポート	15
6.7	Switching Characteristics	6	12.2	ドキュメントのサポート	15
6.8	Operating Characteristics	7	12.3	コミュニティ・リソース	15
6.9	Typical Characteristics	7	12.4	商標	15
7	Parameter Measurement Information	8	12.5	静電気放電に関する注意事項	15
8	Detailed Description	10	12.6	Glossary	15
8.1	Overview	10	13	メカニカル、パッケージ、および注文情報	15

4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Revision F (May 2016) から Revision G に変更	Page
• Changed text in Power Supply Recommendations section.	13
Revision E (August 2014) から Revision F に変更	Page
• 「概要」セクションを変更	1
• 「 Absolute Maximum Ratings 」、「 Recommended Operating Conditions ⁽¹⁾⁽²⁾ 」、「 Switching Characteristics 」、「 Electrical Characteristics 」の各表を変更。	1
Revision D (October 2012) から Revision E に変更	Page
• 「ESD 定格」表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクション 追加	1
• Changed VCCA and VCCB in the ABS MAX table to V _{CCA} and V _{CCB} in 3 places	4
• Changed in ELEC CHARAC table the 0.9 x V _{CCA} and 0.9 x V _{CCB} from MAX column into the MIN column	5
• Changed in ELEC CHARAC table 0.2 (2 places) in the MIN column to the MAX	5
Revision C (May 2012) から Revision D に変更	Page
• Added Application Information section	12
Revision B (September 2011) から Revision C に変更	Page
• Added package pin out diagram notes.	3

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

			MIN	MAX	UNIT
V_{CCA}	Supply voltage		−0.5	4.6	V
V_{CCB}			−0.5	4.6	
V_I	Input voltage	A port	−0.5	4.6	V
		B port	−0.5	4.6	
V_O	Voltage applied to any output in the high-impedance or power-off state	A port	−0.5	4.6	V
		B port	−0.5	4.6	
V_O	Voltage applied to any output in the high or low state ⁽²⁾	A port	−0.5	$V_{CCA} + 0.5$	V
		B port	−0.5	$V_{CCB} + 0.5$	
I_{IK}	Input clamp current	$V_I < 0$		−50	mA
I_{OK}	Output clamp current	$V_O < 0$		−50	mA
I_O	Continuous output current			±50	mA
	Continuous current through V_{CCA} , V_{CCB} , or GND			±100	mA
T_{stg}	Storage temperature		−65	150	°C
T_J	Junction temperature		−40	125	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The value of V_{CCA} and V_{CCB} are provided in the recommended operating conditions table.

6.2 ESD Ratings

		VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±8000
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±1000

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions ⁽¹⁾⁽²⁾

			V_{CCA}	V_{CCB}	MIN	MAX	UNIT
V_{CCA}	Supply voltage				0.9	3.6	V
V_{CCB}							
V_{IH}	High-level input voltage	Data inputs	0.9 V to 3.6 V	0.9 V to 3.6 V	$V_{CCI} \times 0.65$	V_{CCI}	V
		OE/ $\overline{OE}$	0.9 V to 3.6 V	0.9 V to 3.6 V	$V_{CCA} \times 0.65$	3.6	
V_{IL}	Low-level input voltage	Data inputs	0.9 V to 3.6 V	0.9 V to 3.6 V	0	$V_{CCI} \times 0.35$	V
		OE/ $\overline{OE}$	0.9 V to 1.2 V	0.9 V to 3.6 V	0	$V_{CCA} \times 0.3$	
			1.2 V to 3.6 V	0.9 V to 3.6 V	0	$V_{CCA} \times 0.35$	
V_O	Voltage range applied to any output in the high-impedance or power-off state	A-port	0.9 V to 3.6 V	0.9 V to 3.6 V	0	3.6	V
		B-port	0.9 V to 3.6 V	0.9 V to 3.6 V	0	3.6	
$\Delta t/\Delta v$	Input transition rise or fall rate	A-port inputs	0.9 V to 3.6 V	0.9 V to 3.6 V		40	ns/V
		B-port inputs	0.9 V to 3.6 V	0.9 V to 3.6 V		40	
T_A	Operating free-air temperature				−40	85	°C

- (1) The A and B sides of an unused data I/O pair must be held in the same state, such as, both at V_{CCI} or both at GND.
- (2) V_{CCI} is the supply voltage associated with the input port.

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TXB0304		UNIT
		RUT (UQFN)	RSV (UQFN)	
		12 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	116.4	131.7	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	45.7	55.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	46.9	55.3	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.6	1.4	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	46.9	55.3	°C/W

(1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

6.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS		V_{CCA}	V_{CCB}	MIN	TYP	MAX	UNIT
V_{OHA}	High-level output voltage	$I_{OH} = -20 \mu A$	$T_A = 25^\circ C$	0.9 V to 3.6 V		$0.9 \times V_{CCA}$			V
V_{OLA}	Low-level output voltage	$I_{OL} = 20 \mu A$	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V				0.2	V
V_{OHB}	High-level output voltage	$I_{OH} = -20 \mu A$	$T_A = 25^\circ C$		0.9 V to 3.6 V	$0.9 \times V_{CCB}$			V
V_{OLB}	Low-level output voltage	$I_{OL} = 20 \mu A$	$-40^\circ C$ to $85^\circ C$		0.9 V to 3.6 V			0.2	V
I_I	OE	$V_I = V_{CCI}$ or GND	$T_A = 25^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			± 1	μA
			$-40^\circ C$ to $85^\circ C$					± 2	
I_{off}	A port	V_I or $V_O = 0$ to 3.6 V	$T_A = 25^\circ C$	0 V	0 V to 3.6 V			± 1	μA
			$-40^\circ C$ to $85^\circ C$					± 2	
	B port	V_I or $V_O = 0$ to 3.6 V	$T_A = 25^\circ C$	0.9 V to 3.6 V	0 V			± 1	
			$-40^\circ C$ to $85^\circ C$					± 2	
I_{OZ}	A or B port	OE = GND	$T_A = 25^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			± 1	μA
			$-40^\circ C$ to $85^\circ C$					± 2	
I_{CCA}		$V_I = V_{CCI}$ or GND, $I_O = 0$	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			5	μA
I_{CCB}		$V_I = V_{CCB}$ or GND, $I_O = 0$	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			5	μA
$I_{CCA} + I_{CCB}$		$V_I = V_{CCI}$ or GND, $I_O = 0$	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			10	μA
I_{CCZA}	High-Z state supply current	$V_I = V_{CCI}$ or GND, $I_O = 0$, OE = GND	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			5	μA
I_{CCZB}	High-Z state supply current	$V_I = V_{CCB}$ or GND, $I_O = 0$, OE = GND	$-40^\circ C$ to $85^\circ C$	0.9 V to 3.6 V	0.9 V to 3.6 V			5	μA
C_i	OE	$T_A = 25^\circ C$		0.9 V to 3.6 V	0.9 V to 3.6 V			3	pF
C_{io}	A port	$T_A = 25^\circ C$, OE = GND		0.9 V to 3.6 V	0.9 V to 3.6 V			6.7	pF
	B port							6.7	

6.6 Timing Requirements

over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	LOAD	V _{CCA}	V _{CCB}	MIN	MAX	UNIT
Data rate	C _L = 15 pF	0.9 to 3.6 V	0.9 to 3.6 V		50	Mbps
	C _L = 15 pF	1.2 to 3.6 V	1.2 to 3.6 V		100	Mbps
	C _L = 15 pF	1.8 to 3.6 V	1.8 to 3.6 V		140	Mbps
	C _L = 30 pF	0.9 to 3.6 V	0.9 to 3.6 V		40	Mbps
	C _L = 30 pF	1.2 to 3.6 V	1.2 to 3.6 V		90	Mbps
	C _L = 30 pF	1.8 to 3.6 V	1.8 to 3.6 V		130	Mbps
	C _L = 50 pF	1.2 to 3.6 V	1.2 to 3.6 V		80	Mbps
	C _L = 50 pF	1.8 to 3.6 V	1.8 to 3.6 V		120	Mbps
	C _L = 100 pF	1.2 to 3.6 V	1.2 to 3.6 V		70	Mbps
	C _L = 100 pF	1.8 to 3.6 V	1.8 to 3.6 V		100	Mbps

6.7 Switching Characteristics

 over operating free-air temperature range (unless otherwise noted). (For parameter descriptions, see [Figure 2](#) and [Figure 3](#).)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	LOAD	V _{CCA}	V _{CCB}	MIN	TYP ⁽¹⁾	MAX	UNIT
t _{pd}	A	B	C _L = 15	0.9-3.6	0.9-3.6	18.9		30	ns
	A	B	C _L = 15	1.2-3.6	1.2-3.6	7.5		11.5	
	A	B	C _L = 15	1.8-3.6	1.8-3.6	3.7		4.8	
	A	B	C _L = 30	0.9-3.6	0.9-3.6	19.5		34	
	A	B	C _L = 30	1.2-3.6	1.2-3.6	7.8		11.9	
	A	B	C _L = 30	1.8-3.6	1.8-3.6	3.8		5.2	
	A	B	C _L = 50	1.2-3.6	1.2-3.6	8		12.3	
	A	B	C _L = 50	1.8-3.6	1.8-3.6	4		5.4	
	A	B	C _L = 100	1.2-3.6	1.2-3.6	8.6		13.5	
	A	B	C _L = 100	1.8-3.6	1.8-3.6	4.5		6	
	B	A	C _L = 15	0.9-3.6	0.9-3.6	18.9		30	ns
	B	A	C _L = 15	1.2-3.6	1.2-3.6	7.5		11.5	
	B	A	C _L = 15	1.8-3.6	1.8-3.6	3.7		5	
	B	A	C _L = 30	0.9-3.6	0.9-3.6	19.5		34	
	B	A	C _L = 30	1.2-3.6	1.2-3.6	7.8		11.9	
	B	A	C _L = 30	1.8-3.6	1.8-3.6	3.8		5.2	
	B	A	C _L = 50	1.2-3.6	1.2-3.6	8		12.3	
	B	A	C _L = 50	1.8-3.6	1.8-3.6	4		5.4	
	B	A	C _L = 100	1.2-3.6	1.2-3.6	8.6		13.5	
	B	A	C _L = 100	1.8-3.6	1.8-3.6	4.5		6	
t _{en}	OE	A	C _L = 15	0.9-3.6	0.9-3.6			262	ns
				1.2-3.6	1.2-3.6			64	
				1.8-3.6	1.8-3.6			37	
		B	C _L = 15	0.9-3.6	0.9-3.6			332	
				1.2-3.6	1.2-3.6			76	
				1.8-3.6	1.8-3.6			41	
t _{dis}	OE	A	C _L = 15	0.9-3.6	0.9-3.6			172	ns
		B	C _L = 15	0.9-3.6	0.9-3.6			169	ns
t _{FB} , t _{FB}	B-port rise and fall times		C _L = 15	0.9-3.6	0.9-3.6		2.95		ns
t _{SA} , t _{SA}	A-port rise and fall times		C _L = 15	0.9-3.6	0.9-3.6		3.1		ns
t _{SK(O)}	Channel-to-channel skew		C _L = 15	0.9-3.6	0.9-3.6			0.15	ns

 (1) T_A = 25°C

6.8 Operating Characteristics

C_{pd} - power dissipation capacitance measured at $T_A = 25^\circ\text{C}$.

PARAMETER		TEST CONDITIONS	TYP ⁽¹⁾	UNIT
C_{pdA}	A-port input, B-port output	$C_L = 0$, $f = 10\text{ MHz}$, $t_r = t_f = 1\text{ ns}$, $OE = V_{CCA}$ (outputs enabled)	34	pF
	B-port input, A-port output		34	
C_{pdB}	A-port input, B-port output		34	pF
	B-port input, A-port output		34	
C_{pdA}	A-port input, B-port output	$C_L = 0$, $f = 10\text{ MHz}$, $t_r = t_f = 1\text{ ns}$, $OE = \text{GND}$ (outputs disabled)	0.01	pF
	B-port input, A-port output		0.01	
C_{pdB}	A-port input, B-port output		0.01	pF
	B-port input, A-port output		0.01	

(1) V_{CCA} , V_{CCB} 0.9 V to 3.6 V

6.9 Typical Characteristics


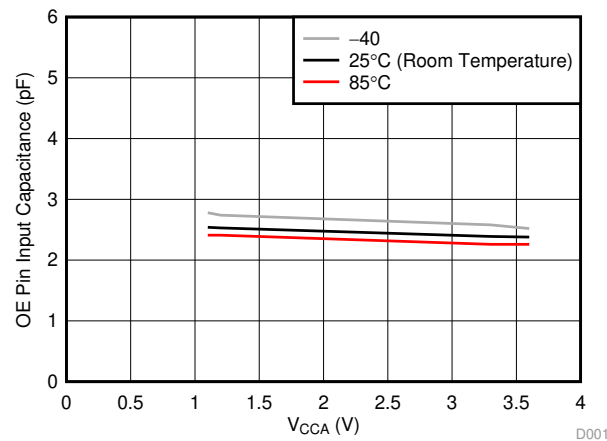


Figure 1. Input Capacitors for OE Pin (C_i) vs Power Supply (V_{CCA})


7 Parameter Measurement Information

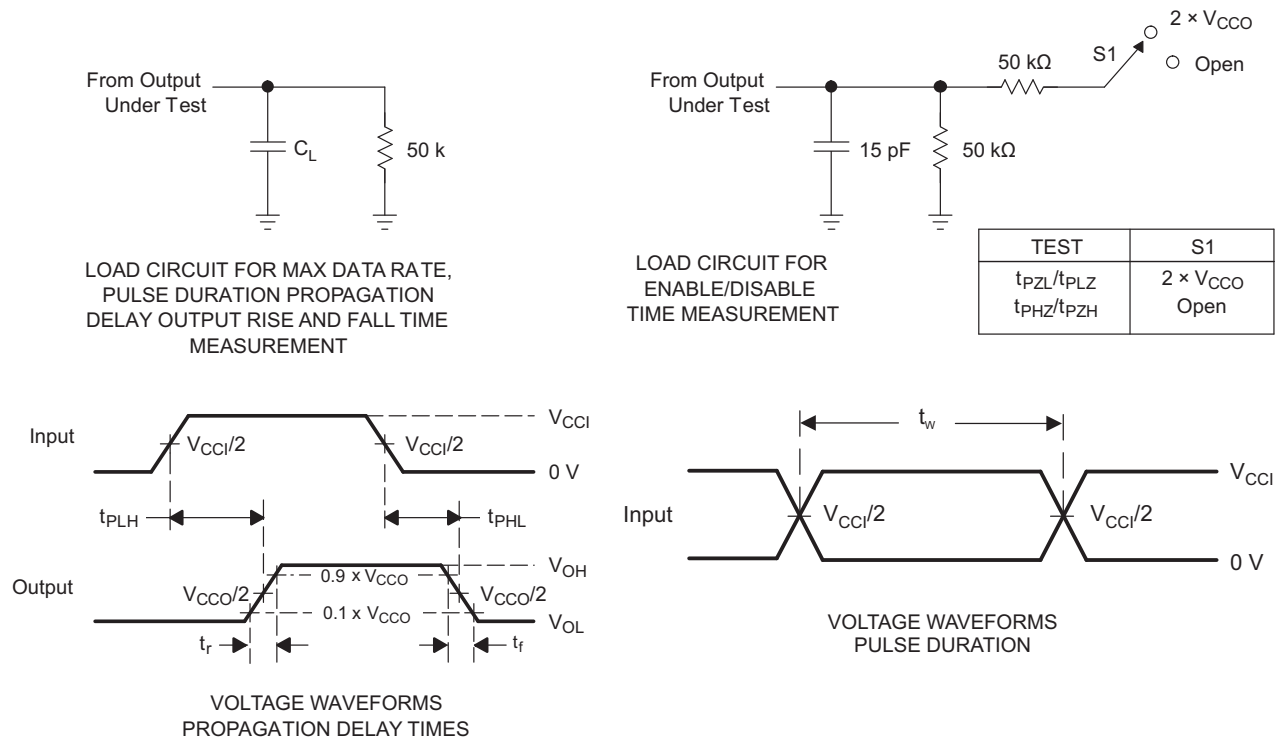

- C_L includes probe and jig capacitance.
- All input pulses are supplied by generators having the following characteristics: PRR 10 MHz, $Z_O = 50 \Omega$, $dv/dt \geq 1$ V/ns.
- The outputs are measured one at a time, with one transition per measurement.
- t_{PLH} and t_{PHL} are the same as t_{pd} .
- V_{CCI} is the V_{CC} associated with the input port.
- V_{CCO} is the V_{CC} associated with output port.
- All parameters and waveforms are not applicable to all devices.

Figure 2. Load Circuits and Voltage Waveforms

Parameter Measurement Information (continued)

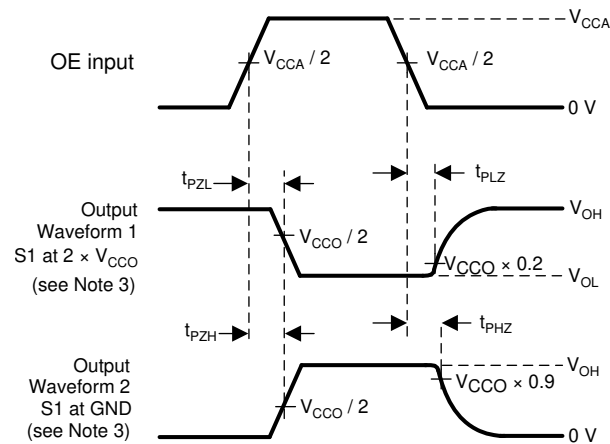

- (1) t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- (2) t_{PZL} and t_{PZH} are the same as t_{en} .
- (3) Waveform 1 is for an output with internal such that the output is high, except when OE is high. Waveform 2 is for an output with conditions such that the output is low, except when OE is high.

Figure 3. Enable and Disable Times

8 Detailed Description


8.1 Overview

The TXB0304 and TXBN0304 can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another.

8.1.1 Architecture

The TXB0304 and TXBN0304 architecture (see [Figure 4](#)) does not require a direction-control signal to control the direction of data flow from A to B or from B to A. In a dc state, the output drivers of the TXB0304 can maintain a high or low, but are designed to be weak, so that they can be overdriven by an external driver when data on the bus starts flowing the opposite direction. The output one shots detect rising or falling edges on the A or B ports. During a rising edge, the one shot turns on the PMOS transistors (T1, T3) for a short duration, which speeds up the low-to-high transition. Similarly, during a falling edge, the one shot turns on the NMOS transistors (T2, T4) for a short duration, which speeds up the high-to-low transition. The typical output impedance during output transition is 30 Ω at $V_{CCO} = 0.9$ V to 1 V, 10 Ω at $V_{CCO} = 1.1$ V to 1.7 V, and 5 Ω at $V_{CCO} = 1.8$ V to 3.3 V.

8.2 Functional Block Diagram

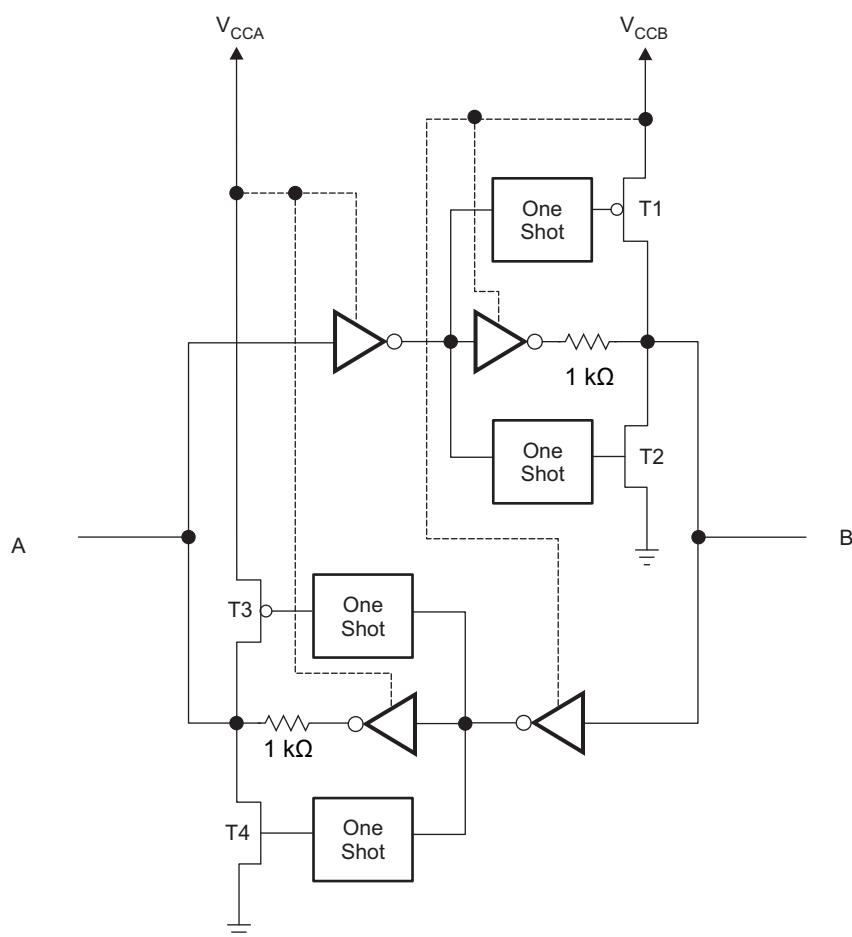


Copyright © 2016, Texas Instruments Incorporated

Figure 4. Architecture of TXB0304 I/O Cell

8.3 Feature Description

8.3.1 Input Driver Requirements

Typical I_{IN} vs V_{IN} characteristics of the TXB0304/TXBN0304 are shown in Figure 5. For proper operation, the device driving the data I/Os of the TXB0304 must have drive strength of at least ± 3 mA.

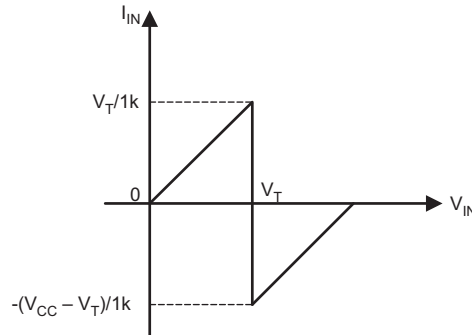

- (1) V_{CC} is power supply of TXB0304.
- (2) V_T is the input threshold voltage of TXB0304 (typically it is $V_{CC}/2$).

Figure 5. Typical I_{IN} vs V_{IN} Curve

8.4 Device Functional Modes

8.4.1 Enable and Disable

The TXB0304 has an OE input that is used to disable the device by setting OE = low ($\overline{OE}$ = high for TXBN0304), which places all I/Os in the high-impedance (Hi-Z) state. The disable time (t_{dis}) indicates the delay between when OE goes low and when the outputs actually get disabled (Hi-Z). The enable time (t_{en}) indicates the amount of time the user must allow for the one-shot circuitry to become operational after OE is high.

8.4.2 Pullup or Pulldown Resistor on I/O Lines

The TXB0304/TXBN0304 is designed to drive capacitive loads of up to 100 pF. The output drivers of the TXB0304 have low dc drive strength. If pull-up or pull-down resistors are connected externally to the data I/Os, their values must be kept higher than 20 k Ω to ensure that they do not contend with the output drivers of the TXB0304. but if the receiver is integrated with the smaller pull down or pull up resistor, below formula can be used for estimation to evaluate the V_{OH} and V_{OL} .

$$V_{ol} = V_{CCout} \times \frac{1.5k\Omega}{1.5k\Omega + R_{pu}} \quad (1)$$

$$V_{oh} = V_{CCout} \times \frac{R_{pd}}{1.5k\Omega + R_{pd}}$$

where

- V_{CCOUT} is the output port supply voltage on either V_{CCA} or V_{CCB}
 - R_{PD} is the value of the external pull down resistor
 - R_{PU} is the value of the external pull up resistor
 - 1.5 k Ω is the counting the variation of the serial resistor 1k Ω in the I/O line.
- (2)

Because of this restriction on external resistors, the TXB0304 should not be used in applications such as I²C or 1-Wire where an open-drain driver is connected on the bidirectional data I/O. For these applications, use a device from the TI [TXS010X](#) series of level translators.

9 Application and Implementation


NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The TXB0304 can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another. It can only translate push-pull CMOS logic outputs. If for open-drain signal translation, please refer to TI [TXS010X](#) products. Any external pull-down or pull-up resistors are recommended larger than 20 k Ω .

9.2 Typical Application

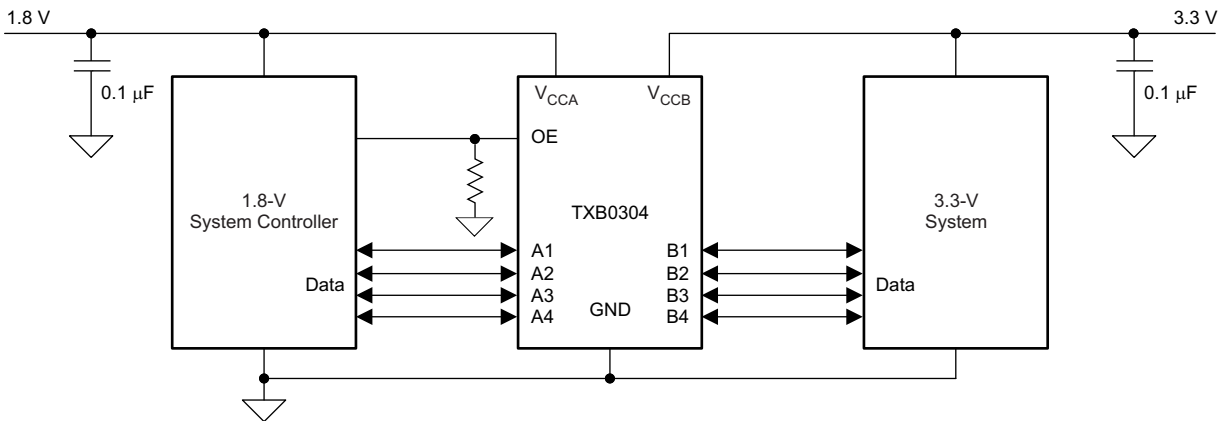

Copyright © 2016, Texas Instruments Incorporated

Figure 6. Typical Application Schematic

9.2.1 Design Requirements

For this design example, use the parameters listed in [Table 1](#).

Table 1. Design Parameters

DESIGN PARAMETERS	EXAMPLE VALUE
Input voltage range	0.9 V to 3.6 V
Output voltage range	0.9 V to 3.6 V

9.2.2 Detailed Design Procedure

To begin the design process, determine the following:

- Input voltage range
 - Use the supply voltage of the device that is driving the TXB0304 device to determine the input voltage range. For a valid logic high the value must exceed the V_{IH} of the input port. For a valid logic low the value must be less than the V_{IL} of the input port.
- Output voltage range
 - Use the supply voltage of the device that the TXB0304 device is driving to determine the output voltage range.
 - Don't recommend to have the external pull-up or pull-down resistors. If mandatory, it is recommended the value should be larger than 20 k Ω .

- ### 9.2.3 Application Curve

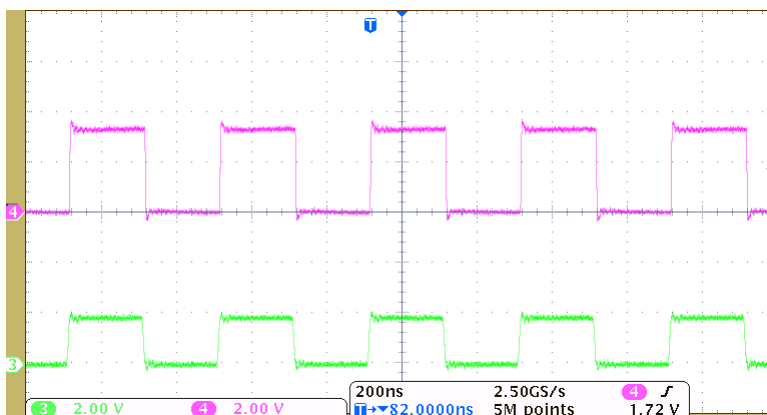


Figure 7. Level-Translation of a 2.5-MHz Signal

10 Power Supply Recommendations

During operation, TXB0304 can work at both $V_{CCA} \leq V_{CCB}$ and $V_{CCA} \geq V_{CCB}$. During power-up sequencing, any power supply can be ramped up first. Both the supplies are recommended to be powered down together. The TXB0304 has circuitry that disables all input/output ports when either VCC is switched off ($V_{CCA/B} = 0\text{ V}$).

11 Layout

11.1 Layout Guidelines

To ensure reliability of the device, following common printed-circuit board layout guidelines is recommended.

- Bypass capacitors should be used on power supplies. And should be placed as close as possible to the V_{CCA} , V_{CCB} pin and GND pin
- Short trace-lengths should be used to avoid excessive loading.
- For long transmission lines, place a series resistor equivalent to the impedance of the transmission lines to avoid signal integrity issues
- PCB signal trace-lengths must be kept short enough so that the round-trip delay of any reflection is less than the one-shot duration, approximately 10 ns, ensuring that any reflection encounters low impedance at the source driver.
- Pullup resistors are not required on both sides for Logic I/O.
- If pullup or pulldown resistors are needed, the resistor value must be over 20 k Ω .
- 20 k Ω is a safe recommended value, if the customer can accept higher Vol or lower Voh, smaller pull up or pull down resistor is allowed, the draft estimation is $V_{ol} = V_{ccout} \times 1.5k / (1.5k + R_{pu})$ and $V_{oh} = V_{ccout} \times R_{pd} / (1.5k + R_{pd})$.
- If pullup resistors are needed, please refer to the TXS0104 or contact TI.
- For detailed information, refer to application note [SCEA043](#).

Figure 8. TXB0304 PCB Layout

12 デバイスおよびドキュメントのサポート

12.1 デバイス・サポート

12.1.1 開発サポート

TI TXS010X 製品については、www.ti.com/product/txs0101 を参照してください。

TXB0304 IBIS モデルについては、[SCEM544](#) を参照してください。

12.2 ドキュメントのサポート

12.2.1 関連資料

関連資料については、以下を参照してください。

- アプリケーション・レポート、『*A Guide to Voltage Translation With TXB-Type Translators*』(英語)、[SCEA043](#)
- ユーザー・ガイド、『*TXB0304 Evaluation Module*』(英語)、[SCEU003](#)

12.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.4 商標

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.5 静電気放電に関する注意事項



これらのデバイスは、限定的なESD(静電破壊)保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

12.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TXB0304RSVR	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	ZTJ
TXB0304RSVR.B	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	ZTJ
TXB0304RUTR	Active	Production	UQFN (RUT) 12	3000 LARGE T&R	Yes	NIPDAU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	(737, 73R, 73V)
TXB0304RUTR.B	Active	Production	UQFN (RUT) 12	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	(737, 73R, 73V)
TXBN0304RSVR	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	ZTK
TXBN0304RSVR.B	Active	Production	UQFN (RSV) 16	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	ZTK
TXBN0304RUTR	Active	Production	UQFN (RUT) 12	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	74R
TXBN0304RUTR.B	Active	Production	UQFN (RUT) 12	3000 LARGE T&R	Yes	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	74R

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

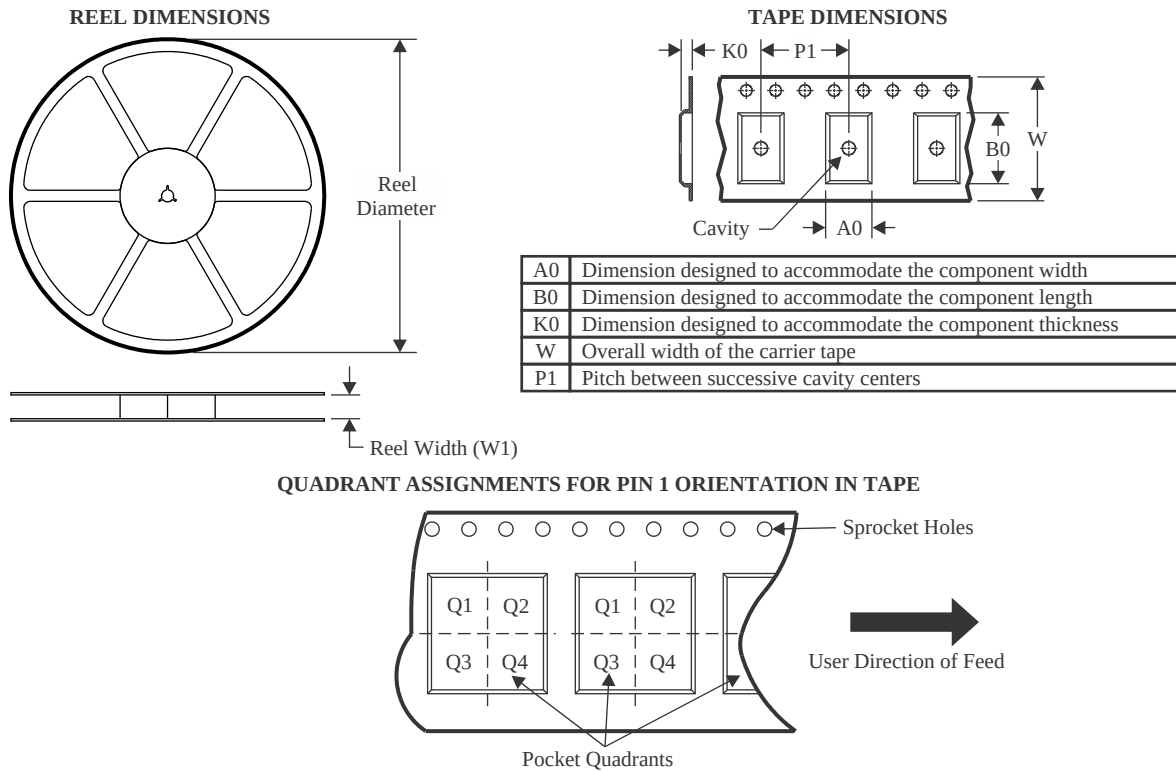TAPE AND REEL INFORMATION


*All dimensions are nominal



Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TXB0304RSVR	UQFN	RSV	16	3000	177.8	12.4	2.0	2.8	0.7	4.0	12.0	Q1
TXB0304RUTR	UQFN	RUT	12	3000	180.0	9.5	1.9	2.3	0.75	4.0	8.0	Q1
TXB0304RUTR	UQFN	RUT	12	3000	180.0	8.4	1.95	2.3	0.75	4.0	8.0	Q1
TXBN0304RSVR	UQFN	RSV	16	3000	177.8	12.4	2.0	2.8	0.7	4.0	12.0	Q1
TXBN0304RSVR	UQFN	RSV	16	3000	330.0	12.4	2.1	2.9	0.75	4.0	12.0	Q1
TXBN0304RUTR	UQFN	RUT	12	3000	180.0	8.4	1.95	2.3	0.75	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS


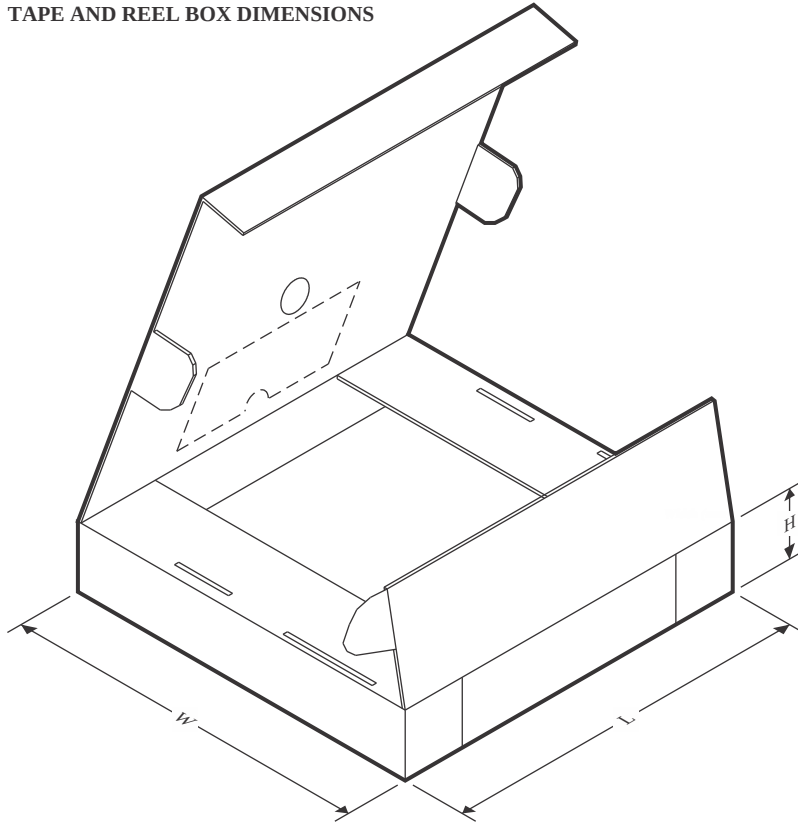


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TXB0304RSVR	UQFN	RSV	16	3000	202.0	201.0	28.0
TXB0304RUTR	UQFN	RUT	12	3000	184.0	184.0	19.0
TXB0304RUTR	UQFN	RUT	12	3000	202.0	201.0	28.0
TXBN0304RSVR	UQFN	RSV	16	3000	202.0	201.0	28.0
TXBN0304RSVR	UQFN	RSV	16	3000	184.0	184.0	19.0
TXBN0304RUTR	UQFN	RUT	12	3000	202.0	201.0	28.0

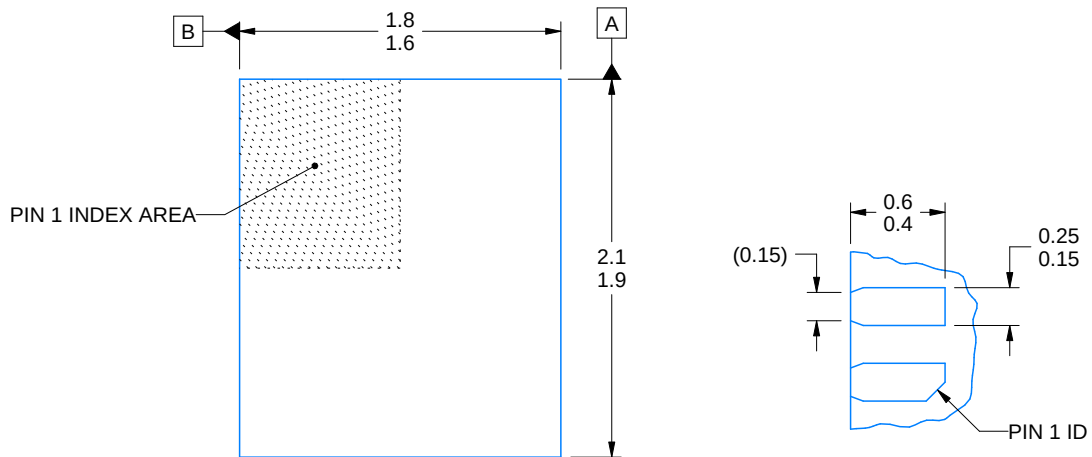

OPTIONAL TERMINAL & PIN 1 ID

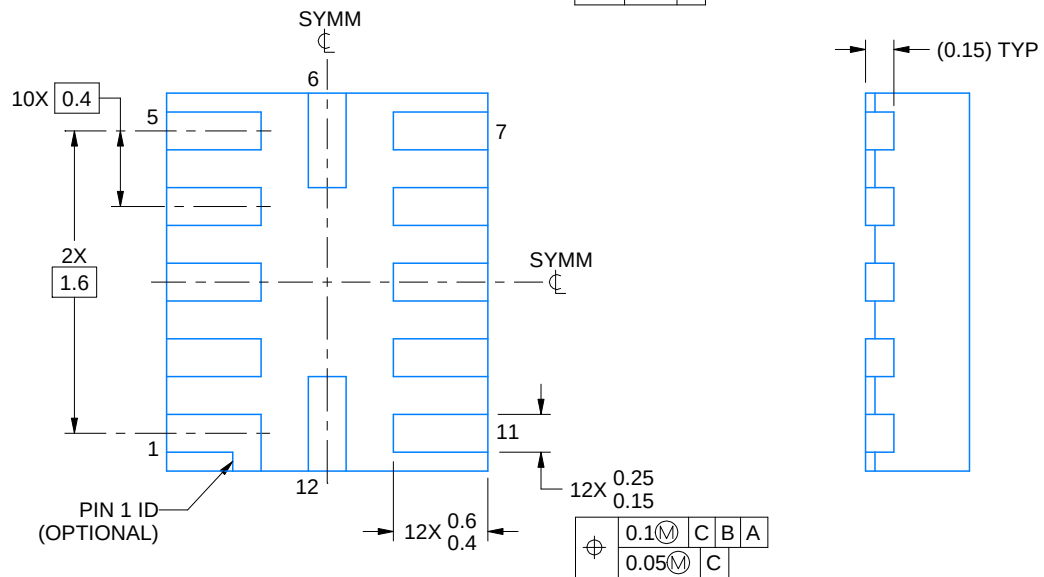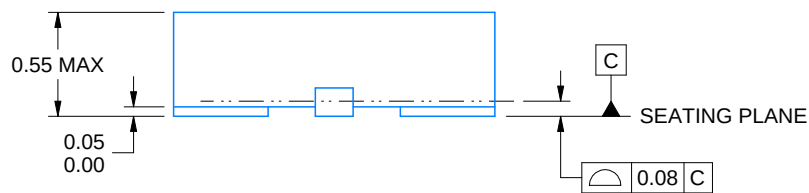

4220310/A 11/2016

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT


RUT0012A

UQFN - 0.55 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

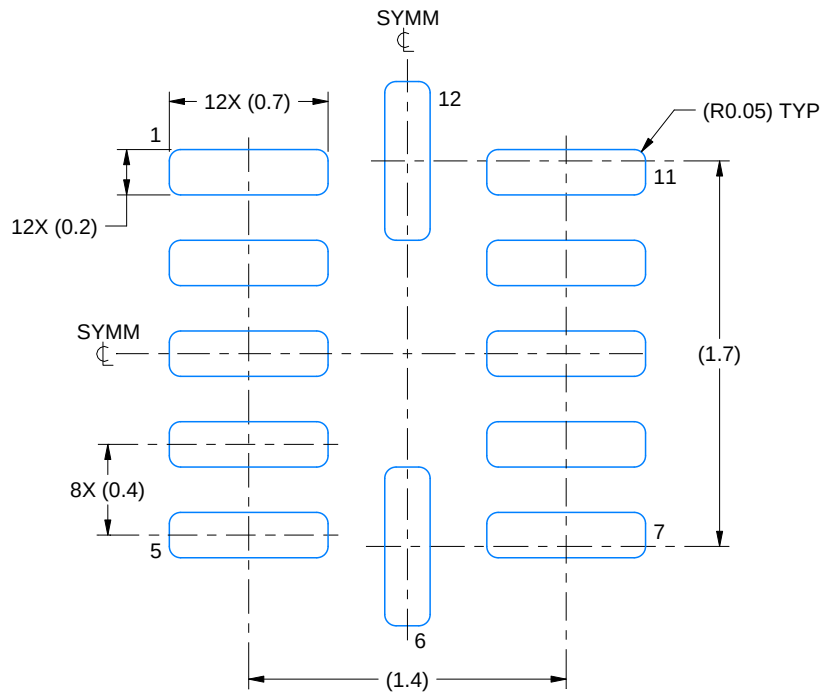

LAND PATTERN EXAMPLE
SCALE:30X

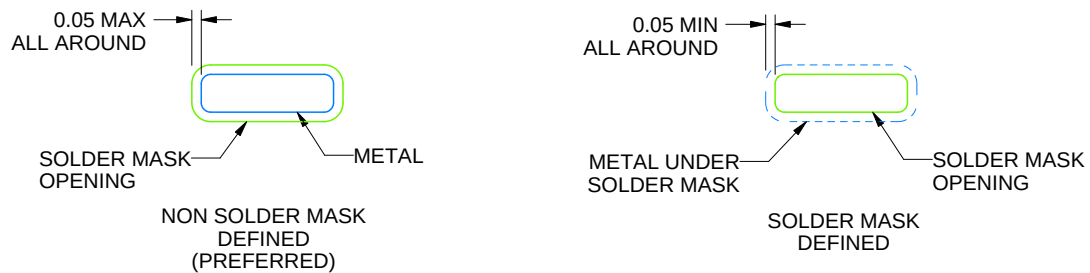

SOLDER MASK DETAILS

4220310/A 11/2016

NOTES: (continued)


3. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).

EXAMPLE STENCIL DESIGN

RUT0012A

UQFN - 0.55 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

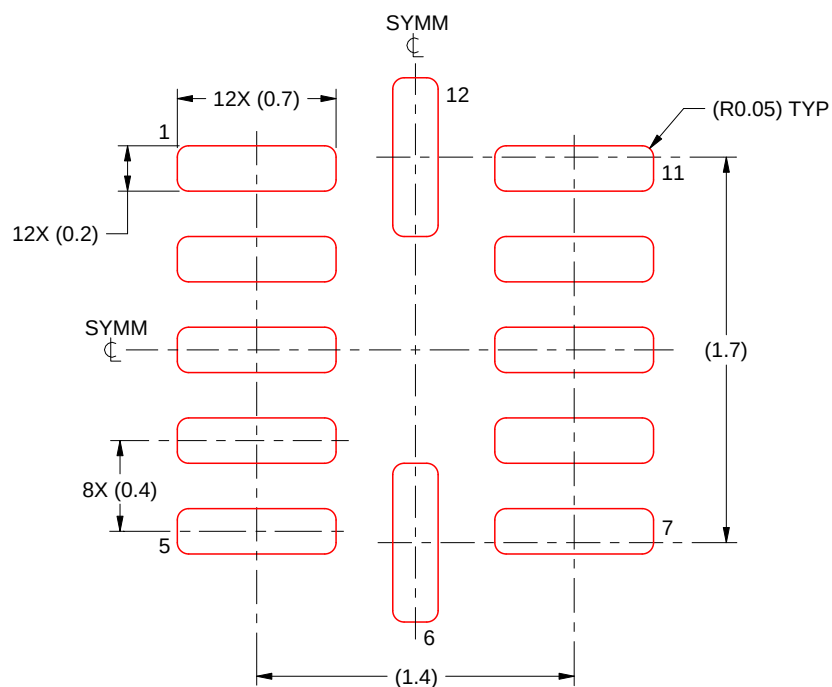

SOLDER PASTE EXAMPLE
BASED ON 0.1 mm THICK STENCIL
SCALE: 30X

4220310/A 11/2016

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

GENERIC PACKAGE VIEW


RSV 16

UQFN - 0.55 mm max height

1.8 x 2.6, 0.4 mm pitch


ULTRA THIN QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

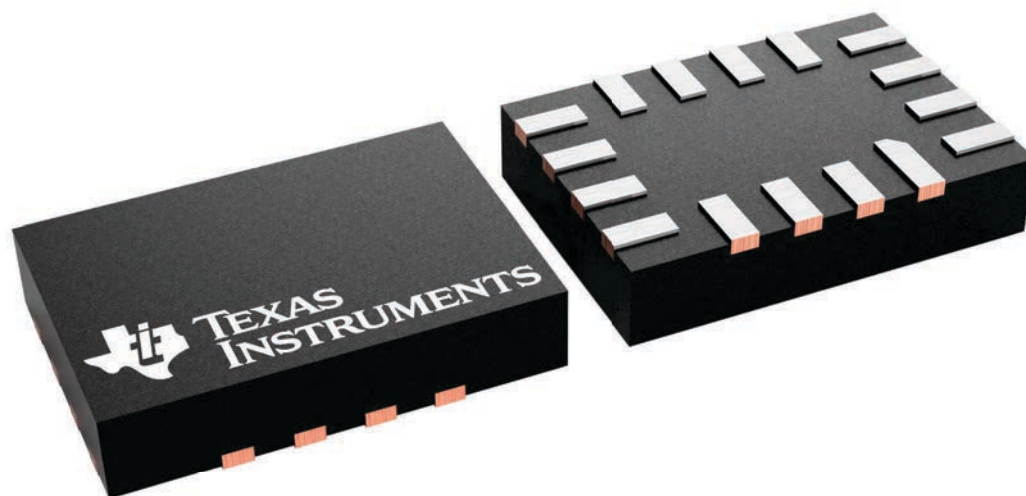

UQFN - 0.55 mm max height

ULTRA THIN QUAD FLATPACK - NO LEAD

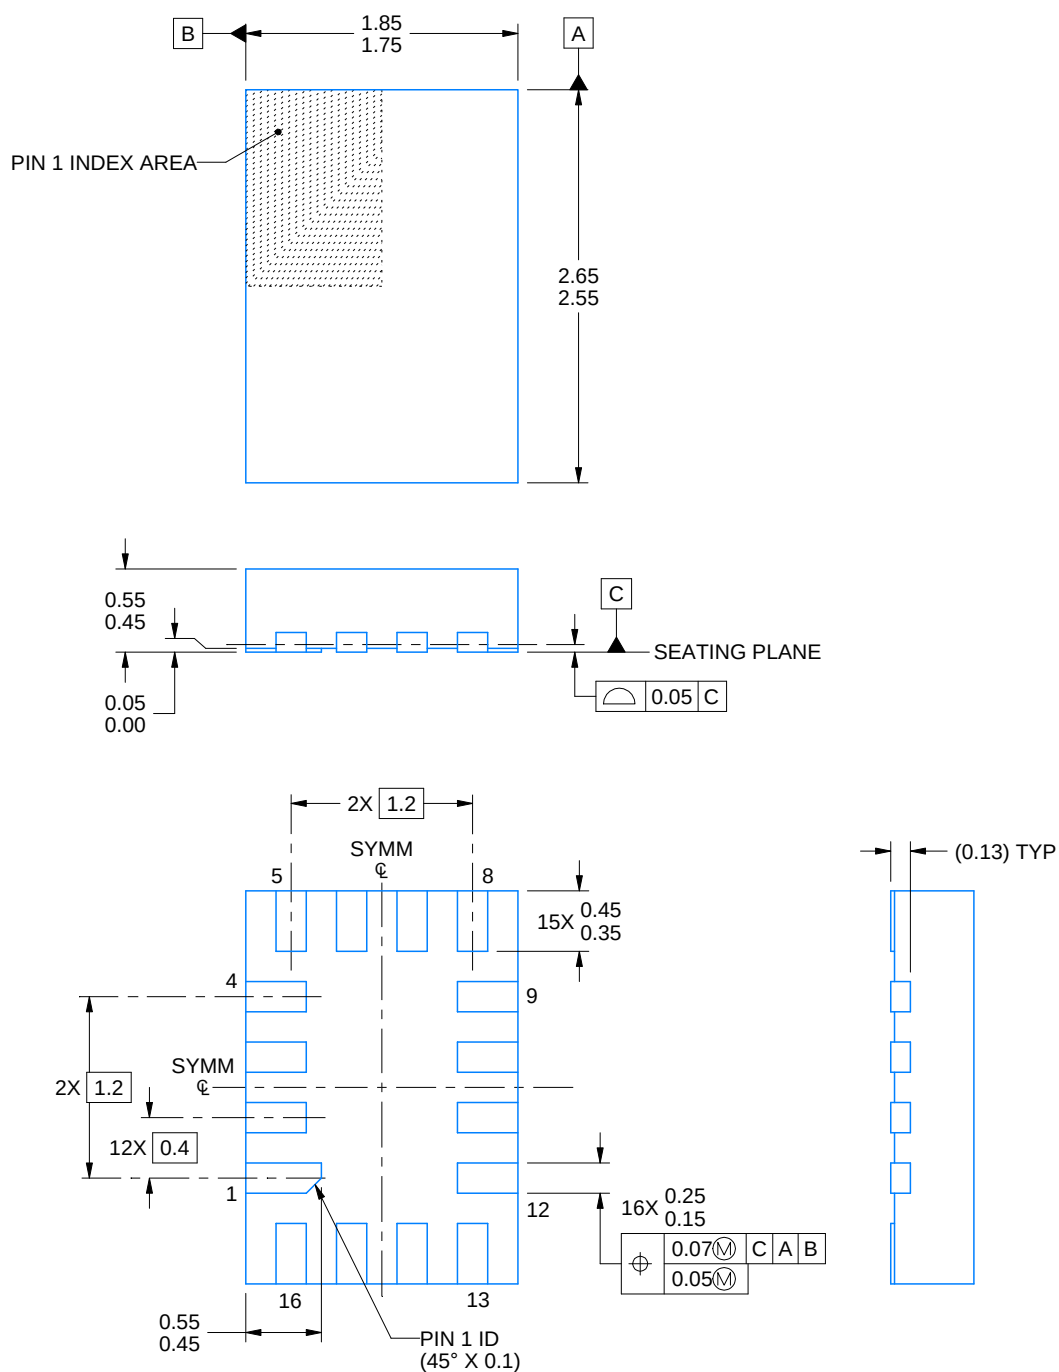

4220314/C 02/2020

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.


2. This drawing is subject to change without notice.

EXAMPLE STENCIL DESIGN

RSV0016A

UQFN - 0.55 mm max height

ULTRA THIN QUAD FLATPACK - NO LEAD

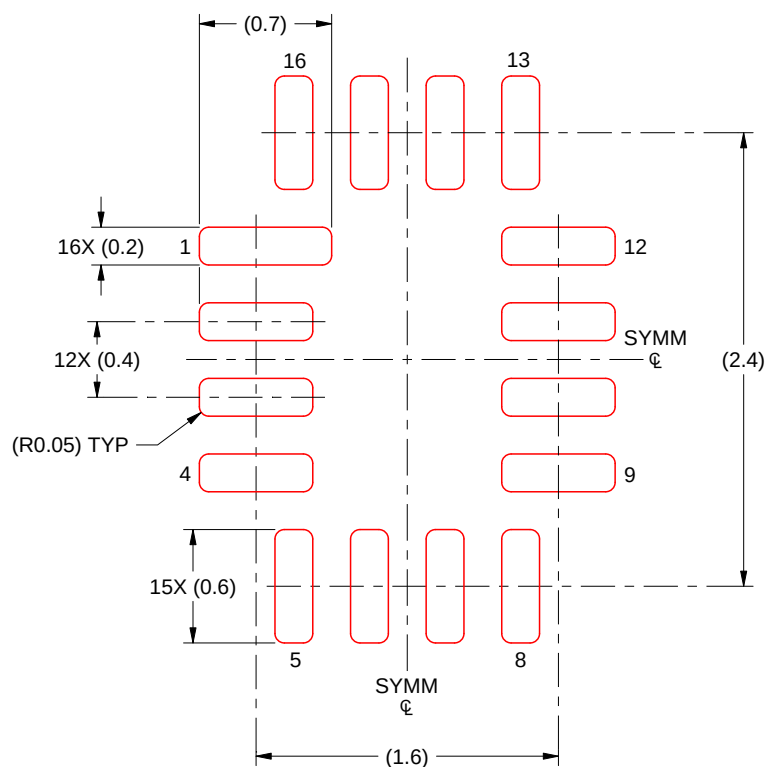

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 25X

4220314/C 02/2020

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated