









LP5018, LP5024 JAJSF10C - OCTOBER 2018 - REVISED JULY 2024

# LP50xx 18/24 チャネル、12 ビット、PWM 超低静止電流、I<sup>2</sup>C RGB LED ドライ バ

# 1 特長

- 動作電圧範囲:
  - V<sub>CC</sub> 範囲:2.7V~5.5V
  - EN、SDA、SCLピンは 1.8V、3.3V、5V の電源レールに対応
  - 最大出力電圧:6V
- 24 個の高精度定電流シンク
  - V<sub>CC</sub>の全範囲で、チャネルごとに最大 25.5mA
  - V<sub>CC</sub> ≥ 3.3V のとき、チャネルごとに最大 35mA
  - デバイス間誤差:±7%、チャネル間誤差:±7%
- 非常に低い静止電流
  - シャットダウン モード: EN Low で最大値 1μA
  - パワー セーブ モード: EN High、すべての LED が 30ms を超えてオフのとき標準値 10µA
- 各チャネルに 12 ビット、29kHz の PWM ジェネレータ を内蔵:
  - チャネルごとに独立の色混合レジスタ
  - RGB LED モジュールごとに独立の輝度制御レジ
  - 対数的または線形的スケールの輝度制御を選択可
  - 3 相 PWM シフト方式を搭載
- 3 つのプログラム可能バンク (R、G、B) により、各色を ソフトウェアで簡単に制御
- 2 つの外部ハードウェア アドレス ピンにより、最大 4 つのデバイスに接続可能
- ブロードキャストスレーブアドレスにより、複数のデバ イスを同時に構成可能
- 自動インクリメント機能により、1回の伝送で連続する 複数のレジスタを書き込み / 読み取り可能
- 最大 400kHz のファスト モード I<sup>2</sup>C 速度

# 2 アプリケーション

次のような機器の LED ライティング、インジケータ ライト、 および装飾用ライト

- スマート スピーカ (音声アシスタント付き)
- スマートホーム家電
- ビデオドアベル
- 電子スマートロック
- 煙感知器と熱感知器
- STB および DVR
- スマートルータ
- ハンドヘルド デバイス

# 3 概要


スマート ホームや、ヒューマン マシン インターフェイスを 活用する他のアプリケーションでは、高性能の RGB LED ドライバが必要となります。フラッシュ、ブリージング、追跡 などの LED アニメーション効果により、ユーザー向けの環 境を大幅に改良できます。またシステムノイズが最小限で あることは不可欠です。

LP50xx デバイスは、18 または 24 チャネルの定電流シン ク LED ドライバです。LP50xx デバイスにはカラー ミキシ ングおよび輝度制御機能が内蔵されており、事前設定に よりソフトウェアのコーディング処理を簡素化できます。12 ビット、29kHzの PWM ジェネレータが各チャネルに内蔵 されているため、LED で円滑に、鮮明な色を再現でき、可 聴ノイズが除去されます。

#### 製品情報(1)

| 部品番号   | パッケージ      | 本体サイズ (公称)      |
|--------|------------|-----------------|
| LP5024 | VQFN (32)  | 4.00mm × 4.00mm |
| LP5018 | VQFN (32)  | 4.00mm × 4.00mm |
| LF3010 | VSSOP (28) | 7.30mm × 3.00mm |

利用可能なすべてのパッケージについては、データシートの末尾 にある注文情報を参照してください。



概略回路図



# **Table of Contents**

| 1 特長                                 | 1              |
|--------------------------------------|----------------|
| 2 アプリケーション                           | 1              |
| 3 概要                                 |                |
| 4概要 (続き)                             |                |
| 5 Pin Configuration and Functions    |                |
| 6 Specifications                     |                |
| 6.1 Absolute Maximum Ratings         |                |
| 6.2 ESD Ratings                      |                |
| 6.3 Recommended Operating Conditions | <mark>7</mark> |
| 6.4 Thermal Information              | <mark>7</mark> |
| 6.5 Electrical Characteristics       | 8              |
| 6.6 Timing Requirements              | <mark>9</mark> |
| 6.7 Typical Characteristics          | 10             |
| 7 Detailed Description               | 12             |
| 7.1 Overview                         | 12             |
| 7.2 Functional Block Diagram         |                |
| 7.3 Feature Description              |                |
| 7.4 Device Functional Modes          | 18             |

| 7.5 Programming                         | 19              |
|---|-----------------|
| 7.6 Register Maps                       | <mark>23</mark> |
| 8 Application and Implementation        |                 |
| 8.1 Application Information             | 40              |
| 8.2 Typical Application                 | 40              |
| 8.3 Power Supply Recommendations        | 42              |
| 8.4 Layout                              | 42              |
| 9 Device and Documentation Support      |                 |
| 9.1 Related Links                       |                 |
| 9.2ドキュメントの更新通知を受け取る方法                   | 46              |
| 9.3 サポート・リソース                           | 46              |
| 9.4 Trademarks                          | 46              |
| 9.5 静電気放電に関する注意事項                       | 46              |
| 9.6 用語集                                 |                 |
| 10 Revision History                     |                 |
| 11 Mechanical, Packaging, and Orderable |                 |
| Information                             | 48              |
|   |                 |



# 4 概要 (続き)

LP50xx デバイスは、29kHz のスイッチング周波数、12 ビットの PWM 分解能で各 LED の出力を制御するので、スムーズな調光効果を達成でき、可聴周波数のノイズが排除されます。カラーミキシングと輝度の制御レジスタを別々に制御できるため、ソフトウェアのコーディングが明快になります。フェードイン、フェードアウト型のブリージング効果を行う際、グローバルな R、G、B バンクの制御により、マイクロコントローラの負荷が大幅に減少します。また、LP50xx デバイスにはPWM 位相シフト機能も実装されており、LED が同時にオンになるときの入力電力バジェットを低減するために役立ちます。

LP50xx デバイスには、自動パワーセービング モードが実装されており、非常に低い静止電流を実現しています。 すべて のチャネルが 30ms の間オフのとき、デバイスの合計消費電力は 10μA まで低下するため、LP50xx デバイスはバッテリ 駆動の最終製品に適しています。

3

Product Folder Links: LP5018 LP5024



# 5 Pin Configuration and Functions

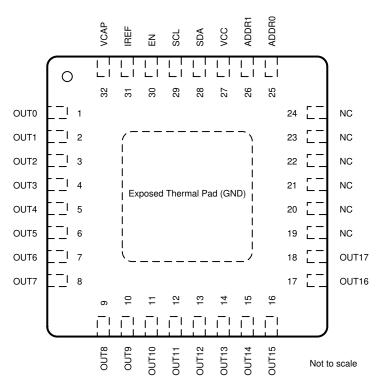


図 5-1. LP5018 RSM Package 32-Pin VQFN With Exposed Thermal Pad Top View

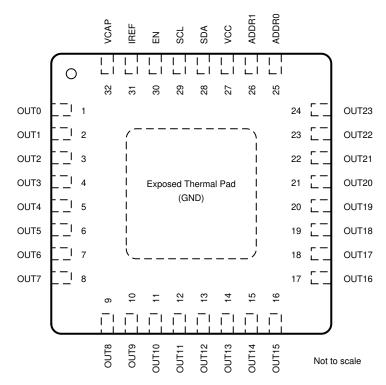


図 5-2. LP5024 RSM Package 32-Pin VQFN With Exposed Thermal Pad Top View

Copyright © 2024 Texas Instruments Incorporated

English Data Sheet: SLVSEB8

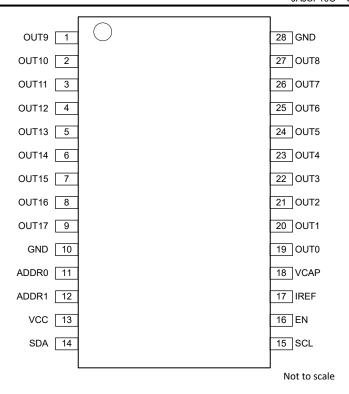


図 5-3. LP5018 DGS Package 28-pin VSSOP Top View

表 5-1. Pin Functions

|       | LP5018RSM         LP5024RSM         LP5018           DR0         25         25         11           DR1         26         26         12           30         30         16           F         31         31         17           19, 20, 21, 22, 23, 24 |           |           |             |   |  |  |
|-------|---|-----------|-----------|-------------|---|--|--|
| NAME  | NO.   |           | I/O       | DESCRIPTION |   |  |  |
| NAME  | LP5018RSM   | LP5024RSM | LP5018DGS |             |   |  |  |
| ADDR0 | 25  | 25        | 11        | _           | I <sup>2</sup> C slave-address selection pin. This pin must not be left floating. |  |  |
| ADDR1 | 26  | 26        | 12        | _           | I <sup>2</sup> C slave-address selection pin. This pin must not be left floating. |  |  |
| EN    | 30  | 30        | 16        | I           | Chip enable input pin   |  |  |
| IREF  | 31  | 31        | 17        | _           | Output current-reference global-setting pin                                       |  |  |
| NC    |   | _         | _         | _           | No internal connection  |  |  |
| OUT0  | 1   | 1         | 19        | 0           | Current sink output 0. If not used, this pin can be left floating.                |  |  |
| OUT1  | 2   | 2         | 20        | 0           | Current sink output 1. If not used, this pin can be left floating.                |  |  |
| OUT2  | 3   | 3         | 21        | 0           | Current sink output 2. If not used, this pin can be left floating.                |  |  |
| OUT3  | 4   | 4         | 22        | 0           | Current sink output 3. If not used, this pin can be left floating.                |  |  |
| OUT4  | 5   | 5         | 23        | 0           | Current sink output 4. If not used, this pin can be left floating.                |  |  |
| OUT5  | 6   | 6         | 24        | 0           | Current sink output 5. If not used, this pin can be left floating.                |  |  |
| OUT6  | 7   | 7         | 25        | 0           | Current sink output 6. If not used, this pin can be left floating.                |  |  |
| OUT7  | 8   | 8         | 26        | 0           | Current sink output 7. If not used, this pin can be left floating.                |  |  |
| OUT8  | 9   | 9         | 27        | 0           | Current sink output 8. If not used, this pin can be left floating.                |  |  |
| OUT9  | 10  | 10        | 1         | 0           | Current sink output 9. If not used, this pin can be left floating.                |  |  |
| OUT10 | 11  | 11        | 2         | 0           | Current sink output 10. If not used, this pin can be left floating.               |  |  |
| OUT11 | 12  | 12        | 3         | 0           | Current sink output 11. If not used, this pin can be left floating.               |  |  |
| OUT12 | 13  | 13        | 4         | 0           | Current sink output 12. If not used, this pin can be left floating.               |  |  |
| OUT13 | 14  | 14        | 5         | 0           | Current sink output 13. If not used, this pin can be left floating.               |  |  |
| OUT14 | 15  | 15        | 6         | 0           | Current sink output 14. If not used, this pin can be left floating.               |  |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



# 表 5-1. Pin Functions (続き)

|        |           | PIN       |               |     |  |
|--------|-----------|-----------|---------------|-----|--|
| NAME   |           | NO.       |               | I/O | DESCRIPTION  |
| NAIVIE | LP5018RSM | LP5024RSM | RSM LP5018DGS |     |  |
| OUT15  | 16        | 16        | 7             | 0   | Current sink output 15. If not used, this pin can be left floating.  |
| OUT16  | 17        | 17        | 8             | 0   | Current sink output 16. If not used, this pin can be left floating.  |
| OUT17  | 18        | 18        | 9             | 0   | Current sink output 17. If not used, this pin can be left floating.  |
| OUT18  | _         | 19        | _             | 0   | Current sink output 18. If not used, this pin can be left floating.  |
| OUT19  | _         | 20        | _             | 0   | Current sink output 19. If not used, this pin can be left floating.  |
| OUT20  | _         | 21        | _             | 0   | Current sink output 20. If not used, this pin can be left floating.  |
| OUT21  | _         | 22        | _             | 0   | Current sink output 21. If not used, this pin can be left floating.  |
| OUT22  | _         | 23        | _             | 0   | Current sink output 22. If not used, this pin can be left floating.  |
| OUT23  | _         | 24        | _             | 0   | Current sink output 23. If not used, this pin can be left floating.  |
| SCL    | 29        | 29        | 15            | I   | I <sup>2</sup> C bus clock line. If not used, this pin must be connected to GND or VCC.  |
| SDA    | 28        | 28        | 14            | I/O | I <sup>2</sup> C bus data line. If not used, this pin must be connected to GND or VCC.   |
| VCAP   | 32        | 32        | 18            | _   | Internal LDO output pin, this pin must be connected to a 1µF capacitor to GND. Place the capacitor as close to the device as possible. |
| VCC    | 27        | 27        | 13            | I   | Input power.   |
| GND    | GND       | GND       | 10, 28        | _   | Exposed thermal pad also serves the ground pin for the device.   |

English Data Sheet: SLVSEB8



# 6 Specifications

# **6.1 Absolute Maximum Ratings**

over operating ambient temperature range (unless otherwise noted)(1)

|  | MIN   | MAX           | UNIT |
|--|-------|---------------|------|
| Voltage on EN, IREF, OUTx, SCL, SDA, VCC | -0.3  | 6             | V    |
| Voltage on ADDRx                         | -0.3  | VCC+0.3       | V    |
| Voltage on VCAP                          | -0.3  | 2             | V    |
| Continuous power dissipation             | Inter | nally limited |      |
| Junction temperature, T <sub>J-MAX</sub> | -40   | 125           | °C   |
| Storage temperature, T <sub>stg</sub>    | -65   | 150           | °C   |

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

# 6.2 ESD Ratings

|                    |                         |  | VALUE | UNIT |
|--------------------|-------------------------|--|-------|------|
|                    |                         | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±4000 |      |
| V <sub>(ESD)</sub> | Electrostatic discharge | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±1500 | V    |

<sup>1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. Pins listed as ±1500 V may actually have higher performance.

# **6.3 Recommended Operating Conditions**

over operating ambient temperature range (unless otherwise noted)

|   | MIN | MAX | UNIT |
|---|-----|-----|------|
| Input voltage on VCC                          | 2.7 | 5.5 | V    |
| Voltage on OUTx                               | 0   | 5.5 | V    |
| Voltage on ADDRx, EN, SDA, SCL                | 0   | 5.5 | V    |
| Operating ambient temperature, T <sub>A</sub> | -40 | 85  | °C   |

#### **6.4 Thermal Information**

|                       |  | LP5018 d   | or LP5024   |      |
|-----------------------|--|------------|-------------|------|
|                       | THERMAL METRIC <sup>(1)</sup>                | RSM (VQFN) | DGS (VSSOP) | UNIT |
|                       |  | 32 PINS    | 28 PINS     |      |
| $R_{\theta JA}$       | Junction-to-ambient thermal resistance       | 36.4       | 80.2        | °C/W |
| R <sub>0JC(top)</sub> | Junction-to-case (top) thermal resistance    | 34.8       | 40.8        | °C/W |
| $R_{\theta JB}$       | Junction-to-board thermal resistance         | 15.9       | 41.0        | °C/W |
| $\Psi_{JT}$           | Junction-to-top characterization parameter   | 0.9        | 3.8         | °C/W |
| ΨЈВ                   | Junction-to-board characterization parameter | 16         | 40.7        | °C/W |
| R <sub>0JC(bot)</sub> | Junction-to-case (bottom) thermal resistance | 6.3        | N/A         | °C/W |

<sup>(1)</sup> For more information about traditional and new thermal metrics, see Semiconductor and ICPackage Thermal Metrics .

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. Pins listed as ±500 V may actually have higher performance.



#### **6.5 Electrical Characteristics**

over operating ambient temperature range ( $-40^{\circ}$ C <  $T_A$ <85°C) (unless otherwise noted)

|                     | PARAMETER  | TEST CONDITIONS  | MIN         | TYP  | MAX  | UNIT |  |
|---------------------|--|--|-------------|------|------|------|--|
| POWER               | SUPPLIES (VCC)   |  |             |      |      |      |  |
| V <sub>VCC</sub>    | Supply voltage   |  | 2.7         |      | 5.5  | V    |  |
|                     | Shutdown supply current  | V <sub>EN</sub> = 0 V  |             | 0.2  | 1    |      |  |
|                     | Standby supply current   | V <sub>EN</sub> = 3.3 V, Chip_EN = 0 (bit)   |             | 6    | 10   | μA   |  |
| I <sub>vcc</sub>    | Normal-mode supply current   | With 10-mA LED current per OUTx  |             | 5    | 8    | mA   |  |
| VCC                 | Power-save mode supply current   | V <sub>EN</sub> = 3.3 V, Chip_EN = 1 (bit),<br>Power_Save_EN = 1 (bit), all the<br>LEDs off duration > t <sub>PSM</sub>                                |             | 6    | 10   | μА   |  |
| V <sub>UVR</sub>    | Undervoltage restart   | V <sub>VCC</sub> rising  | ,           |      | 2.5  | V    |  |
| V <sub>UVF</sub>    | Undervoltage shutdown  | V <sub>VCC</sub> falling   | 2           |      |      | V    |  |
| V <sub>UV_HYS</sub> | Undervoltage shutdown hysteresis   |  |             | 0.2  |      | V    |  |
| OUTPUT              | STAGE (OUTx)   |  |             |      | I.   |      |  |
| I <sub>MAX</sub>    | Maximum sink current (OUT0–<br>OUTx) (For LP5024, x = 23. For<br>LP5018, x = 17.)                                    | V <sub>VCC</sub> in full range,<br>Max_Current_Option = 0 (bit), PWM<br>= 100%   |             |      | 25.5 | mA   |  |
| 'MAX                | Maximum sink current (OUT0–<br>OUTx) (For LP5024, x = 23. For<br>LP5018, x = 17.)                                    | V <sub>VCC</sub> ≥ 3.3 V, Max_Current_Option = 1 (bit), PWM = 100%   |             |      | 35   |      |  |
| I <sub>LIM</sub>    | Internal sink current limit (OUT0–<br>OUTx) (For LP5024, x = 23. For<br>LP5018, x = 17.)                             | V <sub>VCC</sub> in full range,<br>Max_Current_Option = 0 (bit), V <sub>IREF</sub><br>= 0 V  | 35          | 55   | 80   | mA   |  |
|                     | Internal sink current limit (OUT0–<br>OUTx) (For LP5024, x = 23. For<br>LP5018, x = 17.)                             | V <sub>VCC</sub> ≥ 3.3V, Max_Current_Option=1 (bit), V <sub>IREF</sub> = 0 V   | 40          | 75   | 120  |      |  |
| I <sub>lkg</sub>    | Leakage current (OUT0-OUTx) (For LP5024, x = 23. For LP5018, x = 17.)  | PWM = 0%   |             | 0.1  | 1    | μΑ   |  |
| I <sub>ERR_DD</sub> | Device to device current error, I <sub>ERR_DD</sub> =(I <sub>AVE</sub> -I <sub>SET</sub> )/I <sub>SET</sub> ×100%    | All channels' current set to 10 mA.  PWM = 100%. Already includes the  V <sub>IREF</sub> and K <sub>IREF</sub> tolerance                               | <b>-7</b> % |      | 7%   |      |  |
| I <sub>ERR_CC</sub> | Channel to channel current error, I <sub>ERR_CC</sub> =(I <sub>OUTX</sub> -I <sub>AVE</sub> )/I <sub>AVE</sub> ×100% | All channels' current set to 10 mA.  PWM = 100%. Already includes the  V <sub>IREF</sub> and K <sub>IREF</sub> tolerance                               | -7%         |      | 7%   |      |  |
| V <sub>IREF</sub>   | IREF voltage   |  |             | 0.7  |      | V    |  |
| K <sub>IREF</sub>   | IREF ratio   |  |             | 105  |      |      |  |
| $f_{\sf PWM}$       | PWM switching frequency  |  | 21          | 29   |      | kHz  |  |
| $V_{SAT}$           | Output saturation voltage  | V <sub>VCC</sub> in full range,<br>Max_Current_Option = 0 (bit), output<br>current set to 20 mA, the voltage<br>when the LED current has dropped<br>5% |             | 0.25 | 0.35 | V    |  |
|                     |  | V <sub>VCC</sub> ≥ 3.3 V, Max_Current_Option = 1 (bit), output current set to 20 mA, the voltage when the LED current has dropped 5%                   |             | 0.3  | 0.4  | •    |  |
| LOGIC IN            | IPUTS (EN, SCL, SDA, ADDRx)  |  |             |      |      |      |  |
| V <sub>IL</sub>     | Low level input voltage  |  |             |      | 0.4  | V    |  |
| V <sub>IH</sub>     | High level input voltage   |  | 1.4         |      |      | V    |  |
| I <sub>LOGIC</sub>  | Input current  |  | -1          |      | 1    | μΑ   |  |
| V <sub>SDA</sub>    | SDA output low level   | I <sub>PULLUP</sub> = 5 mA   |             |      | 0.4  | V    |  |

Copyright © 2024 Texas Instruments Incorporated

8

Product Folder Links: LP5018 LP5024



# 6.5 Electrical Characteristics (続き)

over operating ambient temperature range ( $-40^{\circ}$ C <  $T_A$ <85°C) (unless otherwise noted)

|                    | PARAMETER                               | TEST CONDITIONS | MIN | TYP MA | X UNIT |
|--------------------|---|-----------------|-----|--------|--------|
| PROTECTI           | ON CIRCUITS                             |                 |     |        |        |
| T <sub>(TSD)</sub> | Thermal-shutdown junction temperature   |                 |     | 160    | °C     |
| T <sub>(HYS)</sub> | Thermal shutdown temperature hysteresis |                 |     | 15     | °C     |

# **6.6 Timing Requirements**

over operating ambient temperature range (-40°C < T<sub>A</sub><85°C) (unless otherwise noted)

|                   | PARAMETER   | MIN                     | TYP | MAX | UNIT |
|-------------------|---|-------------------------|-----|-----|------|
| fosc              | Internal oscillator frequency   |                         | 15  |     | MHz  |
| t <sub>PSM</sub>  | Power save mode deglitch time   | 20                      | 30  | 40  | ms   |
| t <sub>EN_H</sub> | EN first rising edge until first I <sup>2</sup> C access                                |                         |     | 500 | μs   |
| t <sub>EN_L</sub> | EN first falling edge until first I <sup>2</sup> C reset                                |                         |     | 3   | μs   |
| $f_{\sf SCL}$     | I <sup>2</sup> C clock frequency  |                         |     | 400 | kHz  |
| 1                 | Hold time (repeated) START condition  | 0.6                     |     |     | μs   |
| 2                 | Clock low time  | 1.3                     |     |     | μs   |
| 3                 | Clock high time   | 600                     |     |     | ns   |
| 4                 | Setup time for a repeated START condition   | 600                     |     |     | ns   |
| 5                 | Data hold time  | 0                       |     |     | ns   |
| 6                 | Data setup time   | 100                     |     |     | ns   |
| 7                 | Rise time of SDA and SCL  | 20 + 0.1 C <sub>b</sub> |     | 300 | ns   |
| 8                 | Fall time of SDA and SCL  | 15 + 0.1 C <sub>b</sub> |     | 300 | ns   |
| 9                 | Setup time for STOP condition   | 600                     |     |     | ns   |
| 10                | Bus free time between a STOP and a START condition                                      | 1.3                     |     |     | μs   |
| C <sub>b</sub>    | Capacitive load parameter for each bus line Load of 1 pF corresponds to one nanosecond. | 10                      |     | 200 | pF   |

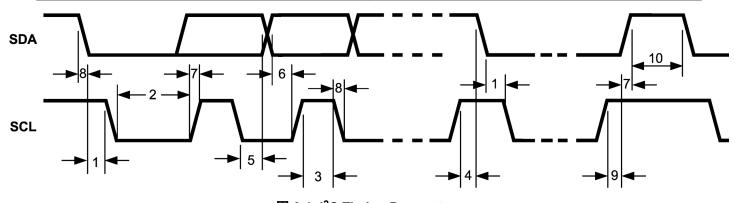



図 6-1. I<sup>2</sup>C Timing Parameters

9

Product Folder Links: LP5018 LP5024




### 6.7 Typical Characteristics

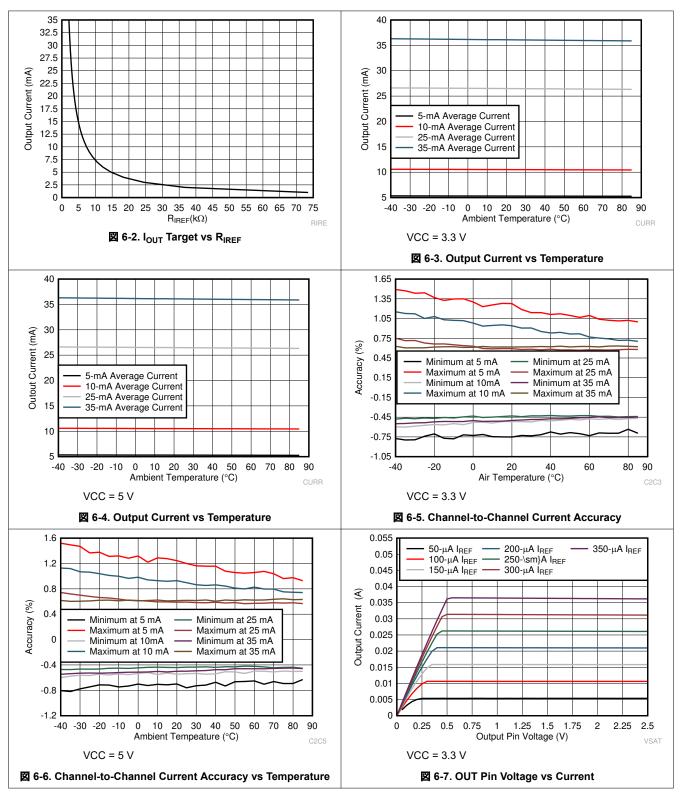

English Data Sheet: SLVSEB8



# **6.7 Typical Characteristics (continued)**

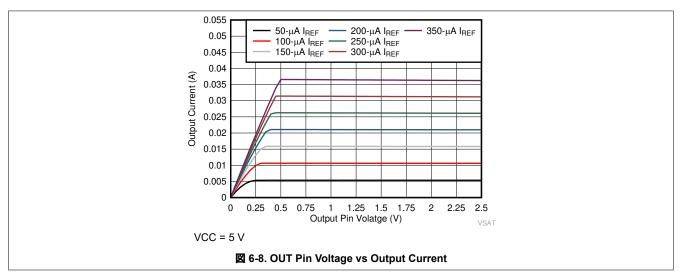


# 7 Detailed Description

#### 7.1 Overview

The LP50xx device is an 18- or 24-channel constant-current-sink LED driver. The LP50xx device includes all necessary power rails, an on-chip oscillator, and a two-wire serial  $I^2C$  interface. The maximum constant-current value of all channels is set by a single external resistor. Two hardware address pins allow up to four devices on the same bus. An automatic power-saving mode is implemented to keep the total current consumption under  $10\mu A$ , which makes the LP50xx device a potential choice for battery-powered end-equipment.

The LP50xx device is optimized for RGB LEDs regarding to both live effects and software efforts. The LP50xx device controls each LED output with 12-bit PWM resolution at 29kHz switching frequency, which helps achieve a smooth dimming effect and eliminates audible noise. The independent color-mixing and intensity-control registers make the software coding straightforward. When targeting a fade-in, fade-out type breathing effect, the global RGB bank control reduces the microcontroller loading significantly. The LP50xx device also implements a PWM phase-shifting function to help reduce the input power budget when LEDs turn on simultaneously.

### 7.2 Functional Block Diagram

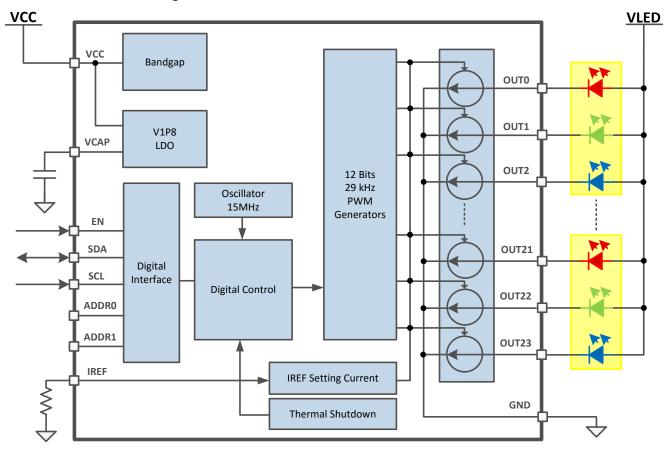

#### 7.3 Feature Description

#### 7.3.1 PWM Control for Each Channel

Most traditional LED drivers are designed for the single-color LEDs, in which the high-resolution PWM generator is used for intensity control only. However, for RGB LEDs, both the color mixing and intensity control should be addressed to achieve the target effect. With the traditional solution, the users must handle the color mixing and intensity control simultaneously with a single PWM register. Several undesired effects occur: the limited dimming steps, the complex software design, and the color distortion when using a logarithmic scale control.

The LP50xx device is designed with independent color mixing and intensity control, which makes the RGB LED effects fancy and the control experience straightforward. With the inputs of the color-mixing register and the intensity-control register, the final PWM generator output for each channel is 12-bit resolution and 29kHz dimming frequency, which helps achieve a smooth dimming effect and eliminates audible noise. See  $\boxtimes$  7-1.

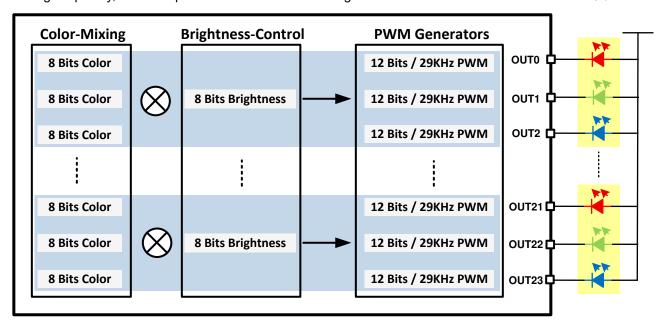


図 7-1. PWM Control Scheme for Each Channel

#### 7.3.1.1 Independent Color Mixing Per RGB LED Module

Each output channel has its own individual 8-bit color-setting register (OUTx\_COLOR). The device allows every RGB LED module to achieve >16 million (256 × 256 × 256) color-mixing.

#### 7.3.1.2 Independent Intensity Control Per RGB LED Module

When color is fixed, the independent intensity-control is used to achieve accurate and flexible dimming control for every RGB LED module.

#### 7.3.1.2.1 Intensity-Control Register Configuration

Every three consecutive output channels are assigned to their respective intensity-control register (LEDx\_BRIGHTNESS). For example, OUT0, OUT1, and OUT2 are assigned to LED0\_BRIGHTNESS, so it is recommended to connect the RGB LEDs in the sequence as shown in LED Bank Control . The LP50xx device allows 256-step intensity control for each RGB LED module, which helps achieve a smooth dimming effect.

Keeping FFh (default value) in the LED0\_BRIGHTNESS register results in 100% dimming duty cycle. With this setting, users can just configure the color mixing register by channel to achieve the target dimming effect in a single-color LED application.

#### 7.3.1.2.2 Logarithmic- or Linear-Scale Intensity Control

For human-eye-friendly visual performance, a logarithmic-scale dimming curve is usually implemented in LED drivers. However, for RGB LEDs, if using a single register to achieve both color mixing and intensity control, color distortion can be observed easily when using a logarithmic scale. The LP50xx device, with independent color-mixing and intensity-control registers, implements the logarithmic scale dimming control inside the intensity control function, which solves the color distortion issue effectively. See  $\boxtimes$  7-2. Also, the LP50xx device allows users to configure the dimming scale either logarithmically or linearly through the global Log\_Scale\_EN register. If a special dimming curve is desired, using the linear scale with software correction is the most flexible approach. See  $\boxtimes$  7-3.

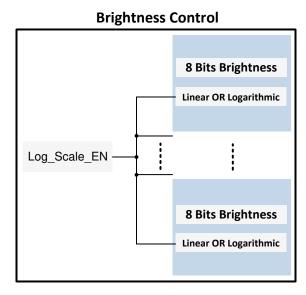


図 7-2. Logarithmic- or Linear-Scale Intensity Control

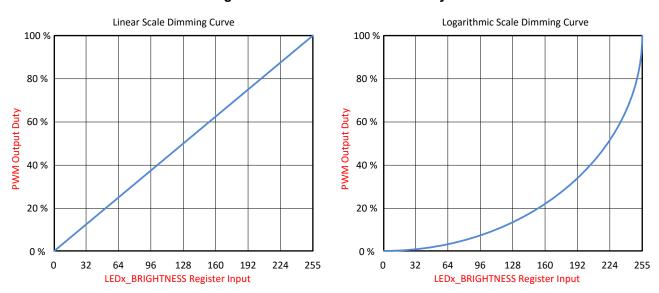


図 7-3. Logarithmic vs Linear Dimming Curve

#### 7.3.1.3 12-Bit, 29-kHz PWM Generator Per Channel

# 7.3.1.3.1 PWM Generator

With the inputs of the color mixing and the intensity control, the final output PWM duty cycle is defined as the product obtained by multiplying the color-mixing register value by the related intensity-control register value. The

Copyright © 2024 Texas Instruments Incorporated

English Data Sheet: SLVSEB8

final output PWM duty cycle has 12 bits of control accuracy, which is achieved by a 9 bits of pure PWM resolution and 3 bits of digital dithering control. For 3-bit dithering, every eighth pulse is made 1 LSB longer to increase the average value by 1 / 8th. The LP50xx device allows users to enable or disable the dithering function through the PWM\_Dithering\_EN register. When enabled (default), the output PWM duty-cycle accuracy is 12 bits. When disabled, the output PWM duty-cycle accuracy is 9 bits.

To eliminate the audible noise due to the PWM switching, the LP50xx device sets the PWM switching frequency at 29-kHz, above the 20-kHz human hearing range.

#### 7.3.1.4 PWM Phase-Shifting

A PWM phase-shifting scheme allows delaying the time when each LED driver is active. When the LED drivers are not activated simultaneously, the peak load current from the pre-stage power supply is significantly decreased. The scheme also reduces input-current ripple and ceramic-capacitor audible ringing. LED drivers are grouped into three different phases.

- Phase 1—the rising edge of the PWM pulse is fixed. The falling edge of the pulse is changed when the duty cycle changes. Phase 1 is applied to LED0, LED3, ..., LED21.
- Phase 2—the middle point of the PWM pulse is fixed. The pulse spreads in both directions when the PWM duty cycle is increased. Phase 2 is applied to LED1, LED4, ..., LED22.
- Phase 3—the falling edge of the PWM pulse is fixed. The rising edge of the pulse is changed when the duty cycle changes. Phase 3 is applied to LED2, LED5, ..., LED23.

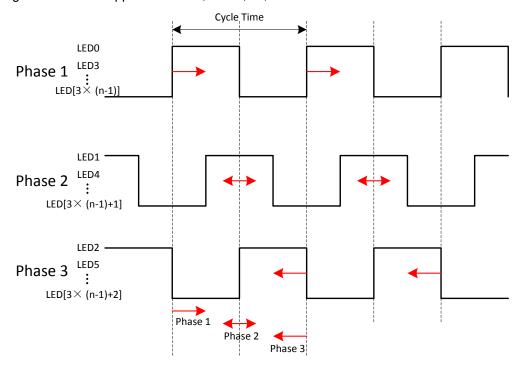


図 7-4. PWM Phase-Shifting

#### 7.3.2 LED Bank Control

For most LED-animation effects, like blinking and breathing, all the RGB LEDs have the same lighting pattern. Instead of controlling the individual LED separately, which occupies the microcontroller resources heavily, the LP50xx device provides an easy coding approach, the LED bank control.

Each channel can be configured as either independent control or bank control through the LEDx\_Bank\_EN register. When LEDx\_Bank\_EN = 0 (default), the LED is controlled independently by the related color-mixing and intensity-control registers. When LEDx\_Bank\_EN = 1, the LP50xx device drives the LEDs in LED bank-control mode. The LED bank has its own independent PWM control scheme, which is the same structure as the PWM

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ) を送信

scheme of each channel. For more details, see *PWM Control for Each Channel*. When a channel is configured in LED bank-control mode, the related color mixing and intensity control is governed by the bank control registers (BANK\_A\_COLOR, BANK\_B\_COLOR, BANK\_C\_COLOR, and BANK\_BRIGHTNESS) regardless of the inputs on its own color-mixing and intensity-control registers.

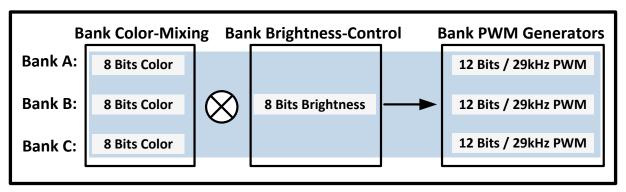


図 7-5. Bank PWM Control Scheme

表 7-1. Bank Number and LED Number Assignment

|            |            | . Dank Number a | nd LED Number A | Assignment  |                |  |
|------------|------------|-----------------|-----------------|-------------|----------------|--|
|            | OUT NUMBER |                 | OUT CORLOR      | BANK Number | RGB LED MODULE |  |
| LP5024VQFN | LP5018VQFN | LP5018VSSOP     | OUTCORLOR       | DANK Number | NUMBER         |  |
| OUT0       | OUT0       | OUT0            | OUT0_COLOR      | Bank A      |                |  |
| OUT1       | OUT1       | OUT1            | OUT1_COLOR      | Bank B      | LED0           |  |
| OUT2       | OUT2       | _               | OUT2_COLOR      | Bank C      | 1              |  |
| OUT3       | OUT3       | OUT2            | OUT3_COLOR      | Bank A      |                |  |
| OUT4       | OUT4       | OUT3            | OUT4_COLOR      | Bank B      | LED1           |  |
| OUT5       | OUT5       | OUT4            | OUT5_COLOR      | Bank C      |                |  |
| OUT6       | OUT6       | _               | OUT6_COLOR      | Bank A      |                |  |
| OUT7       | OUT7       | OUT5            | OUT7_COLOR      | Bank B      | LED2           |  |
| OUT8       | OUT8       | OUT6            | OUT8_COLOR      | Bank C      |                |  |
| OUT9       | 9 OUT9 (   |                 | OUT9_COLOR      | Bank A      |                |  |
| OUT10      | OUT10      | OUT8            | OUT10_COLOR     | Bank B      | LED3           |  |
| OUT11      | OUT11      | _               | OUT11_COLOR     | Bank C      |                |  |
| OUT12      | OUT12      | OUT9            | OUT12_COLOR     | Bank A      |                |  |
| OUT13      | OUT13      | OUT10           | OUT13_COLOR     | Bank B      | LED4           |  |
| OUT14      | OUT14      | OUT11           | OUT14_COLOR     | Bank C      |                |  |
| OUT15      | OUT15      | OUT12           | OUT15_COLOR     | Bank A      |                |  |
| OUT16      | OUT16      | _               | OUT16_COLOR     | Bank B      | LED5           |  |
| OUT17      | OUT17      | OUT13           | OUT17_COLOR     | Bank C      |                |  |
| OUT18      | _          | _               | OUT18_COLOR     | Bank A      |                |  |
| OUT19      | _          | OUT14           | OUT19_COLOR     | Bank B      | LED6           |  |
| OUT20      | — OUT15    |                 | OUT20_COLOR     | Bank C      | 1              |  |
| OUT21      | _          | OUT16           | OUT21_COLOR     | Bank A      |                |  |
| OUT22      | _          | OUT17           | OUT22_COLOR     | Bank B      | LED7           |  |
| OUT23      | _          | _               | OUT23_COLOR     | Bank C      |                |  |



With the bank control configuration, the LP50xx device enables users to achieve smooth and live LED effects globally with an ultrasimple software effort.  $\boxtimes$  7-6 shows an example using LED0 as an independent RGB indicator and others with group breathing effect.

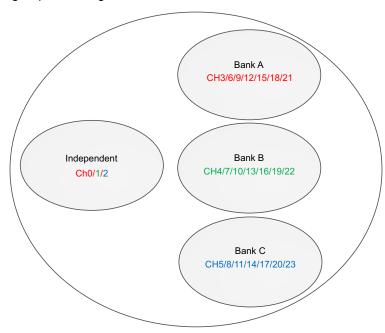


図 7-6. Bank PWM Control Example (Applicable to LP5024 VQFN and LP5018 VQFN only)

#### 7.3.3 Current Range Setting

The constant-current value ( $I_{SET}$ ) of all 24 channels is set by a single external resistor,  $R_{IREF}$ . The value of  $R_{IREF}$  can be calculated by  $\pm 1$ .

$$R_{IREF} = K_{IREF} \times \frac{V_{IREF}}{I_{SET}}$$
 (1)

where:

- K<sub>IREF</sub> = 105
- V<sub>IREE</sub> = 0.7V

With the IREF pin floating, the output current is close to zero. With the IREF pin shorted to GND, the LP50xx device provides internal current-limit protection, and the output-channel maximum current is limited to  $I_{LIM}$ .

The LP50xx device supports two levels of maximum output current, I<sub>MAX</sub>.

- When V<sub>CC</sub> is in the range from 2.7V to 5.5V, and the Max Current Option (bit) = 0, I<sub>MAX</sub> = 25.5mA.
- When  $V_{CC}$  is in the range from 3.3V to 5.5V, and the Max\_Current\_Option (bit) = 1,  $I_{MAX}$  = 35mA.

#### 7.3.4 Automatic Power-Save Mode

When all the LED outputs are inactive, the LP50xx device is able to enter power-save mode automatically, thus lowering idle-current consumption down to  $10\mu A$  (typical). Automatic power-save mode is enabled when register bit Power\_Save\_EN = 1 (default) and all the LEDs are off for a duration of >30ms. Almost all analog blocks are powered down in power-save mode. If any I<sup>2</sup>C command to the device occurs, the LP50xx device returns to NORMAL mode.

#### 7.3.5 Protection Features

#### 7.3.5.1 Thermal Shutdown

The LP50xx device implements a thermal shutdown mechanism to protect the device from damage due to overheating. When the junction temperature rises to 160°C (typical), the device switches into shutdown mode. The LP50xx device releases thermal shutdown when the junction temperature of the device is reduced to 145°C (typical).

#### 7.3.5.2 UVLO

The LP50xx device has an internal comparator that monitors the voltage at  $V_{CC}$ . When  $V_{CC}$  is below  $V_{UVF}$ , reset is active and the LP50xx device is in the INITIALIZATION state.

#### 7.4 Device Functional Modes

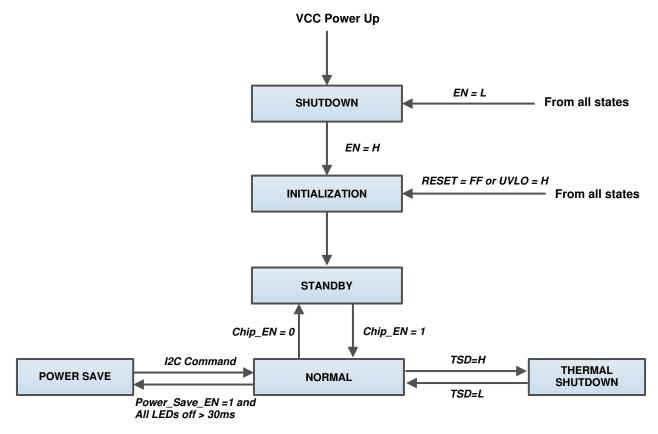


図 7-7. Functional Modes

- **INITIALIZATION**: The device enters into INITIALIZATION mode when EN = H. In this mode, all the registers are reset. Entry can also be from any state, if the RESET (register) = FFh or UVLO is active.
- NORMAL: The device enters the NORMAL mode when Chip\_EN (register) = 1. I<sub>CC</sub> is 10mA (typical).
- POWER SAVE: The device automatically enters the POWER SAVE mode when Power\_Save\_EN (register) =
  1 and all the LEDs are off for a duration of > 30ms. In POWER SAVE mode, analog blocks are disabled to
  minimize power consumption, but the registers retain the data and keep it available via I<sup>2</sup>C. I<sub>CC</sub> is 10μA
  (typical). In case of any I<sup>2</sup>C command to this device, it returns to the NORMAL mode.
- SHUTDOWN: The device enters into SHUTDOWN mode from all states on V<sub>CC</sub> power up or when EN = L.
   I<sub>CC</sub> is < 1μA (maximum).</li>
- **STANDBY**: The device enters the STANDBY mode when Chip\_EN (register) = 0. In this mode, all the OUTx pins are shut down, but the registers retain the data and keep it available via I<sup>2</sup>C. STANDBY is the low-power-consumption mode, when all circuit functions are disabled. I<sub>CC</sub> is 10µA (typical).

• **THERMAL SHUTDOWN**: The device automatically enters the THERMAL SHUTDOWN mode when the junction temperature exceeds 160°C (typical). In this mode, all the OUTx outputs are shut down. If the junction temperature decreases below 145°C (typical), the device returns to the NORMAL mode.

#### 7.5 Programming

#### 7.5.1 I<sup>2</sup>C Interface

The I<sup>2</sup>C-compatible two-wire serial interface provides access to the programmable functions and registers on the device. This protocol uses a two-wire interface for bidirectional communications between the devices connected to the bus. The two interface lines are the serial data line (SDA) and the serial clock line (SCL). Every device on the bus is assigned a unique address and acts as either a master or a slave depending on whether it generates or receives the serial clock, SCL. The SCL and SDA lines should each have a pullup resistor placed somewhere on the line and remain HIGH even when the bus is idle.

#### 7.5.1.1 Data Validity

The data on SDA line must be stable during the HIGH period of the clock signal (SCL). In other words, the state of the data line can only be changed when the clock signal is LOW.

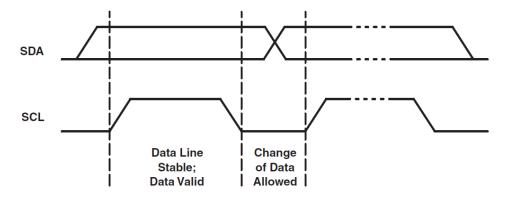


図 7-8. Data Validity

#### 7.5.1.2 Start and Stop Conditions

START and STOP conditions classify the beginning and the end of the data transfer session. A START condition is defined as the SDA signal transitioning from HIGH to LOW while the SCL line is HIGH. A STOP condition is defined as the SDA transitioning from LOW to HIGH while SCL is HIGH. The bus master always generates START and STOP conditions. The bus is considered to be busy after a START condition and free after a STOP condition. During data transmission, the bus master can generate repeated START conditions. First START and repeated START conditions are functionally equivalent.

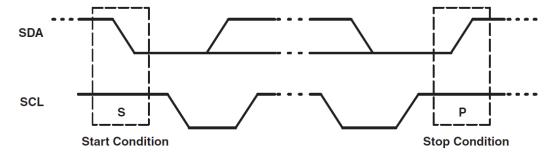


図 7-9. Start and Stop Conditions

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信

#### 7.5.1.3 Transferring Data

Every byte put on the SDA line must be eight bits long, with the most-significant bit (MSB) being transferred first. Each byte of data must be followed by an acknowledge bit. The acknowledge-related clock pulse is generated by the master. The master releases the SDA line (HIGH) during the acknowledge clock pulse. The device pulls down the SDA line during the ninth clock pulse, signifying an acknowledge. The device generates an acknowledge after each byte has been received.

There is one exception to the acknowledge-after-every-byte rule. When the master is the receiver, it must indicate to the transmitter an end of data by not acknowledging (negative acknowledge) the last byte clocked out of the slave. This negative acknowledge still includes the acknowledge clock pulse (generated by the master), but the SDA line is not pulled down.

After the START condition, the bus master sends a chip address. This address is seven bits long followed by an eighth bit which is a data direction bit (READ or WRITE). For the eighth bit, a 0 indicates a WRITE, and a 1 indicates a READ. The second byte selects the register to which the data is written. The third byte contains data to write to the selected register.

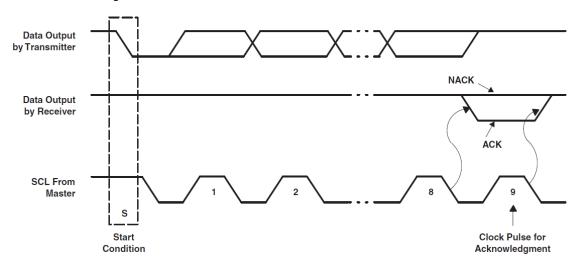


図 7-10. Acknowledge and Not Acknowledge on I<sup>2</sup>C Bus

### 7.5.1.4 I<sup>2</sup>C Slave Addressing

The device slave address is defined by connecting GND or VCC to the ADDR0 and ADDR1 pins. A total of four independent slave addresses can be realized by combinations when GND or VCC is connected to the ADDR0 and ADDR1 pins (see  $\pm$  7-2 and  $\pm$  7-3).

The device responds to a broadcast slave address regardless of the setting of the ADDR0 and ADDR1 pins. Global writes to the broadcast address can be used for configuring all devices simultaneously. The device supports global read using a broadcast address; however, the data read is only valid if all devices on the I<sup>2</sup>C bus contain the same value in the addressed register.

| ADDR1 | ADDR0 | SLAVE ADDRESS |           |  |  |  |  |  |  |
|-------|-------|---------------|-----------|--|--|--|--|--|--|
| ADDRI | ADDRO | INDEPENDENT   | BROADCAST |  |  |  |  |  |  |
| GND   | GND   | 010 1000      |           |  |  |  |  |  |  |
| GND   | VCC   | 010 1001      | 011 1100  |  |  |  |  |  |  |
| VCC   | GND   | 010 1010      | 011 1100  |  |  |  |  |  |  |
| VCC   | VCC   | 010 1011      |           |  |  |  |  |  |  |

表 7-2. Slave-Address Combinations

English Data Sheet: SLVSEB8

# 表 7-3. Chip Address

|             |       | SLAVE ADDRESS |       |       |       |       |       |        |  |
|-------------|-------|---------------|-------|-------|-------|-------|-------|--------|--|
|             | Bit 7 | Bit 6         | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0  |  |
| Independent | 0     | 1             | 0     | 1     | 0     | ADDR1 | ADDR0 | 1 or 0 |  |
| Broadcast   | 0     | 1             | 1     | 1     | 1     | 0     | 0     | 1 or 0 |  |

#### 7.5.1.5 Control-Register Write Cycle

- · The master device generates a start condition.
- The master device sends the slave address (7 bits) and the data direction bit (R/ $\overline{W}$  = 0).
- The slave device sends an acknowledge signal if the slave address is correct.
- The master device sends the control register address (8 bits).
- · The slave device sends an acknowledge signal.
- The master device sends the data byte to be written to the addressed register.
- The slave device sends an acknowledge signal.
- If the master device sends further data bytes, the control register address of the slave is incremented by 1 after the acknowledge signal. To reduce program load time, the device supports address auto incrementation. The register address is incremented after each 8 data bits.
- The write cycle ends when the master device creates a stop condition.



図 7-11. Write Cycle

#### 7.5.1.6 Control-Register Read Cycle

- · The master device generates a start condition.
- The master device sends the slave address (7 bits) and the data direction bit (R/ W = 0).
- The slave device sends an acknowledge signal if the slave address is correct.
- The master device sends the control register address (8 bits).
- The slave device sends an acknowledge signal.
- · The master device generates a repeated-start condition.
- The master device sends the slave address (7 bits) and the data direction bit (R/ $\overline{W}$  = 1).
- The slave device sends an acknowledge signal if the slave address is correct.
- The slave device sends the data byte from the addressed register.
- If the master device sends an acknowledge signal, the control-register address is incremented by 1. The slave device sends the data byte from the addressed register. To reduce program load time, the device supports address auto incrementation. The register address is incremented after each 8 data bits.
- The read cycle ends when the master device does not generate an acknowledge signal after a data byte and generates a stop condition.




図 7-12. Read Cycle

#### 7.5.1.7 Auto-Increment Feature

The auto-increment feature allows writing or reading several consecutive registers within one transmission. For example, when an 8-bit word is sent to the device, the internal address index counter is incremented by 1, and

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ) を送信



the next register is written. The auto-increment feature is enabled by default and can be disabled by setting the Auto\_Incr\_EN bit = 0 in the DEVICE\_CONFIG1 register. The auto-increment feature is applied for the full register address from 0h to FFh.

Product Folder Links: LP5018 LP5024



# 7.6 Register Maps

表 7-4 lists the memory-mapped registers of the device.

# 表 7-4. Register Maps

|                     |      |      | I            |                    | 32, 7 7. 1   | register maps     |              |                      | I                      |                |              |
|---------------------|------|------|--------------|--------------------|--------------|-------------------|--------------|----------------------|------------------------|----------------|--------------|
| REGISTER<br>NAME    | ADDR | TYPE | D7           | D6                 | D5           | D4                | D3           | D2                   | D1                     | D0             | DEF-<br>AULT |
| DEVICE_<br>CONFIG0  | 00h  | R/W  | RESERVED     | Chip_EN            |              |                   | RESE         | RVED                 |                        |                | 00h          |
| DEVICE_<br>CONFIG1  | 01h  | R/W  | RESE         | RVED               | Log_Scale_EN | Power_Save_<br>EN | Auto_Incr_EN | PWM_<br>Dithering_EN | Max_Current_<br>Option | LED_Global Off | 3Ch          |
| LED_CONFIG0         | 02h  | R/W  | LED7_Bank_EN | LED6_Bank_EN       | LED5_Bank_EN | LED4_Bank_EN      | LED3_Bank_EN | LED2_Bank_EN         | LED1_Bank_EN           | LED0_Bank_EN   | 00h          |
| BANK_<br>BRIGHTNESS | 03h  | R/W  |              | Bank_Brightness FF |              |                   |              |                      |                        | FFh            |              |
| BANK_A_<br>COLOR    | 04h  | R/W  |              | Bank_A_Color 0     |              |                   |              |                      | 00h                    |                |              |
| BANK_B_<br>COLOR    | 05h  | R/W  |              | Bank_B_Color 0     |              |                   |              |                      |                        | 00h            |              |
| BANK_C_<br>COLOR    | 06h  | R/ ₩ |              | Bank_C_Color 00    |              |                   |              |                      |                        | 00h            |              |
| LED0_<br>BRIGHTNESS | 07h  | R/ ₩ |              |                    |              | LED0_B            | rightness    |                      |                        |                | FFh          |
| LED1_<br>BRIGHTNESS | 08h  | R/W  |              |                    |              | LED1_B            | rightness    |                      |                        |                | FFh          |
| LED2_<br>BRIGHTNESS | 09h  | R/W  |              |                    |              | LED2_B            | rightness    |                      |                        |                | FFh          |
| LED3_<br>BRIGHTNESS | 0Ah  | R/W  |              |                    |              | LED3_B            | rightness    |                      |                        |                | FFh          |
| LED4_<br>BRIGHTNESS | 0Bh  | R/ ₩ |              |                    |              | LED4_B            | rightness    |                      |                        |                | FFh          |
| LED5_<br>BRIGHTNESS | 0Ch  | R/₩  |              |                    |              | LED5_B            | rightness    |                      |                        |                | FFh          |
| LED6_<br>BRIGHTNESS | 0Dh  | R/W  |              |                    |              | LED6_B            | rightness    |                      |                        |                | FFh          |
| LED7_<br>BRIGHTNESS | 0Eh  | R/W  |              | LED7_Brightness F  |              |                   |              |                      | FFh                    |                |              |
| OUT0_COLOR          | 0Fh  | R/W  |              | OUT0_Color 00      |              |                   |              |                      |                        | 00h            |              |
| OUT1_COLOR          | 10h  | R/W  |              | OUT1_Color 0       |              |                   |              |                      | 00h                    |                |              |
| OUT2_COLOR          | 11h  | R/W  |              |                    |              | OUT2              | _Color       |                      |                        |                | 00h          |

資料に関するフィードバック (ご意見やお問い合わせ) を送信



表 7-4. Register Maps (続き)

| REGISTER<br>NAME | ADDR | TYPE | D7          | D6          | D5 | D4    | D3     | D2 | D1  | D0  | DEF-<br>AULT |
|------------------|------|------|-------------|-------------|----|-------|--------|----|-----|-----|--------------|
| OUT3_COLOR       | 12h  | R/W  |             | OUT3_Color  |    |       |        |    |     |     |              |
| OUT4_COLOR       | 13h  | R/W  |             |             |    | OUT4  | _Color |    |     |     | 00h          |
| OUT5_COLOR       | 14h  | R/W  |             |             |    | OUT5  | _Color |    |     |     | 00h          |
| OUT6_COLOR       | 15h  | R/W  |             |             |    | OUT6  | _Color |    |     |     | 00h          |
| OUT7_COLOR       | 16h  | R/W  |             |             |    | OUT7  | _Color |    |     |     | 00h          |
| OUT8_COLOR       | 17h  | R/W  |             |             |    | OUT8  | _Color |    |     |     | 00h          |
| OUT9_COLOR       | 18h  | R/W  |             |             |    | OUT9  | _Color |    |     |     | 00h          |
| OUT10_COLOR      | 19h  | R/W  |             |             |    | OUT10 | _Color |    |     |     | 00h          |
| OUT11_COLOR      | 1Ah  | R/W  |             |             |    | OUT11 | _Color |    |     |     | 00h          |
| OUT12_COLOR      | 1Bh  | R/W  |             |             |    | OUT12 | _Color |    |     |     | 00h          |
| OUT13_COLOR      | 1Ch  | R/W  |             |             |    | OUT13 | _Color |    |     |     | 00h          |
| OUT14_COLOR      | 1Dh  | R/W  |             |             |    | OUT14 | _Color |    |     |     | 00h          |
| OUT15_COLOR      | 1Eh  | R/W  |             |             |    | OUT15 | _Color |    |     |     | 00h          |
| OUT16_COLOR      | 1Fh  | R/W  |             |             |    | OUT16 | _Color |    |     |     | 00h          |
| OUT17_COLOR      | 20h  | R/W  |             |             |    | OUT17 | _Color |    |     |     | 00h          |
| OUT18_COLOR      | 21h  | R/W  |             |             |    | OUT18 | _Color |    |     |     | 00h          |
| OUT19_COLOR      | 22h  | R/W  |             |             |    | OUT19 | _Color |    |     |     | 00h          |
| OUT20_COLOR      | 23h  | R/W  |             | OUT20_Color |    |       |        |    |     | 00h |              |
| OUT21_COLOR      | 24h  | R/W  | OUT21_Color |             |    |       |        |    | 00h |     |              |
| OUT22_COLOR      | 25h  | R/W  | OUT22_Color |             |    |       |        |    | 00h |     |              |
| OUT23_COLOR      | 26h  | R/W  |             | OUT23_Color |    |       |        |    |     |     | 00h          |
| RESET            | 27h  | W    |             |             |    | Re    | set    |    |     |     | 00h          |

24

Product Folder Links: LP5018 LP5024



表 7-5. Access Type Codes

| ACCESS TYPE            | CODE                   | DESCRIPTION                            |  |  |  |  |  |  |
|------------------------|------------------------|--|--|--|--|--|--|--|
| Read Type              |                        |  |  |  |  |  |  |  |
| R                      | R                      | Read                                   |  |  |  |  |  |  |
| Write Type             |                        |  |  |  |  |  |  |  |
| W                      | W                      | Write                                  |  |  |  |  |  |  |
| Reset or Default Value | Reset or Default Value |  |  |  |  |  |  |  |
| -n                     |                        | Value after reset or the default value |  |  |  |  |  |  |

25

Product Folder Links: LP5018 LP5024

# 7.6.1 DEVICE\_CONFIG0 (Address = 0h) [reset = 0h]

DEVICE\_CONFIG0 is shown in 図 7-13 and described in 表 7-6.

Return to 表 7-4.

# 図 7-13. DEVICE\_CONFIG0 Register

| 7        | 6       | 5 | 4 | 3    | 2    | 1 | 0 |
|----------|---------|---|---|------|------|---|---|
| RESERVED | Chip_EN |   |   | RESE | RVED |   |   |
| R/ W-0h  | R/ W-0h |   |   | R/ ₹ | ∇-0h |   |   |

# 表 7-6. DEVICE\_CONFIGO Register Field Descriptions

| Bit | Field    | Туре | Reset | Description                                  |
|-----|----------|------|-------|--|
| 7   | RESERVED | R/W  | 0h    | Reserved                                     |
| 6   | Chip_EN  | R/W  | 0h    | 1 = LP50xx enabled<br>0 = LP50xx not enabled |
| 5–0 | RESERVED | R/W  | 0h    | Reserved                                     |

# 7.6.2 DEVICE\_CONFIG1 (Address = 1h) [reset = 3Ch]

DEVICE\_CONFIG1 is shown in 図 7-14 and described in 表 7-7.

Return to 表 7-4.

# 図 7-14. DEVICE\_CONFIG1 Register

| 7    | 6    | 5               | 4            | 3            | 2       | 1              | 0              |
|------|------|-----------------|--------------|--------------|---------|----------------|----------------|
| RESE | RVED | Log_Scale_EN    | Power_Save_E | Auto_Incr_EN |         | Optional_Headr | LED_Global Off |
|      |      |                 | N            |              | _EN     | oom            |                |
| R/ ₹ | ∇-0h | R/ <b>W</b> -1h | R/ ₩-1h      | R/ ₩-1h      | R/ ₩-1h | R/ W-0h        | R/ ₩-0h        |

### 表 7-7. DEVICE\_CONFIG1 Register Field Descriptions

| Bit | Field              | Туре | Reset | Description  |
|-----|--------------------|------|-------|--|
| 7–6 | RESERVED           | R/W  | 0h    | Reserved   |
| 5   | Log_Scale_EN       | R/W  | 1h    | 1 = Logarithmic scale dimming curve enabled     0 = Linear scale dimming curve enabled                         |
| 4   | Power_Save_EN      | R/W  | 1h    | <ul><li>1 = Automatic power-saving mode enabled</li><li>0 = Automatic power-saving mode not enabled</li></ul>  |
| 3   | Auto_Incr_EN       | R/W  | 1h    | <ul><li>1 = Automatic increment mode enabled</li><li>0 = Automatic increment mode not enabled</li></ul>        |
| 2   | PWM_Dithering_EN   | R/W  | 1h    | 1 = PWM dithering mode enabled<br>0 = PWM dithering mode not enabled   |
| 1   | Max_Current_Option | R/W  | 0h    | 1 = Output maximum current I <sub>MAX</sub> = 35 mA.<br>0 = Output maximum current I <sub>MAX</sub> = 25.5 mA. |
| 0   | LED_Global Off     | R/W  | 0h    | 1 = Shut down all LEDs<br>0 = Normal operation   |

# 7.6.3 LED\_CONFIG0 (Address = 2h) [reset = 00h]

LED\_CONFIG0 is shown in 図 7-15 and described in 表 7-8.

Return to 表 7-4.

#### 図 7-15. LED CONFIG0 Register

|             |             |             | _           |             |             |             |             |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 7           | 6           | 5           | 4           | 3           | 2           | 1           | 0           |
| LED7_Bank_E | LED6_Bank_E | LED5_Bank_E | LED4_Bank_E | LED3_Bank_E | LED2_Bank_E | LED1_Bank_E | LED0_Bank_E |
| N           | N           | N           | N           | N           | N           | N           | N           |

資料に関するフィードバック(ご意見やお問い合わせ)を送信

Copyright © 2024 Texas Instruments Incorporated



# 図 7-15. LED\_CONFIG0 Register (続き)

R/ $\overline{W}$ -0h R/ $\overline{W}$ -0h

# 表 7-8. LED\_CONFIG0 Register Field Descriptions

| Bit | Field        | Туре | Reset | Description   |
|-----|--------------|------|-------|---|
| 7   | LED7_Bank_EN | R/W  | 0h    | 1 = LED7 bank control mode enabled 0 = LED7 independent control mode enabled    |
| 6   | LED6_Bank_EN | R/W  | 0h    | 1 = LED6 bank control mode enabled<br>0 = LED6 independent control mode enabled |
| 5   | LED5_Bank_EN | R/W  | 0h    | 1 = LED5 bank control mode enabled<br>0 = LED5 independent control mode enabled |
| 4   | LED4_Bank_EN | R/W  | 0h    | 1 = LED4 bank control mode enabled<br>0 = LED4 independent control mode enabled |
| 3   | LED3_Bank_EN | R/W  | 0h    | 1 = LED3 bank control mode enabled<br>0 = LED3 Independent control mode enabled |
| 2   | LED2_Bank_EN | R/W  | 0h    | 1 = LED2 bank control mode enabled<br>0 = LED2 independent control mode enabled |
| 1   | LED1_Bank_EN | R/W  | 0h    | 1 = LED1 bank control mode enabled<br>0 = LED1 independent control mode enabled |
| 0   | LED0_Bank_EN | R/W  | 0h    | 1 = LED0 bank control mode enabled<br>0 = LED0 independent control mode enabled |

# 7.6.4 BANK\_BRIGHTNESS (Address = 3h) [reset = FFh]

BANK\_BRIGHTNESS is shown in 図 7-16 and described in 表 7-9.

Return to 表 7-4.

# 図 7-16. BANK\_BRIGHTNESS Register

| 7 6 5 4 |                 |  |     | 3    | 2 | 1 | 0 |  |
|---------|-----------------|--|-----|------|---|---|---|--|
|         | Bank_Brightness |  |     |      |   |   |   |  |
|         |                 |  | R/W | -FFh |   |   |   |  |

# 表 7-9. BANK\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description                      |
|-----|-----------------|------|-------|----------------------------------|
| 7–0 | Bank_Brightness | R/W  | FFh   | FFh = 100% of full brightness    |
|     |                 |      |       | <br>80h = 50% of full brightness |
|     |                 |      |       | 00h = 0% of full brightness      |

# $7.6.5 \, BANK\_A\_COLOR \, (Address = 4h) \, [reset = 00h]$

BANK\_A\_COLOR is shown in 図 7-17 and described in 表 7-10.

Return to 表 7-4.

# 図 7-17. BANK\_A\_COLOR Register

| 7 | 6            | 5 | 4 | 3 | 2 | 1 | 0 |  |
|---|--------------|---|---|---|---|---|---|--|
|   | Bank_A_Color |   |   |   |   |   |   |  |
|   | R/ W-0h      |   |   |   |   |   |   |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



# 表 7-10. BANK\_A\_COLOR Register Field Descriptions

| Bit | Field        | Туре | Reset | Description                                   |
|-----|--------------|------|-------|---|
| 7–0 | Bank_A_Color | R/W  | 0h    | FFh = The color mixing percentage is 100%.    |
|     |              |      |       | <br>80h = The color mixing percentage is 50%. |
|     |              |      |       | <br>00h = The color mixing percentage is 0%.  |

# $7.6.6 \; BANK\_B\_COLOR \; (Address = 5h) \; [reset = 00h]$

BANK\_B\_COLOR is shown in 図 7-18 and described in 表 7-11.

Return to 表 7-4.

# 図 7-18. BANK\_B\_COLOR Register

| 7            | 6 | 5 4 |      | 3    | 2 | 1 | 0 |
|--------------|---|-----|------|------|---|---|---|
| Bank_B_Color |   |     |      |      |   |   |   |
|              |   |     | R/ ₹ | √-0h |   |   |   |

# 表 7-11. BANK\_B\_COLOR Register Field Descriptions


|   | Bit | Field        | Туре | Reset | Description                                   |
|---|-----|--------------|------|-------|---|
| Γ | 7–0 | Bank_B_Color | R/W  | 0h    | FFh = The color mixing percentage is 100%.    |
|   |     |              |      |       | <br>80h = The color mixing percentage is 50%. |
|   |     |              |      |       | <br>00h = The color mixing percentage is 0%.  |

# $7.6.7 \; BANK\_C\_COLOR \; (Address = 6h) \; [reset = 00h]$

BANK\_C\_COLOR is shown in 図 7-19 and described in 表 7-12.

Return to 表 7-4.

# 図 7-19. BANK\_C\_COLOR Register



#### 表 7-12. BANK\_C\_COLOR Register Field Descriptions

| Bit | Field        | Туре | Reset | Description                                   |
|-----|--------------|------|-------|---|
| 7–0 | Bank_C_Color | R/W  | 0h    | FFh = The color mixing percentage is 100%.    |
|     |              |      |       | <br>80h = The color mixing percentage is 50%. |
|     |              |      |       | <br>00h = The color mixing percentage is 0%.  |

# 7.6.8 LED0\_BRIGHTNESS (Address = 7h) [reset = FFh]

LED0\_BRIGHTNESS is shown in 図 7-20 and described in 表 7-13.

Return to 表 7-4.

#### 図 7-20. LED0\_BRIGHTNESS Register

| 7 | 7 6 5 4         |  |  |  | 2 | 1 | 0 |  |
|---|-----------------|--|--|--|---|---|---|--|
|   | LED0_Brightness |  |  |  |   |   |   |  |
|   | R/ W-FFh        |  |  |  |   |   |   |  |

資料に関するフィードバック (ご意見やお問い合わせ) を送信

Copyright © 2024 Texas Instruments Incorporated



# 表 7-13. LED0\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description                    |
|-----|-----------------|------|-------|--------------------------------|
| 7–0 | LED0_Brightness | R/W  | FFh   | FFh = 100% of full intensity   |
|     |                 |      |       | 80h = 50% of full intensity    |
|     |                 |      |       | <br>00h = 0% of full intensity |

#### 7.6.9 LED1\_BRIGHTNESS (Address = 8h) [reset = FFh]

LED1 BRIGHTNESS is shown in 図 7-21 and described in 表 7-14.

Return to 表 7-4.

# 図 7-21. LED1\_BRIGHTNESS Register

| 7               | 6 | 5 | 4    | 3     | 2 | 1 | 0 |
|-----------------|---|---|------|-------|---|---|---|
| LED1_Brightness |   |   |      |       |   |   |   |
|                 |   |   | R/ W | 7-FFh |   |   |   |

### 表 7-14. LED1 BRIGHTNESS Register Field Descriptions

|   |     |                 | _    |       | 9                               |
|---|-----|-----------------|------|-------|---------------------------------|
|   | Bit | Field           | Туре | Reset | Description                     |
| ĺ | 7–0 | LED1_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|   |     |                 |      |       | <br>80h = 50% of full intensity |
|   |     |                 |      |       | <br>00h = 0% of full intensity  |

### 7.6.10 LED2\_BRIGHTNESS (Address = 9h) [reset = FFh]

LED2\_BRIGHTNESS is shown in 図 7-22 and described in 表 7-15.

Return to 表 7-4.

### 図 7-22. LED2\_BRIGHTNESS Register



#### 表 7-15. LED2\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description                     |
|-----|-----------------|------|-------|---------------------------------|
| 7–0 | LED2_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|     |                 |      |       | <br>80h = 50% of full intensity |
|     |                 |      |       | 00h = 0% of full intensity      |

# 7.6.11 LED3\_BRIGHTNESS (Address = 0Ah) [reset = FFh]

LED3\_BRIGHTNESS is shown in 図 7-23 and described in 表 7-16.

Return to 表 7-4.

#### 図 7-23. LED3 BRIGHTNESS Register

|                 |          |   | · - |   | J |   |   |  |
|-----------------|----------|---|-----|---|---|---|---|--|
| 7               | 6        | 5 | 4   | 3 | 2 | 1 | 0 |  |
| LED3_Brightness |          |   |     |   |   |   |   |  |
|                 | R/ W-FFh |   |     |   |   |   |   |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



# 表 7-16. LED3\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description                     |
|-----|-----------------|------|-------|---------------------------------|
| 7–0 | LED3_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|     |                 |      |       | <br>80h = 50% of full intensity |
|     |                 |      |       | <br>00h = 0% of full intensity  |

# 7.6.12 LED4\_BRIGHTNESS (Address = 0Bh) [reset = FFh]

LED4\_BRIGHTNESS is shown in 図 7-24 and described in 表 7-17.

Return to 表 7-4.

# 図 7-24. LED4\_BRIGHTNESS Register

| 7 | 6               | 5 | 4    | 3    | 2 | 1 | 0 |
|---|-----------------|---|------|------|---|---|---|
|   | LED4_Brightness |   |      |      |   |   |   |
|   |                 |   | R/ W | -FFh |   |   |   |

# 表 7-17. LED4\_BRIGHTNESS Register Field Descriptions


| Bit | Field           | Туре | Reset | Description                     |
|-----|-----------------|------|-------|---------------------------------|
| 7–0 | LED4_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|     |                 |      |       | <br>80h = 50% of full intensity |
|     |                 |      |       | 00h = 0% of full intensity      |

# 7.6.13 LED5\_BRIGHTNESS (Address = 0Ch) [reset = FFh]

LED5\_BRIGHTNESS is shown in 図 7-25 and described in 表 7-18.

Return to 表 7-4.

# 図 7-25. LED5\_BRIGHTNESS Register



#### 表 7-18. LED5\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description                     |
|-----|-----------------|------|-------|---------------------------------|
| 7–0 | LED5_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|     |                 |      |       | <br>80h = 50% of full intensity |
|     |                 |      |       | <br>00h = 0% of full intensity  |

# 7.6.14 LED6\_BRIGHTNESS (Address = 0Dh) [reset = FFh]

LED6\_BRIGHTNESS is shown in 図 7-26 and described in 表 7-19.

Return to 表 7-4.

#### 図 7-26. LED6\_BRIGHTNESS Register

| 7 | 6               | 5 | 4 | 3 | 2 | 1 | 0 |  |  |
|---|-----------------|---|---|---|---|---|---|--|--|
|   | LED6_Brightness |   |   |   |   |   |   |  |  |
|   | R/ W-FFh        |   |   |   |   |   |   |  |  |

資料に関するフィードバック (ご意見やお問い合わせ) を送信

Copyright © 2024 Texas Instruments Incorporated



# 表 7-19. LED6\_BRIGHTNESS Register Field Descriptions

| Bit | Field           | Туре | Reset | Description  |
|-----|-----------------|------|-------|--|
| 7–0 | LED6_Brightness | R/W  | FFh   | FFh = 100% of full intensity                           |
|     |                 |      |       | 80h = 50% of full intensity 00h = 0% of full intensity |

# 7.6.15 LED7\_BRIGHTNESS (Address = 0Eh) [reset = FFh]

LED7\_BRIGHTNESS is shown in 図 7-27 and described in 表 7-20.

Return to 表 7-4.

# 図 7-27. LED7\_BRIGHTNESS Register

| 7 | 6               | 5 | 4    | 3    | 2 | 1 | 0 |
|---|-----------------|---|------|------|---|---|---|
|   | LED7_Brightness |   |      |      |   |   |   |
|   |                 |   | R/ W | -FFh |   |   |   |

#### 表 7-20. LED7 BRIGHTNESS Register Field Descriptions

|     |                 | _    |       | •                               |
|-----|-----------------|------|-------|---------------------------------|
| Bit | Field           | Туре | Reset | Description                     |
| 7–0 | LED7_Brightness | R/W  | FFh   | FFh = 100% of full intensity    |
|     |                 |      |       | <br>80h = 50% of full intensity |
|     |                 |      |       | <br>00h = 0% of full intensity  |

### 7.6.16 OUT0\_COLOR (Address = 0Fh) [reset = 00h]

OUT0\_COLOR is shown in 図 7-28 and described in 表 7-21.

Return to 表 7-4.

#### 図 7-28. OUT0\_COLOR Register



#### 表 7-21. OUT0\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset | Description                                  |
|-----|------------|------|-------|--|
| 7–0 | OUT0_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |            |      |       | <br>80h =The color mixing percentage is 50%. |
|     |            |      |       | 00h = The color mixing percentage is 0%.     |

# 7.6.17 OUT1\_COLOR (Address = 10h) [reset = 00h]

OUT1\_COLOR is shown in 図 7-29 and described in 表 7-22.

Return to 表 7-4.

# 図 7-29. OUT1\_COLOR Register

| 7          | 6        | 5 | 4 | 3 | 2 | 1 | 0 |  |  |
|------------|----------|---|---|---|---|---|---|--|--|
| OUT1_Color |          |   |   |   |   |   |   |  |  |
|            | R/ ₩-00h |   |   |   |   |   |   |  |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



# 表 7-22. OUT1\_COLOR Register Field Descriptions


| Bit | Field      | Туре | Reset | Description                                |
|-----|------------|------|-------|--|
| 7–0 | OUT1_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%. |
|     |            |      |       | 80h =The color mixing percentage is 50%.   |
|     |            |      |       | 00h = The color mixing percentage is 0%.   |

# 7.6.18 OUT2\_COLOR (Address = 11h) [reset = 00h]

OUT2\_COLOR is shown in 図 7-30 and described in 表 7-23.

Return to 表 7-4.

# 図 7-30. OUT2\_COLOR Register



# 表 7-23. OUT2\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset                                    | Description                                  |
|-----|------------|------|--|--|
| 7–0 | OUT2_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%.   |
|     |            |      |  | <br>80h =The color mixing percentage is 50%. |
|     |            |      | 00h = The color mixing percentage is 0%. |  |

# 7.6.19 OUT3\_COLOR (Address = 12h) [reset = 00h]

OUT3\_COLOR is shown in 図 7-31 and described in 表 7-24.

Return to 表 7-4.

# 図 7-31. OUT3\_COLOR Register



#### 表 7-24. OUT3\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset                                    | Description                                |  |
|-----|------------|------|--|--|--|
| 7–0 | OUT3_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%. |  |
|     |            |      |  | 80h =The color mixing percentage is 50%.   |  |
|     |            |      | 00h = The color mixing percentage is 0%. |  |  |

# 7.6.20 OUT4\_COLOR (Address = 13h) [reset = 00h]

OUT4\_COLOR is shown in 図 7-32 and described in 表 7-25.

Return to 表 7-4.

#### 図 7-32. OUT4\_COLOR Register

| 7          | 6        | 5 | 4 | 3 | 2 | 1 | 0 |  |  |  |  |
|------------|----------|---|---|---|---|---|---|--|--|--|--|
| OUT4_Color |          |   |   |   |   |   |   |  |  |  |  |
|            | R/ W-00h |   |   |   |   |   |   |  |  |  |  |

English Data Sheet: SLVSEB8



# 表 7-25. OUT4\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset | Description                                |  |
|-----|------------|------|-------|--|--|
| 7–0 | OUT4_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%. |  |
|     |            |      |       | 80h =The color mixing percentage is 50%.   |  |
|     |            |      |       | 00h = The color mixing percentage is 0%.   |  |

# 7.6.21 OUT5\_COLOR (Address = 14h) [reset = 00h]

OUT5\_COLOR is shown in 図 7-33 and described in 表 7-26.

Return to 表 7-4.

# 図 7-33. OUT5\_COLOR Register

| 7          | 6        | 5 4 3 2 |  | 2 | 1 | 0 |  |  |  |  |  |
|------------|----------|---------|--|---|---|---|--|--|--|--|--|
| OUT5_Color |          |         |  |   |   |   |  |  |  |  |  |
|            | R/ W-00h |         |  |   |   |   |  |  |  |  |  |

# 表 7-26. OUT5\_COLOR Register Field Descriptions


| Bit | Field      | Туре | Reset                                    | Description                                |  |  |
|-----|------------|------|--|--|--|--|
| 7–0 | OUT5_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%. |  |  |
|     |            |      |  | 80h =The color mixing percentage is 50%.   |  |  |
|     |            |      | 00h = The color mixing percentage is 0%. |  |  |  |

# 7.6.22 OUT6\_COLOR (Address = 15h) [reset = 00h]

OUT6\_COLOR is shown in  $\boxtimes$  7-34 and described in  $\not\equiv$  7-27.

Return to 表 7-4.

# 図 7-34. OUT6\_COLOR Register



#### 表 7-27. OUT6\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset                                    | Description                                |  |
|-----|------------|------|--|--|--|
| 7–0 | OUT6_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%. |  |
|     |            |      |  | 80h =The color mixing percentage is 50%.   |  |
|     |            |      | 00h = The color mixing percentage is 0%. |  |  |

# 7.6.23 OUT7\_COLOR (Address = 16h) [reset = 00h]

OUT7\_COLOR is shown in 図 7-35 and described in 表 7-28.

Return to 表 7-4.

#### 図 7-35. OUT7 COLOR Register

|            |       | _ |      |       |   |   |   |  |  |  |
|------------|-------|---|------|-------|---|---|---|--|--|--|
| 7          | 6 5 4 |   |      |       | 2 | 1 | 0 |  |  |  |
| OUT7_Color |       |   |      |       |   |   |   |  |  |  |
|            |       |   | R/ ₩ | 7-00h |   |   |   |  |  |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



### 表 7-28. OUT7\_COLOR Register Field Descriptions


| Bit | Field      | Туре | Reset | Description                                  |
|-----|------------|------|-------|--|
| 7–0 | OUT7_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |            |      |       | <br>80h =The color mixing percentage is 50%. |
|     |            |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.24 OUT8\_COLOR (Address = 17h) [reset = 00h]

OUT8\_COLOR is shown in 図 7-36 and described in 表 7-29.

Return to 表 7-4.

#### 図 7-36. OUT8\_COLOR Register



# 表 7-29. OUT8\_COLOR Register Field Descriptions


| Bit | Field      | Туре | Reset                                    | Description                                |  |
|-----|------------|------|--|--|--|
| 7–0 | OUT8_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%. |  |
|     |            |      |  | 80h =The color mixing percentage is 50%.   |  |
|     |            |      | 00h = The color mixing percentage is 0%. |  |  |

# 7.6.25 OUT9\_COLOR (Address = 18h) [reset = 00h]

OUT9\_COLOR is shown in  $\boxtimes$  7-37 and described in  $\not\equiv$  7-30.

Return to 表 7-4.

# 図 7-37. OUT9\_COLOR Register



#### 表 7-30. OUT9\_COLOR Register Field Descriptions

| Bit | Field      | Туре | Reset                                    | Description                                  |  |
|-----|------------|------|--|--|--|
| 7–0 | OUT9_Color | R/W  | 00h                                      | FFh = The color mixing percentage is 100%.   |  |
|     |            |      |  | <br>80h =The color mixing percentage is 50%. |  |
|     |            |      | 00h = The color mixing percentage is 0%. |  |  |

# 7.6.26 OUT10\_COLOR (Address = 19h) [reset = 00h]

OUT10\_COLOR is shown in 図 7-38 and described in 表 7-31.

Return to 表 7-4.

# 図 7-38. OUT10\_COLOR Register

| 7           | 6        | 5 | 4 | 3 | 2 | 1 | 0 |  |  |  |  |
|-------------|----------|---|---|---|---|---|---|--|--|--|--|
| OUT10_Color |          |   |   |   |   |   |   |  |  |  |  |
|             | R/ ₩-00h |   |   |   |   |   |   |  |  |  |  |

資料に関するフィードバック (ご意見やお問い合わせ) を送信

Copyright © 2024 Texas Instruments Incorporated

### 表 7-31. OUT10 COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT10_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | 80h =The color mixing percentage is 50%.     |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.27 OUT11\_COLOR (Address = 1Ah) [reset = 00h]

OUT11\_COLOR is shown in 図 7-39 and described in 表 7-32.

Return to 表 7-4.

# 図 7-39. OUT11\_COLOR Register

| 7           | 6        | 5 | 4 | 3 | 2 | 1 | 0 |  |  |
|-------------|----------|---|---|---|---|---|---|--|--|
| OUT11_Color |          |   |   |   |   |   |   |  |  |
|             | R/ ₩-00h |   |   |   |   |   |   |  |  |

### 表 7-32. OUT11\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT11_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.28 OUT12\_COLOR (Address = 1Bh) [reset = 00h]

OUT12\_COLOR is shown in 図 7-40 and described in 表 7-33.

Return to 表 7-4.

### 図 7-40. OUT12\_COLOR Register



#### 表 7-33. OUT12\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT12_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.29 OUT13\_COLOR (Address = 1Ch) [reset = 00h]

OUT13\_COLOR is shown in 図 7-41 and described in 表 7-34.

Return to 表 7-4.

# 図 7-41. OUT13\_COLOR Register

| 7           | 6 | 5 | 4 | 3 | 2 | 1 | 0 |  |  |
|-------------|---|---|---|---|---|---|---|--|--|
| OUT13_Color |   |   |   |   |   |   |   |  |  |
| R/ W-00h    |   |   |   |   |   |   |   |  |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信



# 表 7-34. OUT13\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                |
|-----|-------------|------|-------|--|
| 7–0 | OUT13_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%. |
|     |             |      |       | 80h =The color mixing percentage is 50%.   |
|     |             |      |       | 00h = The color mixing percentage is 0%.   |

# 7.6.30 OUT14\_COLOR (Address = 1Dh) [reset = 00h]

OUT14\_COLOR is shown in 図 7-42 and described in 表 7-35.

Return to 表 7-4.

# 図 7-42. OUT14\_COLOR Register

| 7           | 6 | 5 4 |  | 3 | 2 | 1 | 0 |  |  |
|-------------|---|-----|--|---|---|---|---|--|--|
| OUT14_Color |   |     |  |   |   |   |   |  |  |
| R/ W̄-00h   |   |     |  |   |   |   |   |  |  |

# 表 7-35. OUT14\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT14_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.31 OUT15\_COLOR (Address = 1Eh) [reset = 00h]

OUT15\_COLOR is shown in 図 7-43 and described in 表 7-36.

Return to 表 7-4.

### 図 7-43. OUT15\_COLOR Register



#### 表 7-36. OUT15\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT15_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.32 OUT16\_COLOR (Address = 1Fh) [reset = 00h]

OUT16\_COLOR is shown in 図 7-44 and described in 表 7-37.

Return to 表 7-4.

# 図 7-44. OUT16\_COLOR Register

| 7           | 6 | 5 | 4 | 3 | 2 | 1 | 0 |  |  |  |
|-------------|---|---|---|---|---|---|---|--|--|--|
| OUT16_Color |   |   |   |   |   |   |   |  |  |  |
| R/ W-00h    |   |   |   |   |   |   |   |  |  |  |

English Data Sheet: SLVSEB8



### 表 7-37. OUT16\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT16_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | 00h = The color mixing percentage is 0%.     |

## 7.6.33 OUT17\_COLOR (Address = 20h) [reset = 00h]

OUT17\_COLOR is shown in 図 7-45 and described in 表 7-38.

Return to 表 7-4.

### 図 7-45. OUT17\_COLOR Register

| 7 | 6 | 5 | 4     | 3             | 2 | 1 | 0 |
|---|---|---|-------|---------------|---|---|---|
|   |   |   | OUT17 | _Color        |   |   |   |
|   |   |   | R/ W  | <i>ī</i> -00h |   |   |   |

### 表 7-38. OUT17\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT17_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

### 7.6.34 OUT18\_COLOR (Address = 21h) [reset = 00h]

OUT18\_COLOR is shown in 図 7-46 and described in 表 7-39.

Return to 表 7-4.

### 図 7-46. OUT18\_COLOR Register



### 表 7-39. OUT18\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT18_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.35 OUT19\_COLOR (Address = 22h) [reset = 00h]

OUT19\_COLOR is shown in 図 7-47 and described in 表 7-40.

Return to 表 7-4.

### 図 7-47. OUT19\_COLOR Register

| 7 | 6           | 5 | 4   | 3    | 2 | 1 | 0 |  |
|---|-------------|---|-----|------|---|---|---|--|
|   | OUT19_Color |   |     |      |   |   |   |  |
|   |             |   | R/W | -00h |   |   |   |  |

Copyright © 2024 Texas Instruments Incorporated

資料に関するフィードバック(ご意見やお問い合わせ)を送信

37



# 表 7-40. OUT19\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT19_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

### 7.6.36 OUT20\_COLOR (Address = 23h) [reset = 00h]

OUT20\_COLOR is shown in 図 7-48 and described in 表 7-41.

Return to 表 7-4.

### 図 7-48. OUT20\_COLOR Register

| 7 | 6 | 5 | 4     | 3       | 2 | 1 | 0 |
|---|---|---|-------|---------|---|---|---|
|   |   |   | OUT20 | )_Color |   |   |   |
|   |   |   | R/ W  | 7-00h   |   |   |   |

### 表 7-41. OUT20\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT20_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

### 7.6.37 OUT21\_COLOR (Address = 24h) [reset = 00h]

OUT21\_COLOR is shown in 図 7-49 and described in 表 7-42.

Return to 表 7-4.

### 図 7-49. OUT21\_COLOR Register



### 表 7-42. OUT21\_COLOR Register Field Descriptions

| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT21_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | <br>80h =The color mixing percentage is 50%. |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

# 7.6.38 OUT22\_COLOR (Address = 25h) [reset = 00h]

OUT22\_COLOR is shown in 図 7-50 and described in 表 7-43.

Return to 表 7-4.

# 図 7-50. OUT22\_COLOR Register

| 7 | 6           | 5 | 4    | 3     | 2 | 1 | 0 |  |
|---|-------------|---|------|-------|---|---|---|--|
|   | OUT22_Color |   |      |       |   |   |   |  |
|   |             |   | R/ W | 7-00h |   |   |   |  |

English Data Sheet: SLVSEB8

# 表 7-43. OUT22\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT22_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | 80h =The color mixing percentage is 50%.     |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

## 7.6.39 OUT23\_COLOR (Address = 26h) [reset = 00h]

OUT23\_COLOR is shown in 図 7-51 and described in 表 7-44.

Return to 表 7-4.

### 図 7-51. OUT23\_COLOR Register



### 表 7-44. OUT23\_COLOR Register Field Descriptions


| Bit | Field       | Туре | Reset | Description                                  |
|-----|-------------|------|-------|--|
| 7–0 | OUT23_Color | R/W  | 00h   | FFh = The color mixing percentage is 100%.   |
|     |             |      |       | 80h =The color mixing percentage is 50%.     |
|     |             |      |       | <br>00h = The color mixing percentage is 0%. |

### 7.6.40 RESET (Address = 27h) [reset = 00h]

RESET is shown in  $\boxtimes$  7-52 and described in  $\not\equiv$  7-45.

Return to 表 7-4.

### 図 7-52. RESET Register



### 表 7-45. OUT14\_COLOR Register Field Descriptions

| Bit Field |       | Туре | Reset | Description                                     |
|-----------|-------|------|-------|---|
| 7–0       | Reset | W    | 00h   | FFh = Reset all the registers to default value. |

English Data Sheet: SLVSEB8

# 8 Application and Implementation

注

以下のアプリケーション情報は、TIの製品仕様に含まれるものではなく、TIではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

### 8.1 Application Information

The LP50xx device is an 18- or 24-channel constant-current-sink LED driver. The LP50xx device improves the user experience in color mixing and intensity control, for both live effects and coding effort. The optimized performance for RGB LEDs makes it a good choice for human-machine interaction applications.

### 8.2 Typical Application

The LP50xx design supports up to four devices in parallel with different configurations on the ADDR0 and ADDR1 pins.

資料に関するフィードバック(ご意見やお問い合わせ) を送信

Copyright © 2024 Texas Instruments Incorporated

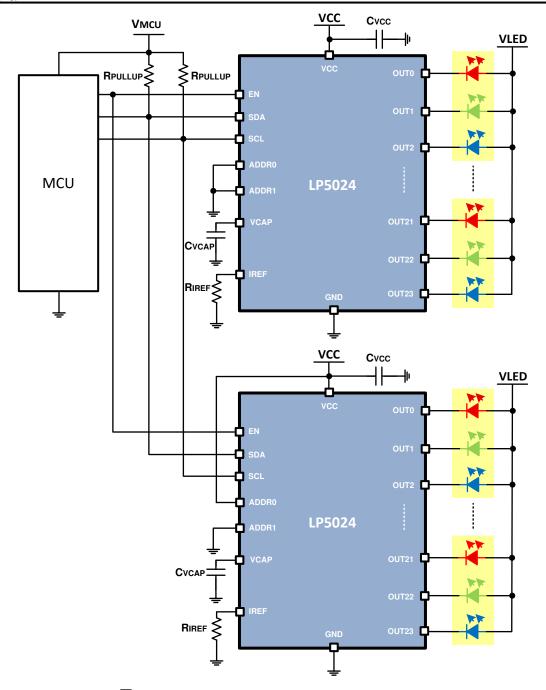


図 8-1. Driving Dual LP5024 Application Example

#### 8.2.1 Design Requirements

Set the LED current to 15mA using the R<sub>IREF</sub> resistor.

### 8.2.2 Detailed Design Procedure

LP50xx scales up the reference current ( $I_{REF}$ ) set by the external resistor ( $R_{IREF}$ ) to sink the output current ( $I_{OUT}$ ) at each output port. The following formula can be used to calculate the external resistor ( $R_{IREF}$ ):

$$R_{IREF} = K_{IREF} \times \frac{V_{IREF}}{I_{SET}}$$
 (2)



The SCL and SDA lines must each have a pullup resistor placed somewhere on the line (the pullup resistors are normally located on the bus master). In typical applications, values of  $1.8k\Omega$  to  $4.7k\Omega$  are used.


VCAP is internal LDO output pin. This pin must be connected through a 1µF capacitor to GND. Place the capacitor as close to the device as possible.

TI recommends having a 1µF capacitor between VCC and GND to ensure proper operation. Place the capacitor as close to the device as possible.

#### 8.2.3 Application Curves

The test condition for Figure 9-2 is that the testing is under bank control, using the following register values: 0x02 (0xFF), 0x04 (0xA0), 0x05 (0xA0), 0x06 (0xA0).

The test condition for Figure 9-2 is that the testing is under bank control, using the following register values: 0x02 (0xFF), 0x04 (0x10), 0x05 (0x10), 0x06 (0x10).

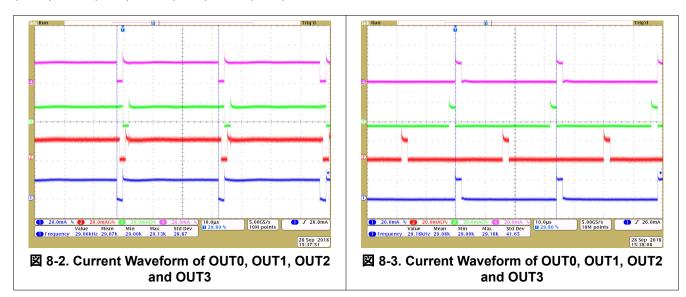

### 8.3 Power Supply Recommendations

The device is designed to operate from a  $V_{VCC}$  input-voltage supply range between 2.7V and 5.5V. This input supply must be well-regulated and able to withstand maximum input current and maintain stable voltage without voltage drop even in a load-transition condition (start-up or rapid intensity change). The resistance of the input supply rail must be low enough that the input-current transient does not cause a drop below a 2.7V level in the LP50xx  $V_{VCC}$  supply voltage.

### 8.4 Layout

#### 8.4.1 Layout Guidelines

To prevent thermal shutdown, the junction temperature,  $T_J$ , must be less than  $T_{(TSD)}$ . If the voltage drop across the output channels is high, the device power dissipation can be large. The LP50xx device has very good thermal performance because of the thermal pad design; however, the PCB layout is also very important to ensure that the device has good thermal performance. Good PCB design can optimize heat transfer, which is essential for the long-term reliability of the device.

Use the following guidelines when designing the device layout:

• Place the  $C_{VCAP}$ ,  $C_{VCC}$  and  $R_{IREF}$  as close to the device as possible. Also, TI recommends to put the ground plane as  $\boxtimes$  8-4,  $\boxtimes$  8-5 and  $\boxtimes$  8-6.

資料に関するフィードバック (ご意見やお問い合わせ) を送信 Copyright © 2024 Texas Instruments Incorporated

- www.ti.com/ja-jp
- Maximize the copper coverage on the PCB to increase the thermal conductivity of the board. The major heat flow path from the package to the ambient is through copper on the PCB. Maximum copper density is extremely important when no heat sinks are attached to the PCB on the other side from the package.
- Add as many thermal vias as possible directly under the package ground pad to optimize the thermal conductivity of the board.
- Use either plated-shut or plugged and capped vias for all the thermal vias on both sides of the board to prevent solder voids.

### 8.4.2 Layout Examples

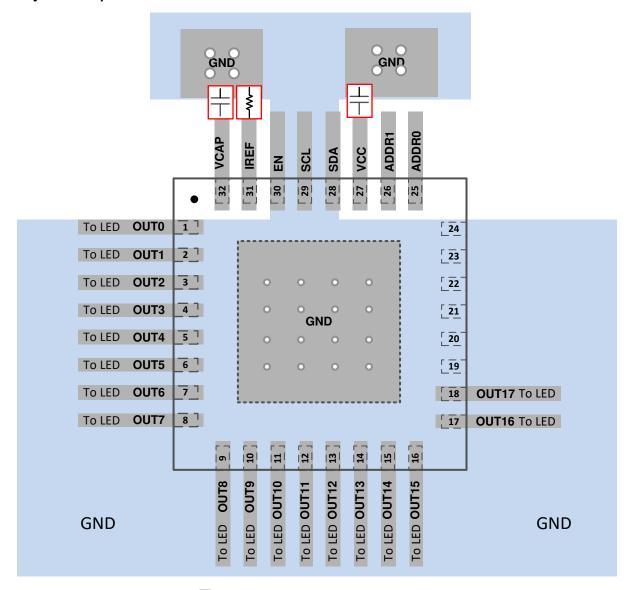


図 8-4. LP5018 VQFN Layout Example



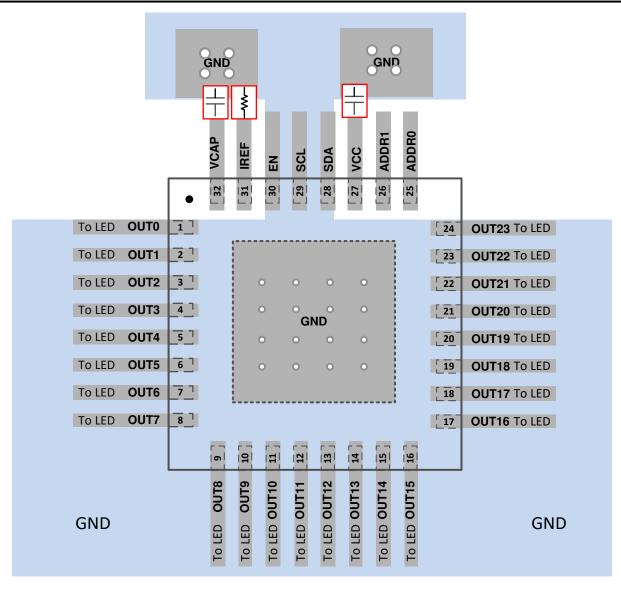


図 8-5. LP5024 VQFN Layout Example



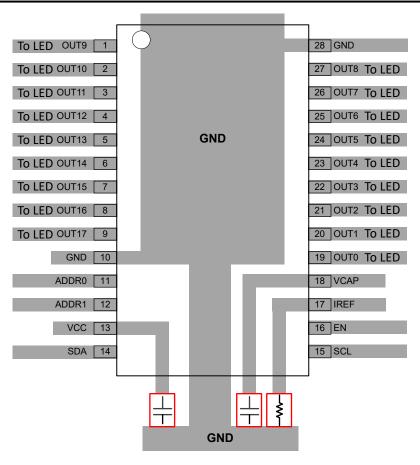


図 8-6. LP5018 VSSOP Layout Example for Single Layer PCB

45

Product Folder Links: LP5018 LP5024

# 9 Device and Documentation Support

#### 9.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to order now.

表 9-1. Related Links

| PARTS  | PRODUCT FOLDER | ORDER NOW TECHNICAL DOCUMENTS |            | TOOLS &<br>SOFTWARE | SUPPORT & COMMUNITY |  |
|--------|----------------|-------------------------------|------------|---------------------|---------------------|--|
| LP5018 | Click here     | Click here                    | Click here | Click here          | Click here          |  |
| LP5024 | Click here     | Click here                    | Click here | Click here          | Click here          |  |

### 9.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。 変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

### 9.3 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計で必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの使用条件を参照してください。

#### 9.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments. すべての商標は、それぞれの所有者に帰属します。

#### 9.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

### 9.6 用語集

テキサス・インスツルメンツ用語集 この用語集には、用語や略語の一覧および定義が記載されています。

English Data Sheet: SLVSEB8



# **10 Revision History**

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

| Changes from Revision B (October 2018) to Revision C (July 2024)                                  | Page            |
|---|-----------------|
| <ul><li>ドキュメント全体にわたって表、図、相互参照の採番方法を更新</li></ul>   | 1               |
| • LP5018 VSSOP (28) パッケージを追加  |                 |
| Added pin configuration image for LP5018 VSSOP  | 4               |
| Added LP5018 VSSOP thermal information  | <mark>7</mark>  |
| Updated Bank Number and LED Number Assignment   |                 |
| Updated description of OUTX_COLOR registers throughout  | <mark>23</mark> |
| • Updated the description in 表 7-21 through 表 7-44  | 31              |
| Removed the last sentence in the Layout Guidelines section  | 42              |
| Added LP5018 VSSOP layout example   |                 |
| Changes from Revision A (October 2018) to Revision B (October 2018)                               | Page            |
| Added % after 100 in Parameter for I <sub>ERR DD</sub> and I <sub>ERR CC</sub> under OUTPUT STAGE | 8               |
| Changed value of "K <sub>IREF</sub> = 100" to "K <sub>IREF</sub> = 105"                           | 17              |
| Changes from Revision * (October 2018) to Revision A (October 2018)                               | Page            |
| <ul><li>初版リリース</li></ul>  |                 |



# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most-current data available for the designated devices. This data is subject to change without notice and without revision of this document. For browser-based versions of this data sheet, see the left-hand navigation pane.

資料に関するフィードバック (ご意見やお問い合わせ) を送信

Copyright © 2024 Texas Instruments Incorporated

Product Folder Links: LP5018 LP5024

### 重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されているテキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、テキサス・インスツルメンツの販売条件、または ti.com やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2024, Texas Instruments Incorporated www.ti.com 8-Nov-2025

#### PACKAGING INFORMATION

| Orderable part number | Status | Material type | Package   Pins   | Package qty   Carrier | RoHS | Lead finish/<br>Ball material | MSL rating/<br>Peak reflow | Op temp (°C) | Part marking (6) |
|-----------------------|--------|---------------|------------------|-----------------------|------|-------------------------------|----------------------------|--------------|------------------|
|                       |        |               |                  |                       |      | (4)                           | (5)                        |              |                  |
| LP5018DGSR            | Active | Production    | VSSOP (DGS)   28 | 5000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 125   | LP5018           |
| LP5018DGSR.A          | Active | Production    | VSSOP (DGS)   28 | 5000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 125   | LP5018           |
| LP5018RSMR            | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU   NIPDAUAG             | Level-2-260C-1 YEAR        | -40 to 125   | LP<br>5018       |
| LP5018RSMR.A          | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 125   | LP<br>5018       |
| LP5018RSMRG4          | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 125   | LP<br>5018       |
| LP5018RSMRG4.A        | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 125   | LP<br>5018       |
| LP5024RSMR            | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU   NIPDAUAG             | Level-2-260C-1 YEAR        | -40 to 85    | LP<br>5024       |
| LP5024RSMR.A          | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 85    | LP<br>5024       |
| LP5024RSMRG4          | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 85    | LP<br>5024       |
| LP5024RSMRG4.A        | Active | Production    | VQFN (RSM)   32  | 3000   LARGE T&R      | Yes  | NIPDAU                        | Level-2-260C-1 YEAR        | -40 to 85    | LP<br>5024       |

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 8-Nov-2025

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 18-Jun-2025

### TAPE AND REEL INFORMATION

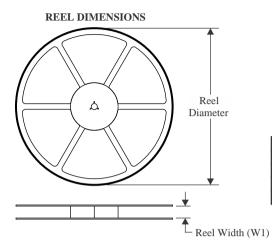



| A0 | Dimension designed to accommodate the component width     |
|----|---|
| В0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




#### \*All dimensions are nominal

| Device       | Package<br>Type | Package<br>Drawing |    | SPQ  | Reel<br>Diameter<br>(mm) | Reel<br>Width<br>W1 (mm) | A0<br>(mm) | B0<br>(mm) | K0<br>(mm) | P1<br>(mm) | W<br>(mm) | Pin1<br>Quadrant |
|--------------|-----------------|--------------------|----|------|--------------------------|--------------------------|------------|------------|------------|------------|-----------|------------------|
| LP5018DGSR   | VSSOP           | DGS                | 28 | 5000 | 330.0                    | 16.4                     | 5.5        | 7.4        | 1.45       | 8.0        | 16.0      | Q1               |
| LP5018RSMR   | VQFN            | RSM                | 32 | 3000 | 330.0                    | 12.4                     | 4.25       | 4.25       | 1.15       | 8.0        | 12.0      | Q2               |
| LP5018RSMRG4 | VQFN            | RSM                | 32 | 3000 | 330.0                    | 12.4                     | 4.25       | 4.25       | 1.15       | 8.0        | 12.0      | Q2               |
| LP5024RSMR   | VQFN            | RSM                | 32 | 3000 | 330.0                    | 12.4                     | 4.25       | 4.25       | 1.15       | 8.0        | 12.0      | Q2               |
| LP5024RSMRG4 | VQFN            | RSM                | 32 | 3000 | 330.0                    | 12.4                     | 4.25       | 4.25       | 1.15       | 8.0        | 12.0      | Q2               |



www.ti.com 18-Jun-2025

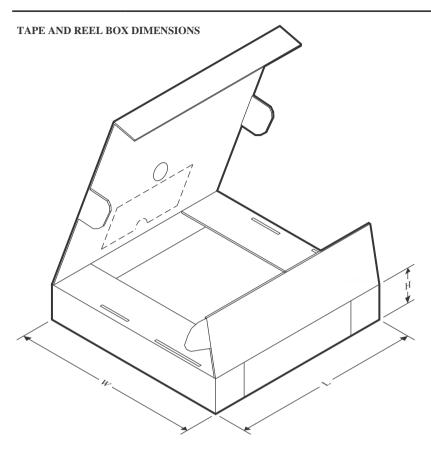


#### \*All dimensions are nominal

| 7 till dillitoriolorio di o riorimilar |              |                 |      |      |             |            |             |
|--|--------------|-----------------|------|------|-------------|------------|-------------|
| Device                                 | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
| LP5018DGSR                             | VSSOP        | DGS             | 28   | 5000 | 353.0       | 353.0      | 32.0        |
| LP5018RSMR                             | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| LP5018RSMRG4                           | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| LP5024RSMR                             | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |
| LP5024RSMRG4                           | VQFN         | RSM             | 32   | 3000 | 367.0       | 367.0      | 35.0        |

4 x 4, 0.4 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD


This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

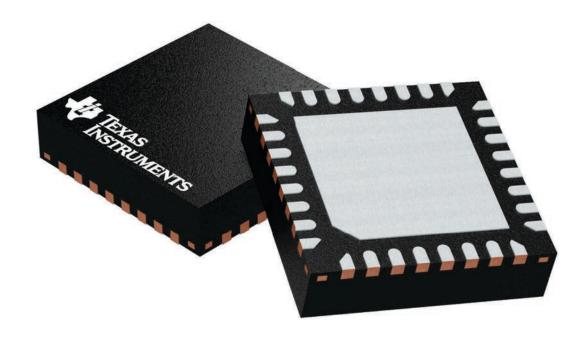





PLASTIC QUAD FLATPACK - NO LEAD

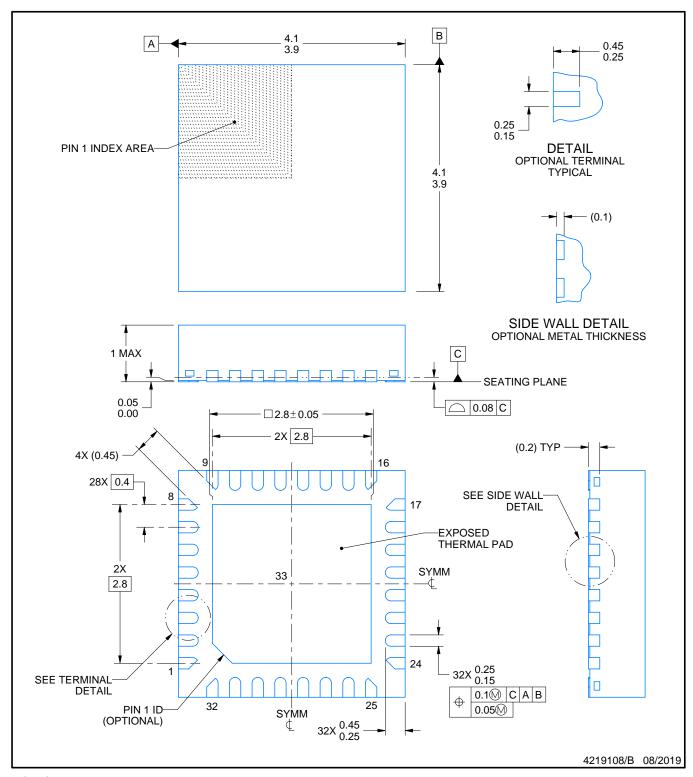


### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD

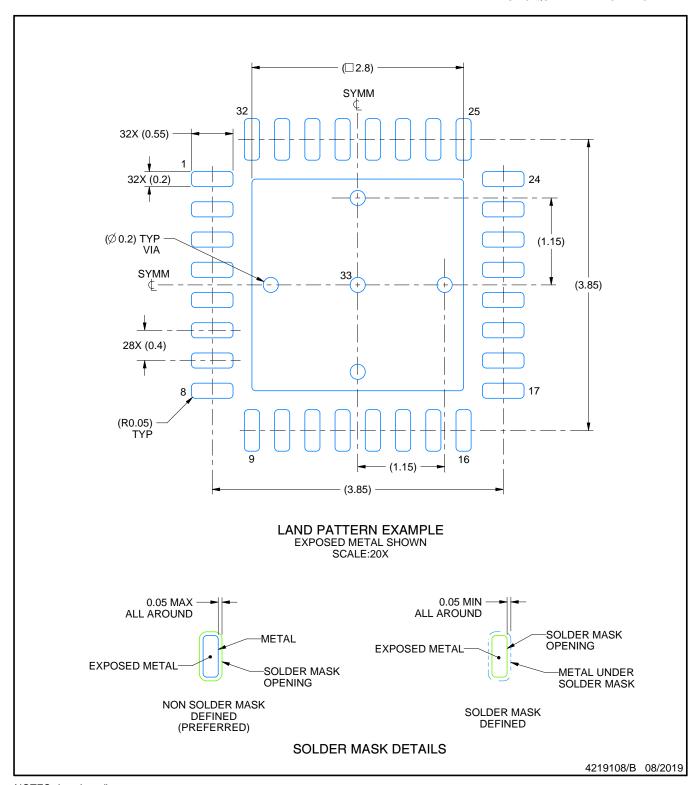


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD

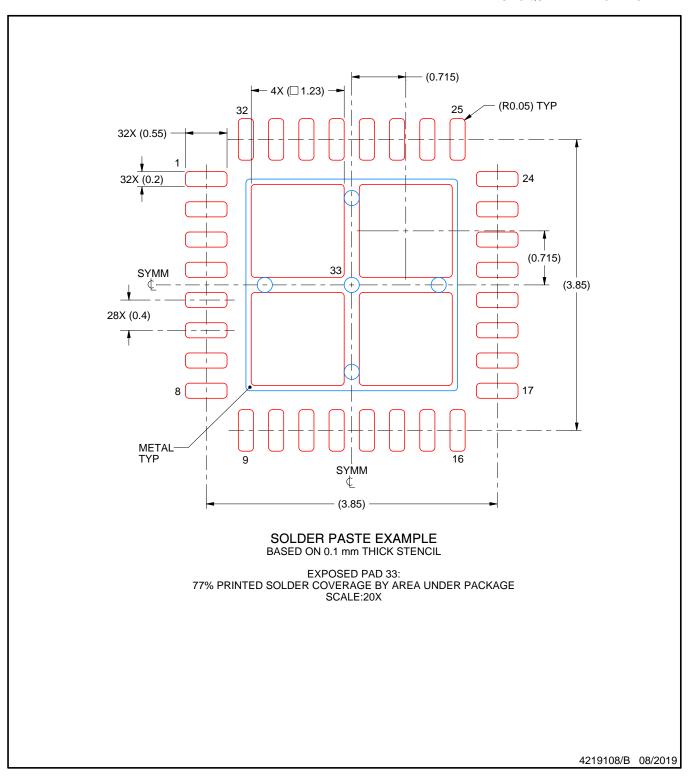


NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SMALL OUTLINE PACKAGE

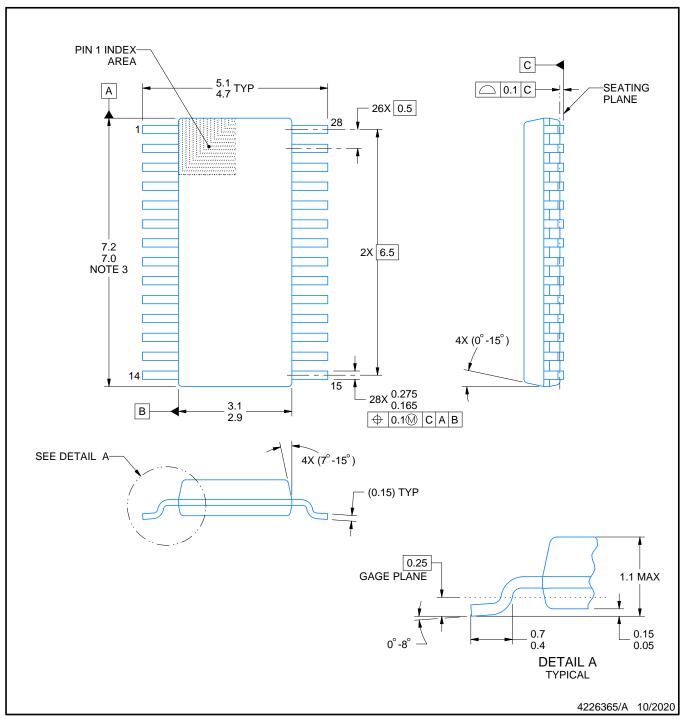

#### NOTES:

PowerPAD is a trademark of Texas Instruments.


- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. No JEDEC registration as of September 2020.
- 5. Features may differ or may not be present.



SMALL OUTLINE PACKAGE

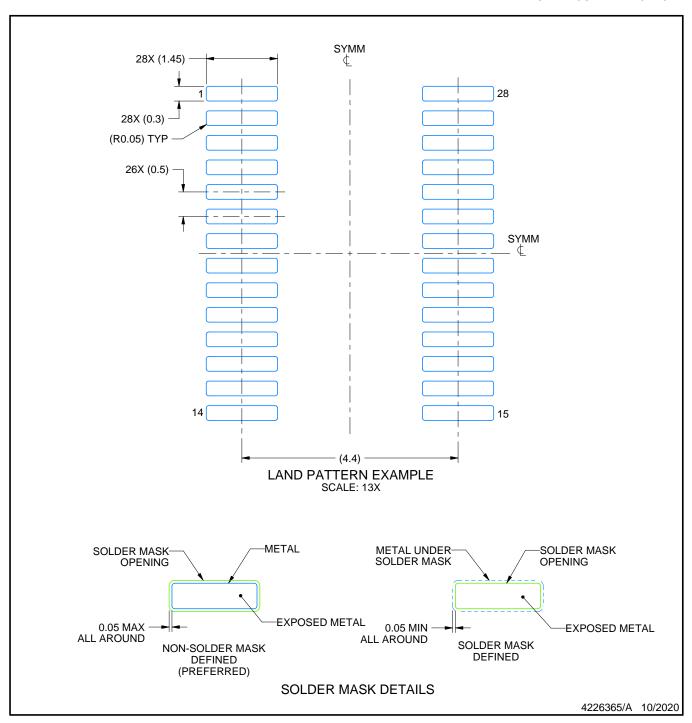


#### NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
- 9. Size of metal pad may vary due to creepage requirement.
- 10. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.



SMALL OUTLINE PACKAGE

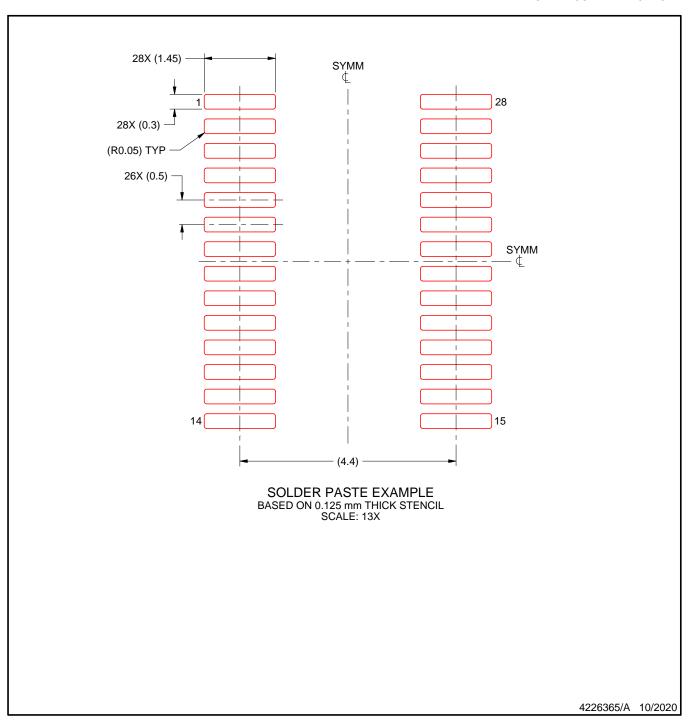

NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.



### 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TIの製品は、TIの販売条件、TIの総合的な品質ガイドライン、 ti.com または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。 TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TIはそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日: 2025 年 10 月