

Enabling Narrow Band IoT Implementations with Level Translation



As 5G infrastructure is brought online worldwide, the benefits of 5G beyond just higher bandwidth will start to play a bigger role in commerce and industries. For example, network slicing (that is enabled by the 5G standard) will lower market entry barriers for many new types of businesses and business models that leverage IoT technologies. Network slicing enables service providers to create virtual networks within the physical 5G network, allowing for the creation of lower cost dedicated IoT networks. Among the IoT technologies, the implementation of Narrow-Band Internet of Things (NB-IoT) is expected to flourish with the roll out of 5G networks and associated network slicing service offerings. NB-IoT implementations are primarily meant for indoor applications and machine to machine communication, such as battery powered sensor networks that are connected to a base station. One key enabling characteristic of NB-IoT implementations is long battery life that is expected from the nodes of an NB-IoT network.

Enabling long battery life for NB-IoT module applications presents design challenges to system designers. Component selection for NB-IoT designs is one of those key challenges for system designers as they try to balance battery life with optimal performance and implementation cost. One of the main challenges of component selection is selecting devices that will interoperate with one another while still being very power efficient. Often, the selected device for one function will operate on a different voltage rail than the optimal component for another function. Additionally, low power modes for many circuit components will drive I/O voltage levels below common rails such as 1.8 V, which can present a challenge to designers. Battery saving deep sleep modes are very effective for low duty cycle applications where a majority of the time the system is in sleep mode. This is especially true for the heuristic based deep sleep modes that many NB-IoT nodes take advantage of to extend battery life which require module components to interoperate at low IO voltage levels to minimize battery usage. How can a design engineer bring together the core components of NB-IoT designs and still take advantage of their low power capabilities? The simple answer is to use low power and efficient fixed direction level shifter devices

that, not only supports low power operation, but also supports shifting I/O levels down to 1.1 V (1.1 V to 5.5 V).

Low voltage fixed direction level translators enable design engineers to implement low power level shifting between core components for control and data interfaces such as SPI, UART, GPIO, and virtually any other multi-bit interface, and the low voltage I/O levels associated with low power modes of the signal chain devices. See [Figure 1](#) for common control interface level translation implementation examples. The ability to support voltage levels below common voltage rails such as 1.8 V enables NB-IoT applications to enter deep sleep battery saving modes that can limit I/O levels to sub 1.8 V. Fixed or unidirectional level shifting implementations also simplify designs by eliminating some of the implementation complexities of auto-directional devices that employ one-shot based architectures where design issues such as bus contention can arise. Fixed direction devices like TI's TXU series are available in multiple channel direction configurations such as three transmit and one receive ([TXU0304](#)) that are commonly needed for standards such as SPI or two channels in each direction ([TXU0204](#)) for level shifting interfaces such as UARTs and a configuration with all channels in the same direction ([TXU0104](#)). In addition, the lower pin count nature of fixed direction devices makes them suitable for very small μ QFN packages that are conducive to board space limited designs common for NB-IoT nodes. Easy to implement fixed direction level shifter solutions can help designers bring their NB-IoT module designs together in the most power efficient manner possible. For more information on the TXU0x04 level translation family, please visit the Texas Instruments' voltage translation landing page at www.ti.com/translation.

Device	Configuration	Package
TXU0104	4 Bits TX or 4 Bits RX	VQFN, TSSOP, μ QFN, X2SON
TXU0204	2 Bits TX and 2 Bits RX	
TXU0304	3 Bits TX and 1 Bit RX	

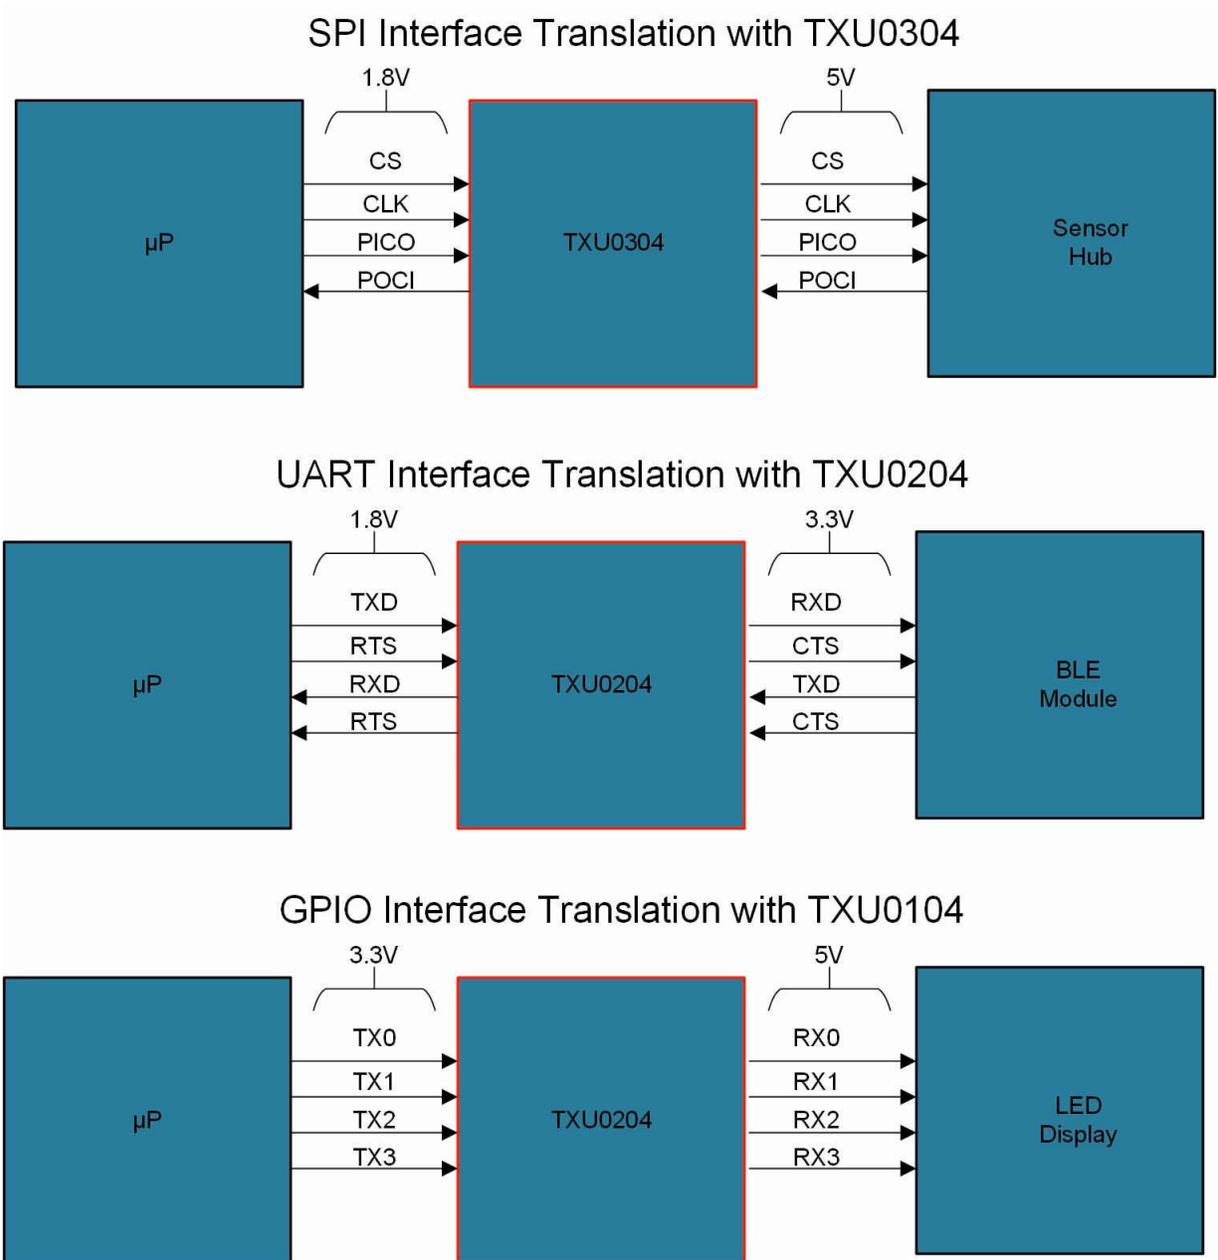


Figure 1. TXU0x04 Use Case Examples

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2022, Texas Instruments Incorporated