

www.ti.com

SBOS442C -JUNE 2008-REVISED OCTOBER 2011

FULLY-INTEGRATED, 8-CHANNEL ANALOG FRONT-END FOR ULTRASOUND 0.89nV/\(\sqrt{Hz}\), 12-Bit, 40MSPS, 101mW/Channel

Check for Samples: AFE5804

FEATURES

- 8-Channel Complete Analog Front-End:
 - LNA, VCA, PGA, LPF, and ADC
- Mode Control for Power/Noise Optimization:
 - Low Noise (Full-Channel): 0.89nV/√Hz (TGC Mode I) 1.23nV/√Hz (TGC Mode II) 1.03nV/√Hz (PW Mode)
 - Ultra-Low Power:
 101mW/Channel (TGC Mode II)
 65mW/Channel (CW Mode)
- Low-Noise Pre-Amp (LNA):
 - 0.75nV/√Hz
 - 20dB Fixed Gain
 - 280mV_{PP} Linear Input Range
- Variable-Gain Amplifier:
 - Gain Control Range: 46dB
- PGA Gain Settings: 20dB, 25dB, 27dB, 30dB
- Low-Pass Filter:
 - Selectable BW: 12.5MHz, 17MHz
 - 2nd-Order, Bessel
- Gain Error: ±0.5dB
- Channel Matching: ±0.25dB
- Clamping
- Fast Overload Recovery: Two Clock Cycles
- 12-Bit Analog-to-Digital Converter:
 - 10MSPS to 50MSPS
 - 69dB SNR at 10MHz
 - Serial LVDS Interface
- Integrated CW Switch Matrix
- 15mm × 9mm, 135-BGA Package:
 - Pb-Free (RoHS-Compliant) and Green

APPLICATIONS

- Medical Imaging, Ultrasound
 - Portable Systems
 - Battery-Powered Systems

DESCRIPTION

The AFE5804 is a complete analog front-end device specifically designed for ultrasound systems that require low power and small size.


The AFE5804 consists of eight channels, including a low-noise amplifier (LNA), voltage-controlled attenuator (VCA), programmable gain amplifier (PGA), low-pass filter (LPF), and a 12-bit analog-to-digital converter (ADC) with low voltage differential signaling (LVDS) data outputs.

The LNA gain is set for 20dB gain and has excellent noise and signal handling capabilities, including fast overload recovery. VCA gain can vary over a 46dB range with a 0V to 1.2V control voltage common to all channels of the AFE5804.

The PGA can be programmed for gains of 20dB, 25dB, 27dB, and 30dB. The internal low-pass filter can also be programmed to 12.5MHz or 17MHz.

The LVDS outputs of the ADC reduce the number of interface lines to an ASIC or FPGA, thereby enabling the high system integration densities desired for portable systems. The ADC can either be operated with internal or external references. The ADC also features a signal-to-noise ratio (SNR) enhancement mode that can be useful at high gains.

The AFE5804 is available in a 15mm × 9mm, 135-ball BGA package that is Pb-free (RoHS-compliant) and green. It is specified for operation from 0°C to +85°C.

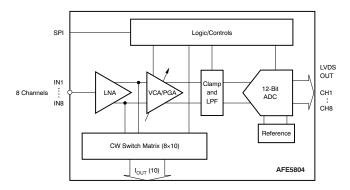



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Infineon is a registered trademark of Infineon Technologies. All other trademarks are the property of their respective owners.





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

PACKAGING/ORDERING INFORMATION(1) (2)

PRODUCT	PACKAGE-LEAD	PACKAGE DESIGNATOR	OPERATING TEMPERATURE RANGE	ORDERING NUMBER	TRANSPORT MEDIA, QUANTITY	ECO STATUS
				AFE5804ZCFR	Tape and Reel, 1000	
AFE5804	μFBGA-135	ZCF	0°C to +85°C	AFE5804ZCFT	Tape and Reel, 250	Pb-Free, Green
				AFE5804ZCF	Tray, 160	

- (1) For the most current package and ordering information see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- These packages conform to Lead (Pb)-free and green manufacturing specifications. Additional details including specific material content can be accessed at www.ti.com/leadfree.
 GREEN: TI defines Green to mean Lead (Pb)-Free and in addition, uses less package materials that do not contain halogens, including bromine (Br), or annimony (Sb) above 0.1% of total product weight. N/A: Not yet available Lead (Pb)-Free; for estimated conversion details are to represent the conversion details.

bromine (Br), or antimony (Sb) above 0.1%of total product weight. N/A: Not yet available Lead (Pb)-Free; for estimated conversion dates, go to www.ti.com/leadfree. Pb-FREE: TI defines Lead (Pb)-Free to mean RoHS compatible, including a lead concentration that does not exceed 0.1% of total product weight, and, if designed to be soldered, suitable for use in specified lead-free soldering processes.

ABSOLUTE MAXIMUM RATINGS(1)

Over operating free-air temperature range, unless otherwise noted.

		AFE5804	UNIT
Supply voltage range, AV	DD1	-0.3 to +3.9	V
Supply voltage range, AV	DD2	-0.3 to +3.9	V
Supply voltage range, AVDD_5V		-0.3 to +6	V
Supply voltage range, DV	DD	-0.3 to +3.9	V
Supply voltage range, LVI	DD	-0.3 to +2.2	V
Voltage between AVSS1	and LVSS	-0.3 to +0.3	V
Voltage at analog inputs		-0.3 to minimum [3.6, (AVDD2 + 0.3)]	V
External voltage applied to REFT-pin		-0.3 to +3	V
External voltage applied to	o REFB-pin	-0.3 to +2	V
Voltage at digital inputs		-0.3 to minimum [3.9, (AVDD2 + 0.3)]	V
Peak solder temperature (2)	+260	°C
Maximum junction temper	ature, T _J	+125	°C
Storage temperature rang	е	-55 to +150	°C
Operating temperature rai	nge	0 to +85	°C
	НВМ	2000	V
ESD ratings	CDM	750	V
	MM	150	V

⁽¹⁾ Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not supported.

(2) Device complies with JSTD-020D.



ELECTRICAL CHARACTERISTICS

At AVDD_5V = 5.0V, AVDD1 = AVDD2 = DVDD = 3.3V, LVDD = 1.8V, TGC mode I, single-ended input into LNA, ac-coupled $(1.0\mu F)$, V_{CNTL} = 1.0V, f_{IN} = 5MHz, Clock = 40MSPS, 50% duty cycle, LPF = 12.5MHz, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, and ambient temperature T_A = +25°C, unless otherwise noted.

				AFE5804		
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
PREAMPLIFIER (LNA)						
Gain	Α	SE-input to differential output		20		dB
Input voltage (TGC, PW modes)	V _{IN}	Linear operation (HD2 ≤ 40dB)		280		mV_{PP}
(CW mode)		Linear operation		220		mV_{PP}
Maximum input voltage		Limited by internal diodes		600		mV_{PP}
Input voltage noise (TGC)	e _n (RTI)	$R_S = 0\Omega$, $f = 2MHz$		0.75		nV/√ Hz
	1 (DTI)	TGC mode I		3		pA/√Hz
Input current noise	I _n (RTI)	TGC mode II		1.7		pA/√ Hz
Common-mode voltage, input	V _{CMI}	Internally generated		2.4		V
Bandwidth	BW	Small-signal, –3dB		55		MHz
Input resistance	R _{IN}	At 2.5MHz		8		kΩ
Input capacitance	C _{IN}	Includes internal ESD and clamping diodes		16		pF
FULL-SIGNAL CHANNEL (LNA + V	/CA + LPF	+ ADC)				
Input voltage noise (TGC mode I)	e _n	$R_S = 0\Omega$, $f = 2MHz$, $PGA = 30dB$		0.89		nV/√Hz
Input voltage noise (TGC mode II)		$R_S = 0\Omega$, $f = 2MHz$, $PGA = 30dB$		1.23		nV/√ Hz
Input voltage noise (PW mode)		$R_S = 0\Omega$, $f = 2MHz$, $PGA = 30dB$		1.03		nV/√ Hz
Noise figure	NF	$R_S = 200\Omega$, $f = 2MHz$		1.1		dB
Low-pass filter bandwidth	LPF	At –3dB, selectable through SPI		12.5, 17		MHz
Bandwidth tolerance				±10		%
High-pass filter	HPF	(First-order, due to internal ac-coupling)		200		kHz
Group delay variation		1MHz to 10MHz		±3		ns
Overload recovery		≤ 6dB overload to within 3%, V _{CNTL} = 0V to 1.2V		2		Clock Cycles
ACCURACY						
Gain (PGA)		Selectable through SPI		20, 25, 27, 30		dB
Total gain, max ⁽¹⁾		LNA + PGA gain, V _{CNTL} = 1.2V	47.5	49	50.5	dB
Coin rongo		$V_{CNTL} = 0V \text{ to } 1.2V$		46		dB
Gain range		V _{CNTL} = 0.1V to 1.0V		40		dB
		0V < V _{CNTL} < 0.1V		±0.5		dB
Gain error, absolute ⁽²⁾		0.1V < V _{CNTL} < 1.0V	-1.5	±0.5	+1.5	dB
		1.0V < V _{CNTL} < 1.2V		±0.5		dB
Gain matching		Channel-to-channel	-0.5	±0.25	+0.5	dB
Offset error		V _{CNTL} = 1.2V, PGA = 30dB	-39		+39	LSB
Offset error drift (tempco)				±5		ppm/°C
Clamp level		Level internally fixed before LPF		2.3		V_{PP}
GAIN CONTROL (VCA)						
Input voltage range	V_{CNTL}	Gain range = 46dB		0 to 1.2		V
Gain slope		V _{CNTL} = 0.1V to 1.0V		44.4		dB/V
Input resistance				25		kΩ
Response time		V _{CNTL} = 0V to 1.2V step; to 90% signal		0.5		μs

⁽¹⁾ Excludes digital gain within ADC.(2) Excludes error of internal reference.



At AVDD_5V = 5.0V, AVDD1 = AVDD2 = DVDD = 3.3V, LVDD = 1.8V, TGC mode I, single-ended input into LNA, ac-coupled (1.0 μ F), V_{CNTL} = 1.0V, f_{IN} = 5MHz, Clock = 40MSPS, 50% duty cycle, LPF = 12.5MHz, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, and ambient temperature T_A = +25°C, unless otherwise noted.

				AFE5804		
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DYNAMIC PERFORMANCE						
		$f_{IN} = 2MHz; -1dBFS$ ($V_{CNTL} = 1.0V, PGA = 30dB$)		59.7		dBFS
Signal-to-noise ratio Second-harmonic distortion Third-harmonic distortion Intermodulation distortion Crosstalk EW—SIGNAL CHANNELS Input voltage noise (CW)	SNR	f _{IN} = 5MHz; -1dBFS		59.5		dBFS
		f _{IN} = 10MHz; -1dBFS		59.1		dBFS
		$f_{IN} = 5MHz; -1dBFS$ ($V_{CNTL} = 0.35V, PGA = 30dB$)		-45		dBFS
Second-harmonic distortion	HD2	$f_{IN} = 5MHz; -1dBFS$ ($V_{CNTL} = 1V, PGA = 30dB$)	-50	-70		dBFS
nal-to-noise ratio cond-harmonic distortion cond-harmonic distortion		$f_{IN} = 5MHz; -6dBFS$ ($V_{CNTL} = 1V, PGA = 20dB$)	-61	-70		dBFS
		$f_{IN} = 5MHz; -1dBFS$ ($V_{CNTL} = 0.35V, PGA = 30dB$)		-43		dBFS
ntermodulation distortion crosstalk cw—SIGNAL CHANNELS	HD3	$f_{IN} = 5MHz$; -1dBFS ($V_{CNTL} = 1V$, PGA = 30dB)	-43	-50		dBFS
		$f_{IN} = 5MHz$; $-6dBFS$ ($V_{CNTL} = 1V$, $PGA = 20dB$)	-61	-70		dBFS
Intermodulation distortion	IMD3	$f_1 = 4.99MHz$ at -6dBFS, $f_2 = 5.01MHz$ at -32dBFS		58		dBc
Crosstalk		$f_{IN} \le 5MHz$, $V_{CNTL} = 0.6V$, $-6dBFS$		-67		dBc
CW—SIGNAL CHANNELS						
Input voltage noise (CW)	e_n	$R_S = 0\Omega$, $f = 2MHz$		1.1		nV/√ Hz
Output noise correlation factor		Summing of eight channels		0.6		%
Output transconductance	I _{OUT} /V _{IN}	At $V_{IN} = 100 \text{mV}_{PP}$		13.8		mA/V
Output transconductance	OUT/ VIN	At $V_{IN} = 270 \text{mV}_{PP}$		12.2		mA/V
Dynamic CW output current, max	I _{OUTAC}			2.9		mA_{PP}
Static CW output current (sink)	I _{OUTDC}			0.9		mA
Output common-mode voltage (3)	VCM			2.5		V
Output impedance				50		kΩ
Output capacitance				10		pF
INTERNAL REFERENCE VOLTAG	ES (ADC)					
Reference top	VREFT			0.5		V
Reference bottom	VREFB			2.5		V
VREFT – VREFB			1.95	2	2.05	V
Common-mode voltage (internal)	V_{CM}		1.425	1.5	1.575	V
V _{CM} output current				±2		mA

⁽³⁾ CW outputs require an externally applied bias voltage of +2.5V.



At AVDD_5V = 5.0V, AVDD1 = AVDD2 = DVDD = 3.3V, LVDD = 1.8V, TGC mode I, single-ended input into LNA, ac-coupled (1.0 μ F), V_{CNTL} = 1.0V, f_{IN} = 5MHz, Clock = 40MSPS, 50% duty cycle, LPF = 12.5MHz, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, and ambient temperature T_A = +25°C, unless otherwise noted.

				AFE5804		
PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
EXTERNAL REFERENCE VOLTA	GES (ADC)					
Reference top	VREFT		2.4	2.5	2.6	V
Reference bottom	VREFB		0.4	0.5	0.6	V
VREFT – VREFB			1.9		2.1	V
Switching current ⁽⁴⁾				2.5		mA
POWER SUPPLY						
SUPPLY VOLTAGES		At 40MSPS				
AVDD1, AVDD2, DVDD		Operating	3.15	3.3	3.47	V
AVDD_5V		Operating	4.75	5	5.25	V
LVDD			1.7	1.8	1.9	V
SUPPLY CURRENTS						
IAVDD1 (ADC)				99	110	mA
/DD2 (VCA)		TGC mode I		123	136	mA
IAVDD2 (VCA)		CW mode		63	75	mA
IAV/DD . EV / (VCA)		TGC mode I		7	10	mA
IAVDD_5V (VCA)		CW mode		54	61	mA
IDVDD (VCA)				1.5	3.0	mA
ILVDD (ADC)				68	80	mA
		All channels, TGC mode I, no signal		896	985	mW
		All channels, TGC mode II, no signal		808	898	mW
Power dissipation, total (5)		All channels, PW mode , no signal		840	925	mW
		All channels, CW mode, no signal (6)		525	575	mW
		No clock applied, no signal		528		mW
POWER-DOWN MODES						
Power-down dissipation, total		Complete power-down mode		52	68	mW
Power-down response time				1.0		μs
Power-up response time		PD to valid output (90% level)		50		μs
Power-down dissipation ⁽⁷⁾		Partial power-down mode		95		mW
THERMAL CHARACTERISTICS					•	
Temperature range			0		85	°C
Thermal resistance, T _{JA}				32		°C/W
Thermal resistance, T _{JC}				4.2		°C/W

⁽⁴⁾ Current drawn by the eight ADC channels from the external reference voltages; sourcing for VREFT, sinking for VREFB.

⁽⁵⁾ Programmable power affects on the front-end; ADC power consumption remains constant at about 57mW/channel for 40MSPS.

⁽⁶⁾ ADČ powered-down during CW mode.

⁽⁷⁾ At VCA_PD pin pulled high; see also Power-Down Timing diagram.



DIGITAL CHARACTERISTICS


DC specifications refer to the condition where the digital outputs are not switching, but are permanently at a valid logic level '0' or '1'. At $C_{LOAD} = 5pF^{(1)}$, $I_{OUT} = 3.5mA^{(2)}$, $R_{LOAD} = 100\Omega^{(2)}$, and no internal termination, unless otherwise noted.

			AFE5804		
PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUTS					
High-level input voltage		1.4		3.3	V
Low-level input voltage		0		0.3	V
High-level input current			10		μA
Low-level input current ⁽³⁾			-10		μA
Input capacitance			3		pF
LVDS OUTPUTS					
High-level output voltage			1375		mV
Low-level output voltage			1025		mV
Output differential voltage, V _{OD}			350		mV
V _{OS} output offset voltage ⁽²⁾	Common-mode voltage of OUTP and OUTM		1200		mV
Output capacitance	Output capacitance inside the device, from either output to ground		2		pF
FCLKP and FCLKM		10	1x (clock rate)	50	MHz
LCLKP and LCLKM		60	6x (clock rate)	300	MHz
CLOCK					
Clock input rate		10		50	MSPS
Clock duty cycle			50		%
Clock input amplitude, differential (VCLKP – VCLKM)	Sine-wave, ac-coupled		3		V _{PP}
	LVPECL, ac-coupled		1.6		V_{PP}
	LVDS, ac-coupled		0.7		V_{PP}
Clock input amplitude, single-ended (VCLKP)					
High-level input voltage, V _{IH}	CMOS	2.2			V
Low-level input voltage, V _{IL}	CMOS			0.6	V

 ⁽¹⁾ C_{LOAD} is the effective external single-ended load capacitance between each output pin and ground.
 (2) I_{OUT} refers to the LVDS buffer current setting; R_{LOAD} is the differential load resistance between the LVDS output pair.
 (3) Except pin J3 (INT/EXT), which has an internal pull-up resistor (52kΩ) to 3.3V.



FUNCTIONAL BLOCK DIAGRAM

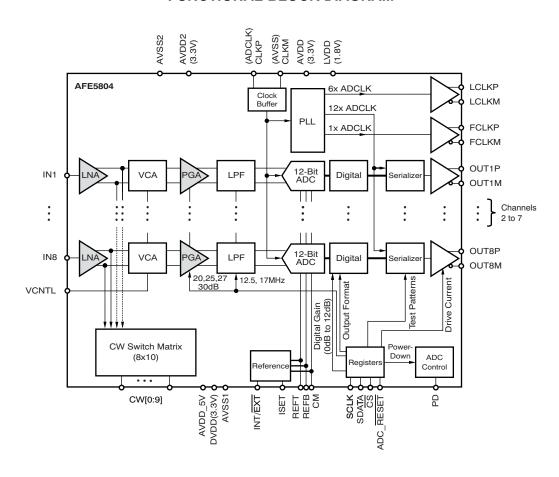



PIN CONFIGURATION

ZCF PACKAGE 135-BGA BOTTOM VIEW

	R	OUT4M	OUT3M	OUT2M	OUT1M	LVSS	OUT5M	OUT6M	OUT7M	ОПТВМ
	Р	OUT4P	ОИТЗР	OUT2P	OUT1P	LVDD	OUT5P	OUT6P	OUT7P	OUT8P
	N	LCLKP	LCLKM	LVSS	LVSS	LVSS	LVDD	LVDD	FCLKM	FCLKP
	М	DNC	DNC ()	AVSS1	AVSS1	AVSS1	AVSS1	AVSS1	DNC	DNC
	L	CLKP	AVDD1	AVSS1	AVSS1	AVSS1	AVSS1	AVSS1	AVDD1	EN SM
	K	CLKM	DNC ()	AVDD1	DNC	AVDD1	AVDD1	AVDD1	CM ()	ISET
	J	AVSS1	AVDD1	INT/EXT	AVSS2	AVSS2	AVSS2	AVDD1	REFT	REFB
Rows	Н	ADS_PD	DNC ()	DNC	VCA_CS	RST	SCLK	cs ()	SDATA	ADS_ RESET
	G	CW5	AVDD2	VCM ()	AVSS2	AVSS2	AVSS2	VREFL	AVDD2	CW4
	F	CW6	VB1	VB5	AVSS2	AVSS2	AVSS2	VREFH	VB6	СМЗ
	Е	CW7	AVDD_5V	VB3	AVSS2	AVSS2	AVSS2	VB4	AVDD_5V	CW2
	D	CW8	VCNTL	AVSS2	AVSS2	DVDD ()	AVSS2	AVSS2	VB2	CW1
	С	CW9	AVDD2	AVSS2	AVSS2	DVDD ()	AVSS2	AVSS2	AVDD2	cwo
	В	VBL1	VBL2	VBL3	VBL4	DNC	VBL8	VBL7	VBL6	VBL5
	Α	IN1	IN2	IN3	IN4	VCA_PD	IN8	IN7	IN6	IN5
		1	2	3	4	5 Columns	6	7	8	9



ZCF PACKAGE 135-BGA CONFIGURATION MAP (TOP VIEW)

R	OUT8M	OUT7M	OUT6M	OUT5M	LVSS	OUT1M	OUT2M	ОИТЗМ	OUT4M
Р	OUT8P	OUT7P	OUT6P	OUT5P	LVDD	OUT1P	OUT2P	OUT3P	OUT4P
N	FCLKP	FCLKM	LVDD	LVDD	LVSS	LVSS	LVSS	LCLKM	LCLKP
м	DNC	DNC	AVSS1	AVSS1	AVSS1	AVSS1	AVSS1	DNC	DNC
L	EN_SM	AVDD1	AVSS1	AVSS1	AVSS1	AVSS1	AVSS1	AVDD1	CLKP
к	ISET	СМ	AVDD1	AVDD1	AVDD1	DNC	AVDD1	DNC	CLKM
J	REFB	REFT	AVDD1	AVSS2	AVSS2	AVSS2	INT/EXT	AVDD1	AVSS1
н	ADS_RESET	SDATA	CS	SCLK	RST	VCA_CS	DNC	DNC	ADS_PD
G	CW4	AVDD2	VREFL	AVSS2	AVSS2	AVSS2	VCM	AVDD2	CW5
F	CW3	VB6	VREFH	AVSS2	AVSS2	AVSS2	VB5	VB1	CW6
E	CW2	AVDD_5V	VB4	AVSS2	AVSS2	AVSS2	VB3	AVDD_5V	CW7
D	CW1	VB2	AVSS2	AVSS2	DVDD	AVSS2	AVSS2	VCNTL	CW8
С	CW0	AVDD2	AVSS2	AVSS2	DVDD	AVSS2	AVSS2	AVDD2	CW9
В	VBL5	VBL6	VBL7	VBL8	DNC	VBL4	VBL3	VBL2	VBL1
А	IN5	IN6	IN7	IN8	VCA_PD	IN4	IN3	IN2	IN1
	9	8	7	6	5	4	3	2	1

 Legend:
 AVDD1
 +3.3V; Analog

 AVDD2
 +3.3V; Analog

 DVDD
 +3.3V; Analog

 LVDD
 +1.8V; Digital

 AVDD_5V
 +5V; Analog

 AVSS1
 Analog Ground

 AVSS2
 Analog Ground

 LVSS
 Digital Ground



Table 1. TERMINAL FUNCTIONS


H77 CS Input Chip select for serbil interface, active by H1 ADS, PD Input Power-down pin for ADS; active high H9 ADS, RESET input for ADS; active high H8 SCLK input Serial dox input for serial interface B SCLX input Serial dox input for serial interface JC, L2, K7, L7, K7, K7, K7, K7, K7, K7, K7, K7, K7, K	PIN NO.	PIN NAME	FUNCTION	DESCRIPTION
Heb ADS_RESET Input RSCET input for ADS; active low He SCLK Input Serial data input for serial interface JB SDATA Input Serial data input for serial interface JC, LZ, KT, 47, 77, 78, 12, LX, 12, MA, LX, 14, MA, L	H7	CS	Input	Chip select for serial interface; active low
He	H1	ADS_PD	-	Power-down pin for ADS; active high
He	H9	ADS_RESET	Input	RESET input for ADS; active low
January 1975 Janu	H6	SCLK	Input	Serial clock input for serial interface
K3, L8, K6, K6 L5, M6, L6, M6, L5, M6, L6, M6, L5, M6, L6, M6, L6, M6, L6, M6, L6, M6, L7, M7, J1 P5, N6, N7 LVDD POWER J, M7, M7, J1 P5, N6, N7 LVDD POWER J, M7, M7, M7 P5, N8, N7 LVDD POWER J, M7, M7, M7 P5, N8, N7 LVDD POWER J, M7, M7, M7 P5, N8, N7 LVDD POWER J, M7, M7, M7 POWER J,	H8	SDATA	Input	Serial data input for serial interface
LS, MS, LB, MS, LS, MS, AVSS1 (SND Analog ground for ADS (T. MT, JT) PS, NS, NY LVDD POWER 1.8V digital supply for ADS NS, NA, NS, RS LVSS GND Digital ground for ADS CZ, CB, CG, CB, AVDD2 POWER 3.3V analog supply for VCA EZ, EB, CB, AVDD2 POWER 3.3V analog supply for VCA EZ, EB, CB, CB, CB, CB, CB, CB, CB, CB, CB, C		AVDD1	POWER	3.3V analog supply for ADS
N3, N4, N5, R5	L5, M5, L6, M6,	AVSS1	GND	Analog ground for ADS
CS, DS DVDD POWER 3.3V digital supply for the VCA; connect to the 3.3V analog supply (AVDD2). C2, C8, C3, C8, C8, C8, E8, E4, F4, C4, E5, F6, C5, C8, D6, E6, F6, C6, C7, D7, V4, J5, J6 AVDD_5V POWER 3.3V analog supply for VCA C9, D3, C4, D4, E5, F6, C5, C6, D6, E6, F6, C6, C7, D7, V4, J5, J6 K1 CLKM Input Negative clock input for ADS (connect to <i>Ground</i> in single-ended clock mode) K1 CLKM Input Negative clock input for ADS (connect to <i>Ground</i> in single-ended clock mode) K1 CLKM Input Positive clock input for ADS (connect to <i>Ground</i> in single-ended clock mode) K8 CM Input/Output I.3V common-model lof for ADS. Becomes input pin in one of the external reference modes. C9 CW0 Output CW output 0 D9 CW1 Output CW output 2 E9 CW2 Output CW output 3 G9 CW4 Output CW output 3 G9 CW4 Output CW output 5 F1 CW6 Output CW output 6 E1 CW7 Output CW output 7 D1	P5, N6, N7	LVDD	POWER	1.8V digital supply for ADS
C2, C8, C8, C8 AVDD2 POWER 3.3V analog supply for VCA E2, E8 AVDD, 5V POWER 5V supply for VCA C9, D3, C4, D4, E4, F4, G4, E5, F5, G5, C6, D6, E6, F6, G8, C7, D7, J4, J3, J8 Analog ground for VCA E6, F6, G8, C7, D7, J4, J3, J8 CLKM Input Negative clock input for ADS (connect to Ground in Single-ended clock mode) K1 CLKM Input Positive clock input for ADS (connect to Ground in Single-ended clock mode) K8 CM Input/Output 1.5V common-mode I/O for ADS. Becomes input pin in one of the external reference modes. C9 CW0 Output CW output 0 Output 1 E9 CW2 Output CW output 2 Output 1 E9 CW3 Output 0 CW output 3 Output 2 G9 CW3 Output 0 CW output 3 Output 2 G1 CW5 Output 0 CW output 3 Output 3 G1 CW6 Output 0 CW output 4 Output 0 G1 CW6 Output 0 CW output 3 Output 1 G1 CW8 O	N3, N4, N5, R5	LVSS	GND	Digital ground for ADS
E2, E8 AVDD_5V POWER SV supply for VCA C3, D3, C4, D4, E4, E4, E4, E4, E4, E4, E5, E4, E6, E6, E6, E6, E6, E7, E7, E6, E6, E8, E7, E7, E7, E7, E7, E7, E7, E7, E7, E7	C5, D5	DVDD	POWER	3.3V digital supply for the VCA; connect to the 3.3V analog supply (AVDD2).
CS DS CAL DA, ES FS, CS CS DS, CS PS, CS FS, CS CS DS, DS, CS PS, CS PS, CS DS, DS, DS, DS, DS, DS, DS, DS, DS, DS	C2, C8, G2, G8	AVDD2	POWER	3.3V analog supply for VCA
E4, F4, G4, E5, F6, G5, C6, D6, E6, F7, G5, C6, D6, E6, F6, G5, C6, C7, D7, V4, J5, J6 K1 CLKM Input Negative clock input for ADS (connect to Ground in single-ended clock mode) L1 CLKP Input Positive clock input for ADS. K8 CM Input/Output 1.5V common-mode I/O for ADS. Becomes input pin in one of the external reference modes. C9 CWO Output CW output 1 E9 CW2 Output CW output 1 E9 CW3 Output CW output 3 G9 CW4 Output CW output 3 G9 CW4 Output CW output 4 G1 CW6 Output CW output 4 G1 CW7 Output CW output 6 E1 CW7 Output CW output 7 D1 CW8 Output CW output 9 E9 EN.SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKP Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (negative output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 6 A8 IN6 Input LNA input Channel 8 J3 INT/EXT Input LNA input Channel 8 J3 INT/EXT Input LNA input Channel 8 J4 LCLKM Output LVDS data output (regative). Channel 1 LNA input Channel 8 J4 LCLKM Output LVDS data output (regative). Channel 1 LVDS data output (regative). Channel 1 LVDS data output (regative). Channel 1 LVDS data output (regative). Channel 2 LVDS data output (regative). Channel 1 LVDS data output (regative). Channel 2 LVDS data output (regative). Channel 2 LVDS data output (regative). Channel 2	E2, E8	AVDD_5V	POWER	5V supply for VCA
L1 CLKP Input Positive clock input for ADS K8 CM Input/Output 1.5V common-mode I/O for ADS. Becomes input pin in one of the external reference modes. C9 CW0 Output CW output 0 B9 CW1 Output CW output 1 E9 CW2 Output CW output 2 F9 CW3 Output CW output 3 G9 CW4 Output CW output 4 G1 CW5 Output CW output 5 F1 CW6 Output CW output 7 D1 CW8 Output CW output 7 D1 CW8 Output CW output 9 L9 EN.SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N8 FCLKM Output LVDS frame clock (positive output) N9 FCLKP Output LVDS frame clock (positive output) A1 In1 Input LNA input Chann	E4, F4, G4, E5, F5, G5, C6, D6, E6, F6, G6, C7,	AVSS2	GND	Analog ground for VCA
K8	K1	CLKM	Input	Negative clock input for ADS (connect to <i>Ground</i> in single-ended clock mode)
C9 CW0 Output CW output 0 D9 CW1 Output CW output 1 E9 CW2 Output CW output 2 F9 CW3 Output CW output 3 G9 CW4 Output CW output 4 G1 CW5 Output CW output 5 F1 CW6 Output CW output 6 E1 CW7 Output CW output 7 D1 CW8 Output CW output 8 C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA i	L1			Positive clock input for ADS
D9	K8	СМ	Input/Output	1.5V common-mode I/O for ADS. Becomes input pin in one of the external reference modes.
E9 CW2 Output CW output 2 F9 CW3 Output CW output 3 G9 CW4 Output CW output 4 G1 CW5 Output CW output 5 F1 CW6 Output CW output 6 E1 CW7 Output CW output 7 D1 CW8 Output CW output 9 C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input	C9	CW0	Output	CW output 0
F9 CW3 Output CW output 3 G9 CW4 Output CW output 4 G1 CW5 Output CW output 4 G1 CW5 Output CW output 5 F1 CW6 Output CW output 6 E1 CW7 Output CW output 7 D1 CW8 Output CW output 8 C1 CW9 Output CW output 8 C1 CW9 Output LVDS frame clock (negative output) N8 FCLKM Output LVDS frame clock (negative output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 7 LNA input Channel 8 J3 INT/EXT Input LNA input Channel 7 INPUT Input LNA input Channel 8 INFUT Input LNA input Channel 9 INFUT Input Internal/ external reference mode select for ADS; internal = high INFUT INPUT	D9	CW1	Output	CW output 1
G9	E9	CW2	Output	CW output 2
G1	F9	CW3	Output	CW output 3
F1 CW6 Output CW output 6 E1 CW7 Output CW output 7 D1 CW8 Output CW output 8 C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Current bias pin for ADS. Requires 56kΩ to ground.	G9	CW4	Output	CW output 4
E1 CW7 Output CW output 7 D1 CW8 Output CW output 8 C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS	G1	CW5	Output	CW output 5
D1 CW8 Output CW output 9 C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output<	F1	CW6	Output	CW output 6
C1 CW9 Output CW output 9 L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N1 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R5 OUT2P Output LVDS data output (negative), Channel 2 R6 OUT3M Output LVDS data output (negative), Channel 3	E1	CW7	Output	CW output 7
L9 EN_SM Input Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1). N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input LNA input Channel 8 J3 INT/EXT Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (fex); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	D1	CW8	Output	CW output 8
N8 FCLKM Output LVDS frame clock (negative output) N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 R2 OU	C1	CW9	Output	CW output 9
N9 FCLKP Output LVDS frame clock (positive output) A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	L9	EN_SM	Input	Enables access to the VCA register. Active high. Connect permanently to 3.3V (AVDD1).
A1 IN1 Input LNA input Channel 1 A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 2 LVDS data output (negative), Channel 3	N8	FCLKM	Output	LVDS frame clock (negative output)
A2 IN2 Input LNA input Channel 2 A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	N9	FCLKP	Output	LVDS frame clock (positive output)
A3 IN3 Input LNA input Channel 3 A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	A1	IN1	Input	LNA input Channel 1
A4 IN4 Input LNA input Channel 4 A9 IN5 Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	A2	IN2	Input	LNA input Channel 2
A9 INS Input LNA input Channel 5 A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/ĒXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (negative), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	A3	IN3	Input	LNA input Channel 3
A8 IN6 Input LNA input Channel 6 A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (negative), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 3	A4	IN4	Input	LNA input Channel 4
A7 IN7 Input LNA input Channel 7 A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (negative), Channel 3	A9	IN5	Input	LNA input Channel 5
A6 IN8 Input LNA input Channel 8 J3 INT/EXT Input Internal/ external reference mode select for ADS; internal = high K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	A8	IN6	Input	LNA input Channel 6
J3	A7	IN7	Input	LNA input Channel 7
K9 ISET Input Current bias pin for ADS. Requires 56kΩ to ground. N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	A6	IN8	Input	LNA input Channel 8
N2 LCLKM Output LVDS bit clock (6x); negative output N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	J3	INT/EXT	Input	Internal/ external reference mode select for ADS; internal = high
N1 LCLKP Output LVDS bit clock (6x); positive output R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	K9	ISET	Input	Current bias pin for ADS. Requires $56k\Omega$ to ground.
R4 OUT1M Output LVDS data output (negative), Channel 1 P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	N2	LCLKM	Output	LVDS bit clock (6x); negative output
P4 OUT1P Output LVDS data output (positive), Channel 1 R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	N1	LCLKP	Output	LVDS bit clock (6x); positive output
R3 OUT2M Output LVDS data output (negative), Channel 2 P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	R4	OUT1M	Output	LVDS data output (negative), Channel 1
P3 OUT2P Output LVDS data output (positive), Channel 2 R2 OUT3M Output LVDS data output (negative), Channel 3	P4	OUT1P	Output	LVDS data output (positive), Channel 1
R2 OUT3M Output LVDS data output (negative), Channel 3	R3	OUT2M	Output	LVDS data output (negative), Channel 2
	P3	OUT2P	Output	LVDS data output (positive), Channel 2
P2 OUT3P Output LVDS data output (positive), Channel 3	R2	OUT3M	Output	LVDS data output (negative), Channel 3
	P2	OUT3P	Output	LVDS data output (positive), Channel 3



Table 1. TERMINAL FUNCTIONS (continued)

PIN NO.	PIN NAME	FUNCTION	DESCRIPTION
R1	OUT4M	Output	LVDS data output (negative), Channel 4
P1	OUT4P	Output	LVDS data output (positive), Channel 4
R6	OUT5M	Output	LVDS data output (negative), Channel 5
P6	OUT5P	Output	LVDS data output (positive), Channel 5
R7	OUT6M	Output	LVDS data output (negative), Channel 6
P7	OUT6P	Output	LVDS data output (positive), Channel 6
R8	OUT7M	Output	LVDS data output (negative), Channel 7
P8	OUT7P	Output	LVDS data output (positive), Channel 7
R9	OUT8M	Output	LVDS data output (negative), Channel 8
P9	OUT8P	Output	LVDS data output (positive), Channel 8
J9	REFB	Input/Output	0.5V Negative reference of ADS. Decoupling to ground. Becomes input in external ref mode.
J8	REFT	Input/Output	2.5V Positive reference of ADS. Decoupling to ground. Becomes input in external ref mode.
H5	RST	Input	RESET input for VCA. Connect to the VCA_\overline{CS} pin (H4).
H4	VCA_ CS	Output	Connect to RST-pin (H5)
F2	VB1	Output	Internal bias voltage. Bypass to ground with 2.2µF.
D8	VB2	Output	Internal bias voltage. Bypass to ground with 0.1µF.
E3	VB3	Output	Internal bias voltage. Bypass to ground with 0.1µF.
E7	VB4	Output	Internal bias voltage. Bypass to ground with 0.1µF
F3	VB5	Output	Internal bias voltage. Bypass to ground with 0.1µF.
F8	VB6	Output	Internal bias voltage. Bypass to ground with 0.1µF.
B1	VBL1	Input	Complementary LNA input Channel 1; bypass to ground with 0.1µF.
B2	VBL2	Input	Complementary LNA input Channel 2; bypass to ground with 0.1µF.
В3	VBL3	Input	Complementary LNA input Channel 3; bypass to ground with 0.1µF.
B4	VBL4	Input	Complementary LNA input Channel 4; bypass to ground with 0.1µF.
В9	VBL5	Input	Complementary LNA input Channel 5; bypass to ground with 0.1µF.
B8	VBL6	Input	Complementary LNA input Channel 6; bypass to ground with 0.1µF.
В7	VBL7	Input	Complementary LNA input Channel 7; bypass to ground with 0.1µF.
B6	VBL8	Input	Complementary LNA input Channel 8; bypass to ground with 0.1µF.
A5	VCA_PD	Input	Power-down pin for VCA; low = normal mode, high = power-down mode.
G3	VCM	Output	VCA reference voltage. Bypass to ground with 0.1μF.
D2	VCNTL	Input	VCA control voltage input
F7	VREFH	Output	Clamp reference voltage (2.7V). Bypass to ground with 0.1µF.
G7	VREFL	Output	Clamp reference voltage (2.0V). Bypass to ground with 0.1µF.
B5, H2, H3, K2, K4, M1, M2, M8, M9	DNC		Do not connect



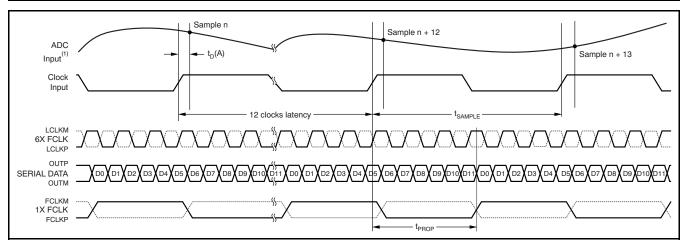

(1) Referenced to ADC Input (internal node) for illustration purposes only.

Figure 1. LVDS Timing Diagram

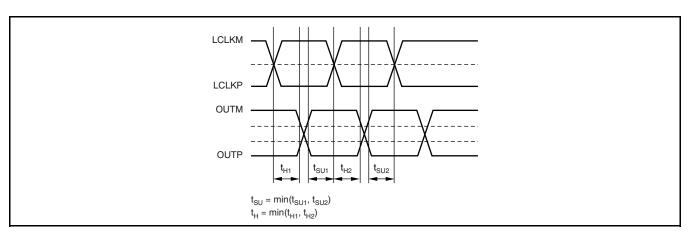


Figure 2. Definition of Setup and Hold Times

TIMING CHARACTERISTICS(1)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _{D(A)}	ADC aperture delay		1.5		4.5	ns
	Aperture delay variation	Channel-to-channel within the same device (3σ)		±20		ps
tJ	Aperture jitter			400		f _S , rms
		Time to valid data after coming out of COMPLETE POWER-DOWN mode		50		μs
t _{WAKE}	Wake-up time	Time to valid data after coming out of PARTIAL POWER-DOWN mode (with clock continuing to run during power-down)		2		μs
		Time to valid data after stopping and restarting the input clock		40		μs
	Data latency			12		Clock cycles

(1) Timing parameters are ensured by design and characterization; not production tested.



LVDS OUTPUT TIMING CHARACTERISTICS(1) (2)

Typical values are at +25°C, minimum and maximum values over specified temperature range of $T_{MIN} = 0$ °C to $T_{MAX} = +85$ °C, sampling frequency = as specified, $C_{LOAD} = 5pF^{(3)}$, $I_{OUT} = 3.5mA$, $R_{LOAD} = 100\Omega^{(4)}$, and no internal termination, unless otherwise noted.

					AFE	5804			
			40MSPS			50MSPS			1
	PARAMETER	TEST CONDITIONS ⁽⁵⁾	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
t _{SU}	Data setup time ⁽⁶⁾	Data valid ⁽⁷⁾ to zero-crossing of LCLKP	0.67			0.47			ns
t _H	Data hold time ⁽⁶⁾	Zero-crossing of LCLKP to data becoming invalid (7)	0.85			0.65			ns
t _{PROP}	Clock propagation delay	ADC input clock rising edge cross-over to output clock (FCLKP) rising edge cross-over	10	14	16.6	10	12.5	14.1	ns
	LVDS bit clock duty cycle	Duty cycle of differential clock, (LCLKP – LCLKM)	45.5	50	53	45	50	53.5	
	Bit clock cycle-to-cycle jitter			250			250		ps, pp
	Frame clock cycle-to-cycle jitter			150			150		ps, pp
t _{RISE} , t _{FALL}	Data rise time, data fall time	Rise time is from -100mV to +100mV Fall time is from +100mV to -100mV	0.09	0.2	0.4	0.09	0.2	0.4	ns
t _{CLKRISE} , t _{CLKFALL}	Output clock rise time, output clock fall time	Rise time is from –100mV to +100mV Fall time is from +100mV to –100mV	0.09	0.2	0.4	0.09	0.2	0.4	ns

- All characteristics are at the maximum rated speed for each speed grade.
- Timing parameters are ensured by design and characterization; not production tested.
- C_{LOAD} is the effective external single-ended load capacitance between each output pin and ground. I_{OUT} refers to the LVDS buffer current setting; R_{LOAD} is the differential load resistance between the LVDS output pair. Measurements are done with a transmission line of 100Ω characteristic impedance between the device and the load.
- Setup and hold time specifications take into account the effect of jitter on the output data and clock. These specifications also assume that data and clock paths are perfectly matched within the receiver. Any mismatch in these paths within the receiver would appear as reduced timing margin.
- Data valid refers to a logic high of +100mV and a logic low of -100mV.

LVDS OUTPUT TIMING CHARACTERISTICS(1) (2)

Typical values are at +25°C, minimum and maximum values over specified temperature range of $T_{MIN} = 0$ °C to $T_{MAX} = +85$ °C, sampling frequency = as specified, $C_{LOAD} = 5pF^{(3)}$, $I_{OUT} = 3.5mA$, $R_{LOAD} = 100\Omega^{(4)}$, and no internal termination, unless otherwise noted.

							AFE5804					
				30MSPS			20MSPS			10MSPS		
	PARAMETER	TEST CONDITIONS (5)	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	UNIT
t _{SU}	Data setup time ⁽⁶⁾	Data valid ⁽⁷⁾ to zero-crossing of LCLKP	0.8			1.5			3.7			ns
t _H	Data hold time ⁽⁶⁾	Zero-crossing of LCLKP to data becoming invalid ⁽⁷⁾	1.2			1.9			3.9			ns
t _{PROP}	Clock propagation delay	ADC input clock rising edge cross-over to output clock (FCLKP) rising edge cross-over	9.5	13.5	17.3	9.5	14.5	17.3	10	14.7	17.1	ns
	LVDS bit clock duty cycle	Duty cycle of differential clock, (LCLKP – LCLKM)	46.5	50	52	48	50	51	49	50	51	
	Bit clock cycle-to-cycle jitter			250			250			750		ps, pp
	Frame clock cycle-to-cycle jitter			150			150			500		ps, pp
t _{RISE} , t _{FALL}	Data rise time, data fall time	Rise time is from -100mV to +100mV Fall time is from +100mV to -100mV	0.09	0.2	0.4	0.09	0.2	0.4	0.09	0.2	0.4	ns
t _{CLKRISE} , t _{CLKFALL}	Output clock rise time, output clock fall time	Rise time is from -100mV to +100mV Fall time is from +100mV to -100mV	0.09	0.2	0.4	0.09	0.2	0.4	0.09	0.2	0.4	ns

- All characteristics are at the speeds other than the maximum rated speed for each speed grade.
- Timing parameters are ensured by design and characterization; not production tested.
- CLOAD is the effective external single-ended load capacitance between each output pin and ground.
- I_{OUT} refers to the LVDS buffer current setting; R_{LOAD} is the differential load resistance between the LVDS output pair.
- Measurements are done with a transmission line of 100Ω characteristic impedance between the device and the load.
- Setup and hold time specifications take into account the effect of jitter on the output data and clock. These specifications also assume that data and clock paths are perfectly matched within the receiver. Any mismatch in these paths within the receiver would appear as reduced timing margin.
- Data valid refers to a logic high of +100mV and a logic low of -100mV.



TYPICAL CHARACTERISTICS

AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0 μ F, V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.




Figure 3.




Figure 4.




Figure 5.






Figure 6.







AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25$ °C, unless otherwise noted.




Figure 9.




Figure 10.







Figure 11.







Copyright © 2008-2011, Texas Instruments Incorporated

PW Mode



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.




Figure 15.




Figure 16.

INPUT-REFERRED NOISE vs FREQUENCY AND RS




Figure 17.




Figure 18.

OUTPUT-REFERRED NOISE vs FREQUENCY AND RS




Figure 19.

OUTPUT-REFERRED NOISE vs FREQUENCY AND RS




Figure 20.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.




Figure 21.




Figure 22.

INPUT-REFERRED NOISE vs PGA




Figure 23.

GAIN MATCH HISTOGRAM (V_{CNTL} = 0.1V)




Figure 24.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 $V_{CNTL} = 1.0V$, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25^{\circ}$ C, unless otherwise noted.

GAIN MATCH HISTOGRAM

GAIN MATCH HISTOGRAM




Figure 25.





Figure 27.








Figure 26.

OUTPUT OFFSET HISTOGRAM




Figure 28.

SECOND HARMONIC vs V_{CNTL} AND FREQUENCY




Figure 30.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25^{\circ}C$, unless otherwise noted. THIRD HARMONIC vs V_{CNTL} AND FREQUENCY




Figure 31.




Figure 32.





Figure 33.



-35 -40 Distortion (dBFS) -45 -50 -55 -60 0.6




Figure 35.





Figure 36.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted. SECOND HARMONIC vs V_{CNTL} AND FREQUENCY SECOND HARMONIC vs V_{CNTL} AND FREQUENCY









Figure 38.






THIRD HARMONIC vs V_{CNTL} AND FREQUENCY



SECOND HARMONIC vs V_{CNTL} AND FREQUENCY



SECOND HARMONIC vs V_{CNTL} AND FREQUENCY





Figure 42.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25^{\circ}\text{C}$, unless otherwise noted. THIRD HARMONIC vs V_{CNTL} AND FREQUENCY






Figure 44.






Figure 45.



THIRD HARMONIC vs V_{CNTL} AND FREQUENCY









Figure 48.





AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25^{\circ}C$, unless otherwise noted. SECOND HARMONIC vs V_{CNTL} AND FREQUENCY





SECOND HARMONIC vs V_{CNTL} AND FREQUENCY





THIRD HARMONIC vs V_{CNTL} AND FREQUENCY





CROSSTALK vs V_{CNTL}






Figure 54.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.











Figure 57.













AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,


 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.

















AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25$ °C, unless otherwise noted.








Figure 68.






Figure 69. CROSSTALK vs V_{CNTL}



PW Mode




V_{CNTL} (V) Figure 71.

0.9

1.0

1.1



25

0.7

0.8

-60


-90

0.6



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature T_A = +25°C, unless otherwise noted.






Figure 74.






Figure 75.

OVERLOAD RECOVERY

Time (µs)

Figure 77.








Figure 78.

0.50

0.25

0

-0.25

-0.5

2


Output Voltage (V)



1.0


AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 $V_{CNTL} = 1.0V$, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = 56k Ω , LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25^{\circ}$ C, unless otherwise noted.



Sample Points Figure 80.











Figure 82.






Figure 84.



AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 V_{CNTL} = 1.0V, f_{IN} 5MHz, Clock = 40MSPS, 50% duty cycle, internal reference mode, ISET = $56k\Omega$, LVDS buffer setting = 3.5mA, at ambient temperature $T_A = +25$ °C, unless otherwise noted. INTERMODULATION DISTORTION





Figure 85.

INTERMODULATION DISTORTION





(1.99MHz and 2.01MHz)

INTERMODULATION DISTORTION (1.99MHz and 2.01MHz)




Figure 87.




Figure 88.

INTERMODULATION DISTORTION (4.99MHz and 5.01MHz)




Figure 89.

INTERMODULATION DISTORTION (1.99MHz and 2.01MHz)




Figure 90.




AVDD_5V = 5.0V, AVDD1 = VDD2 = DVDD = 3.3V, LVDD = 1.8V, single-ended input into LNA, ac-coupled with 1.0µF,

 $V_{CNTL} = 1.0V, \, f_{IN} \, 5MHz, \, Clock = 40MSPS, \, 50\% \, \, duty \, \, cycle, \, internal \, \, reference \, mode, \, ISET = 56k\Omega, \, LVDS \, \, buffer \, setting = 1.0V \, \, f_{IN} \,$ 3.5mA, at ambient temperature $T_A = +25$ °C, unless otherwise noted.

INTERMODULATION DISTORTION

(4.99MHz and 5.01MHz)





SERIAL INTERFACE

The AFE5804 has a set of internal registers that can be accessed through the serial interface formed by pins CS (chip select, active low), SCLK (serial interface clock), and SDATA (serial interface data). When CS is low, the following actions occur:

- · Serial shift of bits into the device is enabled
- SDATA (serial data) is latched at every rising edge of SCLK
- SDATA is loaded into the register at every 24th SCLK rising edge

If the word length exceeds a multiple of 24 bits, the excess bits are ignored. Data can be loaded in multiples of 24-bit words within a single active $\overline{\text{CS}}$ pulse. The first eight bits form the register address and the remaining 16 bits form the register data. The interface can work with SCLK frequencies from 20MHz down to very low speeds (a few hertz) and also with a non-50% SCLK duty cycle.

Register Initialization

After power-up, the internal registers *must* be initialized to the respective default values. Initialization can be done in one of two ways:

- 1. Through a hardware reset, by applying a low-going pulse on the ADS_RESET pin; or
- 2. Through a software reset; using the serial interface, set the S_RST bit high. Setting this bit initializes the internal registers to the respective default values and then self-resets the bit low. In this case, the ADS RESET pin stays high (inactive).
- 3. The registers in Table 2 must be programmed after the initialization stage. The power-supply ripple and clock jitter effects can be minimized.

ADDRESS	DATA
01	0010h
D1	0140h
DA	0001h
E1	0020h
02	0080h
01	0000h

Table 2. Register Data

Serial Port Interface (SPI) Information


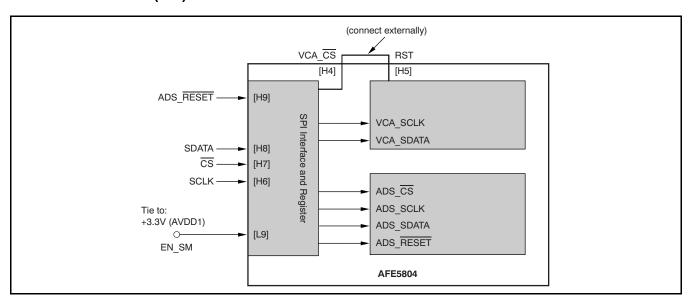


Figure 92. Typical Connection Diagram for the SPI Control Lines




SERIAL INTERFACE TIMING

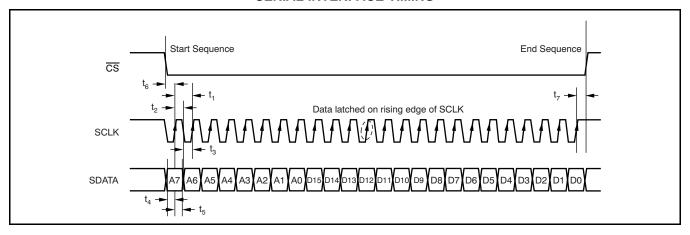

		AFE5804							
PARAMETER	DESCRIPTION	MIN	TYP	MAX	UNIT				
t ₁	SCLK period	50			ns				
t ₂	SCLK high time	20			ns				
t ₃	SCLK low time	20			ns				
t ₄	Data setup time	5			ns				
t ₅	Data hold time	5			ns				
t ₆	CS fall to SCLK rise	8			ns				
t ₇	Time between last SCLK rising edge to CS rising edge	8			ns				

Internally-Generated VCA Control Signals



VCA_SCLK and VCA_SDATA signals are generated if:

- Registers with address 16, 17, or 18 (hex) are written to, and
- EN_SM pin is HIGH



SERIAL REGISTER MAP

Table 3. SUMMARY OF FUNCTIONS SUPPORTED BY SERIAL INTERFACE⁽¹⁾ (2) (3) (4)

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME	DESCRIPTION	DEFAULT
00																Х	S_RST	Self-clearing software RESET.	Inactive
03	0	0	0	0	0	0	0	0	0	0	RES_ VCA	0	0	0	0	0			
16	х	х	х	х	х	х	х	х	х	х	Х	х	х	х	1	1	VCA_SDATA <0:15>	See Table 5 information	D5 = 1 (TGC mode)
17	х	х	х	х	х	х	Х	х	Х	х	Х	х	х	Х	х	х	VCA_SDATA <16:31>	See Table 5 information	
18									х	х	Х	х	х	х	х	Х	VCA_DATA <32:39>	See Table 5 information	
													х	Х	х	х	PDN_CH<1:4>	Channel-specific ADC power-down mode.	Inactive
									Х	х	Х	х					PDN_CH<8:5>	Channel-specific ADC power-down mode.	Inactive
0F								Х									PDN_PARTIAL	Partial power-down mode (fast recovery from power-down).	Inactive
						0	Х										PDN_COMPLETE	Register mode for complete power-down (slower recovery).	Inactive
						Х	0										PDN_PIN_CFG	Configures the PD pin for partial power-down mode.	Complete power-down
														х	Х	Х	ILVDS_LCLK<2:0>	LVDS current drive programmability for LCLKM and LCLKP pins.	3.5mA drive
11										х	x	х					ILVDS_FRAME <2:0>	LVDS current drive programmability for FCLKM and FCLKP pins.	3.5mA drive
						х	х	х									ILVDS_DAT<2:0>	LVDS current drive programmability for OUTM and OUTP pins.	3.5mA drive
		х															EN_LVDS_TERM	Enables internal termination for LVDS buffers.	Termination disabled
12		1												Х	х	х	TERM_LCLK<2:0>	Programmable termination for LCLKM and LCLKP buffers.	Termination disabled
12		1								х	Х	х					TERM_FRAME <2:0>	Programmable termination for FCLKM and FCLKP buffers.	Termination disabled
		1				х	х	х									TERM_DAT<2:0>	Programmable termination for OUTM and OUTP buffers.	Termination disabled
44													х	х	х	х	LFNS_CH<1:4>	Channel-specific, low-frequency noise suppression mode enable.	Inactive
14									х	х	х	х					LFNS_CH<8:5>	Channel-specific, low-frequency noise suppression mode enable.	Inactive
										х	0	0					EN_RAMP	Enables a repeating full-scale ramp pattern on the outputs.	Inactive
										0	Х	0					DUALCUSTOM_ PAT	Enables the mode wherein the output toggles between two defined codes.	Inactive
25										0	0	х					SINGLE_CUSTOM _PAT	Enables the mode wherein the output is a constant specified code.	Inactive
															Х	х	BITS_CUSTOM1 <11:10>	2MSBs for a single custom pattern (and for the first code of the dual custom pattern). <11> is the MSB.	Inactive
													Х	х			BITS_CUSTOM2 <11:10>	2MSBs for the second code of the dual custom pattern.	Inactive
26	х	х	х	х	х	х	x	х	х	х							BITS_CUSTOM1 <9:0>	10 lower bits for the single custom pattern (and for the first code of the dual custom pattern). <0> is the LSB.	Inactive
27	х	х	х	х	х	х	х	х	х	х							BITS_CUSTOM2 <9:0>	10 lower bits for the second code of the dual custom pattern.	Inactive

- The unused bits in each register (identified as blank table cells) must be programmed as '0'.

 X = Register bit referenced by the corresponding name and description (default setting is listed in table).

 Bits marked as '0' should be forced to 0, and bits marked as '1' should be forced to 1 when the particular register is programmed.

⁽⁴⁾ Multiple functions in a register should be programmed in a single write operation.

www.ti.com

Table 3. SUMMARY OF FUNCTIONS SUPPORTED BY SERIAL INTERFACE^{(1) (2) (3) (4)} (continued)

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME	DESCRIPTION	DEFAULT
										-			Х	Х	Х	Х	GAIN_CH4<3:0>	Programmable gain channel 4.	0dB gain
									Х	Х	Х	Х					GAIN_CH3<3:0>	Programmable gain channel 3.	0dB gain
2A					Х	Х	Х	Х									GAIN_CH2<3:0>	Programmable gain channel 2.	0dB gain
	Х	Х	Х	Х													GAIN_CH1<3:0>	Programmable gain channel 1.	0dB gain
	Х	Х	Х	Х													GAIN_CH5<3:0>	Programmable gain channel 5.	0dB gain
2B					Х	Х	Х	Х									GAIN_CH6<3:0>	Programmable gain channel 6.	0dB gain
26									Χ	Х	Χ	Х					GAIN_CH7<3:0>	Programmable gain channel 7.	0dB gain
													Х	Х	Х	Х	GAIN_CH8<3:0>	Programmable gain channel 8.	0dB gain
	1								1							Х	DIFF_CLK	Differential clock mode.	Single- ended clock
	1								1					х			EN_DCC	Enables the duty-cycle correction circuit.	Disabled
42	1								1				x				EXT_REF_VCM	Drives the external reference mode through the VCM pin.	External reference drives REFT and REFB
	1								1	Х	Х						PHASE_DDR<1:0>	Controls the phase of LCLK output relative to data.	90 degrees
45															0	Х	PAT_DESKEW	Enables deskew pattern mode.	Inactive
45															Х	0	PAT_SYNC	Enables sync pattern mode.	Inactive
	1						1							х			BTC_MODE	Binary twos complement format for ADC output.	Straight offset binary
	1						1						х				MSB_FIRST	Serialized ADC output comes out MSB-first.	LSB-first output
46	1						1					х					EN_SDR	Enables SDR output mode (LCLK becomes a 12x input clock).	DDR output mode
	1		1				1					1					FALL_SDR	Controls whether the LCLK rising or falling edge comes in the middle of the data window when operating in SDR output mode.	Rising edge of LCLK in middle of data window

SUMMARY OF FEATURES

FEATURES	DEFAULT	SELECTION	POWER IMPACT (Relative to Default) AT f _S = 50MSPS
ANALOG FEATURES			
Internal or external reference (driven on the REFT and REFB pins)	N/A	Pin	Internal reference mode takes approximately 20mW more power on AVDD1
External reference driven on the CM pin	Off	Register 42	Approximately 8mW less power on AVDD1
Duty cycle correction circuit	Off	Register 42	Approximately 7mW more power on AVDD1
Low-frequency noise suppression	Off	Register 14	With zero input to the ADC, low-frequency noise suppression causes digital switching at fs/2, thereby increasing LVDD power by approximately 5.5mW/channel
Single-ended or differential clock	Single-ended	Register 42	Differential clock mode takes approximately 7mW more power on AVDD1
Power-down mode	Off	Pin and register 0F	Refer to the <i>Power-Down Modes</i> section in the Electrical Characteristics table
DIGITAL FEATURES			
Programmable digital gain (0dB to 12dB)	0dB	Registers 2A and 2B	No difference
Straight offset or BTC output	Straight offset	Register 46	No difference
Swap polarity of analog input pins	Off	Register 24	No difference
LVDS OUTPUT PHYSICAL LAYER			
LVDS internal termination	Off	Register 12	Approximately 7mW more power on AVDD
LVDS current programmability	3.5mA	Register 11	As per LVDS clock and data buffer current setting
LVDS OUTPUT TIMING			
LSB- or MSB-first output	LSB-first	Register 46	No difference
DDR or SDR output	DDR	Register 46	SDR mode takes approximately 2mW more power on LVDD (at $f_S = 30MSPS$)
LCLK phase relative to data output	Refer to Figure 94	Register 42	No difference



DESCRIPTION OF SERIAL REGISTERS

SOFTWARE RESET

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
00																Χ	S_RST

Software reset is applied when the RST bit is set to '1'; setting this bit resets all internal registers and self-clears to '0'.

Table 4. VCA Register Information

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
03	0	0	0	0		0	0	0	0	0	RES_V CA	0	0	0	0	0
16	VCA D15	VCA D14	VCA D13	VCA D12	VCA D11	VCA D10	VCA D9	VCA D8	VCA D7	VCA D6	VCA D5	VCA D4	VCA D3	VCA D2	1 ⁽¹⁾ D1	1 ⁽¹⁾ D0
17	VCA D31	VCA D30	VCA D29	VCA D28	VCA D27	VCA D26	VCA D25	VCA D24	VCA D23	VCA D22	VCA D21	VCA D20	VCA D19	VCA D18	VCA D17	VCA D16
18									VCA D39	VCA D38	VCA D37	VCA D36	VCA D35	VCA D34	VCA D33	VCA D32

(1) Bits D0 and D1 of register 16 are forced to '1'.

- VCA_SCLK and VCA_SDATA become active only when one of the registers 16, 17 or 18 (address in hex) of the AFE5804 are written into.
- The contents of all three registers (total 40 bits) are written on VCA_SDATA even if only one of the above registers is written to. This condition is only valid if the content of the register has changed because of the most recent write. Writing contents that are the same as existing contents does not trigger activity on VCA SDATA.
- For example, if register 17 is written to after a RESET is applied, then the contents of register 17 as well as the default values of the bits in registers 16 and 18 are written to VCA SDATA.
- If register 16 is then written to, then the new contents of register 16, the previously written contents of register 17, and the default contents of register 18 are written to VCA_SDATA. Note that regardless of what is written to D0 and D1 of register 16, the respective outputs on VCA_SDATA are always '1'.
- Alternatively, all three registers (16, 17 and 18) can also be written within one write cycle of the ADC serial interface. In that case, there would be 48 consecutive SCLK edges within the same CS active window.
- VCA_SCLK is generated using an oscillator (running at approximately 6MHz) inside the AFE5804, but the
 oscillator is gated so that it is active only during the write operation of the 40 VCA bits.
- The external ADC SCLK frequency can be greater than 6MHz. To ensure the SDATA transfer reliability, ≥ 1µs gap is recommended between programming two VCA registers consecutively.

VCA Reset

- VCA CS should be permanently connected to the RST-input.
- When VCA_CS goes high (either because of an active low pulse on ADS_RESET for more than 10ns or as a
 result or setting bit RES_VCA), the following functions are performed inside the AFE5804:
 - Bits D0 and D1 of register 16 are forced to '1'
 - All other bits in registers 16, 17 and 18 are RESET to the respective default values ('0' for all bits except D5 of register 16 which is set to a default of '1').
 - No activity on signals VCA_SCLK and VCA_SDATA.
- If bit RES VCA has been set to '1', then the state machine is in the RESET state until RES VCA is set to '0'.



INPUT REGISTER BIT MAPS

Table 5. VCA Register Map

BYTE 1	BY	TE 2	BY	ΓE 3	BY*	ΤΕ 4	BYTE 5			
D0:D7	D8:D11	D12:D15	D16:D19	D20:D23	D24:D27	D28:D31	D32:D35	D36:D39		
Control	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8		

Table 6. Byte 1—Control Byte Register Map

BIT NUMBER	BIT NAME	DESCRIPTION
D0 (LSB)	1	Start bit; this bit is permanently set high = 1
D1	WR	Write bit; this bit is permanently set high = 1
D2	PWR	1= Power-down mode enabled
D3	BW	Low-pass filter bandwidth setting (see Table 11)
D4	M0	(see Table 12)
D5	M1	(see Table 12)
D6	PG0	LSB of PGA gain control (see Table 13)
D7 (MSB)	PG1	MSB of PGA gain control

Table 7. Byte 2—First Data Byte

BIT NUMBER	BIT NAME	DESCRIPTION
D8 (LSB)	DB1:1	Channel 1, LSB of matrix control
D9	DB1:2	Channel 1, matrix control
D10	DB1:3	Channel 1, matrix control
D11	DB1:4	Channel 1, MSB of matrix control
D12	DB2:1	Channel 2, LSB of matrix control
D13	DB2:2	Channel 2, matrix control
D14	DB2:3	Channel 2, matrix control
D15 (MSB)	DB2:4	Channel 2, MSB of matrix control

Table 8. Byte 3—Second Data Byte

BIT NUMBER	BIT NAME	DESCRIPTION
D16 (LSB)	DB3:1	Channel 3, LSB of matrix control
D17	DB3:2	Channel 3, matrix control
D18	DB3:3	Channel 3, matrix control
D19	DB3:4	Channel 3, MSB of matrix control
D20	DB4:1	Channel 4, LSB of matrix control
D21	DB4:2	Channel 4, matrix control
D22	DB4:3	Channel 4, matrix control
D23 (MSB)	DB4:4	Channel 4, MSB of matrix control



Table 9. Byte 4—Third Data Byte

BIT NUMBER	BIT NAME	DESCRIPTION
D24 (LSB)	DB5:1	Channel 5, LSB of matrix control
D25	DB5:2	Channel 5, matrix control
D26	DB5:3	Channel 5, matrix control
D27	DB5:4	Channel 5, MSB of matrix control
D28	DB6:1	Channel 6, LSB of matrix control
D29	DB6:2	Channel 6, matrix control
D30	DB6:3	Channel 6, matrix control
D31 (MSB)	DB6:4	Channel 6, MSB of matrix control

Table 10. Byte 5—Fourth Data Byte

BIT NUMBER	BIT NAME	DESCRIPTION
D32 (LSB)	DB7:1	Channel 7, LSB of matrix control
D33	DB7:2	Channel 7, matrix control
D34	DB7:3	Channel 7, matrix control
D35	DB7:4	Channel 7, MSB of matrix control
D36	DB8:1	Channel 8, LSB of matrix control
D37	DB8:2	Channel 8, matrix control
D38	DB8:3	Channel 8, matrix control
D39 (MSB)	DB8:4	Channel 8, MSB of matrix control

Table 11. LPF Bandwidth Setting

	SETTING	FUNCTION
BW	D3 = 0	Bandwidth set to 17MHz (default)
BW	D3 = 1	Bandwidth set to 12.5MHz

Table 12. Mode Setting

M1 [D5]	M0 [D4]	FUNCTION
0	0	CW mode
0	1	TGC mode I; high-performance mode, lowest noise
1	0	TGC mode II; lowest power mode
1	1	PW mode

Table 13. PGA Gain Setting

PG1 (D7)	PG0 (D6)	FUNCTION
0	0	Sets PGA gain to 20dB (default)
0	1	Sets PGA gain to 25dB
1	0	Sets PGA gain to 27dB
1	1	Sets PGA gain to 30dB



Table 14. CW Switch Matrix Control for Each Channel

DBn:4 (MSB)	DBn:3	DBn:2	DBn:1 (LSB)	LNA INPUT CHANNEL n DIRECTED TO		
0	0	0	0	Output CW0		
0	0	0	1	Output CW1		
0	0	1	0	Output CW2		
0	0	1	1	Output CW3		
0	1	0	0	Output CW4		
0	1	0	1	Output CW5		
0	1	1	0	Output CW6		
0	1	1	1	Output CW7		
1	0	0	0	Output CW8		
1	0	0	1	Output CW9		
1	0	1	0	Connected to AVDD_5V		
1	0	1	1	Connected to AVDD_5V		
1	1	0	0	Connected to AVDD_5V		
1	1	0	1	Connected to AVDD_5V		
1	1	1	0	Connected to AVDD_5V		
1	1	1	1 Connected to AVDD_5V			

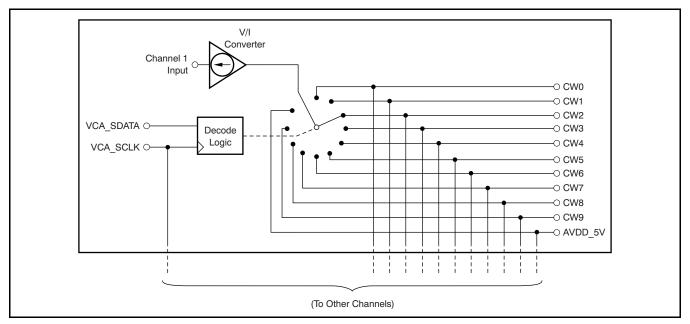


Figure 93. Basic CW Cross-Point Switch Matrix Configuration



POWER-DOWN MODES

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
													Х	Х	Х	Х	PDN_CH<1:4>
									Х	Х	Х	Х					PDN_CH<8:5>
0F								Χ									PDN_PARTIAL
						0	Х										PDN_COMPLETE
						Χ	0										PDN_PIN_CFG

Each of the eight ADC channels can be individually powered down. PDN_CH<N> controls the power-down mode for the ADC channel <N>.

In addition to channel-specific power-down, the AFE5804 also has two global power-down modes: partial power-down mode and complete power-down mode.

In addition to programming the device for either of these two power-down modes (through either the PDN_PARTIAL or PDN_COMPLETE bits, respectively), the ADS_PD pin itself can be configured as either a partial power-down pin or a complete power-down pin control. For example, if PDN_PIN_CFG = 0 (default), when the ADS_PD pin is high, the device enters complete power-down mode. However, if PDN_PIN_CFG = 1, when the ADS_PD pin is high, the device enters partial power-down mode.

The partial power-down mode function allows the AFE5804 to be rapidly placed in a low-power state. In this mode, most amplifiers in the signal path are powered down, while the internal references remain active. This configuration ensures that the external bypass capacitors retain the respective charges, minimizing the wake-up response time. The wake-up response is typically less than 50µs, provided that the clock has been running for at least 50µs before normal operating mode resumes. The power-down time is instantaneous (less than 1.0µs).

In partial power-down mode, the part typically dissipates only 95mW, representing a 76% power reduction compared to the normal operating mode. This function is controlled through the ADS_PD and VCA_PD pins, which are designed to interface with 3.3V low-voltage logic. If separate control of the two PD pins is not desired, then both can be tied together. In this case, the ADS_PD pin should be configured to operate as a partial power-down mode pin (see further information below).

For normal operation the PD pins should be tied to a logic low (0); a high (1) places the AFE5804 into partial power-down mode.

To achieve the lowest power dissipation of only 52mW, the AFE5804 can be placed in complete power-down mode. This mode is controlled through the serial interface by setting Register 16 (bit D2) and Register 0F (bit D9:D10). In complete power-down mode, all circuits (including references) within the AFE5804 are powered-down, and the bypass capacitors then discharge. Consequently, the wake-up time from complete power-down mode depends largely on the time needed to recharge the bypass capacitors. Another factor that affects the wake-up time is the elapsed time that the AFE5804 spends in shutdown mode.



LVDS DRIVE PROGRAMMABILITY

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
														Х	Х	Χ	ILVDS_LCLK<2:0>
11										Х	Х	Χ					ILVDS_FRAME<2:0>
						X	Х	Х									ILVDS_DAT<2:0>

The LVDS drive strength of the bit clock (LCLKP or LCLKM) and the frame clock (FCLKP or FCLKM) can be individually programmed. The LVDS drive strengths of all the data outputs OUTP and OUTM can also be programmed to the same value.

All three drive strengths (bit clock, frame clock, and data) are programmed using sets of three bits. Table 15 shows an example of how the drive strength of the bit clock is programmed (the method is similar for the frame clock and data drive strengths).

Table 15. Bit Clock Drive Strength (1)

ILVDS_LCLK<2>	ILVDS_LCLK<1>	ILVDS_LCLK<0>	LVDS DRIVE STRENGTH FOR LCLKP AND LCLKM
0	0	0	3.5mA (default)
0	0	1	2.5mA
0	1	0	1.5mA
0	1	1	0.5mA
1	0	0	7.5mA
1	0	1	6.5mA
1	1	0	5.5mA
1	1	1	4.5mA

⁽¹⁾ Current settings lower than 1.5mA are not recommended.



LVDS INTERNAL TERMINATION PROGRAMMING

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
		Χ															EN_LVDS_TERM
12		1												Х	Х	Х	TERM_LCLK<2:0>
12		1								Х	Х	Χ					TERM_FRAME<2:0>
		1				Х	Х	Х									TERM_DAT<2:0>

The LVDS buffers have high-impedance current sources that drive the outputs. When driving traces with characteristic impedances that are not perfectly matched with the termination impedance on the receiver side, there may be reflections back to the LVDS output pins of the AFE5804 that cause degraded signal integrity. By enabling an internal termination (between the positive and negative outputs) for the LVDS buffers, the signal integrity can be significantly improved in such scenarios. To set the internal termination mode, the EN_LVDS_TERM bit should be set to '1'. Once this bit is set, the internal termination values for the bit clock, frame clock, and data buffers can be independently programmed using sets of three bits. Table 16 shows an example of how the internal termination of the LVDS buffer driving the bit clock is programmed (the method is similar for the frame clock and data drive strengths). These termination values are only typical values and can vary by several percentages across temperature and from device to device.

Table 16. Bit Clock Internal Termination

TERM_LCLK<2>	TERM_LCLK<1>	TERM_LCLK<0>	INTERNAL TERMINATION BETWEEN LCLKP AND LCLKM (Ω)
0	0	0	None
0	0	1	260
0	1	0	150
0	1	1	94
1	0	0	125
1	0	1	80
1	1	0	66
1	1	1	55

LOW-FREQUENCY NOISE SUPPRESSION MODE

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
14													Х	Х	Х	Χ	LFNS_CH<1:4>
14									Χ	Χ	Χ	Χ					LFNS_CH<8:5>

The low-frequency noise suppression mode is especially useful in applications where good noise performance is desired in the frequency band of 0MHz to 1MHz (around dc). Setting this mode shifts the low-frequency noise of the AFE5804 to approximately $f_{\rm S}/2$, thereby moving the noise floor around dc to a much lower value. LFNS CH<8:1> enables this mode individually for each channel.



LVDS TEST PATTERNS

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
										Х	0	0					EN_RAMP
										0	Х	0					DUALCUSTOM_PAT
25										0	0	Х					SINGLE_CUSTOM_PAT
															Х	Х	BITS_CUSTOM1<11:10>
													Х	Х			BITS_CUSTOM2<11:10>
26	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х							BITS_CUSTOM1<9:0>
27	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х							BITS_CUSTOM2<9:0>
45															0	Х	PAT_DESKEW
45															Х	0	PAT_SYNC

The AFE5804 can output a variety of test patterns on the LVDS outputs. These test patterns replace the normal ADC data output. Setting EN_RAMP to '1' causes all the channels to output a repeating full-scale ramp pattern. The ramp increments from zero code to full-scale code in steps of 1LSB every clock cycle. After hitting the full-scale code, it returns back to zero code and ramps again.

The device can also be programmed to output a constant code by setting SINGLE_CUSTOM_PAT to '1', and programming the desired code in BITS_CUSTOM1<11:0>. In this mode, BITS_CUSTOM<11:0> take the place of the 12-bit ADC data at the output, and are controlled by LSB-first and MSB-first modes in the same way as normal ADC data are.

The device may also be made to toggle between two consecutive codes by programming DUAL_CUSTOM_PAT to '1'. The two codes are represented by the contents of BITS CUSTOM1<11:0> and BITS CUSTOM2<11:0>.

In addition to custom patterns, the device may also be made to output two preset patterns:

- Deskew patten: Set using PAT_DESKEW, this mode replaces the 12-bit ADC output D<11:0> with the 010101010101
- 2. Sync pattern: Set using PAT_SYNC, the normal ADC word is replaced by a fixed 111111000000 word.

Note that only one of the above patterns should be active at any given instant.



PROGRAMMABLE GAIN

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
													Х	Х	Х	Х	GAIN_CH4<3:0>
2A									Х	Х	Х	Х					GAIN_CH3<3:0>
ZA					Х	X	Х	Χ									GAIN_CH2<3:0>
	Х	Х	Х	Х													GAIN_CH1<3:0>
	Х	X	Х	Χ													GAIN_CH5<3:0>
2B					Х	X	Х	Χ									GAIN_CH6<3:0>
26									Х	Х	Χ	Х					GAIN_CH7<3:0>
													Х	Х	Х	Х	GAIN_CH8<3:0>

The AFE5804, through its registers, allows for a digital gain to be programmed for each channel. This programmable gain can be set to achieve the full-scale output code even with a lower analog input swing. The programmable gain not only fills the output code range of the ADC, but also enhances the SNR of the device by using quantization information from some extra internal bits. The programmable gain for each channel can be individually set using a set of four bits, indicated as GAIN_CHN<3:0> for Channel N. The gain setting is coded in binary from 0dB to 12dB, as shown in Table 17.

Table 17. Gain Setting for Channel 1

GAIN_CH1<3>	GAIN_CH1<2>	GAIN_CH1<1>	GAIN_CH1<0>	CHANNEL 1 GAIN SETTING
0	0	0	0	0dB
0	0	0	1	1dB
0	0	1	0	2dB
0	0	1	1	3dB
0	1	0	0	4dB
0	1	0	1	5dB
0	1	1	0	6dB
0	1	1	1	7dB
1	0	0	0	8dB
1	0	0	1	9dB
1	0	1	0	10dB
1	0	1	1	11dB
1	1	0	0	12dB
1	1	0	1	Do not use
1	1	1	0	Do not use
1	1	1	1	Do not use

www.ti.com

CLOCK, REFERENCE, AND DATA OUTPUT MODES

ADDRESS IN HEX	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0	NAME
	1								1							Х	DIFF_CLK
42	1								1					Х			EN_DCC
42	1								1				Х				EXT_REF_VCM
	1								1	Х	Х						PHASE_DDR<1:0>
	1						1							Χ			BTC_MODE
46	1						1						Х				MSB_FIRST
46	1						1					Х					EN_SDR
	1		1				1					1					FALL_SDR

INPUT CLOCK

The AFE5804 is configured by default to operate with a single-ended input clock; CLKP is driven by a CMOS clock and CLKM is tied to '0'. However, by programming DIFF_CLK to '1', the device can be made to work with a differential input clock on CLKP and CLKM. Operating with a low-jitter differential clock generally provides better SNR performance, especially at input frequencies greater than 30MHz.

In cases where the duty cycle of the input clock falls outside the 45% to 55% range, it is recommended to enable an internal duty cycle correction circuit. Enable this circuit by setting the EN_DCC bit to '1'.

EXTERNAL REFERENCE

The AFE5804 can be made to operate in external reference mode by pulling the INT/EXT pin to '0'. In this mode, the REFT and REFB pins should be driven with voltage levels of 2.5V and 0.5V, respectively, and must have enough drive strength to drive the switched capacitance loading of the reference voltages by each ADC. The advantage of using the external reference mode is that multiple AFE5804 units can be made to operate with the same external reference, thereby improving parameters such as gain matching across devices. However, in applications that do not have an available high drive, differential external reference, the AFE5804 can still be driven with a single external reference voltage on the CM pin. When EXT_REF_VCM is set as '1' (and the INT/EXT pin is set to '0'), the CM pin is configured as an input pin, and the voltages on REFT and REFB are generated as shown in Equation 1 and Equation 2.

VREFT =
$$1.5V + \frac{V_{CM}}{1.5V}$$
(1)
$$VREFB = 1.5V - \frac{V_{CM}}{1.5V}$$



BIT CLOCK PROGRAMMABILITY

The output interface of the AFE5804 is normally a DDR interface, with the LCLK rising edge and falling edge transitions in the middle of alternate data windows. Figure 94 shows this default phase.

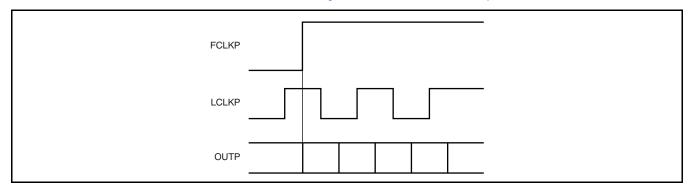


Figure 94. LCLK Default Phase

The phase of LCLK can be programmed relative to the output frame clock and data using bits PHASE_DDR<1:0>. Figure 95 shows the LCLK phase modes.

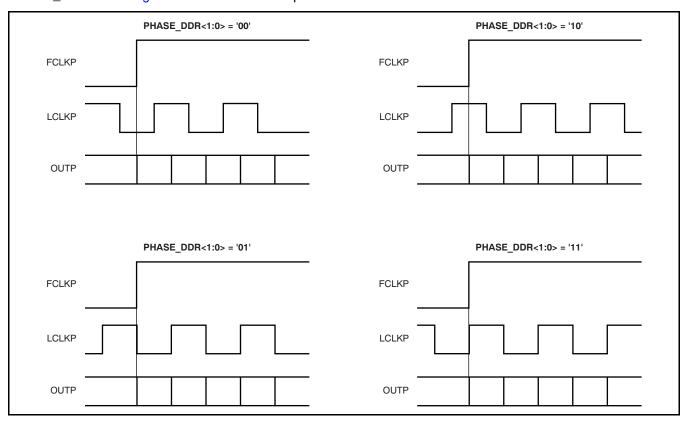


Figure 95. LCLK Phase Programmability Modes



In addition to programming the phase of LCLK in the DDR mode, the device can also be made to operate in SDR mode by setting the EN_SDR bit to '1'. In this mode, the bit clock (LCLK) is output at 12 times the input clock, or twice the rate as in DDR mode. Depending on the state of FALL_SDR, LCLK may be output in either of the two manners shown in Figure 96. As Figure 96 illustrates, only the LCLK rising (or falling) edge is used to capture the output data in SDR mode.

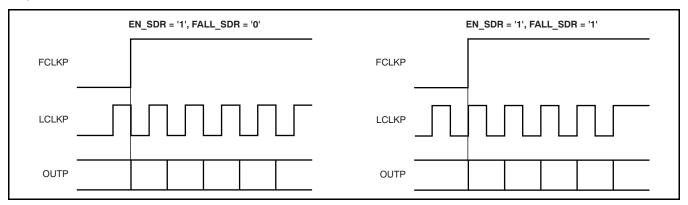


Figure 96. SDR Interface Modes

The SDR mode does not work well beyond 40MSPS because the LCLK frequency becomes very high.


DATA OUTPUT FORMAT MODES

The ADC output, by default, is in straight offset binary mode. Programming the BTC_MODE bit to '1' inverts the MSB, and the output becomes binary twos complement mode.

Also by default, the first bit of the frame (following the rising edge of FCLKP) is the LSB of the ADC output. Programming the MSB_FIRST mode inverts the bit order in the word, and the MSB is output as the first bit following the FCLKP rising edge.




RECOMMENDED POWER-UP SEQUENCING AND RESET TIMING

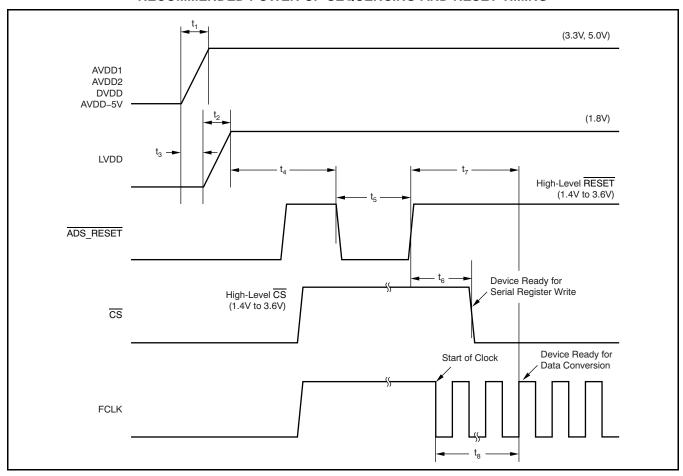

 $10\mu s < t_1 < 50ms$, $10\mu s < t_2 < 50ms$, $-10ms < t_3 < 10ms$, $t_4 > 10ms$, $t_5 > 100ns$, $t_6 > 100ns$, $t_7 > 10ms$, and $t_8 > 100\mu s$.

(1) The AVDDx and LVDD power-on sequence does not matter as long as $-10ms < t_3 < 10ms$. Similar considerations apply while shutting down the device.

POWER-DOWN TIMING

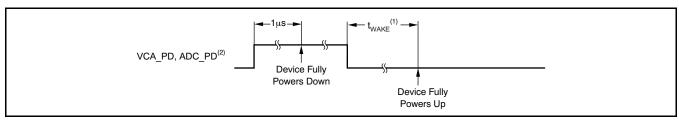

Power-up time shown is based on 1µF bypass capacitors on the reference pins. t_{WAKE} is the time it takes for the device to wake up completely from power-down mode. The AFE5804 has two power-down modes: complete power-down mode and partial power-down mode.

- (2) $t_{WAKE} \le 50 \mu s$ for complete power-down mode. $t_{WAKE} \le 2 \mu s$ for partial power-down mode (provided the clock is not shut off during power-down).
- (3) The ADS_PD pins can be configured for partial power-down mode through a register setting.



THEORY OF OPERATION

The AFE5804 is an eight-channel, fully integrated analog front-end device. Its integrated LNA, attenuator, PGA, LPF, and ADC implement a number of proprietary circuit design techniques to specifically address the performance demands of medical ultrasound systems. It offers unparalleled low-noise and low-power performance at a high level of integration. For the TGC signal path, each channel consists of a 20dB fixed-gain low-noise amplifier (LNA), a linear-in-dB voltage-controlled attenuator (VCA), and a programmable gain amplifier (PGA), as well as a clamping and low-pass filter stage. Digitally-controlled through the logic interface, the PGA gain can be set to four different settings: 20dB. 25dB, 27dB, and 30dB. At its highest setting, the total available gain of the AFE5804 is therefore 50dB. To facilitate the logarithmic time-gain compensation required for ultrasound systems, the VCA is designed to provide a 46dB attenuation range. Here, all channels are simultaneously controlled by an externally-applied control voltage (V_{CNTL}) in the range

of 0V to 1.2V. While the LNA is designed to be driven from a single-ended source, the internal TGC signal path is designed to be fully differential to maximize dynamic range while also optimizing for low, even-order harmonic distortion.

CW doppler signal processing is facilitated by routing the differential LNA outputs to V/I amplifier stages. The resulting signal currents of each channel then connect to an 8×10 switch matrix that is controlled through the serial interface and a corresponding register. The CW outputs are typically routed to a passive delay line that allows coherent summing (beam forming) of the active channels and additional off-chip signal processing, as shown in Figure 97.

Applications that do not utilize the CW path can simply operate the AFE5804 in TGC mode. In this mode, the CW blocks (V/I amplifiers and switch matrix) remain powered down, and the CW outputs can be left unconnected.

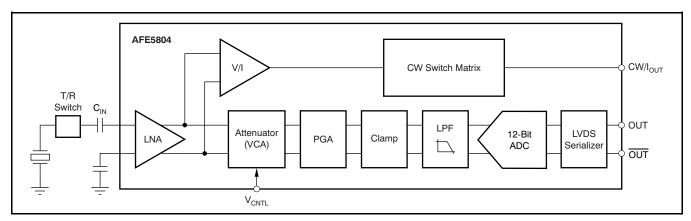


Figure 97. Functional Block Diagram



LOW-NOISE AMPLIFIER (LNA)

As with many high-gain systems, the front-end amplifier is critical to achieve a certain overall performance level. Using a proprietary new architecture, the LNA of the AFE5804 delivers exceptional low-noise performance, while operating on a very low quiescent current compared to CMOS-based architectures with similar noise performances.

The LNA performs a single-ended input to differential output voltage conversion and is configured for a of 20dB (10V/V). fixed gain The ultralow input-referred noise of only 0.75nV/√Hz, along with the linear input range of 280mV_{PP}, results in a wide dynamic range that supports the high demands of PW and CW ultrasound imaging modes. Larger input signals can be accepted by the LNA, but distortion performance degrades as input signals levels increase. The LNA input is internally biased to approximately 2.4V; the signal source should be ac-coupled to the LNA input by an adequately-sized capacitor. Internally, the LNA directly drives the VCA, avoiding the typical drawbacks of ac-coupled architectures, such as slow overload recovery.

VOLTAGE-CONTROLLED ATTENUATOR (VCA)

The VCA is designed to have a linear-in-dB attenuation characteristic; that is, the average gain loss in dB is constant for each equal increment of the control voltage (VCNTL). Figure 98 shows the simplified schematic of this VCA stage.

The attenuator is essentially a variable voltage divider that consists of the series input resistor (Rs) and eight identical shunt FETs placed in parallel and controlled by sequentially activated clipping amplifiers (A1 through A8). Each clipping amplifier can be understood as a specialized voltage comparator with a soft transfer characteristic and well-controlled output limit voltage. Reference voltages V1 through V8 are equally spaced over the 0V to 1.2V control voltage range. As the control voltage rises through the input range of each clipping amplifier, the amplifier output rises from 0V (FET completely ON) to $VCM - V_T$ (FET nearly OFF), where VCM is the common source voltage and V_T is the threshold voltage of the FET. As each FET approaches its off state and the control voltage continues to rise, the next clipping amplifier/FET combination takes over for the next portion of the piecewise-linear attenuation characteristic.

Thus, low control voltages have most of the FETs turned on, producing maximum signal attenuation. Similarly, high control voltages turn the FETs off, leading to minimal signal attenuation. Therefore, each FET acts to decrease the shunt resistance of the voltage divider formed by $R_{\rm S}$ and the parallel FET network.

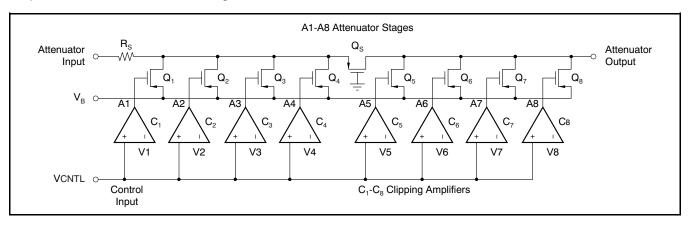


Figure 98. Voltage-Controlled Attenuator Simplified Schematic



PROGRAMMABLE POST-GAIN AMPLIFIER (PGA)

Following the VCA is a programmable post-gain amplifier (PGA). Figure 99 shows a simplified schematic of the PGA, including the clamping stage. The gain of this PGA can be configured to four different gain settings: 20dB, 25dB, 27dB, and 30dB, programmable through the serial port; see Table 11.

The PGA structure consists of a differential, programmable-gain voltage-to-current converter stage followed by transimpedance amplifiers to buffer each side of the differential output. Low input noise is also a requirement for the PGA design as a result of the large amount of signal attenuation that can be applied in the preceding VCA stage. At minimum VCA attenuation (used for small input signals), the LNA noise dominates; at maximum VCA attenuation (large input signals), the attenuator and PGA noise dominates.




Figure 99. Post-Gain Amplifier (Simplified Schematic)

CLAMPING

To further optimize the overload recovery behavior of a complete TGC channel, the AFE5804 integrates a clamping stage, as shown in Figure 100. This clamping stage precedes the low-pass filter in order to prevent the filter circuit from being driven into overload, the result of which would be an extended recovery time. The clamping level is fixed to clamp the signal level to approximately 2.3V_{PP} differential.

LOW-PASS FILTER

The AFE5804 integrates an anti-aliasing filter in the form of a programmable low-pass filter (LPF) for each channel. The LPF is designed as a differential, active, second-order filter that approximates a Bessel characteristic, with typically 12dB per octave roll-off. Figure 100 shows the simplified schematic of half the differential active low-pass filter. Programmable through the serial interface, the –3dB frequency corner can be set to either 12.5MHz or 17MHz. The filter bandwidth is set for all channels simultaneously.

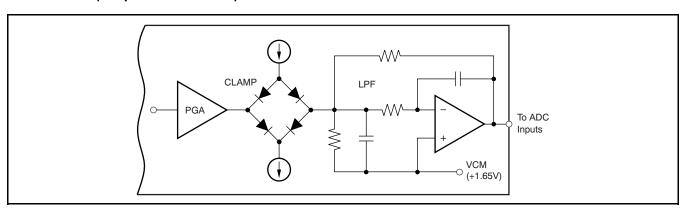


Figure 100. Clamping Stage and Low-Pass Filter (Simplified Schematic)



ANALOG-TO-DIGITAL CONVERSION

The analog-to-digital converter (ADC) of the AFE5804 employs a pipelined converter architecture that consists of a combination of multi-bit and single-bit internal stages. Each stage feeds its data into the digital error correction logic, ensuring excellent differential linearity and no missing codes at the 12-bit level.

The 12 bits given out by each channel are serialized and sent out on a single pair of pins in LVDS format. All eight channels of the AFE5804 operate from a common input clock (CLKP/M). The sampling clocks for each of the eight channels are generated from the input clock using a carefully matched clock buffer tree. The 12x clock required for the serializer is generated internally from CLKP/M using a phase-locked loop (PLL). A 6x and a 1x clock are also output in LVDS format, along with the data, to enable easy data capture. The AFE5804 operates from internally-generated reference voltages that are trimmed to improve the gain matching across devices, and provide the option to operate the

devices without having to externally drive and route reference lines. The nominal values of REFT and REFB are 2.5V and 0.5V, respectively. The references are internally scaled down differentially by a factor of 2. V_{CM} (the common-mode voltage of REFT and REFB) is also made available externally through a pin, and is nominally 1.5V.

The ADC output goes to a serializer that operates from a 12x clock generated by the PLL. The 12 data bits from each channel are serialized and sent LSB first. In addition to serializing the data, the serializer also generates a 1x clock and a 6x clock. These clocks are generated in the same way the serialized data are generated, so these clocks maintain perfect synchronization with the data. The data and clock outputs of the serializer are buffered externally using LVDS buffers. Using LVDS buffers to transmit data externally has multiple advantages, such as a reduced number of output pins (saving routing space on the board), reduced power consumption, and reduced effects of digital noise coupling to the analog circuit inside the AFE5804.



APPLICATION INFORMATION

ANALOG INPUT AND LNA

While the LNA is designed as a fully differential amplifier, it is optimized to perform a single-ended input to differential output conversion. A simplified schematic of an LNA channel is shown in Figure 101. A bias voltage (V_B) of +2.4V is internally applied to the LNA inputs through $8k\Omega$ resistors. In addition, the dedicated signal input (IN pin) includes a pair of back-to-back diodes that provide a coarse input clamping function in case the input signal rises to large levels. exceeding 0.6V_{PP}. configuration prevents the LNA from being driven into a severe overload state, which may otherwise cause an extended overload recovery time. The integrated diodes are designed to handle a dc current of up to approximately 5mA. Depending on the application requirements, the system overload characteristics may be improved by adding external Schottky diodes at the LNA input, as shown in Figure 101.

As Figure 101 also shows, the complementary LNA input (V_{BL} pin) is internally decoupled by a small capacitor. Furthermore, for each input channel, a separate V_{BL} pin is brought out for external bypassing. This bypassing should be done with a small, 0.1 μ F (typical) ceramic capacitor placed in close proximity to each V_{BL} pin. Attention should be given to provide a low-noise analog ground for this bypass capacitor. A noisy ground potential may cause noise to be picked up and injected into the signal path, leading to higher noise levels.

The LNA closed-loop architecture is internally compensated for maximum stability without the need for external compensation components (inductors or capacitors). At the same time, the total input capacitance is kept to a minimum with only 16pF. This architecture minimizes any loading of the signal otherwise source that may lead frequency-dependent voltage divider. Moreover, the closed-loop design yields very low offsets and offset drift; this consideration is important because the LNA directly drives the subsequent voltage-controlled attenuator.

The LNA of the AFE5804 uses the benefits of a bipolar process technology to achieve an exceptionally low noise voltage of 0.75 nV/NHz, and a low current noise of only 3 pA/NHz (in TGC mode 1). With these input-referred noise specifications, the AFE5804 achieves very low noise figure numbers over a wide range of source resistances and frequencies (see the graph, *Noise Figure vs Frequency Over R*_S in the Typical Characteristics). The optimal noise power matching is achieved for source impedances of around 200Ω . Further details of the AFE5804 input noise performance are shown in the Typical Characteristic graphs.

Table 18. Noise Figure versus Source Resistance (R_S) at 2MHz

R _S (Ω)	NOISE FIGURE (dB)
50	2.1
200	1.1
400	1.2
1000	1.9

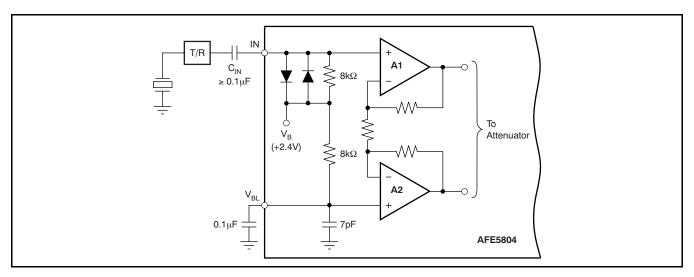


Figure 101. LNA Channel (Simplified Schematic)



OVERLOAD RECOVERY

The AFE5804 is designed in particular for ultrasound applications where the front-end device is required to recover very quickly from an overload condition. Such an overload can either be the result of a transmit pulse feedthrough or a strong echo, which can cause overload of the LNA, PGA, and ADC. As discussed earlier, the LNA inputs are internally protected by a pair of back-to-back diodes to prevent severe overload of the LNA. Figure 102 illustrates an ultrasound receive channel front-end that includes typical external overload protection elements. Here, four high-voltage switching diodes are configured in a bridge configuration and form the transmit/receive (T/R) switch. During the transmit period, high voltage pulses from the pulser are applied to the transducer elements and the T/R switch isolates the sensitive LNA input from being damaged by the high voltage signal. However, it is common that fast transients up to several volts leak through the T/R switch and potentially overload the receiver. Therefore, an additional pair of clamping diodes is placed between the T/R switch and the LNA input. In order to clamp the over-voltage to small levels, Schottky diodes (such as the BAS40 series by Infineon®) are commonly used. For example, clamping to levels of

±0.3V can significantly reduce the overall overload recovery performance. The T/R switch characteristics are largely determined by the biasing current of the diodes, which can be set by adjusting the $3k\Omega$ resistor values; for example, setting a higher current level may lead to an improved switching characteristic and reduced noise contribution. A typical front-end protection circuitry may add in the order of $2nV/\sqrt{Hz}$ of noise to the signal path. The increase in noise also depends on the value of the termination resistor (R_T).

As Figure 102 shows, the front-end circuitry should be capacitively coupled to the LNA signal input (IN). This coupling ensures that the LNA input bias voltage of +2.4V is maintained and decoupled from any other biasing voltage before the LNA.

Within the AFE5804, overload can occur in either the LNA or the PGA. LNA overload can occur as the result of T/R switch feedthrough; and the PGA can be driven into an overload condition by a strong echo in the near-field while the signal gain is high. In any case, the AFE5804 is optimized for very short recovery times, as shown in Figure 102.

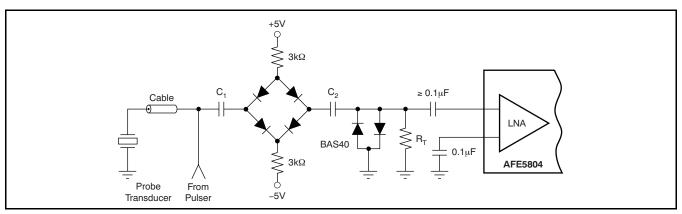


Figure 102. Typical Input Overload Protection Circuit of an Ultrasound System



VCA—GAIN CONTROL

The attenuator (VCA) for each of the eight channels of the AFE5804 is controlled by a single-ended control signal input, the V_{CNTL} pin. The control voltage range spans from 0V to 1.2V, referenced to ground. This control voltage varies the attenuation of the VCA based on its linear-in-dB characteristic with its maximum attenuation (minimum gain) at $V_{CNTL} = 0$ V, and minimum attenuation (maximum gain) at $V_{CNTL} = 1.2$ V. Table 19 shows the nominal gains for each of the four PGA gain settings. The total gain range is typically 46dB and remains constant independent of the PGA selected; the *Max Gain* column reflects the absolute gain of the full signal path comprised of the fixed LNA gain of 20dB and the programmable PGA gain.

Table 19. Nominal Gain Control Ranges for Each of the Four PGA Gain Settings

PGA GAIN	MIN GAIN AT V _{CNTL} = 0V	MAX GAIN AT V _{CNTL} = 1.2V				
20dB	-5.5dB	40.5dB				
25dB	-1.0dB	45.0dB				
27dB	1.0dB	47.0dB				
30dB	3.0dB	49.0dB				

As previously discussed, the VCA architecture uses eight attenuator segments that are equally spaced in order to approximate the linear-in-dB gain-control slope. This approximation results in a monotonic slope; gain ripple is typically less than ±0.5dB.

The AFE5804 gain-control input has a -3dB bandwidth of approximately 1.5MHz. This wide bandwidth, although useful in many applications, can allow high-frequency noise to modulate the gain control input. In practice, this modulation can easily be avoided by additional external filtering (R_F and C_F) of the control input, as Figure 103 shows. Stepping the control voltage from 0V to 1.2V, the gain control response time is typically less than 500ns to settle within 10% of the final signal level of a $1V_{PP}$ (-6dBFS) output.

The control voltage input (VCNTL pin) represents a high-impedance input. Multiple AFE5804 devices can be connected in parallel with no significant loading effects using the VCNTL pin of each device. Note that when the V_{CNTL} pin is left unconnected, it floats up to a potential of about +3.7V. For any voltage level above 1.2V and up to 5.0V, the VCA continues to operate at its minimum attenuation level; however, it is recommended to limit the voltage to approximately 1.5V or less.

When the AFE5804 operates in CW mode, the attenuator stage remains connected to the LNA outputs. Therefore, it is recommended to set the V_{CNTL} voltage to +1.2V in order to minimize the internal loading of the LNA outputs. Small improvements in reduced power dissipation and improved distortion performance may also be realized.




Figure 103. External Filtering of the V_{CNTL} Input

CW DOPPLER PROCESSING

The AFE5804 integrates many of the elements necessary to allow for the implementation of a CW doppler processing circuit, such as a V/I converter for each channel and a cross-point switch matrix with an 8-input into 10-output (8×10) configuration.

In order to switch the AFE5804 from the default TGC mode operation into CW mode, bit D5 of the control register must be updated to low ('0'). This setting also enables access to all other registers that determine the switch matrix configuration (see the Input Register Bit Map tables). In order to process CW signals, the LNA internally feeds into a differential V/I amplifier stage. The transconductance of the V/I amplifier is typically 13.5mA/V with a 100mV_{PP} input signal. For proper operation, the CW outputs must be connected to an external bias voltage of +2.5V. Each CW output is designed to sink a small dc current of 0.9mA, and can deliver a signal current up to 2.9mA_{PP}.



The resulting signal current then passes through the 8×10 switch matrix. Depending on the programmed configuration of the switch matrix, any V/I amplifier current output can be connected to any of 10 CW outputs. This design is a simple current-summing circuit such that each CW output can represent the sum of any or all of the channel currents. The CW outputs are typically routed to a passive LC delay line, allowing coherent summing of the signals.

After summing, the CW signal path further consists of a high dynamic range mixer for down-conversion to I/Q base-band signals. The I/Q signals are then band-limited (that is, low-frequency contents are removed) in a filter stage that precedes a pair of high-resolution, low sample rate ADCs.

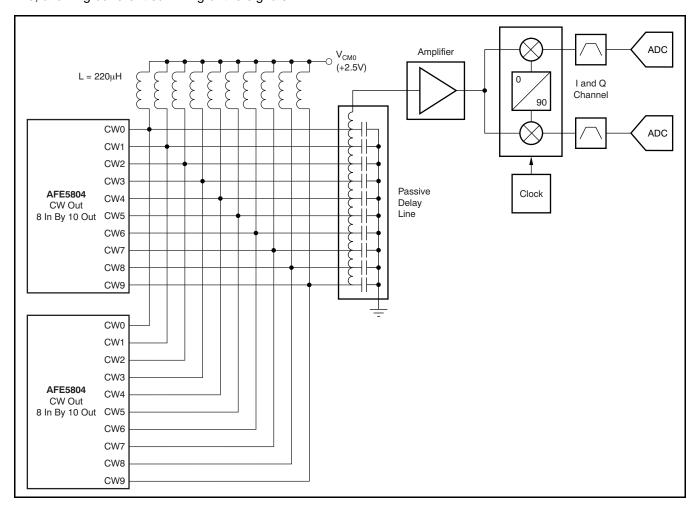


Figure 104. Conceptual CW Doppler Signal Path Using Current Summing and a Passive Delay Line for Beam-Forming



CLOCK INPUT

The eight channels on the device operate from a single clock input. To ensure that the aperture delay and jitter are the same for all channels, the AFE5804 uses a clock tree network to generate individual sampling clocks to each channel. The clock paths for all the channels are matched from the source point to the sampling circuit. This architecture ensures that the performance and timing for all channels are identical. The use of the clock tree for matching introduces an aperture delay that is defined as the delay between the rising edge of FCLK and the actual instant of sampling. The aperture delays for all the channels are matched to the best possible extent. A mismatch of ±20ps (±3σ) could exist between the aperture instants of the eight ADCs within the same chip. However, the aperture delays of ADCs across two different chips can be several hundred picoseconds apart.

The AFE5804 can operate either in CMOS single-ended clock mode (default is DIFF_CLK = 0) or differential clock mode (SINE, LVPECL, or LVDS). In the single-ended clock mode, CLKM must be forced to $0V_{DC}$, and the single-ended CMOS applied on the CLKP pin. Figure 105 shows this operation.




Figure 105. Single-Ended Clock Driving Circuit (DIFF CLK = 0)

When configured for the differential clock mode (register bit DIFF_CLK = 1) the AFE5804 clock inputs can be driven differentially (SINE, LVPECL, or LVDS) with little or no difference in performance between them, or with a single-ended (LVCMOS). The common-mode voltage of the clock inputs is set to V_{CM} using internal $5k\Omega$ resistors, as shown in allows 106. This method Figure transformer-coupled drive circuits for a sine wave clock or ac-coupling for LVPECL and LVDS clock sources, as shown in Figure 107 and Figure 108. When operating in the differential clock mode, the single-ended CMOS clock can be ac-coupled to the CLKP input, with CLKM connected to ground with a 0.1µF capacitor, as Figure 108 shows.




Figure 106. Internal Clock Buffer




Figure 107. Differential Clock Driving Circuit (DIFF_CLK = 1)




Figure 108. Single-Ended Clock Driving Circuit
When DIFF CLK = 1

For best performance, the clock inputs must be driven differentially, reducing susceptibility to common-mode noise. For high input frequency sampling, it is recommended to use a clock source with very low jitter. Bandpass filtering of the clock source can help reduce the effect of jitter. If the duty cycle deviates from 50% by more than 2% or 3%, it is recommended to enable the DCC through register bit EN DCC.



REFERENCE CIRCUIT

The digital beam-forming algorithm in an ultrasound system relies on gain matching across all receiver channels. A typical system has approximately 12 octal AFEs on the board. In such a case, it is critical to ensure that the gain is matched, essentially requiring the reference voltages seen by all the AFEs to be the same. Matching references within the eight channels of a chip is done by using a single internal reference voltage buffer. Trimming the reference voltages on each chip during production ensures that the reference voltages are well-matched across different chips.

All bias currents required for the internal operation of the device are set using an external resistor to ground at the ISET pin. Using a $56k\Omega$ resistor on ISET generates an internal reference current of $20\mu A$. This current is mirrored internally to generate the bias current for the internal blocks. Using a larger external resistor at ISET reduces the reference bias current and thereby scales down the device operating power. However, it is recommended that the external resistor be within 10% of the specified value of $56k\Omega$ so that the internal bias margins for the various blocks are proper.

Buffering the internal bandgap voltage also generates the common-mode voltage V_{CM} , which is set to the midlevel of REFT and REFB. It is meant as a reference voltage to derive the input common-mode if the input is directly coupled. It can also be used to derive the reference common-mode voltage in the external reference mode. Figure 109 shows the suggested decoupling for the reference pins.

The device also supports the use of external reference voltages. There are two methods to force the references externally. The first method involves pulling INT/ $\overline{\text{EXT}}$ low and forcing externally REFT and REFB to 2.5V and 0.5V nominally, respectively. In this mode, the internal reference buffer goes to a 3-state output. The external reference driving circuit should be designed to provide the required switching current for the eight ADCs inside the AFE5804. It should be noted that in this mode, CM and ISET continue to be generated from the internal bandgap voltage, as in the internal reference mode. It is therefore important to ensure that the common-mode voltage of the externally-forced reference voltages matches to within 50mV of V_{CM} .

The second method of forcing the reference voltages externally can be accessed by pulling INT/EXT low, and programming the serial interface to drive the external reference mode through the CM pin (register bit called EXT_REF_VCM). In this mode, CM becomes configured as an input pin that can be driven from external circuitry. The internal reference buffers driving REFT and REFB are active in this mode. Forcing 1.5V on the CM pin in the mode results in REFT and REFB coming to 2.5V and 0.5V, respectively. In general, the voltages on REFT and REFB in this mode are given by Equation 3 and Equation 4:

$$VREFT = 1.5V + \frac{V_{CM}}{1.5V}$$

$$V_{CM}$$
(3)

$$VREFB = 1.5V - \frac{V_{CM}}{1.5V}$$
 (4)

The state of the reference voltage internal buffers during various combinations of the PD, INT/EXT, and EXT_REF_VCM register bits is described in Table 20.

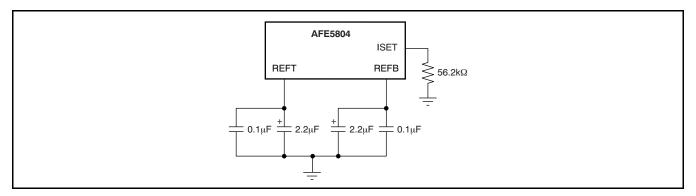


Figure 109. Suggested Decoupling on the Reference Pins



Table 20. State of Reference Voltages for Various Combinations of PD and INT/EXT

REGISTER BIT	INTERNAL BUFFER STATE									
PD	0 0 1 0 1 0 0 0 0		1	1 0		0	1	1		
INT/EXT			1	0	1	0	1			
EXT_REF_VCM			0	0	1	1	1	1		
REFT buffer	3-state	2.5V	3-state	2.5V ⁽¹⁾	1.5V + V _{CM} /1.5V	Do not use	2.5V ⁽¹⁾	Do not use		
REFB buffer	REFB buffer 3-state 0.5V 3-state 0.5V ⁽¹⁾ CM pin 1.5V 1.5V 1.5V 1.5V		1.5V - V _{CM} /1.5V	Do not use	0.5V ⁽¹⁾	Do not use				
CM pin			1.5V	Force	Do not use	Force	Do not use			

⁽¹⁾ Weakly forced with reduced strength.

POWER SUPPLIES

The AFE5804 operates on three supply rails: a digital 1.8V supply, and the 3.3V and 5V analog supplies. At initial power-up, the part is operational in TGC mode, with the registers in the respective default configurations (see Table 3).

In TGC mode, only the VCA (attenuator) draws a low current (typically 7mA) from the 5V supply. Switching into the CW mode, the internal V/I-amplifiers are then powered from the 5V rail as well, raising the operating current on the 5V rail. At the same time, the post-gain amplifiers (PGA) are being powered down, thereby reducing the current consumption on the 3.3V rail (refer to the Electrical Characteristics table for details on TGC mode and CW mode current consumption).

All analog supply rails for the AFE5804 should be low noise, including the 3.3V digital supply DVDD that connects to the internal logic blocks of the VCA within the AFE5804. It is recommended to tie the DVDD pins to the same 3.3V analog supply as the AVDD1/2 pins, rather than a different 3.3V rail that may also provide power to other logic device in the system. Transients and noise generated by those devices can couple into the AFE5804 and degrade overall device performance.

CLOCK JITTER, POWER NOISE, SNR, AND LVDS TIMING

As explained in Application Note SLYT075, ADC clock jitter can degrade ADC performance. Therefore, it is always preferred to use a low jitter clock to drive the AFE5804. To ensure the performance of the AFE5804, a clock with a jitter of 1ps RMS or better is expected. However, it might not always be possible to achieve this for practical reasons. With a higher clock jitter, the SNR of the AFE5804 may be degraded as well as the LVDS timing stability. In addition, clean and stable power supplies are always preferred to maximize the AFE5804 SNR and ensure LVDS timing stability.

Poor RMS jitter (greater than 100ps), combined with inadequate power-supply design (for example, supply voltage drops and ripple increases), can affect LVDS timing. As a result, occasional glitches might be observed on the AFE5804 outputs. If this phenomenon is observed, or if the clock jitter and LVDD noise are concerns in the system, the registers in Table 21 can be written as part of the initialization sequence in order to stabilize LVDS clock timing and SNR performance.

Table 21. Address and Data in Hexadecimal

ADDRESS	DATA
01	0010h
D1	0140h
DA	0001h
E1	0020h
02	0080h
01	0000h

Writing to these registers has the following additional effects:

- Total chip power increases approximately 8mW—this amount includes a current increase of about 1.9mA on AVDD1 and about 1.1mA on LVDD.
- b. With reference to the LVDS Timing Diagram and Definition of Setup and Hold Times, LCLKP/LCLKM shift by about 100ps to the left relative to CLK and OUTP/OUTM. This shift causes the data setup time to reduce by 100ps and the data hold time to increase by 100ps.
- c. The clock propagation delay (t_{PROP}) is reduced by roughly 2ns. The typical and minimum values for this specification are reduced by 2ns, and the maximum value for this spec is reduced by 1.5ns.

Power-supply noise can usually be minimized if grounding, bypassing, and PCB layout are well managed. Some guidelines can be found in the *Grounding and Bypassing* and *Board Layout* sections.



GROUNDING AND BYPASSING

The AFE5804 distinguishes between three different grounds: AVSS1 and AVSS2 (analog grounds), and LVSS (digital ground). In most cases, it should be adequate to lay out the printed circuit board (PCB) to use a single ground plane for the AFE5804. Care should be taken that this ground plane is properly partitioned between various sections within the system to minimize interactions between analog and digital circuitry. Alternatively, the digital (LVDS) supply set consisting of the LVDD and LVSS pins can be placed on separate power and ground planes. For this configuration, the AVSS and LVSS grounds should be tied together at the power connector in a star layout.

All bypassing and power supplies for the AFE5804 should be referenced to this analog ground plane. All supply pins should be bypassed with $0.1\mu F$ ceramic chip capacitors (size 0603 or smaller). In order to minimize the lead and trace inductance, the capacitors should be located as close to the supply pins as possible. Where double-sided component mounting is allowed, these capacitors are best placed directly under the package. In addition, larger bipolar decoupling capacitors (2.2 μF to 10 μF , effective at lower frequencies) may also be used on the main supply pins. These components can be placed on the PCB in proximity (less than 0.5in or 12,7mm) to the AFE5804 itself.

The AFE5804 internally generates a number of reference voltages, such as the bias voltages (VB1 through VB6). Note that in order to achieve optimal low-noise performance, the VB1 pin must be bypassed with a capacitor value of at least $1\mu F$; the recommended value for this bypass capacitor is $2.2\mu F$. All other designed reference pins can be bypassed with smaller capacitor values, typically $0.1\mu F$. For best results choose low-inductance ceramic chip capacitors (size 402) and place them as close as possible to the device pins as possible.

High-speed mixed signal devices are sensitive to various types of noise coupling. One primary source of noise is the switching noise from the serializer and the output buffer/drivers. For the AFE5804, care has been taken to ensure that the interaction between the analog and digital supplies within the device is kept to a minimal amount. The extent of noise coupled and transmitted from the digital and analog sections depends on the effective inductances of each of the supply and ground connections. Smaller effective inductance of the supply and ground pins leads to improved noise suppression. For this reason, multiple pins are used to connect each supply and ground sets. It is important to maintain low inductance properties throughout the design of the PCB layout by use of proper planes and layer thickness.

BOARD LAYOUT

Proper grounding and bypassing, short lead length, and the use of ground and power-supply planes are particularly important for high-frequency designs. Achieving optimum performance with a high-performance device such as the AFE5804 requires careful attention to the PCB layout to minimize the effects of board parasitics and optimize component placement. A multilayer PCB usually ensures best results and allows convenient component placement.

In order to maintain proper LVDS timing, all LVDS traces should follow a controlled impedance design (for example, 100Ω differential). In addition, all LVDS trace lengths should be equal and symmetrical; it is recommended to keep trace length variations less than 150mil (0.150in or 3,81mm).

Additional details on PCB layout techniques can be found in the Texas Instruments Application Report *MicroStar BGA Packaging Reference Guide* (SSYZ015B), which can be downloaded from the TI web site (www.ti.com).



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Cł	nanges from Revision B (November 2008) to Revision C	Page
	Changed CW—Signal Channels, Output transconductance parameter symbol in Electrical Characteristics table	4
•	Changed t _{PROP} test conditions in 40MSPS/50MSPS LVDS Output Timing Characteristics table	
•	Changed t _{PROP} test conditions in 30MSPS/20MSPS/10MSPS LVDS Output Timing Characteristics table	13
•	Updated Figure 82	27
•	Added list item 3 and Table 2 to Register Initialization section	30
•	Updated Figure 92	30
•	Updated footnote 2 of Table 3	32
•	Added last bullet item in list after Table 4	34
•	Changed ADC_RESET to ADS_RESET in second bullet of VCA Reset section	34
•	Added Table 21 and updated Clock Jitter, Power Noise, SNR, and LVDS Timing section description	57
•	Changed VCM to V _{CM} in <i>Internal Reference Voltages (ADC)</i> section of Electrical Characteristics table	
_	nanges from Revision A (September 2008) to Revision B	Page
	Corrected VCM pin name in functional block diagram	
	Changed AVDD2 to AVDD1 in description column of L9 row of Table 1	
	Changed AVDD2 to AVDD1 in Figure 92	
	Corrected VCM pin name in Summary of Features table	
	Changed VCM to CM in External Reference section	
	Changed VCM to V _{CM} in the Analog-to-Digital Conversion section	
	Changed 30pF to 16pF in third paragraph of Analog Input and LNA section	
	Changed VCM to V _{CM} in third paragraph of Clock Input section	
	Updated VCM to the proper pin name in Figure 106	
	Corrected VCM pin name in the Reference Circuit section	
	Corrected VCMpin name in Table 20	
	Added Clock Jitter, Power Noise, SNR, and LVDS Timing section	

www.ti.com 11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
	, ,				. ,	(4)	(5)		. ,
AFE5804ZCF	Active	Production	NFBGA (ZCF) 135	160 JEDEC TRAY (10+1)	Yes	SNAGCU	Level-3-260C-168 HR	0 to 70	AFE5804
AFE5804ZCF.A	Active	Production	NFBGA (ZCF) 135	160 JEDEC TRAY (10+1)	Yes	SNAGCU	Level-3-260C-168 HR	0 to 70	AFE5804
AFE5804ZCF.B	Active	Production	NFBGA (ZCF) 135	160 JEDEC TRAY (10+1)	-	Call TI	Call TI	0 to 70	

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



www.ti.com 18-Jul-2025

TRAY




Chamfer on Tray corner indicates Pin 1 orientation of packed units.

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	Unit array matrix	Max temperature (°C)	L (mm)	W (mm)	Κ0 (μm)	P1 (mm)	CL (mm)	CW (mm)
AFE5804ZCF	ZCF	NFBGA	135	160	10 x 16	150	315	135.9	7620	19.2	13.5	10.35
AFE5804ZCF.A	ZCF	NFBGA	135	160	10 x 16	150	315	135.9	7620	19.2	13.5	10.35

ZCF (R-PBGA-N135)

PLASTIC BALL GRID ARRAY

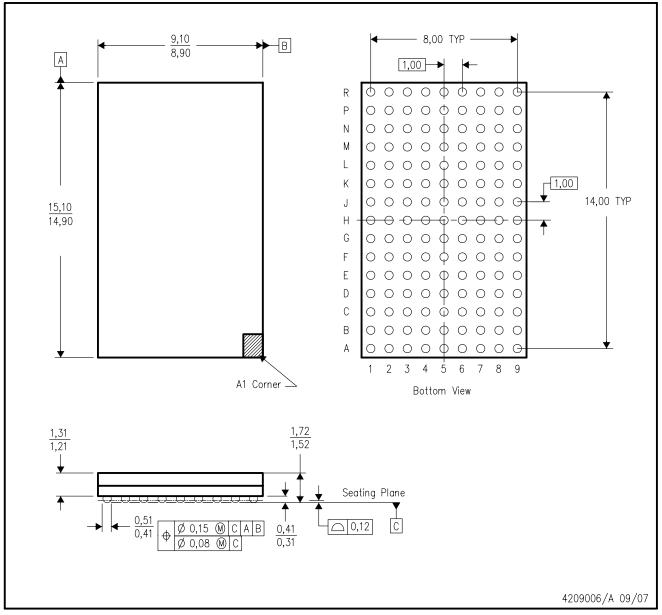

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. This is a lead—free solder ball design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025