

# BQ25190 I<sup>2</sup>C Controlled 1-Cell, 1A, Linear Battery Charger with Integrated Buck-Boost, DVS Buck, LDOs, ADC, and Power Path

## 1 Features

- Integrated 1A power path linear battery charger
  - 3.0V to 18.0V input voltage operating range
  - Input voltage up to 25V tolerant
  - Configurable battery regulation voltage with  $\pm 0.5\%$  accuracy from 3.5V to 4.65V in 10mV steps
  - 5mA to 1A configurable fast charge current
  - 55m $\Omega$  BATFET on-resistance
  - Up to 2.5A discharge current to support high system loads
  - Fully programmable JEITA profile for safe charging over temperature
- Power path management for powering the system and charging the battery
  - Regulated system voltage ranging from 4.4V to 4.9V in addition to battery voltage tracking and input pass-through options
  - Configurable input current limit
  - Dynamic power path management optimizes charging from weak adapters
  - Selectable adapter or battery for system power
  - Advanced system reset mechanisms
- Ultra-low quiescent current modes
  - 2 $\mu$ A battery quiescent current in battery mode
  - 15nA battery quiescent current in ship mode
- Integrated Buck converter with I<sup>2</sup>C and GPIO programmable DVS output
  - 0.36 $\mu$ A quiescent current from system
  - 0.4V to 1.575V output voltage in 12.5mV steps or 0.4V to 3.6V output voltage in 25mV/50mV steps
  - Up to 600mA output current
- Integrated Buck-boost converter with I<sup>2</sup>C programmable DVS output
  - 0.1 $\mu$ A quiescent current from system
  - 1.7V to 5.2V output voltage in 50mV steps
  - Up to 600mA output current for  $V_{SYS} \geq 3.0V$ ,  $V_{BOUT} = 3.3V$
- Integrated I<sup>2</sup>C programmable LDOs (LDO1 and LDO2)
  - 25nA quiescent current
  - 0.8V to 3.6V output voltage in 50mV steps
  - Up to 200mA output current
  - LDO1 capable of remaining on in Ship mode
  - Configurable LDO or Bypass mode
  - Dedicated input pins
- Integrated fault protection for safety
  - Input current limit and overvoltage protection

- Battery, integrated rail overcurrent protection
- Battery depletion protection
- Thermal regulation and thermal shutdown
- Integrated 12-bit ADC to monitor input current, BATFET current, input voltage, battery voltage, battery temperature or external voltage signals

## 2 Applications

- Smart watches and other wearable devices
- Portable medical equipment
- Smart trackers
- Retail automation and payment


## 3 Description

The BQ25190 is a highly integrated battery management unit that integrates the most commonly used functions for wearable devices: a linear charger with power path, one step-down switching converter (Buck), one buck-boost switching converter (Buck-boost), two LDOs (LDO1 and LDO2), manual reset with timer (MR), multi-channel analog-to-digital converter (ADC), as well as four multifunctional general-purpose input/outputs (GPIO).

### Device Information

| PART NUMBER | PACKAGE <sup>(1)</sup> | BODY SIZE (NOM) |
|-------------|------------------------|-----------------|
| BQ25190     | YBG (WCSP 30)          | 2.25mm x 2.75mm |

(1) For all available packages, see [Section 13](#).

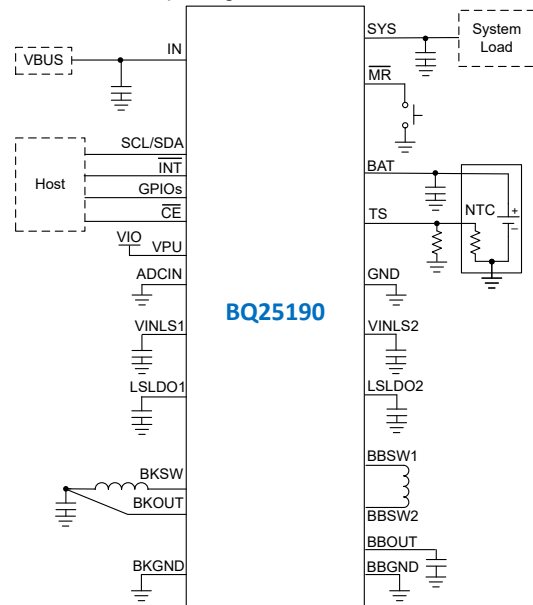

**Simplified Schematic**



## Table of Contents

|  |           |  |           |
|--|-----------|--|-----------|
| <b>1 Features</b> .....                        | <b>1</b>  | 7.6 Register Maps.....                                 | 45        |
| <b>2 Applications</b> .....                    | <b>1</b>  | <b>8 Application and Implementation</b> .....          | <b>83</b> |
| <b>3 Description</b> .....                     | <b>1</b>  | 8.1 Application Information.....                       | 83        |
| <b>4 Description (continued)</b> .....         | <b>3</b>  | 8.2 Typical Application.....                           | 83        |
| <b>5 Pin Configuration and Functions</b> ..... | <b>4</b>  | <b>9 Power Supply Recommendations</b> .....            | <b>91</b> |
| <b>6 Specifications</b> .....                  | <b>6</b>  | <b>10 Layout</b> .....                                 | <b>92</b> |
| 6.1 Absolute Maximum Ratings.....              | 6         | 10.1 Layout Guidelines.....                            | 92        |
| 6.2 ESD Ratings.....                           | 6         | 10.2 Layout Example.....                               | 93        |
| 6.3 Thermal Information.....                   | 6         | <b>11 Device and Documentation Support</b> .....       | <b>94</b> |
| 6.4 Recommended Operating Conditions.....      | 6         | 11.1 Third-Party Products Disclaimer.....              | 94        |
| 6.5 Electrical Characteristics.....            | 7         | 11.2 Receiving Notification of Documentation Updates.. | 94        |
| 6.6 Timing Requirements.....                   | 15        | 11.3 Support Resources.....                            | 94        |
| 6.7 Typical Characteristics.....               | 16        | 11.4 Trademarks.....                                   | 94        |
| <b>7 Detailed Description</b> .....            | <b>19</b> | 11.5 Electrostatic Discharge Caution.....              | 94        |
| 7.1 Overview.....                              | 19        | 11.6 Glossary.....                                     | 94        |
| 7.2 Functional Block Diagram.....              | 23        | <b>12 Revision History</b> .....                       | <b>94</b> |
| 7.3 Feature Description.....                   | 24        | <b>13 Mechanical, Packaging, and Orderable</b>         |           |
| 7.4 Device Functional Modes.....               | 40        | <b>Information</b> .....                               | <b>95</b> |
| 7.5 Programming.....                           | 42        |  |           |

## 4 Description (continued)

The integrated charger supports charge current from 5mA to 1A that enables quick and accurate charging while providing a regulated voltage to the system. The regulated system voltage ( $V_{SYS}$ ) can be configured through I<sup>2</sup>C based on the recommended operating conditions of the downstream system loads. Other operation parameters such as the input current limit, charge current, Buck converters' output voltages, Buck-boost converters' output voltage, and LDOs' output voltages are also programmable through the I<sup>2</sup>C interface.

The BQ25190 features low quiescent current during operation and shutdown, which enables longer battery life.

## 5 Pin Configuration and Functions

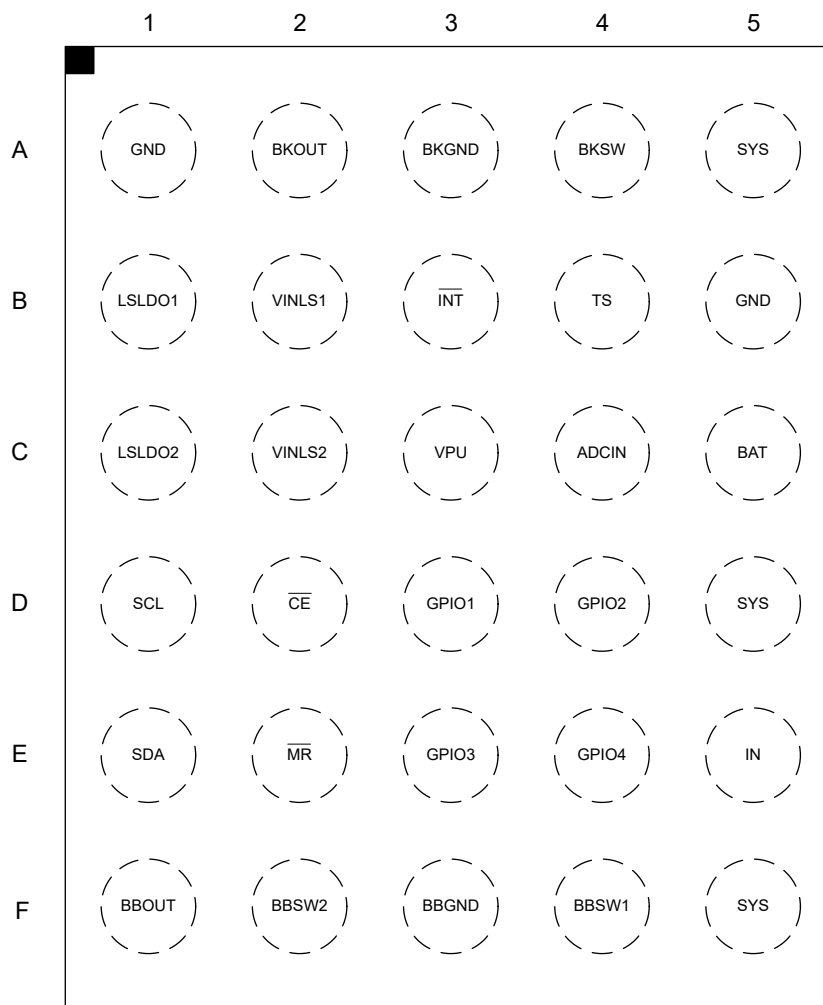


Figure 5-1. BQ25190 YBG Package 30-Pin WCSP (Top View)

Table 5-1. Pin Functions

| PIN  |            | I/O <sup>(1)</sup> | DESCRIPTION   |
|------|------------|--------------------|---|
| NAME | NO.        |                    |   |
| IN   | E5         | P                  | DC input power supply. IN is connected to the external DC supply. Bypass IN to GND with at least 1 $\mu$ F of capacitance using a ceramic capacitor.  |
| SYS  | A5, D5, F5 | P                  | Regulated system output. Connect ceramic capacitors respectively as suggested in <a href="#">Section 8.2.2.2</a> as close to the SYS and GND pins as possible.  |
| BAT  | C5         | P                  | Battery Connection. Connect to the positive terminal of the battery. Bypass BAT to GND with at least 1 $\mu$ F of ceramic capacitance   |
| GND  | A1, B5     | G                  | Ground connection. Connect to the ground plane of the circuit   |
| CE   | D2         | I                  | Charge enable. Drive $\overline{\text{CE}}$ low or leave floating to enable charging when VIN is valid. Drive $\overline{\text{CE}}$ high to disable charge. $\overline{\text{CE}}$ has no effect when VIN is not present.  |
| SCL  | D1         | I                  | I <sup>2</sup> C interface clock. Connect SCL to the logic rail through a 10 k $\Omega$ resistor.   |
| SDA  | E1         | I/O                | I <sup>2</sup> C interface data. Connect SDA to the logic rail through a 10 k $\Omega$ resistor.  |
| INT  | B3         | O                  | $\overline{\text{INT}}$ is an open-drain output that signals fault interrupts. When a fault occurs, a 128 $\mu$ s active low pulse is sent out as an interrupt for the host. $\overline{\text{INT}}$ is enabled/disabled using the MASK_INT bit in the control register. Can be pulled up to 1- 20 k $\Omega$ resistor. Typical pull up voltage = 1.8V. |

**Table 5-1. Pin Functions (continued)**

| PIN    |     | I/O <sup>(1)</sup> | DESCRIPTION  |
|--------|-----|--------------------|--|
| NAME   | NO. |                    |  |
| VPU    | C3  | I                  | GPIO push-pull mode Pull-up Voltage Pin. Connect VPU to the voltage to be used for the GPIO pins' push-pull mode functions. The pin can be left floating if GPIO pins' push-pull mode functions are not used.  |
| GPIO1  | D3  | I/O                | General-purpose input/output pin 1   |
| GPIO2  | D4  | I/O                | General-purpose input/output pin 2   |
| GPIO3  | E3  | I/O                | General-purpose input/output pin 3   |
| GPIO4  | E4  | I/O                | General-purpose input/output pin 4   |
| BKOUT  | A2  | I                  | Output voltage sense pin for the internal feedback divider network of Buck. It also connects the output discharge circuit. Connect this pin to the Buck output capacitor with a short trace.   |
| BBOUT  | F1  | P                  | Output voltage sense pin for the internal feedback divider network of Buck-boost. It also connects the output discharge circuit. Connect this pin to the Buck-boost output capacitor with a short trace.   |
| BKSW   | A4  | P                  | Buck switch node. Connect the power inductor to this pin.  |
| BBSW1  | F4  | P                  | Buck-boost switch node. Connect the power inductor to this pin.  |
| BBSW2  | F2  | P                  | Buck-boost switch node. Connect the power inductor to this pin.  |
| BKGND  | A3  | G                  | Power ground of Buck. Connect this pin to the ground plane.  |
| BBGND  | F3  | G                  | Power ground of Buck-boost. Connect this pin to the ground plane.  |
| MR     | E2  | I                  | Manual reset input. $\overline{MR}$ is a push-button input that must be held low for greater than $t_{RESET}$ to assert the reset output. If $\overline{MR}$ is pressed for a shorter period, there are two programmable timer events, $t_{WAKE1}$ and $t_{WAKE2}$ , that trigger an interrupt to the host. The $\overline{MR}$ input can also be used to bring the device out of Ship mode. |
| TS     | B4  | I                  | Battery pack NTC monitor. Connect TS to a 10-k $\Omega$ NTC thermistor in parallel to a 10-k $\Omega$ resistor. If TS function is not to be used, connect a 5-k $\Omega$ resistor from TS to ground.   |
| LSLDO1 | B1  | P                  | Output pin of LDO1. Connect the output capacitor from this pin to the ground plain.  |
| LSLDO2 | C1  | P                  | Output pin of LDO2. Connect the output capacitor from this pin to the ground plain.  |
| ADCIN  | C4  | I                  | Input channel to the ADC.  |
| VINLS1 | B2  | P                  | Input pin of LDO1. Connect the input capacitor from this pin to the ground plain.  |
| VINLS2 | C2  | P                  | Input pin of LDO2. Connect the input capacitor from this pin to the ground plain.  |

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power.

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|   |                            | MIN  | MAX                                      | UNIT |
|---|----------------------------|------|--|------|
| Input Voltage   | IN                         | -0.3 | 25                                       | V    |
| Buck/Buck-boost Switch Node Voltage (converter not switching) | BKSW, BBSW1, BBSW2         | -0.3 | $V_{SYS} + 0.3$ or 5.5 <sup>(2)</sup>    | V    |
| Buck/Buck-boost Output Voltage                                | BKOUT                      | -0.3 | 5  | V    |
|   | BBOUT                      | -0.3 | 5.9                                      | V    |
| LDO1/LDO2 Input Voltages                                      | VINLS1, VINLS2             | -0.3 | 6.5                                      | V    |
| LDO1 Output Voltage   | LSLDO1                     | -0.3 | $V_{VINLS1} + 0.3$ or 5.5 <sup>(2)</sup> | V    |
| LDO2 Output Voltage   | LSLDO2                     | -0.3 | $V_{VINLS2} + 0.3$ or 5.5 <sup>(2)</sup> | V    |
| Output Sink Current   | GPIO1, GPIO2, GPIO3, GPIO4 |      | 20                                       | mA   |
|   | /INT                       |      | 6  | mA   |
| Voltage   | All other pins             | -0.3 | 5.5                                      | V    |
| $T_J$   | Junction temperature       | -40  | 150                                      | °C   |
| $T_{stg}$   | Storage temperature        | -55  | 150                                      | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- (2) Whichever is smaller

### 6.2 ESD Ratings

|             |                         |  | VALUE | UNIT |
|-------------|-------------------------|--|-------|------|
| $V_{(ESD)}$ | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001 <sup>(1)</sup>     | ±1000 | V    |
|             |                         | Charged device model (CDM), per ANSI/ESDA/ JEDEC JS-002 <sup>(2)</sup> | ±500  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Thermal Information

| THERMAL METRIC       |  | BQ25190     | UNIT |
|----------------------|--|-------------|------|
|                      |  | YBG (DSBGA) |      |
|                      |  | 30 PIN      |      |
| $R_{\theta JA}$      | Junction-to-ambient thermal resistance (JEDEC <sup>(1)</sup> ) | 59.4        | °C/W |
| $R_{\theta JC(top)}$ | Junction-to-case (top) thermal resistance                      | 0.3         | °C/W |
| $R_{\theta JB}$      | Junction-to-board thermal resistance                           | 13.0        | °C/W |
| $\Psi_{JT}$          | Junction-to-top characterization parameter                     | 0.1         | °C/W |
| $\Psi_{JB}$          | Junction-to-board characterization parameter                   | 12.9        | °C/W |

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

### 6.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|          |                     | MIN | NOM | MAX | UNIT |
|----------|---------------------|-----|-----|-----|------|
| $V_{IN}$ | Input Voltage Range | 3   |     | 18  | V    |

## 6.4 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

|  |  | MIN | NOM | MAX  | UNIT |
|--|--|-----|-----|------|------|
| V <sub>BAT</sub>                                 | Battery Voltage Range  |     |     | 4.65 | V    |
| I <sub>IN</sub>                                  | Input Current Range (IN to SYS)  |     |     | 1.05 | A    |
| I <sub>BAT</sub>                                 | Fast Charging Current  |     |     | 1    | A    |
|  | RMS Discharge Current (continuously)   |     |     | 1.5  | A    |
|  | Peak Discharge Current (up to 50ms)  |     |     | 2.5  | A    |
| V <sub>VINLS1</sub> /<br>V <sub>VINLS2</sub>     | LDO1/LDO2 Input Voltage Range  | 1.5 |     | 6    | V    |
| I <sub>OUT_BUCK</sub>                            | Buck Output Current  |     |     | 600  | mA   |
| I <sub>OUT_BUBO</sub>                            | Buck-boost Output Current (V <sub>SYS</sub> ≥ 3.0V, V <sub>BBOUT</sub> = 3.3V) |     |     | 600  | mA   |
| I <sub>OUT_LDO1</sub> /<br>I <sub>OUT_LDO2</sub> | LDO1/LDO2 Output Current   |     |     | 200  | mA   |
| T <sub>A</sub>                                   | Operating Ambient Temperature Range  | -40 |     | 85   | °C   |
| T <sub>J</sub>                                   | Operating Junction Temperature Range   | -40 |     | 125  | °C   |

## 6.5 Electrical Characteristics

V<sub>IN</sub> = 5V, V<sub>BAT</sub> = 3.6V, V<sub>BBOUT</sub> = 2.5V, V<sub>VINLS1</sub>/V<sub>VINLS2</sub> = V<sub>LSLDO1</sub>/V<sub>LSLDO2</sub> + 0.5V or 2V (whichever is greater), I<sub>LSLDO1</sub>/I<sub>LSLDO2</sub> = 1mA, -40°C < T<sub>J</sub> < 125°C and T<sub>J</sub> = 30°C for typical values (unless otherwise noted)

| PARAMETER                       |   | TEST CONDITIONS   | MIN | TYP  | MAX  | UNIT |
|---------------------------------|---|---|-----|------|------|------|
| INPUT CURRENTS                  |   |   |     |      |      |      |
| I <sub>Q_BAT</sub>              | Battery quiescent current in battery mode, ADC disabled | V <sub>IN</sub> = 0V, V <sub>BAT</sub> = 3.6V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, ADC disabled, watchdog disabled, T <sub>J</sub> =30°C                        |     | 2    | 2.5  | μA   |
|                                 |   | V <sub>IN</sub> = 0V, V <sub>BAT</sub> = 3.6V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, ADC disabled, watchdog disabled, 0°C<T <sub>J</sub> <85°C                    |     | 2    | 4    | μA   |
| I <sub>Q_BAT_AD C</sub>         | Battery quiescent current in battery mode, ADC enabled  | V <sub>IN</sub> = 0V, V <sub>BAT</sub> = 3.6V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, ADC enabled, watchdog enabled, 0°C<T <sub>J</sub> <85°C                      |     | 350  |      | μA   |
| I <sub>Q_BAT_SHIP</sub>         | Battery quiescent current in ship mode                  | V <sub>IN</sub> = 0V, always-on LDO1 disabled, V <sub>BAT</sub> = 3.6V, 0°C<T <sub>J</sub> <85°C  |     | 15   | 100  | nA   |
| I <sub>Q_IN</sub>               | Input supply quiescent current                          | V <sub>IN</sub> = 5V, V <sub>BAT</sub> = 3.6V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, charge disabled, ADC disabled, SYSREG = 4.5V, TS_FAULT_VIN_EN = 0            |     | 0.68 | 1    | mA   |
|                                 |   | V <sub>IN</sub> = 5V, V <sub>BAT</sub> = 3.6V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, charge disabled, ADC disabled, SYS in pass-through mode, TS_FAULT_VIN_EN = 0 |     | 0.45 | 0.85 | mA   |
| I <sub>SLEEP_IN</sub>           | Sleep mode input current                                | V <sub>IN</sub> = 3.6V, V <sub>BAT</sub> = 3.7V, Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, ADC disabled   |     | 25   |      | μA   |
| I <sub>SYS_SD</sub>             | SYS shutdown current                                    | Buck disabled, Buck-boost disabled, LDO1 disabled, LDO2 disabled, BATFET OFF, input FETs OFF, V <sub>SYS</sub> = 3.6V, -40°C< T <sub>J</sub> <85°C  |     | 90   | 800  | nA   |
| POWER-PATH MANAGEMENT AND INPUT |   |   |     |      |      |      |
| V <sub>IN_OP</sub>              | IN operating range                                      |   |     | 3    | 18   | V    |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                |   | TEST CONDITIONS   | MIN  | TYP  | MAX  | UNIT       |
|--------------------------|---|---|------|------|------|------------|
| $V_{IN\_UVLOZ}$          | Exit IN undervoltage lock-out                                     | IN rising   |      |      | 3    | V          |
| $V_{IN\_UVLO}$           | Enter IN undervoltage lock-out                                    | IN falling  |      |      | 2.7  | V          |
| $V_{IN\_PORZ}$           | IN voltage threshold to enter ship mode                           | IN falling  | 1.09 | 1.3  | 1.66 | V          |
| $V_{SLEEP\_HYST}$        | Exit Sleep mode threshold   | IN rising, $V_{IN} - V_{BAT}$ , $V_{BAT}=4V$  | 175  | 225  | 295  | mV         |
| $V_{SLEEP\_HYST}$        | Enter Sleep mode threshold  | IN falling, $V_{IN} - V_{BAT}$ , $V_{BAT}=4V$                                       | 60   | 90   | 125  | mV         |
| $V_{IN\_OVP}$            | IN overvoltage rising threshold                                   | IN rising, $V_{IN\_OVP} = 0$  | 5.5  | 5.7  | 5.9  | V          |
| $V_{IN\_OV\_HYST}$       | IN overvoltage hysteresis   | IN falling, $V_{IN\_OVP} = 0$   |      | 125  |      | mV         |
| $V_{IN\_OVP}$            | IN overvoltage rising threshold                                   | IN rising, $V_{IN\_OVP} = 1$  | 18.2 | 18.5 | 18.8 | V          |
| $V_{IN\_OVPZ}$           | IN overvoltage falling threshold                                  | IN falling, $V_{IN\_OVP} = 1$   | 17.7 | 18.0 | 18.3 | V          |
| $I_{BAT\_OCP}$           | BAT_OCP(Reverse OCP only)   | $V_{BAT}=3.6V$ , $I_{BAT\_OCP}=b00$   |      | 0.5  |      | A          |
|                          |   | $V_{BAT}=3.6V$ , $I_{BAT\_OCP}=b01$   |      | 1    |      | A          |
|                          |   | $V_{BAT}=3.6V$ , $I_{BAT\_OCP}=b10$   |      | 1.5  |      | A          |
|                          |   | $V_{BAT}=3.6V$ , $I_{BAT\_OCP}=b11$   |      | 3.25 |      | A          |
| $V_{BSUP1}$              | Enter supplement mode threshold                                   | $V_{BAT}=3.6V$ , $V_{BAT}>V_{BATDEPL}$ , $V_{SYS}<V_{BAT} - V_{BSUP1}$              |      | 40   |      | mV         |
| $V_{BSUP2}$              | Exit supplement mode threshold                                    | $V_{BAT}=3.6V$ , $V_{BAT}>V_{BATDEPL}$ , $V_{SYS}>V_{BAT} - V_{BSUP2}$              |      | 20   |      | mV         |
| $I_{LIM}$                | Input Current Limit   | $V_{IN}=5V$ , $I_{LIM}=90mA$  | 80   | 90   | 98   | mA         |
|                          |   | $V_{IN}=5V$ , $I_{LIM}=475mA$   | 450  | 475  | 498  | mA         |
|                          |   | $V_{IN}=5V$ , $I_{LIM}=1050mA$  | 1005 | 1050 | 1100 | mA         |
| $V_{INDPM}$              | Input voltage threshold when input current is reduced             | $V_{INDPM}=b00$   |      | 4.2  |      | V          |
|                          |   | $V_{INDPM}=b01$   |      | 4.5  |      | V          |
|                          |   | $V_{INDPM}=b10$   |      | 4.7  |      | V          |
| $V_{DPPM}$               | SYS voltage threshold when charge current is reduced              | $V_{BAT}=3.6V$ , $V_{SYS}=V_{DPPM}+V_{BAT}$ before charge current is reduced.       |      | 0.1  |      | V          |
| $V_{SYS\_REG\_ACCURACY}$ | DC SYS regulation accuracy  | $V_{IN} = 5V$ , $V_{BAT} = 3.6V$ , $I_{SYS} = 100mA$ , SYS regulation target = 4.5V | -2   |      | 2    | %          |
| $V_{MINSYS}$             | Minimum SYS voltage when in battery tracking mode                 | $V_{BAT}<3.6V$  |      | 3.8  |      | V          |
| $V_{SYS\_TRACK}$         | Voltage regulation threshold for SYS when $V_{BAT} > 3.6V$        | $V_{BAT}=4V$ , $V_{SYS}=V_{BAT}+V_{SYS\_TRACK}$                                     |      | 225  |      | mV         |
| $R_{SYS\_PD}$            | SYS pull down resistance  | $V_{SYS} = 3.6V$  |      | 20   |      | $\Omega$   |
| $V_{SYS\_SHORT}$         | Falling voltage threshold for triggering SYS_SHORT protection     |   |      | 840  |      | mV         |
| $V_{SYS\_SHORTZ}$        | Rising voltage threshold for recovering from SYS_SHORT protection |   |      | 1.08 |      | V          |
| $V_{SEQ\_UVLOZ}$         | Exit sequence undervoltage lock-out                               | SYS rising, when power sequence is used   | 1.8  | 1.95 | 2.1  | V          |
| $V_{SEQ\_UVLO}$          | Enter sequence undervoltage lock-out                              | SYS falling, when power sequence is used  | 1.7  | 1.85 | 2    | V          |
| <b>BATTERY CHARGER</b>   |   |   |      |      |      |            |
| $R_{ON\_BAT}$            | BATFET on-resistance  | $V_{BAT} = 4.5V$ , $I_{BAT} = 500mA$  |      | 55   | 90   | m $\Omega$ |
| $R_{ON\_IN}$             | Input FET on-resistance   | $V_{IN} = 5V$ , $I_{IN} = 1A$   |      | 270  | 470  | m $\Omega$ |



## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOU} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                      |  | TEST CONDITIONS  | MIN  | TYP  | MAX   | UNIT |
|--------------------------------|--|--|------|------|-------|------|
| V <sub>DO</sub>                | Dropout voltage (V <sub>SYS</sub> - V <sub>BAT</sub> )     | V <sub>BAT</sub> = 4.2V, I <sub>CHG</sub> = 500mA      |      |      | 300   | mV   |
| V <sub>REG_RA</sub><br>NGE     | Typical BAT charge voltage regulation range                | 10mV steps, programmabe through I <sup>2</sup> C       | 3.5  |      | 4.65  | V    |
| V <sub>REG_AC</sub><br>C       | Charge voltage accuracy                                    |  | −0.5 |      | 0.5   | %    |
| I <sub>CHG_RAN</sub><br>GE     | Typical charge current regulation range                    | V <sub>OUT</sub> > V <sub>LOWV</sub>                   | 5    |      | 1000  | mA   |
| I <sub>CHG_ACC</sub>           | Charge current accuracy                                    | ICHG = 40mA  | 36   | 40   | 44    | mA   |
|                                |  | ICHG = 90mA  | 81   | 90   | 99    | mA   |
|                                |  | ICHG = 90 mA, 0°C< T <sub>J</sub> < 85°C               | 85.5 | 90   | 94.5  | mA   |
|                                |  | ICHG = 900mA   | 810  | 900  | 990   | mA   |
| I <sub>PRECHG_</sub><br>ACC    | Precharge current accuracy                                 | ICHG = 90 mA, IPRECHG = 20% ICHG                       | 16.2 | 18   | 19.8  | mA   |
| I <sub>TERM_AC</sub><br>C      | Termination current accuracy                               | ITERM = 30 mA, ITERM = 10% ICHG, T <sub>J</sub> = 30°C | 2.6  | 3    | 3.3   | mA   |
| V <sub>LOWV</sub>              | Pre-charge to fast-charge transition threshold             | VLOWVSEL = 3.0V, VBAT rising                           | 2.9  | 3    | 3.1   | V    |
|                                |  | VLOWVSEL = 2.8V, VBAT rising                           | 2.7  | 2.8  | 2.9   | V    |
| V <sub>LOWV_H</sub><br>YST     | Battery LOWV hysteresis                                    |  |      | 100  |       | mV   |
| V <sub>BATDEPL</sub><br>Z      | Battery depletion threshold, VBAT rising                   | BATDEPL = b000, VIN = 0V                               | 3.05 | 3.15 | 3.25  | V    |
| V <sub>BATDEPL</sub>           | Battery depletion threshold, VBAT falling                  | BATDEPL = b000, VIN = 0V                               | 2.9  | 3    | 3.1   | V    |
| V <sub>BATDEPL_</sub><br>HYST  | Battery depletion threshold hysteresis, VBAT rising        |  |      | 150  |       | mV   |
| V <sub>BUVLOZ</sub>            | Battery UVLO, VBAT rising                                  |  | 2.4  | 2.5  | 2.6   | V    |
| V <sub>BUVLO</sub>             | Battery UVLO, VBAT falling                                 |  | 2.0  | 2.1  | 2.2   | V    |
| V <sub>BAT_ADC</sub><br>_LOWVZ | Minimum battery voltage for ADC operation in battery mode  |  |      | 2.4  |       | V    |
| V <sub>RECHG</sub>             | Battery recharge threshold below regulation voltage        | BAT falling, VRECHG = 0                                |      | 100  |       | mV   |
|                                |  | BAT falling, VRECHG = 1                                |      | 200  |       | mV   |
| V <sub>BATSC</sub>             | Short on battery threshold for trickle charge, VBAT rising |  |      | 1.8  |       | V    |
| V <sub>BATSC_H</sub><br>YST    | Battery short circuit voltage hysteresis                   |  |      | 200  |       | mV   |
| I <sub>BATSC</sub>             | Trickle charge current                                     | V <sub>BAT</sub> <V <sub>BATSC</sub> , IBATSC = 0      |      | 8    |       | mA   |
|                                |  | V <sub>BAT</sub> <V <sub>BATSC</sub> , IBATSC = 1      |      | 1    |       | mA   |
| BUCK                           |  |  |      |      |       |      |
| V <sub>OUT_BUC</sub><br>K      | Buck output voltage range                                  | BUCK_HI_RANGE = 0                                      | 0.4  |      | 1.575 | V    |
|                                |  | BUCK_HI_RANGE = 1                                      | 0.4  |      | 3.6   | V    |
| V <sub>BUCK_UV</sub><br>LOZ    | Buck exit undervoltage lock-out                            | V <sub>SYS</sub> rising                                |      | 1.75 | 1.8   | V    |
| V <sub>BUCK_UV</sub><br>LO     | Buck enter undervoltage lock-out                           | V <sub>SYS</sub> falling                               |      | 1.65 | 1.7   | V    |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER              |  | TEST CONDITIONS  | MIN  | TYP                 | MAX  | UNIT |
|------------------------|--|--|------|---------------------|------|------|
| $I_{Q\_BUCK\_ON}$      | SYS current when only Buck is enabled                  | Non-switching, Buck enabled, $I_{LOAD\_BUCK} = 0A$ , $V_{OUT\_BUCK} = 0.7V$ , Buck-boost disabled, LDO1 disabled, LDO2 disabled, BATFET OFF, input FETs OFF, Buck PGOOD function disabled, $V_{SYS} = 3.6V$ , $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ |      | 360                 | 3200 | nA   |
|                        |  | Switching, Buck1 enabled, $I_{LOAD\_BUCK} = 0A$ , $V_{OUT\_BUCK} = 0.7V$ , Buck-boost disabled, LDO1 disabled, LDO2 disabled, BATFET OFF, input FETs OFF, Buck PGOOD function disabled, $V_{SYS} = 3.6V$   |      | 435                 |      | nA   |
| $V_{OUT\_ACC\_BUCK}$   | DC output voltage accuracy                             | PWM operation, $-40^{\circ}C \leq T_J \leq 125^{\circ}C$   | -1.5 |                     | +1.5 | %    |
| $R_{DS(on)\_HS\_BUCK}$ | High-side MOSFET on-resistance                         | $I_{BKOUT} = 300mA$ , $V_{SYS} = 3.6V$   |      | 170                 |      | mΩ   |
| $R_{DS(on)\_LS\_BUCK}$ | Low-side MOSFET on-resistance                          | $I_{BKOUT} = 300mA$ , $V_{SYS} = 3.6V$   |      | 70                  |      | mΩ   |
| $I_{HSOC\_BUCK}$       | High-side peak current limit                           | Peak current limit on HS FET   | 0.9  | 1.1                 | 1.3  | A    |
| $I_{LSOC\_BUCK}$       | Low-side valley current limit                          | Valley current limit on LS FET   | 0.8  | 1.0                 | 1.1  | A    |
| $R_{PD\_BUCK}$         | Output discharge resistor on BKOUT pin                 | Buck disabled, $I_{OUT\_BUCK} = -10mA$   |      | 7                   |      | Ω    |
| $V_{BUCK\_PGTH}$       | Buck power good threshold                              | $V_{BKOUT}$ rising   |      | 93%<br>$V_{target}$ |      |      |
| $V_{BUCK\_PGTHZ}$      | Buck power good threshold                              | $V_{BKOUT}$ falling  |      | 90%<br>$V_{target}$ |      |      |
| <b>BUCK-BOOST</b>      |  |  |      |                     |      |      |
| $V_{OUT\_BB}$          | Buck-boost output voltage range                        |  | 1.7  |                     | 5.2  | V    |
| $I_{Q\_IN\_BB\_ON}$    | SYS current when only Buck-boost is enabled            | Buck-boost enabled, no load, not switching, "unlimited" current setting, Buck disabled, LDO1 disabled, LDO2 disabled, BATFET OFF, input FETs OFF, Buck-boost PGOOD function disabled, $V_{SYS} = 3.6V$ , $-40^{\circ}C < T_J < 85^{\circ}C$            |      | 105                 | 2050 | nA   |
| $V_{BB\_UVLOZ}$        | Buck-boost exit undervoltage lock-out                  | $V_{SYS}$ rising   | 1.70 | 1.75                | 1.80 | V    |
| $V_{BB\_UVLO\_HYST}$   | UVLO threshold voltage hysteresis                      |  | 90   | 100                 | 110  | mV   |
| $V_{OUT\_ACC\_BB}$     | Buck-boost output voltage DC accuracy                  | $I_{BBOUT} = 1mA$  | -1.5 |                     | 1.5  | %    |
| $R_{DS(on)\_BBK\_HS}$  | Buck-boost buck bridge high-side MOSFET on resistance  | $V_{SYS} = 3V$ , $V_{BBOUT} = 5V$ , test current = 1A  |      | 155                 |      | mΩ   |
| $R_{DS(on)\_BBK\_LS}$  | Buck-boost buck bridge low-side MOSFET on resistance   | $V_{SYS} = 3V$ , $V_{BBOUT} = 3V$ , test current = 1A  |      | 110                 |      | mΩ   |
| $R_{DS(on)\_BBST\_LS}$ | Buck-boost boost bridge low-side MOSFET on resistance  | $V_{SYS} = 3V$ , $V_{BBOUT} = 3V$ , test current = 1A  |      | 110                 |      | mΩ   |
| $R_{DS(on)\_BBST\_HS}$ | Buck-boost boost bridge high-side MOSFET on resistance | $V_{SYS} = 5V$ , $V_{BBOUT} = 3V$ , test current = 1A  |      | 155                 |      | mΩ   |
| $I_{OC\_SS\_BB}$       | Peak current limit during startup                      | $V_{SYS} = 3.6V$ , unlimited current limit setting   |      | 0.6                 |      | A    |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                                    |  | TEST CONDITIONS   | MIN  | TYP                 | MAX  | UNIT     |
|--|--|---|------|---------------------|------|----------|
| $I_{OC\_BB}$                                 | Peak current limit                       | $V_{SYS} = 1.8V$ , $V_{BBOUT} = 3.6V$ , unlimited current limit setting   | 1.43 | 1.55                | 1.7  | A        |
|  |  | $V_{SYS} = 1.8V$ , $V_{BBOUT} = 3.6V$ , 100mA current limit setting   | 0.15 | 0.29                | 0.51 | A        |
| $R_{PD\_BB}$                                 | Output discharge resistor on BBOUT pin   | Buck-boost disabled, $I_{OUT\_BB} = -10mA$  |      | 7                   |      | $\Omega$ |
| $V_{BB\_PGTH}$                               | Buck-boost power good threshold          | $V_{BBOUT}$ rising  |      | 93%<br>$V_{target}$ |      |          |
| $V_{BB\_PGTHZ}$                              | Buck-boost power good threshold          | $V_{BBOUT}$ falling   |      | 90%<br>$V_{target}$ |      |          |
| <b>LDO1</b>                                  |  |   |      |                     |      |          |
| $V_{IN\_LDO1}$                               | LDO1 input voltage range                 |   | 1.5  |                     | 6    | V        |
| $V_{OUT\_LDO1}$                              | LDO1 output voltage range in LDO mode    |   | 0.8  |                     | 3.6  | V        |
| $I_{Q\_LDO1}$                                | LDO1 quiescent current                   | $T_J = 30^{\circ}C$ , $I_{LSLDO1} = 0mA$ , LDO1 PGOOD function disabled, LDO1 in LDO mode, $V_{VINLS1} = 3.6V$                      |      | 25                  | 46   | nA       |
|  |  | $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , $I_{LSLDO1} = 0mA$ , LDO1 PGOOD function disabled, LDO1 in LDO mode, $V_{VINLS1} = 3.6V$ |      |                     | 60   | nA       |
| $I_{SD\_LDO1}$                               | Shutdown current                         | LDO1 disabled, $1.5V \leq V_{VINLS1} \leq 5.0V$ , $T_J = 30^{\circ}C$   |      | 3                   | 10   | nA       |
| $\Delta V_{OUT\_LDO1}(\Delta V_{IN\_LDO1})$  | Line regulation                          | $V_{LSLDO1(nom)} + 0.5V \leq V_{VINLS1} \leq 6V^{(1)}$  |      |                     | 5    | mV       |
| $V_{OUT\_ACC\_LDO1}$                         | Output voltage accuracy over temperature | $V_{LSLDO1} \geq 1.5V$  | -2   |                     | 2    | %        |
|  |  | $V_{LSLDO1} < 1.5V$   | -30  |                     | 30   | mV       |
| $\Delta V_{OUT\_LDO1}(\Delta I_{OUT\_LDO1})$ | Load regulation <sup>(2)</sup>           | $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , $1mA \leq I_{LSLDO1} \leq 200mA$ , $V_{VINLS1} = V_{LSLDO1(nom)} + 0.5V^{(1)}$           |      | 20                  | 38   | mV       |
|  |  | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $1mA \leq I_{LSLDO1} \leq 200mA$ , $V_{VINLS1} = V_{LSLDO1(nom)} + 0.5V^{(1)}$          |      |                     | 50   | mV       |
| $I_{CL\_LDO1}$                               | Output current limit                     | $V_{LSLDO1} = 90\% \times V_{LSLDO1(nom)}$ , $V_{LSLDO1} < 2.5V$ , $V_{VINLS1} = V_{LSLDO1(nom)} + V_{DO\_LDO1(max)} + 1V$          | 340  | 550                 | 850  | mA       |
|  |  | $V_{LSLDO1} = 90\% \times V_{LSLDO1(nom)}$ , $V_{LSLDO1} \geq 2.5V$ , $V_{VINLS1} = V_{LSLDO1(nom)} + V_{DO\_LDO1(max)} + 0.5V$     | 340  | 550                 | 850  | mA       |
| $I_{SC\_LDO1}$                               | Short-circuit current limit              | $V_{LSLDO1} = 0V$   |      | 80                  |      | mA       |
| $V_{DO\_LDO1}$                               | Dropout voltage <sup>(3)</sup>           | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $1.8V \leq V_{LSLDO1} < 2.5V$   |      |                     | 450  | mV       |
|  |  | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $3.3V \leq V_{LSLDO1} \leq 3.6V$  |      |                     | 310  | mV       |
| $V_{LDO1\_UVLOZ}$                            | LDO1 exit undervoltage lock-out          | $V_{VINLS1}$ rising   | 1    | 1.35                | 1.7  | V        |
| $V_{LDO1\_UVLO}$                             | LDO1 enter undervoltage lock-out         | $V_{VINLS1}$ falling  | 0.85 | 1.19                | 1.35 | V        |
| $R_{PD\_LDO1}$                               | Output pulldown resistance               | $V_{LSLDO1} = 3.3V$ , LDO1 disabled   |      | 60                  |      | $\Omega$ |
| $V_{LDO1\_PGTH}$                             | LDO1 power good threshold                | $V_{LSLDO1}$ rising   |      | 93%<br>$V_{target}$ |      |          |
| $V_{LDO1\_PGTHZ}$                            | LDO1 power good threshold                | $V_{LSLDO1}$ falling  |      | 90%<br>$V_{target}$ |      |          |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOU} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER  |  | TEST CONDITIONS   | MIN  | TYP                 | MAX  | UNIT        |
|--|--|---|------|---------------------|------|-------------|
| <b>LDO2</b>  |  |   |      |                     |      |             |
| $V_{IN\_LDO2}$   | LDO2 input voltage range                   |   | 1.5  |                     | 6    | V           |
| $V_{OUT\_LDO2}$  | LDO2 output voltage range                  |   | 0.8  |                     | 3.6  | V           |
| $I_{Q\_LDO2}$  | LDO2 quiescent current                     | $T_J = 30^{\circ}C$ , $I_{LSLDO2} = 0$ mA, LDO2 PGOOD function disabled, LDO2 in LDO mode, $V_{VINLS2} = 3.6V$                      |      | 25                  | 46   | nA          |
|  |  | $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , $I_{LSLDO2} = 0$ mA, LDO2 PGOOD function disabled, LDO2 in LDO mode, $V_{VINLS2} = 3.6V$ |      |                     | 60   | nA          |
| $I_{SD\_LDO2}$   | Shutdown current                           | LDO2 disabled, $1.5V \leq V_{VINLS2} \leq 5.0V$ , $T_J = 30^{\circ}C$   |      | 3                   | 10   | nA          |
| $\Delta V_{OUT\_LDO2}(\Delta V_{IN\_LDO2})$            | Line regulation                            | $V_{LSLDO2(nom)} + 0.5V \leq V_{VINLS2} \leq 6V^{(4)}$  |      |                     | 5    | mV          |
| $V_{OUT\_ACC\_LDO2}$                                   | Output voltage accuracy over temperature   | $V_{LSLDO2} \geq 1.5V$  | -2   |                     | 2    | %           |
|  |  | $V_{LSLDO2} < 1.5V$   | -30  |                     | 30   | mV          |
| $\Delta V_{OUT\_LDO2}(\Delta I_{OUT\_LDO2})$           | Load regulation <sup>(5)</sup>             | $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , $1$ mA $\leq I_{LSLDO2} \leq 200$ mA, $V_{VINLS2} = V_{LSLDO2(nom)} + 0.5V^{(4)}$        |      | 20                  | 38   | mV          |
|  |  | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $1$ mA $\leq I_{LSLDO2} \leq 200$ mA, $V_{VINLS2} = V_{LSLDO2(nom)} + 0.5V^{(4)}$       |      |                     | 50   | mV          |
| $I_{CL\_LDO2}$   | Output current limit                       | $V_{LSLDO2} = 90\% \times V_{LSLDO2(nom)}$ , $V_{LSLDO2} < 2.5V$ , $V_{VINLS2} = V_{LSLDO2(nom)} + V_{DO\_LDO2(max)} + 1V$          | 340  | 550                 | 850  | mA          |
|  |  | $V_{LSLDO2} = 90\% \times V_{LSLDO2(nom)}$ , $V_{LSLDO2} \geq 2.5V$ , $V_{VINLS2} = V_{LSLDO2(nom)} + V_{DO\_LDO2(max)} + 0.5V$     | 340  | 550                 | 850  | mA          |
| $I_{SC\_LDO2}$   | Short-circuit current limit                | $V_{LSLDO2} = 0V$   |      | 80                  |      | mA          |
| $V_{DO\_LDO2}$   | Dropout voltage <sup>(6)</sup>             | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $1.8V \leq V_{LSLDO2} < 2.5V$   |      |                     | 450  | mV          |
|  |  | $-40^{\circ}C \leq T_J \leq 125^{\circ}C$ , $3.3V \leq V_{LSLDO2} \leq 3.6V$  |      |                     | 310  | mV          |
| $V_{LDO2\_UVLOZ}$                                      | LDO2 exit undervoltage lock-out            | $V_{VINLS2}$ rising   | 1    | 1.35                | 1.7  | V           |
| $V_{LDO2\_UVLO}$                                       | LDO2 enter undervoltage lock-out           | $V_{VINLS2}$ falling  | 0.85 | 1.19                | 1.35 | V           |
| $R_{PD\_LDO2}$   | Output pulldown resistance                 | $V_{LSLDO2} = 3.3V$ , LDO2 disabled   |      | 60                  |      | $\Omega$    |
| $V_{LDO2\_PGTH}$                                       | LDO2 power good threshold                  | $V_{LSLDO2}$ rising   |      | 93%<br>$V_{target}$ |      |             |
| $V_{LDO2\_PGTHZ}$                                      | LDO2 power good threshold                  | $V_{LSLDO2}$ falling  |      | 90%<br>$V_{target}$ |      |             |
| <b>TEMPERATURE REGULATION AND TEMPERATURE SHUTDOWN</b> |  |   |      |                     |      |             |
| $T_{REG}$  | Typical junction temperature regulation    | THERM_REG = b00   |      | 100                 |      | $^{\circ}C$ |
|  |  | THERM_REG = b01   |      | 80                  |      | $^{\circ}C$ |
|  |  | THERM_REG = b10   |      | 60                  |      | $^{\circ}C$ |
| $T_{SHUT\_RISING}$                                     | Charger thermal shutdown rising threshold  | Temperature rising  |      | 150                 |      | $^{\circ}C$ |
| $T_{SHUT\_FALLING}$                                    | Charger thermal shutdown falling threshold | Temperature falling   |      | 135                 |      | $^{\circ}C$ |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                                       |   | TEST CONDITIONS                                    | MIN                  | TYP                    | MAX                  | UNIT        |
|---|---|--|----------------------|------------------------|----------------------|-------------|
| $T_{SHUT\_RI\_SING\_LDO1}$                      | LDO1 thermal shutdown rising threshold                            | Temperature rising                                 |                      | 170                    |                      | $^{\circ}C$ |
| $T_{SHUT\_FALLING\_LDO1}$                       | LDO1 thermal shutdown falling threshold                           | Temperature falling                                |                      | 145                    |                      | $^{\circ}C$ |
| $T_{SHUT\_RI\_SING\_LDO2}$                      | LDO2 thermal shutdown rising threshold                            | Temperature rising                                 |                      | 170                    |                      | $^{\circ}C$ |
| $T_{SHUT\_RI\_SING\_BUCK}$                      | Buck thermal shutdown rising threshold                            | Temperature rising                                 |                      | 160                    |                      | $^{\circ}C$ |
| $T_{SHUT\_RI\_SING\_BB}$                        | Buck-boost thermal shutdown rising threshold                      | Temperature rising                                 |                      | 150                    |                      | $^{\circ}C$ |
| <b>BATTERY NTC MONITOR</b>                      |   |  |                      |                        |                      |             |
| $V_{HOT}$                                       | High temperature threshold ( $43^{\circ}C$ )                      | $V_{TS}$ falling, $0^{\circ}C < T_J < 85^{\circ}C$ | 0.272 <sup>(7)</sup> | 0.276                  | 0.280 <sup>(7)</sup> | V           |
| $V_{COLD}$                                      | Cold temperature threshold ( $0^{\circ}C$ )                       | $V_{TS}$ rising, $0^{\circ}C < T_J < 85^{\circ}C$  | 0.576 <sup>(7)</sup> | 0.580                  | 0.584 <sup>(7)</sup> | V           |
| $V_{NTC\_HYST}$                                 | Threshold hysteresis  |  |                      | 20                     |                      | mV          |
| $V_{TS\_OPEN}$                                  | TS open threshold   | $V_{TS}$ rising, $0^{\circ}C < T_J < 85^{\circ}C$  |                      | 0.9                    |                      | V           |
| $I_{TS\_BIAS}$                                  | TS bias current   |  | 76.8                 | 80                     | 83.2                 | $\mu A$     |
| $V_{TS\_CLAMP}$                                 | TS clamp voltage  | TS open-circuit (float), $V_{IN} = 5V$             | 1.2                  | 1.5                    | 1.8                  | V           |
| <b>PUSH BUTTON TIMERS</b>                       |   |  |                      |                        |                      |             |
| $t_{WAKE1}$                                     | WAKE1 timer. Time from /MR falling edge to INT being asserted.    | WAKE1_TMR = 0                                      |                      | 125                    |                      | ms          |
|   |   | WAKE1_TMR = 1                                      |                      | 500                    |                      | ms          |
| $t_{WAKE2}$                                     | WAKE2 timer. Time from /MR falling edge to INT being asserted.    | WAKE2_TMR = 0                                      |                      | 1                      |                      | s           |
|   |   | WAKE2_TMR = 1                                      |                      | 2                      |                      | s           |
| $t_{LPRESS\_WARN}$                              | RESET_WARN timer. Time prior to long press action                 |  |                      | 1                      |                      | s           |
| $t_{LPRESS}$                                    | Long press timer. Time from /MR falling edge to long press action | MR_LPRESS = b00                                    |                      | 5                      |                      | s           |
|   |   | MR_LPRESS = b01                                    |                      | 10                     |                      | s           |
|   |   | MR_LPRESS = b10                                    |                      | 15                     |                      | s           |
|   |   | MR_LPRESS = b11                                    |                      | 20                     |                      | s           |
| $t_{RESTART(AUTOWAKE)}$                         | RESTART timer. Time from HW Reset to SYS power up                 | AUTOWAKE = b00                                     |                      | 0.5                    |                      | s           |
|   |   | AUTOWAKE = b01                                     |                      | 1                      |                      | s           |
|   |   | AUTOWAKE = b10                                     |                      | 2                      |                      | s           |
|   |   | AUTOWAKE = b11                                     |                      | 4                      |                      | s           |
| $t_{SHIPWAKE}$                                  | Wake timer to count for ship mode exit                            |  |                      | 1                      |                      | s           |
| <b>BATTERY CHARGING TIMERS</b>                  |   |  |                      |                        |                      |             |
| $t_{MAXCHG}$                                    | Charge safety timer   | Programmable range                                 | 180                  |                        | 720                  | min         |
| $t_{SFTMR\_ACC}$                                | Safety timer accuracy   |  | -10                  |                        | 10                   | %           |
| $t_{PRECHG}$                                    | Precharge safety timer  |  |                      | 0.25 *<br>$t_{MAXCHG}$ |                      |             |
| <b>ADC MEASUREMENT ACCURACY AND PERFORMANCE</b> |   |  |                      |                        |                      |             |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                     |   | TEST CONDITIONS                             | MIN  | TYP  | MAX | UNIT |
|-------------------------------|---|---|------|------|-----|------|
| t <sub>ADC_CONV</sub>         | Conversion-time, each measurement         | ADC_SAMPLE = b00                            |      | 24   |     | ms   |
|                               |   | ADC_SAMPLE = b01                            |      | 12   |     | ms   |
|                               |   | ADC_SAMPLE = b10                            |      | 6    |     | ms   |
|                               |   | ADC_SAMPLE = b11                            |      | 6    |     | ms   |
| ADC_RESOLUTION                | Effective resolution                      | ADC_SAMPLE = b00                            | 11   | 12   |     | bits |
|                               |   | ADC_SAMPLE = b01                            | 10   | 11   |     | bits |
|                               |   | ADC_SAMPLE = b10                            | 9    | 10   |     | bits |
|                               |   | ADC_SAMPLE = b11                            | 9    | 10   |     | bits |
| ADC MEASUREMENT RANGE AND LSB |   |   |      |      |     |      |
| IIN_ADC                       | ADC IIN reading                           | Range                                       | 0    |      | 1.1 | A    |
|                               |   | LSB   |      | 0.5  |     | mA   |
| VIN_ADC                       | ADC VIN reading (VIN_OVP=0)               | Range                                       | 0    |      | 6   | V    |
|                               |   | LSB   |      | 1.5  |     | mV   |
|                               | ADC VIN reading (VIN_OVP=1)               | Range                                       | 0    |      | 20  | V    |
|                               |   | LSB   |      | 5    |     | mV   |
| VBAT_ADC                      | ADC VBAT reading                          | Range                                       | 0    |      | 5   | V    |
|                               |   | LSB   |      | 1.25 |     | mV   |
| VSYS_ADC                      | ADC VSYS reading                          | Range                                       | 0    |      | 5   | V    |
|                               |   | LSB   |      | 1.25 |     | mV   |
| IBAT_ADC                      | ADC IBAT reading                          | Range                                       | -3   |      | 1   | A    |
|                               |   | LSB   |      | 1    |     | mA   |
| TS_ADC                        | ADC VTS reading                           | Range                                       | 0    |      | 1   | V    |
|                               |   | LSB   |      | 0.25 |     | mV   |
| TDIE_ADC                      | ADC TDIE reading                          | Range                                       | -40  |      | 125 | °C   |
|                               |   | LSB   |      | 0.5  |     | °C   |
| ADCIN_ADC                     | ADC ADCIN voltage reading, ADCIN_MODE = 0 | Range                                       | 0    |      | 5   | V    |
|                               |   | LSB   |      | 1.25 |     | mV   |
|                               | ADC ADCIN voltage reading, ADCIN_MODE = 1 | Range                                       | 0    |      | 1   | V    |
|                               |   | LSB   |      | 0.25 |     | mV   |
| I <sup>2</sup> C INTERFACE    |   |   |      |      |     |      |
| V <sub>IL_SDA_SCL</sub>       | Input low threshold level, SDA and SCL    |   |      | 0.42 |     | V    |
| V <sub>IH_SDA_SCL</sub>       | Input high threshold level, SDA and SCL   |   | 0.78 |      |     | V    |
| V <sub>OL_SDA</sub>           | Output low threshold level, SDA           | 5 mA sink current, 1.2V V <sub>PULLUP</sub> |      | 0.3  |     | V    |
| I <sub>LKG_SDA_SCL</sub>      | High-level leakage current, SDA and SCL   | V <sub>PULLUP</sub> = 1.8V                  |      | 1    |     | µA   |
| C <sub>BUS</sub>              | Capacitive load for each bus line         |   |      | 550  |     | pF   |
| MR INPUT PIN                  |   |   |      |      |     |      |
| R <sub>PU_MR</sub>            | Internal pull up resistance               |   |      | 140  |     | kΩ   |
| V <sub>IL_MR</sub>            | MR input low threshold level              |   |      | 0.3  |     | V    |
| INT OUTPUT PIN                |   |   |      |      |     |      |
| V <sub>OL_INT</sub>           | Output low threshold level                | 5mA sink current                            |      | 0.3  |     | V    |
| I <sub>LKG_INT</sub>          | High-level leakage current                | V <sub>PULLUP</sub> = 1.8V                  |      | 1    |     | µA   |

## 6.5 Electrical Characteristics (continued)

$V_{IN} = 5V$ ,  $V_{BAT} = 3.6V$ ,  $V_{BBOUT} = 2.5V$ ,  $V_{VINLS1}/V_{VINLS2} = V_{LSLDO1}/V_{LSLDO2} + 0.5V$  or  $2V$  (whichever is greater),  $I_{LSLDO1}/I_{LSLDO2} = 1mA$ ,  $-40^{\circ}C < T_J < 125^{\circ}C$  and  $T_J = 30^{\circ}C$  for typical values (unless otherwise noted)

| PARAMETER                      |  | TEST CONDITIONS   | MIN                  | TYP | MAX | UNIT      |
|--------------------------------|--|---|----------------------|-----|-----|-----------|
| <b>CE INPUT PIN</b>            |  |   |                      |     |     |           |
| $R_{PD\_CE}$                   | Internal pull-down resistance, $\overline{CE}$               |   |                      | 5   |     | $M\Omega$ |
| $V_{IL\_CE}$                   | Input low threshold level, $\overline{CE}$                   |   |                      |     | 0.4 | V         |
| $V_{IH\_CE}$                   | Input high threshold level, $\overline{CE}$                  |   | 0.78                 |     |     | V         |
| $I_{IN\_BIAS\_CE}$             | High-level leakage current, $\overline{CE}$                  | $V_{PULLUP} = 1.8V$   |                      |     | 1   | $\mu A$   |
| <b>GPIO1/GPIO2/GPIO3/GPIO4</b> |  |   |                      |     |     |           |
| $V_{IL\_GPIO}$                 | Input low threshold level, GPIO1/GPIO2/GPIO3/GPIO4           |   |                      |     | 0.4 | V         |
| $V_{IH\_GPIO}$                 | Input high threshold level, GPIO1/GPIO2/GPIO3/GPIO4          |   | 0.78                 |     |     | V         |
| $V_{OL\_GPIO}$                 | Output low threshold level, GPIO1/GPIO2/GPIO3/GPIO4          | 5 mA sink current   |                      |     | 0.3 | V         |
| $V_{OH\_GPIO\_PP}$             | Output high level in push-pull mode, GPIO1/GPIO2/GPIO3/GPIO4 | 0.5 mA output current, $V_{VPU} = 1.8V$                                     | $0.8 \times V_{VPU}$ |     |     | V         |
| $f_{GPIO4\_PWM}$               | GPIO4 frequency in PWM output mode                           |   |                      | 1   |     | KHz       |
| $I_{LKG\_GPIO}$                | High-level leakage current, GPIO1/GPIO2/GPIO3/GPIO4          | GPIO1/GPIO2/GPIO3/GPIO4 in forced open-drain high mode, $V_{PULLUP} = 1.8V$ |                      |     | 1   | $\mu A$   |

- (1)  $V_{VINLS1} = 2.0V$  for  $V_{LSLDO1} \leq 1.5V$
- (2) Load Regulation is normalized to the output voltage at  $I_{LDOLS1} = 1mA$ .
- (3) Dropout is measured by ramping  $V_{VINLS1}$  down until  $V_{LSLDO1} = V_{LSLDO1}(\text{nom}) \times 95\%$ , with  $I_{LSLDO1} = 200mA$
- (4)  $V_{VINLS2} = 2.0V$  for  $V_{LSLDO2} \leq 1.5V$
- (5) Load Regulation is normalized to the output voltage at  $I_{LDOLS2} = 1mA$ .
- (6) Dropout is measured by ramping  $V_{VINLS2}$  down until  $V_{LSLDO2} = V_{LSLDO2}(\text{nom}) \times 95\%$ , with  $I_{LSLDO2} = 200mA$
- (7) Based on Characterization Data

## 6.6 Timing Requirements

|                             |  | MIN | NOM | MAX  | UNIT |
|-----------------------------|--|-----|-----|------|------|
| <b>INPUT</b>                |  |     |     |      |      |
| $t_{VIN\_OVZ\_DGL}$         | $VIN\_OVP$ deglitch, $VIN$ falling   |     | 30  |      | ms   |
| <b>BATTERY CHARGER</b>      |  |     |     |      |      |
| $t_{REC\_SC}$               | BAT_OCP retry hiccup time  |     | 250 |      | ms   |
| $t_{RETRY\_SC}$             | Retry window for BAT_OCP   |     | 2   |      | s    |
| $t_{TSHUT\_DGLZ}$           | TSHUT recovery deglitch time   |     | 100 |      | ms   |
| <b>POWER SEQUENCING</b>     |  |     |     |      |      |
| $t_{SEQ\_DELAY}$            | Delay time between power sequence time instances, SEQUENCE_DELAY_TIME = b00  |     | 1   |      | ms   |
|                             | Delay time between power sequence time instances, SEQUENCE_DELAY_TIME = b01  |     | 4   |      | ms   |
|                             | Delay time between power sequence time instances, SEQUENCE_DELAY_TIME = b10  |     | 16  |      | ms   |
|                             | Delay time between power sequence time instances, SEQUENCE_DELAY_TIME = b11  |     | 64  |      | ms   |
| $t_{SEQ\_PG\_DELAY}$        | Delay time from time instance d to power sequence power good being evaluated |     | 4   |      | ms   |
| <b>I<sup>2</sup>C CLOCK</b> |  |     |     |      |      |
| $F_{I2C\_CLK}$              | SCL clock frequency  |     |     | 1000 | KHz  |

## 6.7 Typical Characteristics

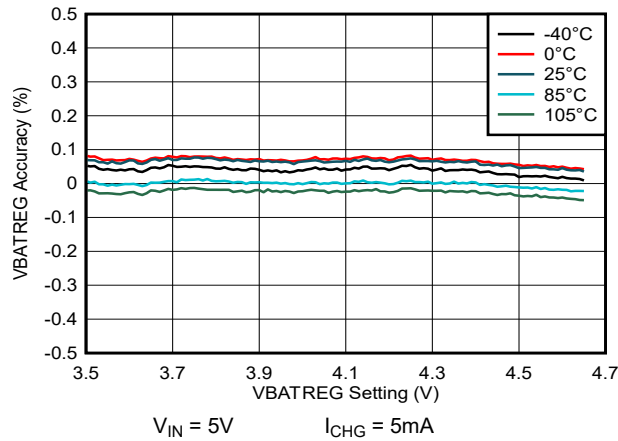


Figure 6-1. Charge Voltage Accuracy vs VBATREG Setting

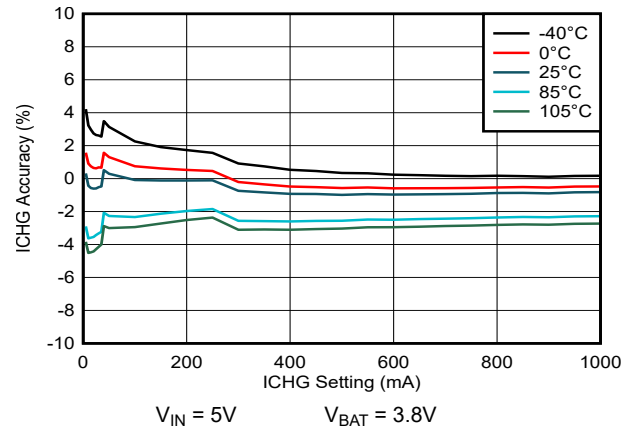


Figure 6-2. Charge Current Accuracy vs ICHG Setting

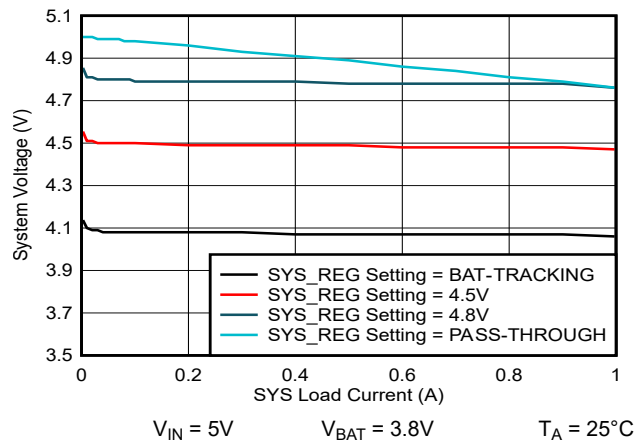


Figure 6-3. System Load Regulation

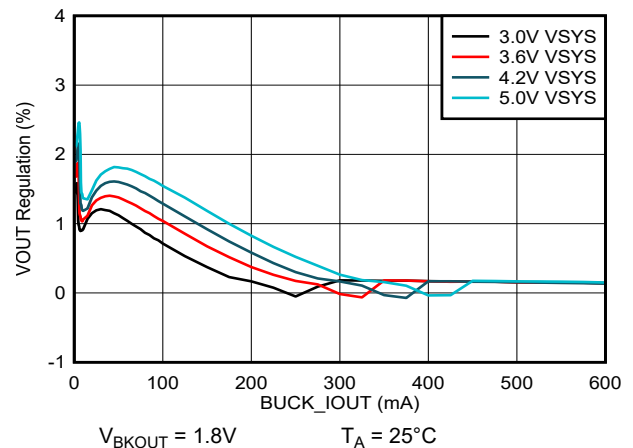


Figure 6-4. Buck Load Regulation

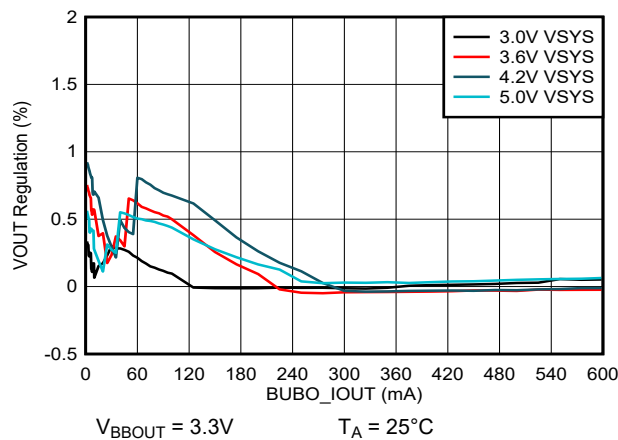


Figure 6-5. Buck-Boost Load Regulation

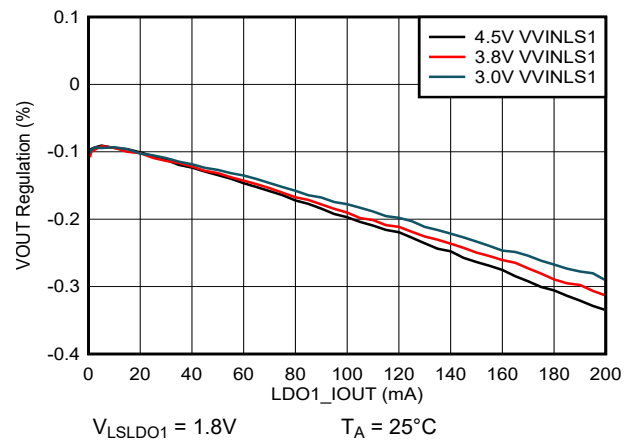


Figure 6-6. LDO1 Load Regulation



## 6.7 Typical Characteristics (continued)

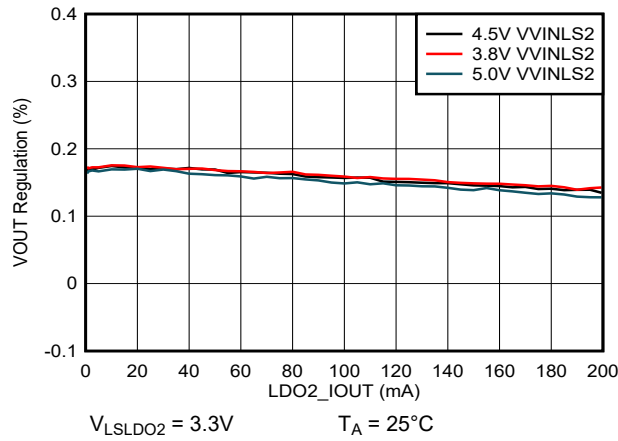


Figure 6-7. LDO2 Load Regulation

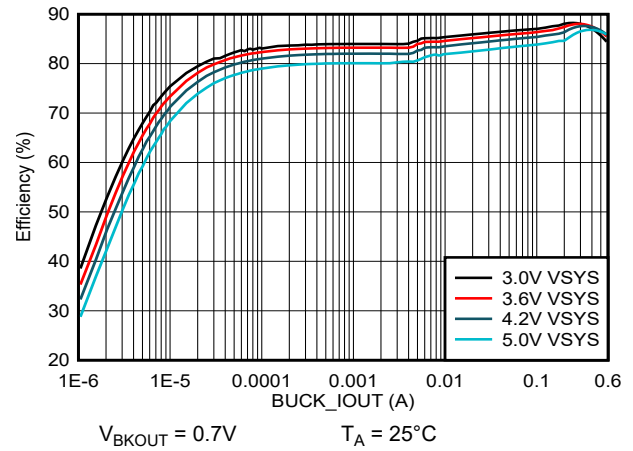


Figure 6-8. Buck Efficiency

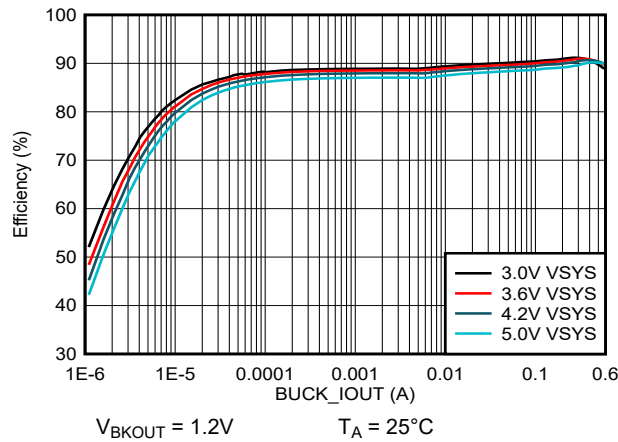


Figure 6-9. Buck Efficiency

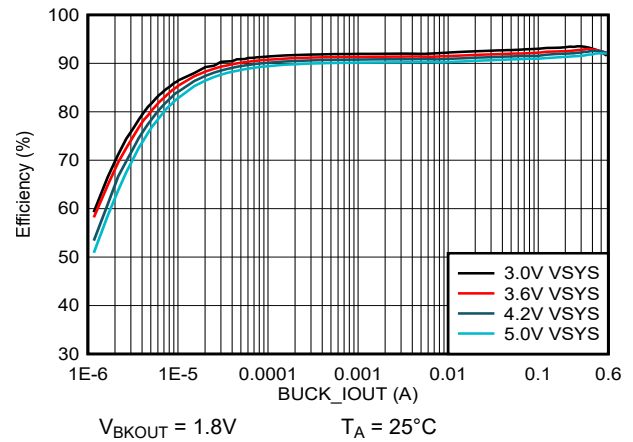


Figure 6-10. Buck Efficiency

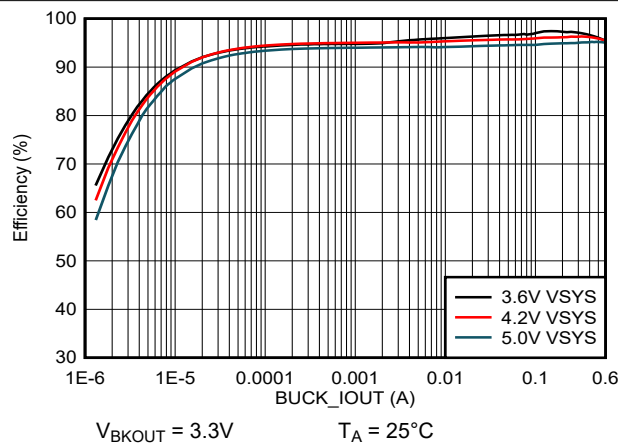


Figure 6-11. Buck Efficiency

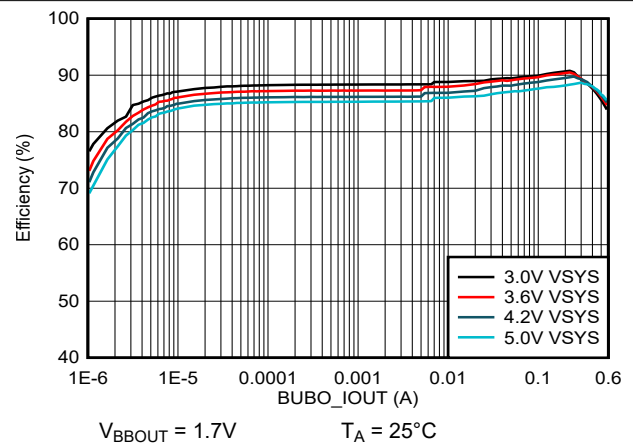


Figure 6-12. Buck-Boost Efficiency

## 6.7 Typical Characteristics (continued)

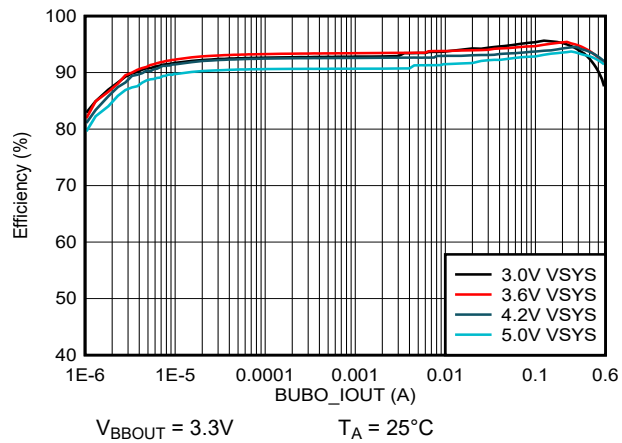


Figure 6-13. Buck-Boost Efficiency

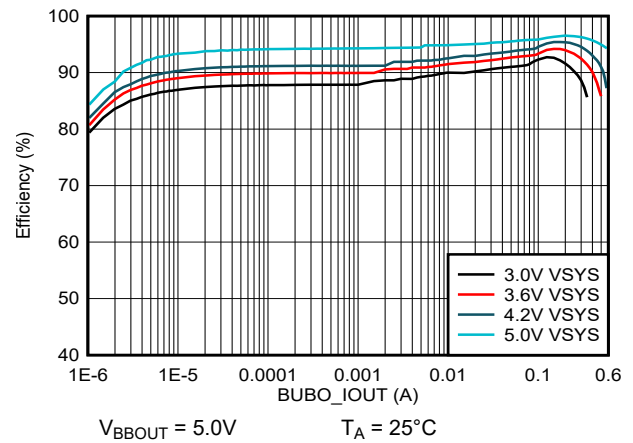


Figure 6-14. Buck-Boost Efficiency

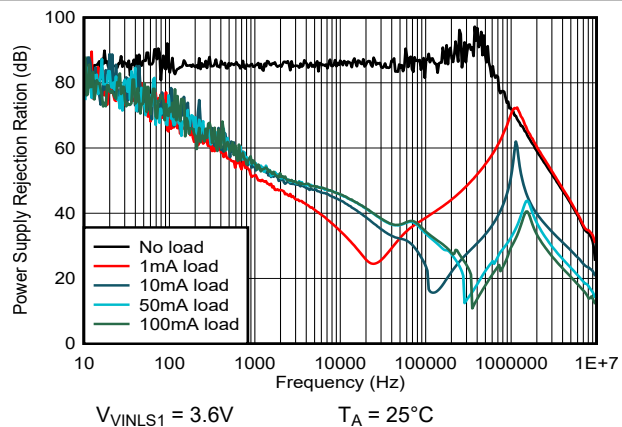


Figure 6-15. LDO1 PSRR vs Frequency and Load

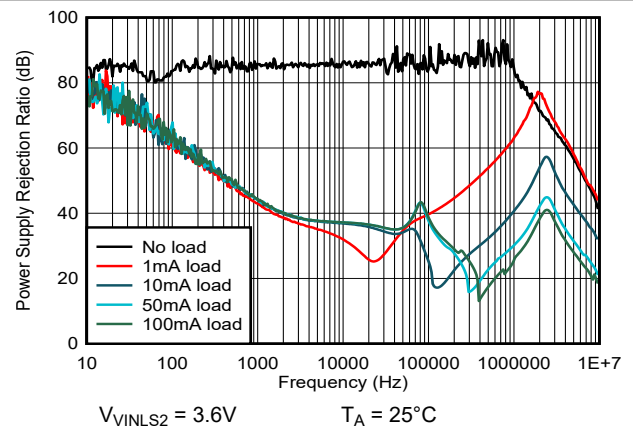


Figure 6-16. LDO2 PSRR vs Frequency and Load

## 7 Detailed Description

### 7.1 Overview

The BQ25190 is a battery management unit (BMU) with integrated linear charger, voltage regulators, 12-bit ADC, and multifunction GPIOs. The ultra-low quiescent current of integrated linear charger and voltage regulators ensures the low power consumption. The flexibility offered by ADC and multifunction GPIOs enables the easy system monitoring and control.

The device integrates a linear charger that allows the battery to be charged with a programmable charge current. In addition to the charge current, other charging parameters can be programmed through I<sup>2</sup>C such as the pre-charge, termination and input current limit currents.

The power path allows the system to be powered from a regulated output, SYS, even when the battery is depleted or charging, by drawing power from IN pin. It also prioritizes the system load in SYS, reducing the charging current, if necessary, in order support the load when input power is limited. If the input supply is removed and the battery voltage level is above V<sub>BUVLO</sub>, SYS will automatically and seamlessly switch to battery power.

There are two major subsystems in the charger and power path system, the BATSYS and ILIMSYS. The BATSYS consists of the Battery FET (BATFET) and analog and digital control circuitry that control the BATFET operation. There are several loops that influence the charge current: constant current loop (CC), constant voltage loop (CV), input current limit, DPPM, and VINDPM. During the charging process, all loops are enabled and the one that is dominant takes control. The ILIMSYS block consists of back-to-back blocking FETs to prevent reverse currents from SYS to IN as well as the control circuitry to regulate the input current and prevent excessive current from being drawn from the IN power supply for more reliable operation.

The device supports multiple battery chemistries for single-cell applications, hence the need to support multiple battery regulation voltage (V<sub>REG</sub>) and charge current (I<sub>CHG</sub>) options.

The device integrates one high efficiency step-down Buck converter with ultra-low operating quiescent current. It employs DCS-control architecture with low output voltage ripple and excellent load transient performance. It supports dynamic voltage scaling (DVS) with its output voltage being adjusted through I<sup>2</sup>C or GPIO pins. The input of Buck converters is internally connected to SYS.

In addition to the integrated Buck, a Buck-boost converter is also integrated to support a wide range of output voltage from 1.7V to 5.2V, which is programmable through I<sup>2</sup>C.

The device also integrates two ultra-low quiescent current LDOs. The output voltages of these LDOs can be programmed through I<sup>2</sup>C. With input pins available, they can be used to connect or disconnect system load when configured to be operate in bypass mode.

A 12-bit ADC enables battery and system monitoring. It can also be used to measure the battery temperature using a thermistor connected to the TS pin as well as external system signals through the ADCIN pin.


In addition to functioning as MCU GPIO expanders, the four integrated multi-function GPIOs can also be used as enable signals for internal or external voltage regulator power rails, sequence power good indicator, or VSEL pins.

#### 7.1.1 Battery Charging Process


When a valid input source is connected ( $V_{IN} > V_{UVLO}$  and  $V_{BAT} + V_{SLEEP\_HYST} < V_{IN} < V_{IN\_OVP}$ ), the state of the CHG\_DIS bit, the  $\overline{CE}$  pin, and the TS pin determine whether a charge cycle is initiated. If either CHG\_DIS bit or  $\overline{CE}$  pin is set to disable charging, even if  $V_{HOT} < V_{TS} < V_{COLD}$  and a valid input source is connected, the BATFET is turned off, preventing any kind of charging of the battery. A charge cycle is initiated when CHG\_DIS bit is written to 0 and  $\overline{CE}$  pin is low. If either the CHG\_DIS bit is set to disable charging or the  $\overline{CE}$  pin is high, the device will shut off charging to the battery. Both  $\overline{CE}$  and CHG\_DIS have to be enabled for charging to occur. The following table shows the  $\overline{CE}$  pin and CHG\_DIS bit priority to enable/disable charging.

**Table 7-1. Charge Enable Function Through  $\overline{\text{CE}}$  Pin and CHG\_DIS Bit**

| $\overline{\text{CE}}$ PIN | CHG_DIS BIT | CHARGING |
|----------------------------|-------------|----------|
| LOW                        | 0           | Enabled  |
| LOW                        | 1           | Disabled |
| HIGH                       | 0           | Disabled |
| HIGH                       | 1           | Disabled |

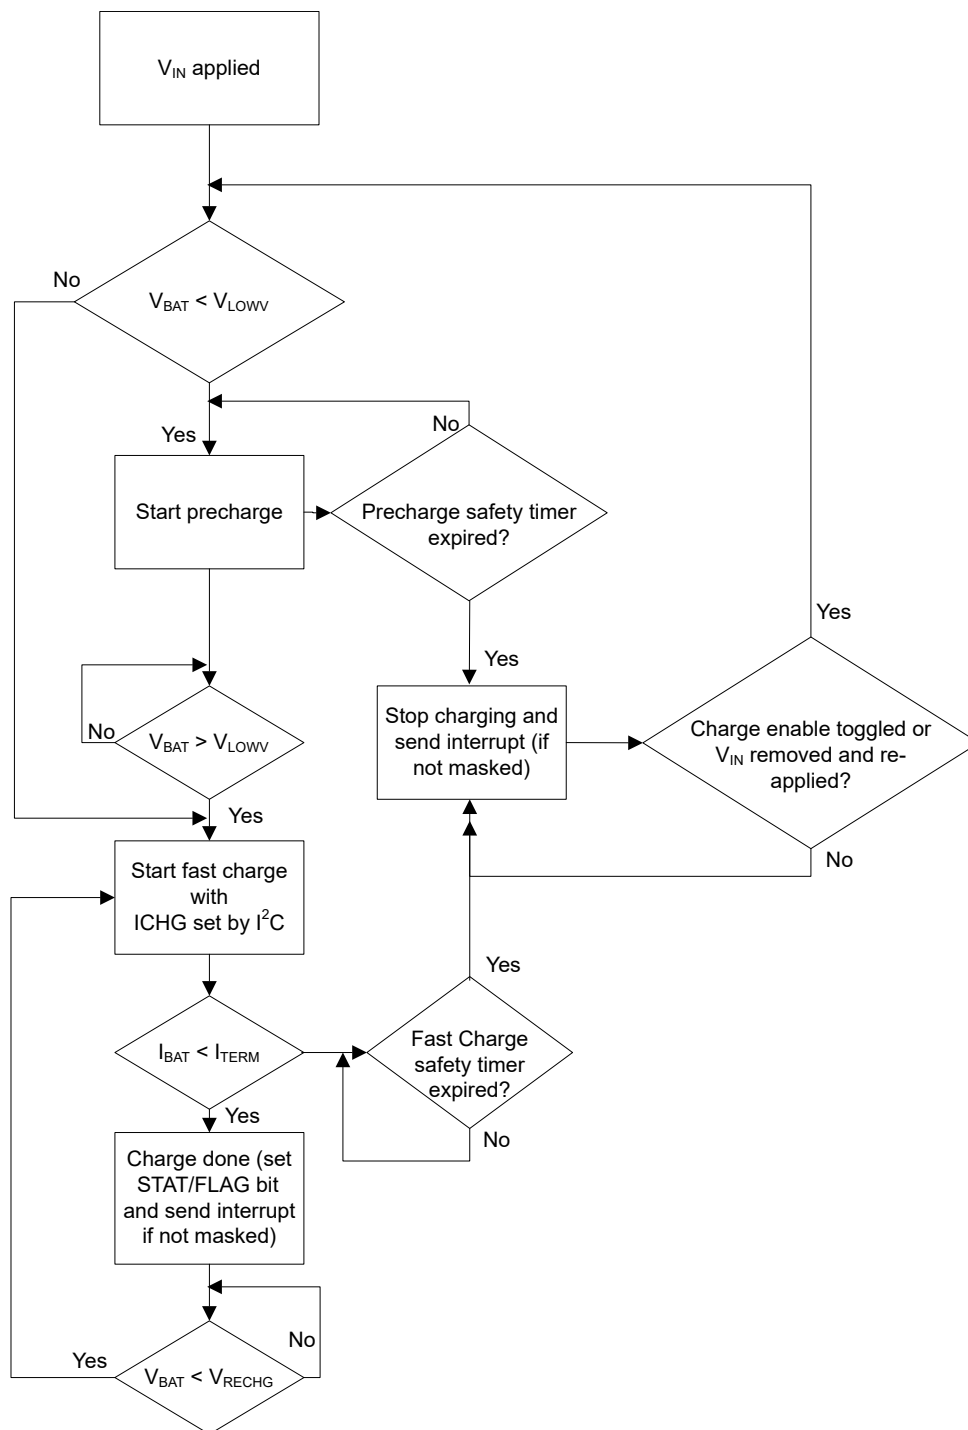**Figure 7-1. Charger Flow Diagram**

The following figure illustrates a typical charge cycle.

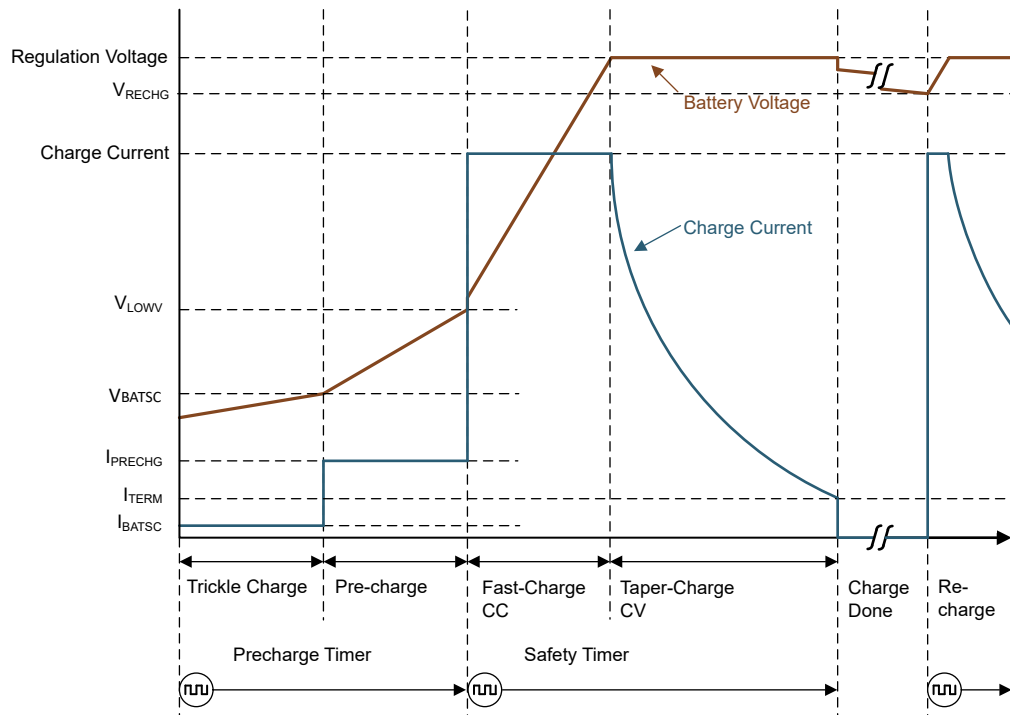

**Figure 7-2. Battery Charging Profile**

#### 7.1.1.1 Trickle Charge

In order to prevent damage to the battery, the device will charge the battery at a much lower current level ( $I_{BATSC}$ ) when the battery voltage is below the  $V_{BATSC}$ . During trickle charge, the device still counts against the precharge safety timer. The trickle charge and precharge are counting against the safety timer, for which the duration is 25% of the fast charge timer. The  $I_{BATSC}$  bit determines if the trickle charge current is 8mA or 1mA.

#### 7.1.1.2 Precharge

When battery voltage is above the  $V_{BATSC}$  but lower than  $V_{LOWV}$  threshold, the battery is charged with the precharge current level. The precharge current ( $I_{PRECHG}$ ) can be programmed through I<sup>2</sup>C and can be adjusted by the host with  $I_{PRECHG}$  bit. Once the battery voltage reaches  $V_{LOWV}$ , the charger will then operate in the fast charge mode, charging the battery at  $I_{CHG}$ .

During precharge, the safety timer is set to 25% of the safety timer value during fast charge. In the case where termination is disabled, precharge current is set to 20% of fast charge current setting.

#### 7.1.1.3 Fast Charge

The charger has two main control loops that control charging when  $V_{BAT} > V_{LOWV}$ : the Constant Current (CC) and Constant Voltage (CV) loops. When the CC loop is active, the battery is charged at the maximum charge current level  $I_{CHG}$ , unless there is a TS fault condition (or JEITA condition),  $V_{INDPM}$  is active, thermal regulation or DPPM is active. Once  $V_{BAT}$  reaches the  $V_{REG}$  level, the CV loop becomes active and the charging current starts tapering off. Once the charging current reaches the termination current ( $I_{TERM}$ ), the charge is done and  $CHG\_STAT$  is set to b11. If  $V_{REG}$  is set higher than 4.65 V by the I<sup>2</sup>C, the battery regulation voltage is still maintained at 4.65 V. The device will switch to fast charge based on  $V_{LOWV}$  setting.

The fast charge current is programmable through I<sup>2</sup>C with  $I_{CHG}$  bits in  $I_{CHG\_CTRL}$  register.


#### 7.1.1.4 Termination

The device will automatically terminate charging once the charge current reaches  $I_{\text{TERM}}$ , which is programmable through I<sup>2</sup>C. After termination the charger will operate in high impedance mode, disabling the BATFET to disconnect the battery. Power is provided to the system (SYS) by IN supply as long as  $V_{\text{IN}} > V_{\text{UVLO}}$ ,  $V_{\text{IN}} > V_{\text{BAT}} + V_{\text{SLEEPZ}}$  and  $V_{\text{IN}} < V_{\text{IN\_OVP}}$ .

Termination is only enabled when the charger CV loop is active. Termination is disabled if the charge current reaches  $I_{\text{TERM}}$  while the VINDPM, DPPM, ILIM, or thermal regulation loops are active. The charger will only go into the termination when the current drops to  $I_{\text{TERM}}$  due to the battery reaching the target voltage and not due to the charge current limitation imposed by the previously mentioned controlled loops.

Post termination, the BATFET is disabled and the voltage on BAT pin is monitored to check if it drops to  $V_{\text{RECHG}}$  threshold. If it does, a new charge cycle is established. The safety timers are reset. During charging or even when charge done, a higher SYS load will be supported through the supplement operation.

## 7.2 Functional Block Diagram

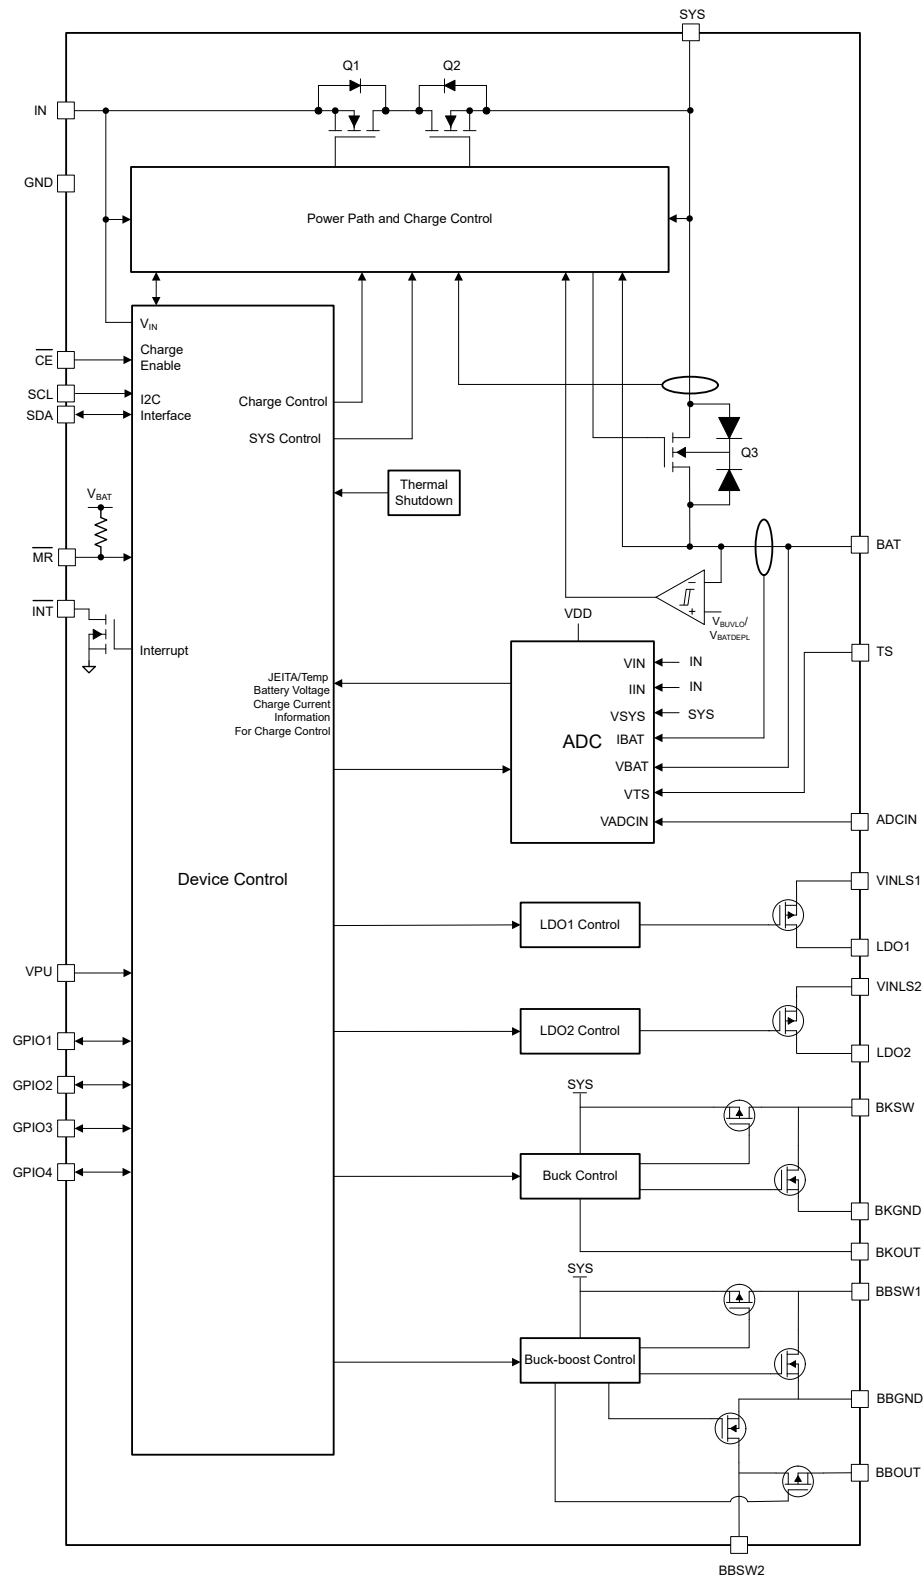

**Figure 7-3. Functional Block Diagram**

## 7.3 Feature Description

### 7.3.1 Input Voltage Based Dynamic Power Management (VINDPM)

The VINDPM prevents the input voltage from collapsing to a point where SYS would drop. This is done by reducing the current drawn by charger enough to keep  $V_{IN}$  regulated at a certain voltage ( $V_{INDPM}$ ).

During the normal charging process, if the adapter power connected at IN is not sufficient to support both charging current and system load current,  $V_{IN}$  decreases. Once the supply drops to  $V_{INDPM}$ ,  $I_{IN}$  is reduced to the current level which the adapter can provide through the blocking FETs to prevent the further reduce of  $V_{IN}$ . The  $V_{INDPM}$  is programmable through the I<sup>2</sup>C register VINDPM and it can also be disabled. VINDPM\_ACTIVE\_STAT bit is set when VINDPM is active. The safety timer is doubled when VINDPM is active if TMR2X\_EN bit is set to 1. Additionally, termination is disabled when VINDPM is active.

### 7.3.2 Dynamic Power Path Management Mode (DPPM)

With a valid input source connected, the power-path management circuitry monitors the input voltage and current continuously. The current into IN is shared between charge current and system load current. If the sum of the charge current and system load current exceeds  $I_{LIM}$  set by ILIM or the input current level reduced to by the VINDPM (whichever is lower),  $V_{SYS}$  can drop to the DPPM voltage threshold. In the case, the charge current is reduced by the DPPM loop through the BATFET so that  $V_{SYS}$  is regulated at  $V_{BAT} + V_{DPPM}$ . If  $V_{SYS}$  drops to supplement mode threshold after BATFET charging current is reduced to zero, the part enters supplement mode. Termination is disabled when the DPPM loop is active.

The DPPM can be disabled by setting VDPPM\_DIS to 1 which may allow smaller voltage difference between  $V_{SYS}$  and  $V_{BAT}$ .

The DPPM cannot be disabled when the device is in BATDEPL.

### 7.3.3 Battery Supplement Mode

When  $V_{SYS}$  drops to  $V_{BAT} - V_{BSUP1}$ , the device enters supplement mode in which the the battery supplements the system load. The battery stops supplementing the system load when  $V_{SYS}$  rises to  $V_{BAT} + V_{BSUP2}$ . In supplement mode, the battery supplement current is not regulated. Termination is disabled in supplement mode.  $V_{BAT}$  needs to be higher than battery depletion threshold ( $V_{BATDEPL}$ ) for the device to be able to enter supplement mode.

### 7.3.4 Sleep Mode

The device is in low-power sleep mode if  $V_{IN}$  is blow sleep mode threshold and higher than the undervoltage lockout threshold. In sleep mode, the input is isolated from the battery. This feature prevents draining the battery during the absence of  $V_{IN}$ . When the device enters the sleep mode, VIN\_PGOOD\_STAT is set to 0.

### 7.3.5 SYS Power Control

The device also offers the option to control SYS through the SYS\_MODE bits. SYS\_MODE can force SYS to be supplied by BAT instead of IN (even if  $V_{IN} > V_{BAT} + V_{SLEEP\_HYST}$ ), leave SYS floating or pull SYS to ground. The table below show the device behavior based on SYS\_MODE setting:

**Table 7-2. SYS\_MODE Bit Settings**

| SYS_MODE | DESCRIPTION                       | SYS SUPPLY | SYS PULLDOWN   |
|----------|-----------------------------------|------------|--|
| b00      | Normal Operation                  | IN or BAT  | Off except in SYS pulldown states shown in <a href="#">Table 7-3</a> |
| b01      | Force BAT power (IN disconnected) | BAT        | Off except in SYS pulldown states shown in <a href="#">Table 7-3</a> |
| b10      | SYS Off –Floating                 | None       | Off  |
| b11      | SYS Off – Pulled Down             | None       | On   |

**SYS\_MODE = b00**



SYS will be powered from IN if  $V_{IN} > V_{IN\_UVLO}$ ,  $V_{IN} > V_{BAT} + V_{SLEEPZ\_HYST}$ , and  $V_{IN} < V_{IN\_OVP}$  (VIN\_PGOOD). SYS will be powered by BAT if these conditions are not met. SYS will be disconnected from IN or BAT and pulled down when a hardware reset (HW\_RESET) occurs, the device goes into ship mode, or SYS\_MODE is set to b11.

#### **SYS\_MODE = b01**

When this configuration is set, SYS will be powered by BAT if  $V_{BAT} > V_{BATDEPL}$  regardless of  $V_{IN}$  state. This allows the host to minimize the current draw from the adapter while it is still connected as needed in the system. If SYS\_MODE = b01 is set while  $V_{BAT} < V_{BATDEPL}$ , the SYS\_MODE = b01 setting will be ignored and the device will go to the default SYS mode. When the device is in the forced battery power mode (SYS\_MODE = b01), if  $V_{BAT} < V_{BATDEPL}$ , the device will go to the default SYS mode.

If the adapter is toggled ( $V_{IN} < V_{IN\_UVLO}$ ), the device will switch to the default SYS mode. This prevents the device from needing a POR in order to restore power to the system thereby allowing battery charging. If SYS\_MODE = b01 is set during charging, charging will be stopped and the battery will start to power SYS as needed. The behavior is similar to that when the input adapter is disconnected.

#### **SYS\_MODE = b10**

When this configuration is set, SYS will be disconnected and left float. The device remains on and active. Toggling  $V_{IN}$  will reset the SYS\_MODE to the default SYS mode.

#### **SYS\_MODE = b11**

When this configuration is set, SYS will be disconnected from both IN and BAT and pulled to ground by  $R_{SYS\_PD}$ . Toggling  $V_{IN}$  ( $V_{IN} < V_{IN\_UVLO}$ ) will reset the SYS\_MODE to the default SYS mode. Power-down sequence is implemented when setting SYS\_MODE to b11.

#### **7.3.5.1 SYS Pulldown Control**

The device has an internal pulldown on the SYS pin which is enabled in the following cases:

**Table 7-3. SYS Pulldown States**

| STATE                              | NOTES  |
|------------------------------------|--|
| ship mode                          | Pulldown on SYS is enabled with power-down sequence. Then the device enters the ship mode.   |
| HW_RESET                           | Pulldown on SYS is enabled with power-down sequence. The SYS pull-down is retained until the autowake timer expires.                           |
| SYS_MODE = b11 (SYS pulldown mode) | Pulldown on SYS is enabled with power-down sequence. The SYS pull-down is retained until SYS_MODE is changed to b00/b01/b10 or VIN is toggled. |

#### **7.3.6 SYS Regulation**

The device includes a SYS voltage regulation loop. By regulating the SYS voltage, the device prevents downstream devices connected to SYS from being exposed to voltages as high as  $V_{IN\_OVP}$ . SYS regulation is only active when  $V_{IN} > V_{IN\_UVLO}$ ,  $V_{IN} > V_{BAT} + V_{SLEEPZ\_HYST}$  and  $V_{IN} < V_{IN\_OVP}$  (VIN\_PGOOD).

SYS voltage regulation target can be controlled through the SYS\_REG\_CTRL bits on the SYS\_REG register to either track the battery, set to a fixed voltage, or enable pass-through modes.

In battery tracking mode, the minimum voltage is at  $V_{MINSYS}$  value for battery < 3.6 V. As battery voltage increases,  $V_{SYS}$  is regulated to typically 225 mV above battery. If  $V_{IN} < V_{MINSYS}$  and VIN\_PGOOD is still active, then the SYS will be in dropout.

In the fixed voltage mode, the SYS voltage is regulated to a target set by the host ranging from 4.4 V to 4.9 V. If  $V_{IN}$  voltage is less than the SYS target voltage, then the device will be in dropout mode.

In pass-through mode, the SYS path is unregulated and the  $V_{SYS}$  voltage is equal to  $V_{IN}$ . SYS can only be set to pass-through mode if VIN\_OVP bit is set to 0 for 5.7V  $V_{IN\_OVP}$ . If VIN\_OVP bit is already set to 1 for 18.5V  $V_{IN\_OVP}$ , SYS cannot be set to pass-through mode (SYS\_REG\_CTRL = 111) through I<sup>2</sup>C transaction. Likewise, if SYS is already in pass-through mode, the  $V_{IN\_OVP}$  cannot be set to 18.5V (VIN\_OVP = 1) through I<sup>2</sup>C transaction.

Sufficient SYS capacitance should be used so that  $V_{SYS}$  does not exceed maximum ratings of the system loads.

**Table 7-4. SYS Voltage Regulation Settings**

| SYS_REG_CTRL   | VSYS TARGET                   |
|----------------|-------------------------------|
| b000           | VBAT + 225 mV (3.8 V minimum) |
| b001           | 4.4                           |
| b010 (default) | 4.5                           |
| b011           | 4.6                           |
| b100           | 4.7                           |
| b101           | 4.8                           |
| b110           | 4.9                           |
| b111           | Pass-through                  |

### 7.3.7 ILIM Control

The input current limit can be controlled by the ILIM bits through I<sup>2</sup>C.

If the ILIM regulation loop is active, ILIM\_ACTIVE\_STAT bit is set after the input current limit deglitch  $t_{LIM}$ . When the ILIM regulation loop is active, termination is suspended.

The ILIM\_ACTIVE\_MASK will prevent interrupt from being issued but does not override the ILIM behavior itself. ILIM value can be programmed dynamically through the I<sup>2</sup>C by the host. The ILIM settings of 100mA and 500mA are designed to be the maximum value to support standard systems.

### 7.3.8 Protection Mechanisms

#### 7.3.8.1 Input Overvoltage Protection

Input overvoltage protection protects the device and downstream components connected to SYS, and BAT against damage from overvoltage on the input supply. The input overvoltage protection thresholds are dependent on VIN\_OVP bit. When  $V_{IN} > V_{IN\_OVP}$ , a VIN overvoltage condition is determined to exist. During the VIN overvoltage condition, the device turns the input FET OFF, battery discharge FET ON, sends a single 128-μs pulse on INT unless VIN\_OVP\_FAULT\_MASK is set to be 1, and the fault bit (VIN\_OVP\_FAULT\_FLAG) is updated over I<sup>2</sup>C. The VIN\_PGOOD\_STAT bit also is affected by the VIN overvoltage condition as the VIN power good (VIN\_PGOOD) condition will fail. Once the VIN overvoltage condition is removed ( $V_{IN} \leq V_{IN\_OVP} - V_{IN\_OV\_HYST}$ ), the VIN\_OVP\_STAT bit is cleared and the device returns to normal operation. Thereafter, a VIN power good (VIN\_PGOOD) condition is determined if  $V_{IN} > V_{BAT} + V_{SLEEPZ\_HYST}$  and  $V_{IN} > V_{IN\_UVLO}$ .

#### 7.3.8.2 System Short Protection

When a valid adapter is connected to the device, the device detects if the SYS pin is shorted. If  $V_{SYS} < V_{SYS\_SHORT}$ , SYS short fault protection is implemented to turn off the input FET for ~200μs and turn it back ON for 5 ms for SYS to rise above  $V_{SYS\_SHORTZ}$ . If after 10 tries, the SYS short still persists, the device will not turn on input FETs for 2s and 10-retry counter is reset while BATFET is turned on (if  $V_{BAT} > V_{BATDEPL}$ ) to power SYS. SYS\_SHORT\_FAULT\_STAT and SYS\_SHORT\_FAULT\_FLAG are set to 1 with interrupt signal being sent if not masked by SYS\_SHORT\_FAULT\_MASK. After 2s, SYS\_SHORT\_FAULT\_STAT is reset to 0 and the device will turn on the input FET for 5 ms and retry 10 times if necessary until the SYS rises above  $V_{SYS\_SHORTZ}$ .

### 7.3.8.3 Battery Depletion Protection

To prevent deep discharge of the battery, the device integrates a battery depletion protection feature which disengages the BAT to SYS path when voltage at the battery drops below  $V_{BATDEPL}$  programmed by BATDEPL bits in the CHARGECTRL1 register.

In battery only mode, the BATFET is turned on if  $V_{BAT}$  rises to be higher than  $V_{BATDEPL}$ . The BATFET is turned off if  $V_{BAT}$  falls to be lower than  $V_{BATDEPL}$ .

BATDEPL status is reported by BATDEPL\_FAULT\_STAT bit. BATDEPL\_FAULT\_FLAG is set to 1 if battery depletion is detected. a 128- $\mu$ s pulse ( $\overline{INT}$  pin pulled down) is sent on  $\overline{INT}$  to notify the host if not masked by BATDEPL\_FAULT\_MASK.

#### 7.3.8.3.1 Battery Undervoltage Lockout

If VIN is not present ( $V_{IN} < V_{IN\_UVLO}$ ),  $V_{BAT}$  needs to be higher than  $V_{BUVLO}$  for the device to be powered up.

In battery mode and ship mode (including LDO1-ON ship mode), the device is turned off if  $V_{BAT}$  falls below  $V_{BUVLO}$ .

### 7.3.8.4 Battery Overcurrent Protection

In order to protect the device from overcurrent and prevent excessive battery discharge current, the device detects if the discharge current on the BATFET exceeds  $I_{BAT\_OCP}$ . If the  $I_{BAT\_OCP}$  is reached, the BATFET is turned off and the device starts operating in hiccup mode, re-enabling the BATFET  $t_{REC\_SC}$  (250 ms) after being turned OFF by the overcurrent condition. If the overcurrent condition is triggered upon retry for 4 to 7 consecutive times in a 2-s window, the BATFET remains off until a valid VIN is connected ( $VIN\_PGOOD$ ). If the overcurrent condition and hiccup operation occur while in supplement mode where VIN is already present, VIN must be toggled in order for the BATFET to be enabled and start another detection cycle.

### 7.3.8.5 Safety Timer and Watchdog Timer

At the beginning of each charge cycle mode (Precharge or Fast Charge), the device starts the respective mode safety timer. If charging has not terminated before the programmed safety timer,  $t_{MAXCHG}$ , expires or the device does not exit the precharge mode before  $t_{PRECHG}$  expires, charging is disabled. The precharge safety timer,  $t_{PRECHG}$ , is 25% of  $t_{MAXCHG}$ . When a safety timer fault occurs, a single 128- $\mu$ s pulse is sent on the  $\overline{INT}$  pin and the SAFETY\_TMR\_FAULT\_FLAG is set to 1 in the I<sup>2</sup>C register.

If the safety timer has expired, the device will produce an interrupt and update the SAFETY\_TMR\_FAULT\_FLAG bit on the register map. The safety timer duration is programmable using the SAFETY\_TIMER bits. When the safety timer is active, changing the safety timer duration resets the safety timer. The device also contains a 2XTMR\_EN bit that doubles the fast charge safety timer duration to prevent premature safety timer expiration when the charge current is reduced by a high load on SYS (DPM operation- causing VDPPM to be enabled), VINDPM, ILIM, thermal regulation, or a NTC (JEITA) condition. When 2XTMR\_EN bit is set, the fast charge timer is allowed to run at half speed when any loop is active other than CC or CV. In the event where during CC mode the battery voltage drops to push the charger into precharge mode, (due to a large load on battery, thermal events, and so forth) the safety timer will reset counting through precharge and then resetting the fast charge safety timer. If the device entered battery supplement mode while in precharge, CC or CV mode, while the charger is not disabled, the device will suspend the safety timer till the charging can resume back again. This prevents the safety timer from resetting when a supplement condition is caused.

In addition to the safety timer, the device contains a watchdog timer that monitors the host through the I<sup>2</sup>C interface. The watchdog timer is enabled by default and may be disabled by the host through an I<sup>2</sup>C transaction. Once the initial transaction is received, the watchdog timer is started. The watchdog timer is reset by any transaction by the host using the I<sup>2</sup>C interface. If the watchdog timer expires without a reset from the I<sup>2</sup>C interface, selected registers are reset to the default values. The watchdog timer can be set through the WATCHDOG\_SEL bits.

**Table 7-5. Watchdog Settings**

| WATCHDOG_SEL | ACTION  |
|--------------|---|
| b00          | Device only performs a reset for selected register bits after 160s of the last I <sup>2</sup> C transaction |
| b01          | Device issues a HW_RESET after 160s of last I <sup>2</sup> C transaction                                    |
| b10          | Device sissue a HW_RESET after 40s of the last I <sup>2</sup> C transaction                                 |
| b11          | Watchdog function is disabled   |

### 7.3.8.6 Buck Overcurrent Protection


The Buck rail integrates a current limit on the high-side and low-side MOSFETs to protect the rail against overloading or short circuit conditions. The current in the switches is monitored cycle by cycle. If the high-side MOSFET current limit trips, the high-side MOSFET is turned off and the low-side MOSFET is turned on to ramp down the inductor current. Once the inductor current through the low-side switch decreases below the low-side MOSFET current limit, the low-side MOSFET is turned off and the high-side MOSFET turns on again.

### 7.3.8.7 LDO Overcurrent Protection

LDO1/LDO2 has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is a hybrid brickwall-foldback scheme. The current limit transitions from a brickwall scheme to a foldback scheme at the foldback voltage ( $V_{FOLDBACK}$ ). In a high-load current fault with the output voltage above  $V_{FOLDBACK}$ , the brickwall scheme limits the output current to the current limit ( $I_{CL}$ ). When the voltage drops below  $V_{FOLDBACK}$ , a foldback current limit activates that scales back the current as the output voltage approaches GND. When the output is shorted, the device supplies a typical current called the short-circuit current limit ( $I_{SC}$ ).  $I_{CL}$  and  $I_{SC}$  are listed in the *Electrical Characteristics* table.

For this device,  $V_{FOLDBACK} = 0.5$  V.

Figure 7-4 shows a diagram of the foldback current limit.

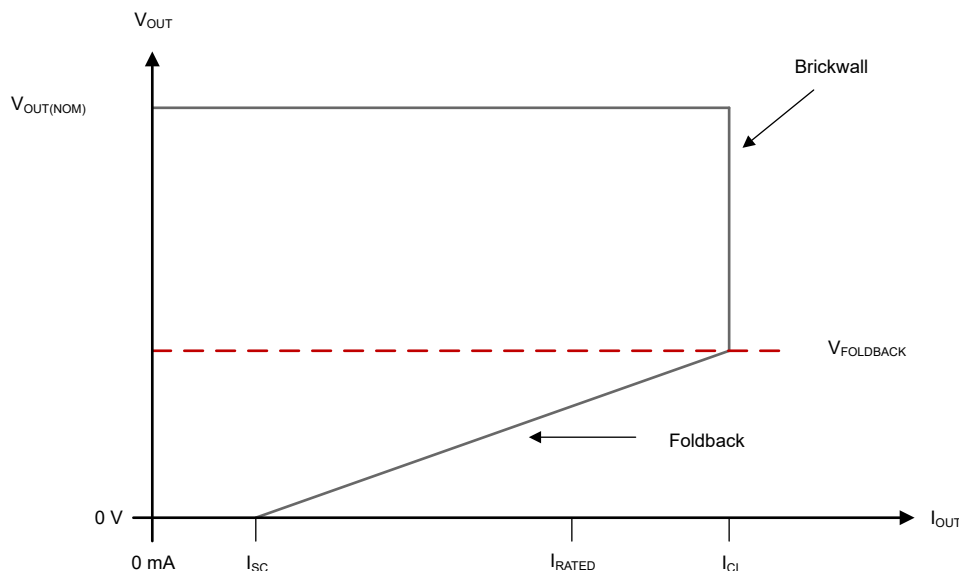**Figure 7-4. Foldback Current Limit**

### 7.3.8.8 Buck-Boost Overcurrent Protection

The Buck-boost has a inbuilt short circuit protection function to limit the current through its buck bridge high-side MOSFET. The maximum current that flows is limited by the peak current limit,  $I_{OC\_BB}$ . The typical current limit is 1.55 A for the "unlimited" input current limit setting and 0.29 A for 100 mA input current limit setting. During

startup, the typical current limit is 0.6 A typically to prevent inrush current. The output voltage decreases if the load is higher than the peak current limit.

#### 7.3.8.9 Buck-Boost Output Short-Circuit Protection

The Buck-boost rail integrates the output short-circuit protection to limit the power dissipation in case the output is shorted. If the Buck-boost output voltage falls below 1.25V typical, the Buck-boost rail input current is limited to below 30mA typically.

#### 7.3.8.10 Buck/Buck-Boost/LDO Undervoltage Lockout

Buck/Buck-boost/LDO1/LDO2 has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage, allowing a controlled and consistent on and off of the output voltage. The UVLO comparator shuts down the device when the input voltage is less than UVLO falling threshold and enables the rail when the input voltage exceeds UVLO rising threshold. The LDO's UVLO thresholds are still active if it is configured to be operating in the bypass mode.

#### 7.3.8.11 Sequence Undervoltage Lockout

If power sequence is used, the sequence UVLO (SEQ\_UVLO) condition needs to be met in order for any sequence power rail to be enabled, which is that  $V_{SYS}$  needs to be higher than the SEQ\_UVLO thresholds ( $V_{SEQ\_UVLO}$  and  $V_{SEQ\_UVLOZ}$ ). SEQ\_UVLO disables all the sequence power rails at the same time.

#### 7.3.8.12 Thermal Protection and Thermal Regulation

During operation, to protect the device from damage due to overheating, the junction temperature of the die is monitored.

In adapter mode, the TSHUT fault is triggered when  $T_J$  reaches  $T_{SHUT\_RISING}$ , or  $T_{J\_BUCK}$  reaches  $T_{SHUT\_RISING\_BUCK}$  if Buck is enabled, or  $T_{J\_BB}$  reaches  $T_{SHUT\_RISING\_BB}$  if Buck-boost is enabled, or  $T_{J\_LDO1}$  reaches  $T_{SHUT\_RISING\_LDO1}$  if LDO1 is enabled, or  $T_{J\_LDO2}$  reaches  $T_{SHUT\_RISING\_LDO2}$  if LDO2 is enabled. In this case, the device stops charging, disables all the operating power rails, and then turns off input FETs and BATFET. After  $t_{TSHUT\_DGLZ}$ , if  $T_J$  is below  $T_{SHUT\_FALLING}$ , the input FETs and BATFET are turned on to power SYS and charging can be restarted. The integrated power rails are reenabled when TSHUT fault recovers. The power-up sequence is implemented if power sequence is used with  $V_{SYS} > V_{SEQ\_UVLOZ}$ .

In battery mode with ADC disabled ( $ADC\_EN = 0$ ), the TSHUT fault is triggered when  $T_{J\_BUCK}$  reaches  $T_{SHUT\_RISING\_BUCK}$  if Buck is enabled, or  $T_{J\_BB}$  reaches  $T_{SHUT\_RISING\_BB}$  if Buck-boost is enabled, or  $T_{J\_LDO1}$  reaches  $T_{SHUT\_RISING\_LDO1}$  if LDO1 is enabled, or  $T_{J\_LDO2}$  reaches  $T_{SHUT\_RISING\_LDO2}$  if LDO2 is enabled. In this case, the device disables all the operating power rails. After  $t_{TSHUT\_DGLZ}$ , the BATFET is turned on to power SYS. The integrated power rails are reenabled when TSHUT fault recovers. The power-up sequence is implemented if power sequence is used with  $V_{SYS} > V_{SEQ\_UVLOZ}$ .

In battery only mode with ADC disabled ( $ADC\_EN = 1$ ), the TSHUT fault is triggered when  $T_J$  reaches  $T_{SHUT\_RISING}$ , or  $T_{J\_BUCK}$  reaches  $T_{SHUT\_RISING\_BUCK}$  if Buck is enabled, or  $T_{J\_BB}$  reaches  $T_{SHUT\_RISING\_BB}$  if Buck-boost is enabled, or  $T_{J\_LDO1}$  reaches  $T_{SHUT\_RISING\_LDO1}$  if LDO1 is enabled, or  $T_{J\_LDO2}$  reaches  $T_{SHUT\_RISING\_LDO2}$  if LDO2 is enabled. In this case, the device disables all the operating power rails, and then turns off the BATFET. After  $t_{TSHUT\_DGLZ}$ , if  $T_J$  is below  $T_{SHUT\_FALLING}$ , the BATFET is turned on to power SYS. The integrated power rails are reenabled when TSHUT fault recovers. The power-up sequence is implemented if power sequence is used with  $V_{SYS} > V_{SEQ\_UVLOZ}$ .

The Buck thermal shutdown protection is not active in PFM mode and LDO1/LDO2 thermal shutdown is not active with load less than 1 mA.

When TSHUT fault is triggered, TSHUT\_STAT/TSHUT\_FLAG is set to 1 with interrupt signal sent from  $\overline{INT}$  pin if TSHUT\_MASK is not set to 1.

If TSHUT\_LOCKOUT\_EN is set to 1, the device is locked out in TSHUT protection (input FETs off, BATFET off, rails disabled) if TSHUT fault is triggered 7 to 13 times in the 2s window. Once the device is locked out in TSHUT protection, VIN needs to be toggled to bring the device out of the lock-out state after  $t_{TSHUT\_DGLZ}$ . After  $t_{TSHUT\_DGLZ}$ , if  $T_J$  is below  $T_{SHUT\_FALLING}$ , the input FETs or BATFET are able to be turned on to power SYS and

charging can be restarted. The integrated power rails are reenabled when TSHUT fault recovers. The power-up sequence is implemented if power sequence is used with  $V_{SYS} > V_{SEQ\_UVLOZ}$ .

When LDO1 is in always on mode (LDO1\_EN\_SET = b111) and LDO1\_SHIP\_AO is set to 1, the LDO1 is disabled only when  $T_J$  reaches  $T_{SHUT\_RISING\_LOD1}$  and resumes operation when  $T_J$  falls below  $T_{SHUT\_FALLING\_LOD1}$ . In LDO1-ON Ship mode, TSHUT\_STAT/TSHUT\_FLAG is not updated if the fault is triggered.

During the charging process, to prevent overheating in the device, the device monitors the junction temperature of the die and reduces the charging current once  $T_J$  reaches the thermal regulation threshold ( $T_{REG}$ ) based on bits set by THERM\_REG setting. If the charge current is reduced to 0, the battery supplies the current needed to supply the SYS output. Thermal regulation can be disabled through I<sup>2</sup>C.

Four temperature settings are selectable in I<sup>2</sup>C and shown in [Section 7.6](#).

The die junction temperature,  $T_J$ , can be estimated based on the expected board performance using the following equation:

$$T_J = T_A + \theta_{JA} * P_{DISS}$$

The  $\theta_{JA}$  is largely driven by the board layout. For more information about traditional and new thermal metrics, see the [IC Package Thermal Metrics Application Report](#).

For reliable operation, limit the junction temperature to the maximum listed in the *Recommended Operating Conditions* table. Operation above this maximum temperature causes the device to exceed operational specifications. Although the thermal protection of the device is designed to protect against overheat conditions, it is not intended to replace proper heat sinking. Continuously running the device into thermal shutdown or above the maximum recommended junction temperature reduces long-term reliability.

### 7.3.9 Integrated 12-Bit ADC for Monitoring

The device provides an integrated 12-bit ADC for the host to monitor various system parameters. The ADC\_RATE bits allow continuous conversion, conversion every 1 second, conversion every 1 minute, and one-shot behavior.

To enable the ADC, the ADC\_EN bit must be set to '1'. The ADC is disabled by default (ADC\_EN=0) to conserve power. The ADC is allowed to operate if either  $V_{IN} > V_{IN\_UVLO}$  or  $V_{BAT} > V_{BAT\_ADC\_LOWVZ}$ . In battery mode, if ADC\_EN is written to '1' by the host with  $V_{BAT} < V_{BAT\_LOWVZ\_ADC}$ , it will then be automatically cleared. ADC\_EN should not be set to 1 when no channel is enabled.

The ADC range for VIN is dependent on the VIN\_OVP bit.

The ADC supports averaging by setting ADC\_AVG = 1. In averaging mode, each new sample is averaged with the previous value of that channel's output register. When ADC\_AVG\_INIT = 1, the first converted value is stored without averaging, and each subsequent value is averaged. In this mode, the first stored value is  $X_0$ , the second value is  $(\frac{1}{2} X_1 + \frac{1}{2} X_0)$  and the third stored value is  $(\frac{1}{2} X_2 + \frac{1}{4} X_1 + \frac{1}{4} X_0)$ , where  $X_0$ ,  $X_1$  and  $X_2$  are the sequential values measured by the ADC. When ADC\_AVG = 1 and ADC\_AVG\_INIT = 1 in one-shot mode, two samples are taken and averaged.

The ADC\_DONE\_STAT and ADC\_DONE\_FLAG bits will be set when a conversion is complete in one-shot mode, every 1 second mode, and every 1 minute mode. During continuous conversion mode, the ADC\_DONE\_STAT and ADC\_DONE\_FLAG bits have no meaning and will remain at 0. In one-shot mode, the ADC\_EN bit will be set to 0 at the completion of the conversion, at the same time as the ADC\_DONE\_FLAG bit is set and a 128- $\mu$ s pulse is sent on INT pin to notify the host. In continuous mode, the ADC\_EN bit remains at 1 until the user disables the ADC by setting it to 0. In conversion every 1 second mode and conversion every 1 minute mode mode, the ADC\_IN bit stays high in the waiting period in between measurements, but the digital signal will turn off the ADC in the background to save power. After an one-shot ADC cycle is done, the user should wait for at least 25ms before setting ADC\_RATE to continuous and enable ADC by setting ADC\_EN to 1.

ADC conversion operates independently of the faults present in the device. ADC conversion will continue even when a fault has occurred, with the exception of the TSHUT fault, which disables the ADC until the fault clears.



The device has an ADCIN input to monitor the value of an external voltage signal up to 5V or support another NTC thermister measurement without the need of an external biasing circuit by setting ADCIN\_MODE bit to '1'. In this mode, the ADCIN pin is biased with 80µA bias current, same as TS pin, and V<sub>ADCIN</sub> is monitored up to 1V.

The TDIE and IBAT ADC channel registers report in 2's compliment format in order to represent positive and negative current. 16-bit registers in 2's compliment represent positive numbers using the range 0x0000 - 0x7FFF, with 0x0 representing 0 and 0x7FFF representing the maximum positive value of 32,767. The negative numbers are represented in the range 0x8000-0xFFFF with 0x8000 representing the most negative value of -32,768 and 0xFFFF representing -1. Note that these are the raw integer values of the register. To convert into the current reading of the ADC, multiply this integer by the scaling factor of the register.

### 7.3.9.1 ADC Programmable Comparators

The device has three programmable ADC comparators that may be used to monitor any of the ADC channels as configured through the ADCCTRL1 and ADCCTRL2 registers. The comparators will send an interrupt (if not masked) and set the flags (COMP1\_ALARM\_FLAG/COMP2\_ALARM\_FLAG/COMP3\_ALARM\_FLAG) whenever the corresponding channel's ADC measurement result crosses the threshold programmed in their respective ADCALARM1/ADCALARM2/ADCALARM3 bits in the direction indicated by the ADCALARM1\_ABOVE/ADCALARM2\_ABOVE/ADCALARM3\_ABOVE bit. Note that the interrupts are masked by default and must be unmasked by the host to use this function.

For all the ADC channels except for the IBAT channel, the LSB of ADCALARM1/ADCALARM2/ADCALARM3 bits is corresponding to the same value as the channel's ADC result's LSB. For the IBAT channel, the ADCALARM1/ADCALARM2/ADCALARM3 bits' LSB is corresponding to 2mA instead of 1mA as in ADC\_DATA\_IBAT. Also, when the comparators are used to monitor TDIE and IBAT channels, the MSB of ADCALARM1/ADCALARM2/ADCALARM3 bits is the sign bit.

### 7.3.10 Pushbutton Wake and Reset Input

$\overline{\text{MR}}$  pin is internally pulled up such that it can work as a pushbutton to detect if it's being pulled low. The pushbutton function implemented through the  $\overline{\text{MR}}$  pin has three main functions. First, it serves as a means to wake the device from ultra-low power modes like ship mode ( $\overline{\text{MR}}$  pin pressed for  $t_{\text{SHIPWAKE}}$ ). Second, it serves as a short button press detector, sending an interrupt to the host when the button driving the  $\overline{\text{MR}}$  pin has been pressed for  $t_{\text{WAKE1}}$ ,  $t_{\text{WAKE2}}$  durations. This allows the implementation of different functions in the end application such as menu selection and control. Finally it serves as a means to get the device into ship mode or reset the system (Hardware Reset) by performing a power cycle/ hardware reset (shut down SYS and automatically power it back on) after detecting a long button press ( $\overline{\text{MR}}$  pin pressed for  $t_{\text{LPRESS}}$ ).  $t_{\text{LPRESS\_WARN}}$  before  $\overline{\text{MR}}$  pin being pulled low for  $t_{\text{LPRESS}}$ , the device also sends an interrupt to warn the host the long press action is imminent. The timings of  $t_{\text{WAKE1}}$ ,  $t_{\text{WAKE2}}$ , and  $t_{\text{LPRESS}}$  are programmable through I<sup>2</sup>C for added flexibility and allows system designers to customize the end user experience of a specific application. Note that if a specific timer duration is changed through I<sup>2</sup>C while that timer is active and has not expired, the new programmed value will be ignored until the timer expires and/or is reset by new push button action. If a button press is registered, the device will begin counting against  $t_{\text{WAKE1}}$ ,  $t_{\text{WAKE2}}$  or  $t_{\text{LPRESS}}$ .


#### 7.3.10.1 Pushbutton Short Button Press or Wake Functions

There are two programmable short button press timers,  $t_{\text{WAKE1}}$  and  $t_{\text{WAKE2}}$ . There are no specific actions taken by the  $t_{\text{WAKE1}}$  or  $t_{\text{WAKE2}}$  durations other than issuing an interrupt (if not masked) and updating the WAKE1\_FLAG or WAKE2\_FLAG registers. For a wake from ship mode event, the push button ( $\overline{\text{MR}}$  pin) has to be low for  $t_{\text{SHIPWAKE}}$  with  $V_{\text{BAT}} > V_{\text{BUVLO}}$  before it can turn ON the SYS rail.


In the case where an input source ( $V_{\text{IN}} > V_{\text{IN\_UVLO}}$ ) is connected prior to  $t_{\text{SHIPWAKE}}$  timer expiring, the device will exit the Ship mode regardless of the  $\overline{\text{MR}}$  pin or wake timer state.

#### 7.3.10.2 Pushbutton Long Button Press Functions

Depending on the configuration set on pushbutton long press action register bits (PB\_LPRESS\_ACTION\_1:0), the device will perform a ship mode entry or Hardware Reset or completely ignore the long button press action. If HOST\_HW\_RESET\_VIN\_REQ bit is set to 1, the Hardware Reset can only start with  $V_{\text{IN}} > V_{\text{IN\_UVLO}}$ .

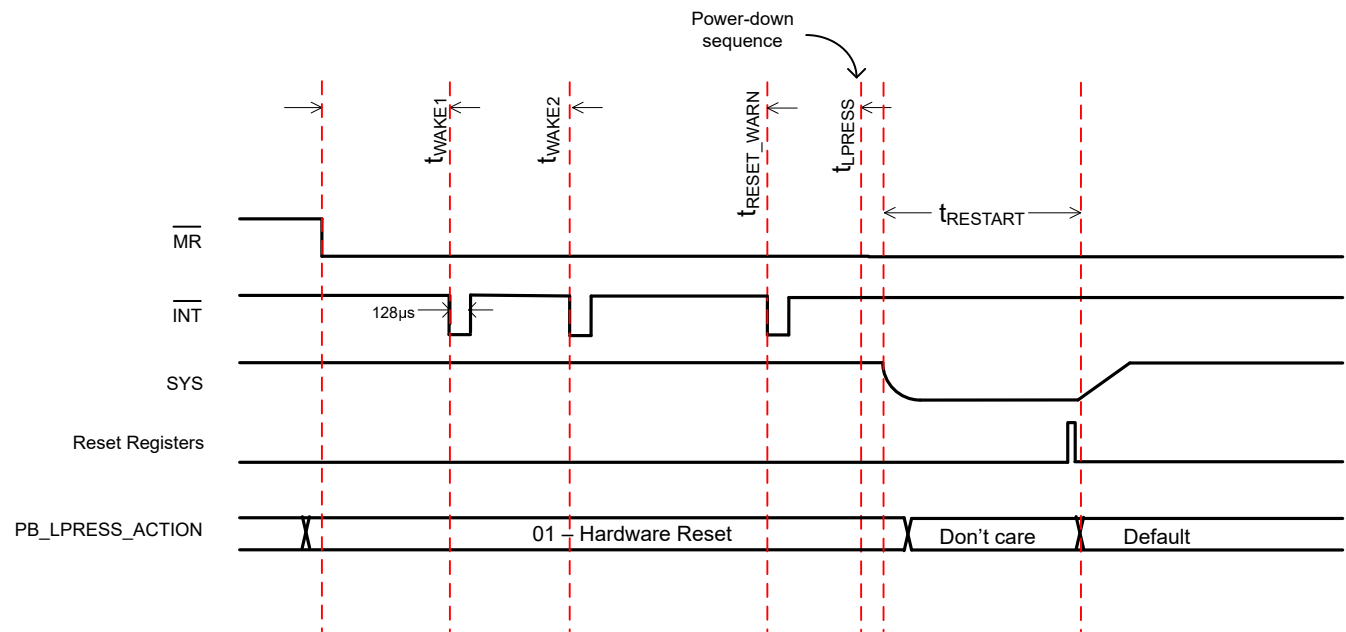

**Figure 7-5. Pushbutton Long Press for Hardware Reset**

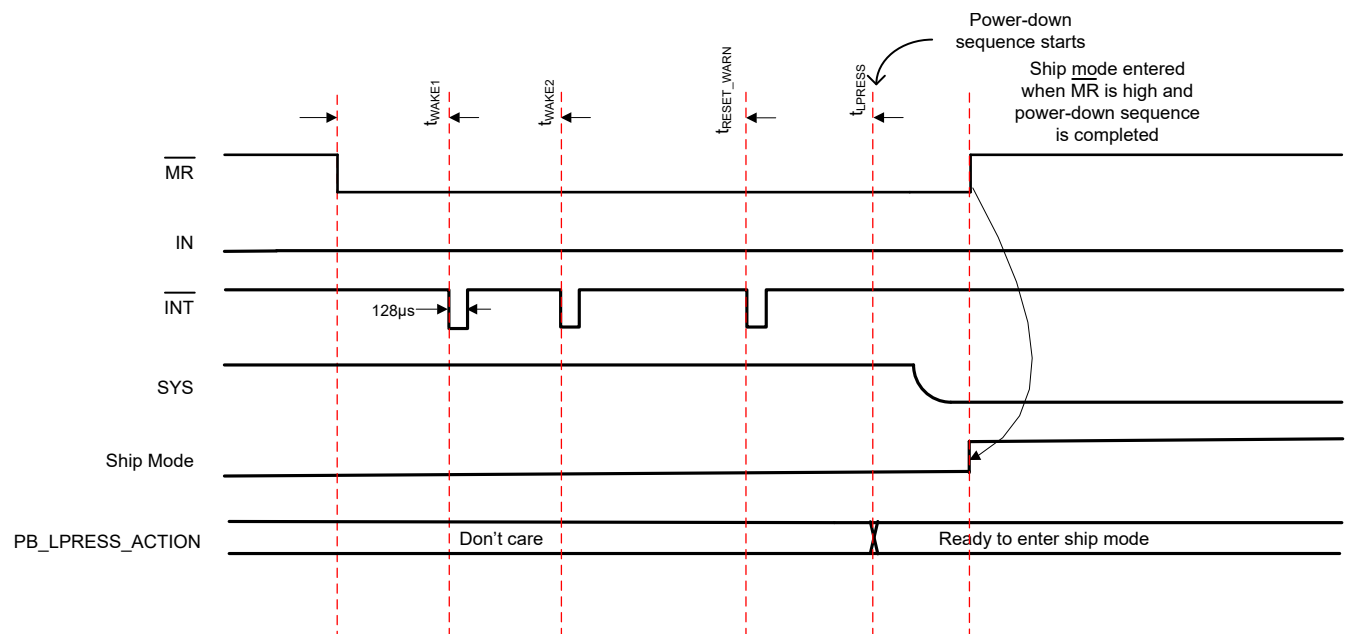


**Figure 7-6. Pushbutton Long Press for Ship Mode Entry**

### 7.3.11 VIN Pulse Detection for Hardware Reset

For applications with no pushbutton to implement the Hardware Reset, the device offers a function which detects a sequence of pulses at IN pin that would trigger the Hardware Reset. The device detects 3 pulses with width of at least 500ms in an 8-second window. Less than or more than 3 pulses would not generate a HW reset. Once the 8-second window expires and the 3 pulses have been detected, the Hardware Reset is implemented.



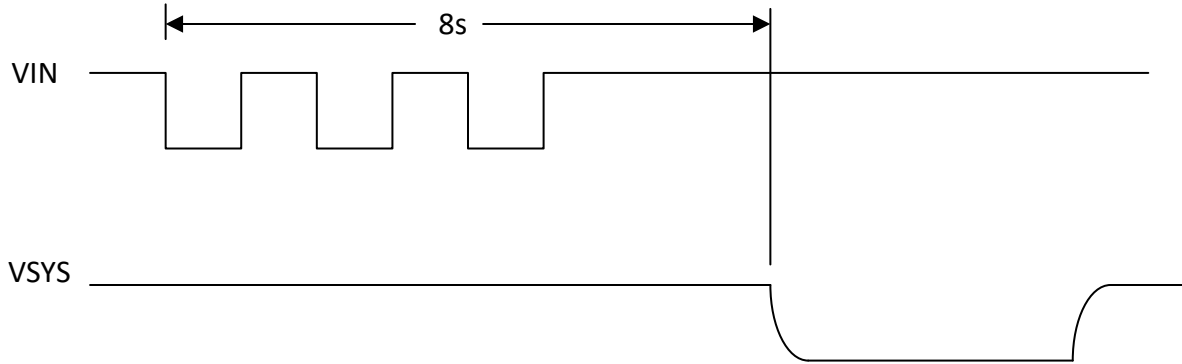

**Figure 7-7. VIN Pulse Detection for Hardware Reset**

### 7.3.12 15-Second VIN Watchdog for Hardware Reset

The 15-second watchdog can be enabled/disabled through I<sup>2</sup>C by the WATCHDOG\_15S\_ENABLE bit. When the function is enabled, the device implements the Hardware Reset if the host does not respond 15 seconds after the adapter is connected with VIN\_PGOOD\_STAT being set. If the adapter is connected and the host responds before the 15-second watchdog expires, the part continues operating normally.

### 7.3.13 Hardware Reset

The device is capable of implementing the Hardware Reset (HW\_RESET) to powercycle the system. This is particularly useful when a software reset on the host side fails to work. Below is a sequence of events during a Hardware Reset:

1. Implement power-down sequence
2. Start the autowake timer ( $t_{RESATR}$ )
3. Once the autowake timer expires, disconnect the pulldown on SYS
4. Reset all the register bits to default values
5. Turn on the BATFET (without BATDEPL fault) and input FETs (with VIN\_PGOOD) to power the system.
6. Enable integrated power rails based on corresponding enable settings.

### 7.3.14 Software Reset

When a software reset is issued by the REG\_RST bit, the device resets selected register bits to default values. The selected register bits are shown in the register map.

### 7.3.15 Interrupt to Host ( $\overline{INT}$ )

The device contains an open-drain output ( $\overline{INT}$ ) to notify the host if a certain status has changed.

The  $\overline{INT}$  pin is normally in high impedance and is pulled low for 128 $\mu$ s when an interrupt condition occurs.

Interrupts can be masked through I<sup>2</sup>C. If the interrupt condition occurs while the interrupt is masked, the interrupt pulse will not be sent. If the interrupt is unmasked while the fault condition is still present, an interrupt pulse will not be sent until the interrupt triggering condition occurs while it is not unmasked.

### 7.3.16 External NTC Monitoring (TS)

The I<sup>2</sup>C interface allows the user to easily implement the JEITA standard for systems where the battery pack thermistor is monitored by the host. The NTC thermistor is biased by the device with  $I_{TS\_BIAS}$  and the resulting voltage at TS is monitored to determine that the battery is at a safe temperature during charging. The TS fault monitoring is enabled by TS\_FAULT\_BAT\_EN bit in battery mode and TS\_FAULT\_VIN\_EN in adapter mode.  $I_{TS\_BIAS}$  is turned off when TS fault monitoring is disabled in both battery mode and adapter mode.

The part can be configured to meet JEITA requirements or a simpler HOT/COLD function only. Additionally, the TS charging control function can be disabled through the TS\_ACTION\_EN bit. This bit only disables the TS charge action but the faults are still reported. To satisfy the JEITA requirements, four temperature thresholds are

monitored: the cold battery threshold, the cool battery threshold, the warm battery threshold, and the hot battery threshold which are all fully programmable with TS\_COLD/TS\_COOL/TS\_WARM/TS\_HOT register bits.

Charging and safety timers are suspended when  $V_{TS} < V_{HOT}$  or  $V_{TS} > V_{COLD}$ . When  $V_{COOL} < V_{TS} < V_{COLD}$ , the charging current is reduced to the value programmed by the TS\_ICHG bit. When  $V_{HOT} < V_{TS} < V_{WARM}$ , the battery regulation voltage is reduced to the value programmed by the TS\_VREG bit.

When a TS fault is confirmed, the corresponding TS fault status is reported by TS\_STAT bits and TS\_FLAG bit set to 1 to reflect that a change to TS\_STAT was detected. If not masked by TS\_MASK, a 128- $\mu$ s pulse is sent on /INT pin to notify the host about the TS\_STAT change.

In battery mode (with  $V_{BAT} > V_{BAT\_ADC\_LOWVZ}$ ), the TS faults can still be reported through I<sup>2</sup>C when TS fault monitoring is enabled (TS\_FAULT\_BAT\_EN=1). If TS fault monitoring is enabled,  $V_{TS}$  is monitored at the rate following the ADC\_RATE bits (even with ADC\_EN = 0), which can be in continuous conversion mode, one-shot conversion mode, every 1 second mode, or every 1 minute mode. The every-1-second and every-1-minute modes can be used to monitor  $V_{TS}$  periodically in an efficient way as the battery current consumption is low during the wait time with  $I_{TS\_BIAS}$  also disabled.

### 7.3.16.1 TS Thresholds


The device monitors the TS voltage and sends an interrupt (if not masked) to the host whenever it crosses the  $V_{HOT}$ ,  $V_{WARM}$ ,  $V_{COOL}$  and  $V_{COLD}$  thresholds which correspond to different temperature thresholds based on the NTC resistance and biasing. Each threshold can be programmed via I<sup>2</sup>C through the TS\_COLD, TS\_COOL, TS\_WARM and TS\_HOT registers.  $V_{COOL}$  threshold is disabled if TS\_COOL is set to 0 and  $V_{WARM}$  threshold is disabled if TS\_WARM is set to 0. This allows the device to either meet flexible JEITA requirements or implement a simpler HOT/COLD function only. To avoid unexpected behaviors, the thresholds should not be programmed overlapping each other. The device will also disable charging if TS pin exceeds the  $V_{TS\_OPEN}$  threshold.

The device supports the following TS\_HOT and TS\_COLD thresholds for a typical 10-K $\Omega$  NTC thermistor. The TS\_COOL and TS\_WARM thresholds are disabled by default.

**Table 7-6. TS Thresholds for 10-k $\Omega$  Thermistor**

| THRESHOLD | TEMPERATURE (°C) | V <sub>TS</sub> (V) |
|-----------|------------------|---------------------|
| Open      | --               | >0.9                |
| Cold      | 0                | 0.58                |
| Hot       | 43               | 0.276               |

The TS biasing circuit is shown in [Figure 7-8](#). Note that the respective  $V_{TS}$  and hence ADC reading for  $T_{COLD}$ ,  $T_{COOL}$ ,  $T_{WARM}$  and  $T_{HOT}$  changes for every NTC, therefore the threshold values may need to be adjusted through I<sup>2</sup>C based on the supported NTC type.

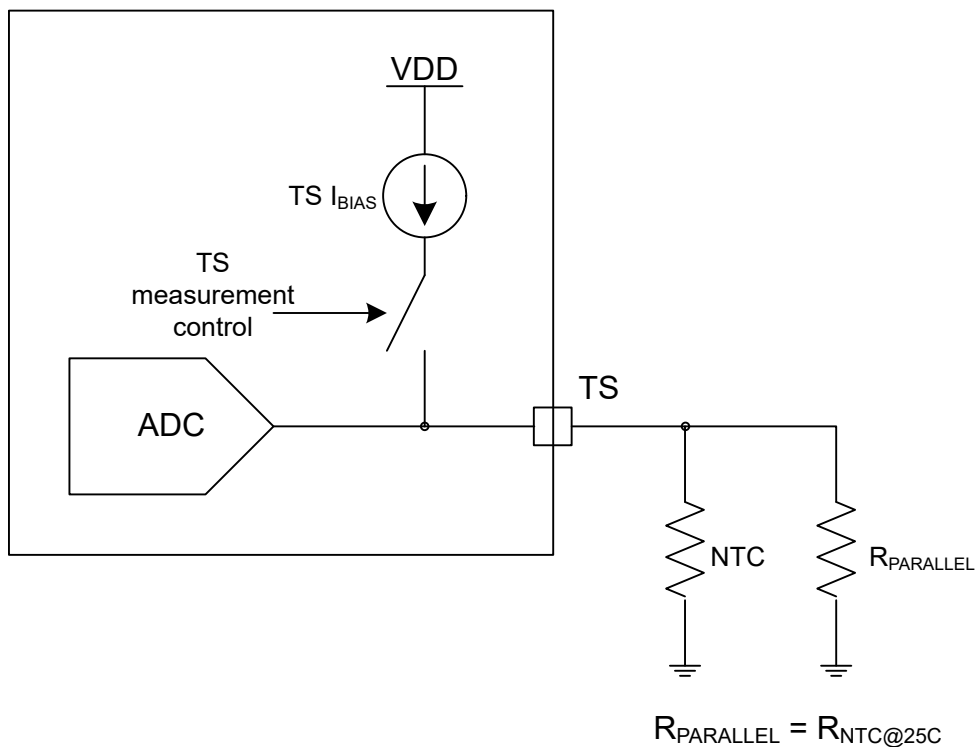

**Figure 7-8. TS Bias Functional Diagram**


For accurate temperature thresholds, a 10-k $\Omega$  NTC with a 3380 B-constant should be used (Murata NCP03XH103F05RL for example) with a parallel 10-k $\Omega$  resistor. For devices where TS function is not needed, tie a 5-k $\Omega$  resistor from the TS pin to ground.

### 7.3.17 Power Rail Power Sequence

The integrated power rails can be configured to be power up or power down in a programmable sequence. In addition, the GPIO pins can be configured to be push-pull power sequencer output which can enable or disable external power rails in the sequence. If at least one of the integrated power rail is configured to be in the sequence or at least one of the GPIO pins is configured to be sequencer output, it means that the power sequence is used. Otherwise, it means that the power sequence is not used. An integrated power rail is a sequence power rail if it is configured to be in the sequence. For Buck or Buck-boost, it can be individually enabled or disabled by I<sup>2</sup>C or GPIO if it's not a sequence power rail. Therefore, Buck or Buck-boost can be in sequence mode or individual mode. For LDO1 or LDO2, it can be individually enabled or disabled by I<sup>2</sup>C or GPIO, or always on if it is not a sequence power rail. Therefore, the LDO1 and LDO2 can be in sequence mode, individual mode, or always-on mode.

#### 7.3.17.1 Power-Up Sequence

Power-up sequence is implemented when  $V_{SYS}$  ramps up exceeding  $V_{SEQ\_UVLOZ}$  with a SYS power-up condition while  $T_J < T_{SHUT\_RISING}$  or during TSHUT recovery while  $V_{SYS} > V_{SEQ\_UVLO}$  and power sequence is used. Figure 7-9 shows the power-up sequence timing.

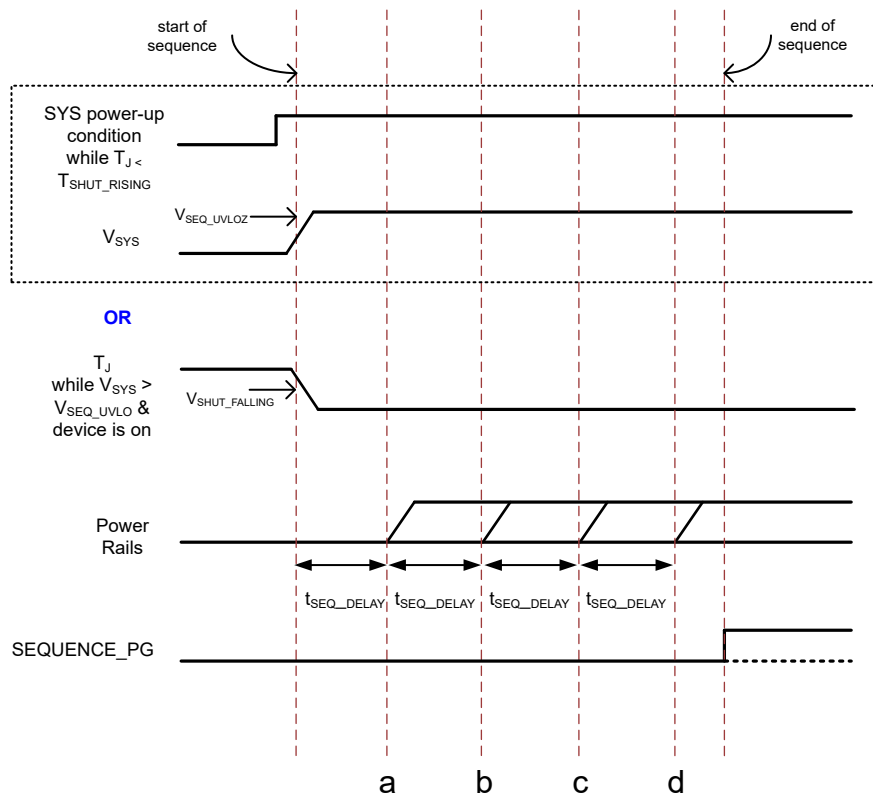

**Figure 7-9. Power-Up Sequence Timing**


$t_{SEQ\_DELAY}$  after power-up sequence is started, the power rails are enabled at four points, in the order of "a", "b", "c", "d", determined by each power rail's configuration, with  $t_{SEQ\_DELAY}$  in between.  $t_{SEQ\_DELAY}$  can be configured by SEQUENCE\_DELAY\_TIME bits from 1 ms to 64 ms. If GPIOs are configured to be sequencer outputs, they are pulled high at "a", "b", "c", or "d" to enable external loads or power rails.

After "a", "b", "c", and "d", the sequence power rail output voltages are evaluated  $t_{SEQ\_PG\_DELAY}$  after "d" to determine the sequence power good status. If all of the sequence power rails are in power good status, SEQUENCE\_PG bit is set to 1, indicating that the sequence is in power good status. Otherwise, SEQUENCE\_PG bit remains 0.

If power sequence is not used, the device does not wait for four  $t_{\text{SEQ\_DELAY}}$  and one  $t_{\text{SEQ\_PG\_DELAY}}$  to pass to service individual mode power rail enable or disable request. In this case, the individual mode power rail's enable or disable request can be serviced directly after exiting individual UVLO.

### 7.3.17.2 Power-Down Sequence

Power-down sequence is implemented when SYS powers down due to a SYS power down condition, which can be Ship mode entry, HW\_RESET, or SYS set to pulldown mode (SYS\_MODE set to 11). Figure 7-10 shows the power-down sequence timing. The power-down sequence is from SYS power down condition being met to SYS being powered down.

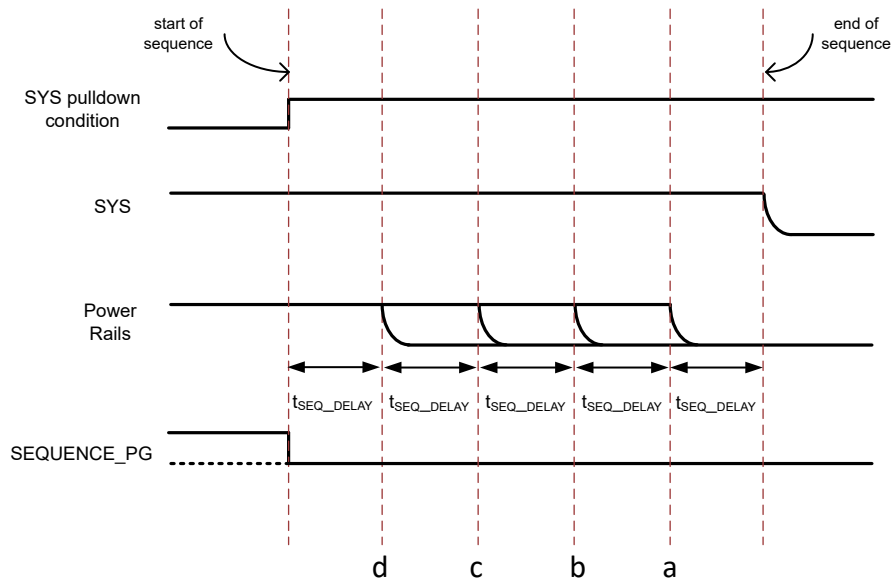

**Figure 7-10. Power-Down Sequence Timing**

With a SYS power down condition, SEQUENCE\_PG bit is set to 0 immediately.  $t_{\text{SEQ\_DELAY}}$  after SEQUENCE\_PG set to 0, the sequence power rails are disabled in the order of "d", "c", "b", "a". If GPIOs are configured to be sequencer outputs, they will apply the corresponding pull-low at "d", "c", "b", or "a" to disable external loads or power rails. The individual mode power rails are disabled all at "d" (if not already disabled).  $t_{\text{SEQ\_DELAY}}$  after "a", the input FET and battery FET are turned off and then, SYS is pulled to GND. If no integrated power rail is in sequence mode and no GPIO is configured as sequencer output, when a SYS power down request is received, then all individual mode power rails are disabled at "d". After "a", the input FET and battery FET are turned off. Then, SYS is pulled to GND.

### 7.3.18 Integrated Buck Converter (Buck)

The device integrates a synchronous step-down converter (Buck) with ultra low quiescent current consumption. It supports DVS by either I<sup>2</sup>C or GPIO3/GPIO4. If BUCK\_HI\_RANGE is 0, the DVS range is from 0.4V to 1.575V in 12.5mV steps. If BUCK\_HI\_RANGE is 1, the DVS range is from 0.4V to 3.6V, with 25mV steps from 0.4V to 3.175V and 50mV steps from 3.2V to 3.6V. Note that the change to the BUCK\_HI\_RANGE takes effect the next time when the user programs the Buck output voltage with I<sup>2</sup>C command or GPIO3/GPIO4. GPIO3\_CONFIG bits determine if DVS is controlled by I<sup>2</sup>C only or both I<sup>2</sup>C and GPIO. If GPIO3\_CONFIG is set to b0010, DVS is controlled by both I<sup>2</sup>C and GPIO. Otherwiser, DVS is controlled by I<sup>2</sup>C only. If GPIO3\_CONFIG is set to b0010 but GPIO4\_CONFIG is not set to b0010, GPIO3 is configured to be VSEL pin to toggle between two output voltage settings. If GPIO3\_CONFIG and GPIO4\_CONFIG are both set to b0010, GPIO3 and GPIO4 are configured to be VSEL1 pin and VSEL2 pin to toggle between four output voltage settings. If DVS is configured to be controlled by I<sup>2</sup>C only, Buck output voltage is set by BUCK\_VOUT\_SET register. If GPIO3 is configured to be VSEL pin, the output voltage is determined by output voltage mode selection 1 and 2 which are set by BUCK\_VOUT1\_SET and BUCK\_VOUT2\_SET, depending on the state of GPIO3 pin as shown in Table 7-7. If GPIO3 and GPIO4 are configured to be VSEL1 pin and VSEL2 pin, the output voltage is

determined by output voltage mode selection 1, 2, 3, and 4 which are programmed by BUCK\_VOUT1\_SET, BUCK\_VOUT2\_SET, BUCK\_VOUT3\_SET, or BUCK\_VOUT4\_SET respectively, depending on the state of GPIO3 pin and GPIO4 pin combination as shown in Table 7-8. When Buck DVS is controlled by both I<sup>2</sup>C and GPIO, the BUCK\_VOUT1\_SET/BUCK\_VOUT2\_SET/BUCK\_VOUT3\_SET/BUCK\_VOUT4\_SET bits are programmable by I<sup>2</sup>C to set the Buck output voltage while BUCK\_VOUT\_SET is automatically updated to match the active output voltage setting.

**Table 7-7. Buck Output Voltage Setting by VSEL**

| VSEL (GPIO3) | OUTPUT VOLTAGE MODE SELECTION |
|--------------|-------------------------------|
| LOW          | 1                             |
| HIGH         | 2                             |

**Table 7-8. Buck Output Voltage Setting by VSEL1 and VSEL2**

| VSEL2 (GPIO4) | VSEL1 (GPIO3) | OUTPUT VOLTAGE MODE SELECTION |
|---------------|---------------|-------------------------------|
| LOW           | LOW           | 1                             |
| LOW           | HIGH          | 2                             |
| HIGH          | LOW           | 3                             |
| HIGH          | HIGH          | 4                             |

Buck has the output discharge function when it is being disabled. The purpose of this function is to ensure a defined down-ramp of the output voltage when it is disabled and to keep the output voltage close to 0V. The discharge function is only active when Buck is disabled.

### 7.3.19 Integrated Buck-Boost Converter (Buck-boost)

The device integrates a high-efficiency synchronous buck-boost converter with ultra-low quiescent current. It supports programmable output voltage by I<sup>2</sup>C from 1.7V to 5.2V in 50mV steps with BUBO\_VOUT\_SET bits. The Buck-boost does not actively discharge the output capacitor if the actual VOUT is higher than the target. The Buck-boost stops switching until the actual VOUT reaches the target. Therefore, the actual VOUT slew rate is dependent on the load at the output in this case.

Buck-boost has the output discharge function when it is being disabled. The purpose of this function is to ensure a defined down-ramp of the output voltage when it's disabled and to keep the output voltage close to 0V. The discharge function is only active when Buck-boost is disabled.

Buck-boost has an average input current limit function which are configurable by I<sup>2</sup>C with BUBO\_ILIMIT bit, with "unlimited" and 100mA settings. This function is active during normal operation and at start-up to prevent inrush current.

### 7.3.20 Integrated LDOs (LDO1/LDO2)

The device integrates two ultra-low quiescent current LDOs, LDO1 and LDO2, which can also be configured to bypass mode to operate as a switch. Therefore, they can provide either a regulated output or gate power to external loads. LDO1 and LDO2 have dedicated input pins VINLS1 and VINLS2 and can support up to 200 mA load current.

The output of voltage of LDO1/LDO2 is programmable using LDO1\_VOUT\_SET/LDO2\_VOUT\_SET bits from 0.8V to 3.6V in 50mV steps. The LDO1/LDO2 does not actively discharge the output capacitor if the actual VOUT is higher than the target. The LDO1/LDO2 turns off the internal FET until the actual VOUT reaches the target. Therefore, the actual VOUT slew rate is dependent on the load at the output in this case.

Setting the LDO1\_LDO\_SWITCH\_CONFIG/LDO2\_LDO\_SWITCH\_CONFIG will configure LDO1/LDO2 to operate in either LDO mode or bypass (switch) mode. Note that in order to change the configuration, LDO1/LDO2 must be disabled first, then the LDO1\_LDO\_SWITCH\_CONFIG/LDO2\_LDO\_SWITCH\_CONFIG takes effect.

Whether always-on LDO1 is operating in LDO1-ON Ship mode is dependent on the LDO1\_SHIP\_AO bit setting. If LDO1\_SHIP\_AO is 1 when power-down sequence is started to enter the Ship mode, the LDO1 VOUT

is set by LDO1\_VOUT\_SET if LDO1 was in LDO mode and LDO1's ON/OFF status is latched if LDO1 was in bypass mode. For LDO1\_SHIP\_AO to be effective, LDO1\_EN\_SET needs to be set to b111.

LDO1/LDO2 has the output discharge function. The purpose of this function is to ensure a defined down-ramp of the output voltage when LDO1/LDO2 is disabled and to keep the output voltage close to 0V. The discharge function is only active when LDO1/LDO2 is disabled. Do not rely on the active discharge circuit for discharging a large amount of output capacitance after the input supply has collapsed because reverse current can possibly flow from the output to the input. This reverse current flow can cause damage to the device. Limit reverse current to no more than 5% of the device rated current for a short period of time.

When LDO1/LDO2 does not have valid input power at VINLS1/VINLS2, it should be disabled.

### 7.3.21 Multi-Function GPIOs

The device integrates 4 multi-function GPIOs which can be used as individual enable signals for internal power rails, sequencer outputs for external power rails/loads, sequence power good signal, level-shifted  $\overline{MR}$  signal, or VSEL pins for Buck rail. The GPIOs can also be used as MCU GPIO expanders since they can be configured to operate in level-sensitive input mode, positive-edge/negative-edge trigger mode, forced push-pull output mode, or open-drain output mode.

#### 7.3.21.1 GPIO1 Functions

GPIO1 can be configured to function as LDO2 EN pin, open-drain output, push-pull output, sequencer output, level-sensitive input, positive-edge/negative-edge trigger input based on different I<sup>2</sup>C settings.

To set GPIO1 as the LDO2 EN pin, LDO2\_EN\_SET should be set to b110 and GPIO1\_CONFIG needs to be set to b1000.

If GPIO1\_CONFIG = b0010, GPIO1 is set to be in level shifted  $\overline{MR}$  output mode. If GPIO1 is set to be the level shifted  $\overline{MR}$ , it is pulled up to VPU when  $\overline{MR}$  input state is high and it is pulled down to GND when  $\overline{MR}$  input state is low.

If GPIO1 is set to be in forced open-drain high state, it is in a HIGH-Z state. If GPIO1 is set to be in forced low state, it is pulled down to GND. If GPIO1 is set to be in forced push-pull high state, it is pulled up to VPU.

If GPIO1 is set to operate as a sequencer output, it is pulled up to VPU or pulled down to GND at the corresponding time instances during power-up/power-down sequence.

If GPIO1 is configured to be in input mode, its current state is readable with the GPIO1\_STAT bit. As a positive-edge/negative-edge trigger input, the GPIO1\_FLAG will be set when a trigger event happens and a 128µs pulse is sent through the INT pin to notify the host.

#### 7.3.21.2 GPIO2 Functions

GPIO2 can be configured to function as Buck-boost EN pin, open-drain output, push-pull output, sequencer output, level-sensitive input, positive-edge/negative-edge trigger input based on different I<sup>2</sup>C settings.

To set GPIO2 as the Buck-boost EN pin, BUBO\_EN\_SET should be set to b110 and GPIO2\_CONFIG needs to be set to b1000.

If GPIO\_CONFIG = b0010, GPIO2 is set as the sequence PG pin to reflect the sequence PG status, same as the SEQUENCE\_PG bit. GPIO2 is pulled up to VPU if SEQUENCE\_PG bit is 1 and pulled down to GND if SEQUENCE\_PG bit is 0.

If GPIO2 is set to be in forced open-drain high state, it is in a HIGH-Z state. If GPIO2 is set to be in forced low state, it is pulled down to GND. If GPIO2 is set to be in forced push-pull high state, it is pulled up to VPU.

If GPIO2 is set to operate as a sequencer output, it is pulled up to VPU or pulled down to GND at the corresponding time instances during power-up/power-down sequence.



If GPIO2 is configured to be in input mode, its current state is readable with the GPIO2\_STAT bit. As a positive-edge/negative-edge trigger input, the GPIO2\_FLAG will be set when a trigger event happens and a 128µs pulse is sent through the  $\overline{\text{INT}}$  pin to notify the host.

#### 7.3.21.3 GPIO3 Functions

GPIO3 can be configured to function as Buck EN pin, open-drain output, push-pull output, sequencer output, level-sensitive input, positive-edge/negative-edge trigger input based on different I<sup>2</sup>C settings.

To set GPIO3 as the Buck EN pin, BUCK\_EN\_SET should be set to b110 and GPIO3\_CONFIG needs to be set to b1000.

If GPIO3\_CONFIG = b0010, GPIO3 is configured as the VSEL/VSEL1 pin to support Buck GPIO DVS function. When GPIO3 is configured to be VSEL pin or VSEL1 pin, it's High/Low state is read to determine the which voltage setting to be used for Buck.

If GPIO3 is set to be in forced open-drain high state, it is in a HIGH-Z state. If GPIO3 is set to be in forced low state, it is pulled down to GND. If GPIO3 is set to be in forced push-pull high state, it is pulled up to VPU.

If GPIO3 is set to operate as a sequencer output, it is pulled up to VPU or pulled down to GND at the corresponding time instances during power-up/power-down sequence.

If GPIO3 is configured to be in input mode, its current state is readable with the GPIO3\_STAT bit. As a positive-edge/negative-edge trigger input, the GPIO3\_FLAG will be set when a trigger event happens and a 128µs pulse is sent through the  $\overline{\text{INT}}$  pin to notify the host.

#### 7.3.21.4 GPIO4 Functions

GPIO4 can be configured to function as LDO1 EN pin, open-drain output, push-pull output, sequencer output, level-sensitive input, positive-edge/negative-edge trigger input based on different I<sup>2</sup>C settings.

To set GPIO4 as the LDO1 EN pin, LDO1\_EN\_SET should be set to b110 and GPIO4\_CONFIG needs to be set to b1000.

When GPIO4 is configured to be VSEL2 pin when GPIO3 is configured to be VSEL1 pin, both GPIO3 and GPIO4's High/Low states are read to determine the which voltage setting to be used for Buck.

If GPIO4 is set to be in forced open-drain high state, it is in a HIGH-Z state. If GPIO4 is set to be in forced low state, it is pulled down to GND. If GPIO4 is set to be in forced push-pull high state, it is pulled up to VPU.

If GPIO4 is set to operate as a sequencer output, it is pulled up to VPU or pulled down to GND at the corresponding time instances during power-up/power-down sequence.

If GPIO4 is configured to be in input mode, its current state is readable with the GPIO4\_STAT bit. As a positive-edge/negative-edge trigger input, the GPIO4\_FLAG will be set when a trigger event happens and a 128µs pulse is sent through the  $\overline{\text{INT}}$  pin to notify the host.

If GPIO4\_CONFIG is set to b1100/b1101/b1110/b1111, GPIO4 is operating as a open-drain PWM output which is pulled low for 20%/40%/60%/80% duty ratio at  $f_{\text{GPIO4\_PWM}}$ .

## 7.4 Device Functional Modes

The device has three main modes of operation: battery mode, ship mode, and adapter mode. LDO1-ON Ship mode is a special type of Ship mode in which always-on LDO1 remains on.

### 7.4.1 Ship Mode

Ship mode is the lowest quiescent current state for the device with BATFET being turned off.

Ship mode can be initiated by writing b10 to the EN\_RST\_SHIP register bits. If the ship mode setting is set, the device will wait until the input source is removed to enter ship mode. When an I<sup>2</sup>C command is given to set the device to enter ship mode, the device waits for 1 second before the implementation.



Ship mode can also be initiated with  $\overline{MR}$  pulled low for  $t_{LPRESS}$  when  $PB\_LPRESS\_ACTION$  is written to b10. [Figure 7-6](#) shows this behavior. The power-down sequence starts when  $\overline{MR}$  pin is pulled low for  $t_{LPRESS}$ . The ship mode is entered after SYS pulldown with power-down sequence completion and  $\overline{MR}$  pin is above the low threshold.

The device can exit ship mode by adapter insertion ( $V_{IN} > V_{IN\_UVLOZ}$ ) or  $\overline{MR}$  pin is pulled low for  $t_{SHIPWAKE}$  with  $V_{BAT} > V_{BUVLO}$ . For the device to reliably exit ship mode by adapter insertion,  $V_{IN}$  needs to be higher than  $V_{IN\_UVLOZ}$  for at least 30ms.

#### 7.4.1.1 LDO1-ON Ship Mode

If LDO1 is configured to be in always-on mode and  $LDO1\_SHIP\_AO$  is set to 1, LDO1-ON ship mode is entered with ship mode entry conditions. To enter this mode, LDO1 remains enabled in power-down sequence during ship mode entry.

Exiting the LDO1-ON ship mode is the same as exiting the regular ship mode.

#### 7.4.2 Battery Mode

When  $V_{BAT}$  rises above  $V_{BUVLOZ}$ , the device is powered on when adapter is not present and the device is in battery mode. With  $V_{BAT} > V_{BATDEPLZ}$ , the BATFET is turned on. The system is powered by the battery and BATFET is protected by the battery overcurrent protection (see [Section 7.3.8.4](#) for details).

In battery mode, if the battery voltage falls below  $V_{BATDEPL}$ , the BATFET is turned off. If  $V_{BAT}$  falls below  $V_{BUVLO}$ , the device is turned off with no adapter.

#### 7.4.3 Adapter Mode

The device is in adapter mode with adapter being connected ( $V_{IN} > V_{IN\_UVLO}$ ). If the adapter supply is valid ( $V_{IN\_PGOOD}$ ) and above the  $V_{INDPM}$  level, the system is powered by the adapter and the charging can start if it is enabled and there is no fault that prevents charging.

## 7.5 Programming

### 7.5.1 Serial Interface

The device uses I<sup>2</sup>C compatible interface for flexible charging parameter programming and instantaneous device status reporting. I<sup>2</sup>C is a bi-directional 2-wire serial interface. Only two open-drain bus lines are required: a serial data line (SDA), and a serial clock line (SCL).


The device has 7-bit I<sup>2</sup>C address 0x6C, receiving control inputs from a host device such as a micro-controller or digital signal processor through register addresses defined in the Register Map. The host device initiates all transfers and the charger responds. Register reads outside of these addresses return 0xFF. When the bus is free, both SDA and SCL lines are HIGH.

The I<sup>2</sup>C interface supports standard mode (up to 100 kbits/s), fast mode (up to 400 kbits/s) and fast mode plus (up to 1 Mbits/s.) These lines are pulled up to a reference voltage via pull-up resistor. The device I<sup>2</sup>C detection thresholds support a communication reference voltage between 1.2V - 5V.

- Standard mode (100 kbits/s):
  - No additional requirements
- Fast mode (400 kbits/s):
  - Increase I<sup>2</sup>C  $t_{\text{buf}}$  to at least 80  $\mu\text{s}$
  - If using repeated start commands, ensure I<sup>2</sup>C  $t_{\text{su}}:\text{STA}$  is at least 80  $\mu\text{s}$
- Fast mode plus (1 Mbits/s):
  - Increase I<sup>2</sup>C  $t_{\text{buf}}$  to at least 120  $\mu\text{s}$
  - If using repeated start commands, ensure I<sup>2</sup>C  $t_{\text{su}}:\text{STA}$  is at least 120  $\mu\text{s}$

#### 7.5.1.1 Data Validity

The data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW. One clock pulse is generated for each data bit transferred.

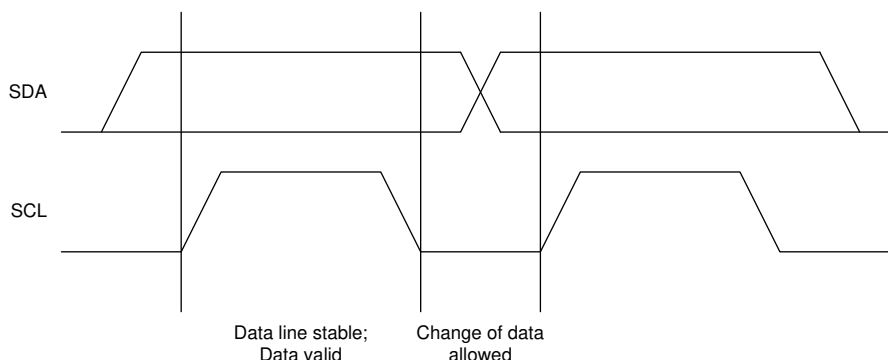


**Figure 7-11. Bit Transfer on the I<sup>2</sup>C Bus**

#### 7.5.1.2 START and STOP Conditions

All transactions begin with a START (S) and are terminated with a STOP (P). A HIGH to LOW transition on the SDA line while SCL is HIGH defines a START condition. A LOW to HIGH transition on the SDA line when the SCL is HIGH defines a STOP condition.


START and STOP conditions are always generated by the host. The bus is considered busy after the START condition, and free after the STOP condition.

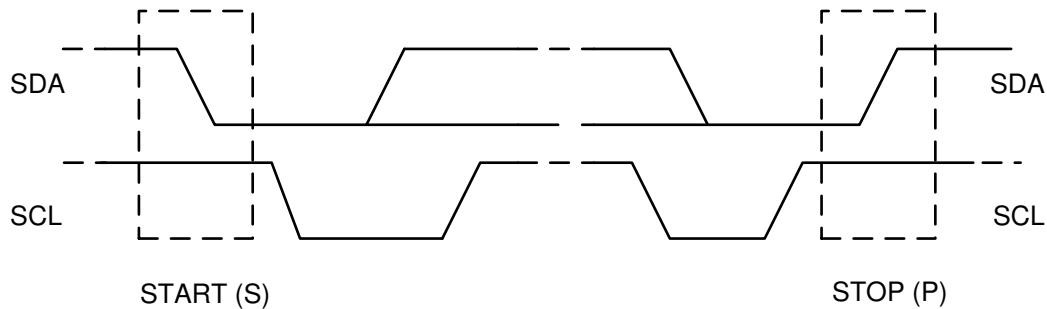

**Figure 7-12. START and STOP Conditions on the I²C Bus**

### 7.5.1.3 Byte Format

Every byte on the SDA line must be 8 bits long. The number of bytes to be transmitted per transfer is unrestricted. Each byte has to be followed by an ACKNOWLEDGE (ACK) bit. Data is transferred with the Most Significant Bit (MSB) first. If a target cannot receive or transmit another complete byte of data until it has performed some other function, it can hold the SCL line low to force the host into a wait state (clock stretching). Data transfer then continues when the target is ready for another byte of data and releases the SCL line.

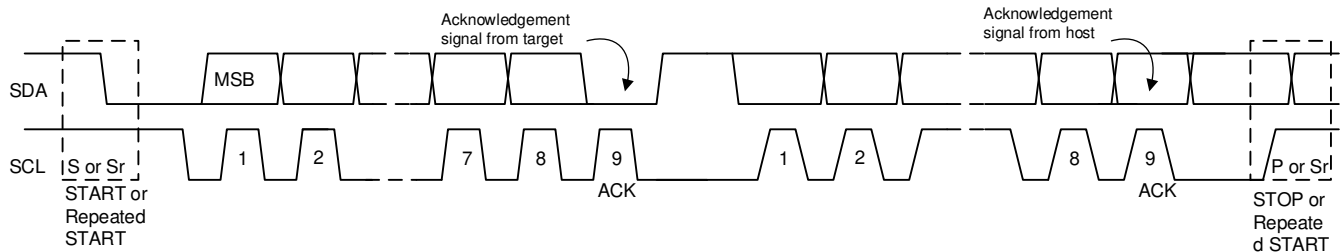

**Figure 7-13. Data Transfer on the I²C Bus**

### 7.5.1.4 Acknowledge (ACK) and Not Acknowledge (NACK)


The ACK signaling takes place after each transmitted byte. The ACK bit allows the host to signal the transmitter that the byte was successfully received and another byte may be sent. All clock pulses, including the acknowledge 9<sup>th</sup> clock pulse, are generated by the host.

The transmitter releases the SDA line during the acknowledge clock pulse so the host can pull the SDA line LOW and it remains stable LOW during the HIGH period of this 9<sup>th</sup> clock pulse.

A NACK is signaled when the SDA line remains HIGH during the 9<sup>th</sup> clock pulse. The host can then generate either a STOP to abort the transfer or a repeated START to start a new transfer.


### 7.5.1.5 Target Address and Data Direction Bit

After the START signal, a target address is sent. This address is 7 bits long, followed by the 8 bit as a data direction bit (bit R/  $\bar{W}$ ). A zero indicates a transmission (WRITE) and a one indicates a request for data (READ). The device 7-bit address is defined as 1101 100' (0x6C). The address bit arrangement is shown below.

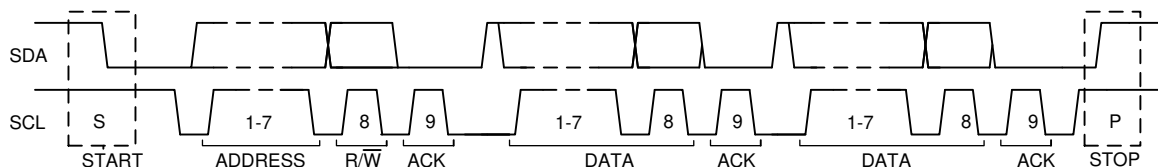


**Figure 7-14. Complete Data Transfer on the I²C Bus**

### 7.5.1.6 Single Write and Read

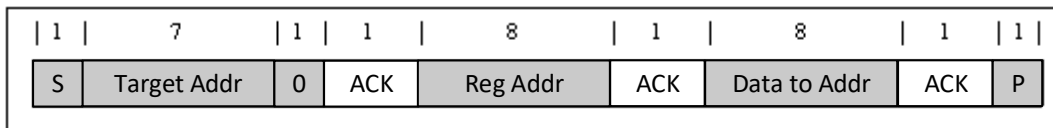

**Figure 7-15. Single Write**

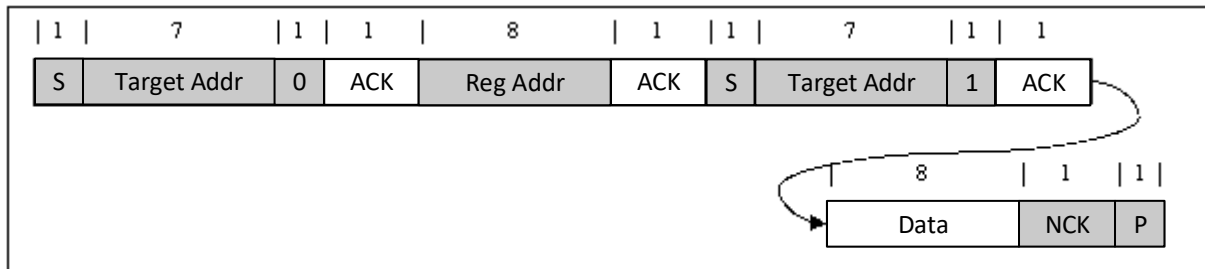


**Figure 7-16. Single Read**


If the register address is not defined, the charger IC sends back NACK and returns to the idle state.

### 7.5.1.7 Multi-Write and Multi-Read

The charger device supports multi-byte read and multi-byte write of all registers. These multi-byte operations are allowed to cross register boundaries. For instance, the entire register map may be read in a single operation with a 39-byte read that starts at register address 0x01.

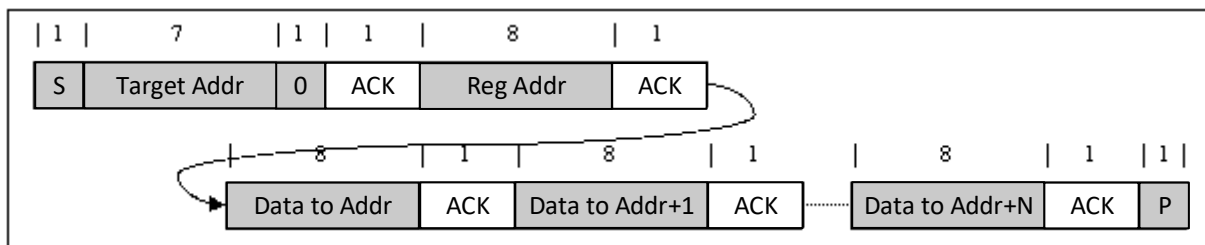

**Figure 7-17. Multi-Write**

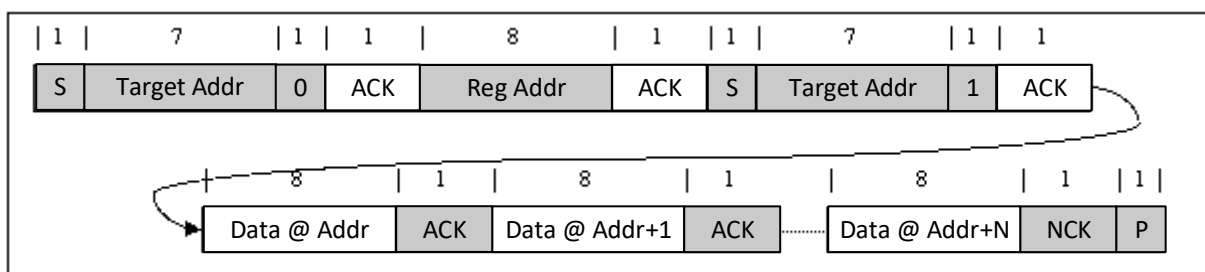

**Figure 7-18. Multi-Read**

## 7.6 Register Maps

### 7.6.1 BQ25190 Registers

Table 7-9 lists the memory-mapped registers for the BQ25190 registers. All register offset addresses not listed in Table 7-9 should be considered as reserved locations and the register contents should not be modified.

**Table 7-9. BQ25190 Registers**

| Offset | Acronym                     | Register Name       | Section                          |
|--------|-----------------------------|---------------------|----------------------------------|
| 0h     | REG0x00_STAT0               | STAT0               | <a href="#">Section 7.6.1.1</a>  |
| 1h     | REG0x01_STAT1               | STAT1               | <a href="#">Section 7.6.1.2</a>  |
| 2h     | REG0x02_STAT2               | STAT2               | <a href="#">Section 7.6.1.3</a>  |
| 3h     | REG0x03_STAT3               | STAT3               | <a href="#">Section 7.6.1.4</a>  |
| 4h     | REG0x04_FLAG0               | FLAG0               | <a href="#">Section 7.6.1.5</a>  |
| 5h     | REG0x05_FLAG1               | FLAG1               | <a href="#">Section 7.6.1.6</a>  |
| 6h     | REG0x06_FLAG2               | FLAG2               | <a href="#">Section 7.6.1.7</a>  |
| 7h     | REG0x07_FLAG3               | FLAG3               | <a href="#">Section 7.6.1.8</a>  |
| 8h     | REG0x08_MASK0               | MASK0               | <a href="#">Section 7.6.1.9</a>  |
| 9h     | REG0x09_MASK1               | MASK1               | <a href="#">Section 7.6.1.10</a> |
| Ah     | REG0x0A_MASK2               | MASK2               | <a href="#">Section 7.6.1.11</a> |
| Bh     | REG0x0B_MASK3               | MASK3               | <a href="#">Section 7.6.1.12</a> |
| Ch     | REG0x0C_VBAT                | VBAT                | <a href="#">Section 7.6.1.13</a> |
| Dh     | REG0x0D_ICHG_CTRL           | ICHG_CTRL           | <a href="#">Section 7.6.1.14</a> |
| Eh     | REG0x0E_CHARGECTRL0         | CHARGECTRL0         | <a href="#">Section 7.6.1.15</a> |
| Fh     | REG0x0F_CHARGECTRL1         | CHARGECTRL1         | <a href="#">Section 7.6.1.16</a> |
| 10h    | REG0x10_IC_CTRL             | IC_CTRL             | <a href="#">Section 7.6.1.17</a> |
| 11h    | REG0x11_TMR_ILIM            | TMR_ILIM            | <a href="#">Section 7.6.1.18</a> |
| 12h    | REG0x12_SHIP_RST            | SHIP_RST            | <a href="#">Section 7.6.1.19</a> |
| 13h    | REG0x13_SYS_REG             | SYS_REG             | <a href="#">Section 7.6.1.20</a> |
| 14h    | REG0x14_TS_COLD             | TS_COLD             | <a href="#">Section 7.6.1.21</a> |
| 15h    | REG0x15_TS_COOL             | TS_COOL             | <a href="#">Section 7.6.1.22</a> |
| 16h    | REG0x16_TS_WARM             | TS_WARM             | <a href="#">Section 7.6.1.23</a> |
| 17h    | REG0x17_TS_HOT              | TS_HOT              | <a href="#">Section 7.6.1.24</a> |
| 18h    | REG0x18_ADCCTRL0            | ADCCTRL0            | <a href="#">Section 7.6.1.25</a> |
| 19h    | REG0x19_ADCCTRL1            | ADCCTRL1            | <a href="#">Section 7.6.1.26</a> |
| 1Ah    | REG0x1A_ADCCTRL2            | ADCCTRL2            | <a href="#">Section 7.6.1.27</a> |
| 1Bh    | REG0x1B_ADC_DATA_VBAT       | ADC_DATA_VBAT       | <a href="#">Section 7.6.1.28</a> |
| 1Dh    | REG0x1D_ADC_DATA_TS         | ADC_DATA_TS         | <a href="#">Section 7.6.1.29</a> |
| 1Fh    | REG0x1F_ADC_DATA_IBAT       | ADC_DATA_IBAT       | <a href="#">Section 7.6.1.30</a> |
| 21h    | REG0x21_ADC_DATA_ADCIN      | ADC_DATA_ADCIN      | <a href="#">Section 7.6.1.31</a> |
| 23h    | REG0x23_ADC_DATA_VIN        | ADC_DATA_VIN        | <a href="#">Section 7.6.1.32</a> |
| 25h    | REG0x25_ADC_DATA_VSYS       | ADC_DATA_VSYS       | <a href="#">Section 7.6.1.33</a> |
| 27h    | REG0x27_ADC_DATA_IIN        | ADC_DATA_IIN        | <a href="#">Section 7.6.1.34</a> |
| 29h    | REG0x29_ADC_DATA_TDIE       | ADC_DATA_TDIE       | <a href="#">Section 7.6.1.35</a> |
| 2Bh    | REG0x2B_ADCALARM_COMP1      | ADCALARM_COMP1      | <a href="#">Section 7.6.1.36</a> |
| 2Dh    | REG0x2D_ADCALARM_COMP2      | ADCALARM_COMP2      | <a href="#">Section 7.6.1.37</a> |
| 2Fh    | REG0x2F_ADCALARM_COMP3      | ADCALARM_COMP3      | <a href="#">Section 7.6.1.38</a> |
| 31h    | REG0x31_ADC_CHANNEL_DISABLE | ADC_CHANNEL_DISABLE | <a href="#">Section 7.6.1.39</a> |
| 32h    | REG0x32_BUCK_VOUT           | BUCK_VOUT           | <a href="#">Section 7.6.1.40</a> |

**Table 7-9. BQ25190 Registers (continued)**

| Offset | Acronym                  | Register Name    | Section                          |
|--------|--------------------------|------------------|----------------------------------|
| 33h    | REG0x33_BUCK_VOUT1       | BUCK_VOUT1       | <a href="#">Section 7.6.1.41</a> |
| 34h    | REG0x34_BUCK_VOUT2       | BUCK_VOUT2       | <a href="#">Section 7.6.1.42</a> |
| 35h    | REG0x35_BUCK_VOUT3       | BUCK_VOUT3       | <a href="#">Section 7.6.1.43</a> |
| 36h    | REG0x36_BUCK_VOUT4       | BUCK_VOUT4       | <a href="#">Section 7.6.1.44</a> |
| 37h    | REG0x37_BUCK_CTRL0       | BUCK_CTRL0       | <a href="#">Section 7.6.1.45</a> |
| 38h    | REG0x38_BUCK_CTRL1       | BUCK_CTRL1       | <a href="#">Section 7.6.1.46</a> |
| 39h    | REG0x39_BUBO_CTRL0       | BUBO_CTRL0       | <a href="#">Section 7.6.1.47</a> |
| 3Ah    | REG0x3A_BUBO_CTRL1       | BUBO_CTRL1       | <a href="#">Section 7.6.1.48</a> |
| 3Bh    | REG0x3B_LDO1_CTRL0       | LDO1_CTRL0       | <a href="#">Section 7.6.1.49</a> |
| 3Ch    | REG0x3C_LDO1_CTRL1       | LDO1_CTRL1       | <a href="#">Section 7.6.1.50</a> |
| 3Dh    | REG0x3D_LDO2_CTRL0       | LDO2_CTRL0       | <a href="#">Section 7.6.1.51</a> |
| 3Eh    | REG0x3E_LDO2_CTRL1       | LDO2_CTRL1       | <a href="#">Section 7.6.1.52</a> |
| 3Fh    | REG0x3F_NTC_CTRL         | NTC_CTRL         | <a href="#">Section 7.6.1.53</a> |
| 40h    | REG0x40_GPIO1_CTRL       | GPIO1_CTRL       | <a href="#">Section 7.6.1.54</a> |
| 41h    | REG0x41_GPIO2_CTRL       | GPIO2_CTRL       | <a href="#">Section 7.6.1.55</a> |
| 42h    | REG0x42_GPIO3_CTRL       | GPIO3_CTRL       | <a href="#">Section 7.6.1.56</a> |
| 43h    | REG0x43_GPIO4_CTRL       | GPIO4_CTRL       | <a href="#">Section 7.6.1.57</a> |
| 44h    | REG0x44_PART_INFORMATION | PART_INFORMATION | <a href="#">Section 7.6.1.58</a> |

Complex bit access types are encoded to fit into small table cells. [Table 7-10](#) shows the codes that are used for access types in this section.

**Table 7-10. BQ25190 Access Type Codes**

| Access Type            | Code | Description                            |
|------------------------|------|--|
| Read Type              |      |  |
| R                      | R    | Read                                   |
| Write Type             |      |  |
| W                      | W    | Write                                  |
| Reset or Default Value |      |  |
| -n                     |      | Value after reset or the default value |

#### 7.6.1.1 REG0x00\_STAT0 Register (Offset = 0h) [Reset = XXh]

REG0x00\_STAT0 is shown in [Figure 7-19](#) and described in [Table 7-11](#).

Return to the [Summary Table](#).

Charger Status 0

**Figure 7-19. REG0x00\_STAT0 Register**

| 7            | 6       | 5 | 4 | 3        | 2                | 1                 | 0                  |
|--------------|---------|---|---|----------|------------------|-------------------|--------------------|
| TS_OPEN_STAT | TS_STAT |   |   | RESERVED | ILIM_ACTIVE_STAT | VDPPM_ACTIVE_STAT | VINDPM_ACTIVE_STAT |
| R-Xh         | R-Xh    |   |   | R-0h     | R-Xh             | R-Xh              | R-Xh               |

**Table 7-11. REG0x00\_STAT0 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description   |
|-----|--------------------|------|-------|---|
| 7   | TS_OPEN_STAT       | R    | X     | TS Open Status (Clamp is active)<br>0b = TS is not Open<br>1b = TS is Open  |
| 6-4 | TS_STAT            | R    | X     | TS Status<br>000b = TS_NORMAL (VWARM < VTS < VCOOL)<br>001b = TS_COLD (VTS > VCOLD)<br>010b = TS_HOT (VTS < VHOT)<br>011b = TS_COOL (VCOOL < VTS < VCOLD)<br>100b = TS_WARM (VHOT < VTS < VWARM)<br>101b = Reserved<br>110b = Reserved<br>111b = Reserved |
| 3   | RESERVED           | R    | X     | Reserved  |
| 2   | ILIM_ACTIVE_STAT   | R    | X     | Input Current Limit Active<br>0b = Not Active<br>1b = Active  |
| 1   | VDPPM_ACTIVE_STAT  | R    | X     | VDPPM Mode Active<br>0b = Not Active<br>1b = Active   |
| 0   | VINDPM_ACTIVE_STAT | R    | X     | VINDPM Mode Active<br>0b = Not Active<br>1b = Active  |

#### 7.6.1.2 REG0x01\_STAT1 Register (Offset = 1h) [Reset = XXh]

REG0x01\_STAT1 is shown in [Figure 7-20](#) and described in [Table 7-12](#).

Return to the [Summary Table](#).

Charger Status 1

**Figure 7-20. REG0x01\_STAT1 Register**

| 7                    | 6        | 5 | 4 | 3             | 2                | 1                | 0                |
|----------------------|----------|---|---|---------------|------------------|------------------|------------------|
| THERMREG_ACTIVE_STAT | RESERVED |   |   | ADC_DONE_STAT | COMP1_ALARM_STAT | COMP2_ALARM_STAT | COMP3_ALARM_STAT |
| R-Xh                 | R-0h     |   |   | R-Xh          | R-Xh             | R-Xh             | R-Xh             |

**Table 7-12. REG0x01\_STAT1 Register Field Descriptions**

| Bit | Field                | Type | Reset | Description  |
|-----|----------------------|------|-------|--|
| 7   | THERMREG_ACTIVE_STAT | R    | X     | Thermal Regulation Active<br>0b = Not Active<br>1b = Active  |
| 6-4 | RESERVED             | R    | X     | Reserved   |
| 3   | ADC_DONE_STAT        | R    | X     | ADC Conversion Status (in one-shot mode only)<br>Note: Always reads 0 in continuous mode<br>0b = Conversion not complete<br>1b = Conversion complete                             |
| 2   | COMP1_ALARM_STAT     | R    | X     | COMP1 Status<br>0b = Selected ADC measurement does not meet condition set by 1_ADICALARM_ABOVE bit<br>1b = Selected ADC measurement meets condition set by 1_ADICALARM_ABOVE bit |

**Table 7-12. REG0x01\_STAT1 Register Field Descriptions (continued)**

| Bit | Field            | Type | Reset | Description  |
|-----|------------------|------|-------|--|
| 1   | COMP2_ALARM_STAT | R    | X     | COMP2 Status<br>0b = Selected ADC measurement does not meet condition set by 2_ADCALARM_ABOVE bit<br>1b = Selected ADC measurement meets condition set by 2_ADCALARM_ABOVE bit |
| 0   | COMP3_ALARM_STAT | R    | X     | COMP3 Status<br>0b = Selected ADC measurement does not meet condition set by 3_ADCALARM_ABOVE bit<br>1b = Selected ADC measurement meets condition set by 3_ADCALARM_ABOVE bit |

**7.6.1.3 REG0x02\_STAT2 Register (Offset = 2h) [Reset = XXh]**

REG0x02\_STAT2 is shown in [Figure 7-21](#) and described in [Table 7-13](#).

Return to the [Summary Table](#).

Charger Status 2

**Figure 7-21. REG0x02\_STAT2 Register**

| 7        | 6                | 5        | 4 | 3 | 2 | 1              | 0            |
|----------|------------------|----------|---|---|---|----------------|--------------|
| CHG_STAT | SEQUENCE_PG_STAT | RESERVED |   |   |   | VIN_PGOOD_STAT | VIN_OVP_STAT |
| R-Xh     | R-Xh             | R-0h     |   |   |   | R-Xh           | R-Xh         |

**Table 7-13. REG0x02\_STAT2 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description   |
|-----|------------------|------|-------|---|
| 7-6 | CHG_STAT         | R    | X     | Charging Status Indicator<br>00b = When charging is enabled but device is not charging<br>01b = When charger is in constant current charging (Trickle Charge, Precharge or Fast charge)<br>10b = When charger is in constant voltage operation<br>11b = When charging is done or disabled by the host |
| 5   | SEQUENCE_PG_STAT | R    | X     | Sequence Power Good<br>0b = Sequence Power Not Good<br>1b = Sequence Power Good   |
| 4-2 | RESERVED         | R    | 0h    | Reserved  |
| 1   | VIN_PGOOD_STAT   | R    | X     | VIN Power Good<br>0b = VIN Power Not Good<br>1b = VIN Power Good  |
| 0   | VIN_OVP_STAT     | R    | X     | VIN OVP Fault<br>0b = Not Active<br>1b = Active   |



#### 7.6.1.4 REG0x03\_STAT3 Register (Offset = 3h) [Reset = XXh]

REG0x03\_STAT3 is shown in [Figure 7-22](#) and described in [Table 7-14](#).

Return to the [Summary Table](#).

Charger Status 3

**Figure 7-22. REG0x03\_STAT3 Register**

| 7          | 6          | 5          | 4          | 3        | 2 | 1                  | 0          |
|------------|------------|------------|------------|----------|---|--------------------|------------|
| GPIO1_STAT | GPIO2_STAT | GPIO3_STAT | GPIO4_STAT | RESERVED |   | BATDEPL_FAULT_STAT | TSHUT_STAT |
| R-Xh       | R-Xh       | R-Xh       | R-Xh       | R-0h     |   | R-Xh               | R-Xh       |

**Table 7-14. REG0x03\_STAT3 Register Field Descriptions**

| Bit | Field              | Type | Reset | Description  |
|-----|--------------------|------|-------|--|
| 7   | GPIO1_STAT         | R    | X     | GPIO1 Status<br>0b = GPIO1 is low<br>1b = GPIO1 is high in input modes |
| 6   | GPIO2_STAT         | R    | X     | GPIO2 Status<br>0b = GPIO2 is low<br>1b = GPIO2 is high in input modes |
| 5   | GPIO3_STAT         | R    | X     | GPIO3 Status<br>0b = GPIO3 is low<br>1b = GPIO3 is high in input modes |
| 4   | GPIO4_STAT         | R    | X     | GPIO4 Status<br>0b = GPIO1 is low<br>1b = GPIO4 is high in input modes |
| 3-2 | RESERVED           | R    | 0h    | Reserved   |
| 1   | BATDEPL_FAULT_STAT | R    | X     | BATDEPL<br>0b = Not Active<br>1b = Active                              |
| 0   | TSHUT_STAT         | R    | X     | Thermal Shutdown<br>0b = Not Active<br>1b = Active                     |

#### 7.6.1.5 REG0x04\_FLAG0 Register (Offset = 4h) [Reset = 00h]

REG0x04\_FLAG0 is shown in [Figure 7-23](#) and described in [Table 7-15](#).

Return to the [Summary Table](#).

Flags 0

**Figure 7-23. REG0x04\_FLAG0 Register**

| 7            | 6       | 5        | 4 | 3 | 2                | 1                 | 0                  |
|--------------|---------|----------|---|---|------------------|-------------------|--------------------|
| TS_OPEN_FLAG | TS_FLAG | RESERVED |   |   | ILIM_ACTIVE_FLAG | VDPPM_ACTIVE_FLAG | VINDPM_ACTIVE_FLAG |
| R-0h         | R-0h    | R-0h     |   |   | R-0h             | R-0h              | R-0h               |

**Table 7-15. REG0x04\_FLAG0 Register Field Descriptions**

| Bit | Field        | Type | Reset | Description  |
|-----|--------------|------|-------|--|
| 7   | TS_OPEN_FLAG | R    | 0h    | TS Open Flag<br>Access: R (ClearOnRead)<br>0b = No TS Open fault detected<br>1b = TS Open fault detected |

**Table 7-15. REG0x04\_FLAG0 Register Field Descriptions (continued)**

| Bit | Field              | Type | Reset | Description  |
|-----|--------------------|------|-------|--|
| 6   | TS_FLAG            | R    | 0h    | TS status Flag<br>Access: R (ClearOnRead)<br>0b = No change to TS status (TS_STAT) was detected<br>1b = A change to TS status (TS_STAT) was detected |
| 5-3 | RESERVED           | R    | 0h    | Reserved   |
| 2   | ILIM_ACTIVE_FLAG   | R    | 0h    | ILIM Active<br>Access: R (ClearOnRead)<br>0b = ILIM not detected<br>1b = ILIM detected   |
| 1   | VDPPM_ACTIVE_FLAG  | R    | 0h    | VDPPM Flag<br>Access: R (ClearOnRead)<br>0b = VDPPM regulation not detected<br>1b = VDPPM regulation detected  |
| 0   | VINDPM_ACTIVE_FLAG | R    | 0h    | VINDPM Flag<br>Access: R (ClearOnRead)<br>0b = VINDPM regulation not detected<br>1b = VINDPM regulation detected                                     |

**7.6.1.6 REG0x05\_FLAG1 Register (Offset = 5h) [Reset = 00h]**

REG0x05\_FLAG1 is shown in [Figure 7-24](#) and described in [Table 7-16](#).

Return to the [Summary Table](#).

Flags 1

**Figure 7-24. REG0x05\_FLAG1 Register**

| 7                    | 6                     | 5          | 4          | 3             | 2                | 1                | 0                |
|----------------------|-----------------------|------------|------------|---------------|------------------|------------------|------------------|
| THERMREG_ACTIVE_FLAG | SAFETY_TMR_FAULT_FLAG | WAKE1_FLAG | WAKE2_FLAG | ADC_DONE_FLAG | COMP1_ALARM_FLAG | COMP2_ALARM_FLAG | COMP3_ALARM_FLAG |
| R-0h                 | R-0h                  | R-0h       | R-0h       | R-0h          | R-0h             | R-0h             | R-0h             |

**Table 7-16. REG0x05\_FLAG1 Register Field Descriptions**

| Bit | Field                 | Type | Reset | Description   |
|-----|-----------------------|------|-------|---|
| 7   | THERMREG_ACTIVE_FLAG  | R    | 0h    | Thermal regulation Flag<br>Access: R (ClearOnRead)<br>0b = No thermal regulation detected<br>1b = Thermal regulation has occurred |
| 6   | SAFETY_TMR_FAULT_FLAG | R    | 0h    | Safety Timer Expired Flag<br>Access: R (ClearOnRead)<br>0b = Not Active<br>1b = Active  |
| 5   | WAKE1_FLAG            | R    | 0h    | Wake 1 Timer Flag<br>Access: R (ClearOnRead)<br>0b = Does not meet Wake 1 Condition<br>1b = Met Wake 1 Condition                  |
| 4   | WAKE2_FLAG            | R    | 0h    | Wake 2 Timer Flag<br>Access: R (ClearOnRead)<br>0b = Does not meet Wake 2 Condition<br>1b = Met Wake 2 Condition                  |

**Table 7-16. REG0x05\_FLAG1 Register Field Descriptions (continued)**

| Bit | Field            | Type | Reset | Description   |
|-----|------------------|------|-------|---|
| 3   | ADC_DONE_FLAG    | R    | 0h    | ADC Conversion Flag (only in one-shot mode)<br><br>Access: R (ClearOnRead)<br>0b = Conversion not completed<br>1b = Conversion completed                                      |
| 2   | COMP1_ALARM_FLAG | R    | 0h    | ADC COMP1 Threshold Flag<br><br>Access: R (ClearOnRead)<br>0b = No threshold crossing detected<br>1b = Selected ADC measurement crossed condition set by 1_ADCALARM_ABOVE bit |
| 1   | COMP2_ALARM_FLAG | R    | 0h    | ADC COMP2 Threshold Flag<br><br>Access: R (ClearOnRead)<br>0b = No threshold crossing detected<br>1b = Selected ADC measurement crossed condition set by 2_ADCALARM_ABOVE bit |
| 0   | COMP3_ALARM_FLAG | R    | 0h    | ADC COMP3 Threshold Flag<br><br>Access: R (ClearOnRead)<br>0b = No threshold crossing detected<br>1b = Selected ADC measurement crossed condition set by 3_ADCALARM_ABOVE bit |

#### 7.6.1.7 REG0x06\_FLAG2 Register (Offset = 6h) [Reset = 00h]

REG0x06\_FLAG2 is shown in [Figure 7-25](#) and described in [Table 7-17](#).

Return to the [Summary Table](#).

Flags 2

**Figure 7-25. REG0x06\_FLAG2 Register**

|          |                  |              |              |              |              |                |                    |
|----------|------------------|--------------|--------------|--------------|--------------|----------------|--------------------|
| 7        | 6                | 5            | 4            | 3            | 2            | 1              | 0                  |
| CHG_FLAG | SEQUENCE_PG_FLAG | BUCK_PG_FLAG | BUBO_PG_FLAG | LDO1_PG_FLAG | LDO2_PG_FLAG | VIN_PGOOD_FLAG | VIN_OVP_FAULT_FLAG |
| R-0h     | R-0h             | R-0h         | R-0h         | R-0h         | R-0h         | R-0h           | R-0h               |

**Table 7-17. REG0x06\_FLAG2 Register Field Descriptions**

| Bit | Field            | Type | Reset | Description  |
|-----|------------------|------|-------|--|
| 7   | CHG_FLAG         | R    | 0h    | Charge Status Flag<br><br>Access: R (ClearOnRead)<br>0b = No change in charge status<br>1b = Charge status changed   |
| 6   | SEQUENCE_PG_FLAG | R    | 0h    | Sequence Power Good Flag<br><br>Access: R (ClearOnRead)<br>0b = No change in sequence power good status detected<br>1b = Change in sequence power good status detected |
| 5   | BUCK_PG_FLAG     | R    | 0h    | Buck Power Good Flag<br><br>Access: R (ClearOnRead)<br>0b = Buck power not good event not detected<br>1b = Buck power not good event detected                          |
| 4   | BUBO_PG_FLAG     | R    | 0h    | Buck-boost Power Good Flag<br><br>Access: R (ClearOnRead)<br>0b = Buck-boost power not good event not detected<br>1b = Buck-boost power not good event detected        |

**Table 7-17. REG0x06\_FLAG2 Register Field Descriptions (continued)**

| Bit | Field              | Type | Reset | Description   |
|-----|--------------------|------|-------|---|
| 3   | LDO1_PG_FLAG       | R    | 0h    | LDO1 Power Good Flag<br>Access: R (ClearOnRead)<br>0b = LDO1 power not good event not detected<br>1b = LDO1 power not good event detected   |
| 2   | LDO2_PG_FLAG       | R    | 0h    | LDO2 Power Good Flag<br>Access: R (ClearOnRead)<br>0b = LDO2 power not good event not detected<br>1b = LDO2 power not good event detected   |
| 1   | VIN_PGOOD_FLAG     | R    | 0h    | VIN Power Good Flag<br>Access: R (ClearOnRead)<br>0b = No change in VIN power good status<br>1b = Change in VIN power good status detected. |
| 0   | VIN_OVP_FAULT_FLAG | R    | 0h    | VIN_OVP Flag<br>Access: R (ClearOnRead)<br>0b = VIN_OVP fault not detected<br>1b = VIN_OVP fault detected                                   |

**7.6.1.8 REG0x07\_FLAG3 Register (Offset = 7h) [Reset = 00h]**

REG0x07\_FLAG3 is shown in [Figure 7-26](#) and described in [Table 7-18](#).

Return to the [Summary Table](#).

Flags 3

**Figure 7-26. REG0x07\_FLAG3 Register**

| 7          | 6          | 5          | 4          | 3                        | 2                      | 1                      | 0          |
|------------|------------|------------|------------|--------------------------|------------------------|------------------------|------------|
| GPIO1_FLAG | GPIO2_FLAG | GPIO3_FLAG | GPIO4_FLAG | SYS_SHORT_F<br>AULT_FLAG | BATDEPL_FAU<br>LT_FLAG | BAT_OCP_FAU<br>LT_FLAG | TSHUT_FLAG |
| R-0h       | R-0h       | R-0h       | R-0h       | R-0h                     | R-0h                   | R-0h                   | R-0h       |

**Table 7-18. REG0x07\_FLAG3 Register Field Descriptions**

| Bit | Field                    | Type | Reset | Description  |
|-----|--------------------------|------|-------|--|
| 7   | GPIO1_FLAG               | R    | 0h    | GPIO1 Flag<br>0b = GPIO1 interrupt not triggered<br>1b = GPIO1 interrupt triggered                               |
| 6   | GPIO2_FLAG               | R    | 0h    | GPIO2 Flag<br>Access: R (ClearOnRead)<br>0b = GPIO2 interrupt not triggered<br>1b = GPIO2 interrupt triggered    |
| 5   | GPIO3_FLAG               | R    | 0h    | GPIO3 Flag<br>Access: R (ClearOnRead)<br>0b = GPIO3 interrupt not triggered<br>1b = GPIO3 interrupt triggered    |
| 4   | GPIO4_FLAG               | R    | 0h    | GPIO4 Flag<br>Access: R (ClearOnRead)<br>0b = GPIO4 interrupt not triggered<br>1b = GPIO4 interrupt triggered    |
| 3   | SYS_SHORT_FAULT_FL<br>AG | R    | 0h    | SYS Short Fault<br>Access: R (ClearOnRead)<br>0b = SYS short fault not detected<br>1b = SYS short fault detected |

**Table 7-18. REG0x07\_FLAG3 Register Field Descriptions (continued)**

| Bit | Field              | Type | Reset | Description   |
|-----|--------------------|------|-------|---|
| 2   | BATDEPL_FAULT_FLAG | R    | 0h    | Battery depletion Flag<br>Access: R (ClearOnRead)<br>0b = Battery depletion fault not detected<br>1b = Battery depletion fault detected                     |
| 1   | BAT_OCP_FAULT_FLAG | R    | 0h    | Battery overcurrent protection<br>Access: R (ClearOnRead)<br>0b = Battery overcurrent condition not detected<br>1b = Battery overcurrent condition detected |
| 0   | TSHUT_FLAG         | R    | 0h    | TSHUT Flag<br>Access: R (ClearOnRead)<br>0b = TSHUT not detected<br>1b = TSHUT detected   |

#### 7.6.1.9 REG0x08\_MASK0 Register (Offset = 8h) [Reset = 84h]

REG0x08\_MASK0 is shown in [Figure 7-27](#) and described in [Table 7-19](#).

Return to the [Summary Table](#).

Interrupt Masks 0

**Figure 7-27. REG0x08\_MASK0 Register**

| 7            | 6       | 5        | 4 | 3 | 2                | 1                 | 0                  |
|--------------|---------|----------|---|---|------------------|-------------------|--------------------|
| TS_OPEN_MASK | TS_MASK | RESERVED |   |   | ILIM_ACTIVE_MASK | VDPPM_ACTIVE_MASK | VINDPM_ACTIVE_MASK |
| R/W-1h       | R/W-0h  | R-0h     |   |   | R/W-1h           | R/W-0h            | R/W-0h             |

**Table 7-19. REG0x08\_MASK0 Register Field Descriptions**

| Bit | Field              | Type | Reset | Notes                  | Description   |
|-----|--------------------|------|-------|------------------------|---|
| 7   | TS_OPEN_MASK       | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for TS_OPEN interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked          |
| 6   | TS_MASK            | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for TS interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked               |
| 5-3 | RESERVED           | R    | 0h    |                        | Reserved  |
| 2   | ILIM_ACTIVE_MASK   | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for TS_IINLIM_ACTIVE interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked |
| 1   | VDPPM_ACTIVE_MASK  | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for VINDPM_ACTIVE interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked    |
| 0   | VINDPM_ACTIVE_MASK | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for VDPPM_ACTIVE interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked     |

#### 7.6.1.10 REG0x09\_MASK1 Register (Offset = 9h) [Reset = 07h]

REG0x09\_MASK1 is shown in [Figure 7-28](#) and described in [Table 7-20](#).

Return to the [Summary Table](#).

## Interrupt Masks 1

**Figure 7-28. REG0x09\_MASK1 Register**

| 7             | 6                     | 5          | 4          | 3             | 2                | 1                | 0                |
|---------------|-----------------------|------------|------------|---------------|------------------|------------------|------------------|
| TREG_INT_MASK | SAFETY_TMR_FAULT_MASK | WAKE1_MASK | WAKE2_MASK | ADC_DONE_MASK | COMP1_ALARM_MASK | COMP2_ALARM_MASK | COMP3_ALARM_MASK |
| R/W-0h        | R/W-0h                | R/W-0h     | R/W-0h     | R/W-0h        | R/W-1h           | R/W-1h           | R/W-1h           |

**Table 7-20. REG0x09\_MASK1 Register Field Descriptions**

| Bit | Field                 | Type | Reset | Notes                  | Description   |
|-----|-----------------------|------|-------|------------------------|---|
| 7   | TREG_INT_MASK         | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for THERMREG_ACTIVE interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                  |
| 6   | SAFETY_TMR_FAULT_MASK | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for SAFETY_TIMER_FAULT interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked               |
| 5   | WAKE1_MASK            | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for Wake 1 timer interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                     |
| 4   | WAKE2_MASK            | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for Wake 2 timer interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                     |
| 3   | ADC_DONE_MASK         | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for ADC_DONE interrupt (only in one-shot mode)<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked |
| 2   | COMP1_ALARM_MASK      | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for COMP1_ALARM interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                      |
| 1   | COMP2_ALARM_MASK      | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for COMP2_ALARM interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                      |
| 0   | COMP3_ALARM_MASK      | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for COMP3_ALARM interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked                      |

**7.6.1.11 REG0x0A\_MASK2 Register (Offset = Ah) [Reset = C0h]**

REG0x0A\_MASK2 is shown in [Figure 7-29](#) and described in [Table 7-21](#).

Return to the [Summary Table](#).

## Interrupt Masks 2

**Figure 7-29. REG0x0A\_MASK2 Register**

| 7                   | 6                | 5            | 4            | 3            | 2            | 1              | 0                  |
|---------------------|------------------|--------------|--------------|--------------|--------------|----------------|--------------------|
| CHG_STATUS_INT_MASK | SEQUENCE_PG_MASK | BUCK_PG_MASK | BUBO_PG_MASK | LDO1_PG_MASK | LDO2_PG_MASK | VIN_PGOOD_MASK | VIN_OVP_FAULT_MASK |
| R/W-1h              | R/W-1h           | R/W-0h       | R/W-0h       | R/W-0h       | R/W-0h       | R/W-0h         | R/W-0h             |

**Table 7-21. REG0x0A\_MASK2 Register Field Descriptions**

| Bit | Field               | Type | Reset | Notes                  | Description   |
|-----|---------------------|------|-------|------------------------|---|
| 7   | CHG_STATUS_INT_MASK | R/W  | 1h    | Reset by:<br>REG_RESET | Mask Charging Status Interrupt<br><br>0b = Enable Charging Status Interrupt anytime there is a charging status change. (this is disabled by default as when the battery is not present, the device will switch between CC and CV which can drive the MCU to keep servicing it's ISR)<br>1b = Mask Charging Status Interrupt |
| 6   | SEQUENCE_PG_MASK    | R/W  | 1h    | Reset by:<br>REG_RESET | Mask for sequence power good status change interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 5   | BUCK_PG_MASK        | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for BUCK_PG interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 4   | BUBO_PG_MASK        | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for BUBO_PG interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 3   | LDO1_PG_MASK        | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for LDO1_PG interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 2   | LDO2_PG_MASK        | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for LDO2_PG interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 1   | VIN_PGOOD_MASK      | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for VIN_PGOOD interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |
| 0   | VIN_OVP_FAULT_MASK  | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for VIN_OVP interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked  |

#### 7.6.1.12 REG0x0B\_MASK3 Register (Offset = Bh) [Reset = 00h]

REG0x0B\_MASK3 is shown in [Figure 7-30](#) and described in [Table 7-22](#).

Return to the [Summary Table](#).

Interrupt Masks 3

**Figure 7-30. REG0x0B\_MASK3 Register**

|          |   |   |   |                      |                    |                    |            |
|----------|---|---|---|----------------------|--------------------|--------------------|------------|
| 7        | 6 | 5 | 4 | 3                    | 2                  | 1                  | 0          |
| RESERVED |   |   |   | SYS_SHORT_FAULT_MASK | BAT_OCP_FAULT_MASK | BATDEPL_FAULT_MASK | TSHUT_MASK |
| R-0h     |   |   |   | R/W-0h               | R/W-0h             | R/W-0h             | R/W-0h     |

**Table 7-22. REG0x0B\_MASK3 Register Field Descriptions**

| Bit | Field                | Type | Reset | Notes                  | Description  |
|-----|----------------------|------|-------|------------------------|--|
| 7-4 | RESERVED             | R    | 0h    |                        | Reserved   |
| 3   | SYS_SHORT_FAULT_MASK | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for SYS_SHORT_FAULT interrupt<br><br>0b = Interrupt Not Masked<br>1b = Interrupt Masked |

**Table 7-22. REG0x0B\_MASK3 Register Field Descriptions (continued)**

| Bit | Field              | Type | Reset | Notes                  | Description  |
|-----|--------------------|------|-------|------------------------|--|
| 2   | BAT_OCP_FAULT_MASK | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for BAT_OCP_FAULT interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked |
| 1   | BATDEPL_FAULT_MASK | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for BATDEPL_FAULT interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked |
| 0   | TSHUT_MASK         | R/W  | 0h    | Reset by:<br>REG_RESET | Mask for TSHUT interrupt<br>0b = Interrupt Not Masked<br>1b = Interrupt Masked         |

**7.6.1.13 REG0x0C\_VBAT Register (Offset = Ch) [Reset = 46h]**

REG0x0C\_VBAT is shown in [Figure 7-31](#) and described in [Table 7-23](#).

Return to the [Summary Table](#).

Battery Voltage and Fast Charge Current Control

**Figure 7-31. REG0x0C\_VBAT Register**

|          |         |   |   |   |   |   |   |
|----------|---------|---|---|---|---|---|---|
| 7        | 6       | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | VBATREG |   |   |   |   |   |   |
| R-0h     | R/W-46h |   |   |   |   |   |   |

**Table 7-23. REG0x0C\_VBAT Register Field Descriptions**

| Bit | Field    | Type | Reset | Notes                  | Description  |
|-----|----------|------|-------|------------------------|--|
| 7   | RESERVED | R    | 0h    |                        | Reserved   |
| 6-0 | VBATREG  | R/W  | 46h   | Reset by:<br>REG_RESET | Battery Regulation Voltage<br>POR: 4200mV (46h)<br>Range: 3500mV-4650mV (0h-73h)<br>Clamped High<br>Bit Step: 10mV<br>Offset: 3500mV |

**7.6.1.14 REG0x0D\_ICHG\_CTRL Register (Offset = Dh) [Reset = 05h]**

REG0x0D\_ICHG\_CTRL is shown in [Figure 7-32](#) and described in [Table 7-24](#).

Return to the [Summary Table](#).

Fast Charge Current Control

**Figure 7-32. REG0x0D\_ICHG\_CTRL Register**

|         |        |   |   |   |   |   |   |
|---------|--------|---|---|---|---|---|---|
| 7       | 6      | 5 | 4 | 3 | 2 | 1 | 0 |
| CHG_DIS | ICHG   |   |   |   |   |   |   |
| R/W-0h  | R/W-5h |   |   |   |   |   |   |

**Table 7-24. REG0x0D\_ICHG\_CTRL Register Field Descriptions**

| Bit | Field   | Type | Reset | Notes                              | Description   |
|-----|---------|------|-------|------------------------------------|---|
| 7   | CHG_DIS | R/W  | 0h    | Reset by:<br>REG_RESET<br>WATCHDOG | Charge Disable<br>0b = Battery Charging Enabled<br>1b = Battery Charging Disabled |



**Table 7-24. REG0x0D\_ICHG\_CTRL Register Field Descriptions (continued)**

| Bit | Field | Type | Reset | Notes                              | Description   |
|-----|-------|------|-------|------------------------------------|---|
| 6-0 | ICHG  | R/W  | 5h    | Reset by:<br>REG_RESET<br>WATCHDOG | For ICHG <= 35mA ICHG = ICHGCODE +5mA<br>For ICHG > 35mA ICHG = 40+(ICHGCODE-31) x 10<br>mA |

#### 7.6.1.15 REG0x0E\_CHARGECTRL0 Register (Offset = Eh) [Reset = 70h]

REG0x0E\_CHARGECTRL0 is shown in [Figure 7-33](#) and described in [Table 7-25](#).

Return to the [Summary Table](#).

Charger Control 0

**Figure 7-33. REG0x0E\_CHARGECTRL0 Register**

|           |         |        |   |        |   |           |   |
|-----------|---------|--------|---|--------|---|-----------|---|
| 7         | 6       | 5      | 4 | 3      | 2 | 1         | 0 |
| VDPPM_DIS | IPRECHG | ITERM  |   | VINDPM |   | THERM_REG |   |
| R/W-0h    | R/W-1h  | R/W-3h |   | R/W-0h |   | R/W-0h    |   |

**Table 7-25. REG0x0E\_CHARGECTRL0 Register Field Descriptions**

| Bit | Field     | Type | Reset | Notes                              | Description   |
|-----|-----------|------|-------|------------------------------------|---|
| 7   | VDPPM_DIS | R/W  | 0h    | Reset by:<br>REG_RESET             | Disable Vin DPPM<br>0b = enable DPPM<br>1b = diable DPPM  |
| 6   | IPRECHG   | R/W  | 1h    | Reset by:<br>REG_RESET             | Precharge current = x times of term<br>0b = Precharge is 2 x Term<br>1b = Precharge is Term                       |
| 5-4 | ITERM     | R/W  | 3h    | Reset by:<br>REG_RESET<br>WATCHDOG | Termination current = % of Icharge<br>00b = Disable<br>01b = 5% of ICHG<br>10b = 10% of ICHG<br>11b = 20% of ICHG |
| 3-2 | VINDPM    | R/W  | 0h    | Reset by:<br>REG_RESET             | VINDPM Level Selection<br>00b = 4.2V<br>01b = 4.5V<br>10b = 4.7V<br>11b = Disabled                                |
| 1-0 | THERM_REG | R/W  | 0h    | Reset by:<br>REG_RESET             | Thermal Regulation Threshold<br>00b = 100degC<br>01b = 80degC<br>10b = 60degC<br>11b = Disabled                   |

#### 7.6.1.16 REG0x0F\_CHARGECTRL1 Register (Offset = Fh) [Reset = 45h]

REG0x0F\_CHARGECTRL1 is shown in [Figure 7-34](#) and described in [Table 7-26](#).

Return to the [Summary Table](#).

Charger Control 1

**Figure 7-34. REG0x0F\_CHARGECTRL1 Register**

|               |   |         |   |        |   |                     |   |
|---------------|---|---------|---|--------|---|---------------------|---|
| 7             | 6 | 5       | 4 | 3      | 2 | 1                   | 0 |
| IBAT_OCP_ILIM |   | BATDEPL |   | IBATSC |   | SEQUENCE_DELAY_TIME |   |
| R/W-1h        |   | R/W-0h  |   | R/W-1h |   | R/W-1h              |   |

**Table 7-26. REG0x0F\_CHARGECTRL1 Register Field Descriptions**

| Bit | Field               | Type | Reset | Notes                  | Description   |
|-----|---------------------|------|-------|------------------------|---|
| 7-6 | IBAT_OCP_ILIM       | R/W  | 1h    | Reset by:<br>REG_RESET | Battery Discharge Current Limit<br>00b = 500mA<br>01b = 1000mA<br>10b = 1500mA<br>11b = 3250mA  |
| 5-3 | BATDEPL             | R/W  | 0h    | Reset by:<br>REG_RESET | Battery Depletion Threshold Falling (150mV Hyst).<br>000b = 3.0V<br>001b = 2.8V<br>010b = 2.7V<br>011b = 2.5V<br>100b = 2.4V<br>101b = 2.3V<br>110b = 2.2V<br>111b = 2.1V |
| 2   | IBATSC              | R/W  | 1h    | Reset by:<br>REG_RESET | Set battery short trickle charging current<br>0b = 8mA<br>1b = 1mA  |
| 1-0 | SEQUENCE_DELAY_TIME | R/W  | 1h    | Reset by:<br>REG_RESET | Delay Time In Sequence<br>00b = 1ms<br>01b = 4ms<br>10b = 16ms<br>11b = 64ms  |

**7.6.1.17 REG0x10\_IC\_CTRL Register (Offset = 10h) [Reset = 10h]**

REG0x10\_IC\_CTRL is shown in [Figure 7-35](#) and described in [Table 7-27](#).

Return to the [Summary Table](#).

IC Control

**Figure 7-35. REG0x10\_IC\_CTRL Register**

| 7        | 6         | 5      | 4        | 3            | 2 | 1            | 0 |
|----------|-----------|--------|----------|--------------|---|--------------|---|
| RESERVED | VLOWV_SEL | VRECHG | TMR2X_EN | SAFETY_TIMER |   | WATCHDOG_SEL |   |
| R-0h     | R/W-0h    | R/W-0h | R/W-1h   | R/W-0h       |   | R/W-0h       |   |

**Table 7-27. REG0x10\_IC\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                              | Description   |
|-----|--------------|------|-------|------------------------------------|---|
| 7   | RESERVED     | R    | 0h    |                                    | Reserved  |
| 6   | VLOWV_SEL    | R/W  | 0h    |                                    | Precharge Voltage Threshold (VLOWV)<br>0b = 3V(default)<br>1b = 2.8V  |
| 5   | VRECHG       | R/W  | 0h    | Reset by:<br>REG_RESET             | Recharge Voltage Threshold<br>0b = 100mV<br>1b = 200mV  |
| 4   | TMR2X_EN     | R/W  | 1h    | Reset by:<br>REG_RESET             | Timer Slow<br>0b = The timer is not slowed at any time<br>1b = The timer is slowed by 2x when in any control other than CC or CV      |
| 3-2 | SAFETY_TIMER | R/W  | 0h    | Reset by:<br>REG_RESET<br>WATCHDOG | Fast Charge Timer<br>00b = 3 hour fast charge<br>01b = 6 hour fast charge<br>10b = 12 hour fast charge<br>11b = Disabled Safety timer |

**Table 7-27. REG0x10\_IC\_CTRL Register Field Descriptions (continued)**

| Bit | Field        | Type | Reset | Notes                  | Description  |
|-----|--------------|------|-------|------------------------|--|
| 1-0 | WATCHDOG_SEL | R/W  | 0h    | Reset by:<br>REG_RESET | Watchdog Selection<br><br>00b = 160s software reset<br>01b = 160s HW_RESET<br>10b = 40s HW_RESET<br>11b = Disabled watchdog function |

#### 7.6.1.18 REG0x11\_TMR\_ILIM Register (Offset = 11h) [Reset = 55h]

REG0x11\_TMR\_ILIM is shown in [Figure 7-36](#) and described in [Table 7-28](#).

Return to the [Summary Table](#).

Timer and Input Current Limit Control

**Figure 7-36. REG0x11\_TMR\_ILIM Register**

|           |   |                           |          |   |        |   |   |
|-----------|---|---------------------------|----------|---|--------|---|---|
| 7         | 6 | 5                         | 4        | 3 | 2      | 1 | 0 |
| MR_LPRESS |   | HOST_HW_RE<br>SET_VIN_REQ | AUTOWAKE |   | ILIM   |   |   |
| R/W-1h    |   | R/W-0h                    | R/W-2h   |   | R/W-5h |   |   |

**Table 7-28. REG0x11\_TMR\_ILIM Register Field Descriptions**

| Bit | Field                     | Type | Reset | Notes                  | Description   |
|-----|---------------------------|------|-------|------------------------|---|
| 7-6 | MR_LPRESS                 | R/W  | 1h    | Reset by:<br>REG_RESET | Push button Long Press duration timer<br><br>00b = 5s<br>01b = 10s<br>10b = 15s<br>11b = 20s  |
| 5   | HOST_HW_RESET<br>_VIN_REQ | R/W  | 0h    |                        | Host Initiated Hardware Reset VIN_UVLO<br>Requirement<br><br>0b = Host initiated hardware reset not requiring VIN ><br>VIN_UVLO<br>1b = Host initiated hardware reset requiring VIN ><br>VIN_UVLO |
| 4-3 | AUTOWAKE                  | R/W  | 2h    | Reset by:<br>REG_RESET | Auto Wake UP Timer Restart<br><br>00b = 0.5s<br>01b = 1s<br>10b = 2s<br>11b = 4s  |
| 2-0 | ILIM                      | R/W  | 5h    | Reset by:<br>REG_RESET | Input Current Limit Setting<br><br>000b = 25mA<br>001b = 50mA<br>010b = 90mA<br>011b = 200mA<br>100b = 300mA<br>101b = 475mA<br>110b = 665mA<br>111b = 1050mA                                     |

#### 7.6.1.19 REG0x12\_SHIP\_RST Register (Offset = 12h) [Reset = 0Ah]

REG0x12\_SHIP\_RST is shown in [Figure 7-37](#) and described in [Table 7-29](#).

Return to the [Summary Table](#).

Shipmode, Reset and Pushbutton Control

**Figure 7-37. REG0x12\_SHIP\_RST Register**

| 7       | 6           | 5                | 4         | 3         | 2        | 1 | 0 |
|---------|-------------|------------------|-----------|-----------|----------|---|---|
| REG_RST | EN_RST_SHIP | PB_LPRESS_ACTION | WAKE1_TMR | WAKE2_TMR | RESERVED |   |   |
| R/W-0h  | R/W-0h      | R/W-1h           | R/W-0h    | R/W-1h    | R-0h     |   |   |

**Table 7-29. REG0x12\_SHIP\_RST Register Field Descriptions**

| Bit | Field            | Type | Reset | Notes                  | Description  |
|-----|------------------|------|-------|------------------------|--|
| 7   | REG_RST          | R/W  | 0h    |                        | Software Reset<br>0b = Do nothing<br>1b = Software Reset   |
| 6-5 | EN_RST_SHIP      | R/W  | 0h    | Reset by:<br>REG_RESET | Ship Mode Enable and Hardware Reset<br>00b = Do nothing<br>01b = Hardware reset<br>10b = Enable ship mode<br>11b = Reserved                                  |
| 4-3 | PB_LPRESS_ACTION | R/W  | 1h    | Reset by:<br>REG_RESET | Pushbutton Long Press Action (taken when /MR is pressed for tLPRESS)<br>00b = Do nothing<br>01b = Hardware reset<br>10b = Enable ship mode<br>11b = Reserved |
| 2   | WAKE1_TMR        | R/W  | 0h    | Reset by:<br>REG_RESET | Wake 1 Timer Set<br>0b = 125ms<br>1b = 500ms   |
| 1   | WAKE2_TMR        | R/W  | 1h    | Reset by:<br>REG_RESET | Wake 2 Timer Set<br>0b = 1s<br>1b = 2s   |
| 0   | RESERVED         | R    | 0h    |                        | Reserved   |

**7.6.1.20 REG0x13\_SYS\_REG Register (Offset = 13h) [Reset = 44h]**

REG0x13\_SYS\_REG is shown in [Figure 7-38](#) and described in [Table 7-30](#).

Return to the [Summary Table](#).

SYS Regulation Voltage Control

**Figure 7-38. REG0x13\_SYS\_REG Register**

| 7            | 6                       | 5        | 4       | 3        | 2 | 1 | 0 |
|--------------|-------------------------|----------|---------|----------|---|---|---|
| SYS_REG_CTRL | WATCHDOG_1<br>5S_ENABLE | RESERVED | VIN_OVP | SYS_MODE |   |   |   |
| R/W-2h       | R/W-0h                  | R-0h     | R/W-1h  | R/W-0h   |   |   |   |

**Table 7-30. REG0x13\_SYS\_REG Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description  |
|-----|--------------|------|-------|------------------------|--|
| 7-5 | SYS_REG_CTRL | R/W  | 2h    | Reset by:<br>REG_RESET | SYS Regulation Voltage<br>000b = VBAT + 225mV<br>001b = 4.4V<br>010b = 4.5V<br>011b = 4.6V<br>100b = 4.7V<br>101b = 4.8V<br>110b = 4.9V<br>111b = Pass Through |

**Table 7-30. REG0x13\_SYS\_REG Register Field Descriptions (continued)**

| Bit | Field               | Type | Reset | Notes                              | Description  |
|-----|---------------------|------|-------|------------------------------------|--|
| 4   | WATCHDOG_15S_ENABLE | R/W  | 0h    | Reset by:<br>REG_RESET             | I2C Watchdog<br><br>0b = Mode Disabled<br>1b = Do a HW reset after 15s if no I2C transaction after VIN plugged   |
| 3   | RESERVED            | R    | 0h    |                                    | Reserved   |
| 2   | VIN_OVP             | R/W  | 1h    | Reset by:<br>REG_RESET             | Sets VIN Overvoltage Protection Threshold<br><br>0b = 5.7V<br>1b = 18.5V   |
| 1-0 | SYS_MODE            | R/W  | 0h    | Reset by:<br>REG_RESET<br>WATCHDOG | Sets System Power Mode<br><br>00b = SYS powered from VIN if present or VBAT<br>01b = SYS powered from VBAT only, even if VIN present<br>10b = SYS disconnected and left floating<br>11b = SYS disconnected with pulldown |

#### 7.6.1.21 REG0x14\_TS\_COLD Register (Offset = 14h) [Reset = 91h]

REG0x14\_TS\_COLD is shown in [Figure 7-39](#) and described in [Table 7-31](#).

Return to the [Summary Table](#).

TS\_COLD Threshold

**Figure 7-39. REG0x14\_TS\_COLD Register**

|         |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|
| 7       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TS_COLD |   |   |   |   |   |   |   |
| R/W-91h |   |   |   |   |   |   |   |

**Table 7-31. REG0x14\_TS\_COLD Register Field Descriptions**

| Bit | Field   | Type | Reset | Notes                  | Description  |
|-----|---------|------|-------|------------------------|--|
| 7-0 | TS_COLD | R/W  | 91h   | Reset by:<br>REG_RESET | TS Cold Threshold<br><br>POR: 580mV (91h)<br>Range: 0mV-1020mV (0h-FFh)<br>Bit Step: 4mV |

#### 7.6.1.22 REG0x15\_TS\_COOL Register (Offset = 15h) [Reset = 00h]

REG0x15\_TS\_COOL is shown in [Figure 7-40](#) and described in [Table 7-32](#).

Return to the [Summary Table](#).

TS\_COOL Threshold

**Figure 7-40. REG0x15\_TS\_COOL Register**

|         |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|
| 7       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TS_COOL |   |   |   |   |   |   |   |
| R/W-0h  |   |   |   |   |   |   |   |

**Table 7-32. REG0x15\_TS\_COOL Register Field Descriptions**

| Bit | Field   | Type | Reset | Notes   | Description   |
|-----|---------|------|-------|---|---|
| 7-0 | TS_COOL | R/W  | 0h    | Setting of 0 is disable TS_COOL threshold. Lower limit is really 4mV. Reset by: REG_RESET | TS Cool Threshold<br>POR: 0mV (0h)<br>Range: 0mV-1020mV (0h-FFh)<br>Bit Step: 4mV |

**7.6.1.23 REG0x16\_TS\_WARM Register (Offset = 16h) [Reset = 00h]**

REG0x16\_TS\_WARM is shown in [Figure 7-41](#) and described in [Table 7-33](#).

Return to the [Summary Table](#).

TS\_WARM Threshold

**Figure 7-41. REG0x16\_TS\_WARM Register**

|         |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|
| 7       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TS_WARM |   |   |   |   |   |   |   |
| R/W-0h  |   |   |   |   |   |   |   |

**Table 7-33. REG0x16\_TS\_WARM Register Field Descriptions**

| Bit | Field   | Type | Reset | Notes   | Description   |
|-----|---------|------|-------|---|---|
| 7-0 | TS_WARM | R/W  | 0h    | Setting of 0 is disable TS_WARM threshold. Lower limit is really 4mv. Reset by: REG_RESET | TS Warm Threshold<br>POR: 0mV (0h)<br>Range: 0mV-1020mV (0h-FFh)<br>Bit Step: 4mV |

**7.6.1.24 REG0x17\_TS\_HOT Register (Offset = 17h) [Reset = 45h]**

REG0x17\_TS\_HOT is shown in [Figure 7-42](#) and described in [Table 7-34](#).

Return to the [Summary Table](#).

TS\_HOT Threshold

**Figure 7-42. REG0x17\_TS\_HOT Register**

|         |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|
| 7       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TS_HOT  |   |   |   |   |   |   |   |
| R/W-45h |   |   |   |   |   |   |   |

**Table 7-34. REG0x17\_TS\_HOT Register Field Descriptions**

| Bit | Field  | Type | Reset | Notes               | Description   |
|-----|--------|------|-------|---------------------|---|
| 7-0 | TS_HOT | R/W  | 45h   | Reset by: REG_RESET | TS Hot Threshold<br>POR: 276mV (45h)<br>Range: 0mV-1020mV (0h-FFh)<br>Bit Step: 4mV |

**7.6.1.25 REG0x18\_ADCCTRL0 Register (Offset = 18h) [Reset = 10h]**

REG0x18\_ADCCTRL0 is shown in [Figure 7-43](#) and described in [Table 7-35](#).

Return to the [Summary Table](#).

ADC Control 0

**Figure 7-43. REG0x18\_ADCCTRL0 Register**

| 7      | 6        | 5          | 4       | 3            | 2        | 1 | 0 |
|--------|----------|------------|---------|--------------|----------|---|---|
| ADC_EN | ADC_RATE | ADC_SAMPLE | ADC_AVG | ADC_AVG_INIT | RESERVED |   |   |
| R/W-0h | R/W-0h   | R/W-2h     | R/W-0h  | R/W-0h       | R-0h     |   |   |

**Table 7-35. REG0x18\_ADCCTRL0 Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                              | Description  |
|-----|--------------|------|-------|------------------------------------|--|
| 7   | ADC_EN       | R/W  | 0h    | Reset by:<br>REG_RESET<br>WATCHDOG | ADC control<br>0b = Disable (default)<br>1b = Enabled  |
| 6-5 | ADC_RATE     | R/W  | 0h    | Reset by:<br>REG_RESET             | ADC conversion rate control<br>00b = Continuous conversion (default)<br>01b = One-shot conversion<br>10b = Every 1 second<br>11b = Every 1 minute                            |
| 4-3 | ADC_SAMPLE   | R/W  | 2h    | Reset by:<br>REG_RESET             | ADC sample speed<br>00b = 11 bit effective resolution<br>01b = 10 bit effective resolution<br>10b = 9 bit effective resolution (default)<br>11b = 9 bit effective resolution |
| 2   | ADC_AVG      | R/W  | 0h    | Reset by:<br>REG_RESET             | ADC average control<br>0b = Single value (default)<br>1b = Running average   |
| 1   | ADC_AVG_INIT | R/W  | 0h    | Reset by:<br>REG_RESET             | ADC average initial value control<br>0b = Start average using the existing register value<br>1b = Start average using a new ADC conversion                                   |
| 0   | RESERVED     | R    | 0h    |                                    | Reserved   |

#### 7.6.1.26 REG0x19\_ADCCTRL1 Register (Offset = 19h) [Reset = C8h]

REG0x19\_ADCCTRL1 is shown in [Figure 7-44](#) and described in [Table 7-36](#).

Return to the [Summary Table](#).

ADC Control 1

**Figure 7-44. REG0x19\_ADCCTRL1 Register**

| 7            | 6            | 5            | 4         | 3         | 2          | 1        | 0 |
|--------------|--------------|--------------|-----------|-----------|------------|----------|---|
| ADC_COMP1_EN | ADC_COMP2_EN | ADC_COMP3_EN | ADC_COMP1 | ADC_COMP1 | ADCIN_MODE | RESERVED |   |
| R/W-1h       | R/W-1h       | R/W-0h       | R/W-2h    | R/W-2h    | R/W-0h     | R-0h     |   |

**Table 7-36. REG0x19\_ADCCTRL1 Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description   |
|-----|--------------|------|-------|------------------------|---|
| 7   | ADC_COMP1_EN | R/W  | 1h    | Reset by:<br>REG_RESET | ADC comparator 1 control<br>0b = ADC comparator 1 disabled<br>1b = ADC comparator 1 enabled |
| 6   | ADC_COMP2_EN | R/W  | 1h    | Reset by:<br>REG_RESET | ADC comparator 2 control<br>0b = ADC comparator 2 disabled<br>1b = ADC comparator 2 enabled |
| 5   | ADC_COMP3_EN | R/W  | 0h    | Reset by:<br>REG_RESET | ADC comparator 3 control<br>0b = ADC comparator 3 disabled<br>1b = ADC comparator 3 enabled |

**Table 7-36. REG0x19\_ADCCTRL1 Register Field Descriptions (continued)**

| Bit | Field      | Type | Reset | Notes                  | Description   |
|-----|------------|------|-------|------------------------|---|
| 4-2 | ADC_COMP1  | R/W  | 2h    | Reset by:<br>REG_RESET | ADC Channel for Comparator 1<br><br>000b = TDIE<br>001b = ADCIN<br>010b = TS<br>011b = VBAT<br>100b = IBAT<br>101b = VIN<br>110b = VSYS<br>111b = IIN |
| 1   | ADCIN_MODE | R/W  | 0h    | Reset by:<br>REG_RESET | ADCIN Pin Mode of Operation<br><br>0b = General Purpose ADC input (no internal biasing)<br>1b = NTC ADC input (80 uA biasing)                         |
| 0   | RESERVED   | R    | 0h    |                        |   |

**7.6.1.27 REG0x1A\_ADCCTRL2 Register (Offset = 1Ah) [Reset = 40h]**

REG0x1A\_ADCCTRL2 is shown in [Figure 7-45](#) and described in [Table 7-37](#).

Return to the [Summary Table](#).

ADC Control 2

**Figure 7-45. REG0x1A\_ADCCTRL2 Register**

|           |   |   |           |   |   |          |   |
|-----------|---|---|-----------|---|---|----------|---|
| 7         | 6 | 5 | 4         | 3 | 2 | 1        | 0 |
| ADC_COMP2 |   |   | ADC_COMP3 |   |   | RESERVED |   |
| R/W-2h    |   |   | R/W-0h    |   |   | R-0h     |   |

**Table 7-37. REG0x1A\_ADCCTRL2 Register Field Descriptions**

| Bit | Field     | Type | Reset | Notes                  | Description   |
|-----|-----------|------|-------|------------------------|---|
| 7-5 | ADC_COMP2 | R/W  | 2h    | Reset by:<br>REG_RESET | ADC Channel for Comparator 2<br><br>000b = TDIE<br>001b = ADCIN<br>010b = TS<br>011b = VBAT<br>100b = IBAT<br>101b = VIN<br>110b = VSYS<br>111b = IIN |
| 4-2 | ADC_COMP3 | R/W  | 0h    | Reset by:<br>REG_RESET | ADC Channel for Comparator 3<br><br>000b = TDIE<br>001b = ADCIN<br>010b = TS<br>011b = VBAT<br>100b = IBAT<br>101b = VIN<br>110b = VSYS<br>111b = IIN |
| 1-0 | RESERVED  | R    | 0h    |                        | Reserved  |

**7.6.1.28 REG0x1B\_ADC\_DATA\_VBAT Register (Offset = 1Bh) [Reset = 0000h]**

REG0x1B\_ADC\_DATA\_VBAT is shown in [Figure 7-46](#) and described in [Table 7-38](#).

Return to the [Summary Table](#).



## VBAT ADC Measurement

**Figure 7-46. REG0x1B\_ADC\_DATA\_VBAT Register**

|               |    |    |    |    |    |   |   |
|---------------|----|----|----|----|----|---|---|
| 15            | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_VBAT |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |
| 7             | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_VBAT |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |

**Table 7-38. REG0x1B\_ADC\_DATA\_VBAT Register Field Descriptions**

| Bit  | Field         | Type | Reset | Description   |
|------|---------------|------|-------|---|
| 15-0 | ADC_DATA_VBAT | R    | 0h    | VBAT ADC Measurement<br>POR: 0mV(0h)<br>Range: 0mV - 5000mV (0h-FA0h)<br>Clamped High<br>Bit Step: 1.25mV |

### 7.6.1.29 REG0x1D\_ADC\_DATA\_TS Register (Offset = 1Dh) [Reset = 0000h]

REG0x1D\_ADC\_DATA\_TS is shown in [Figure 7-47](#) and described in [Table 7-39](#).

Return to the [Summary Table](#).

## TS ADC Measurement

**Figure 7-47. REG0x1D\_ADC\_DATA\_TS Register**

|             |    |    |    |    |    |   |   |
|-------------|----|----|----|----|----|---|---|
| 15          | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_TS |    |    |    |    |    |   |   |
| R-0h        |    |    |    |    |    |   |   |
| 7           | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_TS |    |    |    |    |    |   |   |
| R-0h        |    |    |    |    |    |   |   |

**Table 7-39. REG0x1D\_ADC\_DATA\_TS Register Field Descriptions**

| Bit  | Field       | Type | Reset | Description   |
|------|-------------|------|-------|---|
| 15-0 | ADC_DATA_TS | R    | 0h    | TS ADC Measurement<br>POR: 0mV(0h)<br>Range: 0mV - 1000mV (0h-FA0h)<br>Clamped High<br>Bit Step: 0.25mV |

### 7.6.1.30 REG0x1F\_ADC\_DATA\_IBAT Register (Offset = 1Fh) [Reset = 0000h]

REG0x1F\_ADC\_DATA\_IBAT is shown in [Figure 7-48](#) and described in [Table 7-40](#).

Return to the [Summary Table](#).

IBAT ADC Measurement

**Figure 7-48. REG0x1F\_ADC\_DATA\_IBAT Register**

|               |    |    |    |    |    |   |   |
|---------------|----|----|----|----|----|---|---|
| 15            | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_IBAT |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |
| 7             | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_IBAT |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |

**Table 7-40. REG0x1F\_ADC\_DATA\_IBAT Register Field Descriptions**

| Bit  | Field         | Type | Reset | Description  |
|------|---------------|------|-------|--|
| 15-0 | ADC_DATA_IBAT | R    | 0h    | IBAT ADC Measurement<br>POR: 0mA (0h)<br>Format: 2s Complement<br>Range: -3000mA-1000mA (F448h-3E8h)<br>Clamped Low<br>Clamped High<br>Bit Step: 1mA |

### 7.6.1.31 REG0x21\_ADC\_DATA\_ADCIN Register (Offset = 21h) [Reset = 0000h]

REG0x21\_ADC\_DATA\_ADCIN is shown in [Figure 7-49](#) and described in [Table 7-41](#).

Return to the [Summary Table](#).

ADCIN ADC Measurement

**Figure 7-49. REG0x21\_ADC\_DATA\_ADCIN Register**

|                |    |    |    |    |    |   |   |
|----------------|----|----|----|----|----|---|---|
| 15             | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_ADCIN |    |    |    |    |    |   |   |
| R-0h           |    |    |    |    |    |   |   |
| 7              | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_ADCIN |    |    |    |    |    |   |   |
| R-0h           |    |    |    |    |    |   |   |

**Table 7-41. REG0x21\_ADC\_DATA\_ADCIN Register Field Descriptions**

| Bit  | Field          | Type | Reset | Notes                                | Description  |
|------|----------------|------|-------|--------------------------------------|--|
| 15-0 | ADC_DATA_ADCIN | R    | 0h    | Bit Step is 0.25mV if ADCIN_MODE = 1 | ADCIN ADC Measurement<br>POR: 0mV(0h)<br>Range: 0mV - 5000mV (0h-FA0h)<br>Clamped High<br>Bit Step: 1.25mV |

### 7.6.1.32 REG0x23\_ADC\_DATA\_VIN Register (Offset = 23h) [Reset = 0000h]

REG0x23\_ADC\_DATA\_VIN is shown in [Figure 7-50](#) and described in [Table 7-42](#).

Return to the [Summary Table](#).

## VIN ADC Measurement

**Figure 7-50. REG0x23\_ADC\_DATA\_VIN Register**

|              |    |    |    |    |    |   |   |
|--------------|----|----|----|----|----|---|---|
| 15           | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_VIN |    |    |    |    |    |   |   |
| R-0h         |    |    |    |    |    |   |   |
| 7            | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_VIN |    |    |    |    |    |   |   |
| R-0h         |    |    |    |    |    |   |   |

**Table 7-42. REG0x23\_ADC\_DATA\_VIN Register Field Descriptions**

| Bit  | Field        | Type | Reset | Description   |
|------|--------------|------|-------|---|
| 15-0 | ADC_DATA_VIN | R    | 0h    | VIN ADC Measurement<br>Range: 0mV-6000mV if VIN_OVP = 0 or 0mV-20000mV if VIN_OVP = 1<br>Clamped High<br>Bit Step: 1.5mV if VIN_OVP = 0 or 5mV if VIN_OVP = 1 |

### 7.6.1.33 REG0x25\_ADC\_DATA\_VSYS Register (Offset = 25h) [Reset = 0000h]

REG0x25\_ADC\_DATA\_VSYS is shown in [Figure 7-51](#) and described in [Table 7-43](#).

Return to the [Summary Table](#).

## VSYS ADC Measurement

**Figure 7-51. REG0x25\_ADC\_DATA\_VSYS Register**

|               |    |    |    |    |    |   |   |
|---------------|----|----|----|----|----|---|---|
| 15            | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_VSYS |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |
| 7             | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_VSYS |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |

**Table 7-43. REG0x25\_ADC\_DATA\_VSYS Register Field Descriptions**

| Bit  | Field         | Type | Reset | Description   |
|------|---------------|------|-------|---|
| 15-0 | ADC_DATA_VSYS | R    | 0h    | VSYS ADC Measurement<br>POR: 0mV(0h)<br>Range: 0mV - 5000mV (0h-FA0h)<br>Clamped High<br>Bit Step: 1.25mV |

#### 7.6.1.34 REG0x27\_ADC\_DATA\_IIN Register (Offset = 27h) [Reset = 0000h]

REG0x27\_ADC\_DATA\_IIN is shown in [Figure 7-52](#) and described in [Table 7-44](#).

Return to the [Summary Table](#).

IIN ADC Measurement

**Figure 7-52. REG0x27\_ADC\_DATA\_IIN Register**

|              |    |    |    |    |    |   |   |
|--------------|----|----|----|----|----|---|---|
| 15           | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_IIN |    |    |    |    |    |   |   |
| R-0h         |    |    |    |    |    |   |   |
| 7            | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_IIN |    |    |    |    |    |   |   |
| R-0h         |    |    |    |    |    |   |   |

**Table 7-44. REG0x27\_ADC\_DATA\_IIN Register Field Descriptions**

| Bit  | Field        | Type | Reset | Description   |
|------|--------------|------|-------|---|
| 15-0 | ADC_DATA_IIN | R    | 0h    | IIN ADC Measurement<br>POR: 0mA(0h)<br>Range: 0mA - 1100mA (0h-898h)<br>Clamped High<br>Bit Step: 0.5mA |

#### 7.6.1.35 REG0x29\_ADC\_DATA\_TDIE Register (Offset = 29h) [Reset = 0000h]

REG0x29\_ADC\_DATA\_TDIE is shown in [Figure 7-53](#) and described in [Table 7-45](#).

Return to the [Summary Table](#).

TDIE ADC Measurement

**Figure 7-53. REG0x29\_ADC\_DATA\_TDIE Register**

|               |    |    |    |    |    |   |   |
|---------------|----|----|----|----|----|---|---|
| 15            | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| ADC_DATA_TDIE |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |
| 7             | 6  | 5  | 4  | 3  | 2  | 1 | 0 |
| ADC_DATA_TDIE |    |    |    |    |    |   |   |
| R-0h          |    |    |    |    |    |   |   |

**Table 7-45. REG0x29\_ADC\_DATA\_TDIE Register Field Descriptions**

| Bit  | Field         | Type | Reset | Description   |
|------|---------------|------|-------|---|
| 15-0 | ADC_DATA_TDIE | R    | 0h    | TDIE ADC Measurement<br>POR: 0deg.C(0h)<br>Format: 2s Complement<br>Range: -16384deg.C - 16383.5deg.C (8000h-7FFFh)<br>Bit Step: 0.5deg.C |

#### 7.6.1.36 REG0x2B\_ADCALARM\_COMP1 Register (Offset = 2Bh) [Reset = 2900h]

REG0x2B\_ADCALARM\_COMP1 is shown in [Figure 7-54](#) and described in [Table 7-46](#).

Return to the [Summary Table](#).

COMP1 ADC Measurement

**Figure 7-54. REG0x2B\_ADCALARM\_COMP1 Register**

|           |    |    |    |                 |          |   |   |
|-----------|----|----|----|-----------------|----------|---|---|
| 15        | 14 | 13 | 12 | 11              | 10       | 9 | 8 |
| ADCALARM1 |    |    |    |                 |          |   |   |
| R/W-290h  |    |    |    |                 |          |   |   |
| 7         | 6  | 5  | 4  | 3               | 2        | 1 | 0 |
| ADCALARM1 |    |    |    | ADCALARM1_ABOVE | RESERVED |   |   |
| R/W-290h  |    |    |    | R/W-0h          | R-0h     |   |   |

**Table 7-46. REG0x2B\_ADCALARM\_COMP1 Register Field Descriptions**

| Bit  | Field           | Type | Reset | Notes                  | Description   |
|------|-----------------|------|-------|------------------------|---|
| 15-4 | ADCALARM1       | R/W  | 290h  | Reset by:<br>REG_RESET | ADC Comparator 1 Threshold  |
| 3    | ADCALARM1_ABOVE | R/W  | 0h    | Reset by:<br>REG_RESET | ADC Comparator1 Polarity<br>0b = Set Flag and send interrupt if ADC measurement becomes lower than comparator threshold<br>1b = Set Flag and send interrupt if ADC measurement becomes greater than, or equal to comparator threshold |
| 2-0  | RESERVED        | R    | 0h    |                        | Reserved  |

#### 7.6.1.37 REG0x2D\_ADCALARM\_COMP2 Register (Offset = 2Dh) [Reset = 41C0h]

REG0x2D\_ADCALARM\_COMP2 is shown in [Figure 7-55](#) and described in [Table 7-47](#).

Return to the [Summary Table](#).

COMP2 ADC Measurement

**Figure 7-55. REG0x2D\_ADCALARM\_COMP2 Register**

|           |    |    |    |                 |          |   |   |
|-----------|----|----|----|-----------------|----------|---|---|
| 15        | 14 | 13 | 12 | 11              | 10       | 9 | 8 |
| ADCALARM2 |    |    |    |                 |          |   |   |
| R/W-41Ch  |    |    |    |                 |          |   |   |
| 7         | 6  | 5  | 4  | 3               | 2        | 1 | 0 |
| ADCALARM2 |    |    |    | ADCALARM2_ABOVE | RESERVED |   |   |
| R/W-41Ch  |    |    |    | R/W-0h          | R-0h     |   |   |

**Table 7-47. REG0x2D\_ADCALARM\_COMP2 Register Field Descriptions**

| Bit  | Field           | Type | Reset | Notes                  | Description   |
|------|-----------------|------|-------|------------------------|---|
| 15-4 | ADCALARM2       | R/W  | 41Ch  | Reset by:<br>REG_RESET | ADC Comparator 2 Threshold  |
| 3    | ADCALARM2_ABOVE | R/W  | 0h    | Reset by:<br>REG_RESET | ADC Comparator2 Polarity<br>0b = Set Flag and send interrupt if ADC measurement becomes lower than comparator threshold<br>1b = Set Flag and send interrupt if ADC measurement becomes greater than, or equal to comparator threshold |
| 2-0  | RESERVED        | R    | 0h    |                        | Reserved  |

#### 7.6.1.38 REG0x2F\_ADCALARM\_COMP3 Register (Offset = 2Fh) [Reset = 0000h]

REG0x2F\_ADCALARM\_COMP3 is shown in [Figure 7-56](#) and described in [Table 7-48](#).

Return to the [Summary Table](#).

#### COMP3 ADC Measurement

**Figure 7-56. REG0x2F\_ADCALARM\_COMP3 Register**

|           |    |    |    |                 |          |      |   |
|-----------|----|----|----|-----------------|----------|------|---|
| 15        | 14 | 13 | 12 | 11              | 10       | 9    | 8 |
| ADCALARM3 |    |    |    |                 |          |      |   |
| R/W-0h    |    |    |    |                 |          |      |   |
| 7         | 6  | 5  | 4  | 3               | 2        | 1    | 0 |
| ADCALARM3 |    |    |    | ADCALARM3_ABOVE | RESERVED |      |   |
| R/W-0h    |    |    |    | R/W-0h          |          | R-0h |   |

**Table 7-48. REG0x2F\_ADCALARM\_COMP3 Register Field Descriptions**

| Bit  | Field           | Type | Reset | Notes                  | Description   |
|------|-----------------|------|-------|------------------------|---|
| 15-4 | ADCALARM3       | R/W  | 0h    | Reset by:<br>REG_RESET | ADC Comparator 3 Threshold  |
| 3    | ADCALARM3_ABOVE | R/W  | 0h    | Reset by:<br>REG_RESET | ADC Comparator3 Polarity<br>0b = Set Flag and send interrupt if ADC measurement becomes lower than comparator threshold<br>1b = Set Flag and send interrupt if ADC measurement becomes greater than, or equal to comparator threshold |
| 2-0  | RESERVED        | R    | 0h    |                        | Reserved  |

#### 7.6.1.39 REG0x31\_ADC\_CHANNEL\_DISABLE Register (Offset = 31h) [Reset = 00h]

REG0x31\_ADC\_CHANNEL\_DISABLE is shown in [Figure 7-57](#) and described in [Table 7-49](#).

Return to the [Summary Table](#).

#### ADC Channel Disable

**Figure 7-57. REG0x31\_ADC\_CHANNEL\_DISABLE Register**

|             |              |              |             |              |            |               |              |
|-------------|--------------|--------------|-------------|--------------|------------|---------------|--------------|
| 7           | 6            | 5            | 4           | 3            | 2          | 1             | 0            |
| IIN_ADC_DIS | VSYS_ADC_DIS | IBAT_ADC_DIS | VIN_ADC_DIS | VBAT_ADC_DIS | TS_ADC_DIS | ADCIN_ADC_DIS | TDIE_ADC_DIS |
| R/W-0h      | R/W-0h       | R/W-0h       | R/W-0h      | R/W-0h       | R/W-0h     | R/W-0h        | R/W-0h       |

**Table 7-49. REG0x31\_ADC\_CHANNEL\_DISABLE Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description   |
|-----|--------------|------|-------|------------------------|---|
| 7   | IIN_ADC_DIS  | R/W  | 0h    | Reset by:<br>REG_RESET | IIN ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled  |
| 6   | VSYS_ADC_DIS | R/W  | 0h    | Reset by:<br>REG_RESET | VSYS ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled |
| 5   | IBAT_ADC_DIS | R/W  | 0h    | Reset by:<br>REG_RESET | IBAT ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled |
| 4   | VIN_ADC_DIS  | R/W  | 0h    | Reset by:<br>REG_RESET | VIN ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled  |

**Table 7-49. REG0x31\_ADC\_CHANNEL\_DISABLE Register Field Descriptions (continued)**

| Bit | Field         | Type | Reset | Notes                  | Description  |
|-----|---------------|------|-------|------------------------|--|
| 3   | VBAT_ADC_DIS  | R/W  | 0h    | Reset by:<br>REG_RESET | VBAT ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled  |
| 2   | TS_ADC_DIS    | R/W  | 0h    | Reset by:<br>REG_RESET | TS ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled    |
| 1   | ADCIN_ADC_DIS | R/W  | 0h    | Reset by:<br>REG_RESET | ADCIN ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled |
| 0   | TDIE_ADC_DIS  | R/W  | 0h    | Reset by:<br>REG_RESET | TDIE ADC control<br>0b = ADC measurement enabled<br>1b = ADC measurement disabled  |

#### 7.6.1.40 REG0x32\_BUCK\_VOUT Register (Offset = 32h) [Reset = 38h]

REG0x32\_BUCK\_VOUT is shown in [Figure 7-58](#) and described in [Table 7-50](#).

Return to the [Summary Table](#).

Buck VOUT Setting

**Figure 7-58. REG0x32\_BUCK\_VOUT Register**

|          |   |               |   |   |   |   |   |
|----------|---|---------------|---|---|---|---|---|
| 7        | 6 | 5             | 4 | 3 | 2 | 1 | 0 |
| RESERVED |   | BUCK_VOUT_SET |   |   |   |   |   |
| R-0h     |   | R/W-38h       |   |   |   |   |   |

**Table 7-50. REG0x32\_BUCK\_VOUT Register Field Descriptions**

| Bit | Field         | Type | Reset | Notes  | Description   |
|-----|---------------|------|-------|--|---|
| 7   | RESERVED      | R    | 0h    |  | Reserved  |
| 6-0 | BUCK_VOUT_SET | R/W  | 38h   | When GPIO DVS is used, this register is read only and matching the current voltage reference in BUCK_VOUTx_SET. When GPIO DVS is not used, this register sets the Buck output voltage.<br>Reset by:<br>REG_RESET | Buck Output Voltage Setting<br>POR: 1.8V (38h) with BUCK_HI_RANGE = 1<br>Range: 0.4V-1.575V if BUCK_HI_RANGE = 0 or 0.4V-3.6V if BUCK_HI_RANGE = 1<br>Bit Step: 12.5 mV if BUCK_HI_RANGE = 0 or 25 mV for 0.4V-3.175V and 50 mV for 3.2V to 3.6V if BUCK_HI_RANGE = 1 |

#### 7.6.1.41 REG0x33\_BUCK\_VOUT1 Register (Offset = 33h) [Reset = 38h]

REG0x33\_BUCK\_VOUT1 is shown in [Figure 7-59](#) and described in [Table 7-51](#).

Return to the [Summary Table](#).

Buck VOUT1 Setting

**Figure 7-59. REG0x33\_BUCK\_VOUT1 Register**

|          |   |                |   |   |   |   |   |
|----------|---|----------------|---|---|---|---|---|
| 7        | 6 | 5              | 4 | 3 | 2 | 1 | 0 |
| RESERVED |   | BUCK_VOUT1_SET |   |   |   |   |   |
| R-0h     |   | R/W-38h        |   |   |   |   |   |

**Table 7-51. REG0x33\_BUCK\_VOUT1 Register Field Descriptions**

| Bit | Field          | Type | Reset | Notes                  | Description  |
|-----|----------------|------|-------|------------------------|--|
| 7   | RESERVED       | R    | 0h    |                        | Reserved   |
| 6-0 | BUCK_VOUT1_SET | R/W  | 38h   | Reset by:<br>REG_RESET | Buck Output Voltage Setting<br>POR: 1.8V (38h) with BUCK_HI_RANGE = 1<br>Range: 0.4V-1.575V if BUCK_HI_RANGE = 0 or<br>0.4V-3.6V if BUCK_HI_RANGE = 1<br>Bit Step: 12.5 mV if BUCK_HI_RANGE = 0 or 25<br>mV for 0.4V-3.175V and 50 mV for 3.2V to 3.6V if<br>BUCK_HI_RANGE = 1 |

**7.6.1.42 REG0x34\_BUCK\_VOUT2 Register (Offset = 34h) [Reset = 72h]**

REG0x34\_BUCK\_VOUT2 is shown in [Figure 7-60](#) and described in [Table 7-52](#).

Return to the [Summary Table](#).

Buck VOUT2 Setting

**Figure 7-60. REG0x34\_BUCK\_VOUT2 Register**

|          |                |   |   |   |   |   |   |
|----------|----------------|---|---|---|---|---|---|
| 7        | 6              | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | BUCK_VOUT2_SET |   |   |   |   |   |   |
| R-0h     | R/W-72h        |   |   |   |   |   |   |

**Table 7-52. REG0x34\_BUCK\_VOUT2 Register Field Descriptions**

| Bit | Field          | Type | Reset | Notes                  | Description   |
|-----|----------------|------|-------|------------------------|---|
| 7   | RESERVED       | R    | 0h    |                        | Reserved  |
| 6-0 | BUCK_VOUT2_SET | R/W  | 72h   | Reset by:<br>REG_RESET | Buck Output Voltage Setting in Selection 2<br>POR: 3.3V (72h) with BUCK_HI_RANGE = 1<br>Range: 0.4V-1.575V if BUCK_HI_RANGE = 0 or<br>0.4V-3.6V if BUCK_HI_RANGE = 1<br>Bit Step: 12.5 mV if BUCK_HI_RANGE = 0 or 25<br>mV for 0.4V-3.175V and 50 mV for 3.2V to 3.6V if<br>BUCK_HI_RANGE = 1 |

**7.6.1.43 REG0x35\_BUCK\_VOUT3 Register (Offset = 35h) [Reset = 54h]**

REG0x35\_BUCK\_VOUT3 is shown in [Figure 7-61](#) and described in [Table 7-53](#).

Return to the [Summary Table](#).

Buck VOUT3 Setting

**Figure 7-61. REG0x35\_BUCK\_VOUT3 Register**

|          |                |   |   |   |   |   |   |
|----------|----------------|---|---|---|---|---|---|
| 7        | 6              | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED | BUCK_VOUT3_SET |   |   |   |   |   |   |
| R-0h     | R/W-54h        |   |   |   |   |   |   |

**Table 7-53. REG0x35\_BUCK\_VOUT3 Register Field Descriptions**

| Bit | Field    | Type | Reset | Notes | Description |
|-----|----------|------|-------|-------|-------------|
| 7   | RESERVED | R    | 0h    |       | Reserved    |



**Table 7-53. REG0x35\_BUCK\_VOUT3 Register Field Descriptions (continued)**

| Bit | Field          | Type | Reset | Notes                  | Description   |
|-----|----------------|------|-------|------------------------|---|
| 6-0 | BUCK_VOUT3_SET | R/W  | 54h   | Reset by:<br>REG_RESET | Buck Output Voltage Setting in Selection 3<br><br>POR: 2.5V (54h) with BUCK_HI_RANGE = 1<br>Range: 0.4V-1.575V if BUCK_HI_RANGE = 0 or<br>0.4V-3.6V if BUCK_HI_RANGE = 1<br>Bit Step: 12.5 mV if BUCK_HI_RANGE = 0 or 25<br>mV for 0.4V-3.175V and 50 mV for 3.2V to 3.6V if<br>BUCK_HI_RANGE = 1 |

#### 7.6.1.44 REG0x36\_BUCK\_VOUT4 Register (Offset = 36h) [Reset = 20h]

REG0x36\_BUCK\_VOUT4 is shown in [Figure 7-62](#) and described in [Table 7-54](#).

Return to the [Summary Table](#).

Buck VOUT4 Setting

**Figure 7-62. REG0x36\_BUCK\_VOUT4 Register**

|          |   |                |   |   |   |   |   |
|----------|---|----------------|---|---|---|---|---|
| 7        | 6 | 5              | 4 | 3 | 2 | 1 | 0 |
| RESERVED |   | BUCK_VOUT4_SET |   |   |   |   |   |
| R-0h     |   | R/W-20h        |   |   |   |   |   |

**Table 7-54. REG0x36\_BUCK\_VOUT4 Register Field Descriptions**

| Bit | Field          | Type | Reset | Notes                  | Description   |
|-----|----------------|------|-------|------------------------|---|
| 7   | RESERVED       | R    | 0h    |                        | Reserved  |
| 6-0 | BUCK_VOUT4_SET | R/W  | 20h   | Reset by:<br>REG_RESET | Buck Output Voltage Setting in Selection 4<br><br>POR: 1.2V (20h) with BUCK_HI_RANGE = 1<br>Range: 0.4V-1.575V if BUCK_HI_RANGE = 0 or<br>0.4V-3.6V if BUCK_HI_RANGE = 1<br>Bit Step: 12.5 mV if BUCK_HI_RANGE = 0 or 25<br>mV for 0.4V-3.175V and 50 mV for 3.2V to 3.6V if<br>BUCK_HI_RANGE = 1 |

#### 7.6.1.45 REG0x37\_BUCK\_CTRL0 Register (Offset = 37h) [Reset = 20h]

REG0x37\_BUCK\_CTRL0 is shown in [Figure 7-63](#) and described in [Table 7-55](#).

Return to the [Summary Table](#).

Buck Control 0

**Figure 7-63. REG0x37\_BUCK\_CTRL0 Register**

|          |   |                   |                  |   |          |   |   |
|----------|---|-------------------|------------------|---|----------|---|---|
| 7        | 6 | 5                 | 4                | 3 | 2        | 1 | 0 |
| RESERVED |   | BUCK_HI_RAN<br>GE | BUCK_VRAMP_SPEED |   | RESERVED |   |   |
| R-0h     |   | R/W-1h            | R/W-0h           |   | R-0h     |   |   |

**Table 7-55. REG0x37\_BUCK\_CTRL0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Notes                  | Description  |
|-----|---------------|------|-------|------------------------|--|
| 7-6 | RESERVED      | R    | 0h    |                        | Reserved   |
| 5   | BUCK_HI_RANGE | R/W  | 1h    | Reset by:<br>REG_RESET | Buck VOUT Step<br><br>0b = Buck with 12.5 mV (0.4V to 1.575V) DVS steps<br>1b = Buck with 25 mV (0.4V to 3.175V) and 50 mV<br>(3.2V to 3.6V) DVS steps |

**Table 7-55. REG0x37\_BUCK\_CTRL0 Register Field Descriptions (continued)**

| Bit | Field            | Type | Reset | Notes                  | Description  |
|-----|------------------|------|-------|------------------------|--|
| 4-3 | BUCK_VRAMP_SPEED | R/W  | 0h    | Reset by:<br>REG_RESET | Voltage Ramp Speed<br>00b = Instantaneous<br>01b = 5 mV/us<br>10b = 1 mV/us<br>11b = 0.1 mV/us |
| 2-0 | RESERVED         | R    | 0h    |                        | Reserved   |

**7.6.1.46 REG0x38\_BUCK\_CTRL1 Register (Offset = 38h) [Reset = 0Xh]**

REG0x38\_BUCK\_CTRL1 is shown in [Figure 7-64](#) and described in [Table 7-56](#).

Return to the [Summary Table](#).

Buck Control 1

**Figure 7-64. REG0x38\_BUCK\_CTRL1 Register**

|             |   |   |          |            |          |         |          |
|-------------|---|---|----------|------------|----------|---------|----------|
| 7           | 6 | 5 | 4        | 3          | 2        | 1       | 0        |
| BUCK_EN_SET |   |   | RESERVED | BUCK_PG_EN | RESERVED | BUCK_PG | RESERVED |
| R/W-0h      |   |   | R-0h     | R/W-1h     | R-0h     | R-Xh    | R-0h     |

**Table 7-56. REG0x38\_BUCK\_CTRL1 Register Field Descriptions**

| Bit | Field       | Type | Reset | Notes                  | Description  |
|-----|-------------|------|-------|------------------------|--|
| 7-5 | BUCK_EN_SET | R/W  | 0h    | Reset by:<br>REG_RESET | Buck Enable Setting<br>000b = Buck in the sequence, enabled/disabled at a<br>001b = Buck in the sequence, enabled/disabled at b<br>010b = Buck in the sequence, enabled/disabled at c<br>011b = Buck in the sequence, enabled/disabled at d<br>100b = Buck not in the sequence, Buck disabled<br>101b = Buck not in the sequence, Buck enabled<br>110b = Buck not in sequence, Buck controlled by GPIO3<br>111b = Reserved |
| 4   | RESERVED    | R    | 0h    |                        | Reserved   |
| 3   | BUCK_PG_EN  | R/W  | 1h    | Reset by:<br>REG_RESET | Enable Buck Power Good Feature<br>0b = Disable Buck power good feature<br>1b = Enable Buck power good feature  |
| 2   | RESERVED    | R    | 0h    |                        | Reserved   |
| 1   | BUCK_PG     | R    | X     |                        | Buck Power Good<br>0b = Buck not power good<br>1b = Buck power good  |
| 0   | RESERVED    | R    | 0h    |                        | Reserved   |

### 7.6.1.47 REG0x39\_BUBO\_CTRL0 Register (Offset = 39h) [Reset = 3Eh]

REG0x39\_BUBO\_CTRL0 is shown in [Figure 7-65](#) and described in [Table 7-57](#).

Return to the [Summary Table](#).

Buck-boost Control 0

**Figure 7-65. REG0x39\_BUBO\_CTRL0 Register**

| 7        | 6             | 5 | 4 | 3       | 2 | 1 | 0 |
|----------|---------------|---|---|---------|---|---|---|
| RESERVED | BUBO_VOUT_SET |   |   |         |   |   |   |
| R-0h     |               |   |   | R/W-3Eh |   |   |   |

**Table 7-57. REG0x39\_BUBO\_CTRL0 Register Field Descriptions**

| Bit | Field         | Type | Reset | Notes                  | Description   |
|-----|---------------|------|-------|------------------------|---|
| 7   | RESERVED      | R    | 0h    |                        | Reserved  |
| 6-0 | BUBO_VOUT_SET | R/W  | 3Eh   | Reset by:<br>REG_RESET | Buck-boost Output Voltage<br>POR: 4800mV (3Eh)<br>Range: 1700mV-5200mV (0h-46h)<br>Clamped High<br>Bit Step: 50mV<br>Offset: 1700mV |

### 7.6.1.48 REG0x3A\_BUBO\_CTRL1 Register (Offset = 3Ah) [Reset = 4Xh]

REG0x3A\_BUBO\_CTRL1 is shown in [Figure 7-66](#) and described in [Table 7-58](#).

Return to the [Summary Table](#).

Buck-boost Control 1

**Figure 7-66. REG0x3A\_BUBO\_CTRL1 Register**

| 7           | 6 | 5 | 4        | 3          | 2        | 1       | 0           |
|-------------|---|---|----------|------------|----------|---------|-------------|
| BUBO_EN_SET |   |   | RESERVED | BUBO_PG_EN | RESERVED | BUBO_PG | BUBO_ILIMIT |
| R/W-2h      |   |   | R-0h     | R/W-1h     | R-0h     | R-Xh    | R/W-0h      |

**Table 7-58. REG0x3A\_BUBO\_CTRL1 Register Field Descriptions**

| Bit | Field       | Type | Reset | Notes                  | Description  |
|-----|-------------|------|-------|------------------------|--|
| 7-5 | BUBO_EN_SET | R/W  | 2h    | Reset by:<br>REG_RESET | Buck-boost Enable Setting<br>000b = Buck-boost in the sequence, enabled/disabled at a<br>001b = Buck-boost in the sequence, enabled/disabled at b<br>010b = Buck-boost in the sequence, enabled/disabled at c<br>011b = Buck-boost in the sequence, enabled/disabled at d<br>100b = Buck-boost not in the sequence, Buck-boost disabled<br>101b = Buck-boost not in the sequence, Buck-boost enabled<br>110b = Buck-boost not in sequence, Buck-boost controlled by GPIO2<br>111b = Reserved |
| 4   | RESERVED    | R    | 0h    |                        | Reserved   |
| 3   | BUBO_PG_EN  | R/W  | 1h    | Reset by:<br>REG_RESET | Enable Buck-boost Power Good Feature<br>0b = Disable Buck-boost power good feature<br>1b = Enable Buck-boost power good feature  |

**Table 7-58. REG0x3A\_BUBO\_CTRL1 Register Field Descriptions (continued)**

| Bit | Field       | Type | Reset | Notes                  | Description   |
|-----|-------------|------|-------|------------------------|---|
| 2   | RESERVED    | R    | 0h    |                        | Reserved  |
| 1   | BUBO_PG     | R    | X     |                        | Buck-boost Power Good<br>0b = Buck-boost not power good<br>1b = Buck-boost power good |
| 0   | BUBO_ILIMIT | R/W  | 0h    | Reset by:<br>REG_RESET | Buck-boost Input Current Limit<br>0b = Unlimited<br>1b = 100 mA                       |

**7.6.1.49 REG0x3B\_LDO1\_CTRL0 Register (Offset = 3Bh) [Reset = 14h]**

REG0x3B\_LDO1\_CTRL0 is shown in [Figure 7-67](#) and described in [Table 7-59](#).

Return to the [Summary Table](#).

LDO1 Control 0

**Figure 7-67. REG0x3B\_LDO1\_CTRL0 Register**

| 7        | 6                      | 5             | 4 | 3 | 2 | 1 | 0 |
|----------|------------------------|---------------|---|---|---|---|---|
| RESERVED | LDO1_LDO_SWITCH_CONFIG | LDO1_VOUT_SET |   |   |   |   |   |
| R-0h     | R/W-0h                 | R/W-14h       |   |   |   |   |   |

**Table 7-59. REG0x3B\_LDO1\_CTRL0 Register Field Descriptions**

| Bit | Field                  | Type | Reset | Notes                  | Description   |
|-----|------------------------|------|-------|------------------------|---|
| 7   | RESERVED               | R    | 0h    |                        | Reserved  |
| 6   | LDO1_LDO_SWITCH_CONFIG | R/W  | 0h    |                        | LDO1 LDO/Bypass mode Selection<br>0b = LDO mode<br>1b = Bypass mode   |
| 5-0 | LDO1_VOUT_SET          | R/W  | 14h   | Reset by:<br>REG_RESET | LDO1 Output Voltage Setting<br>POR: 1800mV (14h)<br>Range: 800mV-3600mV (0h-38h)<br>Clamped High<br>Bit Step: 50mV<br>Offset: 800mV |

**7.6.1.50 REG0x3C\_LDO1\_CTRL1 Register (Offset = 3Ch) [Reset = 2Xh]**

REG0x3C\_LDO1\_CTRL1 is shown in [Figure 7-68](#) and described in [Table 7-60](#).

Return to the [Summary Table](#).

LDO1 Control 1

**Figure 7-68. REG0x3C\_LDO1\_CTRL1 Register**

| 7           | 6 | 5 | 4        | 3          | 2        | 1       | 0            |
|-------------|---|---|----------|------------|----------|---------|--------------|
| LDO1_EN_SET |   |   | RESERVED | LDO1_PG_EN | RESERVED | LDO1_PG | LDO1_SHIP_AO |
| R/W-1h      |   |   | R-0h     | R/W-1h     | R-0h     | R-Xh    | R/W-0h       |

**Table 7-60. REG0x3C\_LDO1\_CTRL1 Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description  |
|-----|--------------|------|-------|------------------------|--|
| 7-5 | LDO1_EN_SET  | R/W  | 1h    | Reset by:<br>REG_RESET | LDO1 Enable Setting<br><br>000b = LDO1 in the sequence, enabled/disabled at a<br>001b = LDO1 in the sequence, enabled/disabled at b<br>010b = LDO1 in the sequence, enabled/disabled at c<br>011b = LDO1 in the sequence, enabled/disabled at d<br>100b = LDO1 not in the sequence, LDO1 disabled<br>101b = LDO1 not in the sequence, LDO1 enabled<br>110b = LDO1 not in sequence, LDO1 controlled by GPIO4<br>111b = LDO1 always on |
| 4   | RESERVED     | R    | 0h    |                        | Reserved   |
| 3   | LDO1_PG_EN   | R/W  | 1h    | Reset by:<br>REG_RESET | Enable LDO1 Power Good Feature<br><br>0b = Disable LDO1 power good feature<br>1b = Enable LDO1 power good feature  |
| 2   | RESERVED     | R    | 0h    |                        | Reserved   |
| 1   | LDO1_PG      | R    | X     |                        | LDO1 Power Good<br><br>0b = LDO1 not power good<br>1b = LDO1 power good  |
| 0   | LDO1_SHIP_AO | R/W  | 0h    | Reset by:<br>REG_RESET | LDO1 ON/OFF in LDO1-ON Ship Mode or Ship Mode<br><br>0b = LDO1 powering down in power-down sequence<br>entering ship mode in always-on mode<br>1b = LDO1 not powering down in power-down<br>sequence entering LDO1-ON ship mode in always-on<br>mode   |

#### 7.6.1.51 REG0x3D\_LDO2\_CTRL0 Register (Offset = 3Dh) [Reset = 32h]

REG0x3D\_LDO2\_CTRL0 is shown in [Figure 7-69](#) and described in [Table 7-61](#).

Return to the [Summary Table](#).

LDO2 Control 0

**Figure 7-69. REG0x3D\_LDO2\_CTRL0 Register**

|          |                        |               |   |   |   |   |   |
|----------|------------------------|---------------|---|---|---|---|---|
| 7        | 6                      | 5             | 4 | 3 | 2 | 1 | 0 |
| RESERVED | LDO2_LDO_SWITCH_CONFIG | LDO2_VOUT_SET |   |   |   |   |   |
| R-0h     | R/W-0h                 | R/W-32h       |   |   |   |   |   |

**Table 7-61. REG0x3D\_LDO2\_CTRL0 Register Field Descriptions**

| Bit | Field                  | Type | Reset | Notes                  | Description   |
|-----|------------------------|------|-------|------------------------|---|
| 7   | RESERVED               | R    | 0h    |                        | Reserved  |
| 6   | LDO2_LDO_SWITCH_CONFIG | R/W  | 0h    |                        | LDO2 LDO/Bypass mode Selection<br><br>0b = LDO mode<br>1b = Bypass mode   |
| 5-0 | LDO2_VOUT_SET          | R/W  | 32h   | Reset by:<br>REG_RESET | LDO2 Output Voltage Setting<br><br>POR: 3300mV (32h)<br>Range: 800mV-3600mV (0h-38h)<br>Clamped High<br>Bit Step: 50mV<br>Offset: 800mV |

### 7.6.1.52 REG0x3E\_LDO2\_CTRL1 Register (Offset = 3Eh) [Reset = 8Xh]

REG0x3E\_LDO2\_CTRL1 is shown in [Figure 7-70](#) and described in [Table 7-62](#).

Return to the [Summary Table](#).

LDO2 Control 1

**Figure 7-70. REG0x3E\_LDO2\_CTRL1 Register**

| 7           | 6 | 5 | 4        | 3          | 2        | 1       | 0        |
|-------------|---|---|----------|------------|----------|---------|----------|
| LDO2_EN_SET |   |   | RESERVED | LDO2_PG_EN | RESERVED | LDO2_PG | RESERVED |
| R/W-4h      |   |   | R-0h     | R/W-1h     | R-0h     | R-Xh    | R-0h     |

**Table 7-62. REG0x3E\_LDO2\_CTRL1 Register Field Descriptions**

| Bit | Field       | Type | Reset | Notes                  | Description  |
|-----|-------------|------|-------|------------------------|--|
| 7-5 | LDO2_EN_SET | R/W  | 4h    | Reset by:<br>REG_RESET | LDO2 Enable Setting<br><br>000b = LDO2 in the sequence, enabled/disabled at a<br>001b = LDO2 in the sequence, enabled/disabled at b<br>010b = LDO2 in the sequence, enabled/disabled at c<br>011b = LDO2 in the sequence, enabled/disabled at d<br>100b = LDO2 not in the sequence, LDO2 disabled<br>101b = LDO2 not in the sequence, LDO2 enabled<br>110b = LDO2 not in sequence, LDO2 controlled by GPIO1<br>111b = LDO2 always on |
| 4   | RESERVED    | R    | 0h    |                        | Reserved   |
| 3   | LDO2_PG_EN  | R/W  | 1h    | Reset by:<br>REG_RESET | Enable LDO2 Power Good Feature<br><br>0b = Disable LDO2 power good feature<br>1b = Enable LDO2 power good feature  |
| 2   | RESERVED    | R    | 0h    |                        | Reserved   |
| 1   | LDO2_PG     | R    | X     |                        | LDO2 Power Good<br><br>0b = LDO2 not power good<br>1b = LDO2 power good  |
| 0   | RESERVED    | R    | 0h    |                        | Reserved   |

### 7.6.1.53 REG0x3F\_NTC\_CTRL Register (Offset = 3Fh) [Reset = A0h]

REG0x3F\_NTC\_CTRL is shown in [Figure 7-71](#) and described in [Table 7-63](#).

Return to the [Summary Table](#).

NTC Control

**Figure 7-71. REG0x3F\_NTC\_CTRL Register**

| 7            | 6               | 5               | 4       | 3       | 2                 | 1        | 0 |
|--------------|-----------------|-----------------|---------|---------|-------------------|----------|---|
| TS_ACTION_EN | TS_FAULT_BAT_EN | TS_FAULT_VIN_EN | TS_ICHG | TS_VREG | TSHUT_LOCK_OUT_EN | RESERVED |   |
| R/W-1h       | R/W-0h          | R/W-1h          | R/W-0h  | R/W-0h  | R/W-0h            | R-0h     |   |

**Table 7-63. REG0x3F\_NTC\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                              | Description   |
|-----|--------------|------|-------|------------------------------------|---|
| 7   | TS_ACTION_EN | R/W  | 1h    | Reset by:<br>REG_RESET<br>WATCHDOG | TS Action Enable<br><br>0b = TS action disabled<br>1b = TS action enabled |

**Table 7-63. REG0x3F\_NTC\_CTRL Register Field Descriptions (continued)**

| Bit | Field            | Type | Reset | Notes                              | Description  |
|-----|------------------|------|-------|------------------------------------|--|
| 6   | TS_FAULT_BAT_EN  | R/W  | 0h    | Reset by:<br>REG_RESET<br>WATCHDOG | TS Fault Monitoring Enable in Battery-only Mode<br>0b = TS fault monitoring disabled<br>1b = TS fault monitoring enabled and following<br>ADC_RATE |
| 5   | TS_FAULT_VIN_EN  | R/W  | 1h    | Reset by:<br>REG_RESET<br>WATCHDOG | TS Fault Monitoring Enable in Adapter Mode<br>0b = TS fault monitoring disabled<br>1b = TS fault monitoring enabled at 30ms rate                   |
| 4   | TS_ICHG          | R/W  | 0h    | Reset by:<br>REG_RESET             | Fast charge current when decreased by TS function<br>0b = 0.5 x ICHG<br>1b = 0.2 x ICHG  |
| 3   | TS_VREG          | R/W  | 0h    | Reset by:<br>REG_RESET             | Reduced target battery voltage during Warm<br>0b = VBATREG-100mV<br>1b = VBATREG-200mV   |
| 2   | TSHUT_LOCKOUT_EN | R/W  | 0h    | Reset by:<br>REG_RESET             | Lockout device in TSHUT protection after retries<br>0b = Do not lockout device in TSHUT protection<br>1b = Lockout device in TSHUT protection      |
| 1-0 | RESERVED         | R    | 0h    |                                    | Reserved   |

#### 7.6.1.54 REG0x40\_GPIO1\_CTRL Register (Offset = 40h) [Reset = 00h]

REG0x40\_GPIO1\_CTRL is shown in [Figure 7-72](#) and described in [Table 7-64](#).

Return to the [Summary Table](#).

GPIO1 Control

**Figure 7-72. REG0x40\_GPIO1\_CTRL Register**

|              |   |   |   |          |   |   |   |
|--------------|---|---|---|----------|---|---|---|
| 7            | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| GPIO1_CONFIG |   |   |   | RESERVED |   |   |   |
| R/W-0h       |   |   |   | R-0h     |   |   |   |

**Table 7-64. REG0x40\_GPIO1\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description  |
|-----|--------------|------|-------|------------------------|--|
| 7-4 | GPIO1_CONFIG | R/W  | 0h    | Reset by:<br>REG_RESET | GPIO1 Configuration<br>0000b = GPIO1 forced open-drain high<br>0001b = GPIO1 forced low<br>0010b = GPIO1 configured as deglitched level<br>shifted /MR<br>0011b = GPIO1 forced push-pull high<br>0100b = GPIO1 as sequencer output at a (push-pull)<br>0101b = GPIO1 as sequencer output at b (push-pull)<br>0110b = GPIO1 as sequencer output at c (push-pull)<br>0111b = GPIO1 as sequencer output at d (push-pull)<br>1000b = GPIO1 in level-sensitive input mode<br>1001b = Reserved<br>1010b = GPIO1 in positive-edge trigger input mode<br>1011b = GPIO1 in negative-edge trigger input mode<br>1100b = Reserved<br>1101b = Reserved<br>1110b = Reserved<br>1111b = Reserved |
| 3-0 | RESERVED     | R    | 0h    |                        | Reserved   |

### 7.6.1.55 REG0x41\_GPIO2\_CTRL Register (Offset = 41h) [Reset = 00h]

REG0x41\_GPIO2\_CTRL is shown in [Figure 7-73](#) and described in [Table 7-65](#).

Return to the [Summary Table](#).

GPIO2 Control

**Figure 7-73. REG0x41\_GPIO2\_CTRL Register**

| 7            | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
|--------------|---|---|---|----------|---|---|---|
| GPIO2_CONFIG |   |   |   | RESERVED |   |   |   |
| R/W-0h       |   |   |   | R-0h     |   |   |   |

**Table 7-65. REG0x41\_GPIO2\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description  |
|-----|--------------|------|-------|------------------------|--|
| 7-4 | GPIO2_CONFIG | R/W  | 0h    | Reset by:<br>REG_RESET | GPIO2 Configuration<br>0000b = GPIO2 forced open-drain high<br>0001b = GPIO2 forced low<br>0010b = GPIO2 configured as sequence PG pin (push-pull)<br>0011b = GPIO2 forced push-pull high<br>0100b = GPIO2 as sequencer output at a (push-pull)<br>0101b = GPIO2 as sequencer output at b (push-pull)<br>0110b = GPIO2 as sequencer output at c (push-pull)<br>0111b = GPIO2 as sequencer output at d (push-pull)<br>1000b = GPIO2 in level-sensitive input mode<br>1001b = Reserved<br>1010b = GPIO2 in positive-edge trigger input mode<br>1011b = GPIO2 in negative-edge trigger input mode<br>1100b = Reserved<br>1101b = Reserved<br>1110b = Reserved<br>1111b = Reserved |
| 3-0 | RESERVED     | R    | 0h    |                        | Reserved   |

### 7.6.1.56 REG0x42\_GPIO3\_CTRL Register (Offset = 42h) [Reset = 20h]

REG0x42\_GPIO3\_CTRL is shown in [Figure 7-74](#) and described in [Table 7-66](#).

Return to the [Summary Table](#).

GPIO3 Control

**Figure 7-74. REG0x42\_GPIO3\_CTRL Register**

| 7            | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
|--------------|---|---|---|----------|---|---|---|
| GPIO3_CONFIG |   |   |   | RESERVED |   |   |   |
| R/W-2h       |   |   |   | R-0h     |   |   |   |



**Table 7-66. REG0x42\_GPIO3\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description   |
|-----|--------------|------|-------|------------------------|---|
| 7-4 | GPIO3_CONFIG | R/W  | 2h    | Reset by:<br>REG_RESET | GPIO3 Configuration<br>0000b = GPIO3 forced open-drain high<br>0001b = GPIO3 forced low<br>0010b = Buck DVS controlled by GPIO3<br>0011b = GPIO3 forced push-pull high<br>0100b = GPIO3 as sequencer output at a (push-pull)<br>0101b = GPIO3 as sequencer output at b (push-pull)<br>0110b = GPIO3 as sequencer output at c (push-pull)<br>0111b = GPIO3 as sequencer output at d (push-pull)<br>1000b = GPIO3 in level-sensitive input mode<br>1001b = Reserved<br>1010b = GPIO3 in positive-edge trigger input mode<br>1011b = GPIO3 in negative-edge trigger input mode<br>1100b = Reserved<br>1101b = Reserved<br>1110b = Reserved<br>1111b = Reserved |
| 3-0 | RESERVED     | R    | 0h    |                        | Reserved  |

#### 7.6.1.57 REG0x43\_GPIO4\_CTRL Register (Offset = 43h) [Reset = 20h]

REG0x43\_GPIO4\_CTRL is shown in [Figure 7-75](#) and described in [Table 7-67](#).

Return to the [Summary Table](#).

GPIO4 Control

**Figure 7-75. REG0x43\_GPIO4\_CTRL Register**

|              |   |   |   |          |   |   |   |
|--------------|---|---|---|----------|---|---|---|
| 7            | 6 | 5 | 4 | 3        | 2 | 1 | 0 |
| GPIO4_CONFIG |   |   |   | RESERVED |   |   |   |
| R/W-2h       |   |   |   | R-0h     |   |   |   |

**Table 7-67. REG0x43\_GPIO4\_CTRL Register Field Descriptions**

| Bit | Field        | Type | Reset | Notes                  | Description   |
|-----|--------------|------|-------|------------------------|---|
| 7-4 | GPIO4_CONFIG | R/W  | 2h    | Reset by:<br>REG_RESET | GPIO4 Configuration<br>0000b = GPIO4 forced open-drain high<br>0001b = GPIO4 forced low<br>0010b = GPIO4 as VSEL2 pin (valid only if<br>LDO1_EN_SET != 110 AND GPIO3_CONFIG = 0010)<br>0011b = GPIO4 forced push-pull high<br>0100b = GPIO4 as sequencer output at a (push-pull)<br>0101b = GPIO4 as sequencer output at b (push-pull)<br>0110b = GPIO4 as sequencer output at c (push-pull)<br>0111b = GPIO4 as sequencer output at d (push-pull)<br>1000b = GPIO4 in level-sensitive input mode<br>1001b = Reserved<br>1010b = GPIO4 in positive-edge trigger input mode<br>1011b = GPIO4 in negative-edge trigger input mode<br>1100b = GPIO4 in 20% duty ratio pull-low PWM mode<br>(open-drain)<br>1101b = GPIO4 in 40% duty ratio pull-low PWM mode<br>(open-drain)<br>1110b = GPIO4 in 60% duty ratio pull-low PWM mode<br>(open-drain)<br>1111b = GPIO4 in 80% duty ratio pull-low PWM mode<br>(open-drain) |
| 3-0 | RESERVED     | R    | 0h    |                        | Reserved  |

### 7.6.1.58 REG0x44\_PART\_INFORMATION Register (Offset = 44h) [Reset = 01h]

REG0x44\_PART\_INFORMATION is shown in [Figure 7-76](#) and described in [Table 7-68](#).

Return to the [Summary Table](#).

Part information

**Figure 7-76. REG0x44\_PART\_INFORMATION Register**

| 7         | 6 | 5 | 4 | 3        | 2       | 1 | 0 |
|-----------|---|---|---|----------|---------|---|---|
| DEVICE_ID |   |   |   | RESERVED | DEV_REV |   |   |
| R-0h      |   |   |   | R-0h     | R-1h    |   |   |

**Table 7-68. REG0x44\_PART\_INFORMATION Register Field Descriptions**

| Bit | Field     | Type | Reset | Description        |
|-----|-----------|------|-------|--------------------|
| 7-4 | DEVICE_ID | R    | 0h    | Device part number |
| 3   | RESERVED  | R    | 0h    | Reserved           |
| 2-0 | DEV_REV   | R    | 1h    | Device revision    |



## 8.2.1 Design Requirements

**Table 8-1. Design Requirements**

| PARAMETER                  | VALUE |
|----------------------------|-------|
| Input supply voltage       | 5 V   |
| System regulation voltage  | 4.5 V |
| Battery regulation voltage | 4.2 V |
| Buck output voltage        | 1.8 V |
| Buck-boost output voltage  | 4.8 V |
| LDO1 output voltage        | 1.8 V |
| LDO2 output voltage        | 3.3 V |

## 8.2.2 Detailed Design Procedure

### 8.2.2.1 Input Capacitor Selection

Low ESR X5R or X7R ceramic capacitors are preferred for input capacitor to minimize transient currents from the battery or adapter.

For the integrated charger, a 2.2μF input decoupling capacitor ( $C_{IN}$ ) is normally used for 5V  $V_{IN}$ . After derating, the effective capacitance needs to be at least 1μF.

For the integrated Buck rail, a 4.7μF input decoupling capacitor ( $C_{SYS\_A5}$ ) is normally used.

For the integrated Buck-boost rail, a 10μF input decoupling capacitor ( $C_{SYS\_F5}$ ) is normally used.

For the integrated LDO rails, a 2.2μF input decoupling capacitor ( $C_{VINLS1}/C_{VINLS2}$ ) is normally used.

### 8.2.2.2 Output Capacitor Selection

Low ESR X5R or X7R ceramic capacitors are preferred for output capacitors for optimized internal compensation loop stability, or output voltage ripple of integrated Buck or Buck-boost rails.

For the integrated charger, a 10μF output capacitor ( $C_{SYS\_D5}$ ) is normally used. After derating, the total effective capacitance on all the SYS pins needs to be higher than 1μF but less than 100μF.

For the integrated Buck rail, a 10μF output capacitor ( $C_{BKOUT}$ ) is normally used. After derating, the effective capacitance needs to be at least 4μF but less than 25μF.

For the integrated Buck-boost rail, a 22μF output capacitor ( $C_{BKOUT}$ ) is normally used. After derating, the effective capacitance needs to be at least 5μF.

For the integrated LDO rails, a 1μF output capacitor ( $C_{LSLDO1}/C_{LSLDO2}$ ) is normally used. After derating, the effective capacitance needs to be at least 0.5μF at least but less than 22μF.

### 8.2.2.3 Inductor Selection

The inductor selection for the Buck rail and Buck-boost rail is mainly a trade off between size and efficiency as larger sized inductors normally have lower DC resistance, thus higher efficiency. It's also recommended to choose the inductor with saturation current at least 20% higher than peak inductor current under the highest load condition in the application.

For the integrated Buck rail, a 1μH inductor is recommended to be used.

For the integrated Buck-boost rail, a 2.2μH inductor is recommended to be used.

### 8.2.2.4 Recommended Passive Components

[Table 8-2](#) shows the list of recommended components for the typical application circuit.

**Table 8-2. Recommended Components for Typical Application Circuit**

| REFERENCE           | DESCRIPTION                              | VALUE | SIZE CODE |
|---------------------|--|-------|-----------|
| C <sub>IN</sub>     | Ceramic capacitor<br>C1005X5R1V225K050BC | 2.2μF | 0402      |
| C <sub>SYS_D5</sub> | Ceramic capacitor<br>GRM155R61A106ME11   | 10μF  | 0402      |
| C <sub>BAT</sub>    | Ceramic capacitor<br>EMK105BJ105KVHF     | 1μF   | 0402      |
| C <sub>VINLS1</sub> | Ceramic capacitor<br>GRM155R60J225ME15D  | 2.2μF | 0402      |
| C <sub>LSLDO1</sub> | Ceramic capacitor<br>GRM155R61C105MA12D  | 1μF   | 0402      |
| C <sub>VINLS2</sub> | Ceramic capacitor<br>GRM155R60J225ME15D  | 2.2μF | 0402      |
| C <sub>LSLDO2</sub> | Ceramic capacitor<br>GRM155R61C105MA12D  | 1μF   | 0402      |
| C <sub>SYS_A5</sub> | Ceramic capacitor<br>GRM155R60J475ME47D  | 4.7μF | 0402      |
| L <sub>BK</sub>     | Inductor<br>DFE201610E-1R0M              | 1μH   | 0806      |
| C <sub>BKOUT</sub>  | Ceramic capacitor<br>GRM155R60J106ME15D  | 10μF  | 0402      |
| C <sub>SYS_F5</sub> | Ceramic capacitor<br>GRM155R61A106ME11   | 10μF  | 0402      |
| L <sub>BB</sub>     | Inductor<br>DFE201610E-2R2M              | 2.2μH | 0806      |
| C <sub>BBOUT</sub>  | Ceramic capacitor<br>GRM188R60J226MEA0D  | 22μF  | 0603      |

### 8.2.3 Application Performance Plots

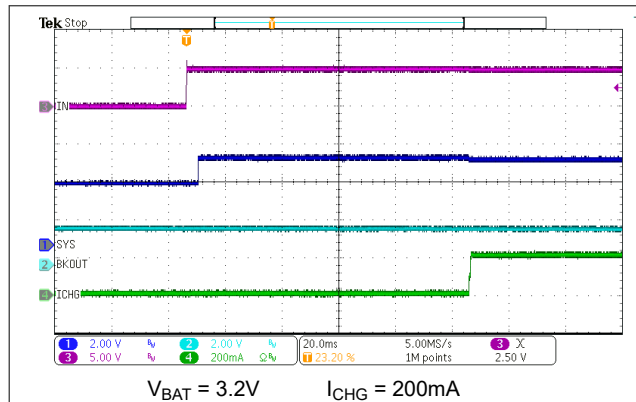


Figure 8-2. Adapter Plug-In with Charge Enabled

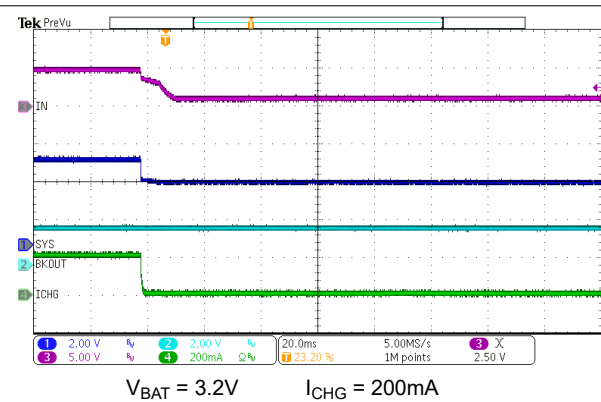


Figure 8-3. Adapter Unplug with Charge Enabled

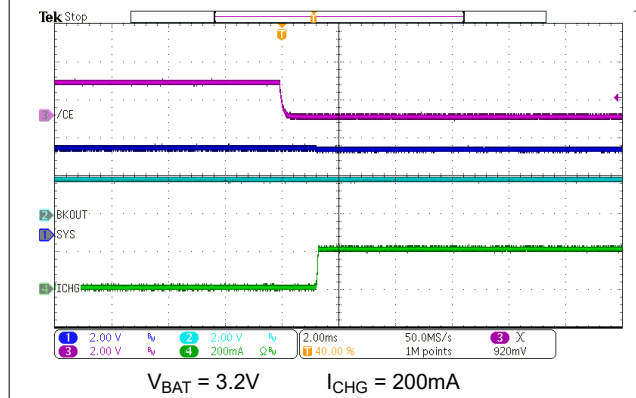


Figure 8-4. Charge Enable

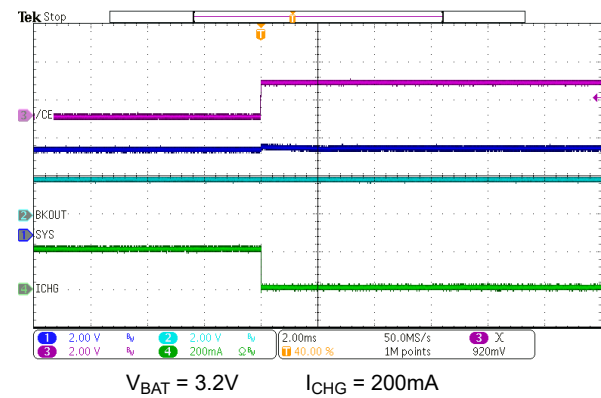
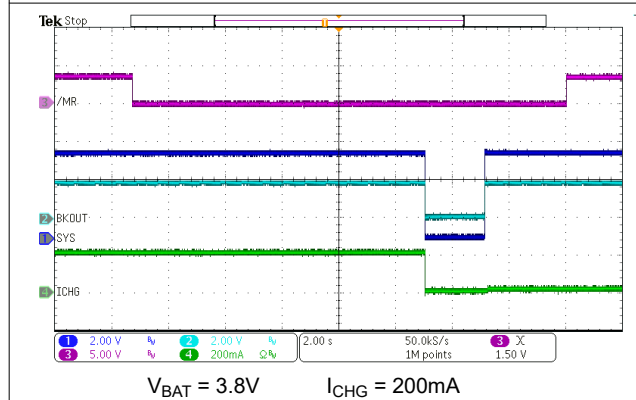
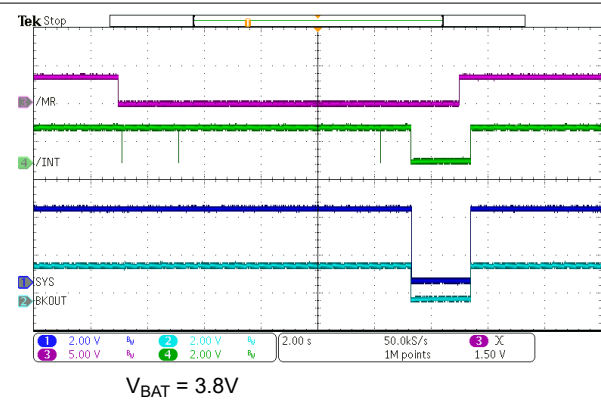


Figure 8-5. Charge Disable

Figure 8-6. Hardware Reset by Push-Button ( $\overline{MR}$ ) Press with AdapterFigure 8-7. Hardware Reset by Push-Button ( $\overline{MR}$ ) Press without Adapter

### 8.2.3 Application Performance Plots (continued)

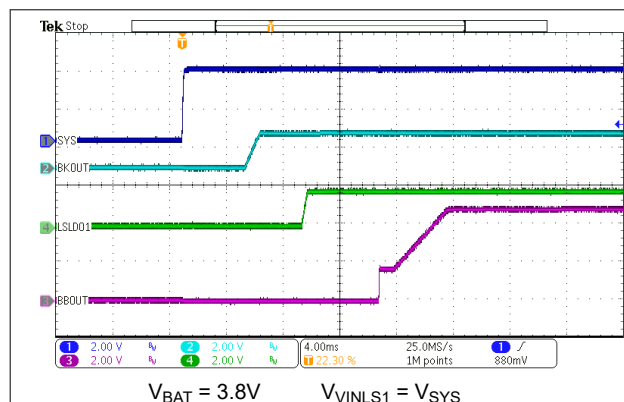


Figure 8-8. Power-Up Sequence During Ship Mode Exit

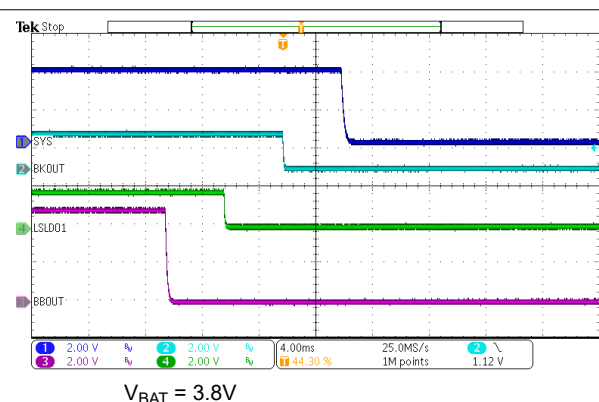


Figure 8-9. Power-Down Sequence (default) During Ship Mode Entry

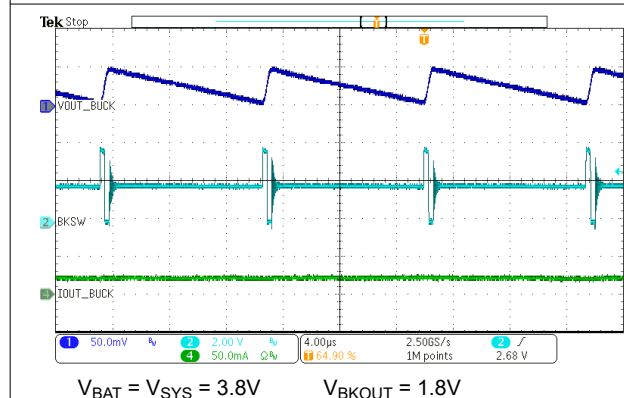


Figure 8-10. Buck Typical Operation (Buck load = 20mA)

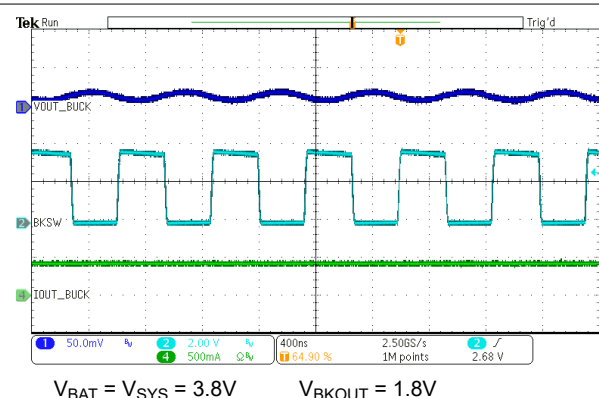


Figure 8-11. Buck Typical Operation (Buck load = 400mA)

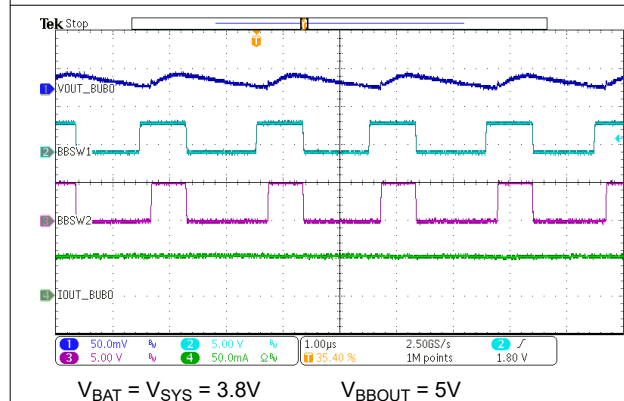


Figure 8-12. Buck-Boost Typical Operation (Buck-boost load = 50mA)

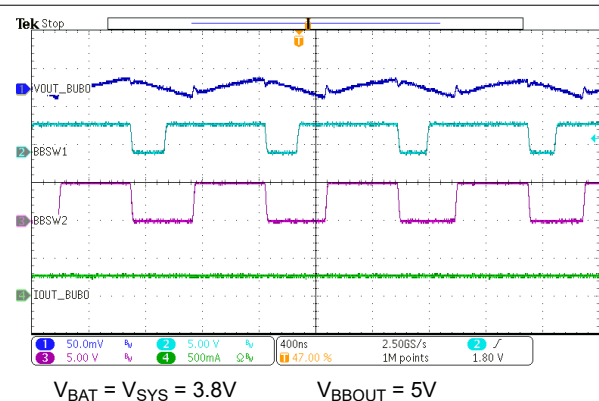


Figure 8-13. Buck-Boost Typical Operation (Buck-boost load = 250mA)

### 8.2.3 Application Performance Plots (continued)

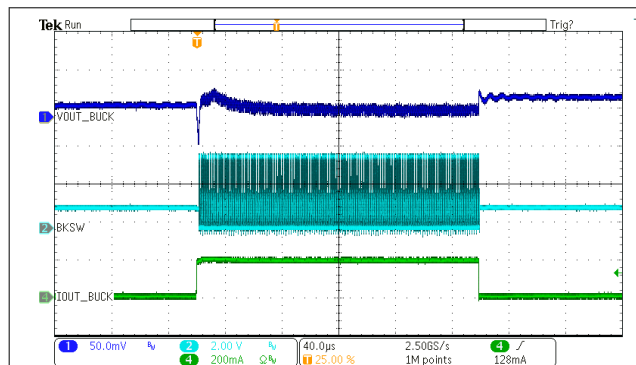

 $V_{BAT} = V_{SYS} = 3.8V$        $V_{BKOUT} = 1V$ 

Figure 8-14. Buck Load Transient (Buck load = 0 to 200mA)

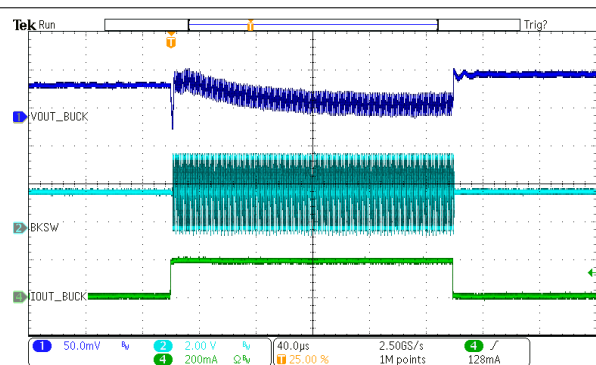

 $V_{BAT} = V_{SYS} = 3.8V$        $V_{BKOUT} = 1.8V$ 

Figure 8-15. Buck Load Transient (Buck load = 0 to 200mA)

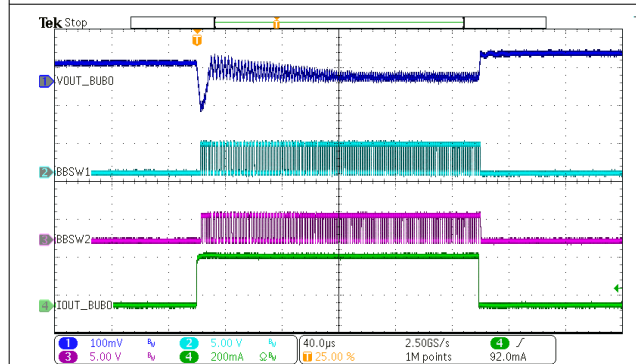

 $V_{BAT} = V_{SYS} = 3.8V$        $V_{BBOUT} = 3.3V$ 

Figure 8-16. Buck-Boost Load Transient (Buck-boost load = 0 to 250mA)

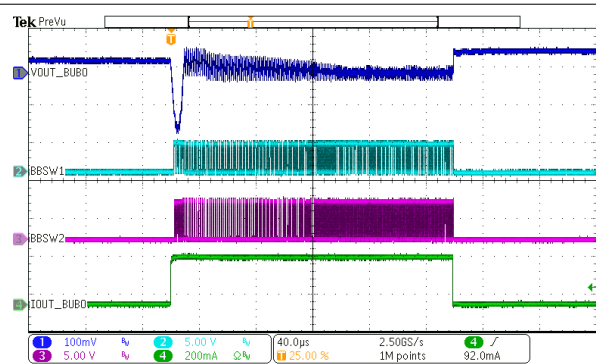

 $V_{BAT} = V_{SYS} = 3.8V$        $V_{BBOUT} = 5V$ 

Figure 8-17. Buck-Boost Load Transient (Buck-boost load = 0 to 250mA)

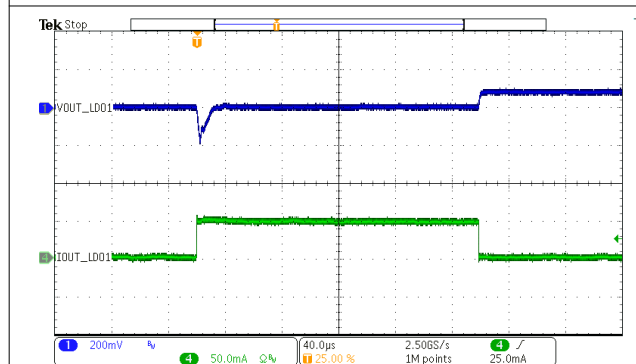

 $V_{BAT} = V_{SYS} =$        $V_{LSLDO1} = 1.8V$   
 $V_{VINLS1} = 3.8V$ 

Figure 8-18. LDO1 Load Transient (LDO1 load = 0 to 50mA)


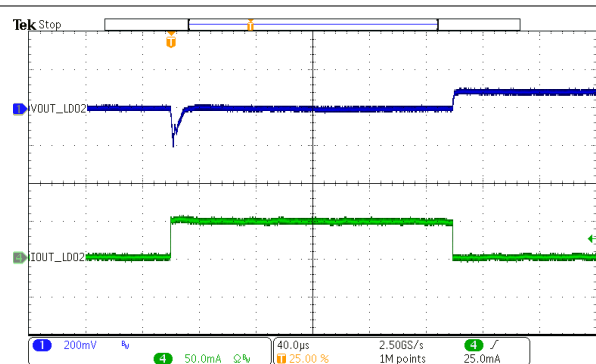

 $V_{BAT} = V_{SYS} =$        $V_{LSLDO2} = 3.3V$   
 $V_{VINLS2} = 3.8V$ 

Figure 8-19. LDO2 Load Transient (LDO2 load = 0 to 50mA)




### 8.2.3 Application Performance Plots (continued)

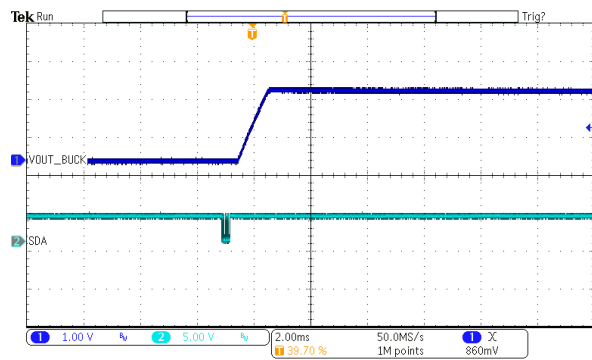


$V_{BAT} = V_{SYS} = 3.8V$   $V_{BKOUT} = 1.8V$

**Figure 8-20. Buck Enable (No load)**

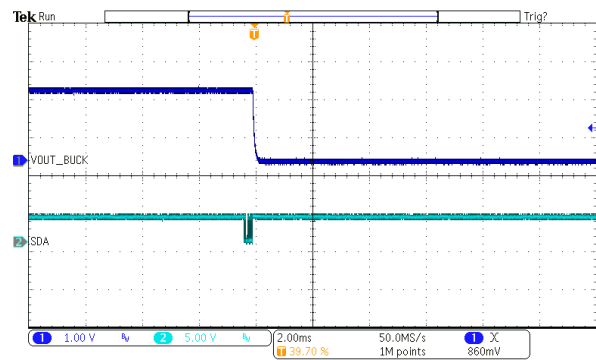


$V_{BAT} = V_{SYS} = 3.8V$   $V_{BKOUT} = 1.8V$

**Figure 8-21. Buck Disable (No load)**

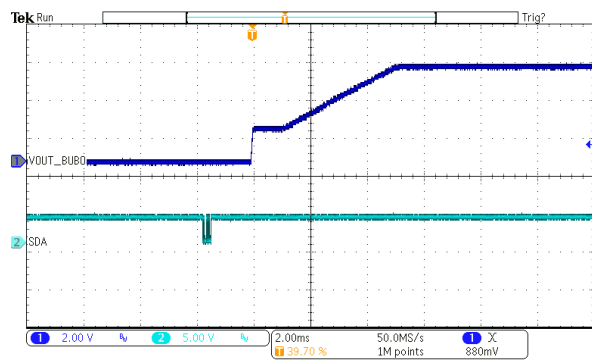


$V_{BAT} = V_{SYS} = 3.8V$   $V_{BBOUT} = 5V$

**Figure 8-22. Buck-Boost Enable (No load)**

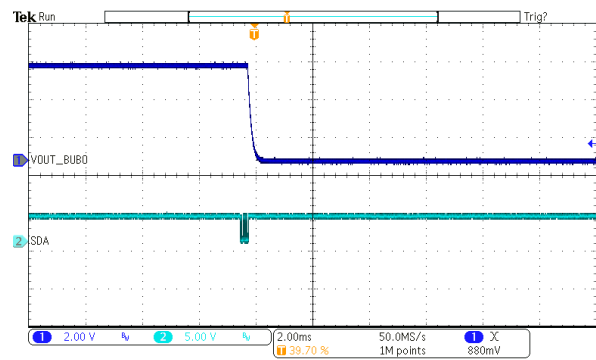


$V_{BAT} = V_{SYS} = 3.8V$   $V_{BBOUT} = 5V$

**Figure 8-23. Buck-Boost Disable (No load)**

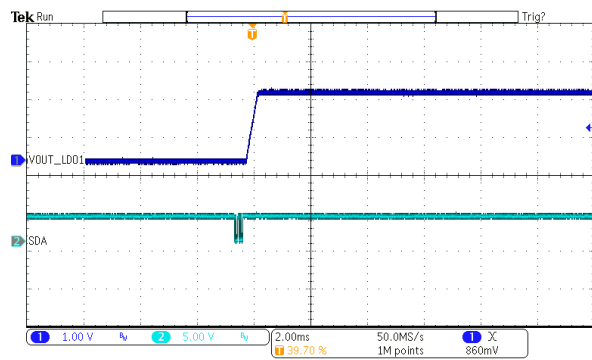

$V_{BAT} = V_{SYS} =$   $V_{LSLDO1} = 1.8V$   
 $V_{VINLS1} = 3.8V$


**Figure 8-24. LDO1 Enable (No load)**

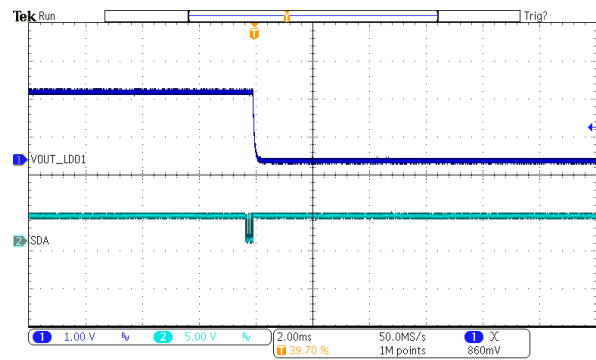

$V_{BAT} = V_{SYS} =$   $V_{LSLDO1} = 1.8V$   
 $V_{VINLS1} = 3.8V$


**Figure 8-25. LDO1 Disable (No load)**

### 8.2.3 Application Performance Plots (continued)

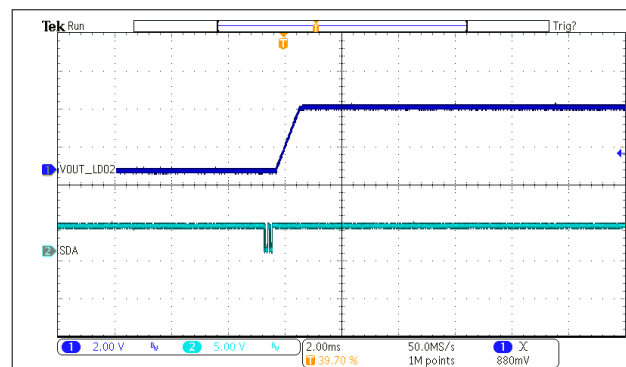

$V_{BAT} = V_{SYS} = V_{LSDO2} = 3.3V$   
 $V_{VINLS2} = 3.8V$

**Figure 8-26. LDO2 Enable (No load)**

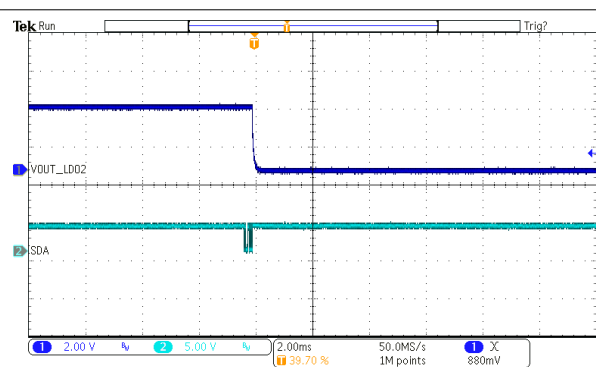

$V_{BAT} = V_{SYS} = V_{LSDO2} = 3.3V$   
 $V_{VINLS2} = 3.8V$

**Figure 8-27. LDO2 Disable (No load)**

## 9 Power Supply Recommendations

In order to provide an output voltage on SYS, the device requires a power supply between 3V and 18V input connected to IN or a single-cell lithium battery with voltage >  $V_{BATDEPLZ}$  connected to BAT.


## 10 Layout

### 10.1 Layout Guidelines

The following PCB layout design guidelines are recommended:

- Place the input decoupling caps from VIN to GND, SYS (A5) to GND, and SYS (F5) to GND close to the IC with wide and short traces. The input decoupling caps from SYS (A5) to GND and from SYS (F5) to GND are required.
- Place the output caps from BBOUT to GND, SYS to GND, BAT to GND, LSLDO1 to GND, and LSLDO2 to GND close to the IC with wide and short traces.
- All SYS pins must be connected with a wide trace for strong connection.
- 2<sup>nd</sup> layer should be the ground layer for strong ground connection with vias for all the GND connections, especially for BKGND, BBGND, and all the input/output caps' GND connections. Avoid routing which can interrupt or cut the ground planes.
- The Buck output voltage feedback from Buck output cap to BKOUT should be realized with an independent trace with no current flow. This feedback line is a sensitive, high impedance line and should be routed away from noisy components and traces (for example, switch nodes of Buck and Buck-boost) or other noise sources.
- The power (high current) paths traces must be sized appropriately for the maximum charge current in order to avoid large voltage drops on these traces.

## 10.2 Layout Example

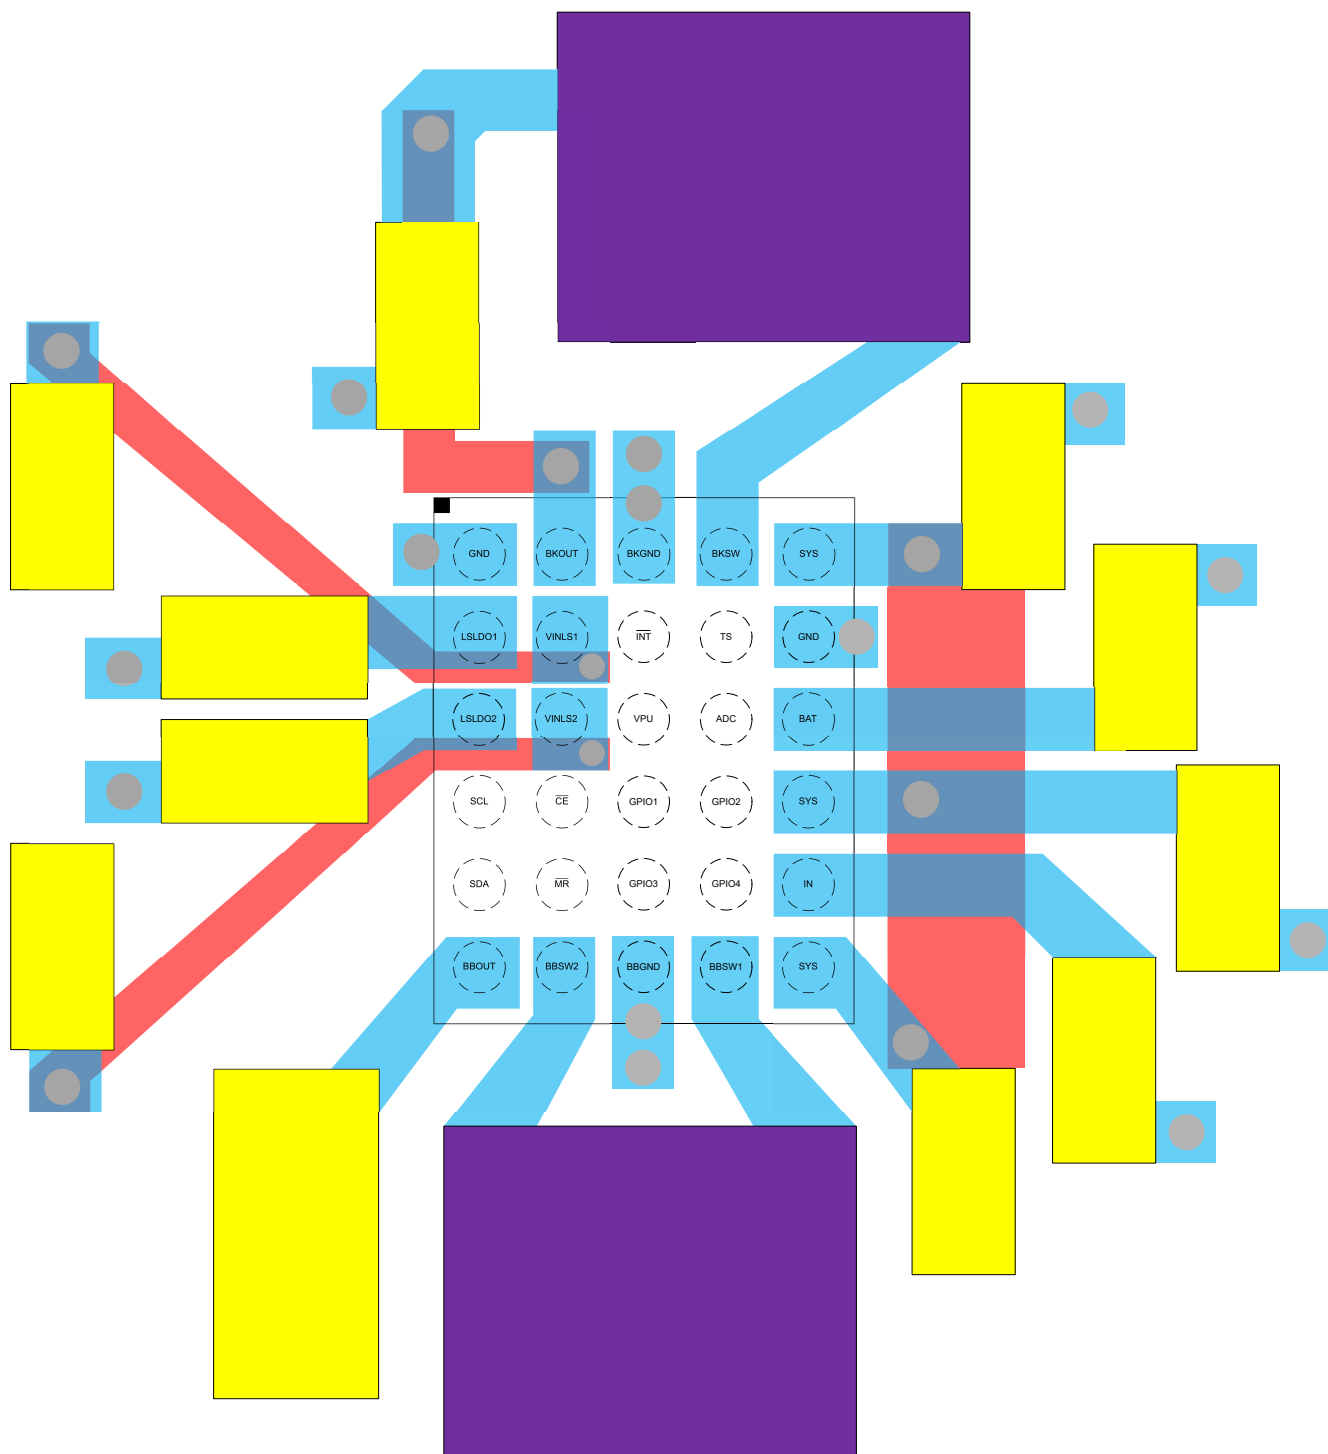

**Figure 10-1. Layout Example (Top View)**

# 11 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

## 11.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

## 11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 11.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

## 11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.  
All trademarks are the property of their respective owners.

## 11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 11.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

# 12 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision * (October 2024) to Revision A (December 2024)  | Page |
|---|------|
| • Deleted tSLEEP_DGL (deglitch time to enter sleep mode).....         | 15   |
| • Deleted tBATDEPL (deglitch time to open BATFET due to BATDEPL)..... | 15   |

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number       | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------------|---------------|----------------------|------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">BQ25190YBGR</a> | Active        | Production           | DSBGA (YBG)   30 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ25190             |
| BQ25190YBGR.A               | Active        | Production           | DSBGA (YBG)   30 | 3000   LARGE T&R      | Yes         | SNAGCU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ25190             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ25190YBGR | DSBGA        | YBG             | 30   | 3000 | 330.0              | 12.4               | 2.42    | 2.92    | 0.65    | 4.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ25190YBGR | DSBGA        | YBG             | 30   | 3000 | 367.0       | 367.0      | 35.0        |

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.


2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


YBG0030

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

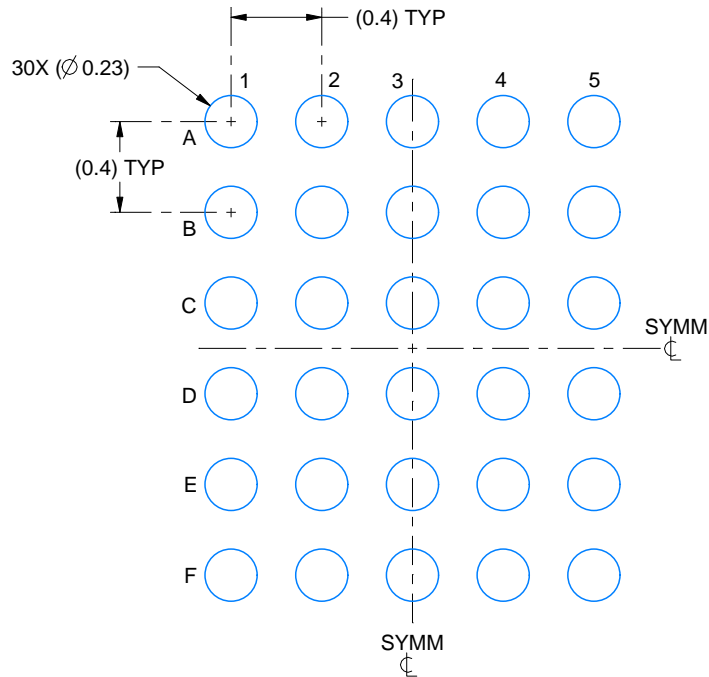

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 30X

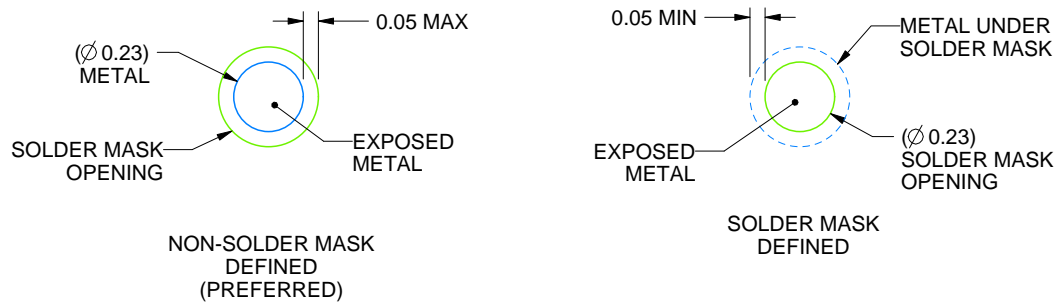

SOLDER MASK DETAILS  
NOT TO SCALE

4224242/A 04/2018

NOTES: (continued)


- Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. See Texas Instruments Literature No. SNVA009 ([www.ti.com/lit/snva009](http://www.ti.com/lit/snva009)).

# EXAMPLE STENCIL DESIGN

YBG0030

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

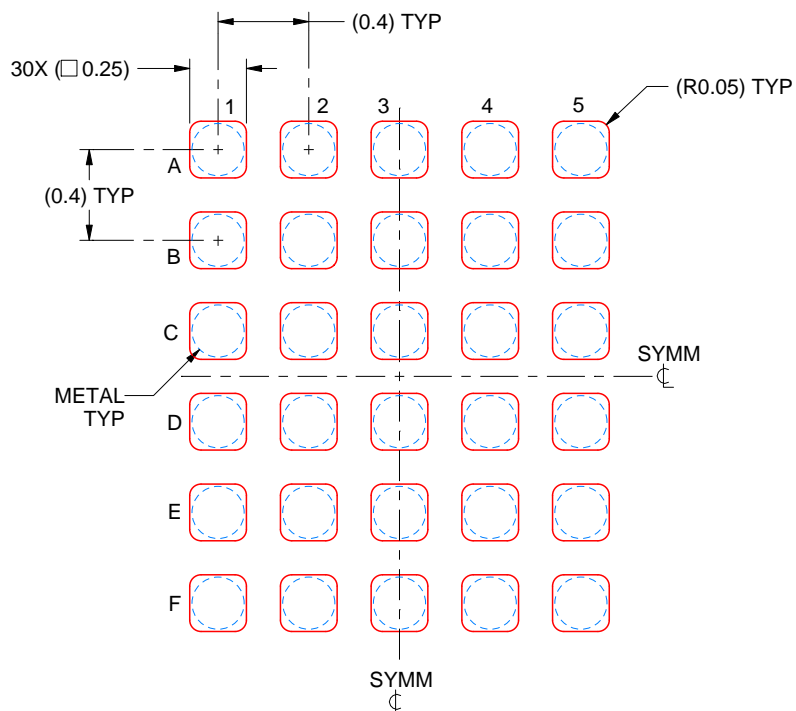

SOLDER PASTE EXAMPLE  
 BASED ON 0.1 mm THICK STENCIL  
 SCALE: 30X

4224242/A 04/2018

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated