











**DSLVDS1048** 

SNLS624-SEPTEMBER 2018

# DSLVDS1048 3.3-V LVDS Quad Channel High-Speed Differential Line Receiver

#### 1 Features

- Designed for Signal Rates up to 400 Mbps
- Flow-Through Pinout Simplifies PCB Layout
- 150-ps Channel-to-Channel Skew (Typical)
- 100-ps Differential Skew (Typical)
- 2.7-ns Maximum Propagation Delay
- 3.3-V Power Supply Design
- · High Impedance LVDS Inputs on Power Down
- Low Power Design (40 mW at 3.3-V Static)
- Interoperable With Existing 5-V LVDS Drivers
- Accepts Small Swing (350 mV Typical) Differential Signal Levels
- Supports Input Failsafe
  - Open, Short, and Terminated
- 0 V to −100 mV Threshold Region
- Operating Temperature Range: –40°C to +85°C
- Meets or Exceeds ANSI/TIA/EIA-644 Standard
- Available in TSSOP Package

# 2 Applications

- Multifunction Printers
- Board-to-Board Communication
- Test and Measurement
- Printers
- Data Center Interconnect
- Lab Instrumentation
- Ultrasound Scanners

## 3 Description

The DSLVDS1048 device is a quad CMOS flow-through differential line receiver designed for applications requiring ultra-low power dissipation and high data rates. The device is designed to support data rates in excess of 400 Mbps (200 MHz) using Low Voltage Differential Signaling (LVDS) technology.

The DSLVDS1048 accepts low voltage (350 mV typical) differential input signals and translates them to 3-V CMOS output levels. The receiver supports a TRI-STATE function that may be used to multiplex outputs. The receiver also supports open, shorted, and terminated (100- $\Omega$ ) input fail-safe. The receiver output is HIGH for all fail-safe conditions. The DSLVDS1048 has a flow-through pinout for easy PCB layout.


The EN and EN\* inputs are ANDed together and control the TRI-STATE outputs. The enables are common to all four receivers. The DSLVDS1048 and companion LVDS line driver (for example, DSLVDS1047) provide a new alternative to high-power PECL/ECL devices for high-speed point-to-point interface applications.

## Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)	
DSLVDS1048	TSSOP (16)	5.00 mm × 4.40 mm	

(1) For all available packages, see the orderable addendum at the end of the data sheet.

Figure 1. Application Diagram

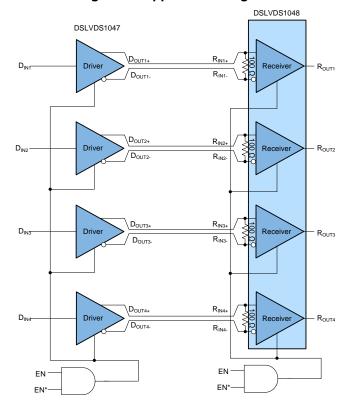



# **Table of Contents**

1	Features 1		8.3 Feature Description	
2	Applications 1		8.4 Device Functional Modes	. 11
3	Description 1	9	Application and Implementation	12
4	Revision History2		9.1 Application Information	. 12
5	Pin Configuration and Functions		9.2 Typical Application	. 12
6	Specifications	10	Power Supply Recommendations	14
	6.1 Absolute Maximum Ratings	11	Layout	14
	6.2 ESD Ratings		11.1 Layout Guidelines	. 14
	6.3 Recommended Operating Conditions		11.2 Layout Example	. 15
	6.4 Thermal Information	12	Device and Documentation Support	16
	6.5 Electrical Characteristics		12.1 Receiving Notification of Documentation Updates	<b>. 16</b>
	6.6 Switching Characteristics5		12.2 Community Resources	. 16
	6.7 Typical Characteristics		12.3 Trademarks	. 16
7	Parameter Measurement Information		12.4 Electrostatic Discharge Caution	. 16
8	Detailed Description 10		12.5 Glossary	. 16
-	8.1 Overview 10	13	Mechanical, Packaging, and Orderable Information	17
	8.2 Functional Block Diagram 10			

# 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
September 2018	*	Initial release.


Submit Documentation Feedback

Copyright © 2018, Texas Instruments Incorporated



www.ti.com

# 5 Pin Configuration and Functions



#### **Pin Functions**

P	PIN				DESCRIPTION		
NAME	NO.	I/O	DESCRIPTION				
EN	16	I	Receiver enable pin: When EN is low, the receiver is disabled. When EN is high and EN* is low or open, the receiver is enabled. If both EN and EN* are open circuit, then the receiver is disabled.				
EN*	9	I	Receiver enable pin: When EN* is high, the receiver is disabled. When EN* is low or open and EN is high, the receiver is enabled. If both EN and EN* are open circuit, then the receiver is disabled.				
GND	12	_	Ground pin				
R <sub>IN+</sub>	2, 3, 6, 7	I	Noninverting receiver input pin				
R <sub>IN</sub> -	1, 4, 5, 8	I	Inverting receiver input pin				
R <sub>OUT</sub>	10, 11, 14, 15	0	Receiver output pin				
V <sub>CC</sub>	13	_	Power supply pin, +3.3V ± 0.3V				

# 6 Specifications

# 6.1 Absolute Maximum Ratings

See (1)(2)

			MIN	MAX	UNIT
Supply voltage (V <sub>CC</sub> )	-0.3	4	V		
Input voltage (R <sub>IN+</sub> , R <sub>IN-</sub> )			-0.3	3.6	V
Enable input voltage (EN, EN*)			-0.3	$V_{CC} + 0.3$	V
Output voltage (R <sub>OUT</sub> )			-0.3	V <sub>CC</sub> + 0.3	V
Manian and an arrangement of the state of	PW0016A package			866	mW
Maximum package power dissipation at +25°C	Derate PW0016A package	above +25°C		6.9	mW/°C
Lead temperature soldering	(4 s)			260	°C
Maximum junction temperature				150	°C
Storage temperature, T <sub>stg</sub>				150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

<sup>(2)</sup> If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/Distributors for availability and specifications.

# STRUMENTS

#### 6.2 ESD Ratings

			VALUE	UNIT
., .	Floatroatatic discharge (1)	Human-body model (HBM)	±10000	V
V <sub>(ESD)</sub>	Electrostatic discharge <sup>(1)</sup>	Machine model	±1200	V

(1) ESD Rating: HBM (1.5 k $\Omega$ , 100 pF) EIAJ (0 Ω, 200 pF)

# 6.3 Recommended Operating Conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V <sub>CC</sub>	3	3.3	3.6	V
Receiver input voltage	GND		3	V
Operating free air temperature, T <sub>A</sub>	-40	25	85	°C

#### 6.4 Thermal Information

		DSLVDS1048	
	THERMAL METRIC <sup>(1)</sup>	PW (TSSOP)	UNIT
		16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	110.2	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	47	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	54.7	°C/W
ΨЈТ	Junction-to-top characterization parameter	6.1	°C/W
ΨЈВ	Junction-to-board characterization parameter	54.2	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application

#### 6.5 Electrical Characteristics

Over Supply Voltage and Operating Temperature ranges, unless otherwise specified. (1)(2)

	PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
$V_{TH}$	Differential input high threshold	.4.2.\/ .	V <sub>CM</sub> = +1.2 V, 0.05 V, 2.95 V <sup>(3)</sup>				100	mV
V <sub>TL</sub>	Differential input low threshold	$v_{\rm CM} = +1.2 \text{ V, C}$	J.05 V, 2.95 V		-100			mV
VCMR	Common-mode voltage range	VID = 200 mV p	VID = 200 mV peak to peak? (4)		0.1		2.3	V
		V <sub>IN</sub> = +2.8 V	V 26V or 0 V	R <sub>IN+</sub> , R <sub>IN-</sub>	-10	±5	10	
I <sub>IN</sub>	Input current	$V_{IN} = 0 V$	$V_{CC} = 3.6 \text{ V or } 0 \text{ V}$		-10	±1	10	μΑ
		$V_{IN} = +3.6 \text{ V}$	$V_{CC} = 0 V$		-20	±1	20	
V <sub>OH</sub>	Output high voltage		$I_{OH} = -0.4$ mA, $V_{ID} = +200$ mV, input terminated, input shorted		2.7	3.3		V
V <sub>OL</sub>	Output low voltage	I <sub>OL</sub> = 2 mA, V <sub>ID</sub> = −200 mV		R <sub>OUT</sub>			0.25	V
I <sub>OS</sub>	Output short-circuit current	Enabled, V <sub>OUT</sub> = 0 V <sup>(5)</sup>			-15	-47	-100	mA
I <sub>OZ</sub>	Output TRI-STATE current	Disabled, V <sub>OUT</sub>	= 0 V or V <sub>CC</sub>		-10	±1	10	μΑ

<sup>(1)</sup> Current into device pins is defined as positive. Current out of device pins is defined as negative. All voltages are referenced to ground unless otherwise specified.

All typicals are given for:  $V_{CC} = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .

V<sub>CC</sub> is always higher than  $R_{\text{IN+}}$  and  $R_{\text{IN-}}$  voltage.  $R_{\text{IN-}}$  and  $R_{\text{IN+}}$  are allowed to have a voltage range -0.2 V to V<sub>CC</sub> – VID/2. However, to be compliant with AC specifications, the common voltage range is 0.1 V to 2.3 V. The VCMR range is reduced for larger VID. Example: if VID = 400 mV, the VCMR is 0.2 V to 2.2 V. The fail-safe condition with inputs shorted is not supported over the common-mode range of 0 V to 2.4 V, but is supported only with inputs shorted and no external common-mode voltage applied. A VID up to  $V_{CC} - 0$  V may be applied to the  $R_{IN+}/R_{IN-}$  inputs with the Common-Mode voltage set to V<sub>CC</sub>/2. Propagation delay and Differential Pulse skew decrease when VID is increased from 200 mV to 400 mV. Skew specifications apply for 200 mV ≤ VID ≤ 800 mV over the common-mode range.

Output short-circuit current (IOS) is specified as magnitude only, minus sign indicates direction only. Only one output should be shorted at a time; do not exceed maximum junction temperature specification.



www.ti.com

# **Electrical Characteristics (continued)**

Over Supply Voltage and Operating Temperature ranges, unless otherwise specified. (1)(2)

	PARAMETER	TEST CONDITIONS	PIN	MIN	TYP	MAX	UNIT
$V_{IH}$	Input high voltage			2		$V_{CC}$	<b>V</b>
$V_{IL}$	Input low voltage		EN,	GND		0.8	<b>V</b>
I	Input current	$V_{IN} = 0 \text{ V or } V_{CC}$ , other Input = $V_{CC}$ or GND	EN*	-10	±5	10	μΑ
$V_{CL}$	Input clamp voltage	I <sub>CL</sub> = −18 mA		-1.5	-0.8		<b>V</b>
I <sub>CC</sub>	No load supply current receivers enabled	EN = V <sub>CC</sub> , inputs open			9	15	mA
I <sub>CCZ</sub>	No load supply current receivers disabled	EN = GND, inputs open	V <sub>CC</sub>		1	5	mA

## 6.6 Switching Characteristics


Over Supply Voltage and Operating Temperature ranges, unless otherwise specified. (1)(2)(3)(4)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t <sub>PHLD</sub>	Differential propagation delay high to low		1.2	2	2.7	ns
t <sub>PLHD</sub>	Differential propagation delay low to high		1.2	2	2.7	ns
t <sub>SKD1</sub>	Differential pulse skew  t <sub>PHLD</sub> - t <sub>PLHD</sub>   <sup>(5)</sup>			0.1	0.4	ns
t <sub>SKD2</sub>	Differential channel-to-channel skew; same device $^{(3)}$	$C_L = 15 \text{ pF}$ $V_{ID} = 200 \text{ mV}$		0.15	0.5	ns
t <sub>SKD3</sub>	Differential part-to-part skew <sup>(4)</sup>	(Figure 16 and Figure 17)			1	ns
t <sub>SKD4</sub>	Differential part-to-part skew <sup>(6)</sup>				1.5	ns
t <sub>TLH</sub>	Rise time			0.5	1	ns
t <sub>THL</sub>	Fall time			0.5	1	ns
t <sub>PHZ</sub>	Disable time high to Z			8	14	ns
t <sub>PLZ</sub>	Disable time low to Z	$R_L = 2 k\Omega$		8	14	ns
t <sub>PZH</sub>	Enable time Z to high	C <sub>L</sub> = 15 pF (Figure 18 and Figure 19)		9	14	ns
t <sub>PZL</sub>	Enable time Z to low	(1.13.10.10.11.13.11.13.10)		9	14	ns
f <sub>MAX</sub>	Maximum operating frequency <sup>(7)</sup>	All channels switching	200	250		MHz

- (1) All typicals are given for:  $V_{CC} = 3.3 \text{ V}$ ,  $T_A = 25^{\circ}\text{C}$ .
- (2) Generator waveform for all tests unless otherwise specified: f = 1 MHz, Z<sub>O</sub> = 50 Ω, t<sub>f</sub> and t<sub>f</sub> (0% to 100%) ≤ 3 ns for R<sub>IN</sub>.
- (3) t<sub>SKD2</sub>, channel-to-channel skew is defined as the difference between the propagation delay of one channel and that of the others on the same chip with any event on the inputs.
- (4) t<sub>SKD3</sub>, part-to-part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices at the same V<sub>CC</sub>, and within 5°C of each other within the operating temperature range.
- (5) t<sub>SKD1</sub> is the magnitude difference in differential propagation delay time between the positive going edge and the negative going edge of the same channel
- (6) t<sub>SKD4</sub>, part-to-part skew, is the differential channel-to-channel skew of any event between devices. This specification applies to devices over recommended operating temperature and voltage ranges, and across process distribution. t<sub>SKD4</sub> is defined as |Max-Min| differential propagation delay.
- (7) f<sub>MAX</sub> generator input conditions: t<sub>r</sub> = t<sub>f</sub> < 1 ns (0% to 100%), 50% duty cycle, differential (1.05-V to 1.35-V peak to peak). Output criteria: 60 / 40% duty cycle, V<sub>OL</sub> (maximum 0.4 V), V<sub>OH</sub> (minimum 2.7 V), Load = 15 pF (stray plus probes).

# TEXAS INSTRUMENTS

# 6.7 Typical Characteristics

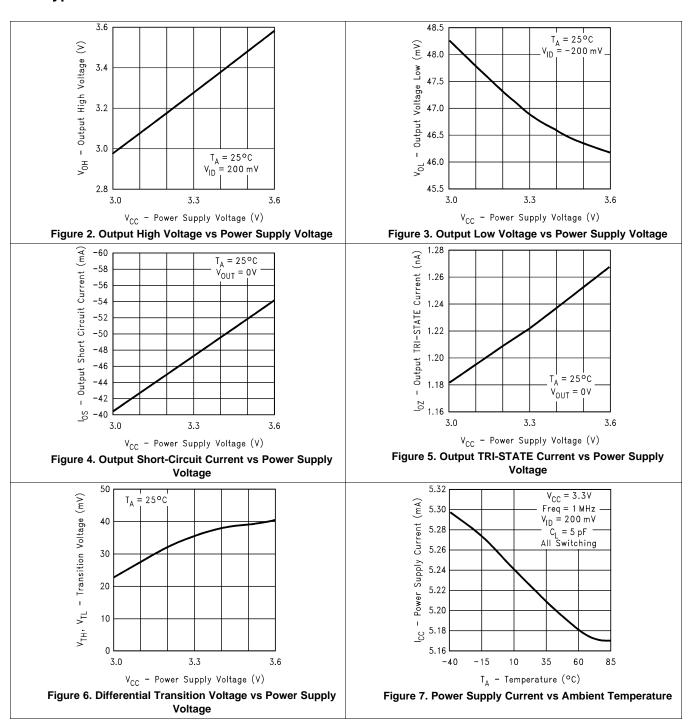



www.ti.com

# **Typical Characteristics (continued)**




Figure 8. Differential Propagation Delay vs Power Supply Voltage




Figure 9. Differential Propagation Delay vs Ambient Temperature




Figure 10. Differential Propagation Delay vs Differential Input Voltage






Figure 11. Differential Propagation Delay vs Common-Mode Voltage









Figure 13. Differential Skew vs Ambient Temperature

# TEXAS INSTRUMENTS

# **Typical Characteristics (continued)**

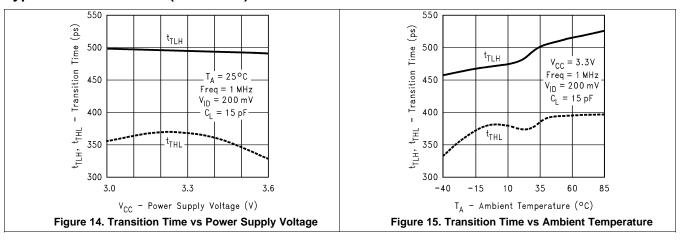

# 7 Parameter Measurement Information




Figure 16. Receiver Propagation Delay and Transition Time Test Circuit


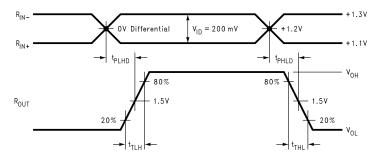


Figure 17. Receiver Propagation Delay and Transition Time Waveforms

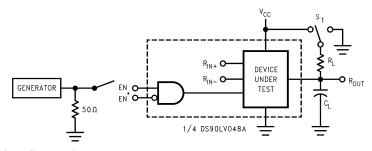

 $\ensuremath{C_L}$  includes load and test jig capacitance.

 $S_1 = V_{CC}$  for  $t_{PZL}$  and  $t_{PLZ}$  measurements.

 $S_1 = GND$  for  $t_{PZH}$  and  $t_{PHZ}$  measurements.

Figure 18. Receiver TRI-STATE Delay Test Circuit

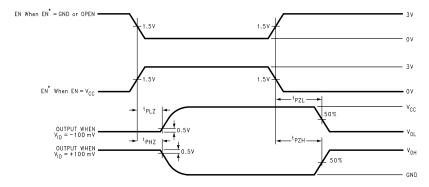


Figure 19. Receiver TRI-STATE Delay Waveforms

Copyright © 2018, Texas Instruments Incorporated

# TEXAS INSTRUMENTS

## 8 Detailed Description


#### 8.1 Overview

LVDS drivers and receivers are intended to be primarily used in an uncomplicated point-to-point configuration as shown in Figure 20. This configuration provides a clean signaling environment for the fast edge rates of the drivers. The receiver is connected to the driver through a balanced media which may be a standard twisted pair cable, a parallel pair cable, or simply PCB traces. Typically, the characteristic impedance of the media is in the range of  $100~\Omega$ . A termination resistor of  $100~\Omega$  (selected to match the media) is located as close to the receiver input pins as possible. The termination resistor converts the driver output (current mode) into a voltage that is detected by the receiver. Other configurations are possible such as a multi-receiver configuration, but the effects of a mid-stream connector(s), cable stub(s), and other impedance discontinuities as well as ground shifting, noise margin limits, and total termination loading must be considered.

The DSLVDS1048 differential line receiver is capable of detecting signals as low as 100 mV, over a  $\pm 1\text{-V}$  common-mode range centered around  $\pm 1.2$  V. This is related to the driver offset voltage which is typically  $\pm 1.2$  V. The driven signal is centered around this voltage and may shift  $\pm 1$  V around this center point. The  $\pm 1\text{-V}$  shifting may be the result of a ground potential difference between the ground reference of the driver and the ground reference of the receiver, the common-mode effects of coupled noise, or a combination of the two. The AC parameters of both receiver input pins are optimized for a recommended operating input voltage range of 0 V to  $\pm 2.4$  V (measured from each pin to ground). The device operates for receiver input voltages up to  $\pm 1.2$  V (which clamps the bus voltages).

The DSLVDS1048 has a flow-through pinout that allows for easy PCB layout. The LVDS signals on one side of the device easily allows for matching electrical lengths of the differential pair trace lines between the driver and the receiver as well as allowing the trace lines to be close together to couple noise as common-mode. Noise isolation is achieved with the LVDS signals on one side of the device and the TTL signals on the other side.

## 8.2 Functional Block Diagram

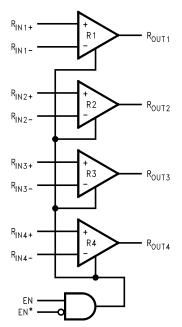

Copyright © 2016, Texas Instruments Incorporated

10

#### 8.3 Feature Description

#### 8.3.1 Fail-Safe Feature

The LVDS receiver is a high-gain, high-speed device that amplifies a small differential signal (20 mV) to CMOS logic levels. Due to the high gain and tight threshold of the receiver, take care to prevent noise from appearing as a valid signal.

The internal fail-safe circuitry of the receiver is designed to source or sink a small amount of current, providing fail-safe protection (a stable known state of HIGH output voltage) for floating, terminated or shorted receiver

- 1. Open Input Pins. The DSLVDS1048 is a guad receiver device, and if an application requires only 1, 2, or 3 receivers, the unused channel(s) inputs must be left OPEN. Do not tie unused receiver inputs to ground or any other voltages. The input is biased by internal high value pullup and pulldown resistors to set the output to a HIGH state. This internal circuitry ensures a HIGH, stable output state for open inputs.
- 2. Terminated Input. If the driver is disconnected (cable unplugged), or if the driver is in a TRI-STATE or power-off condition, the receiver output is again in a HIGH state, even with the end of cable  $100-\Omega$ termination resistor across the input pins. The unplugged cable can become a floating antenna which can pick up noise. If the cable picks up more than 10 mV of differential noise, the receiver may see the noise as a valid signal and switch. To ensure that any noise is seen as common-mode and not differential, a balanced interconnect should be used. Twisted pair cable offers better balance than flat ribbon cable.
- 3. Shorted Inputs. If a fault condition occurs that shorts the receiver inputs together, thus resulting in a 0-V differential input voltage, the receiver output remains in a HIGH state. Shorted input fail-safe is not supported across the common-mode range of the device (GND to 2.4 V). It is only supported with inputs shorted and no external common-mode voltage applied.

External lower value pullup and pulldown resistors (for a stronger bias) may be used to boost fail-safe in the presence of higher noise levels. The pullup and pulldown resistors must be in the 5-k $\Omega$  to 15-k $\Omega$  range to minimize loading and waveform distortion to the driver. The common-mode bias point must be set to approximately 1.2 V (less than 1.75 V) to be compatible with the internal circuitry.

Additional information on fail-safe biasing of LVDS devices may be found in AN-1194 Failsafe Biasing of LVDS Interfaces (SNLA051).

#### 8.4 Device Functional Modes

Table 1 lists the functional modes of the DSLVDS1048.

**Table 1. Truth Table** 

ENA	ENABLES		OUTPUT
EN	EN EN*		R <sub>OUT</sub>
	H L or Open	V <sub>ID</sub> ≥ 0 V	Н
		V <sub>ID</sub> ≤ −0.1 V	L
н		Full Fail-safe OPEN/SHORT or Terminated	Н
All other combination	ns of ENABLE inputs	X	Z

# TEXAS INSTRUMENTS

# 9 Application and Implementation

#### **NOTE**

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

# 9.1 Application Information

The DSLVDS1048 has a flow-through pinout that allows for easy PCB layout. The LVDS signals on one side of the device easily allows for matching electrical lengths of the differential pair trace lines between the driver and the receiver as well as allowing the trace lines to be close together to couple noise as common-mode. Noise isolation is achieved with the LVDS signals on one side of the device and the TTL signals on the other side.

# 9.2 Typical Application

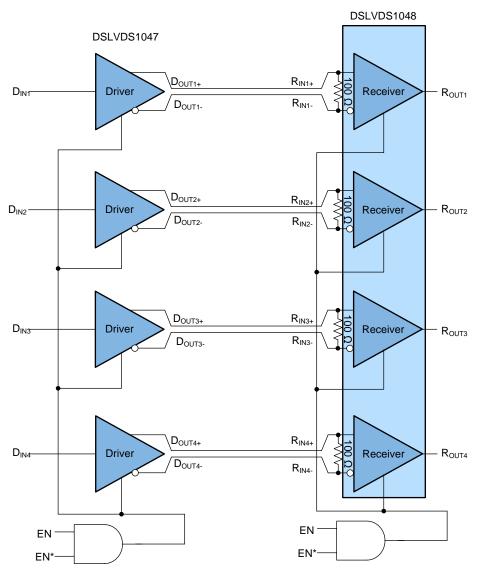


Figure 20. Balanced System Point-to-Point Application

2

# **Typical Application (continued)**

#### 9.2.1 Design Requirements

When using LVDS devices, it is important to remember to specify controlled impedance PCB traces, cable assemblies, and connectors. All components of the transmission media must have a matched differential impedance of about  $100 \Omega$ . They must not introduce major impedance discontinuities.

Balanced cables (for example, twisted pair) are usually better than unbalanced cables (ribbon cable) for noise reduction and signal quality. Balanced cables tend to generate less EMI due to field canceling effects and also tend to pick up electromagnetic radiation as common-mode (not differential mode) noise which is rejected by the LVDS receiver.

For cable distances < 0.5 M, most cables can be made to work effectively. For distances 0.5 M  $\leq$  d  $\leq$  10 M, CAT5 (Category 5) twisted pair cable works well, is readily available, and relatively inexpensive.

rabio 2. Doolgii Noquii oliionio						
DESIGN PARAMETERS	EXAMPLE VALUE					
Receiver Supply Voltage (V <sub>CC</sub> )	3.0 to 3.6 V					
Receiver Output Voltage	0 to 3.6 V					
Signaling Rate	0 to 400 Mbps					
Interconnect Characteristic Impedance	100 Ω					
Termination Resistance	100 Ω					
Number of Receiver Nodes	1					
Ground shift between driver and receiver	±1 V					

**Table 2. Design Requirements** 

#### 9.2.2 Detailed Design Procedure

# 9.2.2.1 Probing LVDS Transmission Lines

Always use high impedance (>  $100k\Omega$ ), low capacitance (< 2 pF) scope probes with a wide bandwidth (1 GHz) scope. Improper probing gives deceiving results.

#### 9.2.2.2 Threshold

The LVDS Standard (ANSI/TIA/EIA-644) specifies a maximum threshold of ±100 mV for the LVDS receiver. The DSLVDS1048 supports an enhanced threshold region of −100 mV to 0 V. This is useful for fail-safe biasing. The threshold region is shown in the Voltage Transfer Curve (VTC) in Figure 21. The typical DSLVDS1048 LVDS receiver switches at about −35 mV.

#### NOTE

With  $V_{\text{ID}}$  = 0 V, the output is in a HIGH state. With an external fail-safe bias of +25 mV applied, the typical differential noise margin is now the difference from the switch point to the bias point.

In the following example, this would be 60 mV of Differential Noise Margin ( $\pm$ 25 mV - ( $\pm$ 35 mV)). With the enhanced threshold region of  $\pm$ 100 mV to 0 V, this small external fail-safe biasing of  $\pm$ 25 mV (with respect to 0 V) gives a DNM of a comfortable 60 mV. With the standard threshold region of  $\pm$ 100 mV, the external fail-safe biasing would need to be  $\pm$ 25 mV with respect to  $\pm$ 100 mV or  $\pm$ 125 mV, giving a DNM of 160 mV which is stronger fail-safe biasing than is necessary for the DSLVDS1048. If more DNM is required, then a stronger fail-safe bias point can be set by changing resistor values.

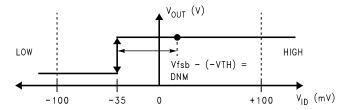


Figure 21. VTC of the DSLVDS1048 LVDS Receiver

#### 9.2.3 Application Curve




Figure 22. Power Supply Current vs Frequency

# 10 Power Supply Recommendations

Although the DSLVDS1047 draws very little power while at rest, its overall power consumption increases due to a dynamic current component. The DSLVDS1048 power supply connection must take this additional current consumption into consideration for maximum power requirements.

## 11 Layout

## 11.1 Layout Guidelines

- Use at least 4 PCB layers (top to bottom): LVDS signals, ground, power, and TTL signals.
- Isolate TTL signals from LVDS signals, otherwise the TTL may couple onto the LVDS lines. Best practice is to put TTL and LVDS signals on different layers which are isolated by a power/ground plane(s).
- Keep drivers and receivers as close to the (LVDS port side) connectors as possible.

#### 11.1.1 Power Decoupling Recommendations

Bypass capacitors must be used on power pins. Use high-frequency ceramic (surface mount is recommended) 0.1- $\mu$ F and 0.001- $\mu$ F capacitors in parallel at the power supply pin with the smallest value capacitor closest to the device supply pin. Additional scattered capacitors over the printed-circuit board improves decoupling. Multiple vias must be used to connect the decoupling capacitors to the power planes. A 10- $\mu$ F (35-V) or greater solid tantalum capacitor must be connected at the power entry point on the printed-circuit board between the supply and ground.

Submit Documentation Feedback

www.ti.com SNLS624 – SEPTEMBER 2018

# **Layout Guidelines (continued)**

#### 11.1.2 Differential Traces

Use controlled impedance traces that match the differential impedance of your transmission medium (that is, cable) and termination resistor. Run the differential pair trace lines as close together as possible as soon as they leave the IC (stubs must be < 10 mm long). This helps eliminate reflections and ensure noise is coupled as common-mode. In fact, we have seen that differential signals which are 1 mm apart radiate far less noise than traces 3 mm apart because magnetic field cancellation is much better with the closer traces. In addition, noise induced on the differential lines is much more likely to appear as common-mode which is rejected by the receiver.

Match electrical lengths between traces to reduce skew. Skew between the signals of a pair means a phase difference between signals, which destroys the magnetic field cancellation benefits of differential signals and EMI, results. Remember the velocity of propagation, v = c/Er where c (the speed of light) = 0.2997 mm/ps or 0.0118 in/ps.

Do not rely solely on the autoroute function for differential traces. Carefully review dimensions to match differential impedance and provide isolation for the differential lines. Minimize the number or vias and other discontinuities on the line.

Avoid 90° turns (these cause impedance discontinuities). Use arcs or 45° bevels.

Within a pair of traces, the distance between the two traces should be minimized to maintain common-mode rejection of the receivers. On the printed-circuit board, this distance must remain constant to avoid discontinuities in differential impedance. Minor violations at connection points are allowable.

#### 11.1.3 Termination

Use a termination resistor that best matches the differential impedance or your transmission line. The resistor must be between 90  $\Omega$  and 130  $\Omega$ . Remember that the current mode outputs need the termination resistor to generate the differential voltage. LVDS does not work without resistor termination. Typically, connecting a single resistor across the pair at the receiver end will suffice.

Surface mount 1% to 2% resistors are best. PCB stubs, component lead, and the distance from the termination to the receiver inputs must be minimized. The distance between the termination resistor and the receiver must be < 10 mm (12 mm maximum).

#### 11.2 Layout Example

Copyright © 2018, Texas Instruments Incorporated

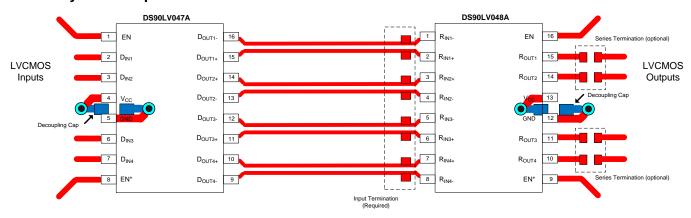


Figure 23. Layout Recommendation

# TEXAS INSTRUMENTS

# 12 Device and Documentation Support

## 12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community.* Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 12.3 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

#### 12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

## 12.5 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

16



www.ti.com

# 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
DOLLYDO4040DWD	A - 12	Dandardian	T000D (DM) 140	0500 11 4005 700		(4)	(5)	40.105	DOLVIDO
DSLVDS1048PWR	Active	Production	TSSOP (PW)   16	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	DSLVDS 1048
DSLVDS1048PWR.B	Active	Production	TSSOP (PW)   16	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	DSLVDS 1048
DSLVDS1048PWT	Active	Production	TSSOP (PW)   16	1000   SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	DSLVDS 1048
DSLVDS1048PWT.B	Active	Production	TSSOP (PW)   16	1000   SMALL T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 85	DSLVDS 1048

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

- (3) RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.
- (4) Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- (5) MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- (6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 10-Nov-2025

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 9-Aug-2022

# TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DSLVDS1048PWR	TSSOP	PW	16	2500	330.0	12.4	6.95	5.6	1.6	8.0	12.0	Q1
DSLVDS1048PWT	TSSOP	PW	16	1000	330.0	12.4	6.95	5.6	1.6	8.0	12.0	Q1

www.ti.com 9-Aug-2022



## \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DSLVDS1048PWR	TSSOP	PW	16	2500	367.0	367.0	35.0
DSLVDS1048PWT	TSSOP	PW	16	1000	367.0	367.0	35.0



SMALL OUTLINE PACKAGE



#### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025