

# AMC7836 マルチチャネルADC、バイポーラDAC、温度センサ、GPIOポート付きの高密度、12ビット・アナログ・モニタおよび制御ソリューション

## 1 特長

- 16の単調性12ビットDAC
  - 範囲を選択可能: -10V~0V、-5V~0V、0V~5V、0V~10V
  - 大電流駆動能力: 最大±15mA
  - 範囲の自動検出器
  - クランプ電圧を選択可能
- 12ビットのSAR ADC
  - 21の外部アナログ入力
    - 16のバイポーラ入力: -12.5V~+12.5V
    - 5つの高精度入力: 0V~5V
  - 範囲外アラームをプログラム可能
- 内部的な2.5V基準電圧
- 内部温度センサ
  - 40°Cから+125°Cでの動作
  - ±2.5°Cの精度
- 8つの汎用I/Oポート(GPIO)
- 低消費電力、SPI互換のシリアル・インターフェイス
  - 4線式モード、1.8V~5.5Vでの動作
- 動作温度範囲: -40°C~+125°C
- 64ピンHTQFP PowerPAD™ ICパッケージで供給

## 2 アプリケーション

- 通信 インフラストラクチャ
  - 携帯電話の基地局
  - マイクロ波バックホール
  - 光ネットワーク
- 汎用モニタおよび制御
- データ収集システム

## 3 概要

AMC7836は高度に統合された、低消費電力のアナログ監視および制御ソリューションです。このデバイスには、21チャンネル、12ビットのアナログ/デジタル・コンバータ(ADC)、出力範囲をプログラム可能な16の12ビット・デジタル/アナログ・コンバータ(DAC)、8つのGPIO、内部基準電圧、およびローカル温度センサ・チャンネルが搭載されています。高レベルの統合により、部品数が大幅に減少し、閉ループ・システムの設計が簡素化するため、基板面積、サイズ、低消費電力が重要なマルチチャネル・アプリケーションに理想的です。

低消費電力、非常に高度な統合、広い動作温度範囲から、マルチチャネルRF通信システムに見られる、パワー・アンプ(PA)用のオールインワン、低コストのバイアス制御回路に適しています。柔軟なDAC出力範囲から、このデバイスはLDMOS、GaAs、GaNなど広範なトランジスタ・テクノロジーのバイアス・ソリューションとして使用できます。


AMC7836の一連の特長は、汎用の監視および制御システムにも同様に利益があります。

テキサス・インスツルメンツは、チャンネル数、追加機能、コンバータ分解能についての要求が異なるアプリケーション向けに、アナログ監視および制御(AMC)製品の完全なファミリを用意しています。詳細については、[www.ti.com/amc](http://www.ti.com/amc)をご覧ください。

製品情報<sup>(1)</sup>

| 型番      | パッケージ      | 本体サイズ(公称)       |
|---------|------------|-----------------|
| AMC7836 | HTQFP (64) | 10.00mm×10.00mm |

(1) 提供されているすべてのパッケージについては、このデータシートの末尾にある注文情報を参照してください。

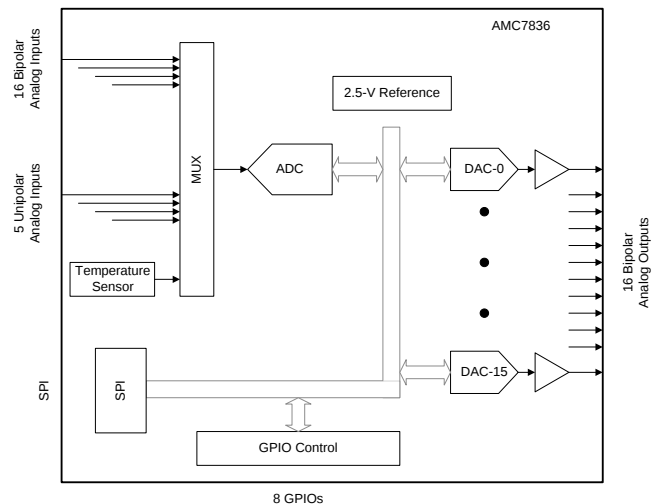

## 目次

|      |                                                              |    |      |                                      |    |
|------|--------------------------------------------------------------|----|------|--------------------------------------|----|
| 1    | 特長 .....                                                     | 1  | 7.2  | Functional Block Diagram .....       | 24 |
| 2    | アプリケーション .....                                               | 1  | 7.3  | Feature Description .....            | 25 |
| 3    | 概要 .....                                                     | 1  | 7.4  | Device Functional Modes .....        | 39 |
| 4    | 改訂履歴 .....                                                   | 2  | 7.5  | Programming .....                    | 42 |
| 5    | Pin Configuration and Functions .....                        | 3  | 7.6  | Register Maps .....                  | 44 |
| 6    | Specifications .....                                         | 6  | 8    | Application and Implementation ..... | 71 |
| 6.1  | Absolute Maximum Ratings .....                               | 6  | 8.1  | Application Information .....        | 71 |
| 6.2  | ESD Ratings .....                                            | 6  | 8.2  | Typical Application .....            | 74 |
| 6.3  | Recommended Operating Conditions .....                       | 7  | 9    | Power Supply Recommendations .....   | 77 |
| 6.4  | Thermal Information .....                                    | 7  | 9.1  | Device Reset Options .....           | 78 |
| 6.5  | Electrical Characteristics: DAC .....                        | 8  | 10   | Layout .....                         | 78 |
| 6.6  | Electrical Characteristics: ADC and Temperature Sensor ..... | 10 | 10.1 | Layout Guidelines .....              | 78 |
| 6.7  | Electrical Characteristics: General .....                    | 11 | 10.2 | Layout Example .....                 | 79 |
| 6.8  | Timing Requirements .....                                    | 12 | 11   | デバイスおよびドキュメントのサポート .....             | 80 |
| 6.9  | Typical Characteristics: DAC .....                           | 14 | 11.1 | ドキュメントのサポート .....                    | 80 |
| 6.10 | Typical Characteristics: ADC .....                           | 20 | 11.2 | ドキュメントの更新通知を受け取る方法 .....             | 80 |
| 6.11 | Typical Characteristics: Reference .....                     | 22 | 11.3 | コミュニティ・リソース .....                    | 80 |
| 6.12 | Typical Characteristics: Temperature Sensor .....            | 22 | 11.4 | 商標 .....                             | 80 |
| 7    | Detailed Description .....                                   | 23 | 11.5 | 静電気放電に関する注意事項 .....                  | 80 |
| 7.1  | Overview .....                                               | 23 | 11.6 | Glossary .....                       | 80 |
|      |                                                              |    | 12   | メカニカル、パッケージ、および注文情報 .....            | 80 |

## 4 改訂履歴

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。


| Revision C (April 2016) から Revision D に変更                                                                                                                       | Page |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Changed 4.5 V to 4.7 V in $AV_{DD}$ description in Pin Functions .....                                                                                          | 4    |
| Changed 4.5 V to 4.7 V in $DV_{DD}$ description in Pin Functions .....                                                                                          | 5    |
| Changed Supply voltage, $AV_{DD}$ MIN value from 4.5 V to 4.7 V .....                                                                                           | 7    |
| Changed Supply voltage, $DV_{DD}$ MIN value from 4.5 V to 4.7 V .....                                                                                           | 7    |
| Changed Supply voltage, $AV_{CC}$ MIN value from 4.5 V to 4.7 V .....                                                                                           | 7    |
| Changed $AV_{DD} = DV_{DD} = 4.5$ to $5.5$ V to $AV_{DD} = DV_{DD} = 4.7$ to $5.5$ V in Electrical Characteristics: DAC conditions .....                        | 8    |
| Changed $AV_{DD} = DV_{DD} = 4.5$ to $5.5$ V to $AV_{DD} = DV_{DD} = 4.7$ to $5.5$ V in Electrical Characteristics: ADC and Temperature Sensor conditions ..... | 10   |
| Changed $AV_{DD} = DV_{DD} = 4.5$ to $5.5$ V to $AV_{DD} = DV_{DD} = 4.7$ to $5.5$ V in Electrical Characteristics: General conditions .....                    | 11   |
| Changed $AV_{DD} = DV_{DD} = 4.5$ to $5.5$ V to $AV_{DD} = DV_{DD} = 4.7$ to $5.5$ V in Timing Requirements conditions .....                                    | 12   |
| Added paragraph and Figure 59 to Internal Reference section .....                                                                                               | 37   |
| Changed 4.5 V to 4.7 V in All-Negative DAC Range Mode section .....                                                                                             | 40   |
| 追加 paragraph to Power Supply Recommendations section .....                                                                                                      | 77   |
| 追加 paragraph to Power Supply Recommendations section .....                                                                                                      | 78   |

| Revision B (February 2015) から Revision C に変更       | Page |
|----------------------------------------------------|------|
| Changed Figure 117; corrected pins 63 and 64 ..... | 74   |

| Revision A (November 2014) から Revision B に変更 | Page |
|----------------------------------------------|------|
| デバイスのステータスを「製品プレビュー」から「量産データ」に変更 .....       | 1    |

## 5 Pin Configuration and Functions

**PAP Package**  
**64-Pin HTQFP With Exposed Thermal Pad**  
**Top View**

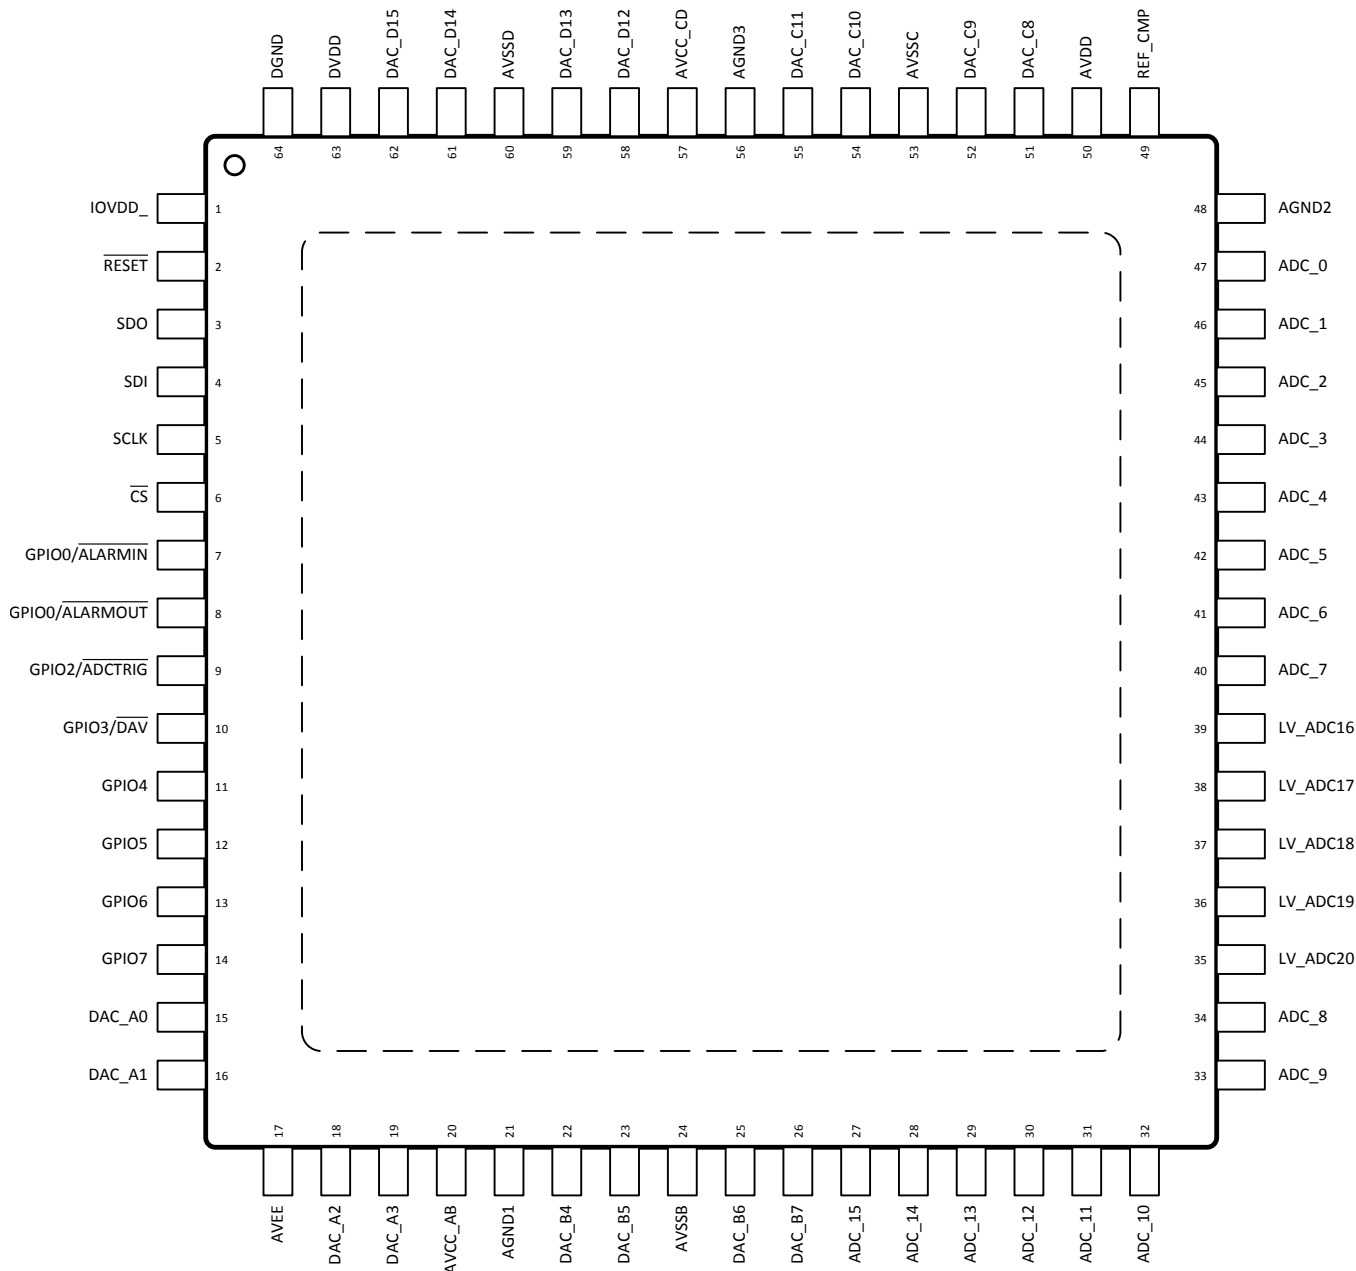

### Pin Functions

| PIN                    |     |     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                  |
|------------------------|-----|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                   | NO. | I/O |                                                                                                                                                                                                                                                                                                                                              |
| ADC_0                  | 47  | I   | Bipolar analog inputs. These pins are typically used to monitor the DAC group-C outputs. The input range of these channels is –12.5 to 12.5 V.                                                                                                                                                                                               |
| ADC_1                  | 46  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_2                  | 45  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_3                  | 44  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_4                  | 43  | I   | Bipolar analog inputs. These pins are typically used to monitor the DAC group-D outputs. The input range of these channels is –12.5 to 12.5 V.                                                                                                                                                                                               |
| ADC_5                  | 42  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_6                  | 41  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_7                  | 40  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_8                  | 34  | I   | Bipolar analog inputs. These pins are typically used to monitor the DAC group-B outputs. The input range of these channels is –12.5 to 12.5 V.                                                                                                                                                                                               |
| ADC_9                  | 33  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_10                 | 32  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_11                 | 31  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_12                 | 30  | I   | Bipolar analog inputs. These pins are typically used to monitor the DAC group-A outputs. The input range of these channels is –12.5 to 12.5 V.                                                                                                                                                                                               |
| ADC_13                 | 29  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_14                 | 28  | I   |                                                                                                                                                                                                                                                                                                                                              |
| ADC_15                 | 27  | I   |                                                                                                                                                                                                                                                                                                                                              |
| AGND1                  | 21  | I   | Analog ground. These pins are the ground reference point for all analog circuitry on the device. Connect the AGND1, AGND2, and AGND3 pins to the same potential (AGND). Ideally, the analog and digital grounds should be at the same potential (GND) and must not differ by more than ±0.3 V.                                               |
| AGND2                  | 48  | I   |                                                                                                                                                                                                                                                                                                                                              |
| AGND3                  | 56  | I   |                                                                                                                                                                                                                                                                                                                                              |
| AV <sub>CC_AB</sub>    | 20  | I   | Positive analog power for DAC groups A and B. The AV <sub>CC_AB</sub> and AV <sub>CC_CD</sub> pins must be connected to the same potential (AV <sub>CC</sub> ).                                                                                                                                                                              |
| AV <sub>CC_CD</sub>    | 57  | I   | Positive analog power for DAC groups C and D. The AV <sub>CC_AB</sub> and AV <sub>CC_CD</sub> pins must be connected to the same potential (AV <sub>CC</sub> ).                                                                                                                                                                              |
| AV <sub>DD</sub>       | 50  | I   | Analog supply voltage (4.7 V to 5.5 V). This pin must have the same value as the DV <sub>DD</sub> pin.                                                                                                                                                                                                                                       |
| AV <sub>EE</sub>       | 17  | I   | Lowest potential in the system. This pin is typically tied to a negative supply voltage but if all DACs are set in a positive output range, this pin can be connected to the analog ground. This pin also acts as the negative analog supply for DAC group A. This pin sets the power-on-reset and clamp voltage values for the DAC group A. |
| AV <sub>SSB</sub>      | 24  | I   | Negative analog supply for DAC group B. This pin sets the power-on-reset and clamp voltage values for the DAC group B. This pin is typically tied to the AV <sub>EE</sub> pin for the negative output ranges or AGND for the positive output ranges.                                                                                         |
| AV <sub>SSC</sub>      | 53  | I   | Negative analog supply for DAC group C. This pin sets the power-on-reset and clamp voltage values for the DAC group C. This pin is typically tied to the AV <sub>EE</sub> pin for the negative output ranges or AGND for the positive output ranges.                                                                                         |
| AV <sub>SSD</sub>      | 60  | I   | Negative analog supply for DAC group D. This pin sets the power-on-reset and clamp voltage values for the DAC group D. This pin is typically tied to the AV <sub>EE</sub> pin for the negative output ranges or AGND for the positive output ranges.                                                                                         |
| $\overline{\text{CS}}$ | 6   | I   | Active-low serial-data enable. This input is the frame-synchronization signal for the serial data. When this signal goes low, it enables the serial interface input shift register.                                                                                                                                                          |
| DAC_A0                 | 15  | O   | DAC group A. These DAC channels share the same range and clamp voltage. <b>If any of the other DAC groups is in a negative voltage range, DAC group A should be in a negative voltage range as well.</b>                                                                                                                                     |
| DAC_A1                 | 16  | O   |                                                                                                                                                                                                                                                                                                                                              |
| DAC_A2                 | 18  | O   |                                                                                                                                                                                                                                                                                                                                              |
| DAC_A3                 | 19  | O   |                                                                                                                                                                                                                                                                                                                                              |
| DAC_B4                 | 22  | O   | DAC group B. These DAC channels share the same range and clamp voltage.                                                                                                                                                                                                                                                                      |
| DAC_B5                 | 23  | O   |                                                                                                                                                                                                                                                                                                                                              |
| DAC_B6                 | 25  | O   |                                                                                                                                                                                                                                                                                                                                              |
| DAC_B7                 | 26  | O   |                                                                                                                                                                                                                                                                                                                                              |

### Pin Functions (continued)

| PIN                                 |     |     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------|-----|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                                | NO. | I/O |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_C8                              | 51  | O   | DAC group C. These DAC channels share the same range and clamp voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| DAC_C9                              | 52  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_C10                             | 54  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_C11                             | 55  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_D12                             | 58  | O   | DAC group D. These DAC channels share the same range and clamp voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| DAC_D13                             | 59  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_D14                             | 61  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DAC_D15                             | 62  | O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| DGND                                | 64  | I   | Digital ground. This pin is the ground reference point for all digital circuitry on the device. Ideally, the analog and digital grounds should be at the same potential (GND) and must not differ by more than $\pm 0.3$ V.                                                                                                                                                                                                                                                                                                                                                                       |
| DV <sub>DD</sub>                    | 63  | I   | Digital supply voltage (4.7 V to 5.5 V). This pin must have the same value as the AV <sub>DD</sub> pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| GPIO0/ $\overline{\text{ALARMIN}}$  | 7   | I/O | General-purpose digital I/O 0 (default). This pin is a bidirectional digital input/output (I/O) with an internal 48-k $\Omega$ pullup resistor to the IOV <sub>DD</sub> pin. Alternatively the pin can be set to operate as the digital input $\overline{\text{ALARMIN}}$ which is an active-low alarm-control signal. If unused this pin can be left floating.                                                                                                                                                                                                                                   |
| GPIO0/ $\overline{\text{ALARMOUT}}$ | 8   | I/O | General purpose digital I/O 1 (default). This pin is a bidirectional digital I/O with an internal 48-k $\Omega$ pullup resistor to the IOV <sub>DD</sub> pin. Alternatively the pin can be set to operate as $\overline{\text{ALARMOUT}}$ which is an open drain global alarm output. This pin goes low (active) when an alarm event is detected. If unused this pin can be left floating.                                                                                                                                                                                                        |
| GPIO2/ $\overline{\text{ADCTRIG}}$  | 9   | I/O | General purpose digital I/O 2 (default). This pin is a bidirectional digital I/O with internal 48-k $\Omega$ pullup resistor to the IOV <sub>DD</sub> pin. Alternatively the pin can be set to operate as $\overline{\text{ADCTRIG}}$ which is an active-low external conversion trigger. The falling edge of this pin begins the sampling and conversion of the ADC. If unused this pin can be left floating.                                                                                                                                                                                    |
| GPIO3/ $\overline{\text{DAV}}$      | 10  | I/O | General purpose digital I/O 3 (default). This pin is a bidirectional digital I/O with internal 48-k $\Omega$ pullup resistor to the IOV <sub>DD</sub> pin. Alternatively the pin can be set to operate as $\overline{\text{DAV}}$ which is an active-low data-available indicator output. In direct mode, the $\overline{\text{DAV}}$ pin goes low (active) when the conversion ends. In auto mode, a 1- $\mu$ s pulse (active low) appears on this pin when a conversion cycle finishes. The $\overline{\text{DAV}}$ pin remains high when deactivated. If unused this pin can be left floating. |
| GPIO4                               | 11  | I/O | General purpose digital I/O. These pins are bidirectional digital I/Os with an internal 48-k $\Omega$ pullup resistor to the IOV <sub>DD</sub> pin. If unused these pins can be left floating.                                                                                                                                                                                                                                                                                                                                                                                                    |
| GPIO5                               | 12  | I/O |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| GPIO6                               | 13  | I/O |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| GPIO7                               | 14  | I/O |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| IOV <sub>DD</sub>                   | 1   | I   | I/O supply voltage (1.8 V to 5.5 V). This pin sets the I/O operating voltage and threshold levels. The voltage on this pin must not be greater than the value of the DV <sub>DD</sub> pin.                                                                                                                                                                                                                                                                                                                                                                                                        |
| LV_ADC16                            | 39  | I   | General purpose analog inputs. These channels are used for general monitoring. The input range of these pins is 0 to $2 \times V_{\text{ref}}$ .                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| LV_ADC17                            | 38  | I   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| LV_ADC18                            | 37  | I   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| LV_ADC19                            | 36  | I   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| LV_ADC20                            | 35  | I   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| REF_CMP                             | 49  | O   | Internal-reference compensation-capacitor connection. Connect a 4.7- $\mu$ F capacitor between this pin and the AGND2 pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| $\overline{\text{RESET}}$           | 2   | I   | Active-low reset input. Logic low on this pin causes the device to perform a hardware reset.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| SCLK                                | 5   | I   | Serial interface clock.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| SDI                                 | 4   | I   | Serial-interface data input. Data is clocked into the input shift register on each rising edge of the SCLK pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| SDO                                 | 3   | O   | Serial-interface data output. The SDO pin is in high impedance when the $\overline{\text{CS}}$ pin is high. Data is clocked out of the input shift register on each falling edge of the SCLK pin.                                                                                                                                                                                                                                                                                                                                                                                                 |
| Thermal Pad                         | —   | I   | The thermal pad is located on the bottom-side of the device package. The thermal pad should be tied to the same potential as the AV <sub>EE</sub> pin or left disconnected.                                                                                                                                                                                                                                                                                                                                                                                                                       |

## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                                         |                                                                                  | MIN                     | MAX                     | UNIT |
|-----------------------------------------|----------------------------------------------------------------------------------|-------------------------|-------------------------|------|
| Supply Voltage                          | AV <sub>DD</sub> to GND                                                          | –0.3                    | 6                       | V    |
|                                         | DV <sub>DD</sub> to GND                                                          | –0.3                    | 6                       |      |
|                                         | IOV <sub>DD</sub> to GND                                                         | –0.3                    | 6                       |      |
|                                         | AV <sub>CC</sub> to GND                                                          | –0.3                    | 18                      |      |
|                                         | AV <sub>EE</sub> to GND                                                          | –13                     | 0.3                     |      |
|                                         | AV <sub>SSB</sub> , AV <sub>SSC</sub> , AV <sub>SSD</sub> to AV <sub>EE</sub>    | –0.3                    | 13                      |      |
|                                         | AV <sub>CC</sub> to AV <sub>SSB</sub> , AV <sub>SSC</sub> , or AV <sub>SSD</sub> | –0.3                    | 26                      |      |
|                                         | AV <sub>CC</sub> to AV <sub>EE</sub>                                             | –0.3                    | 26                      |      |
|                                         | DGND to AGND                                                                     | –0.3                    | 0.3                     |      |
| Pin Voltage                             | ADC_[0-15] analog input voltage to GND                                           | –13                     | 13                      | V    |
|                                         | LV_ADC[16-20] analog input voltage to GND                                        | –0.3                    | AV <sub>DD</sub> + 0.3  |      |
|                                         | DAC_A[0-3] outputs to GND                                                        | AV <sub>EE</sub> – 0.3  | AV <sub>CC</sub> + 0.3  |      |
|                                         | DAC_B[4-7] outputs to GND                                                        | AV <sub>SSB</sub> – 0.3 | AV <sub>CC</sub> + 0.3  |      |
|                                         | DAC_C[8-11] outputs to GND                                                       | AV <sub>SSC</sub> – 0.3 | AV <sub>CC</sub> + 0.3  |      |
|                                         | DAC_D[12-15] outputs to GND                                                      | AV <sub>SSD</sub> – 0.3 | AV <sub>CC</sub> + 0.3  |      |
|                                         | REF_CMP to GND                                                                   | –0.3                    | AV <sub>DD</sub> + 0.3  |      |
|                                         | $\overline{\text{CS}}$ , SCLK, SDI and $\overline{\text{RESET}}$ to GND          | –0.3                    | IOV <sub>DD</sub> + 0.3 |      |
|                                         | SDO to GND                                                                       | –0.3                    | IOV <sub>DD</sub> + 0.3 |      |
|                                         | GPIO[0-7] to GND                                                                 | –0.3                    | IOV <sub>DD</sub> + 0.3 |      |
| Pin Current                             | ADC_[0:15] analog input current                                                  | –10                     | 10                      | mA   |
|                                         | LV_ADC[16:20] analog input current                                               | –10                     | 10                      |      |
|                                         | GPIO[0:7] sinking current                                                        |                         | 5                       |      |
| Operating temperature                   |                                                                                  | –40                     | 125                     | °C   |
| Junction temperature, T <sub>Jmax</sub> |                                                                                  | –40                     | 150                     | °C   |
| Storage temperature, T <sub>stg</sub>   |                                                                                  | –40                     | 150                     | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 6.2 ESD Ratings

|                    |                         |                                                                                | VALUE | UNIT |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±1000 | V    |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±250  |      |

- (1) JEDEC document JEP155 states that 500 V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250 V CDM allows safe manufacturing with a standard ESD control process.

### 6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                                 |                                                           | MIN              | NOM | MAX  | UNIT |
|---------------------------------|-----------------------------------------------------------|------------------|-----|------|------|
| Supply voltage                  | AV <sub>DD</sub>                                          | 4.7              | 5   | 5.5  | V    |
|                                 | DV <sub>DD</sub> <sup>(1)</sup>                           | 4.7              | 5   | 5.5  |      |
|                                 | IOV <sub>DD</sub> <sup>(2)</sup>                          | 1.8              |     | 5.5  |      |
|                                 | AV <sub>CC</sub>                                          | 4.7              | 12  | 12.5 |      |
|                                 | AV <sub>EE</sub>                                          | –12.5            | –12 | 0    |      |
|                                 | AV <sub>SSB</sub> , AV <sub>SSC</sub> , AV <sub>SSD</sub> | AV <sub>EE</sub> |     | 0    |      |
| Specified operating temperature |                                                           | –40              | 25  | 105  | °C   |
| Operating temperature           |                                                           | –40              | 25  | 125  | °C   |

(1) The value of the DV<sub>DD</sub> pin must be equal to that of the AV<sub>DD</sub> pin.

(2) The value of the IOV<sub>DD</sub> pin must be less than or equal to that of the DV<sub>DD</sub> pin.

### 6.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | AMC7836     | UNIT |
|-------------------------------|----------------------------------------------|-------------|------|
|                               |                                              | PAP (HTQFP) |      |
|                               |                                              | 64 PINS     |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 26.2        | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 7.2         | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 9.1         | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.2         | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 9           | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 0.2         | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 6.5 Electrical Characteristics: DAC

The electrical ratings specified in this section apply to all specifications in this document, unless otherwise noted. These specifications are interpreted as conditions that do not degrade the device parametric or functional specifications for the life of the product containing it.  $AV_{DD} = DV_{DD} = 4.7$  to  $5.5$  V,  $AV_{CC} = 12$  V,  $IOV_{DD} = 1.8$  to  $5.5$  V,  $AGND = DGND = 0$  V,  $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = -12$  V (for DAC groups in negative range) or  $0$  V (for DAC groups in positive ranges), DAC output range =  $0$  to  $10$  V for all groups, no load on the DACs,  $T_A = -40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$

| PARAMETER              |                                             | TEST CONDITIONS                                                                                                    | MIN | TYP        | MAX       | UNIT                    |
|------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------|-----|------------|-----------|-------------------------|
| <b>DAC DC ACCURACY</b> |                                             |                                                                                                                    |     |            |           |                         |
|                        | Resolution                                  |                                                                                                                    | 12  |            |           | Bits                    |
| INL                    | Relative accuracy                           | Measured by line passing through codes 020h and FFFh. $0$ to $10$ V and $-10$ to $0$ V ranges                      |     | $\pm 0.3$  | $\pm 1$   | LSB                     |
|                        |                                             | Measured by line passing through codes 040h and FFFh. $0$ to $5$ V and $-5$ to $0$ V ranges                        |     | $\pm 0.5$  | $\pm 1.5$ |                         |
| DNL                    | Differential nonlinearity                   | Specified monotonic. Measured by line passing through codes 020h and FFFh. $0$ to $10$ V and $-10$ to $0$ V ranges |     | $\pm 0.03$ | $\pm 1$   | LSB                     |
|                        |                                             | Specified monotonic. Measured by line passing through codes 020h and FFFh. $0$ to $5$ V and $-5$ to $0$ V ranges   |     | $\pm 0.06$ | $\pm 1$   |                         |
| TUE                    | Total unadjusted error <sup>(1)</sup>       | $T_A = 25^{\circ}\text{C}$ , $0$ to $10$ V range                                                                   |     | $\pm 2.5$  | $\pm 20$  | mV                      |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , $-10$ to $0$ V range                                                                  |     | $\pm 2.5$  | $\pm 20$  |                         |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , $0$ to $5$ V range                                                                    |     | $\pm 1.5$  | $\pm 15$  |                         |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , $-5$ to $0$ V range                                                                   |     | $\pm 1.5$  | $\pm 15$  |                         |
|                        | Offset error                                | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 020h and FFFh. $0$ to $10$ V range             |     | $\pm 0.25$ | $\pm 5$   | mV                      |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 040h and FFFh. $0$ to $5$ V range              |     | $\pm 0.25$ | $\pm 5$   |                         |
|                        | Zero-code error                             | $T_A = 25^{\circ}\text{C}$ , Code 000h, $-10$ to $0$ V range                                                       |     | $\pm 1$    | $\pm 25$  | mV                      |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , Code 000h, $-5$ to $0$ V range                                                        |     | $\pm 1$    | $\pm 25$  |                         |
|                        | Gain error <sup>(1)</sup>                   | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 020h and FFFh. $0$ to $10$ V range             |     | $\pm 0.01$ | $\pm 0.2$ | %FSR                    |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 020h and FFFh. $-10$ to $0$ V range            |     | $\pm 0.01$ | $\pm 0.2$ |                         |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 040h and FFFh. $0$ to $5$ V range              |     | $\pm 0.01$ | $\pm 0.2$ |                         |
|                        |                                             | $T_A = 25^{\circ}\text{C}$ , Measured by line passing through codes 040h and FFFh. $-5$ to $0$ V range             |     | $\pm 0.01$ | $\pm 0.2$ |                         |
|                        | Offset temperature coefficient              | $0$ to $10$ V range                                                                                                |     | $\pm 1$    |           | ppm/ $^{\circ}\text{C}$ |
|                        |                                             | $0$ to $5$ V range                                                                                                 |     | $\pm 1$    |           |                         |
|                        | Zero-code temperature coefficient           | $-10$ to $0$ V range                                                                                               |     | $\pm 2$    |           | ppm/ $^{\circ}\text{C}$ |
|                        |                                             | $-5$ to $0$ V range                                                                                                |     | $\pm 2$    |           |                         |
|                        | Gain temperature coefficient <sup>(1)</sup> | $0$ to $10$ V range                                                                                                |     | $\pm 2.5$  |           | ppm/ $^{\circ}\text{C}$ |
|                        |                                             | $-10$ to $0$ V range                                                                                               |     | $\pm 2.5$  |           |                         |
|                        |                                             | $0$ to $5$ V range                                                                                                 |     | $\pm 2.5$  |           |                         |
|                        |                                             | $-5$ to $0$ V range                                                                                                |     | $\pm 2.5$  |           |                         |

(1) The internal reference contribution not included.

## Electrical Characteristics: DAC (continued)

The electrical ratings specified in this section apply to all specifications in this document, unless otherwise noted. These specifications are interpreted as conditions that do not degrade the device parametric or functional specifications for the life of the product containing it.  $AV_{DD} = DV_{DD} = 4.7$  to  $5.5$  V,  $AV_{CC} = 12$  V,  $IOV_{DD} = 1.8$  to  $5.5$  V,  $AGND = DGND = 0$  V,  $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = -12$  V (for DAC groups in negative range) or  $0$  V (for DAC groups in positive ranges), DAC output range =  $0$  to  $10$  V for all groups, no load on the DACs,  $T_A = -40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$

| PARAMETER                                      | TEST CONDITIONS                                                                                                                                                                               | MIN      | TYP           | MAX | UNIT                         |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------|-----|------------------------------|
| <b>DAC OUTPUT CHARACTERISTICS</b>              |                                                                                                                                                                                               |          |               |     |                              |
| Full-scale output voltage range <sup>(2)</sup> | Set at power-up or reset through auto-range detection. The output range can be modified after power-up or reset through the DAC range registers (address 0x1E through 0x1F). DAC-RANGE = 100b | -10      |               | 0   | V                            |
|                                                | The output range can be modified after power-up or reset through the DAC range registers (address 0x1E through 0x1F). DAC-RANGE = 101b                                                        | -5       |               | 0   |                              |
|                                                | Set at power-up or reset through auto-range detection. The output range can be modified after power-up or reset through the DAC range registers (address 0x1E through 0x1F). DAC-RANGE = 111b | 0        |               | 5   |                              |
|                                                | The output range can be modified after power-up or reset through the DAC range registers (address 0x1E through 0x1F). DAC-RANGE = 110b                                                        | 0        |               | 10  |                              |
| Output voltage settling time                   | Transition: Code 400h to C00h to within $\frac{1}{2}$ LSB, $R_L = 2$ k $\Omega$ , $C_L = 200$ pF. $0$ to $10$ V and $-10$ to $0$ V ranges                                                     |          | 10            |     | $\mu\text{s}$                |
|                                                | Transition: Code 400h to C00h to within $\frac{1}{2}$ LSB, $R_L = 2$ k $\Omega$ , $C_L = 200$ pF. $0$ to $5$ V and $-5$ to $0$ V ranges                                                       |          | 10            |     |                              |
| Slew rate                                      | Transition: Code 400h to C00h, 10% to 90%, $R_L = 2$ k $\Omega$ , $C_L = 200$ pF. $0$ to $10$ V and $-10$ to $0$ V ranges                                                                     |          | 1.25          |     | V/ $\mu\text{s}$             |
|                                                | Transition: Code 400h to C00h, 10% to 90%, $R_L = 2$ k $\Omega$ , $C_L = 200$ pF. $0$ to $5$ V and $-5$ to $0$ V ranges                                                                       |          | 1.25          |     |                              |
| Short circuit current                          | Full-scale current shorted to the DAC group $AV_{SS}$ or $AV_{CC}$ voltage                                                                                                                    |          | $\pm 45$      |     | mA                           |
| Load current <sup>(3)</sup>                    | Source or sink with 1-V headroom from the DAC group $AV_{CC}$ or $AV_{SS}$ voltage, voltage drop < 25 mV                                                                                      | $\pm 15$ |               |     | mA                           |
|                                                | Source or sink with 300-mV headroom from the DAC group $AV_{CC}$ or $AV_{SS}$ voltage, voltage drop < 25 mV                                                                                   | $\pm 10$ |               |     |                              |
| Maximum capacitive load <sup>(4)</sup>         | $R_L = \infty$                                                                                                                                                                                | 0        |               | 10  | nF                           |
| DC output impedance                            | Code set to 800h, $\pm 15$ mA                                                                                                                                                                 |          | 1             |     | $\Omega$                     |
| Power-on overshoot                             | $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = AGND$ , $AV_{CC} = 0$ to $12$ V, 2-ms ramp                                                                                                        |          | 10            |     | mV                           |
| Glitch energy                                  | Transition: Code 7FFh to 800h; 800h to 7FFh                                                                                                                                                   |          | 1             |     | nV-s                         |
| Output noise                                   | $T_A = 25^{\circ}\text{C}$ , 1 kHz, code 800h, includes internal reference noise                                                                                                              |          | 520           |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                                | $T_A = 25^{\circ}\text{C}$ , integrated noise from 0.1 Hz to 10 Hz, code 800h, includes internal reference noise                                                                              |          | 20            |     | $\mu\text{V}_{PP}$           |
| <b>CLAMP OUTPUTS</b>                           |                                                                                                                                                                                               |          |               |     |                              |
| Clamp output voltage <sup>(5)</sup>            | DAC output range: $0$ to $10$ V, $AV_{SS} = AGND$                                                                                                                                             |          | 0             |     | V                            |
|                                                | DAC output range: $0$ to $5$ V, $AV_{SS} = AGND$                                                                                                                                              |          | 0             |     |                              |
|                                                | DAC output range: $-10$ to $0$ V, $AV_{SS} = -12$ V                                                                                                                                           |          | $AV_{SS} + 2$ |     |                              |
|                                                | DAC output range: $-5$ to $0$ V, $AV_{SS} = -6$ V                                                                                                                                             |          | $AV_{SS} + 1$ |     |                              |
| Clamp output impedance                         |                                                                                                                                                                                               |          | 8             |     | k $\Omega$                   |

- (2) The output voltage of each DAC group must not be greater than that of the corresponding  $AV_{CC}$  pin ( $AV_{CC\_AB}$  or  $AV_{CC\_CD}$ ) or lower than that of the corresponding  $AV_{SS}$  pin ( $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$  or  $AV_{SSD}$ ). See the [DAC Output Range and Clamp Configuration](#) section for more details.
- (3) If all channels are simultaneously loaded, care must be taken to ensure the thermal conditions for the device are not exceeded.
- (4) To be sampled during initial release to ensure compliance; not subject to production testing.
- (5) No DAC load to the DAC group  $AV_{SS}$  pin.

## 6.6 Electrical Characteristics: ADC and Temperature Sensor

The electrical ratings specified in this section apply to all specifications in this document, unless otherwise noted. These specifications are interpreted as conditions that do not degrade the device parametric or functional specifications for the life of the product containing it.  $AV_{DD} = DV_{DD} = 4.7$  to  $5.5$  V,  $AV_{CC} = 12$  V,  $IOV_{DD} = 1.8$  to  $5.5$  V,  $AGND = DGND = 0$  V,  $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = -12$  V (for DAC groups in negative range) or  $0$  V (for DAC groups in positive ranges), DAC output range =  $0$  to  $10$  V for all groups, no load on the DACs,  $T_A = -40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$

| PARAMETER                                                     | TEST CONDITIONS                                                        | MIN          | TYP        | MAX                | UNIT                    |
|---------------------------------------------------------------|------------------------------------------------------------------------|--------------|------------|--------------------|-------------------------|
| Resolution                                                    |                                                                        | 12           |            |                    | Bits                    |
| Integral nonlinearity                                         | Unipolar input channels                                                |              | $\pm 0.5$  | $\pm 1$            | LSB                     |
|                                                               | Bipolar input channels                                                 |              | $\pm 0.5$  | $\pm 1.5$          |                         |
| Differential nonlinearity                                     | Specified monotonic. All input channels                                |              | $\pm 0.5$  | $\pm 1$            | LSB                     |
| <b>UNIPOLAR ANALOG INPUTS: LV_ADC16 to LV_ADC20</b>           |                                                                        |              |            |                    |                         |
| Absolute input voltage range                                  |                                                                        | $AGND - 0.2$ |            | $AV_{DD} + 0.2$    | V                       |
| Full scale input range                                        | $V_{ref}$ measured at REF_CMP pin                                      | 0            |            | $2 \times V_{ref}$ | V                       |
| Input capacitance                                             |                                                                        |              | 34         |                    | pF                      |
| DC input leakage current                                      | Unselected ADC input                                                   |              |            | $\pm 10$           | $\mu\text{A}$           |
| Offset error                                                  |                                                                        |              | $\pm 1$    | $\pm 5$            | LSB                     |
| Offset error match                                            |                                                                        |              | $\pm 0.5$  |                    | LSB                     |
| Gain error <sup>(1)</sup>                                     |                                                                        |              | $\pm 0.5$  | $\pm 5$            | LSB                     |
| Gain error match                                              |                                                                        |              | $\pm 1$    |                    | LSB                     |
| Update time                                                   | Single unipolar input, temperature sensor disabled                     |              | 11.5       |                    | $\mu\text{s}$           |
| <b>BIPOLAR ANALOG INPUTS: ADC_0 to ADC_15</b>                 |                                                                        |              |            |                    |                         |
| Absolute input voltage range                                  |                                                                        | $-13$        |            | 13                 | V                       |
| Full scale input range                                        |                                                                        | $-12.5$      |            | 12.5               | V                       |
| Input resistance                                              |                                                                        |              | 175        |                    | k $\Omega$              |
| Offset error                                                  |                                                                        |              | $\pm 0.25$ | $\pm 5$            | LSB                     |
| Gain error <sup>(1)</sup>                                     |                                                                        |              | $\pm 0.5$  | $\pm 5$            | LSB                     |
| Update time                                                   | Single bipolar input, temperature sensor disabled                      |              | 34.5       |                    | $\mu\text{s}$           |
| <b>TEMPERATURE SENSOR</b>                                     |                                                                        |              |            |                    |                         |
| Operating range                                               |                                                                        | $-40$        |            | 125                | $^{\circ}\text{C}$      |
| Accuracy                                                      | $T_A = -40^{\circ}\text{C}$ to $125^{\circ}\text{C}$ , $AV_{DD} = 5$ V |              | $\pm 1.25$ | $\pm 2.5$          | $^{\circ}\text{C}$      |
| Resolution                                                    | LSB size                                                               |              | 0.25       |                    | $^{\circ}\text{C}$      |
| Update time                                                   | All ADC input channels disabled                                        |              | 256        |                    | $\mu\text{s}$           |
| <b>ADC UPDATE TIME</b>                                        |                                                                        |              |            |                    |                         |
| Internal oscillator frequency                                 |                                                                        | 3.7          | 4          | 4.3                | MHz                     |
| ADC update time                                               | All 21 ADC inputs enabled, temperature sensor disabled.                |              | 609.5      |                    | $\mu\text{s}$           |
|                                                               | All 21 ADC inputs enabled, temperature sensor enabled.                 |              | 865.5      |                    | $\mu\text{s}$           |
| <b>INTERNAL REFERENCE (INTERNAL REFERENCE NOT ACCESSIBLE)</b> |                                                                        |              |            |                    |                         |
| Initial accuracy                                              | $T_A = 25^{\circ}\text{C}$                                             | 2.4925       | 2.5        | 2.5075             | V                       |
| Reference temperature coefficient                             |                                                                        |              | 12         | 35                 | ppm/ $^{\circ}\text{C}$ |
| <b>INTERNAL ADC REFERENCE BUFFER</b>                          |                                                                        |              |            |                    |                         |
| Reference buffer offset                                       | $T_A = 25^{\circ}\text{C}$                                             |              |            | $\pm 5$            | mV                      |

(1) Internal reference contribution not included.

## 6.7 Electrical Characteristics: General

The electrical ratings specified in this section apply to all specifications in this document, unless otherwise noted. These specifications are interpreted as conditions that do not degrade the device parametric or functional specifications for the life of the product containing it.  $AV_{DD} = DV_{DD} = 4.7$  to  $5.5$  V,  $AV_{CC} = 12$  V,  $IOV_{VDD} = 1.8$  to  $5.5$  V,  $AGND = DGND = 0$  V,  $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = -12$  V (for DAC groups in negative range) or  $0$  V (for DAC groups in positive ranges), DAC output range =  $0$  to  $10$  V for all groups, no load on the DACs,  $T_A = -40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$

| PARAMETER                                                 | TEST CONDITIONS                                        | MIN                                                                            | TYP   | MAX   | UNIT |
|-----------------------------------------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------|-------|-------|------|
| AV <sub>SS</sub> DETECTOR                                 |                                                        |                                                                                |       |       |      |
| AV <sub>SS</sub> threshold detector (AV <sub>SSTH</sub> ) |                                                        | -3.5                                                                           |       | -1.5  | V    |
| DIGITAL LOGIC: GPIO                                       |                                                        |                                                                                |       |       |      |
| High-level input voltage                                  | IOV <sub>DD</sub> = 1.8 to 5.5 V                       | 0.7 × IOV <sub>DD</sub>                                                        |       |       | V    |
| Low-level input voltage                                   | IOV <sub>DD</sub> = 1.8 V                              | 0.45                                                                           |       | V     |      |
|                                                           | IOV <sub>DD</sub> = 2.7 to 5.5 V                       | 0.3 × IOV <sub>DD</sub>                                                        |       |       |      |
| Low-level output voltage                                  | IOV <sub>DD</sub> = 1.8 V, I <sub>(LOAD)</sub> = -2 mA | 0.4                                                                            |       | V     |      |
|                                                           | IOV <sub>DD</sub> = 5.5 V, I <sub>(LOAD)</sub> = -5 mA | 0.4                                                                            |       |       |      |
| Input impedance                                           | To IOV <sub>DD</sub>                                   | 48                                                                             |       |       | kΩ   |
| DIGITAL LOGIC: ALL EXCEPT GPIO                            |                                                        |                                                                                |       |       |      |
| High-level input voltage                                  | IOV <sub>DD</sub> = 1.8 to 5.5 V                       | 0.7 × IOV <sub>DD</sub>                                                        |       |       | V    |
| Low-level input voltage                                   | IOV <sub>DD</sub> = 1.8 V                              | 0.45                                                                           |       | V     |      |
|                                                           | IOV <sub>DD</sub> = 2.7 to 5.5 V                       | 0.3 × IOV <sub>DD</sub>                                                        |       | V     |      |
| High-level output voltage                                 | I <sub>(LOAD)</sub> = -1 mA                            | IOV <sub>DD</sub> - 0.4                                                        |       |       | V    |
| Low-level output voltage                                  | I <sub>(LOAD)</sub> = 1 mA                             |                                                                                |       | 0.4   | V    |
| High impedance leakage                                    |                                                        |                                                                                |       | ±5    | μA   |
| High impedance output capacitance                         |                                                        | 10                                                                             |       |       | pF   |
| POWER REQUIREMENTS                                        |                                                        |                                                                                |       |       |      |
| I <sub>AVDD</sub>                                         | AV <sub>DD</sub> supply current                        | No DAC load, all DACs at 800h code and ADC at the fastest auto conversion rate | 6     | 13.5  | mA   |
| I <sub>AVCC</sub>                                         | AV <sub>CC</sub> supply current                        |                                                                                | 7.5   | 13.5  |      |
| I <sub>AVSS</sub>                                         | AV <sub>SS</sub> supply current                        |                                                                                | -13.5 | -5    |      |
| I <sub>AVEE</sub>                                         | AV <sub>EE</sub> supply current                        |                                                                                | -3.5  | -1.75 |      |
| I <sub>DVDD</sub>                                         | DV <sub>DD</sub> supply current                        |                                                                                | 1     | 3     |      |
| I <sub>IOVDD</sub>                                        | IOV <sub>DD</sub> supply current                       |                                                                                | 1.5   | 15    | μA   |
|                                                           | Power consumption                                      |                                                                                | 215   |       | mW   |
| I <sub>AVDD</sub>                                         | AV <sub>DD</sub> supply current                        | Power-down mode                                                                | 2.5   | 5     | mA   |
| I <sub>AVCC</sub>                                         | AV <sub>CC</sub> supply current                        |                                                                                | 1     | 2.5   |      |
| I <sub>AVSS</sub>                                         | AV <sub>SS</sub> supply current                        |                                                                                | -5    | -3    |      |
| I <sub>AVEE</sub>                                         | AV <sub>EE</sub> supply current                        |                                                                                | -3    | -1.75 |      |
| I <sub>DVDD</sub>                                         | DV <sub>DD</sub> supply current                        |                                                                                | 0.75  | 1.5   |      |
| I <sub>IOVDD</sub>                                        | IOV <sub>DD</sub> supply current                       |                                                                                | 1.5   | 15    | μA   |
|                                                           | Power consumption                                      |                                                                                | 90    |       | mW   |

## 6.8 Timing Requirements

$AV_{DD} = DV_{DD} = 4.7$  to  $5.5$  V,  $AV_{CC} = 12$  V,  $AV_{EE} = -12$  V,  $AGND = DGND = AV_{SSB} = AV_{SSC} = AV_{SSD} = 0$  V, DAC output range =  $0$  to  $10$  V for all groups, no load on the DACs,  $T_A = -40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$  (unless otherwise noted)

|                                 |                                                                                                                            |                                  | MIN   | NOM | MAX | UNIT |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------|-----|-----|------|
| SERIAL INTERFACE <sup>(1)</sup> |                                                                                                                            |                                  |       |     |     |      |
| $f_{(SCLK)}$                    | SCLK frequency                                                                                                             | IOV <sub>DD</sub> = 1.8 to 2.7 V |       |     | 15  | MHz  |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V |       |     | 20  |      |
| $t_p$                           | SCLK period <sup>(2)</sup>                                                                                                 | IOV <sub>DD</sub> = 1.8 to 2.7 V | 66.67 |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 50    |     |     |      |
| $t_{PH}$                        | SCLK pulse width high <sup>(2)</sup>                                                                                       | IOV <sub>DD</sub> = 1.8 to 2.7 V | 30    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 23    |     |     |      |
| $t_{PL}$                        | SCLK pulse width low <sup>(2)</sup>                                                                                        | IOV <sub>DD</sub> = 1.8 to 2.7 V | 30    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 23    |     |     |      |
| $t_{su}$                        | SDI setup <sup>(2)</sup>                                                                                                   | IOV <sub>DD</sub> = 1.8 to 2.7 V | 10    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 10    |     |     |      |
| $t_h$                           | SDI hold <sup>(2)</sup>                                                                                                    | IOV <sub>DD</sub> = 1.8 to 2.7 V | 10    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 10    |     |     |      |
| $t_{(ODZ)}$                     | SDO driven to tri-state <sup>(3)(4)</sup>                                                                                  | IOV <sub>DD</sub> = 1.8 to 2.7 V | 0     |     | 15  | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 0     |     | 9   |      |
| $t_{(OZD)}$                     | SDO tri-state to driven <sup>(3)(4)</sup>                                                                                  | IOV <sub>DD</sub> = 1.8 to 2.7 V | 0     |     | 23  | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 0     |     | 15  |      |
| $t_{(OD)}$                      | SDO output delay <sup>(3)(4)</sup>                                                                                         | IOV <sub>DD</sub> = 1.8 to 2.7 V | 0     |     | 23  | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 0     |     | 15  |      |
| $t_{su}(\overline{CS})$         | $\overline{CS}$ setup <sup>(2)</sup>                                                                                       | IOV <sub>DD</sub> = 1.8 to 2.7 V | 5     |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 5     |     |     |      |
| $t_h(\overline{CS})$            | $\overline{CS}$ hold <sup>(2)</sup>                                                                                        | IOV <sub>DD</sub> = 1.8 to 2.7 V | 20    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 20    |     |     |      |
| $t_{(IAG)}$                     | Inter-access gap <sup>(2)</sup>                                                                                            | IOV <sub>DD</sub> = 1.8 to 2.7 V | 10    |     |     | ns   |
|                                 |                                                                                                                            | IOV <sub>DD</sub> = 2.7 to 5.5 V | 10    |     |     |      |
| DIGITAL LOGIC                   |                                                                                                                            |                                  |       |     |     |      |
|                                 | Reset delay; delay-to-normal operation from reset                                                                          |                                  |       | 100 | 250 | μs   |
|                                 | Power-down recovery time                                                                                                   |                                  |       |     | 70  | μs   |
|                                 | Clamp shutdown delay                                                                                                       |                                  |       | 100 |     | μs   |
|                                 | Convert pulse width                                                                                                        |                                  | 20    |     |     | ns   |
|                                 | Reset pulse width                                                                                                          |                                  | 20    |     |     | ns   |
|                                 | ADC WAIT state <sup>(5)</sup> ; the wait time from when the ADC enters the IDLE state to when the ADC is ready for trigger |                                  | 2     |     |     | μs   |


(1) Specified by design and characterization. Not tested during production.

(2) See [Figure 1](#) and [Figure 2](#).


(3) SDO loaded with  $10$  pF load capacitance for SDO timing specifications.

(4) See [Figure 2](#).

(5) Specified by design; not subject to production testing. See the [ADC Sequencing](#) section for more details.

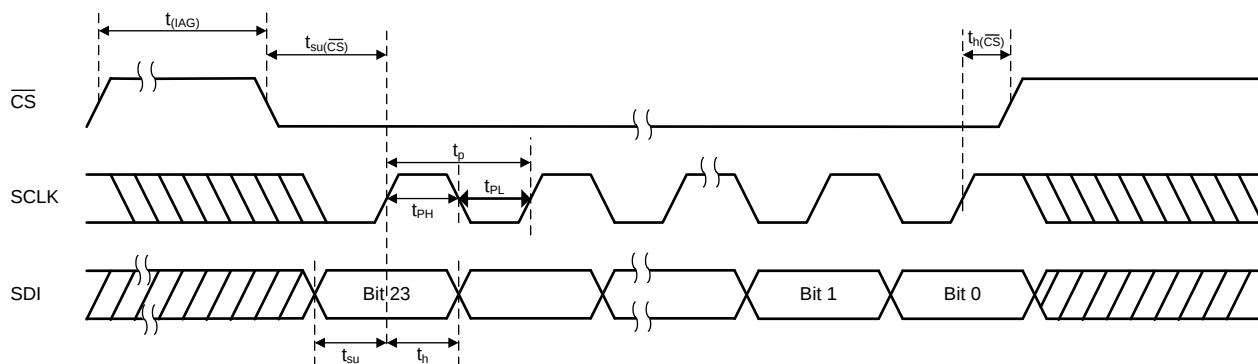


**Figure 1. Serial Interface Write Timing Diagram**

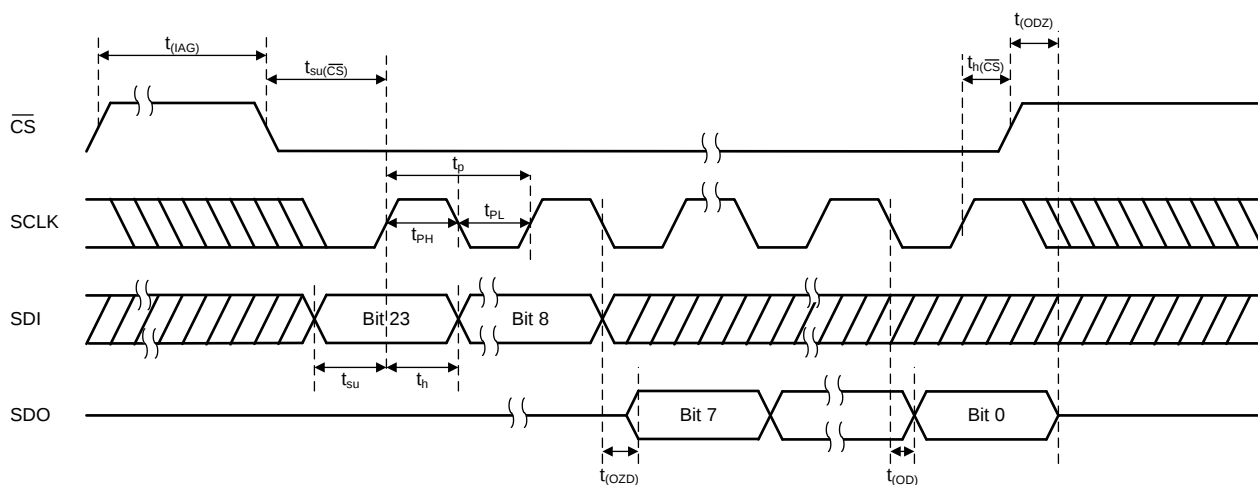


**Figure 2. Serial Interface Read Timing Diagram**

## 6.9 Typical Characteristics: DAC


At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

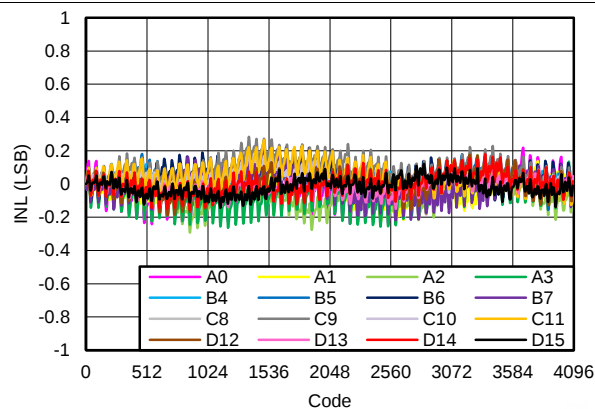


**Figure 3. DAC Linearity Error vs Code**  
DAC Range: 0 to 10 V

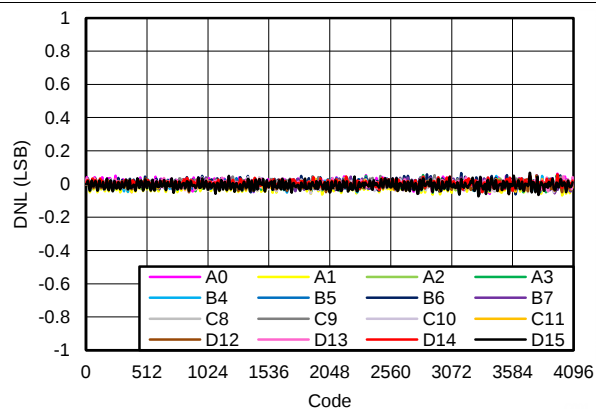


**Figure 4. DAC Differential Linearity Error vs Code**  
DAC Range: 0 to 10 V

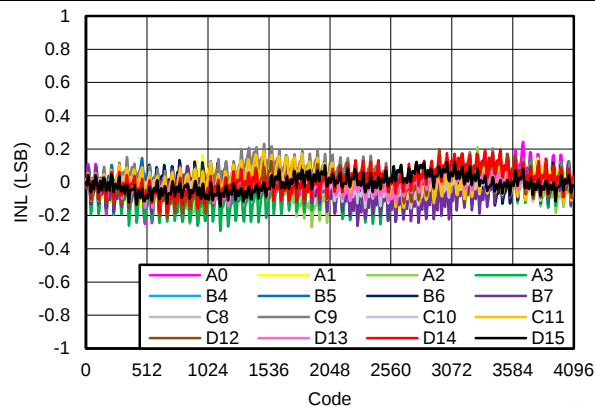


**Figure 5. DAC Linearity Error vs Code**  
DAC Range: -10 to 0 V

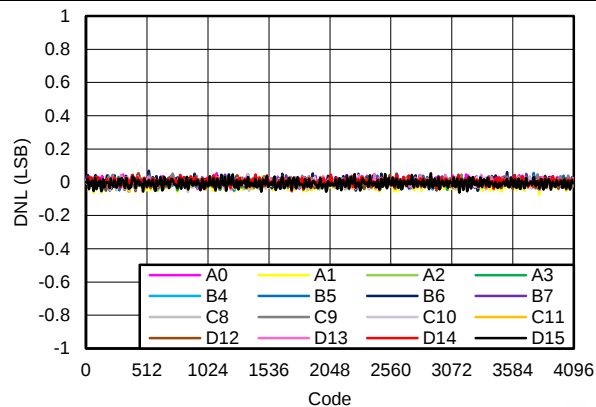

**Figure 6. DAC Differential Linearity Error vs Code**  
DAC Range: -10 to 0 V

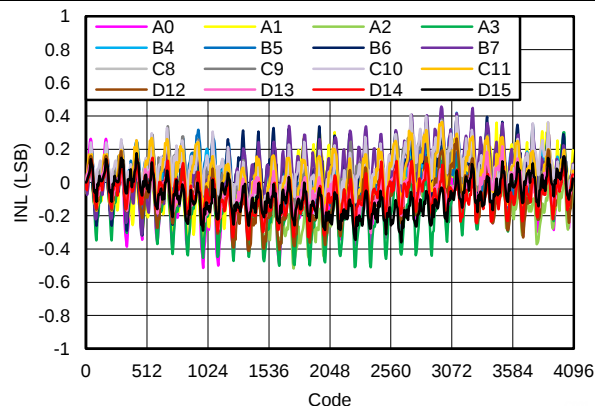


**Figure 7. DAC Linearity Error vs Code**  
DAC Range: 0 to 5 V

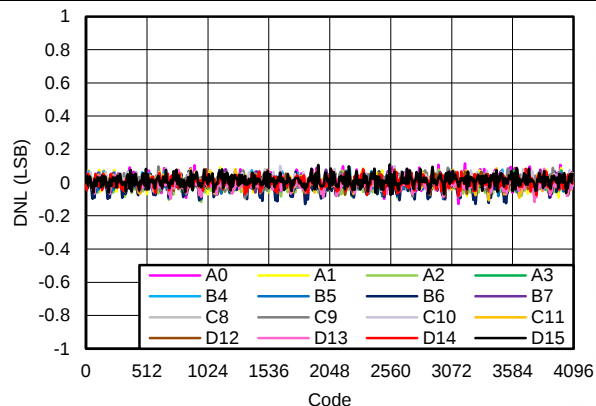


**Figure 8. DAC Differential Linearity Error vs Code**  
DAC Range: 0 to 5 V

## Typical Characteristics: DAC (continued)


At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

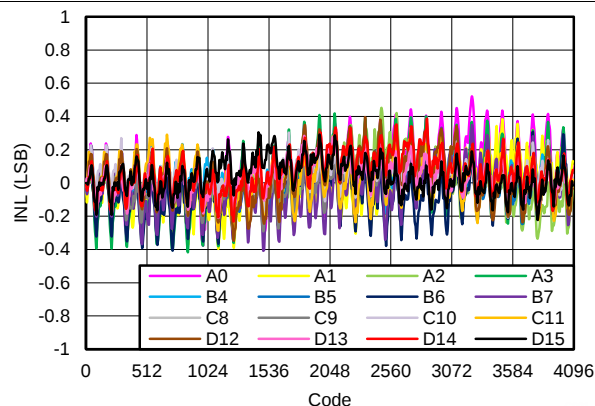


**Figure 9. DAC Linearity Error vs Code**  
DAC Range: -5 to 0 V

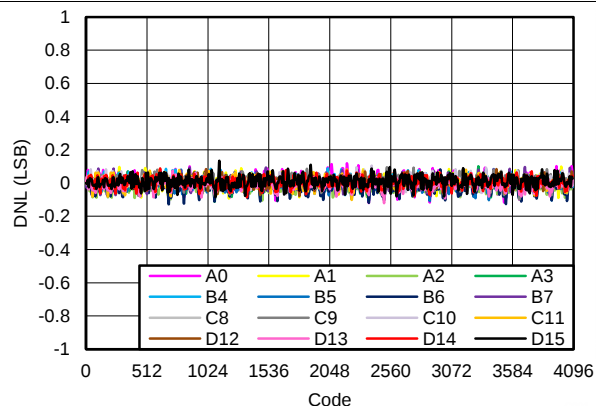


**Figure 10. DAC Differential Linearity Error vs Code**  
DAC Range: -5 to 0 V

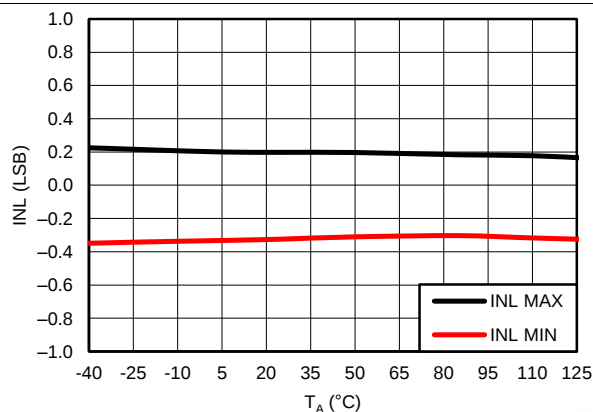


**Figure 11. DAC Linearity Error vs Temperature**  
DAC Range: 0 to 10 V

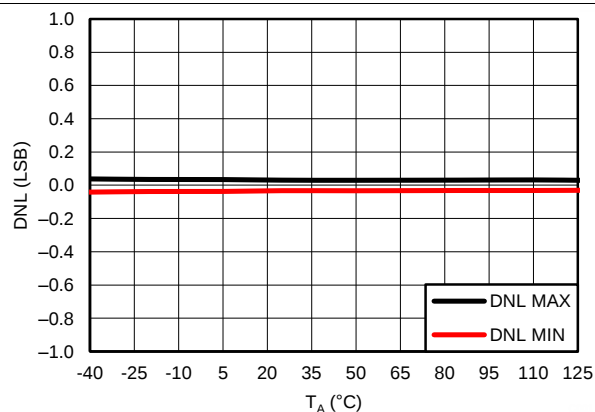

**Figure 12. DAC Differential Linearity Error vs Temperature**  
DAC Range: 0 to 10 V

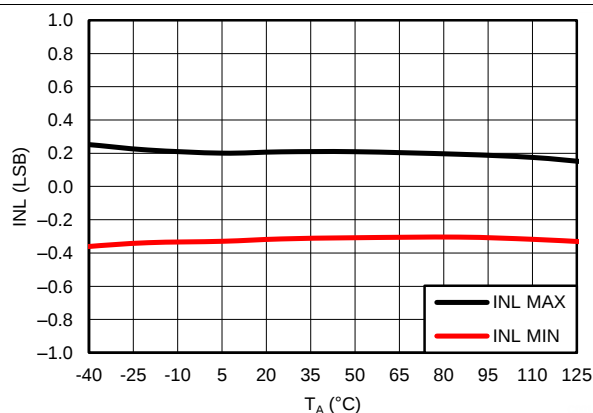

**Figure 13. DAC Linearity Error vs Temperature**  
DAC Range: -10 to 0 V

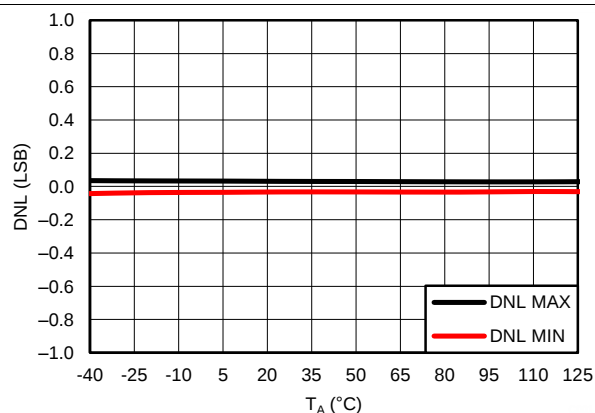

**Figure 14. DAC Differential Linearity Error vs Temperature**  
DAC Range: -10 to 0 V

## Typical Characteristics: DAC (continued)

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

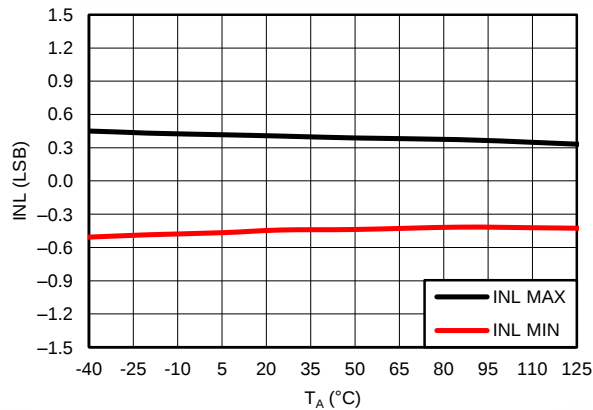


Figure 15. DAC Linearity Error vs Temperature  
DAC Range: 0 to 5 V

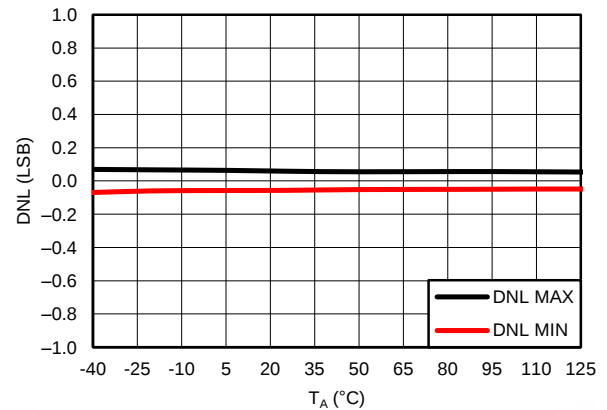


Figure 16. DAC Differential Linearity Error vs Temperature  
DAC Range: 0 to 5 V

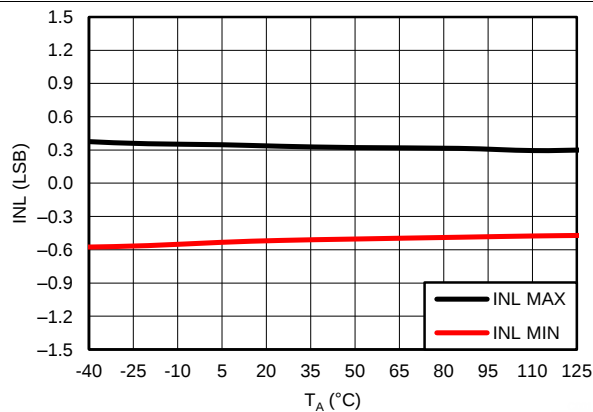


Figure 17. DAC Linearity Error vs Temperature  
DAC Range: -5 to 0 V

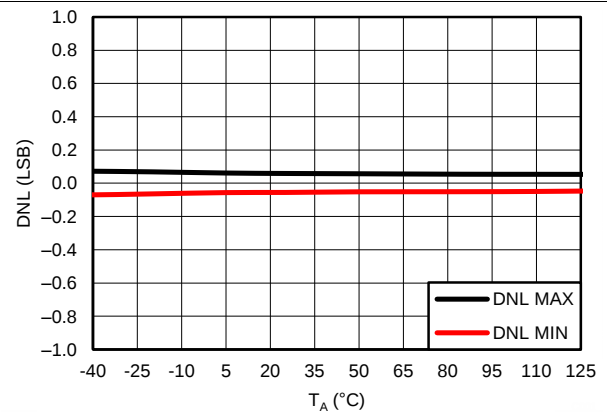


Figure 18. DAC Differential Linearity Error vs Temperature  
DAC Range: -5 to 0 V

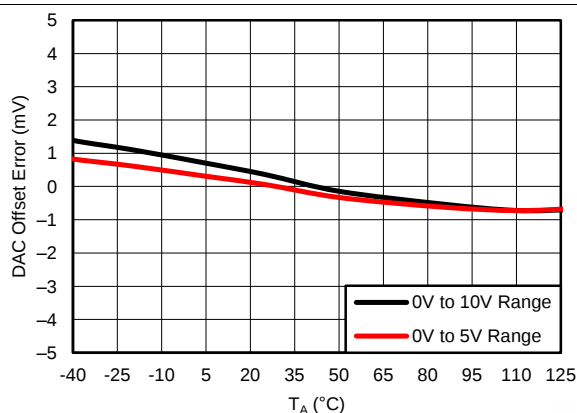


Figure 19. DAC Offset Error vs Temperature


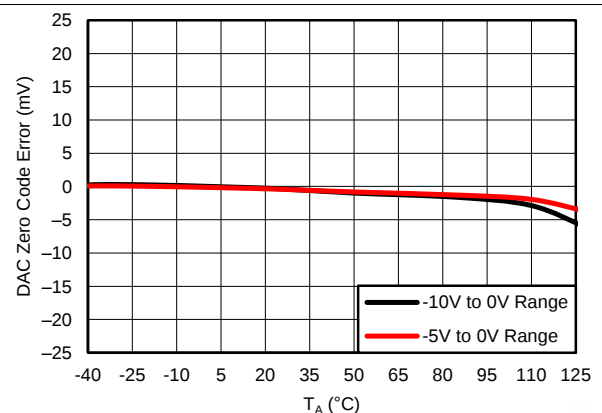



Figure 20. DAC Zero Code Error vs Temperature

## Typical Characteristics: DAC (continued)

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

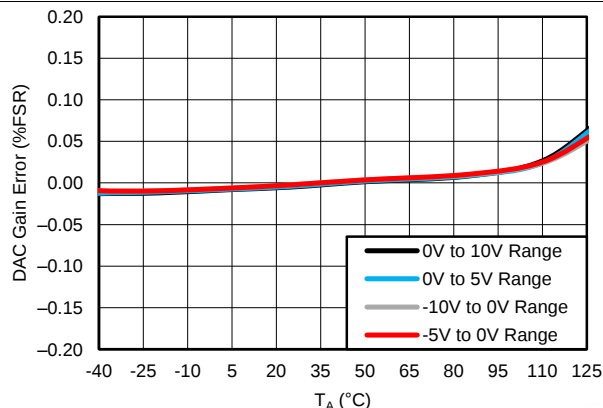


**Figure 21. DAC Gain Error vs Temperature**

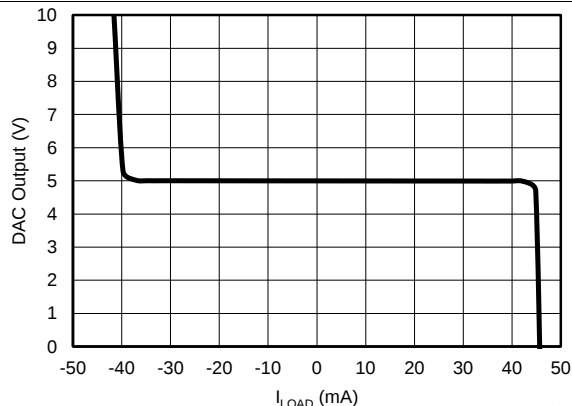


Code 0x800, DAC range: 0 to 10 V

**Figure 22. DAC Output Voltage vs Load Current**

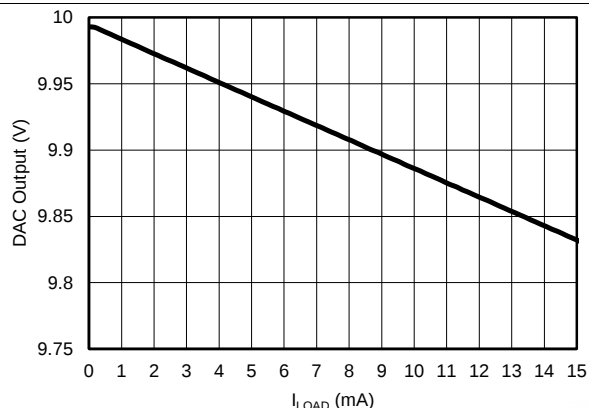


Code 0xFFFF, DAC range: 0 to 10 V,  $AV_{CC} = 10\text{ V}$ ,  $AV_{EE} = 0\text{ V}$

**Figure 23. DAC Source Current**

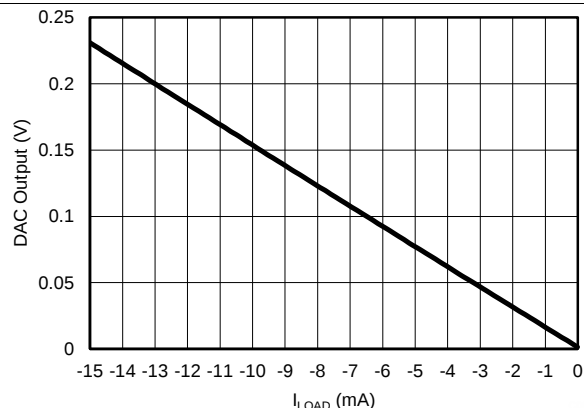


Code 0x000, DAC range: 0 to 10 V,  $AV_{CC} = 10\text{ V}$ ,  $AV_{EE} = 0\text{ V}$

**Figure 24. DAC Sink Current**

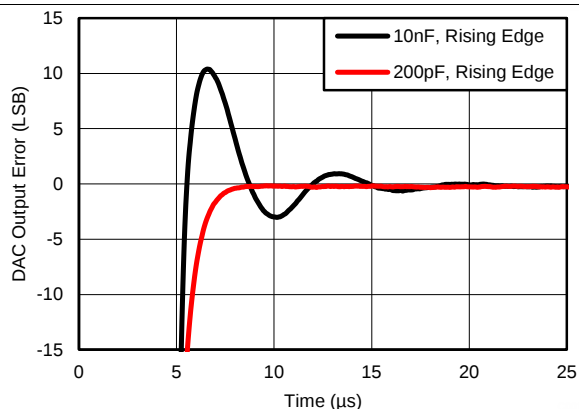

Code 0x400 to 0xC00 to within  $\frac{1}{2}$  LSB

**Figure 25. DAC Settling Time vs Load Capacitance**

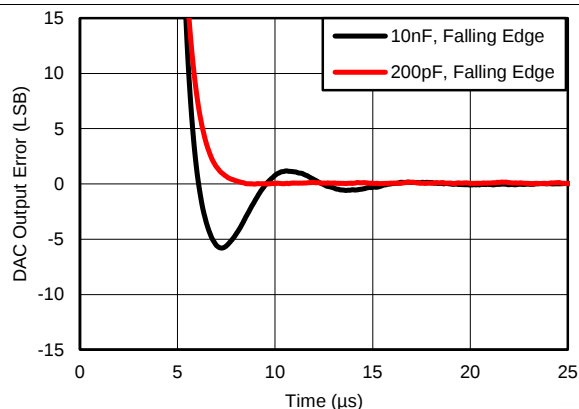


Code 0xC00 to 0x400 to within  $\frac{1}{2}$  LSB

**Figure 26. DAC Settling Time vs Load Capacitance**


## Typical Characteristics: DAC (continued)

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

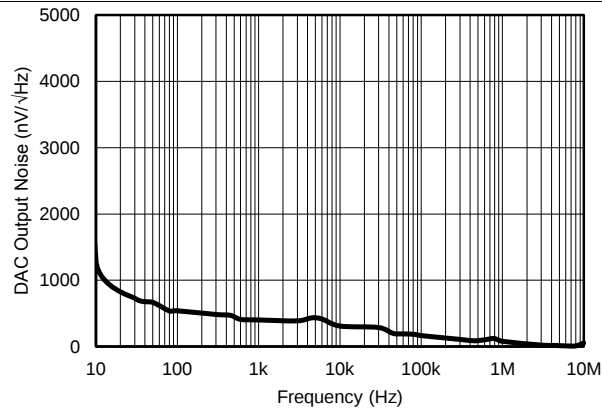


Code 0x800

Figure 27. DAC Output Noise vs Frequency

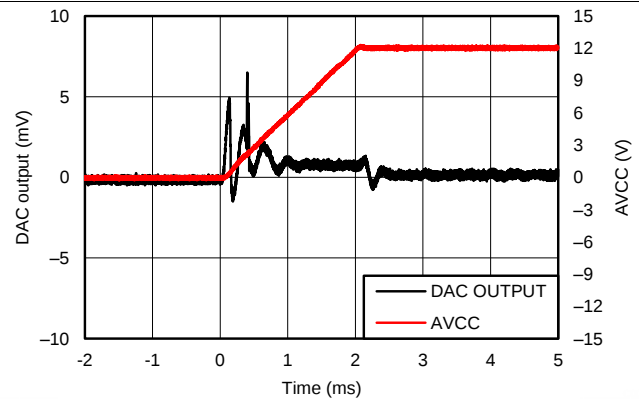


$AV_{SS} = AV_{EE} = \text{AGND}$ ,  $AV_{CC} = 0$  to 12 V, 2-ms ramp

Figure 28. DAC Power On Overshoot, Single Supply

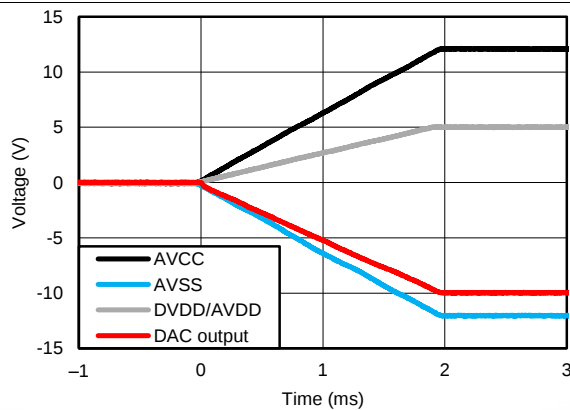


$AV_{SS} = AV_{EE} = -12$  V,  $AV_{CC} = 0$  to 12 V, 2-ms ramp

Figure 29. DAC Power On Overshoot, Dual Supply

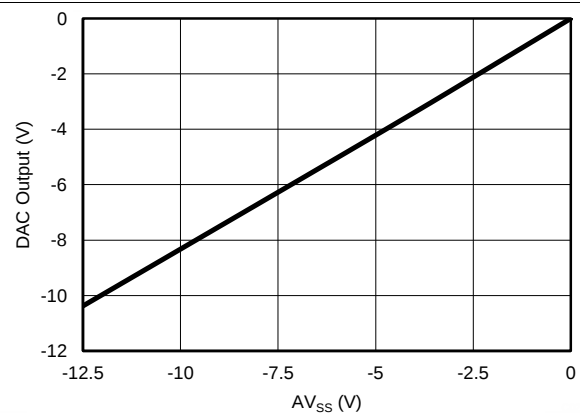


No load

Figure 30. DAC Clamp Output vs  $AV_{SS}$

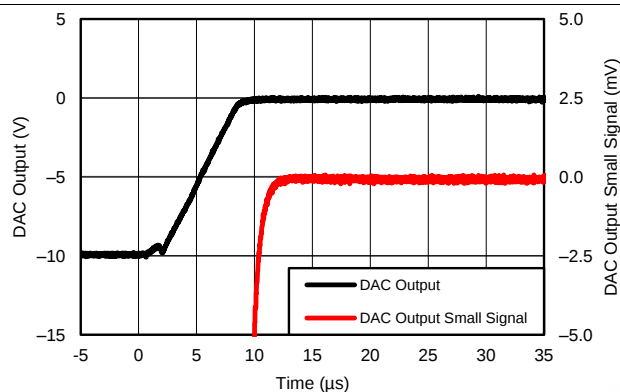

Code 0xFFFF, DAC range: -10 to 0 V, no load

Figure 31. DAC Clamp Recovery

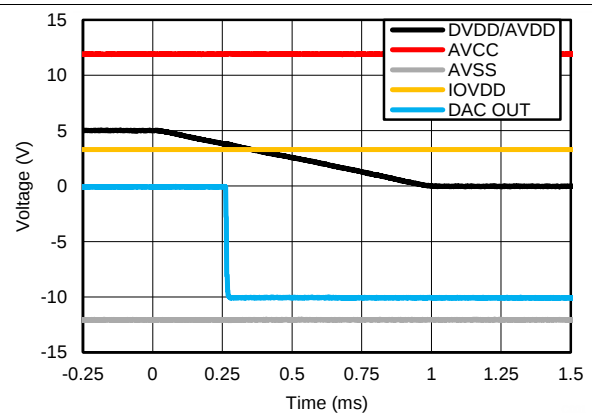


Code 0xFFFF, DAC range: -10 to 0 V, no load

Figure 32. DAC Output With  $AV_{DD}$  and  $DV_{DD}$  Supply Collapse


## Typical Characteristics: DAC (continued)

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

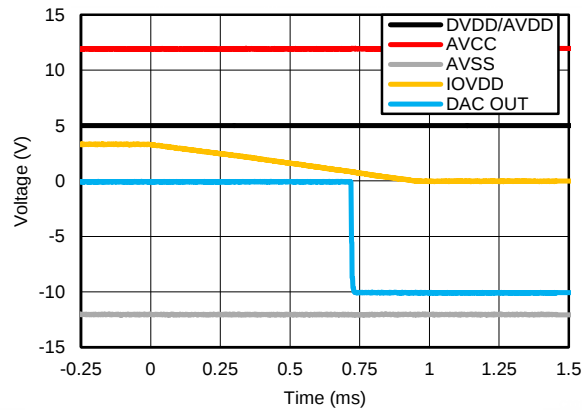


Code 0xFFFF, DAC range: -10 to 0 V, no load

**Figure 33. DAC Output With IOV<sub>DD</sub> Supply Collapse**

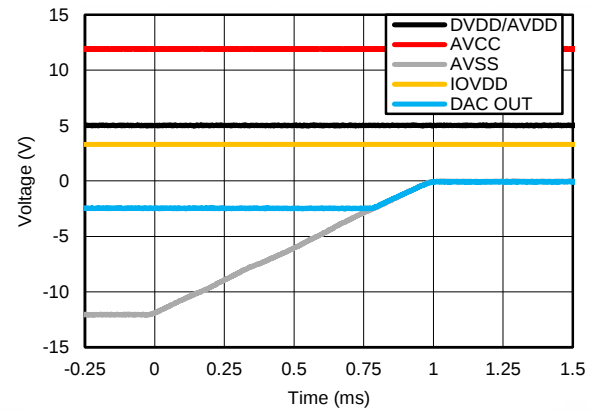

Code 0xC00, DAC range: -10 to 0 V, no load

**Figure 34. DAC Output With AV<sub>SS</sub> Supply Collapse**

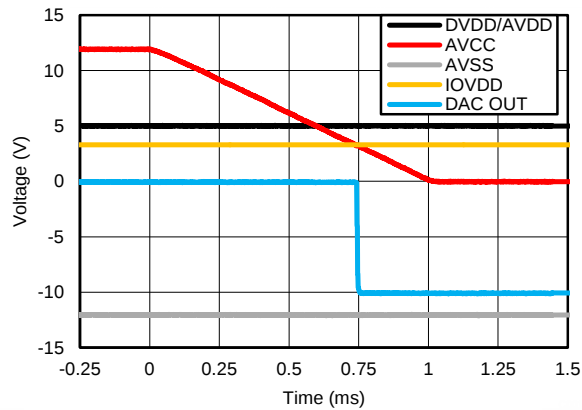

Code 0xFFFF, DAC range: -10 to 0 V, no load

**Figure 35. DAC Output With AV<sub>CC</sub> Supply Collapse**

## 6.10 Typical Characteristics: ADC

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

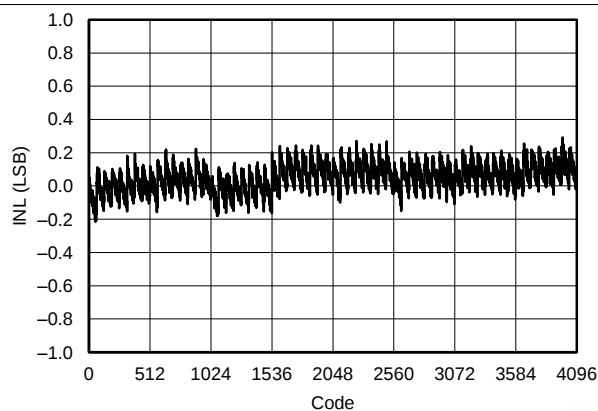


Figure 36. ADC Linearity Error vs Code Unipolar Input

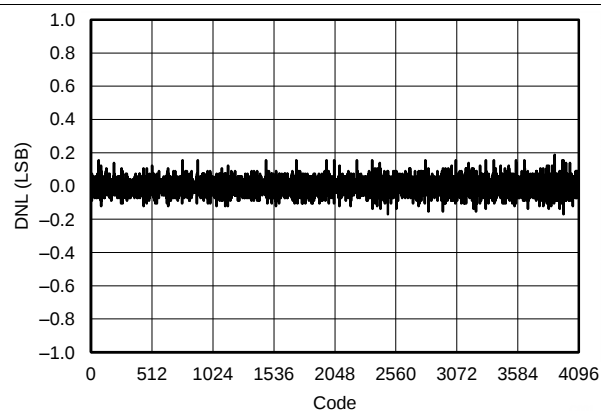


Figure 37. ADC Differential Linearity Error vs Code Unipolar Input

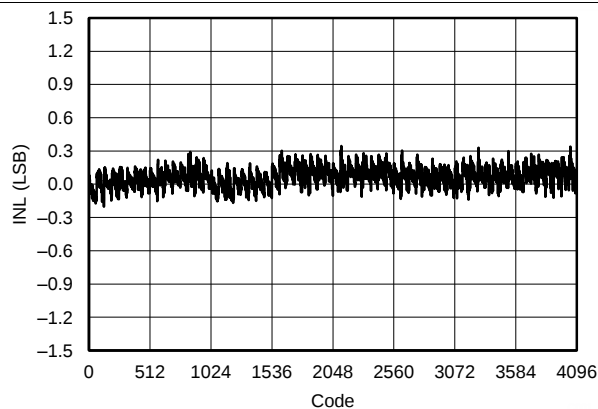


Figure 38. ADC Linearity Error vs Code Bipolar Input

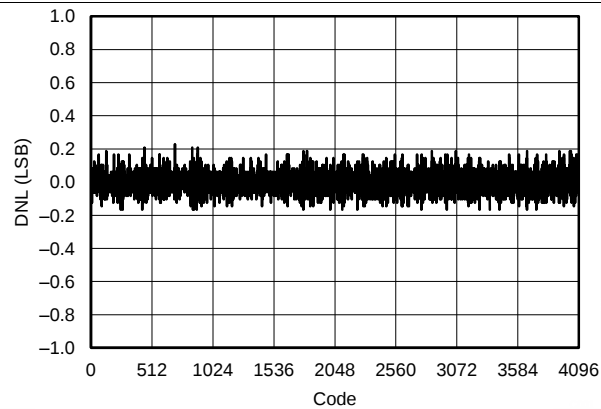


Figure 39. ADC Differential Linearity Error vs Code Bipolar Input

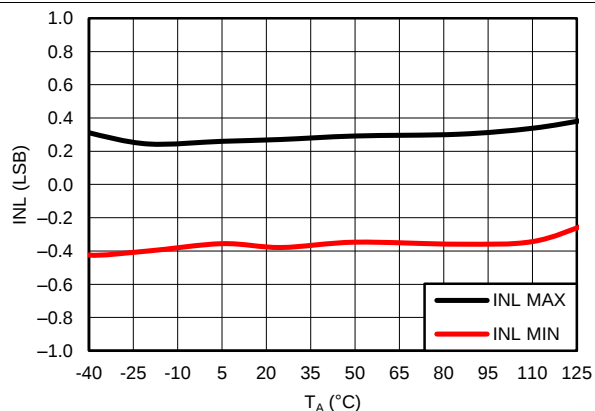


Figure 40. ADC Linearity Error vs Temperature Unipolar Input


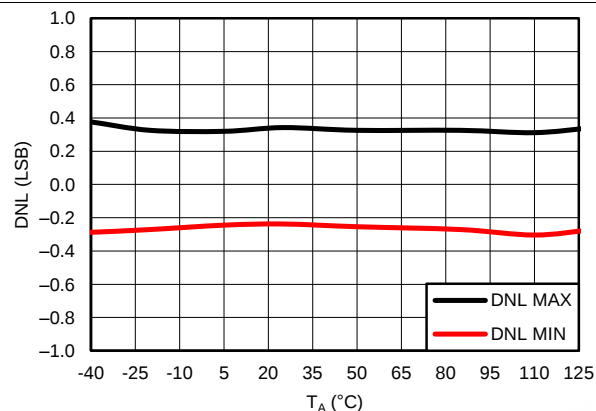



Figure 41. ADC Differential Linearity Error vs Temperature Unipolar Input

## Typical Characteristics: ADC (continued)


At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

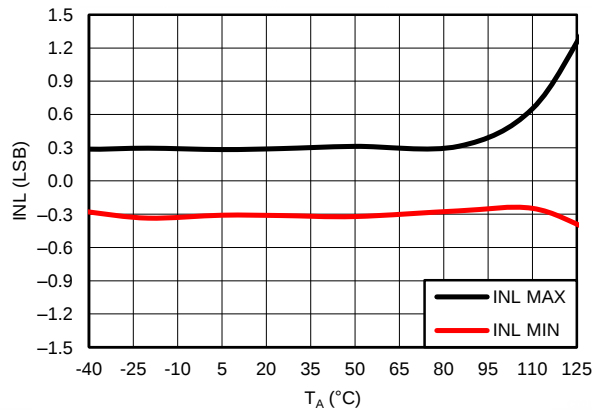


**Figure 42. ADC Linearity Error vs Temperature  
Bipolar Input**

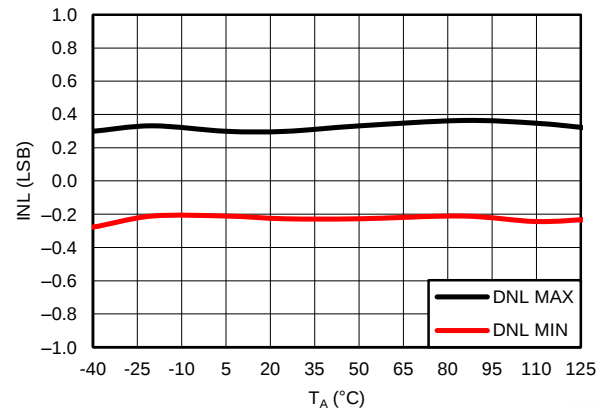

**Figure 43. ADC Differential Linearity Error vs Temperature  
Bipolar Input**

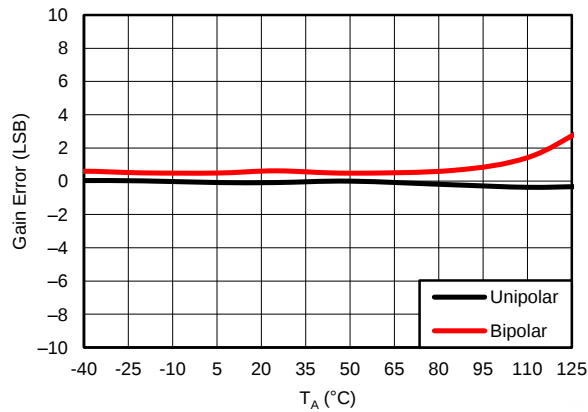


**Figure 44. ADC Gain Error vs Temperature**

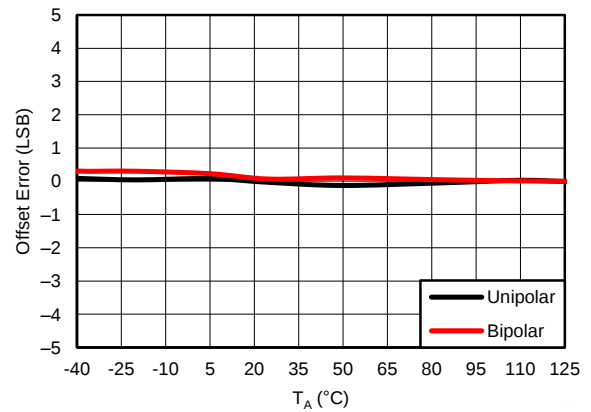

**Figure 45. ADC Offset Error vs Temperature**

## 6.11 Typical Characteristics: Reference

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

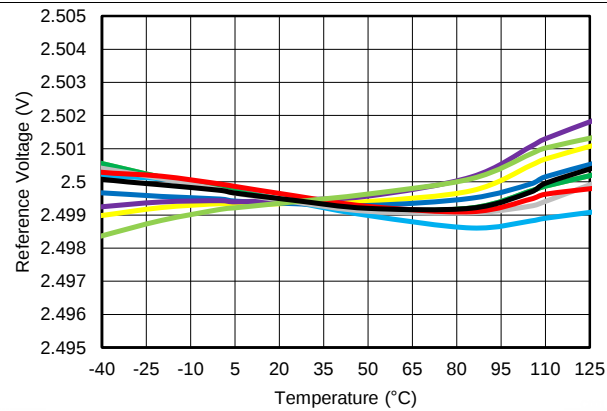


10 units, measured at REF\_CMP

Figure 46. Reference Voltage vs Temperature

## 6.12 Typical Characteristics: Temperature Sensor

At  $T_A = 25^\circ\text{C}$  (unless otherwise noted)

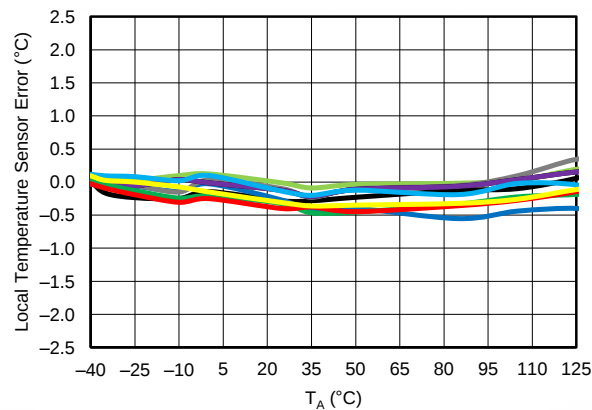

10 units

Figure 47. Temperature Sensor Error vs Temperature

## 7 Detailed Description

### 7.1 Overview


The AMC7836 device is a highly-integrated analog-monitoring and control solution capable of voltage and temperature supervision. The AMC7836 device includes the following features:

- Sixteen 12-bit digital-to-analog converters (DACs) with adjustable output ranges
  - Output ranges: –10 to 0 V, –5 to 0 V, 0 to 5 V, and 0 to 10 V
  - Auto-range detector on device power-up and reset events
  - The DACs power-on and clamp voltages can be pin-selected between AGND and a negative voltage
  - The DACs can be configured to clamp automatically upon detection of an alarm event
- A multi-channel, 12-bit analog-to-digital converter (ADC) for voltage and temperature sensing
  - Sixteen bipolar inputs: –12.5 to 12.5 V input range
  - Five precision inputs with programmable threshold detectors: 0 to 5 V input range
  - Internal temperature sensor
- Internal 2.5 V precision reference
- Eight general purpose I/O (GPIO) ports
- Communication with the device occurs through a 4-wire SPI-compatible interface supporting 1.8 to 5.5 V operation

The AMC7836 device is characterized for operation over the temperature range of –40°C to 125°C which makes the device suitable for harsh-condition applications. The device is available in a 10-mm × 10-mm 64-pin HTQFP PowerPAD IC package.

The very high-integration of the AMC7836 device makes it an ideal all-in-one, low-cost, bias-control circuit for the power amplifiers (PAs) found in multi-channel RF-communication systems. The flexible DAC output ranges allow the device to be used as a biasing solution for a large variety of transistor technologies such as LDMOS, GaAs, and GaN. The AMC7836 feature set is similarly beneficial in general-purpose monitor and control systems.

## 7.2 Functional Block Diagram

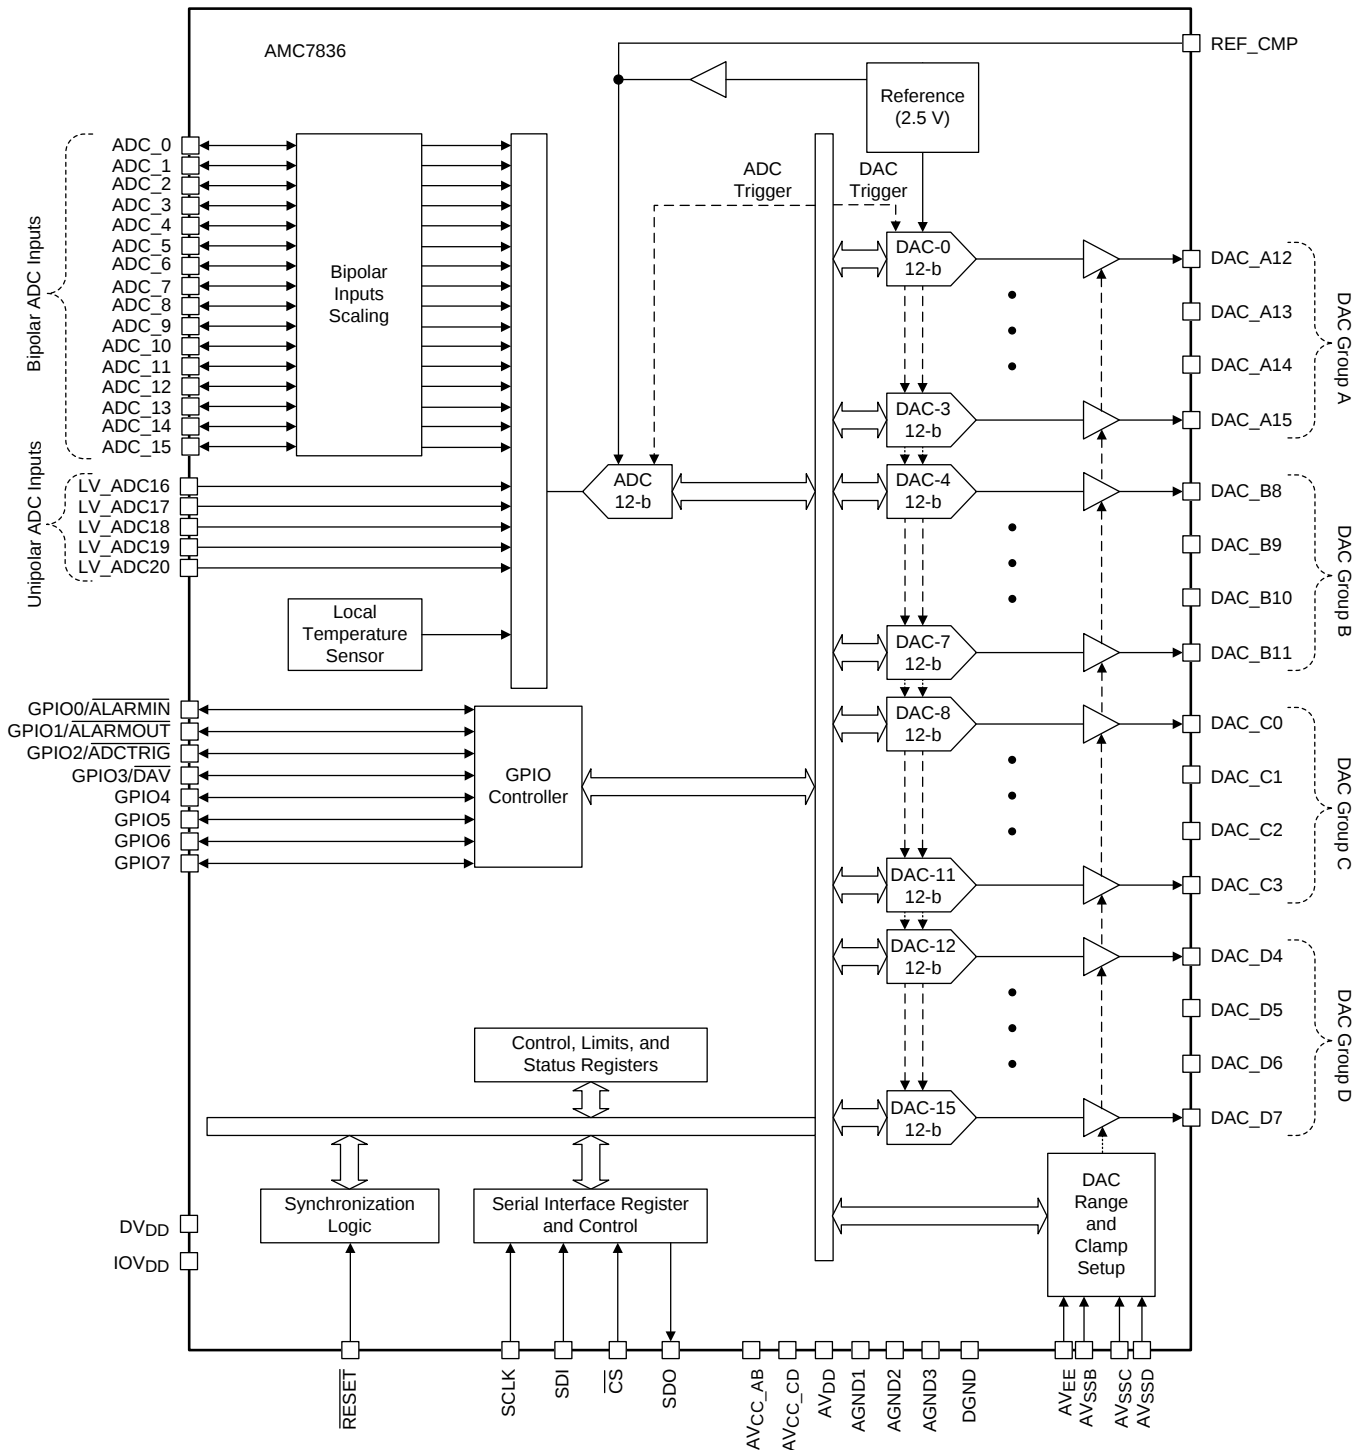


## 7.3 Feature Description

### 7.3.1 Digital-to-Analog Converters (DACs)

The AMC7836 device features an analog-control system centered on sixteen 12-bit DACs that operate from the internal reference of the device. Each DAC core consists of a string DAC and output-voltage buffer.

The resistor-string structure consists of a series of resistors, each with a value of  $R$ . The code loaded to the DAC determines at which node on the string the voltage is tapped off to be fed into the output amplifier. The voltage is tapped off by closing one of the switches connecting the string to the amplifier (see [Figure 48](#)). This architecture has inherent monotonicity, voltage output, and low glitch. This architecture is also linear because all the resistors are of equal value.

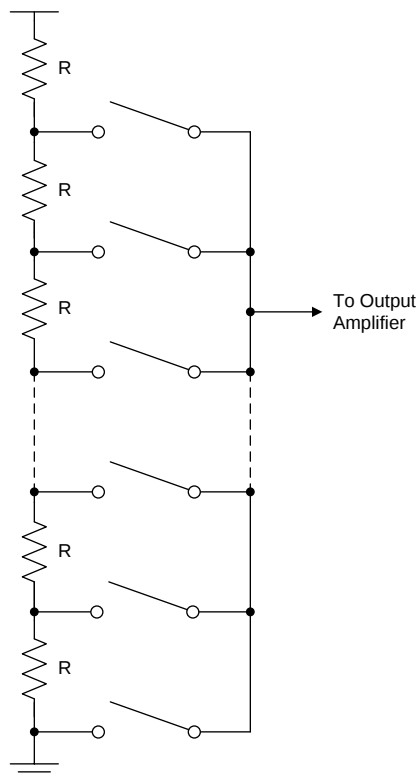


**Figure 48. DAC Resistor String**

#### 7.3.1.1 DAC Output Range and Clamp Configuration

The 16 DACs are split into four groups, each with four DACs. All of the DACs in a given group share the same output range and clamp voltage value, however, these settings can be set independently for each DAC group. After power-on or a reset event the following actions take place: the DAC outputs are directed automatically to the corresponding clamp value; the DAC groups output ranges are set by the auto-range detector and; all DAC data registers and data latches are set to the default values. [Figure 49](#) shows a high level block diagram of each DAC in the AMC7836 device.

## Feature Description (continued)

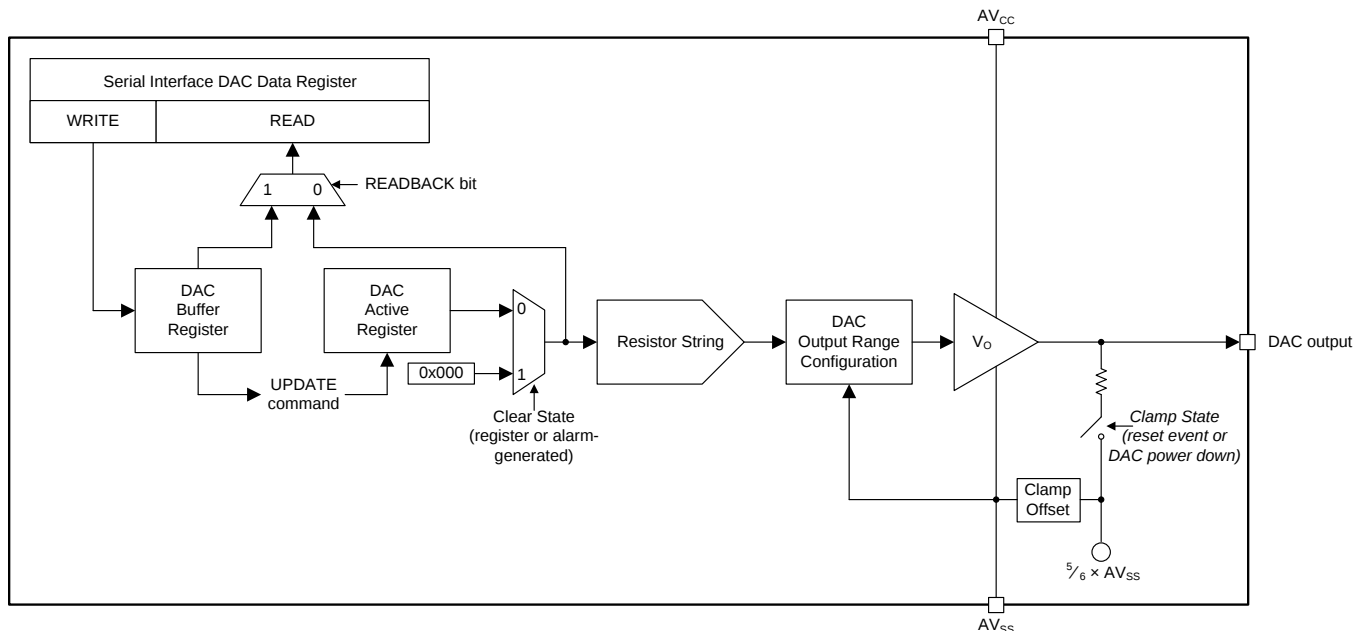

**Figure 49. DAC Block Diagram**

### 7.3.1.1.1 Auto-Range Detection

After power-on or a reset event the output range for each DAC group is set automatically by the voltage present in the corresponding  $AV_{SS}$  pin ( $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$  or  $AV_{SSD}$ ). When the  $AV_{SS}$  voltage of a DAC group is lower than the threshold value,  $AV_{SSTH}$ , the output for that DAC group is automatically configured to the  $-10$  to  $0$  V range. Conversely, if the DAC group  $AV_{SS}$  voltage is higher than  $AV_{SSTH}$ , the DAC-group output is automatically set to the  $0$  to  $5$  V range. The auto-range detector results for each DAC group are stored in the general status register (address  $0x72$ ).

In addition to a power-on or reset event, the auto-range detector is also enabled by a register write to the DAC power down registers (address  $0xB2$  through  $0xB3$ ) or the device configuration register (address  $0x02$ ).


Although the initial output-range setting is determined by the auto-range detector, the output range for each DAC-group can be afterwards configured to any of the available output ranges ( $-10$  to  $0$  V,  $-5$  to  $0$  V,  $0$  to  $5$  V, or  $0$  to  $10$  V) through the DAC range registers (address  $0x1E$  through  $0x1F$ ).

#### NOTE

The power-on-reset and clamp-voltage value of each DAC group is set by the corresponding  $AV_{SS}$  pin and is independent of the DAC output range. In some applications, matching the clamp-voltage setting to the operating voltage range is imperative. For those applications, the recommended connections for the  $AV_{SS}$  pin are: AGND for the positive output ranges, in which case the clamp voltage is  $0$  V; a negative supply voltage with a lower value than the minimum DAC output voltage ( $-5$  V or  $-10$  V) for the selected negative output range, in which case the unloaded clamp voltage is determined by the value of the negative supply voltage (see [Figure 50](#)).

Although not a recommended operating condition, the device allows a DAC group to operate in a positive output range even if its clamp voltage is negative ( $AV_{SS}$  connected to a negative supply voltage).

## Feature Description (continued)

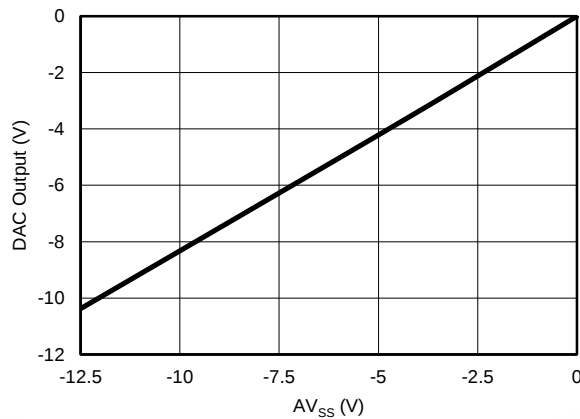

**Figure 50. DAC Clamp Output vs AV<sub>SS</sub>**

A special distinction must be made for DAC group A as the AV<sub>SS</sub> pin of this group is the dual-function AV<sub>EE</sub> pin. Aside from setting the clamp voltage and default output range for the DAC group A, the AV<sub>EE</sub> pin is also the lowest potential in the device. As a consequence the AV<sub>EE</sub> voltage is dependent on the other AV<sub>SS</sub> pin connections. The AV<sub>EE</sub> pin can only be connected to the analog ground if all the other AV<sub>SS</sub> pins are also connected to the analog ground. If any of the AV<sub>SS</sub> pins is connected to a negative voltage, the AV<sub>EE</sub> pin must also be connected to that voltage (see [Table 1](#)).

The full-scale output range for each DAC group is limited by the corresponding AV<sub>CC</sub> and AV<sub>SS</sub> values. The maximum and minimum outputs cannot exceed the AV<sub>CC</sub> voltage or be lower than the AV<sub>SS</sub> voltage, respectively.

**Table 1. Recommended DAC Group Configuration**

| DAC GROUP | DAC     | AUTO-RANGE AND CLAMP VOLTAGE SELECTION (AV <sub>SS</sub> ) | AV <sub>EE</sub> = AGND |                          | AV <sub>EE</sub> = V <sub>NEG</sub> |                                             |
|-----------|---------|------------------------------------------------------------|-------------------------|--------------------------|-------------------------------------|---------------------------------------------|
|           |         |                                                            | OUTPUT RANGE            | CLAMP VOLTAGE CONNECTION | OUTPUT RANGE                        | CLAMP VOLTAGE CONNECTION                    |
| A         | DAC_A0  | AV <sub>EE</sub>                                           | 0 to 5 V or 0 to 10 V   | AGND                     | −5 to 0 V or −10 to 0 V             | V <sub>NEG</sub>                            |
|           | DAC_A1  |                                                            |                         |                          |                                     |                                             |
|           | DAC_A2  |                                                            |                         |                          |                                     |                                             |
|           | DAC_A3  |                                                            |                         |                          |                                     |                                             |
| B         | DAC_B4  | AV <sub>SSB</sub>                                          | 0 to 5 V or 0 to 10 V   | AGND                     | −5 to 0 V or −10 to 0 V             | V <sub>NEG</sub> ≤ AV <sub>SSB</sub> ≤ −5 V |
|           | DAC_B5  |                                                            |                         |                          | 0 to 5 V or 0 to 10 V               | AGND                                        |
|           | DAC_B6  |                                                            |                         |                          |                                     |                                             |
|           | DAC_B7  |                                                            |                         |                          |                                     |                                             |
| C         | DAC_C8  | AV <sub>SSC</sub>                                          | 0 to 5 V or 0 to 10 V   | AGND                     | −5 to 0 V or −10 to 0 V             | V <sub>NEG</sub> ≤ AV <sub>SSC</sub> ≤ −5 V |
|           | DAC_C9  |                                                            |                         |                          | 0 to 5 V or 0 to 10 V               | AGND                                        |
|           | DAC_C10 |                                                            |                         |                          |                                     |                                             |
|           | DAC_C11 |                                                            |                         |                          |                                     |                                             |
| D         | DAC_D12 | AV <sub>SSD</sub>                                          | 0 to 5 V or 0 to 10 V   | AGND                     | −5 to 0 V or −10 to 0 V             | V <sub>NEG</sub> ≤ AV <sub>SSD</sub> ≤ −5 V |
|           | DAC_D13 |                                                            |                         |                          | 0 to 5 V or 0 to 10 V               | AGND                                        |
|           | DAC_D14 |                                                            |                         |                          |                                     |                                             |
|           | DAC_D15 |                                                            |                         |                          |                                     |                                             |

### 7.3.1.2 DAC Register Structure

The input data of the DACs is written to the individual DAC data registers (address 0x50 through 0x6F) in straight binary format for all output ranges (see [Table 2](#)).

**Table 2. DAC Data Format**

| DIGITAL CODE   | DAC OUTPUT VOLTAGE (V) |                 |                 |                  |
|----------------|------------------------|-----------------|-----------------|------------------|
|                | 0 to 5 V RANGE         | 0 to 10 V RANGE | –5 to 0 V RANGE | –10 to 0 V RANGE |
| 0000 0000 0000 | 0                      | 0               | –5              | –10              |
| 0000 0000 0001 | 0.00122                | 0.00244         | –4.99878        | –9.99756         |
| 1000 0000 0000 | 2.5                    | 5               | –2.5            | –5               |
| 1111 1111 1110 | 4.99756                | 9.99512         | –0.00244        | –0.00488         |
| 1111 1111 1111 | 4.99878                | 9.99756         | –0.00122        | –0.00244         |

Data written to the DAC data registers is initially stored in the DAC buffer registers. The transfer of data from the DAC buffer registers to the active registers is initiated by an update command in the register update register (address 0x0F). When the active registers are updated, the DAC outputs change to the new values.

The host has the option to read from either the buffer registers or the active registers when accessing the DAC data registers. The DAC read back option is configured by the READBACK bit in the interface configuration 1 register (address 0x01).

### 7.3.1.3 DAC Clear Operation

Each DAC can be set to a CLEAR state using either hardware or software. When a DAC goes to CLEAR state, it is loaded with a zero-code input and the output voltage is set according to the auto-range detector output range. The DAC buffer or active registers do not change when the DACs enter the CLEAR state which makes it possible to return to the same voltage output before the clear event was issued. Even though the contents of the active register do not change while a DAC is in CLEAR state, a data-register read operation from the active registers while in this state returns zero-code. This functionality enables the ability to determine the DAC output voltage regardless of the operating state (CLEAR or NORMAL).

#### NOTE

The DAC buffer and active registers can be updated while the DACs are in CLEAR state allowing the DACs to output new values upon return to normal operation. When the DACs exit the CLEAR state, the DACs are immediately loaded with the data in the DAC active registers and the output is set back to the corresponding level to restore operation.

The DAC clear registers (address 0xB0 through 0xB1) enable independent control of each DAC CLEAR state through software. The DACs can also be forced to enter a CLEAR state through hardware using the ALARMIN pin. See the [Programmable Out-of-Range Alarms](#) section for a detailed description of this method.

The ALARMIN-controlled clear mechanism is just a special case of the device capability to force the DACs into the CLEAR state as a response to an alarm event. To enable this function, the alarm events must first be enabled as DAC-clear alarm sources in the DAC clear source registers (address 0x1A through 0x1B). The DAC outputs to be cleared by the selected alarm events must also be specified in the DAC clear enable registers (address 0x18 through 0x19).

An alarm event sets the corresponding alarm bit in the alarm status registers. In addition all the DACs set to clear in response to the alarm event in the DAC clear enable registers enter a CLEAR state. Once the alarm bit is cleared, as long as no other CLEAR-state controlling alarm events have been triggered, the DACs are reloaded with the contents of the DAC active registers and the outputs update accordingly.


## 7.3.2 Analog-to-Digital Converter (ADC)

The AMC7836 features a monitoring system centered on a 12-bit SAR (successive approximation register) ADC fronted by a 22-channel multiplexer and an on-chip track-and-hold circuit. The monitoring system is capable of sensing up to 16 external bipolar inputs (–12.5 to 12.5 V range), five external unipolar inputs (0 to 5 V range), and an internal analog temperature sensor.

The ADC operates from an internal 2.5 V reference ( $V_{ref}$ , measured at the REF\_CMP pin) and the input range is 0 V to  $2 \times V_{ref}$ . The external bipolar inputs to the ADC are internally mapped to this range. The ADC timing signals are derived from an on-chip temperature-compensated oscillator. The conversion results can be accessed through the device serial interface.

### 7.3.2.1 Analog Inputs

The AMC7836 has 21 analog inputs for external voltage sensing. Sixteen of these inputs (ADC\_0 through ADC\_15) are bipolar and the other five (LV\_ADC16 through LV\_ADC20) are unipolar. Figure 51 shows the equivalent circuit for the external analog-input pins. All switches are open while the ADC is in the IDLE state.

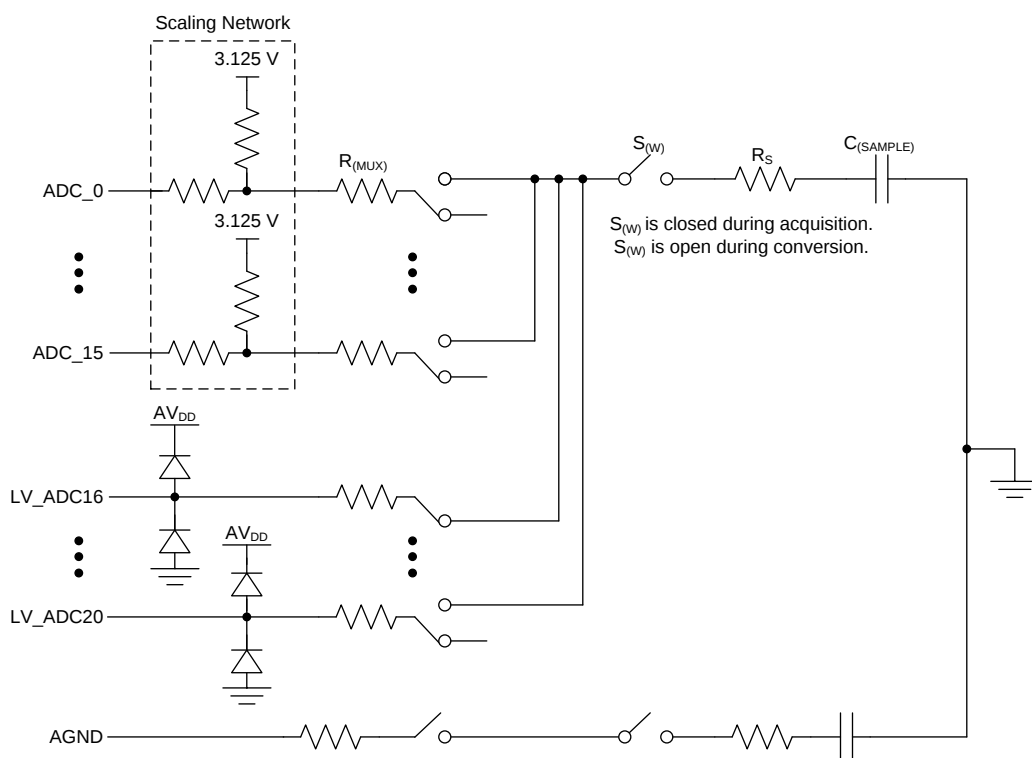

**Figure 51. ADC External Inputs Equivalent Circuit**

To achieve the specified performance, especially at higher input frequencies, driving each analog input pin with a low impedance source is recommended. An external amplifier can also be used to drive the input pins.

### 7.3.2.1.1 Bipolar Analog Inputs

The AMC7836 can support up to 16 bipolar analog inputs. The analog input range for these channels is –12.5 to 12.5 V. The bipolar signal is scaled internally through a resistor divider so that it maps to the native input range of the ADC (0 V to  $2 \times V_{\text{ref}}$ ). The input resistance of the scaling network is 175 k $\Omega$ .

The bipolar analog input conversion values are stored in straight binary format in the ADC data registers (address 0x20 through 0x49). The LSB (least-significant bit) size for these channels is  $25 \times V_{\text{ref}} / 4096$ . With the internal reference equal to 2.5 V, the input voltage is calculated by [Equation 1](#).

$$\text{Voltage} = 5 \left( \frac{\text{CODE} \times 5}{4096} - 2.5 \right) \quad (1)$$

A typical application for the bipolar channels is monitoring of the 16 DAC outputs in the device. In this application the bipolar inputs can be driven directly. However, in applications where the signal source has high impedance, buffering the analog input is recommended. When driven from a low impedance source such as the AMC7836 DAC outputs, the network is designed to settle before the start of conversion. Additional impedance can affect the settling and divider accuracy of this network.

### 7.3.2.1.2 Unipolar Analog Inputs

In addition to the bipolar input channels, the AMC7836 device includes five unipolar analog inputs. The analog input range for these channels is 0 V to  $2 \times V_{\text{ref}}$  and the LSB size for these channels is  $2 \times V_{\text{ref}} / 4096$ .

The unipolar analog input conversion values are stored in straight binary format in the ADC-Data registers (address 0x40 through 0x49). With the internal reference equal to 2.5 V, the input voltage is calculated by [Equation 2](#).

$$\text{Voltage} = \frac{\text{CODE} \times 5}{4096} \quad (2)$$

In applications where the signal source has high impedance, externally buffering the unipolar analog input is recommended.


### 7.3.2.2 ADC Sequencing

The AMC7836 ADC conversion sequence is shown in [Figure 52](#). The ADC supports direct mode and auto mode conversion. The conversion method is selected in the ADC configuration register (address 0x10). The default conversion method is direct mode.

In both methods, the single channel or sequence of channels to be converted by the ADC must be first configured in the ADC MUX configuration registers (address 0x13 through 0x15). The input channels to the ADC include 16 external bipolar inputs, five external unipolar inputs, and the internal temperature sensor.

In direct-mode conversion, the selected ADC input channels are converted on demand by issuing an ADC trigger signal. After the last enabled channel is converted, the ADC enters IDLE state and waits for a new trigger.

In auto-mode conversion, the selected ADC input channels are converted continuously. The conversion cycle is initiated by issuing an ADC trigger. Upon completion of the first conversion sequence another sequence is automatically started. Conversion of the selected channels occurs repeatedly until the auto-mode conversion is stopped by issuing a second trigger signal.

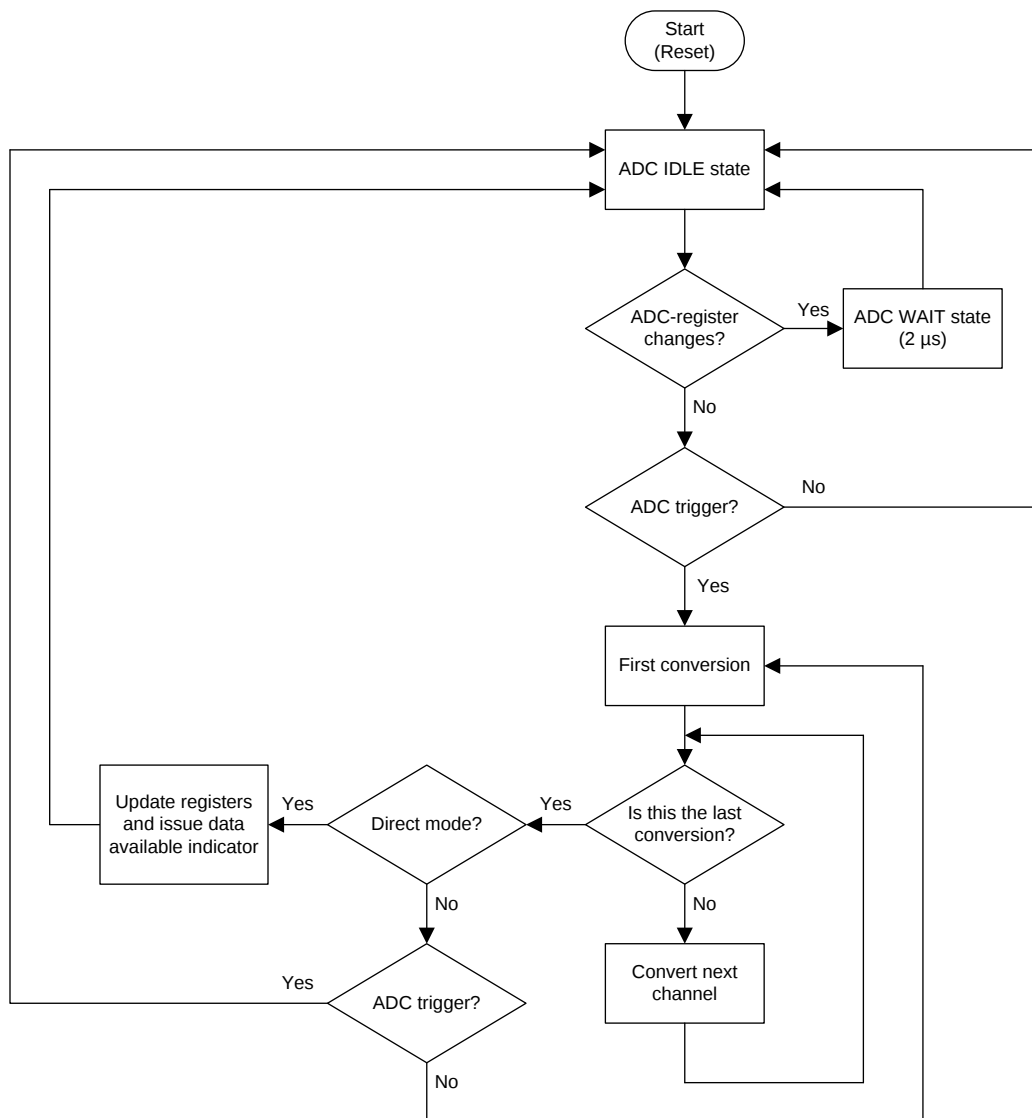

**Figure 52. ADC Conversion Sequence**

Regardless of the selected conversion method, the following ADC registers should only be updated while the ADC is in IDLE state:

- ADC configuration register (address 0x10)
- False alarm configuration register (address 0x11)
- ADC MUX configuration registers (address 0x13 through 0x15)
- Threshold registers (0x80 through 0x97)
- Hysteresis register (0xA0 through 0xA5)

**NOTE**

After updating any of the ADC registers listed above, a minimum 2 μs wait time should be implemented before issuing an ADC trigger.

### 7.3.2.3 ADC Synchronization

A trigger signal must occur for the ADC to enter and exit the IDLE state. The ADC trigger can be generated either through software (ICONV bit in the ADC trigger register, 0xC0) or hardware (GPIO2/ADCTRIG, pin 9). To use the GPIO2/ADCTRIG pin as an ADC trigger, the pin must be configured accordingly in the GPIO configuration register (address 0x12). When the pin is configured as a trigger, a falling edge on it begins the sampling and conversion of the ADC.


In auto mode the ADC and temperature data registers (0x20 through 0x4B) are accessed by first issuing an ADC UPDATE command in the register update register (address 0x0F). The ADC UPDATE command ensures the latest available data for each input channel can be accessed without the need for complex synchronization schemes between the AMC7836 device and the host controller. A single ADC UPDATE command updates all ADC and temperature data registers. Therefore issuing multiple UPDATE commands is not necessary when reading more than one ADC data register.

#### NOTE

The ADC UPDATE command and accessing of the ADC and Temperature data registers does not interfere with the conversion process which ensures continuous ADC operation.

In direct mode the ADC and temperature data registers (0x20 through 0x4B) should only be accessed while the ADC is in the IDLE state (see Figure 53). Although the total update time can be easily calculated, the device provides a data-available indicator signal to track the ADC status. Failure to satisfy the synchronization requirements could lead to erroneous data reads.

The data-available indicator signal is output through the GPIO3/DAV pin and as a data-available flag that is accessible through the serial interface (DAVF bit in the general status register, 0x72). The GPIO3/DAV pin must be configured in the GPIO configuration register (address 0x12) as an interrupt. After a direct-mode conversion is complete and the ADC returns to the IDLE state, the DAVF bit is immediately set to 1 and the DAV pin is active (low) which indicates that new data is available. The pin and flag are cleared automatically when a new conversion begins or one of the ADC data or temperature data registers is accessed.

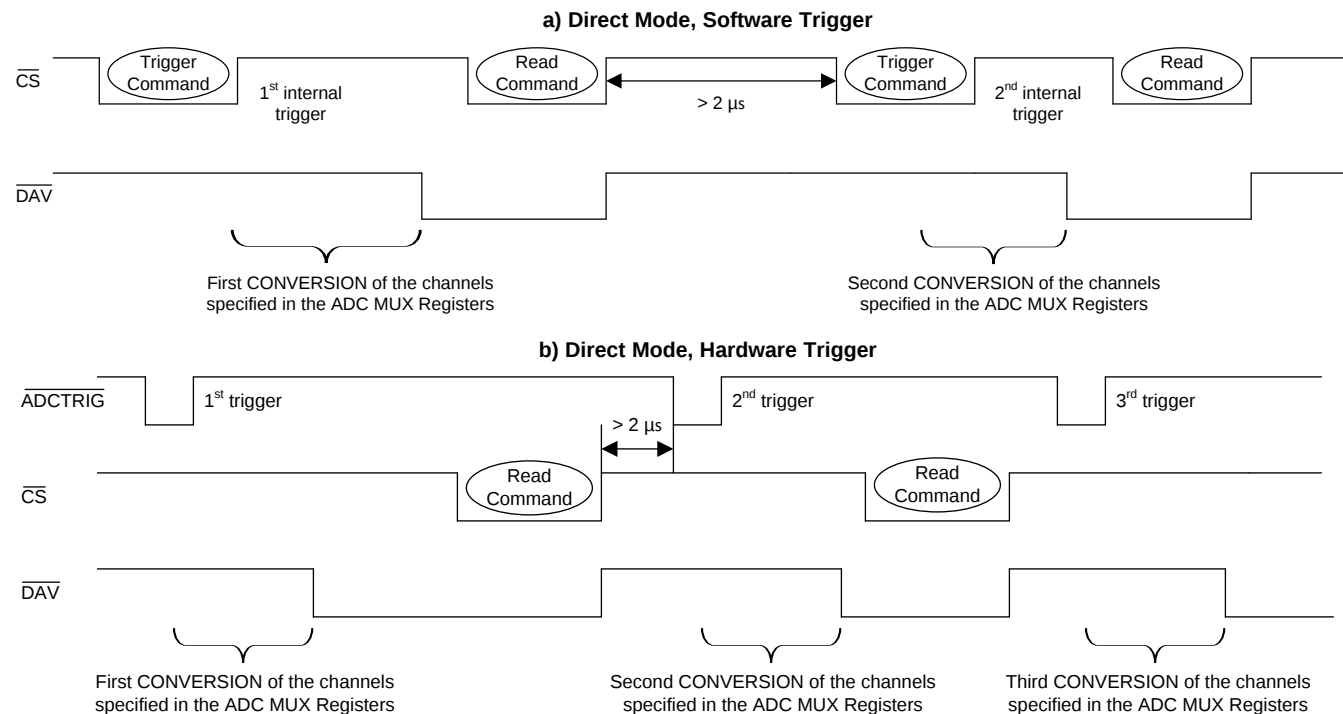


**Figure 53. ADC Direct-Mode Trigger Synchronization**

### 7.3.2.4 Programmable Out-of-Range Alarms

The AMC7836 device is capable of continuously analyzing the five external unipolar inputs and internal temperature sensor conversion results for normal operation.

Normal operation is established through the lower and upper threshold registers (address 0x80 through 0x97). When any of the monitored inputs is out of the specified range, an alarm event is issued and the global alarm bit, GALR in the general status register (0x72), is set (see Figure 54). Use the alarm status registers (0x70 through 0x71) to determine the source of the alarm event.

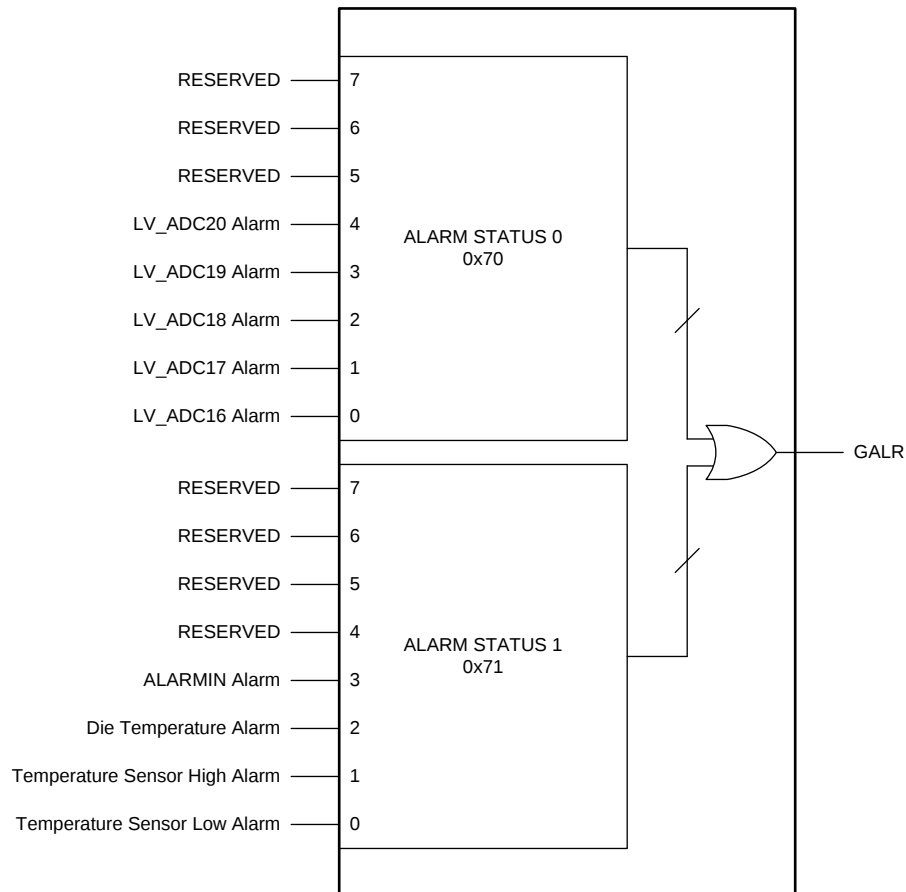


**Figure 54. Alarm Status Register**

The ALARM-LATCH-DIS bit in the ALARMOUT source 1 register (address 0x1D) sets the latching behavior for all alarms (except for the ALARMIN alarm which is always unlatched). When the ALARM-LATCH-DIS bit is cleared to 0 the alarm bits in the alarm status registers are latched. The alarm bits are referred to as being latched because they remain set until read by software. This design ensures that out-of-limit events cannot be missed if the software is polling the device periodically. All bits are cleared when reading the alarm status registers, and all bits are reasserted if the out-of limit condition still exists on the next monitoring cycle, unless otherwise noted. When the ALARM-LATCH-DIS bit is set to 1, the alarm bits are not latched. The alarm bits in the alarm status registers are set to 0 when the error condition subsides, regardless of whether the bit is read or not.

All of the alarms can be set to activate the ALARMOUT pin. To enable this functionality, the GPIO1/ALARMOUT pin must be configured accordingly in the GPIO configuration register (address 0x12). The ALARMOUT pin works as an interrupt to the host so that it can query the alarm status registers to determine the alarm source. Any alarm event can activate the pin as long as the alarm is not masked in the ALARMOUT source registers (address 0x1C through 0x1D). When an alarm event is masked, the occurrence of the event sets the corresponding status bit in the alarm status registers, but does not activate the ALARMOUT pin.

### 7.3.2.4.1 Unipolar Inputs Out-of-Range Alarms

The AMC7836 device provides out-of-range detection for the five external unipolar ADC inputs (LV\_ADC16 through LV\_ADC20, pins 35 through 39). [Figure 55](#) shows the out-of-range detection block. When the measurement is out-of-range, the corresponding alarm bit in the alarm status 0 register (address 0x70) is set to 1 to flag the out-of-range condition. The values in the ADC upper and lower Threshold registers (address 0x80 through 0x93) define the upper and lower bound thresholds for all five inputs.

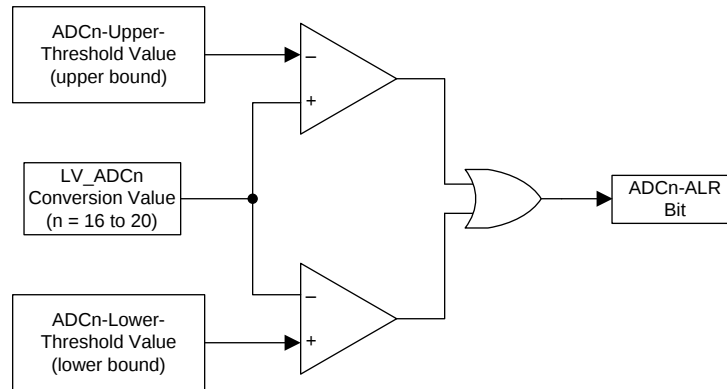


**Figure 55. Unipolar Inputs Out-of-Range Alarms**

### 7.3.2.4.2 Unipolar Inputs Out-of-Range Alarms

The AMC7836 includes high-limit and low-limit detection for the internal temperature sensor. [Figure 56](#) shows the temperature detection block. The values in the LT upper and lower threshold registers (address 0x94 through 0x97) set the limits for the temperature sensor. The temperature sensor detector can issue either a high-alarm (LT-HIGH-ALR bit) or a low-alarm (LT-LOW-ALR bit) in the alarm status 1 register (address 0x71) depending on whether the high or low thresholds were exceeded. To implement single, upper-bound threshold detection for the temperature sensor, the host processor can set the upper-bound threshold to the desired value and the lower-bound threshold to the default value. For lower-bound threshold detection, the host processor can set the lower-bound threshold to the desired value and the upper-bound threshold to the default value.

In addition to the programmable threshold alarms the temperature sensor detection circuit also includes a die thermal-alarm flag which continuously monitors the die temperature. When the die temperatures exceeds 150°C the die thermal alarm flag (THERM-ALR bit) in the alarm status 1 register (address 0x71) is set. The internal temperature sensor must be enabled for this alarm to be functional.

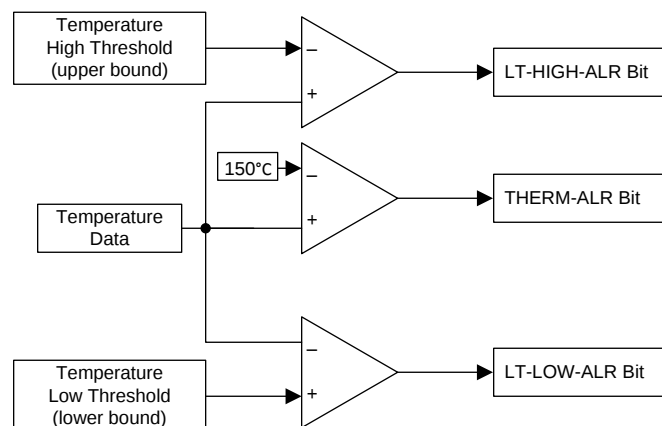

**Figure 56. Internal Temperature Out-of-Range Alarms**

#### 7.3.2.4.3 **ALARMIN Alarm**


The AMC7836 device offers the option of using an external interrupt signal, such as the output of a comparator as an alarm event. The GPIO0/ALARMIN pin is used as the alarm input and must be configured accordingly in the GPIO configuration register (address 0x12). The pin is active low when configured as an alarm input.

A typical application for ALARMIN pin is to use it as a hardware interrupt that is responsible for forcing one or more DACs to a CLEAR state. The DAC is loaded with a zero-code input and the output voltage is set according to the operating output range, however the DAC buffer or active registers do not change (see the [Digital-to-Analog Converters \(DACs\)](#) section for more details). To enable this functionality the ALARMIN pin must be enabled as a DAC clear-alarm source in the DAC clear source 1 register (address 0x1B). Additionally the DAC outputs to be cleared by the ALARMIN pin must be specified in the DAC clear enable registers (address 0x18 through 0x19).

In this application when the ALARMIN pin goes low, all the DACs that are set to clear in response to the ALARMIN alarm in the DAC-clear enable registers enter a CLEAR state. When the ALARMIN pin goes back high the DACs are reloaded with the contents of the DAC active registers which allows the DAC outputs to return to the previous operating point without any additional commands.

#### 7.3.2.4.4 **Hysteresis**

If a monitored signal is out of range and the alarm is enabled, the corresponding alarm bit is set to 1. However, the alarm condition is cleared only when the conversion result returns either a value lower than the high threshold register setting or higher than the low threshold register setting by the number of codes specified in the hysteresis setting (see [Figure 57](#)). The ADC and LT hysteresis registers (address 0xA0 through 0xA4) store the hysteresis value for the external unipolar inputs and internal temperature sensor programmable alarms. The hysteresis is a programmable value between 0 LSB to 127 LSB for the unipolar inputs alarms and 0°C to 31°C for the internal temperature-sensor alarms. The die thermal alarm hysteresis is fixed at 8°C.

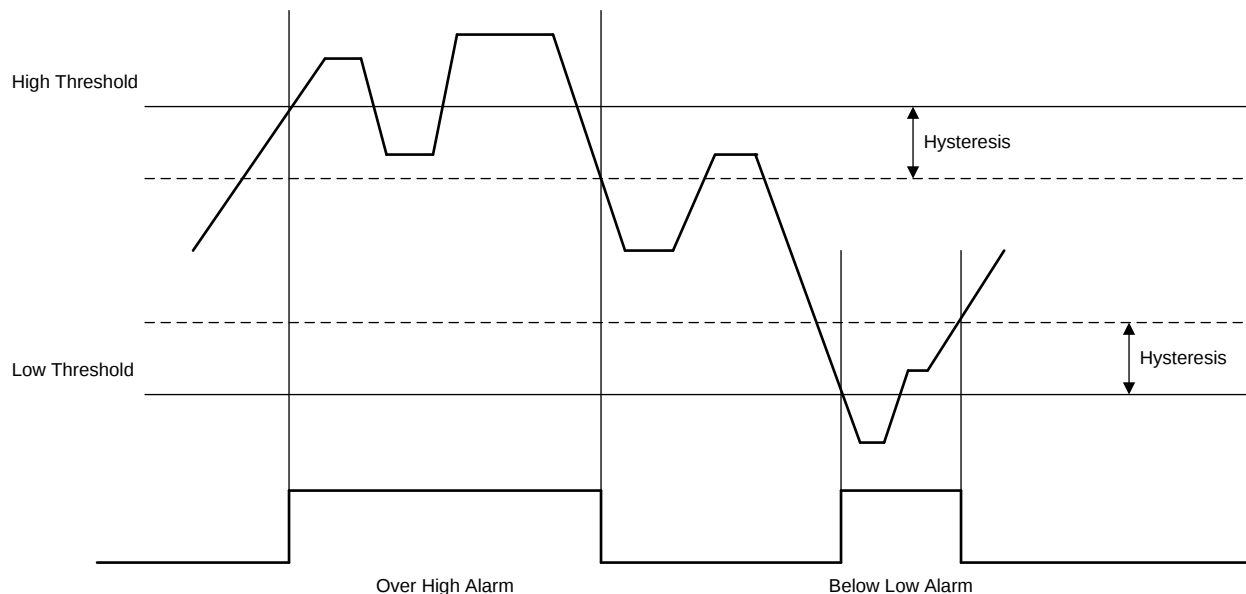

**Figure 57. Device Hysteresis**

#### 7.3.2.4.5 **False-Alarm Protection**

To prevent false alarms, an alarm event is only registered when the monitored signal is out of range for an *N* number of consecutive conversions. If the monitored signal returns to the normal range before *N* consecutive conversions, an alarm event is not issued. The false alarm factor, *N*, for the unipolar input and local temperature sensor out-of-range alarms can be configured in the false alarm configuration register (address 0x11).

### 7.3.3 Internal Temperature Sensor

The AMC7836 device has an on-chip temperature sensor that measures the device die temperature. The normal operating temperature range for the internal temperature sensor is limited by the operating temperature range of the device (–40°C to 125°C).

The temperature sensor results are converted by the device ADC at a lower speed than the analog input channels. The temperature can be monitored either continuously or as a single-time conversion depending on whether the ADC is configured in auto mode or direct mode (see the [Analog-to-Digital Converter \(ADC\)](#) section for more details). If the temperature sensor is not needed, it can be disabled in the ADC MUX configuration 2 register (address 0x15). When disabled, the temperature sensor output is not converted by the ADC.

The temperature sensor provides 0.25°C resolution over the operating temperature range. The temperature value is stored in 12-bit two's complement format in the temperature data registers (address 0x78 through 0x79).

**Table 3. Temperature Sensor Data Format**

| TEMPERATURE (°C) | DIGITAL CODE   |
|------------------|----------------|
| –40              | 1111 0110 0000 |
| –25              | 1111 1001 1100 |
| –10              | 1111 1101 1000 |
| –0.25            | 1111 1111 1111 |
| 0                | 0000 0000 0000 |
| 0.25             | 0000 0000 0001 |
| 10               | 0000 0010 1000 |
| 25               | 0000 0110 0100 |
| 50               | 0000 1100 1000 |
| 75               | 0001 0010 1100 |
| 100              | 0001 1001 0000 |
| 105              | 0001 1010 0100 |
| 125              | 0001 1111 0100 |

Use [Equation 3](#) and [Equation 4](#) to calculate the positive or negative temperature according to the polarity of the temperature data MSB (0 - positive, 1 - negative).

$$\text{Positive Temperature (°C)} = \frac{\text{ADC\_Code}}{4} \quad (3)$$

$$\text{Negative Temperature (°C)} = \frac{4096 - \text{ADC\_Code}}{4} \quad (4)$$

### 7.3.4 Internal Reference

The AMC7836 device includes a high-performance internal reference for the on-chip ADC and 16 DACs (see Figure 58). The internal reference is a 2.5 V, bipolar transistor-based, precision bandgap reference. A compensation capacitor (4.7  $\mu$ F, typical) should be connected between the REF\_CMP pin and the AGND2 pin.

The AMC7836 device includes a buffer to drive the ADC and should not be used to drive any external circuitry. The ADC reference buffer is powered down by default and should be enabled in the ADC configuration register (address 0x10) during device initialization.

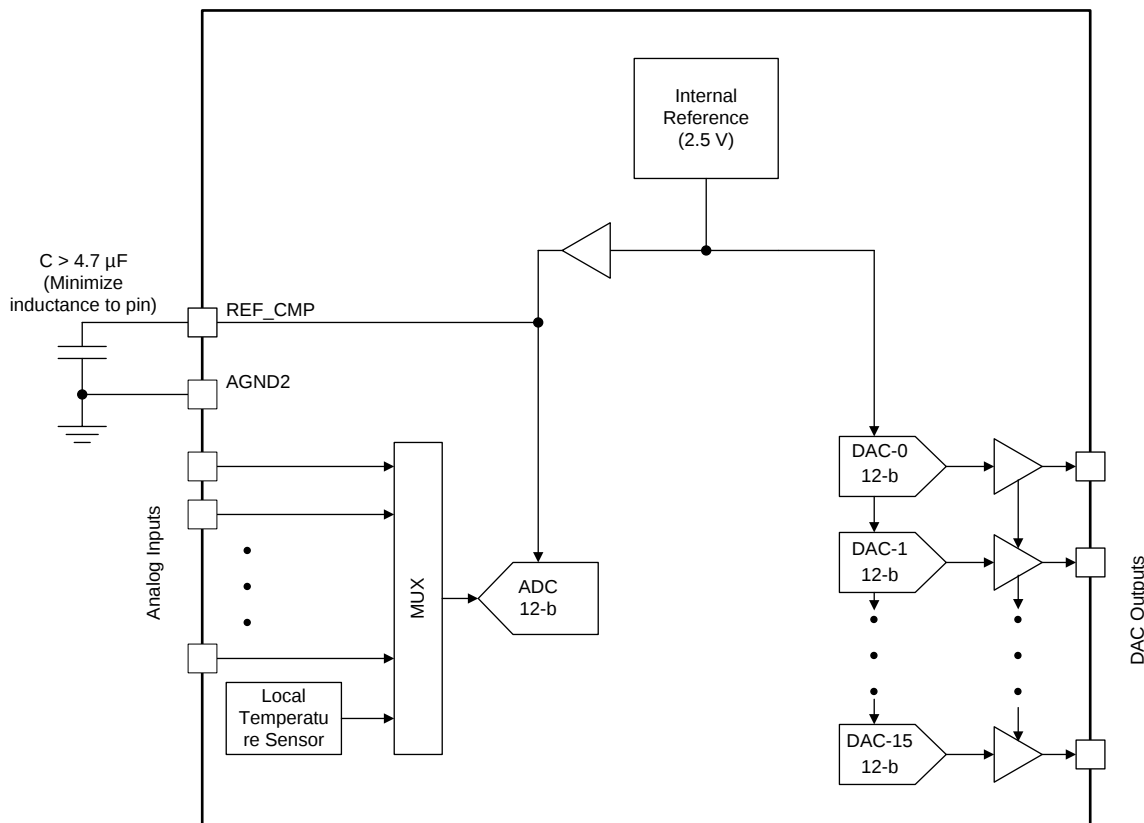


Figure 58. AMC7836 Internal Reference

The internal reference is typically established after power-up in less than 5 ms at  $T_A = 25^\circ\text{C}$  however the reference settling time is highly dependent on temperature. Figure 59 shows typical reference settling time as a function of temperature.

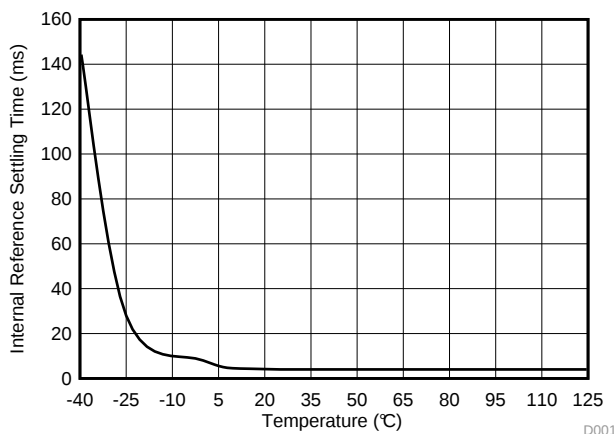


Figure 59. Internal Reference Settling Time vs Temperature

### 7.3.5 General Purpose I/Os


The AMC7836 device includes eight GPIO pins, each with an internal 48-k $\Omega$  pullup resistor to the IOV<sub>DD</sub> pin. The GPIO[0:3] pins have dual functionality and can be programmed as either bidirectional digital I/O pins or interrupt signals in the GPIO configuration register (address 0x12). The GPIO[4:7] pins are dedicated GPIOs. [Table 4](#) lists the dual function of the GPIO[0:3] pins.

**Table 4. Dual Functionality GPIO Pins**

| PIN | DEFAULT PIN NAME | ALTERNATIVE PIN NAME         | ALTERNATIVE FUNCTIONALITY        |
|-----|------------------|------------------------------|----------------------------------|
| 7   | GPIO0            | $\overline{\text{ALARMIN}}$  | DAC clear control signal.        |
| 8   | GPIO1            | $\overline{\text{ALARMOUT}}$ | Global alarm output.             |
| 9   | GPIO2            | $\overline{\text{ADCTRIG}}$  | External ADC conversion trigger. |
| 10  | GPIO3            | $\overline{\text{DAV}}$      | ADC data available indicator.    |

The GPIOs can receive an input or produce an output. When the GPIO<sub>n</sub> pin acts as an output, the status of the pin is determined by the corresponding GPIO bit in the GPIO register (address 0x7A).

To use a GPIO<sub>n</sub> pin as an input, the corresponding GPIO bit in the GPIO register must be set to 1. When a GPIO<sub>n</sub> pin acts as input, the digital value on the pin is acquired by reading the corresponding GPIO bit. After a power-on reset (POR) or any forced reset, all GPIO bits are set to 1, and the GPIO<sub>n</sub> pins have a 48-k $\Omega$  input impedance to the IOV<sub>DD</sub> pin (see [Figure 60](#)). The unused GPIO pins can be left floating.

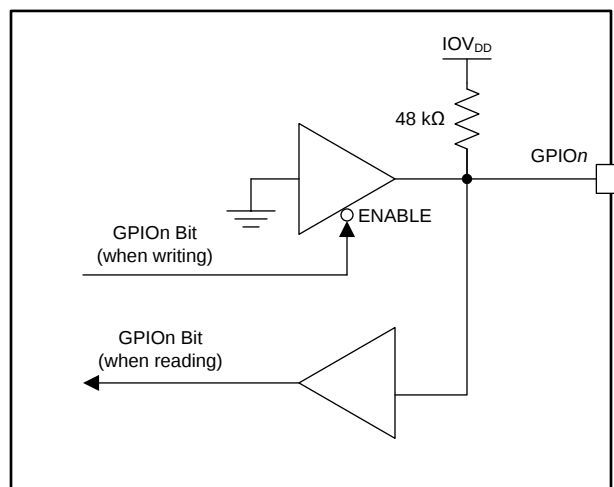

**Figure 60. AMC7836 GPIO Pin**

## 7.4 Device Functional Modes

The sixteen DACs in the AMC7836 device are split into four groups, each with four DACs. The output range and clamp voltage for each DAC group is set independently which enables the device to operate in one of the following modes:

- All-positive DAC range mode
- All-negative DAC range mode
- Mixed DAC range mode

### 7.4.1 All-Positive DAC Range Mode

In the AMC7836 all-positive DAC range mode, each of the four DAC groups is set to a positive voltage output range (0 to 5 V or 0 to 10 V).

Because the maximum DAC output for each group cannot exceed the common  $AV_{CC}$  voltage for the device ( $AV_{CC} = AV_{CC\_AB} = AV_{CC\_CD}$ ), a DAC group in the 0 to 10 V output range forces the  $AV_{CC}$  voltage to a value greater or equal to 10 V even if the remaining DAC groups are set in the 0 to 5 V range. If all DAC groups are set in the 0 to 5 V range the  $AV_{CC}$  voltage can be set to a value as low as 5 V.

The minimum DAC output for each group cannot be lower than the  $AV_{SS}$  voltage but because the minimum DAC output is 0 V in the all-positive DAC range mode, all of the  $AV_{SS}$  pins ( $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$ , and  $AV_{SSD}$ ) as well as the device thermal pad can be tied to AGND thus simplifying the board design. Table 5 lists the typical configurations for this mode.

**Table 5. All-positive DAC Range Mode Typical Configuration**

| PIN                                  | NOTES                                                                                                                                                                                                  | TYPICAL CONNECTION                                      |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| $AV_{DD}$                            |                                                                                                                                                                                                        | 5 V                                                     |
| $DV_{DD}$                            | $DV_{DD}$ must be equal to $AV_{DD}$ .                                                                                                                                                                 | 5 V                                                     |
| $IOV_{DD}$                           | $IOV_{DD}$ must be equal to or less than $DV_{DD}$ .                                                                                                                                                   | 1.8 V to 5 V                                            |
| $AV_{CC\_AB}$ , $AV_{CC\_CD}$        | The $AV_{CC\_AB}$ and $AV_{CC\_CD}$ pins must be tied to the same potential ( $AV_{CC}$ ).<br>$AV_{CC}$ must be greater or equal than the maximum possible output voltage for any of the sixteen DACs. | $AV_{CC} \geq 5\text{ V}$<br>$AV_{CC} \geq 10\text{ V}$ |
| $AV_{EE}$                            |                                                                                                                                                                                                        | AGND                                                    |
| $AV_{SSB}$ , $AV_{SSC}$ , $AV_{SSD}$ |                                                                                                                                                                                                        | AGND                                                    |
| Thermal Pad                          |                                                                                                                                                                                                        | AGND                                                    |

After power-on or a reset event the output range for each DAC group is set automatically by the voltage present on the corresponding  $AV_{SS}$  pin. In the all-positive DAC range mode all  $AV_{SS}$  pins are connected to AGND and consequently all four DAC groups will initialize by default to the 0 to 5 V range. The output for any of the DAC groups can be modified to the 0 to 10 V range after initialization by setting the corresponding DAC range register (address 0x1E to 0x1F) to 110b.

In addition to setting the default output range, the  $AV_{SS}$  pins also set the clamp voltage for each DAC group. Because the clamp voltage is only dependent on the voltage in the  $AV_{SS}$  pin, changes to the DAC range registers do not affect the clamp setting. With the  $AV_{SS}$  pins connected to AGND, the clamp voltage for all sixteen DACs is 0 V.

## 7.4.2 All-Negative DAC Range Mode

In the AMC7836 all-negative DAC range mode, each of the four DAC groups is set to a negative voltage output range (–5 to 0 V or –10 to 0 V).

Although the maximum DAC output does not exceed 0 V, the common  $AV_{CC}$  voltage ( $AV_{CC} = AV_{CC\_AB} = AV_{CC\_CD}$ ) must still satisfy a minimum voltage of 4.7 V to comply with the device operating conditions. In this case a recommended approach is to tie the  $AV_{CC}$ ,  $AV_{DD}$ , and  $DV_{DD}$  supply pins to a common potential.

The minimum DAC output for each group cannot be lower than the voltage on the corresponding  $AV_{SS}$  pins ( $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$ , and  $AV_{SSD}$ ). The  $AV_{SS}$  pins are not required to be tied to the same potential and typically the negative voltage at each  $AV_{SS}$  pin is dictated by the desired operating DAC negative output range. One exception is the  $AV_{EE}$  pin which must be the lowest potential in the device. The thermal pad should be either tied to the same potential as the  $AV_{EE}$  pin or left disconnected. Table 6 lists the typical configurations for this mode.

**Table 6. All-Negative DAC Range Mode Typical Configuration**

| PIN                                  | NOTES                                                                                                                                                 | TYPICAL CONNECTION                                                      |
|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| $AV_{DD}$                            |                                                                                                                                                       | 5 V                                                                     |
| $DV_{DD}$                            | $DV_{DD}$ must be equal to $AV_{DD}$ .                                                                                                                | 5 V                                                                     |
| $IOV_{DD}$                           | $IOV_{DD}$ must be equal to or less than $DV_{DD}$ .                                                                                                  | 1.8 V to 5 V                                                            |
| $AV_{CC\_AB}$ , $AV_{CC\_CD}$        | The $AV_{CC\_AB}$ and $AV_{CC\_CD}$ pins must be tied to the same potential ( $AV_{CC}$ ).                                                            | 5 V                                                                     |
| $AV_{EE}$                            | $AV_{EE}$ must be the lowest potential in the device.<br>$AV_{EE}$ must be less than or equal to the minimum possible output voltage for DAC group A. | $AV_{EE} \leq -5$ V<br>$AV_{EE} \leq -10$ V                             |
| $AV_{SSB}$ , $AV_{SSC}$ , $AV_{SSD}$ | $AV_{SSn}$ must be less than or equal to the minimum possible output voltage for DAC group n (n = B, C, D).                                           | $AV_{EE} \leq AV_{SSn} \leq -5$ V<br>$AV_{EE} \leq AV_{SSn} \leq -10$ V |
| Thermal Pad                          |                                                                                                                                                       | $AV_{EE}$ or,<br>Floating                                               |

After power-on or a reset event the output range for each DAC group is set automatically by the voltage present in the corresponding  $AV_{SS}$  pin. In the all-negative DAC range mode all  $AV_{SS}$  pins should be connected to a voltage lower than  $AV_{SSTH}$ . If this condition is satisfied, all four DAC groups will initialize by default to the –10- to 0-V range. Because the negative clamp voltage is only dependent on the voltage in the  $AV_{SS}$  pin, the default –10- to 0-V output range presents no risk even when the  $AV_{SS}$  voltage is greater than –10 V. In this case the DAC group output should be modified to the –5 to 0 V range after initialization by setting the corresponding DAC range register (address 0x1E to 0x1F) to 101b.

### 7.4.3 Mixed DAC Range Mode

In the AMC7836 mixed DAC range mode, a combination of DAC groups is set to a negative voltage output range (–5 to 0 V or –10 to 0 V) and a positive voltage output range (0 to 5 V or 0 to 10 V).

Because the maximum DAC output for each group cannot exceed the common  $AV_{CC}$  voltage for the device ( $AV_{CC} = AV_{CC\_AB} = AV_{CC\_CD}$ ), a DAC group in the 0 to 10 V output range forces the  $AV_{CC}$  voltage to a value greater or equal to 10 V. If all positive DAC groups are in the 0 to 5 V range the  $AV_{CC}$  voltage can be set to a value as low as 5 V.

The minimum DAC output for each group cannot be lower than the voltage on the corresponding  $AV_{SS}$  pins ( $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$  and  $AV_{SSD}$ ). The  $AV_{SS}$  pins are not required to be tied to the same potential and typically the negative voltage at each  $AV_{SS}$  pin is dictated by the desired operating DAC negative output range. One exception is the  $AV_{EE}$  pin which must be the lowest potential in the device. The implication of this requirement is that if either DAC group B, C or D is set to a negative output range, DAC group A must also be set to a negative range. The thermal pad should be either tied to the same potential as the  $AV_{EE}$  pin or left disconnected. [Table 7](#) lists the typical configurations for this mode.

**Table 7. Mixed DAC Range Mode Typical Configuration**

| PIN                                  | NOTES                                                                                                                                                                                                              | TYPICAL CONNECTION                          |                                                                         |
|--------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------------------------------------------------------------------|
| $AV_{DD}$                            |                                                                                                                                                                                                                    | 5 V                                         |                                                                         |
| $DV_{DD}$                            | $DV_{DD}$ must be equal to $AV_{DD}$ .                                                                                                                                                                             | 5 V                                         |                                                                         |
| $IOV_{DD}$                           | $IOV_{DD}$ must be equal to or less than $DV_{DD}$ .                                                                                                                                                               | 1.8 V to 5 V                                |                                                                         |
| $AV_{CC\_AB}$ , $AV_{CC\_CD}$        | The $AV_{CC\_AB}$ and $AV_{CC\_CD}$ pins must be tied to the same potential ( $AV_{CC}$ ).<br>$AV_{CC}$ must be greater or equal to the maximum possible output voltage for any of the positive output range DACs. | $AV_{CC} \geq 5$ V<br>$AV_{CC} \geq 10$ V   |                                                                         |
| $AV_{EE}$                            | $AV_{EE}$ must be the lowest potential in the device.<br>$AV_{EE}$ must be less than or equal to the minimum possible output voltage for DAC group A.                                                              | $AV_{EE} \leq -5$ V<br>$AV_{EE} \leq -10$ V |                                                                         |
| $AV_{SSB}$ , $AV_{SSC}$ , $AV_{SSD}$ | $AV_{SSn}$ must be less than or equal than the minimum possible output voltage for DAC group n (n = B, C, D).                                                                                                      | Negative Range                              | $AV_{EE} \leq AV_{SSn} \leq -5$ V<br>$AV_{EE} \leq AV_{SSn} \leq -10$ V |
|                                      |                                                                                                                                                                                                                    | Positive Range                              | AGND                                                                    |
| Thermal Pad                          |                                                                                                                                                                                                                    | $AV_{EE}$ or,<br>Floating                   |                                                                         |

After power-on or a reset event the output range for each DAC group is set automatically by the voltage present in the corresponding  $AV_{SS}$  pin. When the  $AV_{SS}$  voltage of a DAC group is lower than the threshold value,  $AV_{SSTH}$ , the output for that DAC group is automatically configured to the –10 to 0 V range. Conversely, if the  $AV_{SS}$  voltage of the DAC group is higher than  $AV_{SSTH}$ , the DAC-group output is automatically set to the 0 to 5 V range. The output for any of the DAC groups can be modified after initialization by setting the corresponding DAC range register (address 0x1E to 0x1F).

In addition to setting the default output range, the  $AV_{SS}$  pins also set the clamp voltage for each DAC group. Because the clamp voltage is only dependent on the voltage in the  $AV_{SS}$  pin, changes to the DAC range registers do not affect the clamp setting.

#### NOTE


Although not a recommended operating condition, the device allows a DAC group to operate in a positive output range even if the clamp voltage is negative ( $AV_{SS}$  connected to a negative supply voltage).

## 7.5 Programming


The AMC7836 device is controlled through a flexible four-wire serial interface that is compatible with SPI-type interfaces used on many microcontrollers and DSP controllers. The interface provides read and write (R/W) access to all registers of the AMC7836 device.

Each serial-interface access cycle is exactly  $(N + 2)$  bytes long, where  $N$  is the number of data bytes. Asserting the  $\overline{\text{CS}}$  pin low initiates a frame. The frame ends when the  $\overline{\text{CS}}$  pin is deasserted high. In MSB-first mode, the first bit transferred is the R/W bit. The next 15 bits are the register address (32768 addressable registers), and the remaining bits are data. For all writes, data is committed in bytes as the eight data bit of a data field that is clocked in on the rising edge of SCLK. If the write access is not an even multiple of 8 clocks, the trailing data bits are not committed. On a read access, data is clocked out on the falling edge of the serial interface clock, SCLK, on the SDO pin.

Figure 61 and Figure 62 show the access protocol used by the interface.

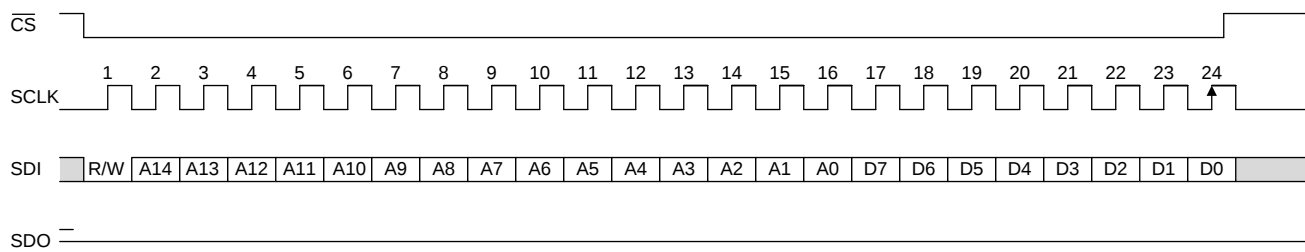

**Figure 61. Serial Interface Write Bus Cycle**

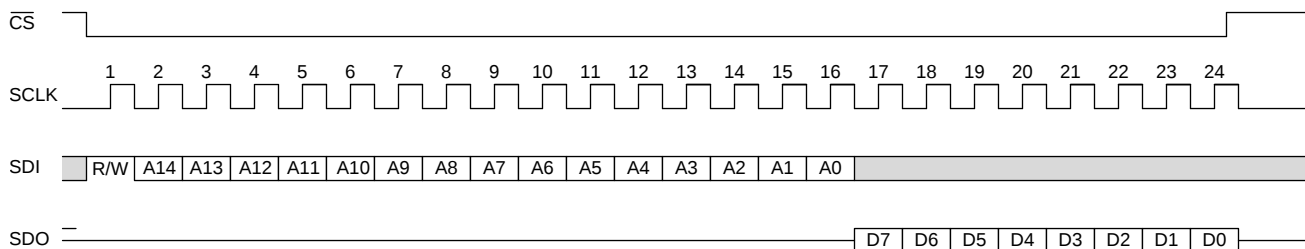

**Figure 62. Serial Interface Read Bus Cycle**


Streaming mode is supported for operations that require large amounts of data to be passed to or from the AMC7836. In streaming mode multiple bytes of data can be written to or read from the AMC7836 without specifically providing instructions for each byte. Streaming mode is implemented by continually holding the  $\overline{\text{CS}}$  pin active and continuing to shift new data in or old data out of the device.

The instruction phase includes the starting address. The AMC7836 device begins reading or writing data to this address and continues as long as the  $\overline{\text{CS}}$  pin is asserted and single byte writes have not been enabled in the interface configuration 1 register (address 0x01). The AMC7836 device automatically increments or decrements the address depending on the setting of the address ascension bit in the interface configuration 0 register (address 0x00).


If the address is decrementing and address 0x0000 is reached, the next address used is 0x7FFF. If the address is incrementing and address 0x7FFF is reached, the next address used is 0x0000. Care should be taken when writing to address 0x0000 and 0x0001 as writing to these addresses may change the configuration of the serial interface. Therefore address 0x0010 should be the first (ascending) or last (descending) address accessed in streaming mode.

Figure 63 and Figure 64 show the access protocol used in streaming mode.

## Programming (continued)

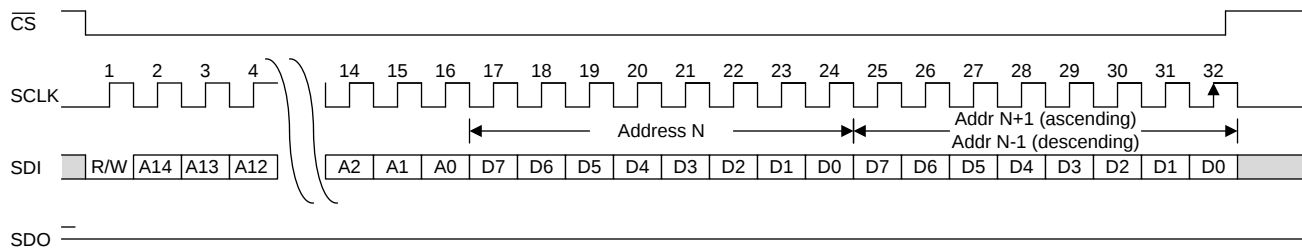

**Figure 63. Serial Interface Streaming Write Example**

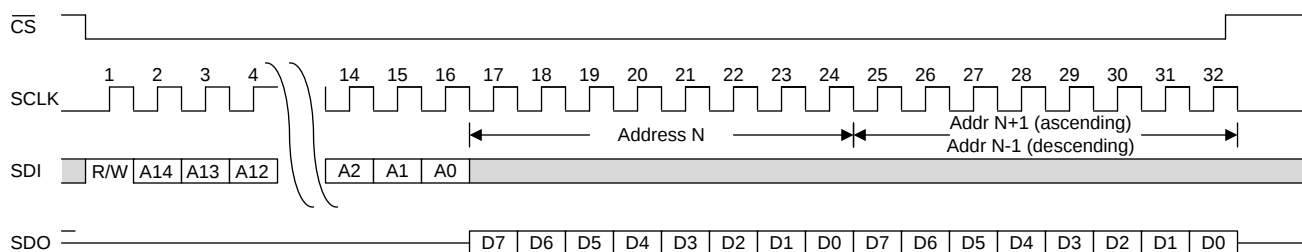

**Figure 64. Serial Interface Streaming Read Example**

## 7.6 Register Maps

**Table 8. Register Map**

| ADDRESS     | TYPE | DEFAULT | REGISTER NAME               |
|-------------|------|---------|-----------------------------|
| 0x00        | R/W  | 30      | Interface Configuration 0   |
| 0x01        | R/W  | 00      | Interface Configuration 1   |
| 0x02        | R/W  | 03      | Device Configuration        |
| 0x03        | R    | 08      | Chip Type                   |
| 0x04        | R    | 36      | Chip ID (Low Byte)          |
| 0x05        | R    | 0C      | Chip ID (High Byte)         |
| 0x06        | R    | 00      | Chip Version                |
| 0x07 – 0x0B | —    | —       | Reserved                    |
| 0x0C        | R    | 51      | Manufacturer ID (Low Byte)  |
| 0x0D        | R    | 04      | Manufacturer ID (High Byte) |
| 0x0E        | —    | —       | Reserved                    |
| 0x0F        | R/W  | 00      | Register Update             |
| 0x10        | R/W  | 00      | ADC Configuration           |
| 0x11        | R/W  | 70      | False Alarm Configuration   |
| 0x12        | R/W  | 00      | GPIO Configuration          |
| 0x13        | R/W  | 00      | ADC MUX Configuration 0     |
| 0x14        | R/W  | 00      | ADC MUX Configuration 1     |
| 0x15        | R/W  | 00      | ADC MUX Configuration 2     |
| 0x16        | —    | —       | Reserved                    |
| 0x17        | —    | —       | Reserved                    |
| 0x18        | R/W  | 00      | DAC Clear Enable 0          |
| 0x19        | R/W  | 00      | DAC Clear Enable 1          |
| 0x1A        | R/W  | 00      | DAC Clear Source 0          |
| 0x1B        | R/W  | 00      | DAC Clear Source 1          |
| 0x1C        | R/W  | 00      | ALARMOUT Source0            |
| 0x1D        | R/W  | 00      | ALARMOUT Source1            |
| 0x1E        | R/W  | 00      | DAC Range 0                 |
| 0x1F        | R/W  | 00      | DAC Range 1                 |
| 0x20        | R    | 00      | ADC0-Data (Low Byte)        |
| 0x21        | R    | 00      | ADC0-Data (High Byte)       |
| 0x22        | R    | 00      | ADC1-Data (Low Byte)        |
| 0x23        | R    | 00      | ADC1-Data (High Byte)       |
| 0x24        | R    | 00      | ADC2-Data (Low Byte)        |
| 0x25        | R    | 00      | ADC2-Data (High Byte)       |
| 0x26        | R    | 00      | ADC3-Data (Low Byte)        |
| 0x27        | R    | 00      | ADC3-Data (High Byte)       |
| 0x28        | R    | 00      | ADC4-Data (Low Byte)        |
| 0x29        | R    | 00      | ADC4-Data (High Byte)       |
| 0x2A        | R    | 00      | ADC5-Data (Low Byte)        |
| 0x2B        | R    | 00      | ADC5-Data (High Byte)       |
| 0x2C        | R    | 00      | ADC6-Data (Low Byte)        |
| 0x2D        | R    | 00      | ADC6-Data (High Byte)       |
| 0x2E        | R    | 00      | ADC7-Data (Low Byte)        |
| 0x2F        | R    | 00      | ADC7-Data (High Byte)       |
| 0x30        | R    | 00      | ADC8-Data (Low Byte)        |

**Table 8. Register Map (continued)**

| ADDRESS     | TYPE | DEFAULT | REGISTER NAME                |
|-------------|------|---------|------------------------------|
| 0x31        | R    | 00      | ADC8-Data (High Byte)        |
| 0x32        | R    | 00      | ADC9-Data (Low Byte)         |
| 0x33        | R    | 00      | ADC9-Data (High Byte)        |
| 0x34        | R    | 00      | ADC10-Data (Low Byte)        |
| 0x35        | R    | 00      | ADC10-Data (High Byte)       |
| 0x36        | R    | 00      | ADC11-Data (Low Byte)        |
| 0x37        | R    | 00      | ADC11-Data (High Byte)       |
| 0x38        | R    | 00      | ADC12-Data (Low Byte)        |
| 0x39        | R    | 00      | ADC12-Data (High Byte)       |
| 0x3A        | R    | 00      | ADC13-Data (Low Byte)        |
| 0x3B        | R    | 00      | ADC13-Data (High Byte)       |
| 0x3C        | R    | 00      | ADC14-Data (Low Byte)        |
| 0x3D        | R    | 00      | ADC14-Data (High Byte)       |
| 0x3E        | R    | 00      | ADC15-Data (Low Byte)        |
| 0x3F        | R    | 00      | ADC15-Data (High Byte)       |
| 0x40        | R    | 00      | ADC16-Data (Low Byte)        |
| 0x41        | R    | 00      | ADC16-Data (High Byte)       |
| 0x42        | R    | 00      | ADC17-Data (Low Byte)        |
| 0x43        | R    | 00      | ADC17-Data (High Byte)       |
| 0x44        | R    | 00      | ADC18-Data (Low Byte)        |
| 0x45        | R    | 00      | ADC18-Data (High Byte)       |
| 0x46        | R    | 00      | ADC19-Data (Low Byte)        |
| 0x47        | R    | 00      | ADC19-Data (High Byte)       |
| 0x48        | R    | 00      | ADC20-Data (Low Byte)        |
| 0x49        | R    | 00      | ADC20-Data (High Byte)       |
| 0x4A        | R    | 00      | Temperature Data (Low Byte)  |
| 0x4B        | R    | 00      | Temperature Data (High Byte) |
| 0x4C - 0x4F | —    | —       | Reserved                     |
| 0x50        | R/W  | 00      | DACA0-Data (Low Byte)        |
| 0x51        | R/W  | 00      | DACA0-Data (High Byte)       |
| 0x52        | R/W  | 00      | DACA1-Data (Low Byte)        |
| 0x53        | R/W  | 00      | DACA1-Data (High Byte)       |
| 0x54        | R/W  | 00      | DACA2-Data (Low Byte)        |
| 0x55        | R/W  | 00      | DACA2-Data (High Byte)       |
| 0x56        | R/W  | 00      | DACA3-Data (Low Byte)        |
| 0x57        | R/W  | 00      | DACA3-Data (High Byte)       |
| 0x58        | R/W  | 00      | DACB4-Data (Low Byte)        |
| 0x59        | R/W  | 00      | DACB4-Data (High Byte)       |
| 0x5A        | R/W  | 00      | DACB5-Data (Low Byte)        |
| 0x5B        | R/W  | 00      | DACB5-Data (High Byte)       |
| 0x5C        | R/W  | 00      | DACB6-Data (Low Byte)        |
| 0x5D        | R/W  | 00      | DACB6-Data (High Byte)       |
| 0x5E        | R/W  | 00      | DACB7-Data (Low Byte)        |
| 0x5F        | R/W  | 00      | DACB7-Data (High Byte)       |
| 0x60        | R/W  | 00      | DACC8-Data (Low Byte)        |
| 0x61        | R/W  | 00      | DACC8-Data (High Byte)       |
| 0x62        | R/W  | 00      | DACC9-Data (Low Byte)        |

**Table 8. Register Map (continued)**

| ADDRESS     | TYPE | DEFAULT | REGISTER NAME                  |
|-------------|------|---------|--------------------------------|
| 0x63        | R/W  | 00      | DACC9-Data (High Byte)         |
| 0x64        | R/W  | 00      | DACC10-Data (Low Byte)         |
| 0x65        | R/W  | 00      | DACC10-Data (High Byte)        |
| 0x66        | R/W  | 00      | DACC11-Data (Low Byte)         |
| 0x67        | R/W  | 00      | DACC11-Data (High Byte)        |
| 0x68        | R/W  | 00      | DACD12-Data (Low Byte)         |
| 0x69        | R/W  | 00      | DACD12-Data (High Byte)        |
| 0x6A        | R/W  | 00      | DACD13-Data (Low Byte)         |
| 0x6B        | R/W  | 00      | DACD13-Data (High Byte)        |
| 0x6C        | R/W  | 00      | DACD14-Data (Low Byte)         |
| 0x6D        | R/W  | 00      | DACD14-Data (High Byte)        |
| 0x6E        | R/W  | 00      | DACD15-Data (Low Byte)         |
| 0x6F        | R/W  | 00      | DACD15-Data (High Byte)        |
| 0x70        | R    | 00      | Alarm Status 0                 |
| 0x71        | R    | 00      | Alarm Status 1                 |
| 0x72        | R    | 0C      | General Status                 |
| 0x73 - 0x79 | —    | —       | Reserved                       |
| 0x7A        | R/W  | FF      | GPIO                           |
| 0x7B - 0x7F | —    | —       | Reserved                       |
| 0x80        | R/W  | FF      | ADC16-Upper-Thresh (Low Byte)  |
| 0x81        | R/W  | 0F      | ADC16-Upper-Thresh (High Byte) |
| 0x82        | R/W  | 00      | ADC16-Lower-Thresh (Low Byte)  |
| 0x83        | R/W  | 00      | ADC16-Lower-Thresh (High Byte) |
| 0x84        | R/W  | FF      | ADC17-Upper-Thresh (Low Byte)  |
| 0x85        | R/W  | 0F      | ADC17-Upper-Thresh (High Byte) |
| 0x86        | R/W  | 00      | ADC17-Lower-Thresh (Low Byte)  |
| 0x87        | R/W  | 00      | ADC17-Lower-Thresh (High Byte) |
| 0x88        | R/W  | FF      | ADC18-Upper-Thresh (Low Byte)  |
| 0x89        | R/W  | 0F      | ADC18-Upper-Thresh (High Byte) |
| 0x8A        | R/W  | 00      | ADC18-Lower-Thresh (Low Byte)  |
| 0x8B        | R/W  | 00      | ADC18-Lower-Thresh (High Byte) |
| 0x8C        | R/W  | FF      | ADC19-Upper-Thresh (Low Byte)  |
| 0x8D        | R/W  | 0F      | ADC19-Upper-Thresh (High Byte) |
| 0x8E        | R/W  | 00      | ADC19-Lower-Thresh (Low Byte)  |
| 0x8F        | R/W  | 00      | ADC19-Lower-Thresh (High Byte) |
| 0x90        | R/W  | FF      | ADC20-Upper-Thresh (Low Byte)  |
| 0x91        | R/W  | 0F      | ADC20-Upper-Thresh (High Byte) |
| 0x92        | R/W  | 00      | ADC20-Lower-Thresh (Low Byte)  |
| 0x93        | R/W  | 00      | ADC20-Lower-Thresh (High Byte) |
| 0x94        | R/W  | FF      | LT-Upper-Thresh (Low Byte)     |
| 0x95        | R/W  | 07      | LT-Upper-Thresh (High Byte)    |
| 0x96        | R/W  | 00      | LT-Lower-Thresh (Low Byte)     |
| 0x97        | R/W  | 08      | LT-Lower-Thresh (High Byte)    |
| 0x98 - 0x9F | —    | —       | Reserved                       |
| 0xA0        | R/W  | 08      | ADC16-Hysteresis               |
| 0xA1        | R/W  | 08      | ADC17-Hysteresis               |
| 0xA2        | R/W  | 08      | ADC18-Hysteresis               |

**Table 8. Register Map (continued)**

| ADDRESS     | TYPE | DEFAULT | REGISTER NAME    |
|-------------|------|---------|------------------|
| 0xA3        | R/W  | 08      | ADC19-Hysteresis |
| 0xA4        | R/W  | 08      | ADC20-Hysteresis |
| 0xA5        | R/W  | 08      | LT-Hysteresis    |
| 0xA6 - 0xAF | —    | —       | Reserved         |
| 0xB0        | R/W  | 00      | DAC Clear 0      |
| 0xB1        | R/W  | 00      | DAC Clear 1      |
| 0xB2        | R/W  | 00      | Power-Down 0     |
| 0xB3        | R/W  | 00      | Power-Down 1     |
| 0xB4        | R/W  | 00      | Power-Down 2     |
| 0xB5 - 0xBF | —    | —       | Reserved         |
| 0xC0        | R/W  | 00      | ADC Trigger      |

## 7.6.1 Interface Configuration: Address 0x00 – 0x02

### 7.6.1.1 Interface Configuration 0 Register (address = 0x00) [reset = 0x30]

**Figure 65. Interface Configuration 0 (Interface Config 0) Register (R/W)**

| 7          | 6        | 5           | 4        | 3             | 2 | 1 | 0 |
|------------|----------|-------------|----------|---------------|---|---|---|
| SOFT-RESET | Reserved | ADDR-ASCEND | Reserved | Reserved      |   |   |   |
| R/W-0      | R/W-0    | R/W-1       | R/W-1    | R/W-All zeros |   |   |   |

**Table 9. Interface Config 0 Register Field Descriptions (R/W)**

| Bit | Field       | Type | Reset     | Description                                                                                                                                                                                   |
|-----|-------------|------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | SOFT-RESET  | R/W  | 0         | Soft reset (self-clearing)<br>0: no action<br>1: reset – resets everything except address 0x00, 0x01                                                                                          |
| 6   | Reserved    | R/W  | 0         | Reserved for factory use                                                                                                                                                                      |
| 5   | ADDR-ASCEND | R/W  | 1         | Address Ascend<br>0: Descend – decrements address while streaming (address wrap from 0x0000 to 0x7FFF)<br>1: Ascend – increments address while streaming (address wrap from 0x7FFF to 0x0000) |
| 4   | Reserved    | R/W  | 1         | Reserved for factory use                                                                                                                                                                      |
| 3-0 | Reserved    | R/W  | All zeros | Reserved for factory use                                                                                                                                                                      |

### 7.6.1.2 Interface Configuration 1 Register (address = 0x01) [reset = 0x00]

**Figure 66. Interface Configuration 1 (Interface Config 1) Register (R/W)**

| 7            | 6        | 5        | 4             | 3 | 2 | 1 | 0 |
|--------------|----------|----------|---------------|---|---|---|---|
| SINGLE-INSTR | Reserved | READBACK | Reserved      |   |   |   |   |
| R/W-0        | R/W-0    | R/W-0    | R/W-All zeros |   |   |   |   |

**Table 10. Interface Config 1 Register Field Descriptions**

| Bit | Field        | Type | Reset     | Description                                                                                             |
|-----|--------------|------|-----------|---------------------------------------------------------------------------------------------------------|
| 7   | SINGLE-INSTR | R/W  | 0         | Single instruction enable<br>0: streaming mode (default)<br>1: single instruction                       |
| 6   | Reserved     | R/W  | 0         | Reserved for factory use                                                                                |
| 5   | READBACK     | R/W  | 0         | Read back<br>0: DAC read back from active registers (default)<br>1: DAC read back from buffer registers |
| 4-0 | Reserved     | R/W  | All zeros | Reserved for factory use                                                                                |

### 7.6.1.3 Device Configuration Register (address = 0x02) [reset = 0x03]

**Figure 67. Device Configuration (Device Config) Register (R/W)**

| 7             | 6 | 5 | 4 | 3 | 2 | 1          | 0 |
|---------------|---|---|---|---|---|------------|---|
| Reserved      |   |   |   |   |   | POWER-MODE |   |
| R/W-All Zeros |   |   |   |   |   | R/W-11     |   |

**Table 11. Device Config Register Field Descriptions**

| Bit | Field      | Type | Reset     | Description                                                                                                                                                                                    |
|-----|------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | Reserved   | R/W  | All zeros | Reserved for factory use                                                                                                                                                                       |
| 1-0 | POWER-MODE | R/W  | 11        | Mode:<br>00: Normal operation – full power and full performance<br>11: Power Down – lowest power, non-operational except SPI<br>One time overwrite of the power-down registers (0xB2 and 0xB3) |

## 7.6.2 Device Identification: Address 0x03 – 0x0D

### 7.6.2.1 Chip Type Register (address = 0x03) [reset = 0x08]

**Figure 68. Chip Type Register (R)**

| 7        | 6 | 5 | 4 | 3         | 2 | 1 | 0 |
|----------|---|---|---|-----------|---|---|---|
| Reserved |   |   |   | CHIP-TYPE |   |   |   |
| R-0x0    |   |   |   | R-0x8     |   |   |   |

**Table 12. Chip Type Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                     |
|-----|-----------|------|-------|-----------------------------------------------------------------|
| 7-4 | Reserved  | R    | 0x0   | Reserved for factory use                                        |
| 3-0 | CHIP-TYPE | R    | 0x8   | Identifies the device as a precision analog monitor and control |

**7.6.2.2 Chip ID Low Byte Register (address = 0x04) [reset = 0x36]**
**Figure 69. Chip ID Low Byte Register (R)**

|            |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|
| 7          | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| CHIPID-LOW |   |   |   |   |   |   |   |
| R-0x36     |   |   |   |   |   |   |   |

**Table 13. Chip ID Low Byte Register Field Descriptions**

| Bit | Field      | Type | Reset | Description       |
|-----|------------|------|-------|-------------------|
| 7-0 | CHIPID-LOW | R    | 0x36  | Chip ID. Low byte |

**7.6.2.3 Chip ID High Byte Register (address = 0x05) [reset = 0x0C]**
**Figure 70. Chip ID High Byte Register (R)**

|             |   |   |   |   |   |   |   |
|-------------|---|---|---|---|---|---|---|
| 7           | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| CHIPID-HIGH |   |   |   |   |   |   |   |
| R-0x0C      |   |   |   |   |   |   |   |

**Table 14. Chip ID High Byte Register Field Descriptions**

| Bit | Field       | Type | Reset | Description        |
|-----|-------------|------|-------|--------------------|
| 7-0 | CHIPID-HIGH | R    | 0x0C  | Chip ID. High byte |

**7.6.2.4 Version ID Register (address = 0x06) [reset = 0x00]**
**Figure 71. Version ID Register (R)**

|           |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|
| 7         | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VERSIONID |   |   |   |   |   |   |   |
| R-0x00    |   |   |   |   |   |   |   |

**Table 15. Version ID Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                           |
|-----|-----------|------|-------|---------------------------------------|
| 7-0 | VERSIONID | R    | 0x00  | AMC7836 version ID. Subject to change |

**7.6.2.5 Manufacturer ID Low Byte Register (address = 0x0C) [reset = 0x51]**
**Figure 72. Manufacturer ID Low Byte Register (R)**

|              |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|
| 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VENDORID-LOW |   |   |   |   |   |   |   |
| R-0x51       |   |   |   |   |   |   |   |

**Table 16. Manufacturer ID Low Byte Register Field Descriptions**

| Bit | Field        | Type | Reset | Description               |
|-----|--------------|------|-------|---------------------------|
| 7-0 | VENDORID-LOW | R    | 0x51  | Manufacturer ID. Low byte |

### 7.6.2.6 Manufacturer ID High Byte Register (address = 0x0D) [reset = 0x04]

**Figure 73. Manufacturer ID High Byte Register**

|               |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|
| 7             | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| VENDORID-HIGH |   |   |   |   |   |   |   |
| R-0x04        |   |   |   |   |   |   |   |

**Table 17. Manufacturer ID High Byte Register Field Descriptions**

| Bit | Field         | Type | Reset | Description                |
|-----|---------------|------|-------|----------------------------|
| 7-0 | VENDORID-HIGH | R    | 0x04  | Manufacturer ID. High byte |

### 7.6.3 Register Update (Buffered Registers): Address 0x0F

#### 7.6.3.1 Register Update Register (address = 0x0F) [reset = 0x00]

**Figure 74. Register Update Register (Self Clearing) [R/W]**

|               |   |   |            |               |   |   |        |
|---------------|---|---|------------|---------------|---|---|--------|
| 7             | 6 | 5 | 4          | 3             | 2 | 1 | 0      |
| Reserved      |   |   | ADC-UPDATE | Reserved      |   |   | UPDATE |
| R/W-All Zeros |   |   | R/W-0      | R/W-All Zeros |   |   | R/W-0  |

**Table 18. Register Update Register Field Descriptions**

| Bit | Field      | Type | Reset     | Description                                                                                                                                                                    |
|-----|------------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved   | R/W  | All zeros | Reserved for factory use                                                                                                                                                       |
| 4   | ADC-UPDATE | R/W  | 0         | When set transfers the latest ADC and temperature conversion data to the ADC and Temperature Data registers. This function is needed when operating the ADC in auto-cycle mode |
| 3-1 | Reserved   | R/W  | All zeros | Reserved for factory use                                                                                                                                                       |
| 0   | DAC-UPDATE | R/W  | 0         | DAC update (self clearing)<br>0: disabled<br>1: enabled – transfers data from buffers to active registers (DAC registers only)                                                 |

## 7.6.4 General Device Configuration: Address 0x10 through 0x17

### 7.6.4.1 ADC Configuration Register (address = 0x10) [reset = 0x00]

**Figure 75. ADC Configuration Register (R/W)**

| 7     | 6              | 5 | 4            | 3             | 2 | 1 | 0 |
|-------|----------------|---|--------------|---------------|---|---|---|
| CMODE | CONV-RATE[1:0] |   | ADC-REF-BUFF | Reserved      |   |   |   |
| R/W-0 | R/W-00         |   | R/W-0        | R/W-All zeros |   |   |   |

**Table 19. ADC Configuration Register Field Descriptions**

| Bit | Field          | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|----------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CMODE          | R/W  | 0         | <p>ADC Conversion Mode Bit. This bit selects the ADC conversion mode.</p> <p>0: Direct mode. The analog inputs specified in the ADC channel registers are converted sequentially one time. When one set of conversions is complete, the ADC is idle and waits for a new trigger.</p> <p>1: Auto mode. The analog inputs specified in the AMC channel registers are converted sequentially and repeatedly. When one set of conversions is complete, the ADC multiplexer returns to the first channel and repeats the process. The ADC-UPDATE bit in register 0x0F must be used to initiate the transfer of the latest conversion data to the ADC Data registers.</p> |
| 6-5 | CONV-RATE[1:0] | R/W  | 00        | ADC Conversion rate. See <a href="#">Table 20</a> to configure this setting.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4   | ADC-REF-BUFF   | R/W  | 0         | <p>ADC Reference Buffer bit. This bit must be set to 1 after device power-up to enable the internal reference buffer driving the ADC.</p> <p>0: ADC reference buffer is disabled.</p> <p>1: ADC reference buffer is enabled.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 3-0 | Reserved       | R/W  | All zeros | Reserved for factory use                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

**Table 20. CONV-RATE[1:0] Bit Configuration**

| CONV-RATE[1:0] | Unipolar Channel Sample Time (μs) | Bipolar Channel Sample Time (μs) |
|----------------|-----------------------------------|----------------------------------|
| 00             | 11.5                              | 34.5                             |
| 01             | 23                                | 34.5                             |
| 10             | 34.5                              | 34.5                             |
| 11             | 69                                | 69                               |

### 7.6.4.2 False Alarm Configuration Register (address = 0x11) [reset = 0x70]

**Figure 76. False Alarm Configuration Register (R/W)**

| 7               | 6 | 5 | 4                 | 3 | 2             | 1 | 0 |
|-----------------|---|---|-------------------|---|---------------|---|---|
| CH-FALR-CT[2:0] |   |   | TEMP-FALR-CT[1:0] |   | Reserved      |   |   |
| R/W-011         |   |   | R/W-10            |   | R/W-All zeros |   |   |

**Table 21. False Alarm Configuration Register Field Descriptions**

| Bit | Field             | Type | Reset     | Description                                                                                        |
|-----|-------------------|------|-----------|----------------------------------------------------------------------------------------------------|
| 7-5 | CH-FALR-CT[2:0]   | R/W  | 011       | False alarm protection for ADC channels. See <a href="#">Table 22</a> to configure this bit.       |
| 4-3 | TEMP-FALR-CT[1:0] | R/W  | 10        | False alarm protection for temperature sensor. See <a href="#">Table 23</a> to configure this bit. |
| 2-0 | Reserved          | R/W  | All zeros | Reserved for factory use                                                                           |

**Table 22. CH-FALR-CT Bit Configuration**

| CH-FALR-CT | N Consecutive Samples Before Alarm is Set |
|------------|-------------------------------------------|
| 000        | 1                                         |
| 001        | 4                                         |
| 010        | 8                                         |
| 011        | 16                                        |
| 100        | 32                                        |
| 101        | 64                                        |
| 110        | 128                                       |
| 111        | 256                                       |

**Table 23. TEMP-FALR-CT Bit Configuration**

| TEMP-FALR-CT | N Consecutive Samples Before Alarm is Set |
|--------------|-------------------------------------------|
| 00           | 1                                         |
| 01           | 2                                         |
| 10           | 4                                         |
| 11           | 8                                         |

### 7.6.4.3 GPIO Configuration Register (address = 0x12) [reset = 0x00]

**Figure 77. GPIO Configuration Register (R/W)**

| 7             | 6 | 5 | 4        | 3      | 2          | 1           | 0          |
|---------------|---|---|----------|--------|------------|-------------|------------|
| Reserved      |   |   | Reserved | EN-DAV | EN-ADCTRIG | EN-ALARMOUT | EN-ALARMIN |
| R/W-All zeros |   |   | R/W-0    | R/W-0  | R/W-0      | R/W-0       | R/W-0      |

**Table 24. GPIO Configuration Register Field Descriptions**

| Bit | Field       | Type | Reset     | Description                                                                                                          |
|-----|-------------|------|-----------|----------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved    | R/W  | All zeros | Reserved for factory use                                                                                             |
| 4   | Reserved    | R/W  | 0         | Reserved for factory use                                                                                             |
| 3   | EN-DAV      | R/W  | 0         | $\overline{\text{DAV}}$ pin enable<br>0: GPIO3 operation (default)<br>1: $\overline{\text{DAV}}$ operation           |
| 2   | EN-ADCTRIG  | R/W  | 0         | $\overline{\text{ADCTRIG}}$ pin enable<br>0: GPIO2 operation (default)<br>1: $\overline{\text{ADCTRIG}}$ operation   |
| 1   | EN-ALARMOUT | R/W  | 0         | $\overline{\text{ALARMOUT}}$ pin enable<br>0: GPIO1 operation (default)<br>1: $\overline{\text{ALARMOUT}}$ operation |
| 0   | EN-ALARMIN  | R/W  | 0         | $\overline{\text{ALARMIN}}$ pin enable<br>0: GPIO0 operation (default)<br>1: $\overline{\text{ALARMIN}}$ operation   |

### 7.6.4.4 ADC MUX Configuration 0 Register (address = 0x13) [reset = 0x00]

**Figure 78. ADC MUX Configuration 0 Register (R/W)**

| 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|-------|-------|-------|-------|-------|-------|-------|-------|
| CH7   | CH6   | CH5   | CH4   | CH3   | CH2   | CH1   | CH0   |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |

**Table 25. ADC MUX Configuration 0 Register Field Descriptions**

| Bit | Field | Type | Reset | Description                                                                                                                                                                                                      |
|-----|-------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CH7   | R/W  | 0     | When set to 1 the corresponding analog input channel ADC_n is accessed during an ADC conversion cycle.<br><br>When cleared to 0 the corresponding input channel ADC_n is ignored during an ADC conversion cycle. |
| 6   | CH6   | R/W  | 0     |                                                                                                                                                                                                                  |
| 5   | CH5   | R/W  | 0     |                                                                                                                                                                                                                  |
| 4   | CH4   | R/W  | 0     |                                                                                                                                                                                                                  |
| 3   | CH3   | R/W  | 0     |                                                                                                                                                                                                                  |
| 2   | CH2   | R/W  | 0     |                                                                                                                                                                                                                  |
| 1   | CH1   | R/W  | 0     |                                                                                                                                                                                                                  |
| 0   | CH0   | R/W  | 0     |                                                                                                                                                                                                                  |

#### 7.6.4.5 ADC MUX Configuration 1 Register (address = 0x14) [reset = 0x00]

**Figure 79. ADC MUX Configuration 1 Register (R/W)**

| 7     | 6     | 5     | 4     | 3     | 2     | 1     | 0     |
|-------|-------|-------|-------|-------|-------|-------|-------|
| CH15  | CH14  | CH13  | CH12  | CH11  | CH10  | CH9   | CH8   |
| R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |

**Table 26. ADC MUX Configuration 1 Register Field Descriptions**

| Bit | Field | Type | Reset | Description                                                                                                                                                                                                  |
|-----|-------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CH15  | R/W  | 0     | When set to 1 the corresponding analog input channel ADC_n is accessed during an ADC conversion cycle.<br>When cleared to 0 the corresponding input channel ADC_n is ignored during an ADC conversion cycle. |
| 6   | CH14  | R/W  | 0     |                                                                                                                                                                                                              |
| 5   | CH13  | R/W  | 0     |                                                                                                                                                                                                              |
| 4   | CH12  | R/W  | 0     |                                                                                                                                                                                                              |
| 3   | CH11  | R/W  | 0     |                                                                                                                                                                                                              |
| 2   | CH10  | R/W  | 0     |                                                                                                                                                                                                              |
| 1   | CH9   | R/W  | 0     |                                                                                                                                                                                                              |
| 0   | CH8   | R/W  | 0     |                                                                                                                                                                                                              |

#### 7.6.4.6 ADC MUX Configuration 2 Register (address = 0x15) [reset = 0x00]

**Figure 80. ADC MUX Configuration 2 Register (R/W)**

| 7             | 6       | 5     | 4     | 3     | 2     | 1     | 0     |
|---------------|---------|-------|-------|-------|-------|-------|-------|
| Reserved      | TEMP-CH | CH20  | CH19  | CH18  | CH17  | CH16  |       |
| R/W-All Zeros | R/W-0   | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 | R/W-0 |

**Table 27. ADC MUX Configuration 2 Register Field Descriptions**

| Bit | Field    | Type | Reset     | Description                                                                                                                                                                                                  |
|-----|----------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-6 | Reserved | R/W  | All Zeros | Reserved for factory use                                                                                                                                                                                     |
| 5   | TEMP-CH  | R/W  | 0         | When set to 1 the local temperature sensor is enabled for ADC conversion.<br>When cleared to 0 the local temperature sensor is ignored.                                                                      |
| 4   | CH20     | R/W  | 0         | When set to 1 the corresponding analog input channel ADC_n is accessed during an ADC conversion cycle.<br>When cleared to 0 the corresponding input channel ADC_n is ignored during an ADC conversion cycle. |
| 3   | CH19     | R/W  | 0         |                                                                                                                                                                                                              |
| 2   | CH18     | R/W  | 0         |                                                                                                                                                                                                              |
| 1   | CH17     | R/W  | 0         |                                                                                                                                                                                                              |
| 0   | CH16     | R/W  | 0         |                                                                                                                                                                                                              |

**7.6.4.7 DAC Clear Enable 0 Register (address = 0x18) [reset = 0x00]**
**Figure 81. DAC Clear Enable 0 Register (R/W)**

| 7        | 6        | 5        | 4        | 3        | 2        | 1        | 0        |
|----------|----------|----------|----------|----------|----------|----------|----------|
| CLREN-B7 | CLREN-B6 | CLREN-B5 | CLREN-B4 | CLREN-A3 | CLREN-A2 | CLREN-A1 | CLREN-A0 |
| R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    |

**Table 28. DAC Clear Enable 0 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                  |
|-----|----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CLREN-B7 | R/W  | 0     | This register determines which DACs go into clear state when a clear event is detected as configured in the DAC-CLEAR-SOURCE registers.<br><br>If CLRENN = 1, DAC_n is forced into a clear state with a clear event.<br><br>If CLRENN = 0, a clear event does not affect the state of DAC_n. |
| 6   | CLREN-B6 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 5   | CLREN-B5 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 4   | CLREN-B4 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 3   | CLREN-A3 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 2   | CLREN-A2 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 1   | CLREN-A1 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 0   | CLREN-A0 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |

**7.6.4.8 DAC Clear Enable 1 Register (address = 0x19) [reset = 0x00]**
**Figure 82. DAC Clear Enable 1 Register (R/W)**

| 7         | 6         | 5         | 4         | 3         | 2         | 1        | 0        |
|-----------|-----------|-----------|-----------|-----------|-----------|----------|----------|
| CLREN-D15 | CLREN-D14 | CLREN-D13 | CLREN-D12 | CLREN-C11 | CLREN-C10 | CLREN-C9 | CLREN-C8 |
| R/W-0     | R/W-0     | R/W-0     | R/W-0     | R/W-0     | R/W-0     | R/W-0    | R/W-0    |

**Table 29. DAC Clear Enable 1 Register Field Descriptions**

| Bit | Field     | Type | Reset | Description                                                                                                                                                                                                                                                                                  |
|-----|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CLREN-D15 | R/W  | 0     | This register determines which DACs go into clear state when a clear event is detected as configured in the DAC-CLEAR-SOURCE registers.<br><br>If CLRENN = 1, DAC_n is forced into a clear state with a clear event.<br><br>If CLRENN = 0, a clear event does not affect the state of DAC_n. |
| 6   | CLREN-D14 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 5   | CLREN-D13 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 4   | CLREN-D12 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 3   | CLREN-C11 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 2   | CLREN-C10 | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 1   | CLREN-C9  | R/W  | 0     |                                                                                                                                                                                                                                                                                              |
| 0   | CLREN-C8  | R/W  | 0     |                                                                                                                                                                                                                                                                                              |

## 7.6.5 DAC Clear and ALARMOUT Source Select: Address 0x1A through 0x1D

### 7.6.5.1 DAC Clear Source 0 Register (address = 0x1A) [reset = 0x00]

**Figure 83. DAC Clear Source 0 Register (R/W)**

| 7             | 6 | 5 | 4             | 3             | 2             | 1             | 0             |
|---------------|---|---|---------------|---------------|---------------|---------------|---------------|
| Reserved      |   |   | ADC20-ALR-CLR | ADC19-ALR-CLR | ADC18-ALR-CLR | ADC17-ALR-CLR | ADC16-ALR-CLR |
| R/W-All zeros |   |   | R/W-0         | R/W-0         | R/W-0         | R/W-0         | R/W-0         |

**Table 30. DAC Clear Source 0 Register Field Descriptions**

| Bit | Field         | Type | Reset     | Description                                                                                                                                                                                                                                    |
|-----|---------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved      | R/W  | All zeros | Reserved for factory use                                                                                                                                                                                                                       |
| 4   | ADC20-ALR-CLR | R/W  | 0         | This register selects which alarm forces DACs into a clear state, regardless of which DAC operation mode is active, auto or manual. In order for DAC <sub>n</sub> to go into clear mode, it must be enabled in the DAC Clear Enable registers. |
| 3   | ADC19-ALR-CLR | R/W  | 0         |                                                                                                                                                                                                                                                |
| 2   | ADC18-ALR-CLR | R/W  | 0         |                                                                                                                                                                                                                                                |
| 1   | ADC17-ALR-CLR | R/W  | 0         |                                                                                                                                                                                                                                                |
| 0   | ADC16-ALR-CLR | R/W  | 0         |                                                                                                                                                                                                                                                |

### 7.6.5.2 DAC Clear Source 1 Register (address = 0x1B) [reset = 0x00]

**Figure 84. DAC Clear Source 1 Register (R/W)**

| 7             | 6 | 5 | 4 | 3           | 2         | 1           | 0          |
|---------------|---|---|---|-------------|-----------|-------------|------------|
| Reserved      |   |   |   | ALARMIN-ALR | THERM-ALR | LT-HIGH-ALR | LT-LOW-ALR |
| R/W-All zeros |   |   |   | R/W-0       | R/W-0     | R/W-0       | R/W-0      |

**Table 31. DAC Clear Source 1 Register Field Descriptions**

| Bit | Field       | Type | Reset     | Description                                                                                                                                                                                                                                    |
|-----|-------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | Reserved    | R/W  | All zeros | Reserved for factory use                                                                                                                                                                                                                       |
| 3   | ALARMIN-ALR | R/W  | 0         | This register selects which alarm forces DACs into a clear state, regardless of which DAC operation mode is active, auto or manual. In order for DAC <sub>n</sub> to go into clear mode, it must be enabled in the DAC Clear Enable registers. |
| 2   | THERM-ALR   | R/W  | 0         |                                                                                                                                                                                                                                                |
| 1   | LT-HIGH-ALR | R/W  | 0         |                                                                                                                                                                                                                                                |
| 0   | LT-LOW-ALR  | R/W  | 0         |                                                                                                                                                                                                                                                |

### 7.6.5.3 ALARMOUT Source 0 Register (address = 0x1c) [reset = 0x00]

**Figure 85. ALARMOUT Source 0 Register (R/W)**

| 7             | 6 | 5 | 4             | 3             | 2             | 1             | 0             |
|---------------|---|---|---------------|---------------|---------------|---------------|---------------|
| Reserved      |   |   | ADC20-ALR-OUT | ADC19-ALR-OUT | ADC18-ALR-OUT | ADC17-ALR-OUT | ADC16-ALR-OUT |
| R/W-All zeros |   |   | R/W-0         | R/W-0         | R/W-0         | R/W-0         | R/W-0         |

**Table 32. ALARMOUT Source 0 Register Field Descriptions**

| Bit | Field         | Type | Reset     | Description                                                                                                                                    |
|-----|---------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved      | R/W  | All zeros | Reserved for factory use                                                                                                                       |
| 4   | ADC20-ALR-OUT | R/W  | 0         | This register selects which alarms can activate the <u>ALARMOUT</u> pin. The <u>ALARMOUT</u> must be enabled for this function to take effect. |
| 3   | ADC19-ALR-OUT | R/W  | 0         |                                                                                                                                                |
| 2   | ADC18-ALR-OUT | R/W  | 0         |                                                                                                                                                |
| 1   | ADC17-ALR-OUT | R/W  | 0         |                                                                                                                                                |
| 0   | ADC16-ALR-OUT | R/W  | 0         |                                                                                                                                                |

### 7.6.5.4 ALARMOUT Source 1 Register (address = 0x1D) [reset = 0x00]

**Figure 86. ALARMOUT Source 1 Register (R/W)**

| 7             | 6 | 5 | 4               | 3             | 2             | 1               | 0              |
|---------------|---|---|-----------------|---------------|---------------|-----------------|----------------|
| Reserved      |   |   | ALARM-LATCH-DIS | ALRIN-ALR-OUT | THERM-ALR-OUT | LT-HIGH-ALR-OUT | LT-LOW-ALR-OUT |
| R/W-All zeros |   |   | R/W-0           | R/W-0         | R/W-0         | R/W-0           | R/W-0          |

**Table 33. ALARMOUT Source 1 Register Field Descriptions**

| Bit | Field           | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----|-----------------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved        | R/W  | All zeros | Reserved for factory use                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 4   | ALARM-LATCH-DIS | R/W  | 0         | Alarm latch disable bit.<br>When cleared to 0 the alarm bits are latched. When an alarm occurs, the corresponding alarm bit is set to "1". The alarm bit remains until the error condition subsides and the alarm register is read. Before reading, the alarm bit is not cleared even if the alarm condition disappears. When set to 1 the alarm bits are not latched. When the alarm condition subsides, the alarm bits are cleared regardless of whether the alarm bits have been read or not. |
| 3   | ALRIN-ALR-OUT   | R/W  | 0         | This register selects which alarms can activate the ALARMOUT pin. The ALARMOUT must be enabled for this function to take effect.                                                                                                                                                                                                                                                                                                                                                                 |
| 2   | THERM-ALR-OUT   | R/W  | 0         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 1   | LT-HIGH-ALR-OUT | R/W  | 0         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 0   | LT-LOW-ALR-OUT  | R/W  | 0         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

### 7.6.6 DAC Range: Address 0x1E

#### 7.6.6.1 DAC Range Register (address = 0x1E) [reset = 0x00]

**Figure 87. DAC Range Register (R/W)**

| 7        | 6                            | 5 | 4 | 3        | 2                            | 1 | 0 |
|----------|------------------------------|---|---|----------|------------------------------|---|---|
| Reserved | DAC-RANGE <sub>B</sub> [2:0] |   |   | Reserved | DAC-RANGE <sub>A</sub> [2:0] |   |   |
| R/W-0    | R/W-All zeros                |   |   | R/W-0    | R/W-All zeros                |   |   |

**Table 34. DAC Range Register Field Descriptions**

| Bit | Field                        | Type | Reset     | Description                                                                                                                                                   |
|-----|------------------------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | Reserved                     | R/W  | 0         | Reserved for factory use                                                                                                                                      |
| 6-4 | DAC-RANGE <sub>B</sub> [2:0] | R/W  | All zeros | DAC group B output voltage selection. Overrides output range set by the auto-range detection circuit. See <a href="#">Table 35</a> to configure this setting. |
| 3   | Reserved                     | R/W  | 0         | Reserved for factory use                                                                                                                                      |
| 2   | DAC-RANGE <sub>A</sub> [2:0] | R/W  | All zeros | DAC group A output voltage selection. Overrides output range set by the auto-range detection circuit. See <a href="#">Table 35</a> to configure this setting. |

**Table 35. DAC-RANGEx Bit Configuration**

| DAC-RANGEx[2:0] | DAC Group x Output Voltage Range          |
|-----------------|-------------------------------------------|
| 0xx             | Range set by auto-range detection circuit |
| 100             | –10 to 0 V                                |
| 101             | –5 to 0 V                                 |
| 110             | 0 to 10 V                                 |
| 111             | 0 to 5 V                                  |

### 7.6.6.2 DAC Range 1 Register (address = 0x1F) [reset = 0x00]

**Figure 88. DAC Range 1 Register (R/W)**

| 7        | 6               | 5 | 4 | 3        | 2               | 1 | 0 |
|----------|-----------------|---|---|----------|-----------------|---|---|
| Reserved | DAC-RANGED[2:0] |   |   | Reserved | DAC-RANGEC[2:0] |   |   |
| R/W-0    | R/W-All zeros   |   |   | R/W-0    | R/W-All zeros   |   |   |

**Table 36. DAC Range 1 Register Field Descriptions**

| Bit | Field           | Type | Reset     | Description                                                                                                                                                   |
|-----|-----------------|------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | Reserved        | R/W  | 0         | Reserved for factory use                                                                                                                                      |
| 6-4 | DAC-RANGED[2:0] | R/W  | All zeros | DAC group D output voltage selection. Overrides output range set by the auto-range detection circuit. See <a href="#">Table 35</a> to configure this setting. |
| 3   | Reserved        | R/W  | 0         | Reserved for factory use                                                                                                                                      |
| 2   | DAC-RANGEC[2:0] | R/W  | All zeros | DAC group C output voltage selection. Overrides output range set by the auto-range detection circuit. See <a href="#">Table 35</a> to configure this setting. |

### 7.6.7 ADC and Temperature Data: Address 0x20 through 0x4B

#### 7.6.7.1 ADCn-Data (Low Byte) Register (address = 0x20 through 0x49) [reset = 0x00]

**Figure 89. ADCn-Data (Low Byte) Register (R)**

| 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|----------------|---|---|---|---|---|---|---|
| ADCn-DATA(7:0) |   |   |   |   |   |   |   |
| R-All zeros    |   |   |   |   |   |   |   |

**Table 37. ADCn-Data (Low Byte) Register Field Descriptions**

| Bit | Field          | Type | Reset     | Description                                                                                                                   |
|-----|----------------|------|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | ADCn-DATA(7:0) | R    | All zeros | Stores the 12-bit ADC_n conversion results in straight binary format for both types of inputs channels (unipolar and bipolar) |

#### 7.6.7.2 ADCn-Data (High Byte) Register (address = 0x20 through 0x49) [reset = 0x00]

**Figure 90. ADCn-Data (High Byte) Register (R)**

| 7           | 6 | 5 | 4 | 3                | 2 | 1 | 0 |
|-------------|---|---|---|------------------|---|---|---|
| Reserved    |   |   |   | ADCn-DATA (11:8) |   |   |   |
| R-All zeros |   |   |   | R-All zeros      |   |   |   |

**Table 38. ADCn-Data (High Byte) Register Field Descriptions**

| Bit | Field            | Type | Reset     | Description                                                                                                                    |
|-----|------------------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | Reserved         | R    | All zeros | Reserved for factory use                                                                                                       |
| 3-0 | ADCn-DATA (11:8) | R    | All zeros | Stores the 12-bit ADC_n conversion results in straight binary format for both types of inputs channels (unipolar and bipolar). |

### 7.6.7.3 Temperature Data (Low Byte) Register (address = 0x4A) [reset = 0x00]

**Figure 91. Temperature Data (Low Byte) Register (R)**

|                |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|
| 7              | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TEMP-DATA(7:0) |   |   |   |   |   |   |   |
| R-All zeros    |   |   |   |   |   |   |   |

**Table 39. Temperature Data (Low Byte) Register Field Descriptions**

| Bit | Field          | Type | Reset     | Description                                                      |
|-----|----------------|------|-----------|------------------------------------------------------------------|
| 7-0 | TEMP-DATA(7:0) | R    | All zeros | Stores the temperature sensor reading in twos complement format. |

### 7.6.7.4 Temperature Data (High Byte) Register (address = 0x4B) [reset = 0x00]

**Figure 92. Temperature Data (High Byte) Register (R)**

|             |   |   |   |                 |   |   |   |
|-------------|---|---|---|-----------------|---|---|---|
| 7           | 6 | 5 | 4 | 3               | 2 | 1 | 0 |
| Reserved    |   |   |   | TEMP-DATA(11:8) |   |   |   |
| R-All zeros |   |   |   | R-All zeros     |   |   |   |

**Table 40. Temperature Data (High Byte) Register Field Descriptions**

| Bit | Field           | Type | Reset     | Description                                                      |
|-----|-----------------|------|-----------|------------------------------------------------------------------|
| 7-4 | Reserved        | R    | All zeros | Reserved for factory use.                                        |
| 3-0 | TEMP-DATA(11:8) | R    | All zeros | Stores the temperature sensor reading in twos complement format. |

## 7.6.8 DAC Data: Address 0x50 through 0x6F

### 7.6.8.1 DACn-Data (Low Byte) Register (address = 0x50 through 0x6F) [reset = 0x00]

**Figure 93. DACn-Data (Low Byte) Register (R/W)**

|                 |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
| 7               | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| DACn-DATA (7:0) |   |   |   |   |   |   |   |
| R/W-All zeros   |   |   |   |   |   |   |   |

**Table 41. DACn-Data (Low Byte) Register Field Descriptions**

| Bit | Field           | Type | Reset     | Description                                                                                                                                |
|-----|-----------------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 7-0 | DACn-DATA (7:0) | R/W  | All zeros | Stores the 12-bit data to be loaded to the DAC_n latches in straight binary format. The straight binary format is used for all DAC ranges. |

### 7.6.8.2 DACn Data (High Byte) Register (address = 0x50 through 0x6F) [reset = 0x00]

**Figure 94. DACn Data (High Byte) Register (R/W)**

| 7             | 6 | 5 | 4 | 3                | 2 | 1 | 0 |
|---------------|---|---|---|------------------|---|---|---|
| Reserved      |   |   |   | DACn-DATA (11:8) |   |   |   |
| R/W-All zeros |   |   |   | R/W-All zeros    |   |   |   |

**Table 42. DACn Data (High Byte) Register Field Descriptions**

| Bit | Field            | Type | Reset     | Description                                                                                                                                |
|-----|------------------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | Reserved         | R/W  | All zeros | Reserved for factory use                                                                                                                   |
| 3-0 | DACn-DATA (11:8) | R/W  | All zeros | Stores the 12-bit data to be loaded to the DAC_n latches in straight binary format. The straight binary format is used for all DAC ranges. |

### 7.6.9 Status Registers: Address 0x70 through 0x72

The AMC7836 device continuously monitors all general purpose analog inputs and local temperature sensor during normal operation. When any input is out of the specified range N consecutive times, the corresponding alarm bit is set (1). If the input returns to the normal range before N consecutive times, the corresponding alarm bit remains clear (0). This configuration avoids any false alarms. When an alarm status occurs, the corresponding alarm bit is set (1). When the corresponding bit in the ALARMOUT Source Registers is cleared (0), the ALARMOUT pin is latched.

Whenever an alarm status bit is set, it remains set until the event that caused it is resolved and its status register is read. Reading the Alarm Status Registers clears the alarm status bits. The alarm bit can only be cleared by reading its Alarm Status register after the event is resolved, or by hardware reset, software reset, or power-on reset. All alarm status bits are cleared when reading the Alarm Status registers, and all these bits are reasserted if the out-of-limit condition still exists after the next conversion cycle, unless otherwise noted.

### 7.6.9.1 Alarm Status 0 Register (address = 0x70) [reset = 0x00]

**Figure 95. Alarm Status 0 Register (R)**

| 7           | 6 | 5 | 4         | 3         | 2         | 1         | 0         |
|-------------|---|---|-----------|-----------|-----------|-----------|-----------|
| Reserved    |   |   | ADC20-ALR | ADC19-ALR | ADC18-ALR | ADC17-ALR | ADC16-ALR |
| R-All zeros |   |   | R-0       | R-0       | R-0       | R-0       | R-0       |

**Table 43. Alarm Status 0 Register Field Descriptions**

| Bit | Field     | Type | Reset     | Description                                                                                                                                                              |
|-----|-----------|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-5 | Reserved  | R    | All zeros | Reserved for factory use                                                                                                                                                 |
| 4   | ADC20-ALR | R    | 0         | ADC20-ALR = 1 when ADC20 is out of the range defined by the corresponding threshold registers.<br>ADC20-ALR = 0 when the analog input is not out of the specified range. |
| 3   | ADC19-ALR | R    | 0         | ADC19-ALR = 1 when ADC19 is out of the range defined by the corresponding threshold registers.<br>ADC19-ALR = 0 when the analog input is not out of the specified range. |
| 2   | ADC18-ALR | R    | 0         | ADC18-ALR = 1 when ADC18 is out of the range defined by the corresponding threshold registers.<br>ADC18-ALR = 0 when the analog input is not out of the specified range. |
| 1   | ADC17-ALR | R    | 0         | ADC17-ALR = 1 when ADC17 is out of the range defined by the corresponding threshold registers.<br>ADC17-ALR = 0 when the analog input is not out of the specified range. |
| 0   | ADC16-ALR | R    | 0         | ADC16-ALR = 1 when ADC16 is out of the range defined by the corresponding threshold registers.<br>ADC16-ALR = 0 when the analog input is not out of the specified range. |

### 7.6.9.2 Alarm Status 1 Register (address = 0x71) [reset = 0x00]

**Figure 96. Alarm Status 1 Register (R)**

| 7           | 6 | 5 | 4 | 3           | 2         | 1           | 0          |
|-------------|---|---|---|-------------|-----------|-------------|------------|
| Reserved    |   |   |   | ALARMIN-ALR | THERM-ALR | LT-HIGH-ALR | LT-LOW-ALR |
| R-All zeros |   |   |   | R-0         | R-0       | R-0         | R-0        |

**Table 44. Alarm Status 1 Register Field Descriptions**

| Bit | Field       | Type | Reset     | Description                                                                                                                                                                                                                                                                                    |
|-----|-------------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-4 | Reserved    | R    | All zeros | Reserved for factory use                                                                                                                                                                                                                                                                       |
| 3   | ALARMIN-ALR | R    | 0         | The ALARMIN-ALR is set to 1 if the <u>ALARMIN</u> pin is enabled and set high.                                                                                                                                                                                                                 |
| 2   | THERM-ALR   | R    | 0         | Thermal alarm flag. When the die temperature is equal to or greater than +150°C, the bit is set (1) and the THERM-ALR flag activates. The on-chip temperature sensor (LT) monitors the die temperature. If LT is disabled, the THERM-ALR bit is always 0. The hysteresis of this alarm is 8°C. |
| 1   | LT-HIGH-ALR | R    | 0         | LT-HIGH-ALR = 1 when the temperature sensor is out of the range defined by the upper threshold.                                                                                                                                                                                                |
| 0   | LT-LOW-ALR  | R    | 0         | LT-LOW-ALR = 1 when the temperature sensor is out of the range defined by the lower threshold.                                                                                                                                                                                                 |

### 7.6.9.3 General Status Register (address = 0x72) [reset = 0x0C]

**Figure 97. General Status Register (R)**

| 7     | 6     | 5     | 4     | 3        | 2        | 1    | 0    |
|-------|-------|-------|-------|----------|----------|------|------|
| AVSSD | AVSSC | AVSSB | AVSSA | ADC_IDLE | Reserved | GALR | DAVF |
| —     | —     | —     | —     | R-1      | R-1      | R-0  | R-0  |

**Table 45. General Status Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                                                               |
|-----|----------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | AVSSD    |      | —     | This bit is the auto-range detection output for DAC group D. This bit is set to 1 when $AV_{SSD} < AV_{SSTH}$ (–10- to 0-V output range), and 0 when $AV_{SSD} > AV_{SSTH}$ (0- to 5-V output range).                                                                                                                                     |
| 6   | AVSSC    |      | —     | This bit is the auto-range detection output for DAC group C. This bit is set to 1 when $AV_{SSC} < AV_{SSTH}$ (–10- to 0-V output range), and 0 when $AV_{SSC} > AV_{SSTH}$ (0- to 5-V output range).                                                                                                                                     |
| 5   | AVSSB    |      | —     | This bit is the auto-range detection output for DAC group B. This bit is set to 1 when $AV_{SSB} < AV_{SSTH}$ (–10- to 0-V output range), and 0 when $AV_{SSB} > AV_{SSTH}$ (0- to 5-V output range).                                                                                                                                     |
| 4   | AVSSA    |      | —     | This bit is the auto-range detection output for DAC group A. This bit is set to 1 when $AV_{EE} < AV_{SSTH}$ (–10- to 0-V output range), and 0 when $AV_{EE} > AV_{SSTH}$ (0- to 5-V output range).                                                                                                                                       |
| 3   | ADC_IDLE | R    | 1     | ADC Idle indicator.<br><br>Auto mode: 1 by default; goes to 0 once the ADC is triggered and is running. Remains 0 until ADC is stopped, then ADC_IDLE returns to 1.<br><br>Direct mode: 1 by default; goes to 0 once the ADC is triggered and direct conversions are running and returns to 1 when direct mode conversions are completed. |
| 2   | Reserved | R    | 1     | Reserved for factory use                                                                                                                                                                                                                                                                                                                  |
| 1   | GALR     | R    | 0     | Global alarm bit.<br><br>This bit is the OR function of all individual alarm bits of the status register. This bit is set to 1 when any alarm condition occurs and remains set until the status register is read. This bit is cleared after reading the Status Register.                                                                  |
| 0   | DAVF     | R    | 0     | ADC Data available flag bit. Direct mode only. Always cleared in Auto mode.<br><br>0: ADC conversion is in progress or ADC is in Auto mode<br>1: ADC conversions are complete and new data is available                                                                                                                                   |

## 7.6.10 GPIO: Address 0x7A

### 7.6.10.1 GPIO Register (address = 0x7A) [reset = 0xFF]

**Figure 98. GPIO Register (R/W)**

| 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|--------|--------|--------|--------|--------|--------|--------|--------|
| GPIO-7 | GPIO-6 | GPIO-5 | GPIO-4 | GPIO-3 | GPIO-2 | GPIO-1 | GPIO-0 |
| R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  | R/W-1  |

**Table 46. GPIO Register Field Descriptions**

| Bit | Field  | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                  |
|-----|--------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | GPIO-7 | R/W  | 1     | For write operation the GPIO pin operates as an output. Writing a 1 to the GPIO-n bit sets the GPIO-N pin to high impedance. Writing a 0 sets the GPIO-n pin to logic low.<br><br>For read operations the GPIO pin operates as an input. Read the GPIO-n bit to receive the status of the GPIO-n pin.<br><br>The GPIO-n pin has 48-kΩ input impedance to IOV <sub>DD</sub> . |
| 6   | GPIO-6 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 5   | GPIO-5 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 4   | GPIO-4 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 3   | GPIO-3 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 2   | GPIO-2 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 1   | GPIO-1 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |
| 0   | GPIO-0 | R/W  | 1     |                                                                                                                                                                                                                                                                                                                                                                              |

### 7.6.11 Out-Of-Range ADC Thresholds: Address 0x80 through 0x93

The unipolar analog inputs (LV\_ADC16 to LV\_ADC20) and the local temperature sensor implement an out-of-range alarm function. The Upper-Thresh and Lower-Thresh registers define the upper bound and lower bounds for these inputs. This window determines whether the analog input or temperature is out-of-range. When the input is outside the window, the corresponding CH-ALR-n bit in the Status Register is set to 1. For normal operation, the value of the upper threshold must be greater than the value of lower threshold; otherwise, an alarm is always indicated. The analog input threshold values are specified in straight binary format while the local temperature ones are specified in two's complement format.

#### 7.6.11.1 ADCn-Upper-Threshold (Low Byte) Register (address = 0x80 through 0x93) [reset = 0xFF]

**Figure 99. ADCn-Upper-Threshold (Low Byte) Register (R/W)**

| 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|---|---|---|---|---|---|---|
| THRUn(7:0)   |   |   |   |   |   |   |   |
| R/W-All ones |   |   |   |   |   |   |   |

**Table 47. ADCn-Upper-Threshold (Low Byte) Register Field Descriptions**

| Bit | Field      | Type | Reset    | Description                                                                        |
|-----|------------|------|----------|------------------------------------------------------------------------------------|
| 7-0 | THRUn(7:0) | R/W  | All ones | Sets 12-bit upper threshold value for the ADC_n channel in straight binary format. |

### 7.6.11.2 ADCn-Upper-Thresh (High Byte) Register (address = 0x80 through 0x93) [reset = 0x0F]

**Figure 100. ADCn-Upper-Thresh (High Byte) Register (R/W)**

| 7             | 6 | 5 | 4 | 3                        | 2 | 1 | 0 |
|---------------|---|---|---|--------------------------|---|---|---|
| Reserved      |   |   |   | THRU <sub>n</sub> (11:8) |   |   |   |
| R/W-All zeros |   |   |   | R/W-0xF                  |   |   |   |

**Table 48. ADCn-Upper-Thresh (High Byte) Register Field Descriptions**

| Bit | Field                    | Type | Reset     | Description                                                                                   |
|-----|--------------------------|------|-----------|-----------------------------------------------------------------------------------------------|
| 7-4 | Reserved                 | R/W  | All zeros | Reserved for factory use.                                                                     |
| 3-0 | THRU <sub>n</sub> (11:8) | R/W  | 0xF       | Sets 12-bit upper threshold value for the ADC <sub>n</sub> channel in straight binary format. |

### 7.6.11.3 ADCn-Lower-Thresh (Low Byte) Register (address = 0x80 through 0x93) [reset = 0x00]

**Figure 101. ADCn-Lower-Thresh (Low Byte) Register (R/W)**

| 7                       | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|---|---|---|---|---|---|---|
| THRL <sub>n</sub> (7:0) |   |   |   |   |   |   |   |
| R/W-All zeros           |   |   |   |   |   |   |   |

**Table 49. ADCn-Lower-Thresh (Low Byte) Register Field Descriptions**

| Bit | Field                   | Type | Reset     | Description                                                                                   |
|-----|-------------------------|------|-----------|-----------------------------------------------------------------------------------------------|
| 7-0 | THRL <sub>n</sub> (7:0) | R/W  | All zeros | Sets 12-bit lower threshold value for the ADC <sub>n</sub> channel in straight binary format. |

### 7.6.11.4 ADCn-Lower-Thresh (High Byte) Register (address = 0x80 through 0x93) [reset = 0x00]

**Figure 102. ADCn-Lower-Thresh (High Byte) Register (R/W)**

| 7             | 6 | 5 | 4 | 3                        | 2 | 1 | 0 |
|---------------|---|---|---|--------------------------|---|---|---|
| Reserved      |   |   |   | THRL <sub>n</sub> (11:8) |   |   |   |
| R/W-All zeros |   |   |   | R/W-All zeros            |   |   |   |

**Table 50. ADCn-Lower-Thresh (High Byte) Register Field Descriptions Field Descriptions**

| Bit | Field                    | Type | Reset     | Description                                                                               |
|-----|--------------------------|------|-----------|-------------------------------------------------------------------------------------------|
| 7-4 | Reserved                 | R/W  | All zeros | Reserved for factory use.                                                                 |
| 3-0 | THRL <sub>n</sub> (11:8) | R/W  | All zeros | Sets 12-bit lower threshold value for ADC <sub>n</sub> channel in straight binary format. |

### 7.6.11.5 LT-Upper-Thresh (Low Byte) Register (address = 0x94) [reset = 0xFF]

**Figure 103. LT-Upper-Thresh (Low Byte) Register (R/W)**

| 7            | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------------|---|---|---|---|---|---|---|
| THRU-LT(7:0) |   |   |   |   |   |   |   |
| R/W-All ones |   |   |   |   |   |   |   |

**Table 51. LT-Upper-Thresh (Low Byte) Register Field Descriptions**

| Bit | Field        | Type | Reset    | Description                                                                                    |
|-----|--------------|------|----------|------------------------------------------------------------------------------------------------|
| 7-0 | THRU-LT(7:0) | R/W  | All ones | Sets 12-bit upper threshold value for the local temperature sensor in two's complement format. |

**7.6.11.6 LT-Upper-Thresh (High Byte) Register (address = 0x95) [reset = 0x07]**
**Figure 104. LT-Upper-Thresh (High Byte) Register (R/W)**

|               |   |   |   |               |   |   |   |
|---------------|---|---|---|---------------|---|---|---|
| 7             | 6 | 5 | 4 | 3             | 2 | 1 | 0 |
| Reserved      |   |   |   | THRU-LT(11:8) |   |   |   |
| R/W-All zeros |   |   |   | R/W-0x7       |   |   |   |

**Table 52. LT-Upper-Thresh (High Byte) Register Field Descriptions**

| Bit | Field         | Type | Reset     | Description                                                                                    |
|-----|---------------|------|-----------|------------------------------------------------------------------------------------------------|
| 7-4 | Reserved      | R/W  | All zeros | Reserved for factory use.                                                                      |
| 3-0 | THRU-LT(11:8) | R/W  | 0x7       | Sets 12-bit upper threshold value for the local temperature sensor in two's complement format. |

**7.6.11.7 LT-Lower-Thresh (Low Byte) Register (address = 0x96) [reset = 0x00]**
**Figure 105. LT-Lower-Thresh (Low Byte) Register (R/W)**

|               |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|
| 7             | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| THRL-LT(7:0)  |   |   |   |   |   |   |   |
| R/W-All zeros |   |   |   |   |   |   |   |

**Table 53. LT-Lower-Thresh (Low Byte) Register Field Descriptions**

| Bit | Field        | Type | Reset     | Description                                                                                    |
|-----|--------------|------|-----------|------------------------------------------------------------------------------------------------|
| 7-0 | THRL-LT(7:0) | R/W  | All zeros | Sets 12-bit lower threshold value for the local temperature sensor in two's complement format. |

**7.6.11.8 LT-Lower-Thresh (High Byte) Register (address = 0x97) [reset = 0x08]**
**Figure 106. LT-Lower-Thresh (High Byte) Register (R/W)**

|               |   |   |   |               |   |   |   |
|---------------|---|---|---|---------------|---|---|---|
| 7             | 6 | 5 | 4 | 3             | 2 | 1 | 0 |
| Reserved      |   |   |   | THRL-LT(11:8) |   |   |   |
| R/W-All zeros |   |   |   | R/W-0x8       |   |   |   |

**Table 54. LT-Lower-Thresh (High Byte) Register Field Descriptions**

| Bit | Field         | Type | Reset     | Description                                                                                    |
|-----|---------------|------|-----------|------------------------------------------------------------------------------------------------|
| 7-4 | Reserved      | R/W  | All zeros | Reserved for factory use.                                                                      |
| 3-0 | THRL-LT(11:8) | R/W  | 0x8       | Sets 12-bit lower threshold value for the local temperature sensor in two's complement format. |

### 7.6.12 Alarm Hysteresis Configuration: Address 0xA0 and 0xA5

The hysteresis registers define the hysteresis in the out-of-range alarms.

#### 7.6.12.1 ADCn-Hysteresis Register (address = 0xA0 through 0xA4) [reset = 0x08]

**Figure 107. ADCn-Hysteresis Register (R/W)**

| 7        | 6          | 5 | 4 | 3 | 2 | 1 | 0 |
|----------|------------|---|---|---|---|---|---|
| Reserved | HYSTn(6:0) |   |   |   |   |   |   |
| R/W-0    | R/W-0x08   |   |   |   |   |   |   |

**Table 55. ADCn-Hysteresis Register Field Descriptions**

| Bit | Field      | Type | Reset | Description                                         |
|-----|------------|------|-------|-----------------------------------------------------|
| 7   | Reserved   | R/W  | 0     | Reserved for factory use.                           |
| 6-0 | HYSTn(6:0) | R/W  | 0x08  | Hysteresis of general purpose ADC_n, 1 LSB per step |

#### 7.6.12.2 LT-Hysteresis Register (address = 0xA5) [reset = 0x08]

**Figure 108. LT-Hysteresis Register (R/W)**

| 7             | 6 | 5 | 4            | 3 | 2 | 1 | 0 |
|---------------|---|---|--------------|---|---|---|---|
| Reserved      |   |   | HYST-LT(4:0) |   |   |   |   |
| R/W-All zeros |   |   | R/W-0x08     |   |   |   |   |

**Table 56. LT-Hysteresis Register Field Descriptions**

| Bit | Field        | Type | Reset     | Description                                                                     |
|-----|--------------|------|-----------|---------------------------------------------------------------------------------|
| 7-5 | Reserved     | R/W  | All zeros | Reserved for factory use.                                                       |
| 4-0 | HYST-LT(4:0) | R/W  | 0x08      | Hysteresis of local temperature sensor, 1°C per step. The range is 0°C to 31°C. |

### 7.6.13 Clear and Power-Down Registers: Address 0xB0 through 0xB4

#### 7.6.13.1 DAC Clear 0 Register (address = 0xB0) [reset = 0x00]

**Figure 109. DAC Clear 0 Register (R/W)**

| 7      | 6      | 5      | 4      | 3      | 2      | 1      | 0      |
|--------|--------|--------|--------|--------|--------|--------|--------|
| CLR-B7 | CLR-B6 | CLR-B5 | CLR-B4 | CLR-A3 | CLR-A2 | CLR-A1 | CLR-A0 |
| R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  | R/W-0  |

**Table 57. DAC Clear 0 Register Field Descriptions**

| Bit | Field  | Type | Reset | Description                                                                                                                                                                 |
|-----|--------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CLR-B7 | R/W  | 0     | This register uses software to force the DAC into a clear state.<br>If CLRn = 1, DAC_n is forced into a clear state.<br>If CLRn = 0, DAC_n is restored to normal operation. |
| 6   | CLR-B6 | R/W  | 0     |                                                                                                                                                                             |
| 5   | CLR-B5 | R/W  | 0     |                                                                                                                                                                             |
| 4   | CLR-B4 | R/W  | 0     |                                                                                                                                                                             |
| 3   | CLR-A3 | R/W  | 0     |                                                                                                                                                                             |
| 2   | CLR-A2 | R/W  | 0     |                                                                                                                                                                             |
| 1   | CLR-A1 | R/W  | 0     |                                                                                                                                                                             |
| 0   | CLR-A0 | R/W  | 0     |                                                                                                                                                                             |

**7.6.13.2 DAC Clear 1 Register (address = 0xB1) [reset = 0x00]**
**Figure 110. DAC Clear 1 Register (R/W)**

| 7       | 6       | 5       | 4       | 3       | 2       | 1      | 0      |
|---------|---------|---------|---------|---------|---------|--------|--------|
| CLR-D15 | CLR-D14 | CLR-D13 | CLR-D12 | CLR-C11 | CLR-C10 | CLR-C9 | CLR-C8 |
| R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0  | R/W-0  |

**Table 58. DAC Clear 1 Register Field Descriptions**

| Bit | Field   | Type | Reset | Description                                                                                                                                                                                                               |
|-----|---------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | CLR-D15 | R/W  | 0     | This register uses software to force the DAC into a clear state.<br>If CLR <sub>n</sub> = 1, DAC <sub>n</sub> is forced into a clear state.<br>If CLR <sub>n</sub> = 0, DAC <sub>n</sub> is restored to normal operation. |
| 6   | CLR-D14 | R/W  | 0     |                                                                                                                                                                                                                           |
| 5   | CLR-D13 | R/W  | 0     |                                                                                                                                                                                                                           |
| 4   | CLR-D12 | R/W  | 0     |                                                                                                                                                                                                                           |
| 3   | CLR-C11 | R/W  | 0     |                                                                                                                                                                                                                           |
| 2   | CLR-C10 | R/W  | 0     |                                                                                                                                                                                                                           |
| 1   | CLR-C9  | R/W  | 0     |                                                                                                                                                                                                                           |
| 0   | CLR-C8  | R/W  | 0     |                                                                                                                                                                                                                           |

**7.6.13.3 Power-Down 0 Register (address = 0xB2) [reset = 0x00]**
**Figure 111. Power-Down 0 Register (R/W)**

| 7       | 6       | 5       | 4       | 3       | 2       | 1       | 0       |
|---------|---------|---------|---------|---------|---------|---------|---------|
| PDAC-B7 | PDAC-B6 | PDAC-B5 | PDAC-B4 | PDAC-A3 | PDAC-A2 | PDAC-A1 | PDAC-A0 |
| R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   | R/W-0   |

**Table 59. Power-Down 0 Register Field Descriptions**

| Bit | Field   | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|---------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PDAC-B7 | R/W  | 0     | After power-on or reset, all bits in the power-down register are cleared to 0, and all the components controlled by this register are either powered-down or off. The power-down register allows the host to manage the AMC7836 power dissipation. When not required, any of the DACs can be put into clamp mode and the ADC and internal reference into an inactive low-power mode to reduce current drain from the supply. The bits in the power-down register control this power-down function. Set the respective bit to 1 to activate the corresponding function. |
| 6   | PDAC-B6 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5   | PDAC-B5 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4   | PDAC-B4 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 3   | PDAC-A3 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2   | PDAC-A2 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 1   | PDAC-A1 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 0   | PDAC-A0 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

#### 7.6.13.4 Power-Down 1 Register (address = 0xB3) [reset = 0x00]

**Figure 112. Power-Down 1 Register (R/W)**

| 7        | 6        | 5        | 4        | 3        | 2        | 1       | 0       |
|----------|----------|----------|----------|----------|----------|---------|---------|
| PDAC-D15 | PDAC-D14 | PDAC-D13 | PDAC-D12 | PDAC-C11 | PDAC-C10 | PDAC-C9 | PDAC-C8 |
| R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0    | R/W-0   | R/W-0   |

**Table 60. Power-Down 1 Register Field Descriptions**

| Bit | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|----------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | PDAC-D15 | R/W  | 0     | After power-on or reset, all bits in the power-down register are cleared to 0, and all the components controlled by this register are either powered-down or off. The power-down register allows the host to manage the AMC7836 power dissipation. When not required, any of the DACs can be put into clamp mode and the ADC and internal reference into an inactive low-power mode to reduce current drain from the supply. The bits in the power-down register control this power-down function. Set the respective bit to 1 to activate the corresponding function. |
| 6   | PDAC-D14 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 5   | PDAC-D13 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 4   | PDAC-D12 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 3   | PDAC-C11 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 2   | PDAC-C10 | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 1   | PDAC-C9  | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 0   | PDAC-C8  | R/W  | 0     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

#### 7.6.13.5 Power-Down 2 Register (address = 0xB4) [reset = 0x00]

**Figure 113. Power-Down 2 Register (R/W)**

| 7             | 6 | 5 | 4 | 3 | 2 | 1     | 0     |
|---------------|---|---|---|---|---|-------|-------|
| Reserved      |   |   |   |   |   | PREF  | PADC  |
| R/W-All zeros |   |   |   |   |   | R/W-0 | R/W-0 |

**Table 61. Power-Down 2 Register Field Descriptions**

| Bit | Field    | Type | Reset     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|----------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-2 | Reserved | R/W  | All zeros | Reserved for factory use.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 1   | PREF     | R/W  | 0         | After power-on or reset, all bits in the power-down register are cleared to 0, and all the components controlled by this register are either powered-down or off. The power-down register allows the host to manage the AMC7836 power dissipation. When not required, any of the DACs can be put into clamp mode and the ADC and internal reference into an inactive low-power mode to reduce current drain from the supply. The bits in the power-down register control this power-down function. Set the respective bit to 1 to activate the corresponding function. |
| 0   | PADC     | R/W  | 0         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## 7.6.14 ADC Trigger: Address 0xC0

### 7.6.14.1 ADC Trigger Register (address = 0xC0) [reset = 0x00]

**Figure 114. ADC Trigger Register (R/W)**

| 7             | 6 | 5 | 4 | 3 | 2 | 1 | 0     |
|---------------|---|---|---|---|---|---|-------|
| Reserved      |   |   |   |   |   |   | ICONV |
| R/W-All zeros |   |   |   |   |   |   | R/W-0 |

**Table 62. ADC Trigger Register Field Descriptions**

| Bit | Field    | Type | Reset     | Description                                                                                                                                                      |
|-----|----------|------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7-1 | Reserved | R/W  | All zeros | Reserved for factory use                                                                                                                                         |
| 0   | ICONV    | R/W  | 0         | Internal ADC conversion bit.<br>Set this bit to 1 to start the ADC conversion internally. The bit is automatically cleared to 0 after the ADC conversion starts. |

## 8 Application and Implementation

### 注


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 8.1 Application Information

The AMC7836 device is a highly integrated, low-power, analog monitoring and control solution that includes a 21-channel (12-bit) ADC, 16-channel (12-bit) DACs, eight GPIO, and a local temperature sensor. Although the device can be used in many different closed-loop systems, including industrial control and test and measurement, the device is largely used as a power amplifier controller in multi-channel RF communication applications.

Power amplifiers (PAs) include transistor technologies that are extremely temperature sensitive, and require DC biasing circuits to optimize RF performance, power efficiency, and stability. The AMC7836 device provides 16 DAC channels which can be used to adjust the power amplifier bias points in response to temperature changes. The device also includes an internal local temperature sensor, and 21 ADC channels for general-purpose monitoring.

Current and temperature sensing are typically implemented in power amplifier controller applications. PA drain current sensing is implemented by measuring the differential voltage drop across a shunt resistor. Temperature variations during PA operation can be detected either through the AMC7836 internal temperature sensor or through remote temperature ICs or thermistors configured to interface with the ADC analog inputs available in the device. [Figure 115](#) shows the block diagram for these different systems.

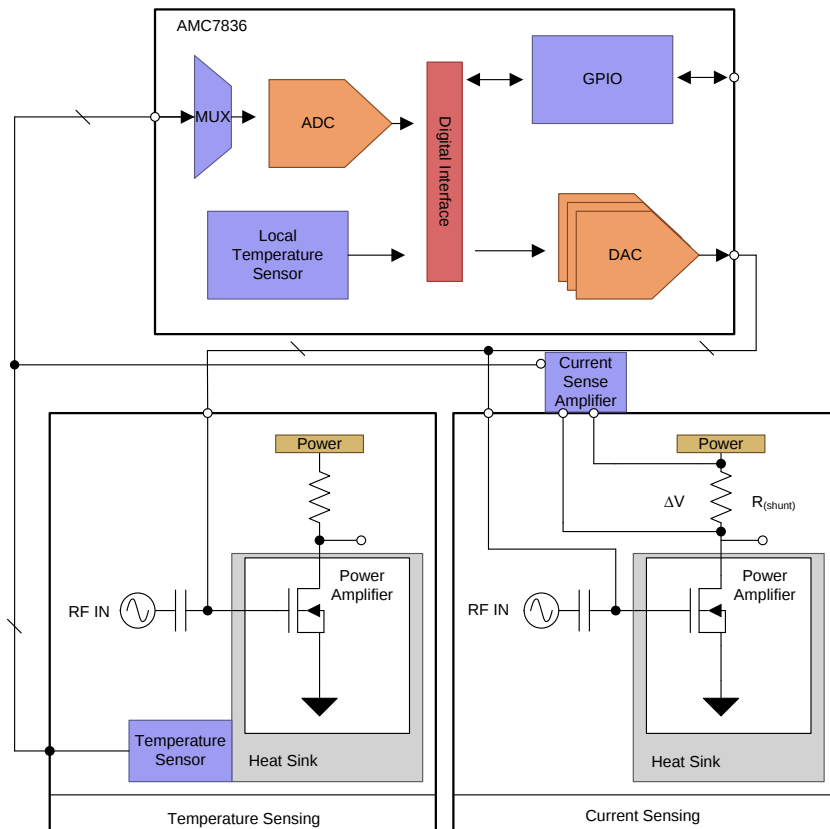


**Figure 115. AMC7836 Example Control and Monitor System**

## Application Information (continued)

### 8.1.1 Temperature Sensing Applications

The AMC7836 device contains one local temperature and five unipolar analog inputs that are easily configurable to interface with remote temperature-sensor circuits. The integrated temperature sensor and analog input registers automatically update with every conversion. [Figure 116](#) shows an example of a remote temperature sensor connection.

The selected temperature sensor is the LM50 device, a high precision integrated-circuit temperature sensor that operates in the  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  temperature range using a single positive supply. The full-scale output of the temperature sensor ranges from 100 mV to 1.75 V for the operational temperature range. In an extremely noisy environment, additional filtering is recommended. A typical value for the bypass capacitor is  $0.1\ \mu\text{F}$  from the V+ pin to GND. A high-quality ceramic type NP0 or X7R is recommended because of optimal performance across temperature and very low dissipation factor.

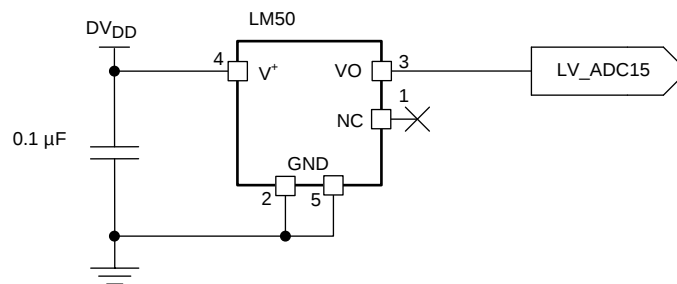

**Figure 116. Temperature Sensing Application With LM50**

## Application Information (continued)

### 8.1.2 Current Sensing Applications


In applications that require current sensing of the power amplifier, an external high-side current sense amplifier can be added and configured to the unipolar ADC inputs. [Figure 117](#) shows this design.

The LMP8480 device is a precision current sense device that amplifies the small differential voltage developed across a current-sense resistor in the presence of high input common-mode voltages. The LMP8480 device accepts input signals with a common-mode voltage range from 4 V to 76 V with a bandwidth of 270 kHz. The LMP8480 device offers different fixed gain settings. The optimal gain setting is dependent on the accuracy requirement of the application. To maintain precision over temperature, the output of the LMP8480 device should be directly connected to the AMC7836 unipolar ADC inputs. If the output range of the LMP8480 device is scaled by a voltage divider, as shown in [Figure 117](#), an output amplifier may be required to drive the ADC unipolar input to ensure a low impedance source. If the series resistance, in this case R4, is low enough then the buffer may not be required because the LMP8480 device is capable of driving the input of the AMC7836 unipolar ADC channel.

#### 注

The external resistors will cause some small error because of temperature drift and the input bias current of the operation amplifier.

[Figure 117](#) also shows a simple method to ensure proper power sequencing of the power amplifier by adding a series PMOS transistor to the PA drain terminal. The activation of the PMOS transistor connects the PAV<sub>DD</sub> voltage supply to the drain pin of the power amplifier. The PMOS transistor is driven with a voltage divider that swings from the PAV<sub>DD</sub> voltage to PAV<sub>DD</sub> × (R2 / (R1 + R2)). The NMOS shown in [Figure 117](#) is connected to a microcontroller output that controls the state of the PMOS transistor.

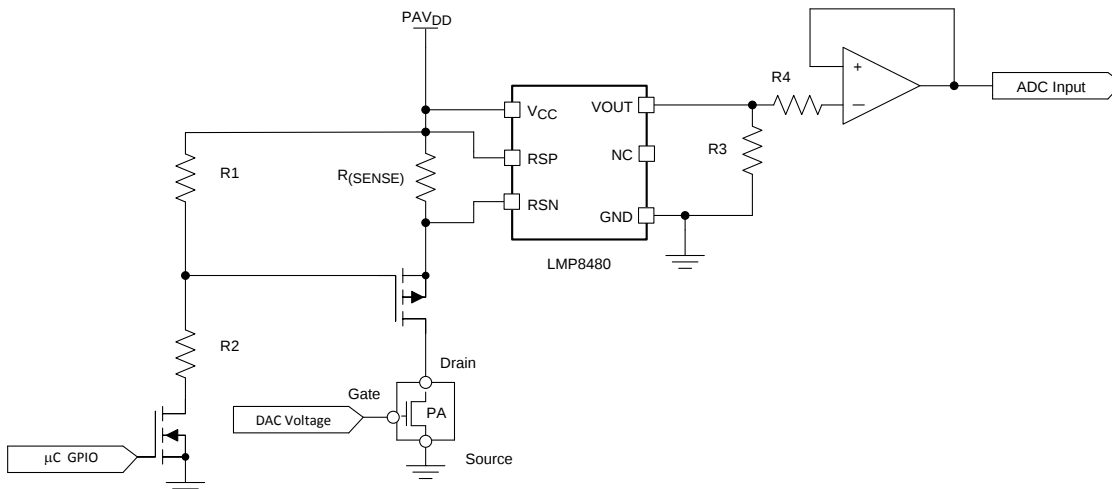

**Figure 117. Current-Sense Application With PMOS ON and OFF**


## AMC7836

JAJSSEL3D – NOVEMBER 2014 – REVISED FEBRUARY 2018

www.tij.co.jp

## 8.2 Typical Application

Figure 118 shows an example schematic incorporating the AMC7836 device.

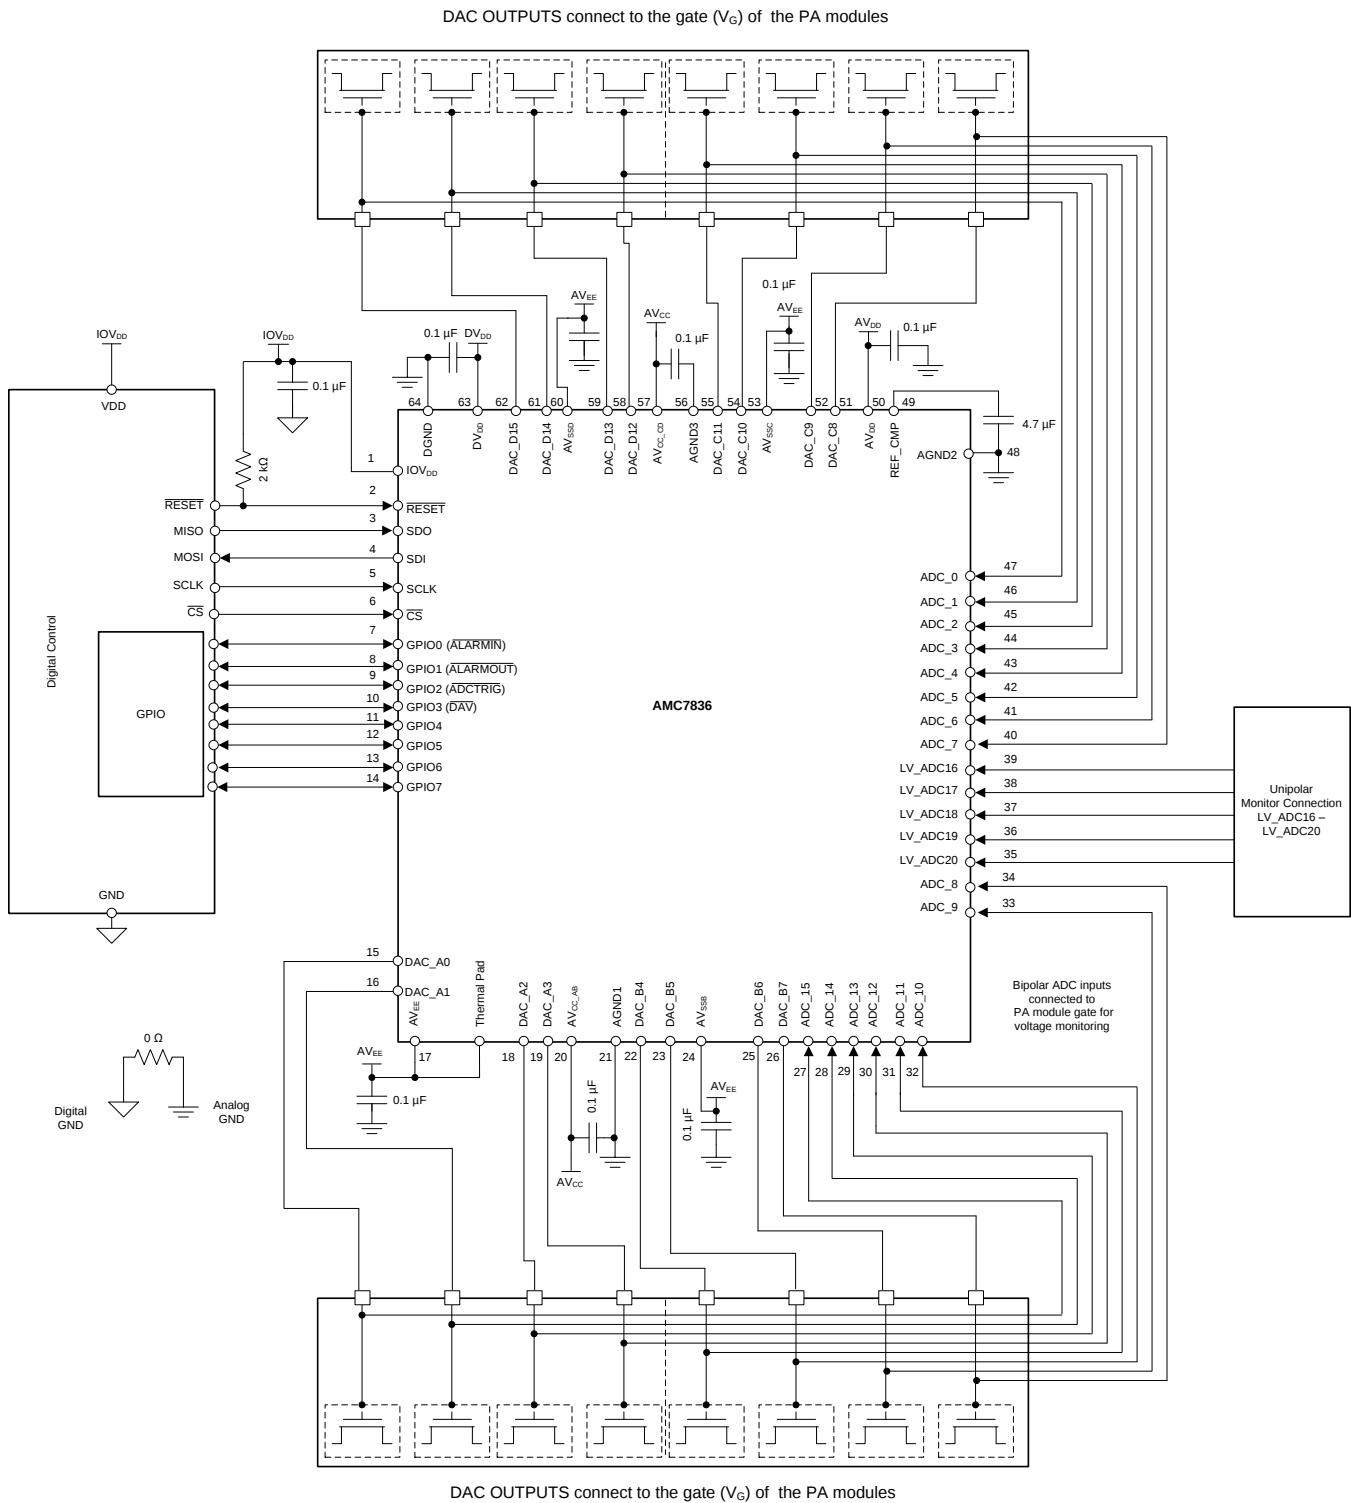

**Figure 118. AMC7836 Example Schematic**

## Typical Application (continued)

### 8.2.1 Design Requirements

The AMC7836 example schematic uses the majority of the design parameters listed in 表 63.

**表 63. Design Parameters**

| DESIGN PARAMETER           | EXAMPLE VALUE                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------|
| AV <sub>CC</sub>           | 5 V                                                                                              |
| AV <sub>EE</sub>           | –12 V                                                                                            |
| IOV <sub>DD</sub>          | 3.3 V                                                                                            |
| DV <sub>DD</sub>           | 5 V                                                                                              |
| AV <sub>DD</sub>           | 5 V                                                                                              |
| AV <sub>SS</sub> banks     | AV <sub>EE</sub>                                                                                 |
| ADC bipolar inputs         | ADC[0-15]: –12.5 to 12.5 V input range                                                           |
| ADC unipolar inputs        | LV_ADC[16-20]: 0 to 5 V range                                                                    |
| DAC outputs                | Sixteen Monotonic 12-bit DACs<br>Selectable ranges: 0 to 5 V, 0 to 10 V, –10 to 0 V or –5 to 0 V |
| Remote temperature sensing | IC temperature sensor (LM50) or thermistor                                                       |

### 8.2.2 Detailed Design Procedure

Use the following parameters to facilitate the design process:

- AV<sub>CC</sub> and AV<sub>EE</sub> voltage values
- ADC input voltage range
- DAC Output voltage Ranges

#### 8.2.2.1 ADC Input Conditioning

The AMC7836 device has an ADC with 21 analog inputs for external voltage sensing. Sixteen of these inputs are bipolar and the other five are unipolar. The bipolar inputs (ADC\_0 through ADC\_15) range is –12.5 to 12.5 V, and the unipolar analog inputs (LV\_ADC16 through LV\_ADC20) range is 0 to  $2 \times V_{\text{ref}}$ . The ADC operates from an internal 2.5 V reference ( $V_{\text{ref}}$ , measured at the REF\_CMP pin). For additional noise filtering, a 4.7-μF capacitor should be connected between the REF\_CMP and AGND2 pins. A high-quality ceramic type NP0 or X7R is recommended because of the optimal performance of the capacitor across temperature and very-low dissipation factor.

The ADC timing signals are driven from an on-chip temperature compensated 4-MHz oscillator. The on-chip oscillator is primarily responsible for the sampling frequency of the ADC. The sampling frequency of the ADC is dynamic and dependent on the acquisition and conversion time of each channel. 表 64 lists the relationship between the total update time and the internal oscillator frequency.

**表 64. ADC Conversion Rate and Total Update Number of Clocks**

| ADC CONVERSION RATE | ADC INPUT CHANNEL           | ACQUISITION CLOCKS | CONVERSION CLOCKS | t <sub>S</sub> (ACQUISITION + CONVERSION) NUMBER OF CLOCKS |
|---------------------|-----------------------------|--------------------|-------------------|------------------------------------------------------------|
| 00                  | Bipolar                     | 124.5              | 13.5              | 138                                                        |
|                     | Unipolar                    | 32.5               | 13.5              | 46                                                         |
|                     | Internal Temperature Sensor | —                  | —                 | 1025                                                       |
| 01                  | Bipolar                     | 124.5              | 13.5              | 138                                                        |
|                     | Unipolar                    | 78.5               | 13.5              | 92                                                         |
|                     | Internal Temperature Sensor | —                  | —                 | 1025                                                       |
| 10                  | Bipolar                     | 124.5              | 13.5              | 138                                                        |
|                     | Unipolar                    | 124.5              | 13.5              | 138                                                        |
|                     | Internal Temperature Sensor | —                  | —                 | 1025                                                       |
| 11                  | Bipolar                     | 262.5              | 13.5              | 276                                                        |
|                     | Unipolar                    | 262.5              | 13.5              | 276                                                        |
|                     | Internal Temperature Sensor | —                  | —                 | 1025                                                       |

The minimum and maximum oscillator frequency specifications in conjunction with the number of clocks required for the unipolar, bipolar and temperature sensor inputs should be applied to 式 5 to calculate the total update time range.

$$T_S = \frac{(B_{CLK} \times \#B_{CH} + U_{CLK} \times \#U_{CH} + T_{CLK} \times \#T_{CH})}{f_{OSC}}$$

where

- T<sub>S</sub> is the total update time
  - B<sub>CLK</sub> is the total bipolar clocks
  - #B<sub>CH</sub> is the number of active bipolar inputs
  - U<sub>CLK</sub> is the total unipolar clocks
  - #U<sub>CH</sub> is the number of active unipolar inputs
  - T<sub>CLK</sub> is the total internal temperature-sensor clocks
  - #T<sub>CH</sub> is the number of active internal temperature sensor channels; either 1 or 0
  - f<sub>OSC</sub> is the internal oscillator frequency
- (5)

The following is an example of a complete calculation of the total update time range. In this example, the ADC conversion rate is set to 00 and the following ADC input channels are used:

- Bipolar channels: ADC\_1 through ADC\_5 (5 active bipolar channels)
- Unipolar channels: LV\_ADC16 through LV\_ADC18 (3 active unipolar channels)
- Internal temperature sensor (1 active temperature channel)

表 64 gives the total number of clocks required for each ADC input under the example conditions.

For the minimum specified oscillator frequency of 3.7 MHz, and with the ADC conversion rate set to 00, use 式 6 to calculate the total maximum update time for this example.

$$T_S = \frac{(138 \times 5 + 46 \times 3 + 1025 \times 1)}{3.7 \text{ MHz}} = 500.811 \mu\text{s}$$

(6)

For the maximum specified oscillator frequency of 4.3 MHz, use 式 7 to calculate the total minimum update time for this example.

$$T_S = \frac{(138 \times 5 + 46 \times 3 + 1025 \times 1)}{4.3 \text{ MHz}} = 430.93 \mu\text{s}$$

(7)

Therefore, the total update time range is 430.93 μs to 500.811 μs.

During the conversion, the input current per channel varies with the total update time which is determined by the number and type of channels (NCH) and the conversion rate setting of the CONV-RATE bit in the ADC configuration register (address 0x10).

注

The source of the analog input voltage must be able to charge the input capacitance to a 12-bit settling level within the acquisition time.

### 8.2.2.2 DAC Output Range Selection

The AMC7836 device includes 16 DACs split into four groups, each with four DACs. All of the DACs in a given group share the same output voltage range. The output range for each DAC group is independent and is programmable to either  $-10$  to  $0$  V,  $-5$  to  $0$  V,  $0$  to  $10$  V or  $0$  to  $5$  V. The DAC output ranges are configured by following the configuration settings listed in [Table 1](#).

Each DAC includes an output buffer is capable of generating rail-to rail voltages. The [Electrical Characteristics: DAC](#) table lists the maximum source and sink capability of this internal amplifier. The graphs in the [Application Curves](#) section show the relationship of both stability and settling time with different capacitive loading structures.

### 8.2.3 Application Curves

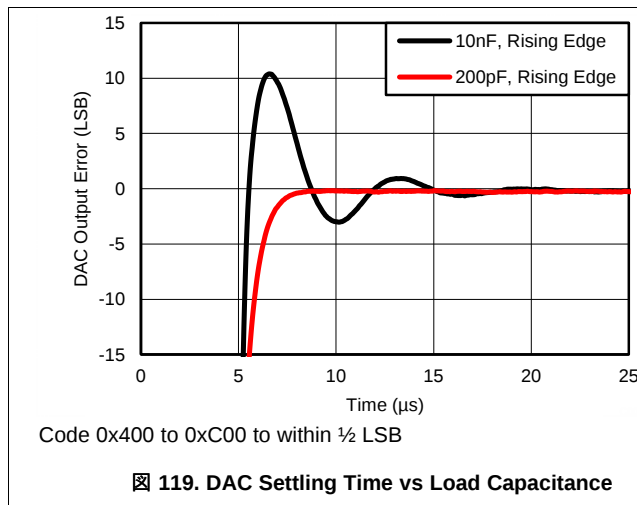


Figure 119. DAC Settling Time vs Load Capacitance

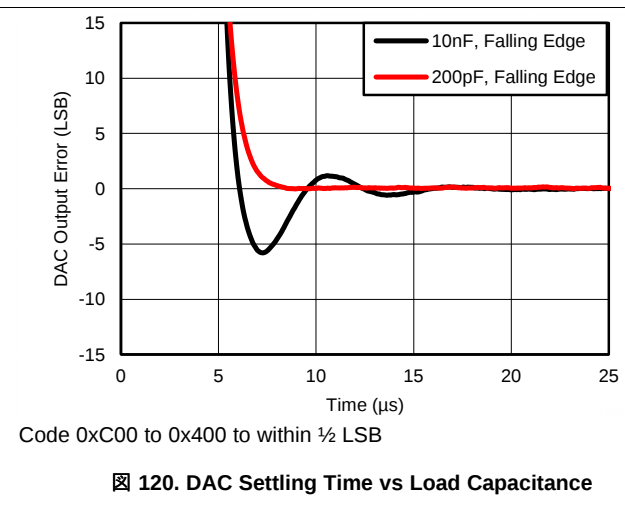


Figure 120. DAC Settling Time vs Load Capacitance

## 9 Power Supply Recommendations

The preferred (not required) pin order for applying power is  $IOV_{DD}$ ,  $DV_{DD}$  and  $AV_{DD}$ ,  $AV_{CC}$  and lastly  $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$ , and  $AV_{SSD}$ . When power sequencing, ensure that all digital pins are not powered or in an active state while the  $IOV_{DD}$  pin ramps. Proper sequencing of the digital pins can be accomplished by attaching 10-k $\Omega$  pullup resistors to the  $IOV_{DD}$  pin, or pulldown resistors to the DGND pin. See the supply voltage ranges in the [Recommended Operating Conditions](#) table.

In applications where a negative voltage is applied to  $AV_{EE}$ ,  $AV_{SSB}$ ,  $AV_{SSC}$ , and  $AV_{SSD}$  first, the user may notice some small negative voltages at other supply pins, such as the  $AV_{DD}$ ,  $DV_{DD}$ , and  $AV_{CC}$  pins. The negative voltages at the supply pins may exceed the values listed in the [Absolute Maximum Ratings](#) table, but because these voltages are created from intrinsic circuitry, the voltage levels are safe for operation.

In the case where all DAC outputs are in clamp state with  $AV_{EE} = AV_{SSB} = AV_{SSC} = AV_{SSD} = -12$  V, the negative voltage observed on the other supply pins can be as low as  $-620$  mV.

Although these negative voltages are observed on the pins, the user must still adhere to the guidelines specified in the [Absolute Maximum Ratings](#) table and verify that the inputs are driven within the range specified in the table. The user should also ensure that current is only applied when operating with voltages between the ranges listed in the [Absolute Maximum Ratings](#) table.

In applications where the DAC channels are driving a large capacitive load and the output changes significantly (a full scale transition, for instance), the output current of the affected channels may drive to the short circuit current value as described in the specification table (see 表 64) while the capacitive load is being charged. This temporary increase in output current may inadvertently cause the AVCC or AVSS to collapse, potentially resulting in a POR event. It is recommended that the power supply solution for AVCC and AVSS be capable of supplying short circuit current for all DAC channels with capacitive loads simultaneously to ensure proper device performance.

## 9.1 Device Reset Options

### 9.1.1 Power-on-Reset (POR)

The AMC7836 device includes a power-on reset (POR) function. After all supplies have been established, a POR event is issued. The POR causes all registers to initialize to the default values, and communication with the device is valid only after a 250  $\mu$ s power-on reset delay.

The default operation is power-down mode (register 0x02) in which the device is non-operational except for the communication interface as determined by the power-down registers. Before enabling normal operation, a hardware reset should be issued.

A power failure on DV<sub>DD</sub>, AV<sub>DD</sub>, AV<sub>CC</sub> or IOV<sub>DD</sub> has the potential to initiate a power-on-reset event. As long as DV<sub>DD</sub>, AV<sub>DD</sub>, AV<sub>CC</sub>, and IOV<sub>DD</sub> remain above the minimum recommended operating conditions a power failure event will not occur. When any of these supplies drops below the minimum recommended operating condition the device may or may not imitate a POR. In this case, issuing a hardware reset or proper POR is recommended to resume proper operation. To ensure a proper POR event, the DV<sub>DD</sub> supply must fall below 750 mV. If the DV<sub>DD</sub> supply falls below 2.7 V a hardware reset or proper POR must be issued.

### 9.1.2 Hardware Reset

A device hardware reset event is initiated by a minimum 20-ns logic low on the  $\overline{\text{RESET}}$  pin. A hardware reset causes all registers to initialize to the default values and communication with the device is valid only after a 250- $\mu$ s reset delay.

#### 9.1.2.1 Software Reset

A software reset event is initiated by setting the SOFT-RESET bit in the interface configuration 0 register (0x00). A software reset causes all registers, except 0x00 and 0x01, to initialize to the default values and communication with the device is valid only after a 100-ns delay.

## 10 Layout

### 10.1 Layout Guidelines

- All power supply pins should be bypassed to ground with a low-ESR ceramic bypass capacitor. The typical recommended bypass capacitor has a value of 10- $\mu$ F and is ceramic with a X7R or NP0 dielectric.
- To minimize interaction between the analog and digital return currents, the digital and analog sections should have separate ground planes that eventually connect at some point.
- To reduce noise on the internal reference, a 4.7- $\mu$ F capacitor is recommended between the REF\_CMP pin and ground.
- A high-quality ceramic type NP0 or X7R capacitor is recommended because of the optimal performance across temperature very-low dissipation factor of the capacitor.
- The digital and analog sections should have proper placement with respect to the digital pins and analog pins of the AMC7836 device (see 图 122). The separation of analog and digital blocks allows for better design and practice as it ensures less coupling into neighboring blocks and minimizes the interaction between analog and digital return currents.

## 10.2 Layout Example

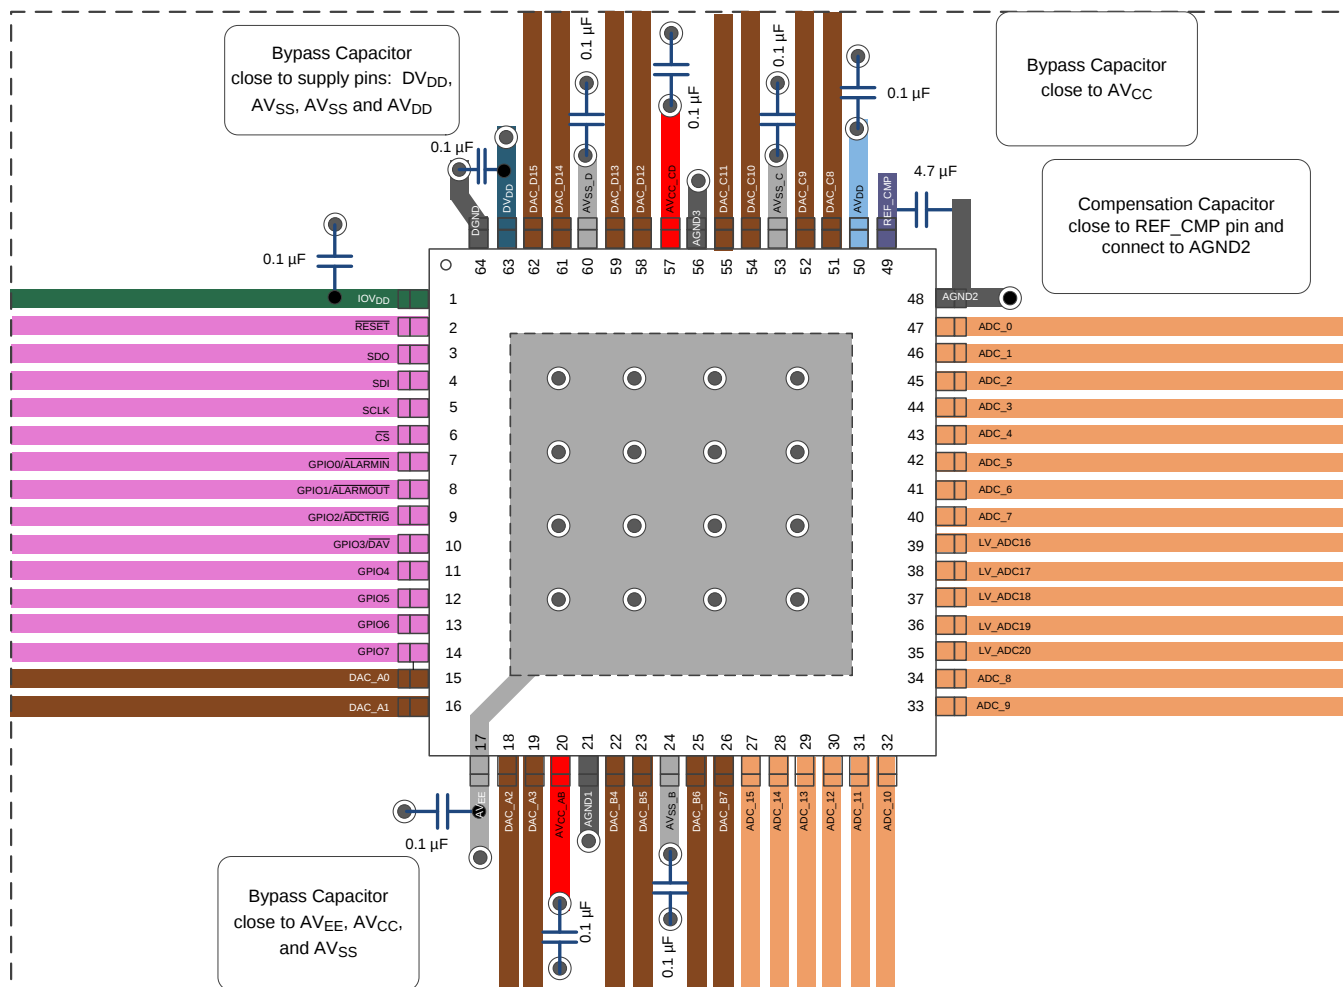


FIG 121. AMC7836 Example Board Layout

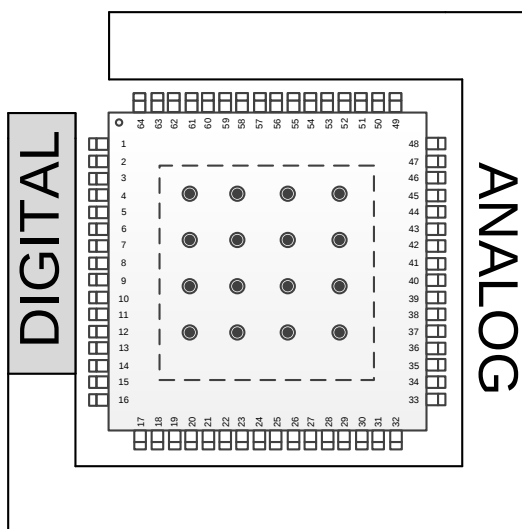


FIG 122. AMC7836 Example Board Layout — Component Placement

## 11 デバイスおよびドキュメントのサポート

### 11.1 ドキュメントのサポート

#### 11.1.1 関連資料

関連資料については、以下を参照してください。

- 『LMP8480/LMP8481 電圧出力付き高精度、76Vハイサイド電流センス・アンプ』、[SNVS829](#)
- 『LM50/LM50-Q1 SOT-23、単一電源、摂氏直読温度センサ』、[SNIS118](#)

### 11.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](http://ti.com)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 11.3 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ オンライン・コミュニティ** *TIのE2E ( Engineer-to-Engineer )* コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

**設計サポート** *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

### 11.4 商標

PowerPAD, E2E are trademarks of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 11.5 静電気放電に関する注意事項



これらのデバイスは、限定的なESD(静電破壊)保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

### 11.6 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 12 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins   | Package qty   Carrier   | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|------------------|-------------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">AMC7836IPAP</a>  | Active        | Production           | HTQFP (PAP)   64 | 160   JEDEC TRAY (10+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAP.A                | Active        | Production           | HTQFP (PAP)   64 | 160   JEDEC TRAY (10+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAP.B                | Active        | Production           | HTQFP (PAP)   64 | 160   JEDEC TRAY (10+1) | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| <a href="#">AMC7836IPAPR</a> | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAPR.A               | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAPR.B               | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAPRG4               | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAPRG4.A             | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |
| AMC7836IPAPRG4.B             | Active        | Production           | HTQFP (PAP)   64 | 1000   LARGE T&R        | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | AMC7836             |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| AMC7836IPAPR   | HTQFP        | PAP             | 64   | 1000 | 330.0              | 24.4               | 13.0    | 13.0    | 1.5     | 16.0    | 24.0   | Q2            |
| AMC7836IPAPRG4 | HTQFP        | PAP             | 64   | 1000 | 330.0              | 24.4               | 13.0    | 13.0    | 1.5     | 16.0    | 24.0   | Q2            |


## TAPE AND REEL BOX DIMENSIONS

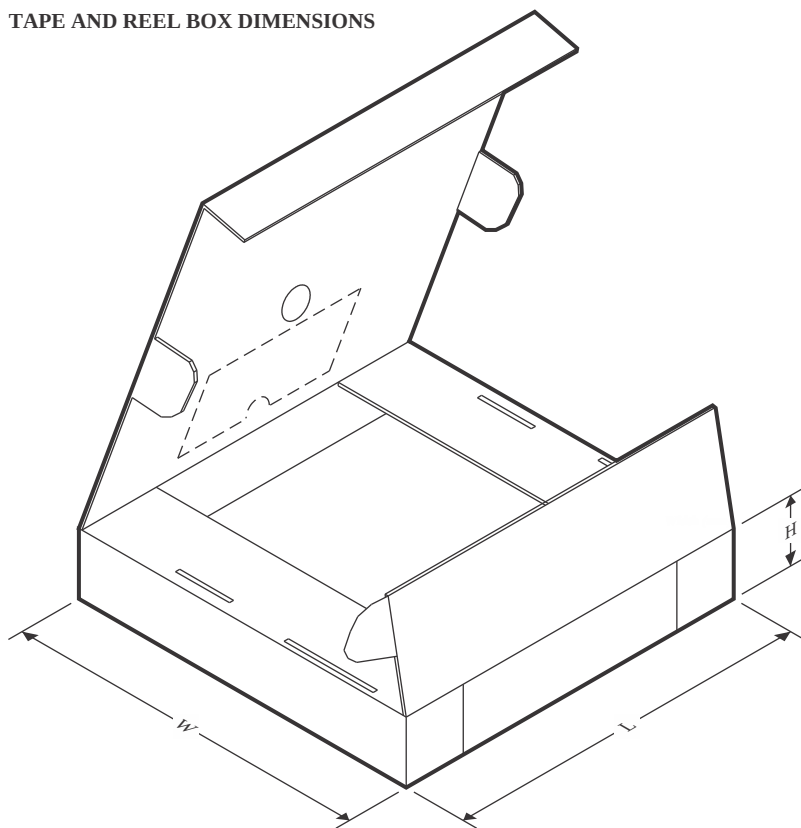

\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| AMC7836IPAPR   | HTQFP        | PAP             | 64   | 1000 | 367.0       | 367.0      | 55.0        |
| AMC7836IPAPRG4 | HTQFP        | PAP             | 64   | 1000 | 367.0       | 367.0      | 55.0        |

## TRAY

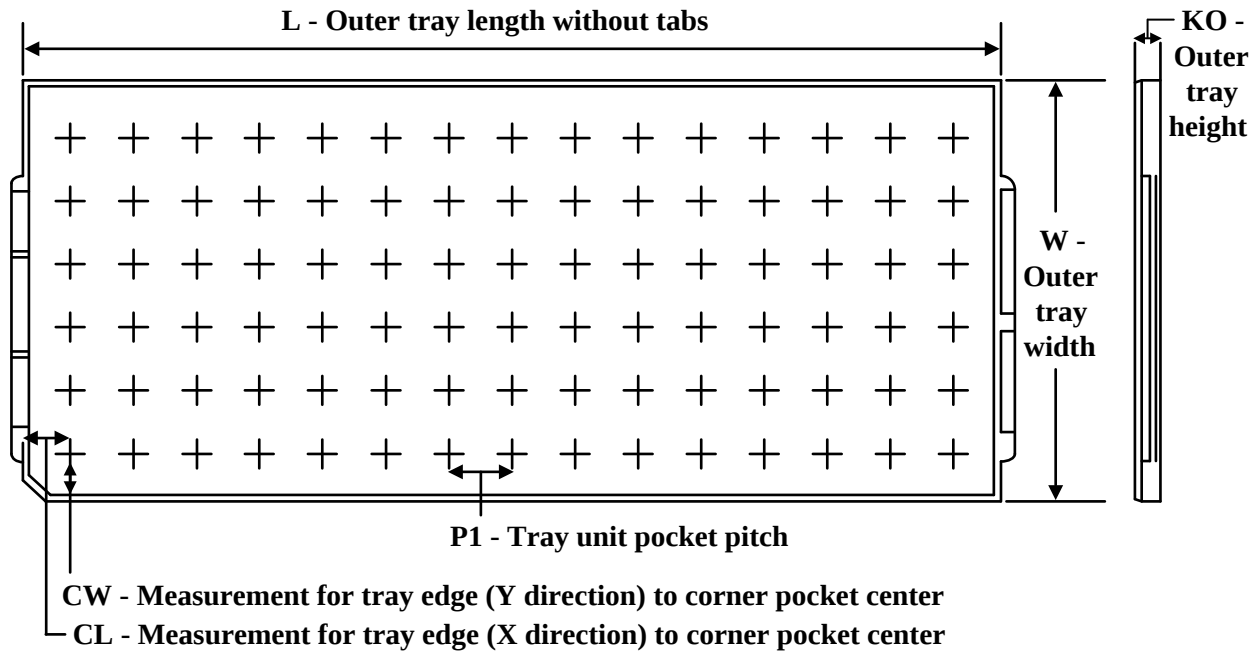

Chamfer on Tray corner indicates Pin 1 orientation of packed units.

\*All dimensions are nominal

| Device        | Package Name | Package Type | Pins | SPQ | Unit array matrix | Max temperature (°C) | L (mm) | W (mm) | K0 (μm) | P1 (mm) | CL (mm) | CW (mm) |
|---------------|--------------|--------------|------|-----|-------------------|----------------------|--------|--------|---------|---------|---------|---------|
| AMC7836IPAP   | PAP          | HTQFP        | 64   | 160 | 8 X 20            | 150                  | 322.6  | 135.9  | 7620    | 15.2    | 13.1    | 13      |
| AMC7836IPAP.A | PAP          | HTQFP        | 64   | 160 | 8 X 20            | 150                  | 322.6  | 135.9  | 7620    | 15.2    | 13.1    | 13      |
| AMC7836IPAP.B | PAP          | HTQFP        | 64   | 160 | 8 X 20            | 150                  | 322.6  | 135.9  | 7620    | 15.2    | 13.1    | 13      |

## GENERIC PACKAGE VIEW


**PAP 64**

**HTQFP - 1.2 mm max height**



10 x 10, 0.5 mm pitch

QUAD FLATPACK

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

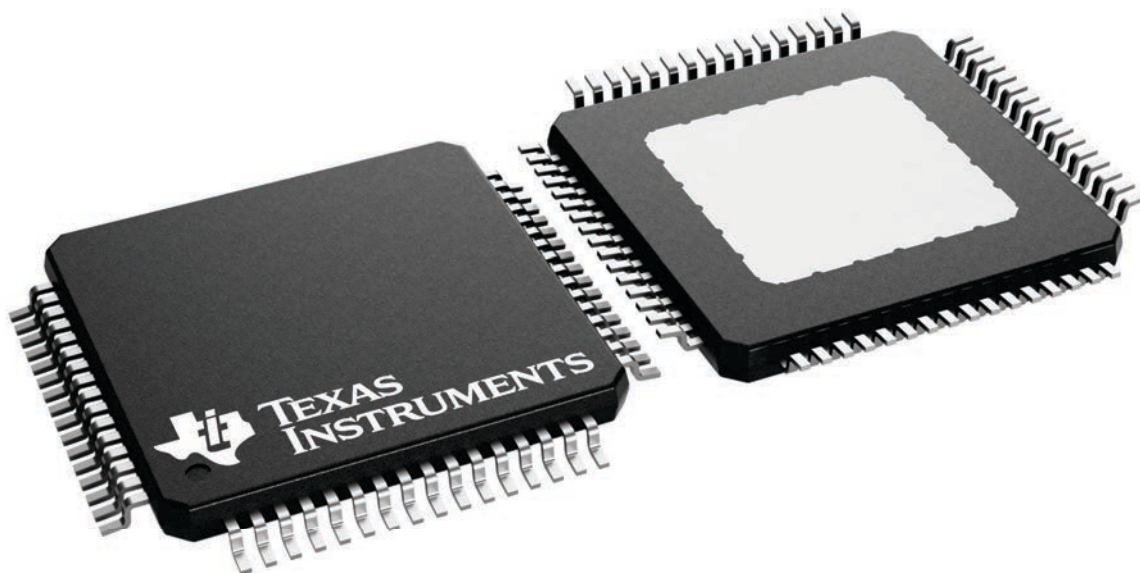

4226442/A

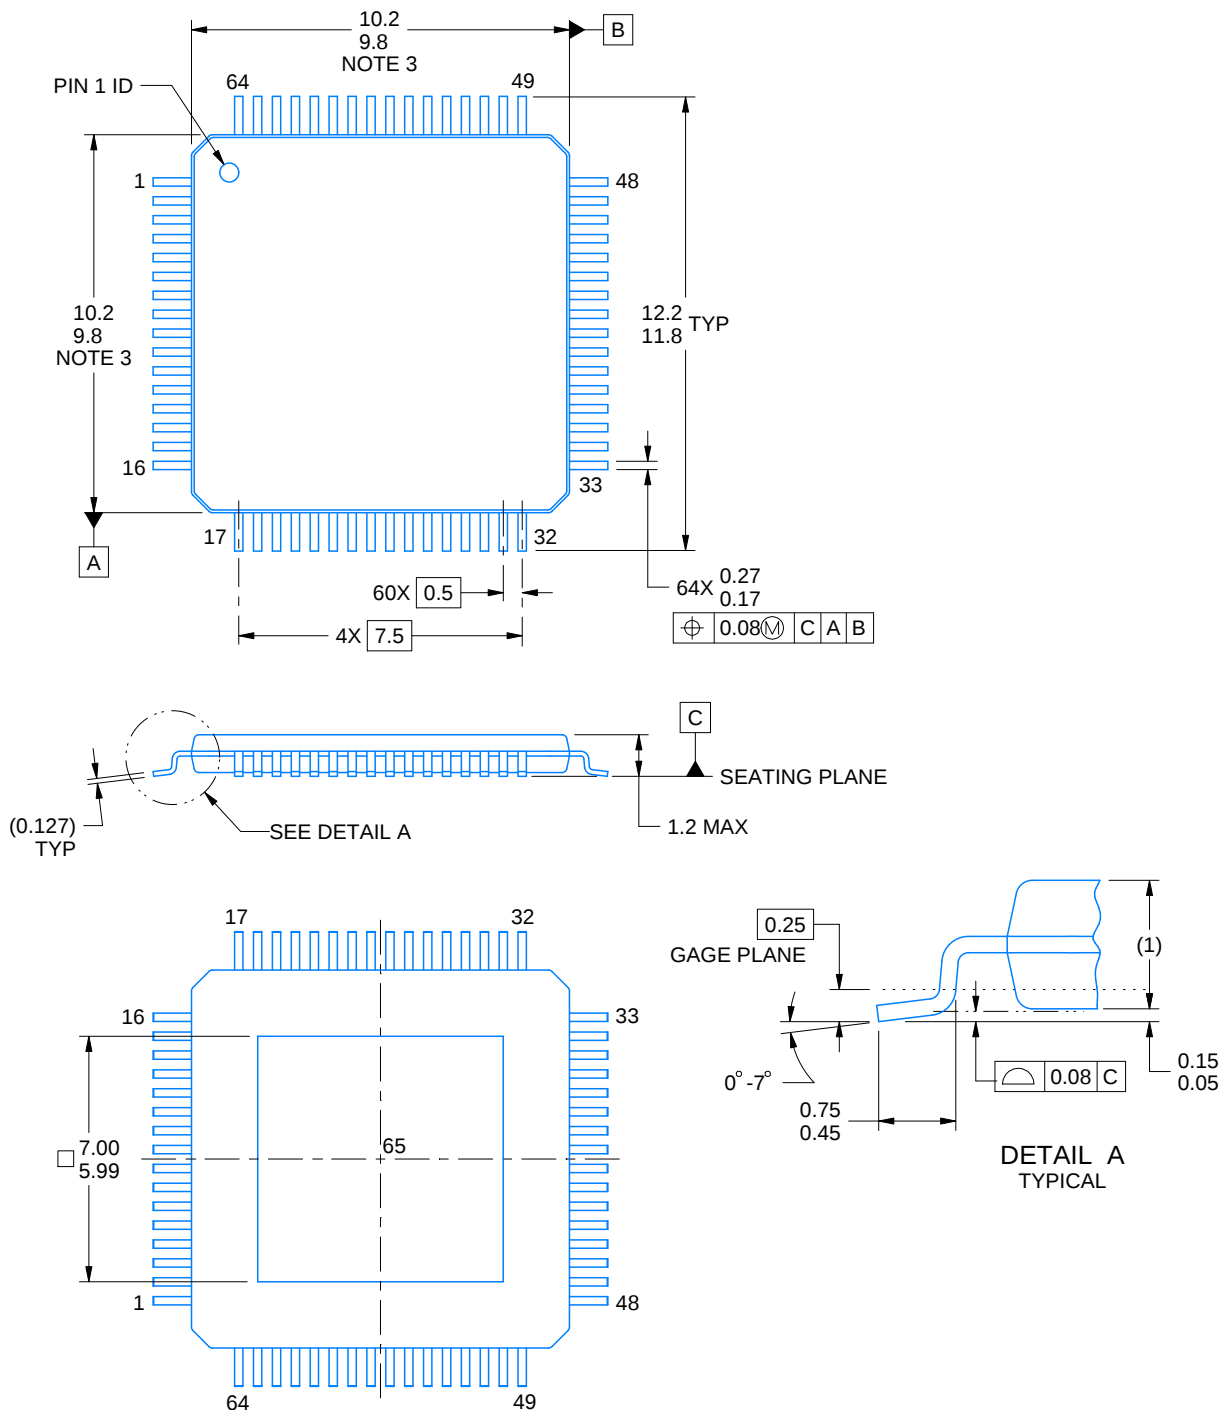

4218924/A 01/2022

NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs.
4. Strap features may not be present.
5. Reference JEDEC registration MS-026.

# EXAMPLE BOARD LAYOUT


PAP0064G

PowerPAD™ TQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

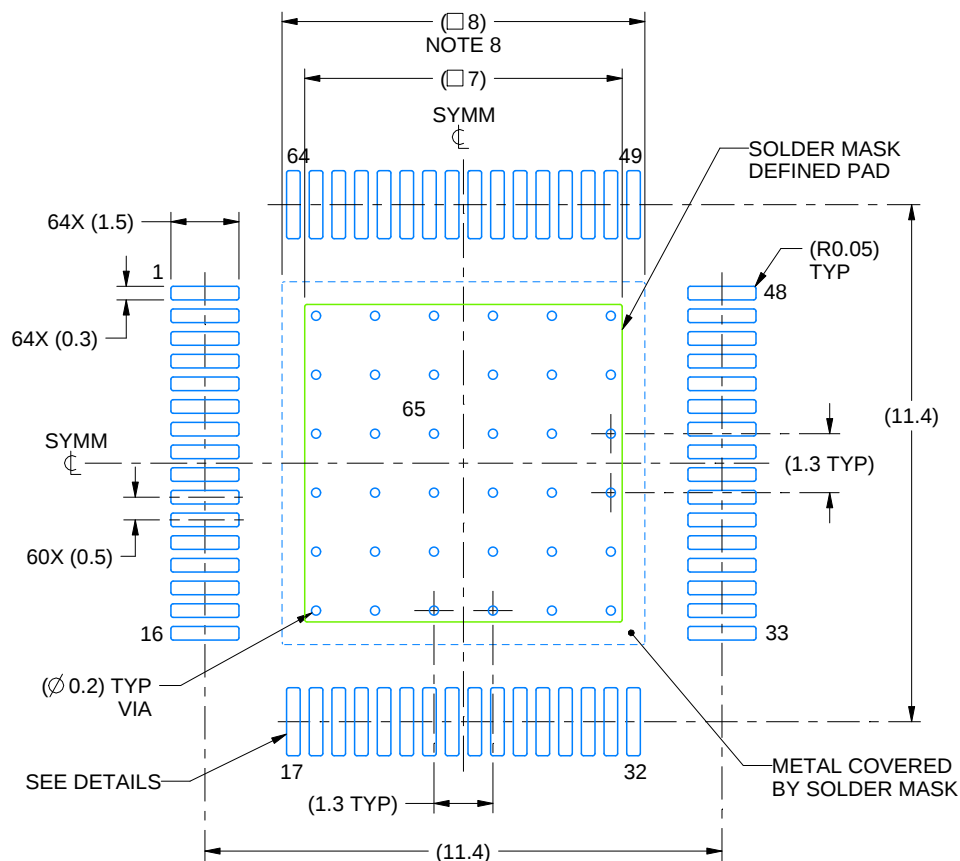

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:6X

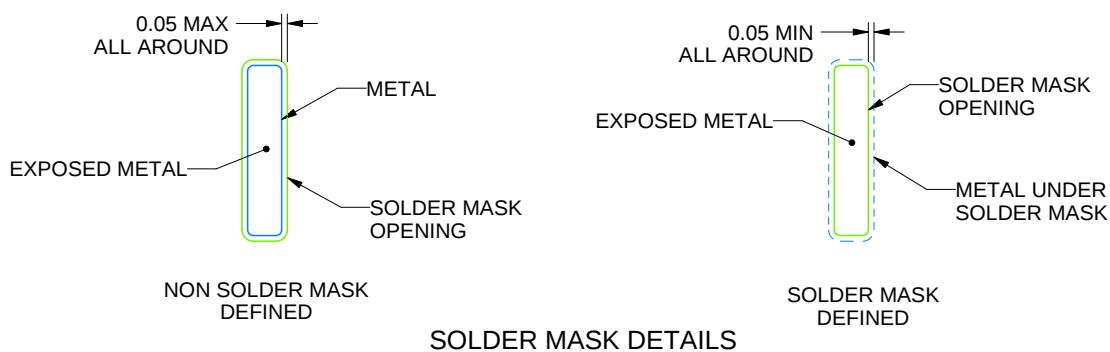

SOLDER MASK DETAILS

4218924/A 01/2022


NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. See technical brief, Powerpad thermally enhanced package, Texas Instruments Literature No. SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.
10. Size of metal pad may vary due to creepage requirement.

**PAP0064G**

## PowerPAD™ TQFP - 1.2 mm max height

## PLASTIC QUAD FLATPACK

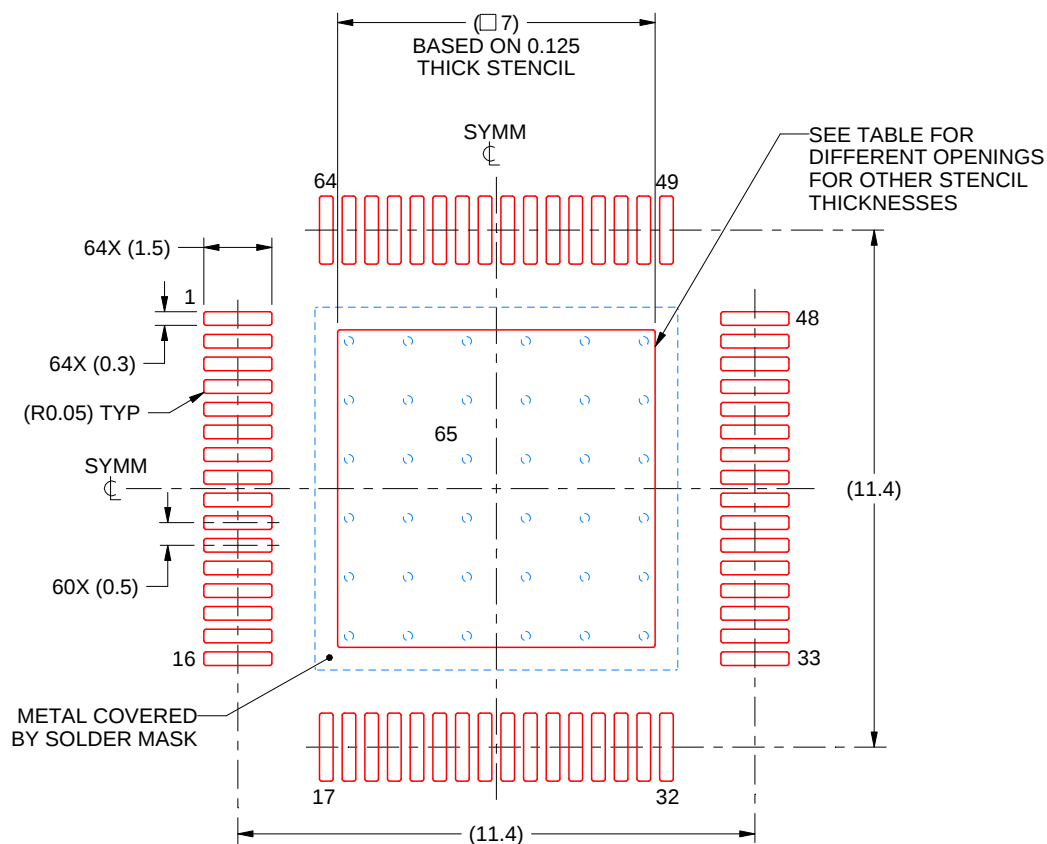

SOLDER PASTE EXAMPLE  
EXPOSED PAD  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE:6X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 7.83 X 7.83            |
| 0.125             | 7.0 X 7.0 (SHOWN)      |
| 0.15              | 6.39 X 6.39            |
| 0.175             | 5.92 X 5.92            |

4218924/A 01/2022

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適したテキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されているテキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかるテキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated