

# LMX1906-SP Space Grade Low-Noise, High-Frequency JESD204B/C Buffer, Multiplier and Divider

#### 1 Features

- SMD #5962-23202
  - Total ionizing dose 100krad (ELDRS-free)
  - Single event latch-up (SEL) immune up to 87MeV - cm<sup>2</sup> /mg
  - Single event functional interrupt (SEFI) immune up to 87MeV - cm<sup>2</sup> /mg
- Clock buffer for 300MHz to 15GHz frequency
- Ultra-Low Noise
  - Noise floor of –159dBc/Hz at 6GHz output
  - 36-fs additive jitter (100Hz to f<sub>CLK</sub>) at 6GHz
  - 5fs additive jitter (100Hz 100MHz)
- 4 high-frequency clocks with corresponding SYSREF outputs
  - Shared divide by 1 (Buffer), 2, 3, 4, 5, and 7
  - Shared programmable multiplier x2, x3, and x4
- Support pin mode options to configure the device without SPI
- LOGICLK output with corresponding SYSREF output
  - On separate divide bank
  - 1, 2, 4 pre-divider
  - 1 (bypass), 2, ..., 1023 post divider
- 8 programmable output power levels
- Synchronized SYSREF clock outputs
  - 508 delay step adjustments of less than 2.5ps each at 12.8GHz
  - Generator and repeater modes
  - Windowing feature for SYSREFREQ pins to optimize timing
- SYNC feature to all divides and multiple devices
- 2.5V operating voltage
- -55°C to 125°C operating temperature

## 2 Applications

- Radar imaging payload
- Communications payloads
- Command and data handling
- Data converter clocking
- Clock distribution/multiplication/division

### 3 Description


The LMX1906-SP is an buffer, divider and multiplier that features high frequency, ultra-low litter, and SYSREF outputs. This device combined with an ultralow noise reference clock source is an exemplary design for clocking data converters, especially when

sampling above 3GHz. Each of the 4 high frequency clock outputs and additional LOGICLK output is paired with a SYSREF output clock signal. The SYSREF signal for JESD interfaces can either be internally generated or passed in as an input and re-clocked to the device clocks. This device can distribute the multichannel, low skew, ultra-low noise local oscillator signals to multiple mixers by disabling the SYSREF outputs.

Package Information

	i dokugo i	monnation	
PART NUMBER	TYPE	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>
LMX1906PA P/EM	Engineering Samples	PAP (HTQFP,	10.00mm ×
5962R23202 01PXE	Radiation Hardness Assured	64)	10.00mm

- For all available packages, see Section 11. (1)
- The package size (length × width) is a nominal value and includes pins, where applicable.



**Block Diagram** 



# **Table of Contents**

1 Features 7 Register Map	32
2 Applications 7.1 Device Registers	
3 Description1 8 Application and Implementation	
4 Pin Configuration and Functions	54
5 Specifications	<b>5</b> 6
5.1 Absolute Maximum Ratings	59
5.2 ESD Ratings 7 8.4 Layout	60
5.3 Recommended Operating Conditions	62
5.4 Thermal Information	62
5.5 Electrical Characteristics	62
5.6 Timing Requirements	s62
5.7 Timing Diagram	62
5.8 Typical Characteristics	62
6 Detailed Description	62
6.1 Overview	62
6.2 Functional Block Diagram	62
6.3 Feature Description	
6.4 Device Functional Modes Configurations	63

# **4 Pin Configuration and Functions**

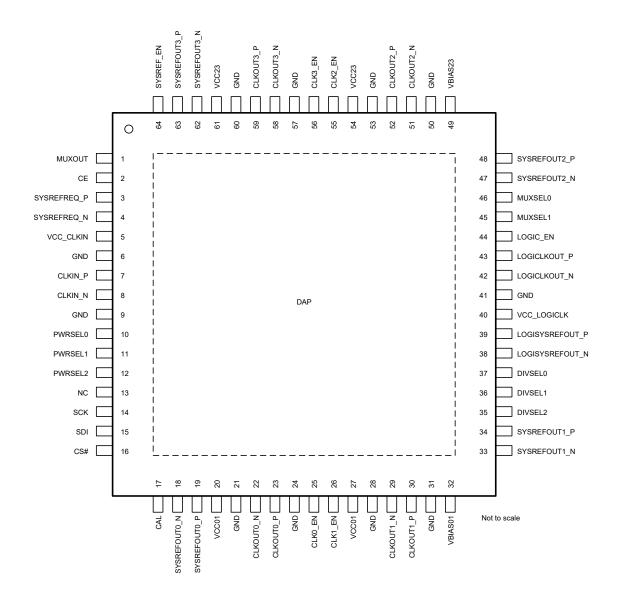


Figure 4-1. PAP0064E Package 64-Pin HTQFP Top View

Table 4-1. Pin Functions

NO.	NAME	TYPE <sup>(1)</sup>	DESCRIPTION
1	MUXOUT	0	Multiplexed pin serial data readback (SDO) and lock status of the multiplier.
2	CE	I	Chip Enable
3	SYSREFREQ_P	I	Differential SYSREF request input for JESD204B/C support. Internal $50\Omega$ AC coupled to internal common-mode voltage or capacitor to GND. Supports AC and DC coupling which can directly accept a common mode voltage of 1.2V to 2V.



## **Table 4-1. Pin Functions (continued)**

NO.	NAME	TYPE <sup>(1)</sup>	Pin Functions (continued)  DESCRIPTION
140.	IVAIILE	111 = 1	
4	SYSREFREQ_N	I	Differential SYSREF request input for JESD204B/C support. Internal $50\Omega$ AC coupled to internal common-mode voltage or capacitor to GND. Supports AC and DC coupling which can directly accept a common mode voltage of 1.2V to 2V.
5	VCC_CLKIN	PWR	Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically $0.1\mu F$ or smaller) close to the pin in parallel with larger capacitors (typically $1\mu F$ and $10\mu F$ ). Large capacitors can be placed further away from the pin.
6	GND	GND	Ground these pins.
7 8	CLKIN_P CLKIN_N	ı	Differential reference input clock. Internal $50\Omega$ termination. AC-couple with a capacitor appropriate to the input frequency (typically $0.1\mu F$ or smaller). If using single-ended, terminate unused pin with $50\Omega$ resistor AC-coupled to ground.
9	GND	GND	Ground these pins.
10	PWRSEL0	1	Selects output power level in pin mode.
11	PWRSEL1	I	Selects output power level in pin mode.
12	PWRSEL2	I	Selects output power level in pin mode.
13	NC	NC	No connect pin (Connect to ground with 1kΩ resistor.)
14	SCK	1	SPI clock. High impedance CMOS input. Accepts up to 3.3V.
15	SDI	1	SPI data input. High impedance CMOS input. Accepts up to 3.3V.
16	CS#	1	SPI chip select. High impedance CMOS input. Accepts up to 3.3V.
17	CAL	1	Calibration pin used in multiplier mode.
18	SYSREFOUT0_N	0	Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.
19	SYSREFOUT0_P	0	Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.
20	VCC01	PWR	Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1µF or smaller) close to the pin in parallel with larger capacitors (typically 1µF and 10µF). Large capacitors can be placed bit further away from the pin.
21	GND	GND	Ground these pins.
22	CLKOUT0_N	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
23	CLKOUT0_P	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
24	GND	GND	Ground these pins.
25	CLK0_EN	1	Enable / Disable the individual output channel.
26	CLK1_EN	- I	Enable / Disable the individual output channel.
27	VCC01	PWR	Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically $0.1\mu F$ or smaller) close to the pin in parallel with larger capacitors (typically $1\mu F$ and $10\mu F$ ). Large capacitors can be placed bit further away from the pin.
28	GND	GND	Ground these pins.
29	CLKOUT1_N	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
30	CLKOUT1_P	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
31	GND	GND	Ground these pins.
			I

in multiplier mode.    Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.    SYSREFOUT1_P		Table 4-1. Pin Functions (continued)							
SYSREFOUT1_N  O  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6 V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6 V to 2V.  SYSREFOUT1_P  O  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6 V to 2V.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Connect to a 2.5V supply. Recommend a shurt RF wideband capacitor (typically 1pf and 10pf). Large capacitors can be placed bit further away from the pin.  Configuration.  Configuration.  Connect to a 2.5V supply. Recommend a shurt RF wideband capacitor (typically 1pf and 10pf). Large capacitors can be placed bit further away from the pin.  Configuration.  Configuration.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair selectable CML, or LVDS format. Programmable common-mode voltage.  Select the operating mode buffer, divider or multiplier in pin mode configuration.  Differential SYSREF CML output pairs for	NO.	NAME	TYPE <sup>(1)</sup>	DESCRIPTION					
SYSREFOUT1_N  AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  BYSREFOUT1_P  O  AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0	32	VBIAS01	ВҮР	Bypass this pin to GND with a 10nF capacitor for optimal noise performance in multiplier mode.					
SYSREFOUT_P  O  AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  DIVSEL2  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL1  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0  I  Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Connect to a 2-5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1/μF and 10μF). Large capacitors can be placed bit further away from the pin.  Connect to a 2-5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1/μF and 10μF). Large capacitors can be placed bit further away from the pin.  Connect to a 2-5V supply. Recommend a shunt RF wideband capacitor (typically 1/μF and 10μF). Large capacitors can be placed bit further away from the pin.  LOGICLKOUT_N  O  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGICLKOUT_P  O  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  AC MUXSEL1  I  Select the operating mode buffer, divider or multiplier in pin mode configuration.  AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  SYSREFOUT2_N  O  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode volta	33	SYSREFOUT1_N	0	AC and DC coupling with programmable common-mode voltage of 0.6V to					
DIVSEL1 I Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  DIVSEL0 I Select the divider value or multiplier value in divider or multiplier mode in pin configuration.  LOGISYSREFOUT_N O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGISYSREFOUT_P O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  VCC_LOGICLK PWR Connect to 3 ∠50 supply. Recommend a shurt RF wideband capacitor (typically 0.1 μF or smaller) close to the pin in parallel with larger capacitors (typically 1 μF and 10 μF). Large capacitors can be placed bit further away from the pin.  LOGICLKOUT_N O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGICLKOUT_P O DIfferential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGICLKOUT_P O DIfferential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  MUXSEL1 I Enable / disable the logic channel in pin mode.  MUXSEL1 I Select the operating mode buffer, divider or multiplier in pin mode configuration.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  SYSREFOUT2_P O AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  PSysser Sysser CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P O Differential c	34	SYSREFOUT1_P	0	AC and DC coupling with programmable common-mode voltage of 0.6V to					
DIVSELO   1   Select the divider value or multiplier value in divider or multiplier mode in pin configuration.	35	DIVSEL2	I	Select the divider value or multiplier value in divider or multiplier mode in pin configuration.					
LOGISYSREFOUT_N  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  Connect to a 2.5% supply. Recommend a shunt RF wideband capacitor (typically 0.1µF or smaller) close to the pin in parallel with larger capacitors (typically 1.1µF or smaller) close to the pin in parallel with larger capacitors from the pin.  GND  GND  GND  GND  Ground these pins.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGICLKOUT_N  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGICLKOUT_P  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  LOGIC_EN  I Enable / disable the logic channel in pin mode.  Select the operating mode buffer, divider or multiplier in pin mode configuration.  MUXSEL0  I Select the operating mode buffer, divider or multiplier in pin mode configuration.  SYSREFOUT2_N  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  SYSREFOUT2_P  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  SYBIAS23  BYP  Bypass this pin to GND with a 10µF and 0.1µF capacitor for optimal noise performance in multiplier mode.  GND  GND  GND  GND  GND  GND  GND  GN	36	DIVSEL1	I	Select the divider value or multiplier value in divider or multiplier mode in pin configuration.					
39 LOGISTREFOUT_N O Programmable common-mode voltage.  39 LOGISYSREFOUT_P O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  40 VCC_LOGICLK PWR Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 1 μF and 10μF). Large capacitors can be placed bit further away from the pin.  41 GND GND Ground these pins.  42 LOGICLKOUT_N O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  43 LOGICLKOUT_P O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  44 LOGIC_EN I Enable / disable the logic channel in pin mode.  45 MUXSEL1 I Select the operating mode buffer, divider or multiplier in pin mode configuration.  46 MUXSEL0 I Select the operating mode buffer, divider or multiplier in pin mode configuration.  47 SYSREFOUT2_N O AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  48 SYSREFOUT2_P O Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  49 VBIAS23 BYP Bypass this pin to GND with a 10μF and 0.1μF capacitor for optimal noise performance in multiplier mode.  50 GND GND GND GND Ground these pins.  51 CLKOUT2_P O Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  52 CLKOUT2_P O Connect to a 2.7V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1.1μF and 10μF). Large capacitors can be placed bit further away from the pin.	37	DIVSEL0	I	Select the divider value or multiplier value in divider or multiplier mode in pin configuration.					
Programmable common-mode voltage.	38	LOGISYSREFOUT_N	0						
40 VCC_LOGICLK  PWR (typically 0.1µF or smaller) close to the pin in parallel with larger capacitors (typically 1µF and 10µF). Large capacitors can be placed bit further away from the pin.  41 GND  GND  GND  Ground these pins.  Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  43 LOGICLKOUT_P  O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  44 LOGIC_EN  I Enable / disable the logic channel in pin mode.  Select the operating mode buffer, divider or multiplier in pin mode configuration.  46 MUXSEL0  I Select the operating mode buffer, divider or multiplier in pin mode configuration.  47 SYSREFOUT2_N  O Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  48 SYSREFOUT2_P  O AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  49 VBIAS23  BYP  Bypass this pin to GND with a 10µF and 0.1µF capacitor for optimal noise performance in multiplier mode.  50 GND  GND  GND  GND  GND  GND  GND  GND	39	LOGISYSREFOUT_P	0						
LOGICLKOUT_N   O   Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.	40	VCC_LOGICLK	PWR	(typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away					
43 LOGICLKOUT_P  O Differential clock output pair. Selectable CML, or LVDS format. Programmable common-mode voltage.  44 LOGIC_EN  I Enable / disable the logic channel in pin mode.  45 MUXSEL1  I Select the operating mode buffer, divider or multiplier in pin mode configuration.  46 MUXSEL0  I Select the operating mode buffer, divider or multiplier in pin mode configuration.  47 SYSREFOUT2_N  O AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  48 SYSREFOUT2_P  O Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  49 VBIAS23  BYP Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  49 VBIAS23  BYP Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  50 GND GND GND GND with a 10µF and 0.1µF capacitor for optimal noise performance in multiplier mode.  51 CLKOUT2_N  O Differential clock output pairs. Each pin is an open-collector output with internally integrated 500 resistor with programmable output swing. AC coupling required.  52 CLKOUT2_P  O Differential clock output pairs. Each pin is an open-collector output with internally integrated 500 resistor with programmable output swing. AC coupling required.  53 GND GND GND GND Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1µF or smaller) close to the pin in parallel with larger capacitors (typically 0.1µF and 10µF). Large capacitors can be placed bit further away from the pin.	41	GND	GND	Ground these pins.					
Programmable common-mode voltage.	42	LOGICLKOUT_N	0						
Select the operating mode buffer, divider or multiplier in pin mode configuration.	43	LOGICLKOUT_P	0						
MUXSEL1   Configuration.	44	LOGIC_EN	I	Enable / disable the logic channel in pin mode.					
SYSREFOUT2_N  O  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  BYBIAS23  BYP  Bypass this pin to GND with a 10μF and 0.1μF capacitor for optimal noise performance in multiplier mode.  GND  GND  GND  GND  GND  GND  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P  O  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND  GND  GND  GND  GND  GND  Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  Enable / Disable the individual output channel.	45	MUXSEL1	I						
SYSREFOUT2_N  O  AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  BYP  Bypass this pin to GND with a 10μF and 0.1μF capacitor for optimal noise performance in multiplier mode.  GND  GND  GND  GND  Ground these pins.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P  O  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND  GND  GND  GND  GND  Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.	46	MUXSEL0	I						
SYSREFOUT2_P O AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.  BYP Bypass this pin to GND with a 10μF and 0.1μF capacitor for optimal noise performance in multiplier mode.  GND GND GND Ground these pins.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P O Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND GND GND GND GND Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.	47	SYSREFOUT2_N	0	AC and DC coupling with programmable common-mode voltage of 0.6V to					
Performance in multiplier mode.  GND Ground these pins.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P  O  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND  GND  GND  GND  Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  CLK2_EN  I  Enable / Disable the individual output channel.	48	SYSREFOUT2_P	0	AC and DC coupling with programmable common-mode voltage of 0.6V to					
Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  CLKOUT2_P  O  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND  GND  GND  Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  CLK2_EN  I  Enable / Disable the individual output channel.	49	VBIAS23	ВҮР						
CLKOUT2_N  O internally integrated 50Ω resistor with programmable output swing. AC coupling required.  Differential clock output pairs. Each pin is an open-collector output with internally integrated 50Ω resistor with programmable output swing. AC coupling required.  GND  GND  GND  Ground these pins.  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  CLK2_EN  I Enable / Disable the individual output channel.	50	GND	GND	Ground these pins.					
52 CLKOUT2_P O internally integrated 50Ω resistor with programmable output swing. AC coupling required.  53 GND GND Ground these pins.  54 VCC23 PWR Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  55 CLK2_EN I Enable / Disable the individual output channel.	51	CLKOUT2_N	0	internally integrated $50\Omega$ resistor with programmable output swing. AC					
54 VCC23  PWR  Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  55  CLK2_EN  I Enable / Disable the individual output channel.	52	CLKOUT2_P	0	internally integrated $50\Omega$ resistor with programmable output swing. AC					
VCC23 PWR (typically 0.1μF or smaller) close to the pin in parallel with larger capacitors (typically 1μF and 10μF). Large capacitors can be placed bit further away from the pin.  55 CLK2_EN I Enable / Disable the individual output channel.	53	GND	GND	Ground these pins.					
	54	VCC23	PWR	(typically $0.1\mu F$ or smaller) close to the pin in parallel with larger capacitors (typically $1\mu F$ and $10\mu F$ ). Large capacitors can be placed bit further away					
56 CLK3_EN I Enable / Disable the individual output channel.	55	CLK2_EN	I	Enable / Disable the individual output channel.					
	56	CLK3_EN	I	Enable / Disable the individual output channel.					



## **Table 4-1. Pin Functions (continued)**

NO.	NAME	TYPE <sup>(1)</sup>	DESCRIPTION
57	GND	GND	Ground these pins.
58	CLKOUT3_N	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
59	CLKOUT3_P	0	Differential clock output pairs. Each pin is an open-collector output with internally integrated $50\Omega$ resistor with programmable output swing. AC coupling required.
60	GND	GND	Ground these pins.
61	VCC23	PWR	Connect to a 2.5V supply. Recommend a shunt RF wideband capacitor (typically $0.1\mu F$ or smaller) close to the pin in parallel with larger capacitors (typically $1\mu F$ and $10\mu F$ ). Large capacitors can be placed bit further away from the pin.
62	SYSREFOUT3_N	0	Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.
63	SYSREFOUT3_P	0	Differential SYSREF CML output pairs for JESD204B/C support. Supports AC and DC coupling with programmable common-mode voltage of 0.6V to 2V.
64	SYSREF_EN	I	Enable / disable the SYSREF section in pin mode configuration.
DAP	DAP	GND	Ground the pad.

<sup>(1)</sup> I = Input, O = Output, GND = Ground, PWR = Power, BYP = Bypass

## 5 Specifications

## 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
V <sub>CC</sub>	Power supply voltage	-0.3	2.75	V
V <sub>IN</sub>	DC Input Voltage (SCK, SDI, CSB)	GND	3.6	V
V <sub>IN</sub>	DC Input Voltage (SYSREFREQ)	GND	V <sub>CC</sub> + 0.3	V
V <sub>IN</sub>	AC Input Voltage (CLKIN)		2.1	Vpp
TJ	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature	-65	150	°C

<sup>(1)</sup> Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

## 5.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±2500	V
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per ANSI/ESDA/ JEDEC JS-002, all pins <sup>(2)</sup>	±250	V

- (1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

### 5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Supply voltage	2.4	2.5	2.6	V
T <sub>C</sub>	Case Temperature	-55		125	°C

### 5.4 Thermal Information

SYMBOL	THERMAL MATRIC(1)	PAP (HTQFP)	UNIT
STIVIBOL	I THERMAL MATRIC	64 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	21.7	°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	9.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	7.3	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	0.1	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	7.2	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	0.6	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

Copyright © 2025 Texas Instruments Incorporated



## **5.5 Electrical Characteristics**

 $2.4\text{V} \le \text{V}_{\text{CC}} \le 2.6\text{V}, -55^{\circ}\text{C} \le \text{T}_{\text{C}} \le +125^{\circ}\text{C}.$  Typical values are at  $\text{V}_{\text{CC}} = 2.5\text{V}, 25^{\circ}\text{C}$  (unless otherwise noted)

	PARAMETER	TEST CO	NDITIONS	MIN	TYP	MAX	UNIT	
Current Co	nsumption							
		Powered up, all outpu	its and SYSREF on		1050			
	Committee Committee (1)	Powered up, all outpu	Powered up, all outputs on, all SYSREF off		600		Л	
I <sub>CC</sub>	Supply Current (1)	Powered up, all outpu	its and SYSREF off		265		mA	
		Powered down <sup>(2)</sup>			11			
SYSREF		-	'			11.		
£	CVCDEE output froguency	Generator mode				200	MHz	
f <sub>SYSREF</sub>	SYSREF output frequency	Repeater mode				100	MHz	
Δt	SYSREF delay step size	f <sub>CLKIN</sub> = 12.8GHz			3		ps	
		SYSREFOUT			45		ps	
t <sub>RISE</sub>	Rise time (20% to 80%)	LOGISYSREFOUT	CML		120		ps	
		EOOIOTOINEI OOT	LVDS		120		ps	
		SYSREFOUT			45	200 100 100 3 3 4 4 5 7 7 8 8 10 8 10 8 10 8 10 10 10 10 10 10 10 10 10 10 10 10 10	ps	
t <sub>FALL</sub>	Fall time (20% to 80%)	LOGISYSREFOUT	CML		120		ps	
t <sub>FALL</sub> Fall  V <sub>OD</sub> Diffe  V <sub>SYSREFCM</sub> Cor  SYSREFREQ Pi  V <sub>SYSREFIN</sub> Volt  V <sub>CM</sub> Inpu  Clock Input		EGGIOTOREI GOT	LVDS		120		ps	
		SYSREFOUT			0.85		Vpp	
$V_{OD}$	Differential output voltage	LOGISYSREFOUT	CML		0.4		Vp	
		EGGIGT GREET GGT	LVDS		0.4		Vp	
V <sub>SYSREFCM</sub>	Common mode voltage	SYSREFOUT	CML SYSREFOUTx_PW R=4 100Ω Differential Load		0.8		V	
SYSREFRE	Q Pins							
V <sub>SYSREFIN</sub>	Voltage input range	AC differential voltage	e	0.8		2	Vpp	
$V_{CM}$	Input common mode	Differential 100Ω Terr Set externally	mination, DC coupled	1.2	1.3	2	V	
Clock Inpu	t		·					
f <sub>IN</sub>	Input frequency	Buffer Mode Only		0.3		15 <sup>(3)</sup>	GHz	
P <sub>IN</sub>	Input power	Single-ended power a CLKIN_N	at CLKIN_P or	0		10	dBm	
Clock Outp	uts					·		
f <sub>OUT</sub>	Output frequency	Divide-by-2		0.15		6.4		
f <sub>OUT</sub>	Output frequency	Buffer Mode		0.3		15 <sup>(3)</sup>	GHz	
f <sub>OUT</sub>	Output frequency	x2, x3, x4		3.2		6.4		
f <sub>OUT</sub>	Output frequency	LOGICLK output		1		800	MHz	
t <sub>CAL</sub>	Calibration-time	Multiplier calibration time	f <sub>IN</sub> = 3.2GHz; x2 f <sub>SMCLK</sub> = 28MHz		750		μs	
			f <sub>CLKLOUT</sub> = 6GHz OUTx_PWR = 7		6			
Роит	Output power	Single-Ended	f <sub>CLKLOUT</sub> = 12.8GHz OUTx_PWR = 7		0		dBm	
			f <sub>CLKLOUT</sub> = 15GHz OUTx_PWR = 7		-3			
t <sub>RISE</sub>	Rise time (20% to 80%)	f <sub>CLKOUT</sub> = 300MHz	·		45		ps	
t <sub>FALL</sub>	Fall time (20% to 80%)	f <sub>CLKOUT</sub> = 300MHz			45		ps	
t <sub>MUTE</sub>	Output mute time	Falling edge of OE pi	n			30	μs	

Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated

 $2.4\text{V} \le \text{V}_{\text{CC}} \le 2.6\text{V}, -55^{\circ}\text{C} \le \text{T}_{\text{C}} \le +125^{\circ}\text{C}$ . Typical values are at  $\text{V}_{\text{CC}} = 2.5\text{V}, 25^{\circ}\text{C}$  (unless otherwise noted)

	PARAMETER	TEST CON	IDITIONS	MIN	TYP	MAX	UNIT
t <sub>UNMUTE</sub>	Output unmute time	Rising edge of OE pin				30	μs
Propagation	on Delay and Skew					'1	
t <sub>SKEW</sub>	Magnitude of skew between outputs	T <sub>A</sub> = -55°C to +125°C			2.5	10	ps
Δt <sub>DLY</sub> /ΔT	Propagation delay variation over temp	Buffer Mode		0.02	0.06	0.1	ps/C
		Buffer Mode			180		
$t_{DLY}$	Propagation delay	Divider Mode	T <sub>A</sub> = 25°C		182		ps
		Multiplier Mode			185		
Noise, Jitt	er, and Spurs						
			Buffer Mode		5		
	A delikira iikkan	Additive Jitter. 12kHz	x2 Multiplier		16		f
$J_{CKx}$	Additive jitter	to 100MHz integration bandwidth.	x3 Multiplier		21		fs, rms
			x4 Multiplier		26		
Flicker	1/f flicker noise	Slew Rate > 8V/ns, f <sub>CLK</sub> =6GHz	Buffer Mode		-155		dBc/Hz
			Buffer Mode		-159		
	Noise Floor	f <sub>OUT</sub> = 6GHz; f <sub>Offset</sub> = 100MHz	Divide-by-2		-158.5		dBc/Hz
NFL		100IVII IZ	Multiplier (x2,x3,x4)		-159.5		
	Notes Elect	LOGICLK output, 300MHz	CML		-150.5		dBc/Hz
	Noise Floor		LVDS		-151.5		
	Second harmonic	f <sub>OUT</sub> = 6GHz (differential), Buffer Mode			-25		
H2		f <sub>OUT</sub> = 6GHz (single-ended), Buffer Mode			-13		dBc
		f <sub>OUT</sub> = 6GHz (single-ended) f <sub>OUT</sub> = 6GHz, single-ended,	ided, Divide by 2		-16		
H1/2			x2 (f <sub>SPUR</sub> = 3GHz)		-40		JD.
H1/3		f <sub>OUT</sub> = 6GHz (single- ended)	x3 (f <sub>SPUR</sub> = 2GHz)		-50		dBc
H1/4		chacay	x4 (f <sub>SPUR</sub> = 1.5GHz)		-54		dBc
I <sub>SPUR</sub>	LOGICLK to CLKOUT	f <sub>SPUR</sub> = 300MHz (differ	ential)		-70		dBc
Digital Inte	erface (SCK, SDI, CS#, MUXOUT,CLKx	EN,MUXSELx,PWRSI	ELx,DIVSELx,LOGIC_	EN,SYSREF	_EN,CAL,	CE)	
	High-level input voltage	SCK, SDI, CS#		1.4		3.3	V
$V_{IH}$	High-level input voltage	CLKx_EN,MUXSELx,F OGIC_EN,SYSREF_E		1.4		3.3	V
	Low-level input voltage	SCK, SDI, CS#		0		0.4	V
$V_{IL}$	Low-level input voltage	CLKx_EN,MUXSELx,F OGIC_EN,SYSREF_E		0		0.4	V
	High-level input current	SCK, SDI, CS#		-42		42	μΑ
I <sub>IH</sub>	High-level input current	CLKx_EN,MUXSELx,F OGIC_EN,SYSREF_E		-42		42	μA
	Low-level input current	SCK, SDI, CS#		-25		25	μA
I <sub>IL</sub>	Low-level input current		CK, SDI, CS#  CLKx_EN,MUXSELx,PWRSELx,DIVSELx,L  DGIC_EN,SYSREF_EN,CAL,CE			25	μA
\ /	High-level output voltage	MUNOUT	I <sub>OH</sub> = 5mA	1.4		2.2	V
$V_{OH}$	High-level output voltage	MUXOUT	I <sub>OH</sub> = 0.1mA	2.2		2.5	V
V <sub>OL</sub>	Low-level output voltage	MUXOUT	I <sub>OL</sub> = 5mA			0.45	V

 $<sup>(1) \</sup>qquad \text{Unless Otherwise Stated, } \\ f_{\text{CLKIN}} = 6 \\ \text{GHz, CLK\_MUX=Buffer, All clocks on with OUTx\_PWR=7, SYSREFREQ\_MODE=1.} \\$ 

<sup>(2)</sup> For powered down mode.

<sup>(3)</sup> SYNC, divider, SYSREF and SYSREF windowing supported up to 12.8GHz frequency.

## 5.6 Timing Requirements

		MIN	NOM	MAX	UNIT
Timing Requirements					
f <sub>SPI</sub>	SPI Read/Write Speed			2	MHz
t <sub>CE</sub>	Clock to enable low time	20			ns
t <sub>CS</sub>	Clock to data wait time	20			ns
t <sub>CH</sub>	Clock to data hold time	20			ns
t <sub>CWH</sub>	Clock pulse width high	100			ns
t <sub>CWL</sub>	Clock pulse width low	100			ns
t <sub>CES</sub>	Enable to clock setup time	20			ns
t <sub>EWH</sub>	Enable pulse width high	50			ns
t <sub>CD</sub>	Falling clock edge to data wait time	0		100	ns

### 5.7 Timing Diagram

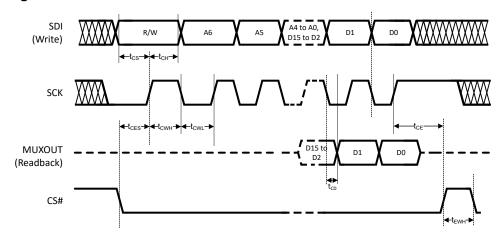


Figure 5-1. Serial Data Input Timing Diagram

There are several other considerations for writing on the SPI:

- The R/W bit must be set to 0.
- The data on SDI pin is clocked into a shift register on each rising edge on the SCK pin.
- The CS# must be held low for data to be clocked. The device ignores clock pulses if CS# is held high.
- Recommended SPI settings for this device are CPOL=0 and CPHA=0.
- When SCK and SDI lines are shared between devices, TI recommends to hold the CS# line high on the
  device that is not to be clocked.

There are several other considerations for SPI readback:


- The R/W bit must be set to 1.
- The MUXOUT pin is always be low for the address portion of the transaction.
- The data on MUXOUT is clocked out at the falling edge of SCK. In other words, the readback data is
  available at the MUXOUT pin t<sub>CD</sub> after the clock falling edge.
- The data portion of the transition on the SDI line is always ignored.
- The MUXOUT pin does not automatically tri-state after a readback transaction completes. When sharing the SPI bus readback pin with other devices, set MUXOUT\_EN=0 after all readback transactions from device are complete to manually tri-state the MUXOUT pin, permitting other devices to control the readback line.
- The values read back, even for R/W bits are not always the value written but rather an internal device state that takes into account the programmed value as well as other factors, such as pin states.

Submit Document Feedback


Copyright © 2025 Texas Instruments Incorporated

## 5.8 Typical Characteristics

If not otherwise, the following conditions can be assumed: Temperature =  $25^{\circ}$ C,  $V_{CC}$  = 2.5V, OUTx\_PWR = 5, CLKIN driven differentially with 8dBm at each pin. Signal source used is Rohde & Schwarz<sup>®</sup> SMA100B with ultra-low noise option B711.

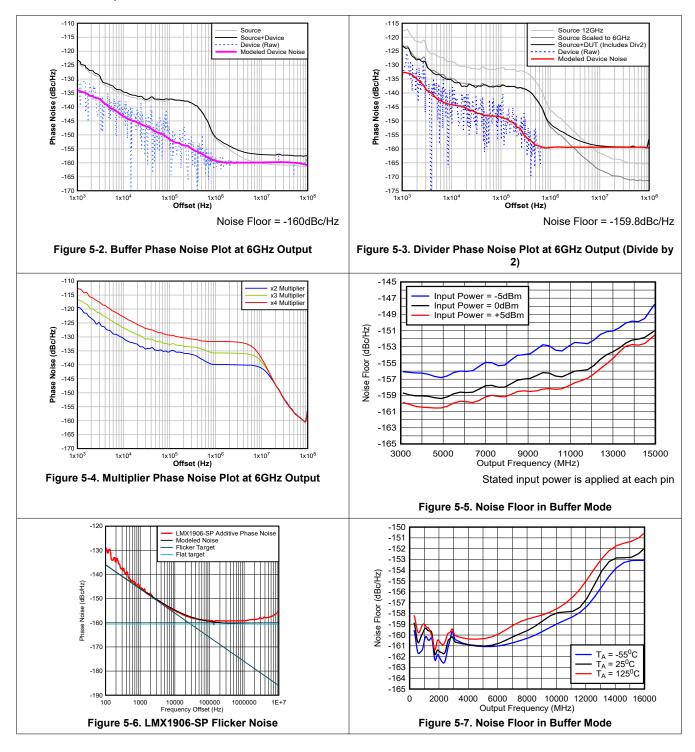

## 5.8 Typical Characteristics (continued)

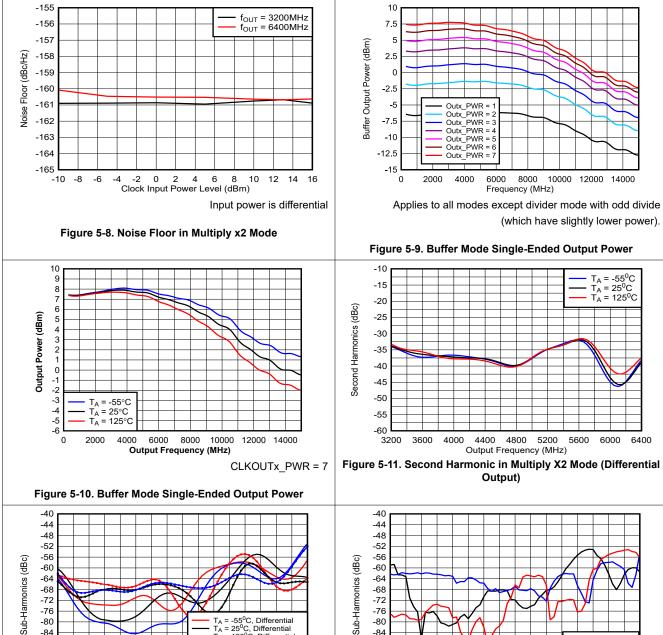

Output Frequency (MHz) Figure 5-12. Multiplier 1/2 Sub-Harmonic in X2 Mode

4400

4800 5200

 $T_A = -55^{\circ}C$ , Differential  $T_A = 25^{\circ}C$ , Differential  $T_A = 125^{\circ}C$ , Differential  $T_A = -55^{\circ}C$ , Single-ende

 $T_A = -55^{\circ}$ C, Single-ended  $T_A = 25^{\circ}$ C, Single-ended  $T_A = 125^{\circ}$ C, Single-ended




Figure 5-13. Multiplier Sub-Harmonics (Harmonic Frequency = Output Frequency / M )

-76

-80

-84

-88

-92

-96

-100

## **5.8 Typical Characteristics (continued)**




Figure 5-14. Second Harmonic on Divider Mode (Single-Ended Input)




Figure 5-15. Output to Output Skew (ps)






Figure 5-16. SYSREF Delta Delay vs. Code



Measured in power-down mode to make Junction Temperature = Ambient Temperature.











Figure 5-19. Channel Enable Setting Time



# 5.8 Typical Characteristics (continued)

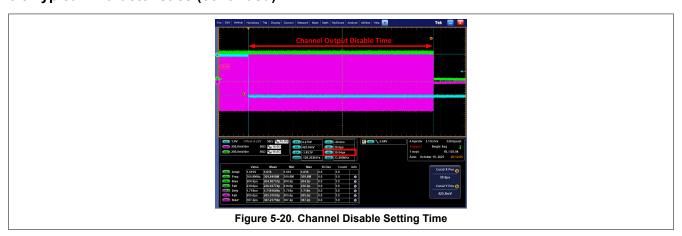

## **6 Detailed Description**

#### 6.1 Overview

This device has four main clock outputs and another LOGICLK output. The main clock outputs are all the same frequency. This frequency can be the same, divided, or multiplied relative to the input clock. Each of these clock outputs has programmable power level. The LOGICLK output frequency is independent and typically lower frequency than the other four main clocks and has programmable output format (CML and LVDS) and power level.

The SYSREF can be generated by either repeating the input from the SYSREFREQ pins, or internally generated. There is an internal SYSREF windowing feature that allows the internal timing of the device to be adjusted to optimize setup and hold times of the SYSREFREQ input with respect to the CLKIN input. This feature assumes that the delay between the SYSREF edge and the next rising clock edge is consistent. Each of the five outputs has a corresponding SYSREF output that has individual delays and programmable common mode. For the LOGISYSREF output, the output format is programmable as CML or LVDS.

## 6.1.1 Range of Dividers and Multiplier

There are dividers that allow the main and LOGICLK outputs to be a divided value of the input clock. The main clock outputs also have a multiplier. In addition to this, dividers are used for SYSREF generation in generator mode as well as generation of the delay block.

Table 6-1. Range of Dividers and Multiplier

Table 6 1. Range of Divide 5 and Matapher						
CATEGORY			RANGE	COMMENTS		
	1	Buffer				
Main Clocks		Divider		Odd divides (except 1) do not have 50% duty cycle		
	Multiplier		2, 3, 4			
LOGICLK	Divide	PreDivide	1, 2, 4	TotalDivide = PreDivide × Divide		
LOGICLK	Divide	Divide	1, 2, 3, 1023	Odd divides (except 1) do not have 50% duty cycle		
	Divide for	PreDivide	1,2, 4	Pre-divides clock for SYSREF generation.		
SYSREF	frequency generation	Divide	2, 3, 4, 4095	TotalDivide = PreDivide×Divide Odd divides do not have 50% duty cycle		
OTOKEI	Divide for delay generation	Divide	2, 4, 8, 16	This divide is for phase interpolator and set according to the input frequency.		

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback



## 6.2 Functional Block Diagram

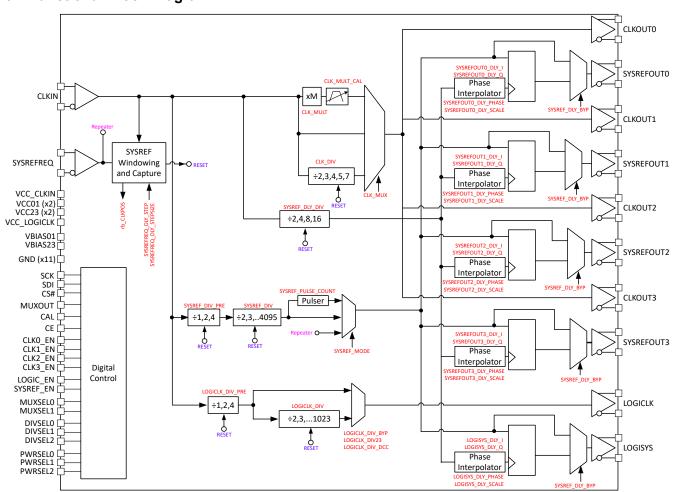


Figure 6-1. Functional Block Diagram

## **6.3 Feature Description**

#### 6.3.1 Power On Reset

When the device is powered up, the power-on reset (POR) resets all registers to a default state as well as resets all state machines and dividers. For the power on reset state, all SYSREF outputs are disabled and all the dividers are bypassed and the device performs as a 4-output buffer. Wait approximately 100µs after the power supply rails before programming other registers to verify that this reset is finished. The device functions properly if the power-on reset happens when no device clock is present, but the current changes after an input clock is inserted.

Performing a software power on reset by writing RESET = 1 in the SPI bus is possible and generally good practice. The RESET bit self-clears when the user writes to any other register. The SPI bus can be used to override these states to the desired settings.

Although the device does have an automatic power on reset, the can be impacted by different ramp rates on the different supply pins, especially in the presence of a strong input clock signal. TI therefore recommends to do a software reset after POR. This can be done by programming RESET = 1. The reset bit can be cleared by programming any other register or setting RESET back to 0. Even at the maximum allowed SPI bus speed, the software reset event always completes before the subsequent SPI write.

### 6.3.2 Temperature Sensor

The junction temperature can be read back for purposes such as characterization or to make adjustments based on temperature. Such adjustments can include adjusting CLKOUTx\_PWR to make the output power more stable or using external or digital delays to compensate for changes in propagation delay over temperature.

The junction temperature is typically higher than the ambient temperature due to power dissipation from the outputs and other functions on the device. Equation 1 shows the relationship between the code read back and the junction temperature.

Temperature = 
$$0.65 \times \text{Code} - 351$$
 (1)

Equation 1 is based on a best-fit line created from three devices from slow, nominal, and fast corner lots (nine parts total). The worst-case variation of the actual temperature from the temperature predicted by the best-fit line is 13°C, which works out to 20 codes.

### 6.3.3 Clock Outputs

This device has four main output clocks which share a common frequency. This does not include the additional lower frequency LOGICLK output.

#### 6.3.3.1 Clock Output Buffers

The output buffers have a format that is open collector with an integrated pullup resistor, similar to CML.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback






Figure 6-2. CLKOUT Output Buffer

The CLKOUTx\_EN bits can enable the output buffers. The output power of the buffers can be individually set with CLKOUTx\_PWR field. However, these fields only control the output buffer, not the internal channel path that drives this buffer. To power down the entire path, disable the CHx\_EN bit.

**Table 6-2. Clock Output Power** 

CHx_EN	INTERNAL CHANNEL PATH	CLKOUTx_EN	CLKOUTx_PWR	OUTPUT BUFFER	
0	Powered Down	Don't Care	Don't Care	Powered Down	
	Powered Up		0	Don't Care	Powered Down
			0	Minimum	
1		4	1		
		'			
			7	Maximum	

#### **6.3.3.2 Clock MUX**

The four main clocks must be the same frequency, but this frequency can be bypassed, multiplied, or divided. This is determined by the CLK MUX word.

Table 6-3. Clock MUX

CLK_MUX	OPTION	VALUES SUPPORTED
0	Buffer Mode	÷1 (bypass)
1	Divider Mode	÷2, 3, 4, 5, and 7
2	Multiplier Mode	x2, x3, x4

#### 6.3.3.3 Clock Divider

Set the CLK\_MUX to Divided to a divide value by 2, 3, 4, 5, and 7. This is set by the CLK\_DIV word. When using the clock divider, any change to the input frequency requires the CLK\_DIV\_RST bit to be toggled from 1 to 0.

Table 6-4. Clock Divider

CLK_DIV	DIVIDE	DUTY CYCLE
0	Reserved	N/A
1	2	50%
2	3	33%
3	4	50%
4	5	40%

Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated

Instruments www.ti.com

### **Table 6-4. Clock Divider (continued)**

CLK_DIV	DIVIDE	DUTY CYCLE
5	Reserved	N/A
6	7	43%
7	Reserved	N/A

#### 6.3.3.4 Clock Multiplier

#### 6.3.3.4.1 General Information about the Clock Multiplier

Use the clock multiplier to multiply up the input clock frequency by a factor of x2, x3, or x4. The multiply value is set by the CLK MULT field. As the multiplier is PLL-based and includes an integrated VCO, the multiplier has a state machine clock, requires calibration, has a lock detect feature.

#### 6.3.3.4.2 State Machine Clock for the Clock Multiplier

The state machine clock frequency (f<sub>SMCLK</sub>) is derived by dividing down the input clock frequency by a programmed divider value. The state machine clock is also necessary for the multiplier calibration and lock detect.

#### 6.3.3.4.2.1 State Machine Clock

The state machine clock must be enabled in all operating modes (Buffer, divider and Multiplier). The device has a power on reset default setting SMCLK EN = 1 and this field must not be changed to any other state. The state of the SMCLK EN can be readback by register R2[5] bit. Input clock must be present at CLKIN pins to configure the device properly.

The state machine clock needs to be less than 30MHz and the frequency is as follows:

f<sub>SMCLK</sub> = f<sub>CLKIN</sub> / (SMCLK\_DIV\_PRE × SMCLK\_DIV)

### 6.3.3.4.3 Calibration for the Clock Multiplier

For optimal phase noise, the VCO in the multiplier divides up the frequency range into many different bands and cores and has optimized amplitude settings for each band and core. For this reason, upon initial use or whenever the frequency is changed, the user must run a calibration routine to determine the correct core, frequency band, and amplitude setting. Program the R0 register with a valid input signal to perform a calibration. To provide reliable multiplier calibration, the state machine clock frequency must be at least twice the SPI write speed, but no more than 30MHz. Whenever the CLK MUX mode is changed or the multiplier is calibrated for the first time, the calibration time is substantially longer, on the order of 5ms.

#### 6.3.3.4.4 Lock Detect for the Clock Multiplier

The lock detect status of the multiplier can be read back through the rb\_LOCK\_DETECT field or from the MUXOUT pin. The state machine clock must be running for the lock detect to work properly.

#### 6.3.3.4.5 Watchdog Timer

The watchdog feature is used when radiation during VCO calibration causes the VCO calibration to fail in multiplier mode. The watchdog timer run during VCO calibration. If this timer runs out before the VCO calibration is finished, then the VCO calibration is restarted. During the watchdog timer operation, state machine clock must be enabled.

### 6.3.4 LOGICLK Output

The LOGICLK output can be used to drive devices using lower frequency clocks, such as FPGAs. The LOGICLK output has a programmable output format and a corresponding SYSREF output.

## 6.3.4.1 LOGICLK Output Format

The LOGICLK output format can be programmed to LVDS and CML modes. Depending on the format, the common mode can be programmable or external components can be required (see Table 6-5).



### Table 6-5. LOGICLK Formats and Properties

LOGICLKOUT_FMT	FORMAT	EXTERNAL COMPONENTS REQUIRED	OUTPUT LEVEL	COMMON MODE
0	LVDS	None	Fixed	Programmable through LOGICLKOUT_VCM
2	CML		Programmable through LOGICLKOUT_PWR	Not programmable

#### 6.3.4.2 LOGICLK\_DIV\_PRE and LOGICLK\_DIV Dividers

The LOGICLK\_DIV\_PRE divider and LOGICLK\_DIV dividers are used for the LOGICLK output. The LOGICLK\_DIV\_PRE divider is necessary to divide the frequency down to verify that the input to the LOGICLK\_DIV divider is 3.2GHz or less. When LOGICLK\_DIV is not even and not bypassed, the duty cycle is not 50%. Both the LOGICLK dividers are synchronized by the SYNC feature, which allows synchronization across multiple devices. The dividers LOGICLK\_DIV\_PRE and LOGICLK\_DIV has the default divide value of 4 and 32 respectively.

Table 6-6. Minimum N-Divider Restrictions

f <sub>CLKIN</sub> (MHz)	LOGICLK_DIV_PRE	LOGICLK_DIV	TOTAL DIVIDE RANGE
f <sub>CLKIN</sub> ≤ 3.2GHz	÷1, 2, 4	÷1, 2, 3,1023	[1, 2,1023] [2, 4, 2046] [4, 8, 4092]
3.2GHz < f <sub>CLKIN</sub> ≤ 6.4GHz	÷2, 4	÷1, 2, 3,1023	[4, 2046] [4, 8, 4092]
f <sub>CLKIN</sub> > 6.4GHz	÷4	1, 2, 3,1023	[8, 4092]

#### 6.3.5 SYSREF

SYSREF allows a low frequency JESD204B/C compliant signal to be produced that is reclocked to a main or LOGICLK output. The delays between the CLKOUT and SYSREF outputs are adjustable with software. The SYSREF output can be configured as a generator using the internal SYSREF divider, or as a repeater duplicating the signal on the SYSREFREQ pins. The SYSREF generator for both the main clocks and the LOGICLK output are the same.

Table 6-7. SYSREF Modes

SYSREF_MODE	DESCRIPTION
0	Generator Mode Internal generator creates a continuous stream of SYSREF pulses. The SYSREFREQ pins or the SYSREFREQ_FORCE bit can be used to gate the SYSREF divider from the channels for improved noise isolation without disrupting the synchronization of the SYSREF dividers. The SYSREFREQ pins or the SYSREFREQ_FORCE bit must be high for a SYSREF output to come out.
1	Pulser Internal generator generates a burst of 1 - 16 pulses that is set by SYSREF_PULSE_CNT that occurs after a rising edge on the SYSREFREQ pins or after changing SYSREFREQ_FORCE bit from 0 to 1 (assuming SYSREFREQ pins to be forced to a low state).
2	Repeater Mode SYSREFREQ pins input are reclocked to clock outputs and then delayed in accordance to the SYSREF_DLY_BYP field before sent to the SYSREFOUT output pins.

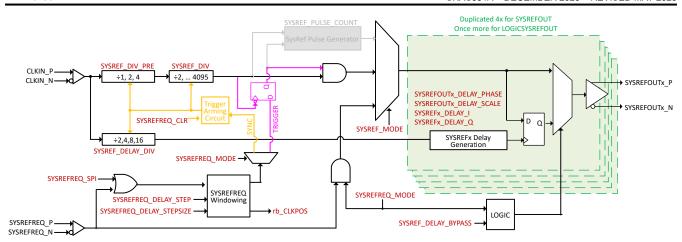


Figure 6-3. Functional Block Diagram of SYSREF Circuitry in Generator Mode

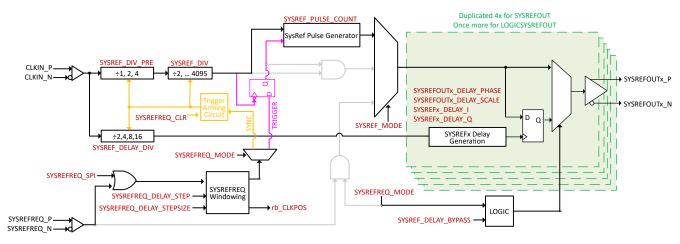


Figure 6-4. Functional Block Diagram of SYSREF Circuitry in Pulser Mode

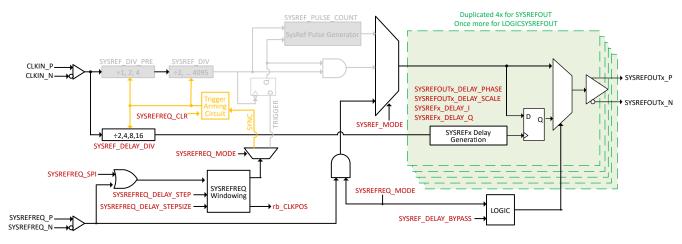


Figure 6-5. Functional Block Diagram of SYSREF Circuitry in Repeater Mode

To operate the SYSREFREQ\_FORCE bit controlled SYSREF output (Pulser) and SYNC, set the SYSREFREQ pins to low logic state externally. For example, make sure the SYSREFREQ\_N pin is at a higher level (400mV) than the SYSREFREQ\_P pin and maintain the input common-mode voltage requirement.






Figure 6-6. SYSREFREQ Pin Logic Low Setup

As an example, to maintain the minimum 400mV voltage difference for a VCC of 2.5V, the current draw through  $100\Omega$  is 4mA. In this example, keep the SYSREFREQ\_P pin at 1.4V DC, set the R2 to  $350\Omega$  and the R1 to  $175\Omega$  with 1.8V at SYSREFREQ\_N pin.

#### 6.3.5.1 SYSREF Output Buffers

#### 6.3.5.1.1 SYSREF Output Buffers for Main Clocks (SYSREFOUT)

The SYSREF outputs within the clock output channels have the same output buffer structure as the clock output buffer, with the addition of circuitry to adjust the common-mode voltage. The SYSREF outputs are CML outputs with a common-mode voltage that can be adjusted with the SYSREFOUTx\_VCM field, and the output level that can be programmed with the SYSREFOUTx\_PWR field. This design allows DC coupling. Note that the CLKOUT outputs do not have adjustable common-mode voltage and must be AC coupled for optimal noise performance.




Figure 6-7. SYSREF Output Buffer

The common-mode voltage and output power are interrelated and can be simulated assuming a  $100\Omega$  differential load and no DC path to ground. The common mode voltage and output are interrelated as shown in Table 6-8. Note that for long-term reliability,  $V_{CM} - V_{OD}/2 \ge 0.5V$  is required.



Table 6-8. Single-Ended Voltage (V<sub>OD</sub>) and Common-Mode Voltage (V<sub>CM</sub>)

SYSREFOUT_PWR	Check:	SYSREFOUT_VCM	V <sub>OD</sub>	V <sub>CM</sub>
313KEFOO1_FWK	V <sub>CM</sub> - V <sub>OL</sub> /2 ≥ 0.5V?			
		0	0.27	1.09
		1	0.27	1.22
		2	0.28	1.37
0		3	0.28	1.54
O		4	0.29	1.69
		5	0.29	1.83
		6	0.29	2.00
	Valid State	7	0.29	2.16
	valid State	0	0.32	0.79
		1	0.33	0.95
		2	0.33	1.12
4		3	0.34	1.33
1		4	0.35	1.51
		5	0.35	1.69
		6	0.36	1.89
		7	0.37	2.08
		0	0.37	0.52
	Invalid State	1	0.38	0.68
	Valid State	2	0.39	0.89
		3	0.40	1.12
2		4	0.41	1.34
		5	0.42	1.54
		6	0.43	1.78
		7	0.44	2.01
	Invalid State	0	0.39	0.43
		1	0.42	0.50
		2	0.45	0.66
		3	0.46	0.93
3		4	0.47	1.17
	Valid State	5	0.48	1.41
		6	0.49	1.68
		7	0.51	1.93
		0	0.40	0.40
		1	0.43	0.44
	Invalid State	2	0.48	0.52
		3	0.51	0.73
4		4	0.52	1.00
		5	0.54	1.27
	Valid State	6	0.55	1.57
l		7	0.57	1.86
		'	0.07	1.00



Table 6-8. Single-Ended Voltage (V<sub>CM</sub>) and Common-Mode Voltage (V<sub>CM</sub>) (continued)

SYSREFOUT_PWR	Check: V <sub>CM</sub> - V <sub>OL</sub> /2 ≥ 0.5V?	SYSREFOUT_VCM	V <sub>OD</sub>	V <sub>CM</sub>
		0	0.40	0.38
	Invalid State	1	0.44	0.42
	Ilivalid State	2	0.49	0.47
5		3	0.55	0.59
5		4	0.58	0.85
	Valid State	5	0.59	1.14
	valid State	6	0.62	1.48
		7	0.63	1.79
		0	0.40	0.36
	Invalid State  Valid State	1	0.44	0.39
		2	0.49	0.45
6		3	0.57	0.54
0		4	0.63	0.70
		5	0.65	1.01
		6	0.67	1.38
		7	0.70	1.73
		0	0.40	0.35
		1	0.44	0.38
	Invalid State	2	0.50	0.43
7		3	0.58	0.51
1		4	0.66	0.62
		5	0.70	0.89
	Valid State	6	0.73	1.29
		7	0.76	1.66

### 6.3.5.1.2 SYSREF Output Buffer for LOGICLK

The LOGISYSREFOUT output supports the two formats of LVDS and CML. The LOGISYSREFOUT EN enables the output buffer and LOGISYSREF\_FMT sets the format. LVDS mode allows programmable common mode, CML require external components, and CML allows programmable output power (see Table 6-9).

Table 6-9. LOGISYSREFOUT Output Buffer Configuration

i abio o di 100101 acput banon odinigaration						
LOGISYSREFOUT_E	LOGISYSREF_FMT	LOGISYSREF FORMAT	EXTERNAL TERMINIATION REQUIRED	OUTPUT POWER	OUTPUT COMMON MODE	
0			Powered Down			
	0	LVDS	None	Fixed	Programmable with LOGISYSREF_VCM	
	1	Reserved				
1	2	CML	Pullup resistors 50Ω to V <sub>CC</sub>	Controlled by LOGISYSREF_PWR	LOGISYSREF_VCM has no impact, but this changes with LOGISYSREF_PWR.	
	3		Rese	erved		

### 6.3.5.2 SYSREF Frequency and Delay Generation

For the frequency of the SYSREF output in generator mode, the SYSREF DIV PRE divider is necessary to verify that the input of the SYSREF\_DIV divider is not more than 3.2GHz.

### Table 6-10. SYSREF\_DIV\_PRE Setup

f <sub>CLKIN</sub>	SYSREF_DIV_PRE	TOTAL SYSREF DIVIDE RANGE
3.2GHz or Less	÷1, 2, or 4	÷2, 3, 4,16380
3.2GHz < f <sub>CLKIN</sub> ≤ 6.4GHz	÷2 or 4	÷4, 6, 8, 16380
f <sub>CLKIN</sub> > 6.4GHz	÷4	÷8, 12, 16, 16380

For the delay, the input clock frequency is divided by SYSREF\_DLY\_DIV to generate  $f_{\text{INTERPOLATOR}}$ . This has a restricted range as shown in Table 6-11. Note also that when SYSREF\_DLY\_BYP = 0 or 2 (delaygen engaged for generator mode), and SYSREF\_MODE = 0 or 1 (a generator mode) the SYSREF output frequency must be a multiple of the phase interpolator frequency.

finterpolator % fsysref = 0.

Table 6-11. SYSREF Delay Setup

f <sub>CLKIN</sub>	SYSREF_DLY_DIV	SYSREFx_DLY_SCALE	fINTERPOLATOR
6.4GHz < f <sub>CLKIN</sub> ≤ 12.8GHz	16	0	0.4GHz to 0.8GHz
3.2GHz < f <sub>CLKIN</sub> ≤ 6.4GHz	8	0	0.4GHz to 0.8GHz
1.6GHz < f <sub>CLKIN</sub> ≤ 3.2GHz	4	0	0.4GHz to 0.8GHz
0.8GHz < f <sub>CLKIN</sub> ≤ 1.6GHz	2	0	0.4GHz to 0.8GHz
0.4GHz < f <sub>CLKIN</sub> ≤ 0.8GHz	2	1	0.2GHz to 0.4GHz
0.3GHz < f <sub>CLKIN</sub> ≤ 0.4GHz	2	2	0.15GHz to 0.2GHz

The maximum delay is equal to the phase interpolator period and there are  $4 \times 127 = 508$  different delay steps. Use Equation 2 to calculate the size of each step.

DelayStepSize = 
$$1/(f_{INTERPOLATOR} \times 508) = SYSREF_DLY_DIV/(f_{CLKIN} \times 508)$$
 (2)

Use Equation 3 to calculate the total delay.

Table 6-12 shows the number of steps for each delay.

Table 6-12. Calculation of StepNumber

SYSREFx_DLY_PHASE	STEPNUMBER
3	127 - SYSREFx_DLY_I
2	254 - SYSREFx_DLY_Q
0	381 - SYSREFx_DLY_I
1	508 - SYSREFx_DLY_Q

The SYSREF\_DLY\_BYP field selects the delay path in SYSREF generation output and or the repeater mode bypass signal. When SYSREF\_MODE is set to continuous or pulser mode, TI recommends to set SYSREF\_DLY\_BYP to generator mode. If SYSREF\_MODE is set to repeater mode, TI recommends to set SYSREF DLY BYP to bypass mode.

#### 6.3.5.3 SYSREFREQ Pins and SYSREFREQ FORCE Field

The SYSREFREQ pins are multipurpose and can be used for SYNC, SYSREF requests, and SYSREF windowing. These pins can be DC or AC coupled and have individual  $50\Omega$ , single-ended termination with programmable common-mode support.

In addition to these pins, the SYSREFREQ\_FORCE field can be set to 1 to emulate the same effect as forcing these pins high, simplifying hardware in some cases.

#### 6.3.5.3.1 SYSREFREQ Pins Common-Mode Voltage

The SYSREFREQ\_P and SYSREFREQ\_N pins can be driven either AC or DC coupled. When driven AC coupled, the common-mode voltage can be adjusted with the SYSREFREQ\_VCM bit.

SYSREFREQ_VCM	COMMON-MODE VOLTAGE
0	1.3V AC-coupled
1	1.1V AC-coupled
2	1.5V AC-coupled
3	No Bias (DC Coupled)

#### 6.3.5.3.2 SYSREFREQ Windowing Feature

Use SYSREF windowing to internally calibrate the timing between the SYSREFREQ and CLKIN pins to optimize the setup and hold timing. SYSREF windowing can also trim out any mismatches between SYSREFREQ and CLKIN path. This feature requires that the timing from the SYSREFREQ rising edge to the CLKIN rising edge is consistent. The timing from the SYSREFREQ rising edge to the CLKIN rising edges can be tracked with the rb\_CLKPOS field. Once the timing to the rising edge of the CLKIN pin is found, the SYSREFREQ rising edge can be internally adjusted with the SYSREFREQ\_DLY and SYSREF\_DLY\_STEP fields to optimize setup and hold timing.

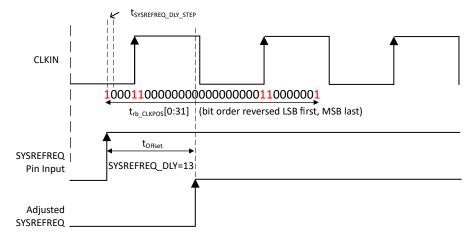


Figure 6-8. SYSREFREQ Internal Timing Adjustment

#### 6.3.5.3.2.1 General Procedure Flowchart for SYSREF Windowing Operation

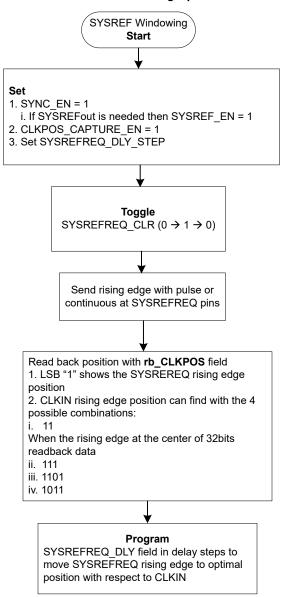


Figure 6-9. Flowchart for SYSREF Windowing Operation

Table 6-14. SYSREFREQ\_DLY\_STEP

INPUT FREQUENCY	RECOMMENDED SYSREFREQ_DLY_STEP	DELAY(ps)
1.4GHz < f <sub>CLKIN</sub> ≤ 2.7GHz	0	22.25
2.4GHz < f <sub>CLKIN</sub> ≤ 4.7GHz	1	13
3.1GHz < f <sub>CLKIN</sub> ≤ 5.7GHz	2	10.5
f <sub>CLKIN</sub> ≥ 4.5GHz	3	7.75

#### 6.3.5.3.2.2 SYSREFREQ Repeater Mode With Delay Generation (Retime)

SYSREF repeater mode with delay enabled is possible with LMX to LMX fanout devices by retiming the SYSREFout at different edge of IQ generation. This retiming can have the delay margin between CLKIN and SYSREFREQ inputs based on SYSREF\_DLY\_DIV value.

Copyright © 2025 Texas Instruments Incorporated



Table 6-15 shows how the total delay margin for the SYSREF windowing relates the various SYSREF settings.

Table 6-15. SYSREF Phase Adjust Settings for Retime in Repeater Mode

SYSREF_DLY_DI V	POSITION CODE SELECTED DURING SYNC	EDGE FOR MAX MARGIN	TOTAL MARGIN IN CLKIN CYCLE	SYSREFx_DLY_P HASE	SYSREFx_DLY_Q	SYSREFx_DLY_I
	Before 1 <sup>st</sup> edge	I	-1, +1	"11"	0	127
/2	After 1st edge	Qz	-1, +1	"01"	127	0
	After 2 <sup>nd</sup> edge	lz	-1, +1	"00"	0	127
	Before 1 <sup>st</sup> edge	Qz	-2, +2	"01"	127	0
/4	After 1st edge	lz	-2, +2	"00"	0	127
	After 2 <sup>nd</sup> edge	Q	-2, +2	"10"	127	0
	Before 1 <sup>st</sup> edge	Qz	-5, +3	"01"	127	0
/8	After 1st edge	Qz	-4, +4	"01"	127	0
	After 2 <sup>nd</sup> edge	Qz	-3, +5	"01"	127	0
	Before 1 <sup>st</sup> edge	I	-9, +7	"11"	0	127
/16	After 1st edge	I	-8, +8	"11"	0	127
	After 2 <sup>nd</sup> edge	I	-7, +9	"11"	0	127

Repeater retime mode is required to perform the SYSREF windowing in the initial phase to synchronize the SYSREF\_DLY\_DIV in multiple devices. The user can later choose the SYSREFx\_DLY\_PHASE, SYSREF DLY Q and SYSREFx DLY I settings for the selected edge for the SYNC.

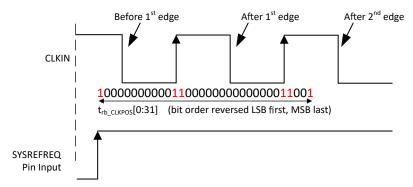


Figure 6-10. SYSREF Windowing to Select the Edge Position for SYNC

This configuration must set the device in **SYSREF\_MODE** R17[1:0] value "2" (Repeater mode) and **SYSREF\_DLY\_BPY** R72[1:0] value "2" (Delay gen engaged in all modes).

### 6.3.5.3.2.3 Other Guidance For SYSREF Windowing

- The SYSREFREQ pins must be held high for a minimum time of 3/f<sub>CLKIN</sub> + 1.6ns and only after this time rb CLKPOS field is valid.
- If the user infers multiple valid SYSREFREQ\_DLY values from rb\_CLKPOS registers to avoid setup and hold time violations. TI recommends to choose the lowest valid SYSREFREQ\_DLY to minimize variation over temperature.
- The programmed SYSREFREQ\_DLY for optimized setup and hold time after SYSREF windowing adjusts
  the internal SYSREFREQ, but the SYSREFREQ\_DLY does not show the movement in SYSREF windowing
  readback code. SYSREF windowing always evaluates the signals at the pins.

### 6.3.5.3.2.4 For Glitch-Free Output

- Keep the same state for the SYSREFREQ pin when switching from request mode to windowing mode and back to request mode. For example, if the SYSREFREQ pin is high (or low) when windowing mode starts, make sure the pin state is high (or low) again after windowing mode ends before programing CLKPOS CAPTURE EN.
- The SYSREFREQ pin must be set low when switching from or to SYNC mode.

#### 6.3.5.3.2.5 If Using SYNC Feature

- · Only one SYSREFREQ pin rising edge is permitted per 75 input clock cycles
- · SYSREFREQ has to stay high for more than 6 clock cycles

#### 6.3.5.3.3 SYNC Feature

The SYNC feature allows the user to synchronize the CLK\_DIV, LOGICLK\_DIV, LOGICLK\_DIV\_PRE, SYSREF\_DIV, SYSREF\_DIV\_PRE, and SYSREF\_DLY\_DIV dividers so that the phase offset can be made consistent between power cycles. This allows users to synchronize multiple devices. This synchronization dividers can only be done through the SYSREFREQ pin, not the software.

## **6.4 Device Functional Modes Configurations**

The device can configure in high frequency clock buffer mode, divider mode or multiplier mode. Each mode requires the below register configurations to function.

Table 6-16. Device Functional Modes Settings

REGISTER ADDRESS	ВІТ	FIELD	FUNCTION	BUFFER	DIVIDER	MULTIPLIER
R25	2:0	CLK_MUX	Select the mode	1	2	3
R25	5:3	CLK_DIV / CLK_MULT	Select the division or multiplication value	x	CLK_DIV 0x1 = ÷2 0x2 = ÷3 0x3 = ÷4 0x4 = ÷5 0x6 = ÷7	CLK_MULT 0x2 = ×2 0x3 = ×3 0x4 = ×4
R2	5	SMCLK_EN	Enables the state machine clock generator	1		
R2	9:6	SMCLK_DIV_PRE	Sets pre-divider for state machine clock	Pre-clock divider for 0x2 = ÷2 0x4 = ÷4 0x8 = ÷8	or state machine cloc	k
R3	2:0	SMCLK_DIV	Sets state machine clock divider	Additional SMCLK divider to I 30MHz. 0x0 = ÷1 0x1 = ÷2 0x2 = ÷4 0x3 = ÷8 0x4 = ÷16 0x5 = ÷32 0x6 = ÷64 0x7 = ÷128	keep output frequenc	cy must be ≤
R0	All	Calibrate Multiplier	Calibrate the PLL based multiplier	х	х	Write R0 for calibrate multiplier

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback



#### 6.4.1 Pin Mode Control

Device supports pin mode that can be used to program the device mode selection, divider and multiplier value selection, output power control, and channel output control (ON/OFF). The state machine (SM) clock must be enabled to take any logic state changed at the pin during pin mode operation.

### 6.4.1.1 Chip Enable (CE)

The chip enable pin is used to enable and disable the device. The chip enable can be controlled through SPI, when CE pin is high (1).

**Table 6-17. Chip Enable Control** 

CE LOGIC	DEVICE STATUS	SPI OVERRIDE CONTROL
0	Disable	No
1	Enable	Yes

#### 6.4.1.2 Output Channel Control

Each channel outputs control through the CLKx\_EN pin. This pin enables or disable the CLKOUT and SYSREFOUT of particular channel outputs.

**Table 6-18. Output Channel Control Selection** 

CLKx_EN	CHANNEL OUTPUT STATE	SPI OVERRIDE CONTROL
0	Disable channel output	No
1	Enable channel output	Yes

#### 6.4.1.3 Logic Output Control

The logic output pin can enable and disable the logic clock and logic SYSREF outputs.

## Table 6-19. Logic Output Enable

LOGIC_EN	LOGIC OUTPUT STATE	SPI OVERRIDE CONTROL
0	Disable logic output	No
1	Enable logic output	Yes

#### 6.4.1.4 SYSREF Output Control

The SYSREF EN pin can enable and disable the SYSREF section.

### Table 6-20. SYSREF Circuitry Enable

SYSREF_EN	SYSREF CIRCUITRY	SPI OVERRIDE CONTROL
0	Disable	No
1	Enable	Yes

#### 6.4.1.5 Device Mode Selection

The device functions like buffer mode, divider mode or multiplier mode are selected by the MUXSELx pin setting.

## **Table 6-21. Device Operating Mode Selection**

MUXSEL1	MUXSEL0	MODE SELECTION
0	0	SPI control
0	1	Buffer mode
1	0	Divider mode
1	1	Multiplier mode

### 6.4.1.6 Divider or Multiplier Value Selection

After the operating mode (divider mode or multiplier mode) is selected by MUXSELx pin logic, the divider values or multiplier values are selected by DIVSELx pin logic.

Table 6-22. Divider or Multiplier Value Selection

DIVSEL2	DIVSEL1	DIVSEL0	DIVIDER VALUE	MULTIPLIER VALUE
0	0	0	SPI control	SPI control
0	0	1	2	x
0	1	0	3	2
0	1	1	4	3
1	0	0	5	4
1	0	1	Reserved	х
1	1	0	7	x
1	1	1	Reserved	x

#### 6.4.1.7 Calibration Control Pin

While operating in multiplier mode, the PLL based multiplier required the calibration for frequency lock and the CAL pin transition from low to high initiates the calibration.

Table 6-23. CAL Pin Logic

CAL	CALIBRATION STATE
0	SPI controlled calibration
0 → 1	Initiate calibration

### 6.4.1.8 Output Power Control

The output power of the all channels control through PWRSELx pins.

**Table 6-24. Channel Output Power Control** 

PWRSEL2	PWRSEL1	PWRSEL0	OUTPUT POWER
0	0	0	SPI Control
0	0	1	Lowest output power
0	1	0	-
0	1	1	-
1	0	0	-
1	0	1	-
1	1	0	-
1	1	1	Highest output power



# 7 Register Map

	D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
R0	0	0	0	0	0	0	0	0	0	0	0	0	0	POWE RDOW N	0	RESET
R2	0	0	0	0	0	0		SMCLK_	L DIV_PRE		SMCLK _EN	0	0	0	1	1
R3	CH3_E N	CH2_E N	CH1_E N	CH0_E N	LOGIC LK_MU TE_CA L	CH3_M UTE_C AL	CH2_M UTE_C AL		CH0_M UTE_C AL	0	0	0	0	S	MCLK_D	IV
R4	0	0	CLF	KOUT1_P	WR	CLł	KOUT0_P	WR	SYSRE FOUT3 _EN		SYSRE FOUT1 _EN	SYSRE FOUT0 _EN	CLKOU T3_EN	CLKOU T2_EN	CLKOU T1_EN	
R5	0	SYSR	EFOUT2	_PWR	SYSR	EFOUT1	_PWR	SYSR	EFOUT0	_PWR	CLł	KOUT3_P	WR	CL	KOUT2_P	WR
R6	LOGIC LKOUT _EN	SYSR	EFOUT3	_VCM	SYSR	EFOUT2	_VCM	SYSR	REFOUT1	_VCM	SYSR	EFOUT0	_VCM	SYSR	EFOUT3	_PWR
R7	0	LOGISY UT_	SREFO VCM	LOGICLI	KOUT_V M	LOGISY IV_PW		LOGICL PWR	.K_DIV_ _PRE	LOGISY	/SREFOU	IT_PWR	LOGI	CLKOUT <sub>_</sub>	_PWR	LOGIS YSREF OUT_E N
R8	0	0	0	0	0	0	0	LOGI	CLK_DIV	_PRE	LOGIC _EN	0	LOGISY UT_	SREFO FMT		KOUT_F IT
R9	SYSREF		SYNC_ EN	LOGIC LK_DIV _PD	LOGIC LK_DIV _BYP	0					LOGIC	LK_DIV				
R11								rb_CL	KPOS							
R12								rb_CLKP	OS[31:16]	]						
R13	0	0	0	0	0	0	0	0	0	0	0	0	0	0		FREQ_D STEP
R14	0	0	0	0	0	0	0	SYNC_ MUTE_ PD	0	0	0	0	0	CLKPO S_CAP TURE_ EN	SYSRE FREQ_ MODE	SYSRE FREQ_ LATCH
R15	0	0	0	0	SYSREF		1	SYSRE F_EN	0						SYSRE FREQ_ CLR	
R16	SY	SREF_P	ULSE_CI	NT					I	SYSRI	EF_DIV					
R17	0	0	0	0	0			SYS	SYSREF0_DLY_I SYSREF0_DLY_ PHASE SYSRE					SYSRE	_MODE	
R18			SYS	SREF1_DI	LY_I			SYSREF PH	F1_DLY_ ASE	- SYSREF0_DLY_Q						
R19			SYS	SREF2_DI	LY_I			SYSREF PH	F2_DLY_ ASE			SYS	REF1_DL	.Y_Q		
R20			SYS	SREF3_DI	LY_I			SYSREF PH/	F3_DLY_ ASE			SYS	REF2_DL	Y_Q		
R21			LOGIS	SYSREF_	DLY_I			LOGISY LY_P	SREF_D HASE			SYS	REF3_DL	Y_Q		
R22	SYSREF SC/		SYSREF SC/	F0_DLY_ ALE	SYSI	REF_DLY	_DIV	0	0			LOGIS	YSREF_I	DLY_Q		
R23	TS_EN	1	MUXO UT_EN	0	0	0	0	0	0	MUXO UT_SE L	LOGISY LY_S	SREF_D CALE		F3_DLY_ ALE	SYSREF SC	F2_DLY_ ALE
R24	0	0	0	0						rb_TS						TS_CN T_EN
R25	0	0	0	0	0	0	1	0	0	CLK_DI V_RST		CLK_DIV		(	CLK_MUX	<
R28	0	0	0	VCO_C ORE_F ORCE	V	CO_COR	E	0	0	0	0	0	1	0	0	0
R29	0	0	0	0	0	1	0	1				VCO_C	APCTRL			



#### www.ti.com

R33	0	1	0	1	0	1	1	0	0	1	1	0	0	1	1	0
R34	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1
R65	0	1	1	0	0	1	0		rb_	vco_cc	RE		0	0	0	0
R67	0	1	0	1	0	0	0	1	1	1	0	0	1	0	1	1
R72	0	0	0	0	0	0	0	0	0	0	0	0	0	SYSRE FREQ_ FORCE	SYSREF	_DLY_B P
R73	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
R75	rb_CLK 2_EN	rb_CLK 1_EN	rb_CLK 0_EN	rb_MU XSEL1	rb_MU XSEL0	rb_LOG IC_EN	rb_	LD	rb_DIV SEL2	rb_DIV SEL1	rb_DIV SEL0	rb_CE	0	0	1	1
R76	0	0	0	0	0	0	0	0	0	0	0	0	rb_PW RSEL2	rb_PW RSEL1	rb_PW RSEL0	rb_CLK 3_EN
R79	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1
R86	0	0	0	0	0	0	0	0	0	0	0	0	0	MUXO UT_EN _OVRD	0	0
R90	0	0	0	0	0	0	0	0	0	LOGIC LK_DIV _BYP3	LOGIC LK_DIV _BYP2	0	0	0	0	0

Registers not listed in this table must NOT be programmed as doing so can adversely impact performance or functionality of the device.

The following registers must NOT be programmed to avoid adversely impacting the performance of the device: R1, R10, R26, R27, R30-R32,

The following registers do NOT require programming if clock output multiplier is NOT used: R29, R33, R34, R65, R67, R73

The following registers do NOT require programming if LOGICLK is NOT used: R79, R90



## 7.1 Device Registers

Table 7-1 lists the memory-mapped registers for the Device registers. All register offset addresses not listed in Table 7-1 must be considered as reserved locations and the register contents must not be modified.

**Table 7-1. DEVICE Registers** 

0h         R0         Section 7.1.1           2h         R2         Section 7.1.2           3h         R3         Section 7.1.3           4h         R4         Section 7.1.5           5h         R5         Section 7.1.5           6h         R6         Section 7.1.5           8h         R8         Section 7.1.7           8h         R8         Section 7.1.9           9h         R9         Section 7.1.9           8h         R1         Section 7.1.9           9h         R9         Section 7.1.9           9h         R9         Section 7.1.9           9h         R9         Section 7.1.19           9h         R9         Section 7.1.19           9h         R12         Section 7.1.19           9h         R13         Section 7.1.19           9h         R13         Section 7.1.12           9h         R14         Section 7.1.12           9h         R13         Section 7.1.13           9h         R14         Section 7.1.14           10h         R16         Section 7.1.16           11h         R17         Section 7.1.16           12h         R1	Offset	Acronym Register Name	Section
3h         R3         Section 7.1.3           4h         R4         Section 7.1.5           5h         R5         Section 7.1.6           6h         R6         Section 7.1.7           8h         R8         Section 7.1.7           8h         R8         Section 7.1.8           9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.11           Dh         R13         Section 7.1.12           Eh         R14         Section 7.1.12           Eh         R14         Section 7.1.13           Fh         R15         Section 7.1.13           10h         R16         Section 7.1.16           12h         R18         Section 7.1.17           13h         R19         Section 7.1.17           13h         R19         Section 7.1.20           16h         R20         Section 7.1.20           16h         R22         Section 7.1.20           16h         R22         Section 7.1.20           16h         R22         Section 7.1.20           16h         R23         Section 7.1.20           17h<	0h	R0	Section 7.1.1
4h         R4         Section 7.1.4           5h         R5         Section 7.1.5           6h         R6         Section 7.1.6           7h         R7         Section 7.1.7           8h         R8         Section 7.1.8           9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.11           Dh         R13         Section 7.1.13           Fh         R14         Section 7.1.13           Fh         R15         Section 7.1.14           10h         R16         Section 7.1.15           11h         R17         Section 7.1.16           12h         R18         Section 7.1.16           12h         R18         Section 7.1.18           14h         R20         Section 7.1.18           14h         R20         Section 7.1.20           15h         R21         Section 7.1.20           16h         R22         Section 7.1.21           17h         R23         Section 7.1.22           18h         R24         Section 7.1.23           19h         R25         Section 7.1.23	2h	R2	Section 7.1.2
5h         R5         Section 7.1.5           6h         R6         Section 7.1.6           7h         R7         Section 7.1.7           8h         R8         Section 7.1.9           9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.11           Dh         R13         Section 7.1.12           Eh         R14         Section 7.1.13           Fh         R15         Section 7.1.15           1th         R16         Section 7.1.15           1th         R17         Section 7.1.11           1th         R17         Section 7.1.21           1th         R20         Section 7.1.21           1th         R20         Section 7.1.21           1th         R25         Section 7.1.24           <	3h	R3	Section 7.1.3
6h         R6         Section 7.1.6           7h         R7         Section 7.1.7           8h         R8         Section 7.1.9           9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.12           Eh         R14         Section 7.1.12           Eh         R14         Section 7.1.13           Fh         R15         Section 7.1.14           10h         R16         Section 7.1.15           11h         R17         Section 7.1.15           12h         R18         Section 7.1.17           13h         R19         Section 7.1.18           14h         R20         Section 7.1.20           15h         R21         Section 7.1.20           16h         R22         Section 7.1.21           17h         R23         Section 7.1.21           18h         R24         Section 7.1.22           18h         R24         Section 7.1.23           19h         R25         Section 7.1.25           10h         R29         Section 7.1.25           10h         R29         Section 7.1.26	4h	R4	Section 7.1.4
7h         R7         Section 7.1.7           8h         R8         Section 7.1.8           9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.11           Dh         R13         Section 7.1.13           Eh         R14         Section 7.1.13           Fh         R15         Section 7.1.14           10h         R16         Section 7.1.15           11h         R17         Section 7.1.16           12h         R18         Section 7.1.17           13h         R19         Section 7.1.18           14h         R20         Section 7.1.20           16h         R21         Section 7.1.20           16h         R22         Section 7.1.20           16h         R22         Section 7.1.21           17h         R23         Section 7.1.22           18h         R24         Section 7.1.23           19h         R25         Section 7.1.23           19h         R25         Section 7.1.26           10h         R29         Section 7.1.26           21h         R33         Section 7.1.27	5h	R5	Section 7.1.5
8h         R8         Section 7.1.9           9h         R9         Section 7.1.10           6h         R11         Section 7.1.10           6h         R12         Section 7.1.12           6h         R13         Section 7.1.12           6h         R14         Section 7.1.13           7h         R15         Section 7.1.14           10h         R16         Section 7.1.15           11h         R17         Section 7.1.16           12h         R18         Section 7.1.17           13h         R19         Section 7.1.17           13h         R20         Section 7.1.20           16h         R22         Section 7.1.20           16h         R22         Section 7.1.21           17h         R23         Section 7.1.22           18h         R24         Section 7.1.23           19h         R25         Section 7.1.23           19h         R25         Section 7.1.23           10h         R29         Section 7.1.26           21h         R33         Section 7.1.26           21h         R34         Section 7.1.28           41h         R65         Section 7.1.29	6h	R6	Section 7.1.6
9h         R9         Section 7.1.9           Bh         R11         Section 7.1.10           Ch         R12         Section 7.1.11           Dh         R13         Section 7.1.12           Eh         R14         Section 7.1.13           Fh         R15         Section 7.1.13           10h         R16         Section 7.1.15           11h         R17         Section 7.1.16           12h         R18         Section 7.1.17           13h         R19         Section 7.1.18           14h         R20         Section 7.1.20           16h         R22         Section 7.1.20           16h         R22         Section 7.1.21           17h         R23         Section 7.1.21           18h         R24         Section 7.1.22           18h         R24         Section 7.1.23           19h         R25         Section 7.1.23           10h         R29         Section 7.1.24           10h         R29         Section 7.1.26           21h         R33         Section 7.1.27           22h         R34         Section 7.1.24           48h         R65         Section 7.1.31 <t< td=""><td>7h</td><td>R7</td><td>Section 7.1.7</td></t<>	7h	R7	Section 7.1.7
Bh       R11       Section 7.1.10         Ch       R12       Section 7.1.11         Dh       R13       Section 7.1.12         Eh       R14       Section 7.1.13         Fh       R15       Section 7.1.14         10h       R16       Section 7.1.16         11h       R17       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         10h       R29       Section 7.1.24         10h       R29       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.26         41h       R65       Section 7.1.28         43h       R67       Section 7.1.32         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h       R75       Section 7.1.34         46h	8h	R8	Section 7.1.8
Ch       R12       Section 7.1.11         Dh       R13       Section 7.1.12         Eh       R14       Section 7.1.13         Fh       R15       Section 7.1.14         10h       R16       Section 7.1.15         11h       R17       Section 7.1.17         12h       R18       Section 7.1.17         13h       R19       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.21         18h       R24       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         10h       R28       Section 7.1.25         10h       R29       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.26         24h       R65       Section 7.1.29         43h       R67       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.34         49h <td< td=""><td>9h</td><td>R9</td><td>Section 7.1.9</td></td<>	9h	R9	Section 7.1.9
Dh       R13       Section 7.1.12         Eh       R14       Section 7.1.13         Fh       R15       Section 7.1.14         10h       R16       Section 7.1.15         11h       R17       Section 7.1.16         12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         10h       R28       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h <t< td=""><td>Bh</td><td>R11</td><td>Section 7.1.10</td></t<>	Bh	R11	Section 7.1.10
Eh       R14       Section 7.1.13         Fh       R15       Section 7.1.14         10h       R16       Section 7.1.15         11h       R17       Section 7.1.16         12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.21         18h       R24       Section 7.1.22         18h       R24       Section 7.1.22         19h       R25       Section 7.1.24         10h       R29       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.26         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h       R75       Section 7.1.33         49h       R76       Section 7.1.34         49h       <	Ch	R12	Section 7.1.11
Fh       R15       Section 7.1.14         10h       R16       Section 7.1.15         11h       R17       Section 7.1.16         12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.22         18h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.26         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	Dh	R13	Section 7.1.12
10h       R16       Section 7.1.15         11h       R17       Section 7.1.16         12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	Eh	R14	Section 7.1.13
11h       R17       Section 7.1.16         12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.20         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         10h       R29       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h       R75       Section 7.1.33         46h       R76       Section 7.1.34         56h       R86       Section 7.1.35	Fh	R15	Section 7.1.14
12h       R18       Section 7.1.17         13h       R19       Section 7.1.18         14h       R20       Section 7.1.20         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         10h       R28       Section 7.1.25         10h       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         48h       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	10h	R16	Section 7.1.15
13h       R19       Section 7.1.18         14h       R20       Section 7.1.20         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.22         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	11h	R17	Section 7.1.16
14h       R20       Section 7.1.19         15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	12h	R18	Section 7.1.17
15h       R21       Section 7.1.20         16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	13h	R19	Section 7.1.18
16h       R22       Section 7.1.21         17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	14h	R20	Section 7.1.19
17h       R23       Section 7.1.22         18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	15h	R21	Section 7.1.20
18h       R24       Section 7.1.23         19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	16h	R22	Section 7.1.21
19h       R25       Section 7.1.24         1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	17h	R23	Section 7.1.22
1Ch       R28       Section 7.1.25         1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	18h	R24	Section 7.1.23
1Dh       R29       Section 7.1.26         21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	19h	R25	Section 7.1.24
21h       R33       Section 7.1.27         22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	1Ch	R28	Section 7.1.25
22h       R34       Section 7.1.28         41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	1Dh	R29	Section 7.1.26
41h       R65       Section 7.1.29         43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	21h	R33	Section 7.1.27
43h       R67       Section 7.1.30         48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	22h	R34	Section 7.1.28
48h       R72       Section 7.1.31         49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	41h	R65	Section 7.1.29
49h       R73       Section 7.1.32         4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	43h	R67	Section 7.1.30
4Bh       R75       Section 7.1.33         4Ch       R76       Section 7.1.34         56h       R86       Section 7.1.35	48h	R72	Section 7.1.31
4Ch       R76         56h       R86         Section 7.1.35	49h	R73	Section 7.1.32
56h R86 Section 7.1.35	4Bh	R75	Section 7.1.33
	4Ch	R76	Section 7.1.34
5Ah R90 Section 7.1.36	56h	R86	Section 7.1.35
	5Ah	R90	Section 7.1.36

Complex bit access types are encoded to fit into small table cells. Table 7-2 shows the codes that are used for access types in this section.

Table 7-2. Device Access Type Codes
-------------------------------------

145.0 / 2. 201.00 / 100000 1, po 00400										
Access Type	Code	Description								
Read Type										
R	R	Read								
Write Type										
W	W	Write								
Reset or Default	Value									
-n		Value after reset or the default value								

## 7.1.1 R0 Register (Offset = 0h) [Reset = 0000h]

R0 is shown in Table 7-3.

Return to the Summary Table.

Table 7-3. R0 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-3	UNDISCLOSED	R/W	0h	Program this field to 0x0.
2	POWERDOWN	R/W	0h	Sets the device in a low-power state. The states of other registers are maintained.
1	UNDISCLOSED	R/W	0h	Program this field to 0x0.
0	RESET	R/W	0h	Soft Reset. Resets the entire logic and registers (equivalent to power-on reset). Self-clearing on next register write.

## 7.1.2 R2 Register (Offset = 2h) [Reset = 0223h]

R2 is shown in Table 7-4.

Return to the Summary Table.

Table 7-4. R2 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-11	UNDISCLOSED	R	0h	Program this field to 0x0.
10	UNDISCLOSED	R/W	0h	Program this field to 0x0.
9-6	SMCLK_DIV_PRE	R/W	8h	Pre-divider for State Machine clock (one hot divider). The state machine clock is divided from the input clock. The output of the pre-divider must be ≤1600MHz. Values other than those listed are reserved.  2h = /2 4h = /4 8h = /8
5	SMCLK_EN	R/W	1h	Program this field to 0x1. Enables the state machine clock generator.
4-0	UNDISCLOSED	R/W	3h	Program this field to 0x3.

## 7.1.3 R3 Register (Offset = 3h) [Reset = FF86h]

R3 is shown in Table 7-5.

Return to the Summary Table.

## Table 7-5. R3 Register Field Descriptions

Table 7-5. R5 Register Fleid Descriptions									
Bit	Field	Туре	Reset	Description					
15	CH3_EN	R/W	1h	Enables CH3 (CLKOUT3, SYSOUT3). Setting this bit to 0 completely disables CH3, overriding the state of other power down/enable bits.					
14	CH2_EN	R/W	1h	Enables CH2 (CLKOUT2, SYSOUT2). Setting this bit to 0 completely disables CH2, overriding the state of other power down/enable bits.					
13	CH1_EN	R/W	1h	Enables CH1 (CLKOUT1, SYSOUT1). Setting this bit to 0 completely disables CH1, overriding the state of other power down/enable bits.					
12	CH0_EN	R/W	1h	Enables CH0 (CLKOUT0, SYSOUT0). Setting this bit to 0 completely disables CH0, overriding the state of other power down/enable bits.					
11	LOGICLK_MUTE_CAL	R/W	1h	Mutes LOGIC outputs (LOGICLK/LOGISYS) during multiplier calibration.					
10	CH3_MUTE_CAL	R/W	1h	Mutes CH3 (CLKOUT3/SYSOUT3) during multiplier calibration.					
9	CH2_MUTE_CAL	R/W	1h	Mutes CH2 (CLKOUT2/SYSOUT2) during multiplier calibration.					
8	CH1_MUTE_CAL	R/W	1h	Mutes CH1 (CLKOUT1/SYSOUT1) during multiplier calibration.					
7	CH0_MUTE_CAL	R/W	1h	Mutes CH0 (CLKOUT0/SYSOUT0) during multiplier calibration.					
6-3	UNDISCLOSED	R	0h	Program this field to 0x0.					
2-0	SMCLK_DIV	R/W	6h	Sets state machine clock divider. Further divides the output of the state machine clock pre-divider. Input frequency from SMCLK_DIV_PRE must be ≤ 1600MHz. Output frequency must be ≤ 30MHz. Divide value is 2 <sup>SMCLK_DIV</sup> .  Oh = /1  1h = /2  2h = /4  3h = /8  4h = /16  5h = /32  6h = /64  7h = /128					



## 7.1.4 R4 Register (Offset = 4h) [Reset = 36FFh]

R4 is shown in Table 7-6.

Return to the Summary Table.

## Table 7-6. R4 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-14	UNDISCLOSED	R	0h	Program this field to 0x0.
13-11	CLKOUT1_PWR	R/W	6h	Sets the output power of CLKOUT1. Larger values correspond to higher output power.
10-8	CLKOUT0_PWR	R/W	6h	Sets the output power of CLKOUT0. Larger values correspond to higher output power.
7	SYSREFOUT3_EN	R/W	1h	Enables SYSREFOUT3 output buffer.
6	SYSREFOUT2_EN	R/W	1h	Enables SYSREFOUT2 output buffer.
5	SYSREFOUT1_EN	R/W	1h	Enables SYSREFOUT1 output buffer.
4	SYSREFOUT0_EN	R/W	1h	Enables SYSREFOUT0 output buffer.
3	CLKOUT3_EN	R/W	1h	Enables CLKOUT3 output buffer.
2	CLKOUT2_EN	R/W	1h	Enables CLKOUT2 output buffer.
1	CLKOUT1_EN	R/W	1h	Enables CLKOUT1 output buffer.
0	CLKOUT0_EN	R/W	1h	Enables CLKOUT0 output buffer.

#### 7.1.5 R5 Register (Offset = 5h) [Reset = 4936h]

R5 is shown in Table 7-7.

Return to the Summary Table.

#### Table 7-7. R5 Register Field Descriptions

	Table 1-1. No Neglater Field Descriptions						
Bit	Field	Туре	Reset	Description			
15	UNDISCLOSED	R	0h	Program this field to 0x0.			
14-12	SYSREFOUT2_PWR	R/W	4h	Sets the output power of SYSREFOUT2. Larger values correspond to higher output power. SYSREFOUT2_VCM must be set properly to bring the output common mode voltage within permissible limits.			
11-9	SYSREFOUT1_PWR	R/W	4h	Sets the output power of SYSREFOUT1. Larger values correspond to higher output power. SYSREFOUT1_VCM must be set properly to bring the output common mode voltage within permissible limits.			
8-6	SYSREFOUT0_PWR	R/W	4h	Sets the output power of SYSREFOUT0. Larger values correspond to higher output power. SYSREFOUT0_VCM must be set properly to bring the output common mode voltage within permissible limits.			
5-3	CLKOUT3_PWR	R/W	6h	Sets the output power of CLKOUT3. Larger values correspond to higher output power.			
2-0	CLKOUT2_PWR	R/W	6h	Sets the output power of CLKOUT2. Larger values correspond to higher output power.			

## 7.1.6 R6 Register (Offset = 6h) [Reset = B6DCh]

R6 is shown in Table 7-8.

Return to the Summary Table.

Table 7-8. R6 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15	LOGICLKOUT_EN	R/W	1h	Enables the logic clock output buffer.
14-12	SYSREFOUT3_VCM	R/W	3h	Sets the output common mode of SYSREFOUT3. SYSREFOUT3_PWR must be set properly to bring the minimum and maximum output voltage within permissible limits.
11-9	SYSREFOUT2_VCM	R/W	3h	Sets the output common mode of SYSREFOUT2. SYSREFOUT2_PWR must be set properly to bring the minimum and maximum output voltage within permissible limits.
8-6	SYSREFOUT1_VCM	R/W	3h	Sets the output common mode of SYSREFOUT1. SYSREFOUT1_PWR must be set properly to bring the minimum and maximum output voltage within permissible limits.
5-3	SYSREFOUT0_VCM	R/W	3h	Sets the output common mode of SYSREFOUT0. SYSREFOUT0_PWR must be set properly to bring the minimum and maximum output voltage within permissible limits.
2-0	SYSREFOUT3_PWR	R/W	4h	Sets the output power of SYSREFOUT3. Larger values correspond to higher output power. SYSREFOUT3_VCM must be set properly to bring the output common mode voltage within permissible limits.



## 7.1.7 R7 Register (Offset = 7h) [Reset = 0001h]

R7 is shown in Table 7-9.

Return to the Summary Table.

## Table 7-9. R7 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15	UNDISCLOSED	R	0h	Program this field to 0x0.
14-13	LOGISYSREFOUT_VCM	R/W	Oh	In LVDS mode, sets the output common mode of the logic SYSREF output. Other output formats ignore this field.  0h = 1.2V 1h = 1.1V 2h = 1.0V 3h = 0.9V
12-11	LOGICLKOUT_VCM	R/W	Oh	In LVDS mode, sets the output common mode of the logic clock output. Other output formats ignore this field.  0h = 1.2V 1h = 1.1V 2h = 1.0V 3h = 0.9V
10-9	LOGISYSREF_DIV_PWR _PRE	R/W	0h	Sets the output power of the logic SYSREF pre-driver. Larger values correspond to higher output power.
8-7	LOGICLK_DIV_PWR_PR E	R/W	0h	Sets the output power of the logic clock pre-driver. Larger values correspond to higher output power.
6-4	LOGISYSREFOUT_PWR	R/W	Oh	Sets the output power of LOGISYSREFOUT for CML format only (other output formats ignore this field). Larger values correspond to higher output power.
3-1	LOGICLKOUT_PWR	R/W	0h	Sets the output power of LOGICLKOUT for CML format only (other output formats ignore this field). Larger values correspond to higher output power.
0	LOGISYSREFOUT_EN	R/W	1h	Enables the logic SYSREF output buffer.

#### 7.1.8 R8 Register (Offset = 8h) [Reset = 0120h]

R8 is shown in Table 7-10.

Return to the Summary Table.

## Table 7-10. R8 Register Field Descriptions

	Table 1-10. No Register Field Descriptions						
Bit	Field	Туре	Reset	Description			
15-9	UNDISCLOSED	R	0h	Program this field to 0x0.			
8-6	LOGICLK_DIV_PRE	R/W	4h	Sets pre-divider value for logic clock divider. Output of the pre-divider must be less than or equal to 3.2GHz. When LOGICLK_DIV_PRE=1, register R79 must be programmed to a value of 0x0005. Register R90 must be programmed to 0x0060 (LOGICLK_DIV_BYP2=1, LOGICLK_DIV_BYP3=1). Values for LOGICLK_DIV_PRE other than those listed below are reserved.  1h = /1 2h = /2 4h = /4			
5	LOGIC_EN	R/W	1h	Enables LOGICLK subsystem (LOGICLKOUT, LOGISYSREFOUT). Setting this bit to 0x0 completely disables all LOGICLKOUT and LOGISYSREFOUT circuitry, overriding the state of other power down/enable bits.			
4	UNDISCLOSED	R/W	0h	Program this field to 0x0.			
3-2	LOGISYSREFOUT_FMT	R/W	Oh	Selects the output driver format of the LOGISYSREFOUT output.  0h = LVDS  1h = Reserved  2h = CML  3h = Reserved			
1-0	LOGICLKOUT_FMT	R/W	0h	Selects the output driver format of the LOGICLKOUT output.  0h = LVDS  1h = Reserved  2h = CML  3h = Reserved			

Product Folder Links: LMX1906-SP

40

## 7.1.9 R9 Register (Offset = 9h) [Reset = 0020h]

R9 is shown in Table 7-11.

Return to the Summary Table.

Table 7-11. R9 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-14	SYSREFREQ_VCM	R/W	Oh	Sets the internal DC Bias for the SYSREFREQ pins. Bias must be enabled for AC-coupled inputs; but can be enabled and overdriven, or disabled, for DC-coupled inputs. SYSREFREQ DC pin voltage must be in the range of 0.7V to VCC, including minimum and maximum signal swing.  0h = 1.3V 1h = 1.1V 2h = 1.5V 3h = Disabled
13	SYNC_EN	R/W	0h	Enables synchronization path for the dividers and allows the clock position capture circuitry to be enabled. Used for multi-device synchronization. Redundant if SYSREF_EN = 0x1.
12	LOGICLK_DIV_PD	R/W	0h	Disables the LOGICLK divider. LOGICLK pre-divider remains enabled. Used to reduce current consumption when bypassing the LOGICLK divider.
11	LOGICLK_DIV_BYP	R/W	Oh	Bypasses the LOGICLK_DIV divider to derive the LOGICLK output directly from the LOGICLK_DIV_PRE divider. Must only be used when LOGICLK_DIV_PRE=1 as one of the steps to achieve a total divide of 1 for the LOGICLK. To achieve a divide by 1, the following steps are required.  1. Set LOGICLK_DIV_PRE=1  2. Verify that register R79 is programmed to a value of 0x0005  3. Program R90 to 0x0060 (LOGICLK_DIV23=1, LOGICLK_DIV_DCC=1)  4. Set LOGICLK_DIV_BYP=1  When not wanting a total divide of 1 for the LOGICLK, this bit must be set to 0.  0h = Engage LOGICLK divider  1h = Bypass LOGICLK divider
10	UNDISCLOSED	R/W	0h	Program this field to 0x0.
9-0	LOGICLK_DIV	R/W	20h	Sets LOGICLK divider value. Maximum input frequency from LOGICLK_DIV_PRE must be ≤ 3200MHz. The maximum LOGICLKOUT frequency must be ≤ 800MHz to avoid amplitude degradation.  0h = Reserved 1h = Reserved 2h = /2 3h = /3 3FFh = /1023

#### 7.1.10 R11 Register (Offset = Bh) [Reset = 0000h]

R11 is shown in Table 7-12.

Return to the Summary Table.

## Table 7-12. R11 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-0	rb_CLKPOS	R	Oh	Stores a snapshot of the CLKIN signal rising edge positions relative to a SYSREFREQ rising edge, with the snapshot starting from the LSB and ending at the MSB. Each bit represents a sample of the CLKIN signal, separated by a delay determined by the SYSREFREQ_DLY_STEP field. The first and last bits of rb_CLKPOS are always set, indicating uncertainty at the capture window boundary conditions. CLKIN rising edges are represented by every sequence of two set bits from LSB to MSB, including bits at the boundary conditions. The position of the CLKIN rising edges in the snapshot, along with the CLKIN signal period and the delay step size, can be used to compute the value of SYSREFREQ_DLY which maximizes setup and hold times for SYNC signals on the SYSREFREQ pins.

## 7.1.11 R12 Register (Offset = Ch) [Reset = 0000h]

R12 is shown in Table 7-13.

Return to the Summary Table.

#### Table 7-13. R12 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-0	rb_CLKPOS[31:16]	R	0h	MSB of rb_CLKPOS field.

## 7.1.12 R13 Register (Offset = Dh) [Reset = 0003h]

R13 is shown in Table 7-14.

Return to the Summary Table.

#### Table 7-14. R13 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-2	UNDISCLOSED	R	0h	Program this field to 0x0.
1-0	SYSREFREQ_DLY_STEP	R/W	3h	Sets the step size of the delay element used in the SYSREFREQ path, both for SYSREFREQ input delay and for clock position captures. The recommended frequency range for each step size creates the maximum number of usable steps for a given CLKIN frequency. The ranges include some overlap to account for process and temperature variations. If the CLKIN frequency is covered by an overlapping span, larger delay step sizes improve the likelihood of detecting a CLKIN rising edge during a clock position capture. However, since larger values include more delay steps, larger step sizes have greater total delay variation across PVT relative to smaller step sizes.  0h = 28ps (1.4GHz to 2.7GHz) 1h = 15ps ( 2.4GHz to 4.7GHz) 2h = 11ps (3.1GHz to 5.7GHz) 3h = 8ps (4.5GHz to 12.8GHz)

## 7.1.13 R14 Register (Offset = Eh) [Reset = 0002h]

R14 is shown in Table 7-15.

Return to the Summary Table.

#### Table 7-15. R14 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	UNDISCLOSED	R/W	0h	Program this field to 0x0.
8	SYNC_MUTE_PD	R/W	Oh	Removes the mute condition on the SYSREFOUT and LOGISYSREFOUT pins during SYNC mode (SYSREFREQ_MODE = 0x0). Since the SYNC operation also resets the SYSREF dividers, the mute condition is typically desirable, and this bit can be left at the default value.
7-3	UNDISCLOSED	R/W	0h	Program this field to 0x0.
2	CLKPOS_CAPTURE_EN	R/W	0h	Enables the windowing circuit which captures the clock position in the rb_CLKPOS registers with respect to a SYSREF edge. The windowing circuit must be cleared by toggling SYSREFREQ_CLR high then low before a clock position capture. The first rising edge on the SYSREFREQ pins after clearing the windowing circuit triggers the capture. The capture circuitry greatly increases supply current, and does not need to be enabled to delay the SYSREFREQ signal in SYNC or SYSREF modes. Once the desired value of SYSREFREQ_DLY is determined, set this bit to 0x0 to minimize current consumption. If SYNC_EN = 0 and SYSREF_EN = 0, the value of this bit is ignored, and the windowing circuit is disabled.
1	SYSREFREQ_MODE	R/W	1h	Selects the function of the SYSREFREQ pins 0h = SYNC pin 1h = SYSREFREQ pin
0	SYSREFREQ_LATCH	R/W	Oh	Latches the internal SYSREFREQ state to logic high on the first rising edge of the SYSREFREQ pins. This latch can be cleared by setting SYSREFREQ_CLR=1.

## 7.1.14 R15 Register (Offset = Fh) [Reset = 0B01h]

R15 is shown in Table 7-16.

Return to the Summary Table.

## Table 7-16. R15 Register Field Descriptions

		Table 7-10	. K 15 Kegis	jister Field Descriptions	
Bit	Field	Туре	Reset	Description	
15-12	UNDISCLOSED	R	0h	Program this field to 0x0.	
11-10	SYSREF_DIV_PRE	R/W	2h	Sets the SYSREF pre-divider. Maximum output frequency must be ≤ 3.2GHz.  0h = /1  1h = /2  2h = /4  3h = Reserved	
9	UNDISCLOSED	R/W	1h	Program this field to 0x1.	
8	SYSREF_EN	R/W	1h	Enables SYSREF subsystem (and SYNC subsystem when SYSREFREQ_MODE = 0x0). Setting this bit to 0x0 completely disables all SYNC, SYSREF, and clock position capture circuitry, overriding the state of other power down/enable bits except SYNC_EN. If SYNC_EN = 0x1, the SYNC path and clock position capture circuitry are still enabled, regardless of the state of SYSREF_EN.	
7	UNDISCLOSED	R/W	0h	Program this field to 0x0.	
6-1	SYSREFREQ_DLY	R/W	Oh	Sets the delay line step for the external SYSREFREQ signal. Each delay line step delays the SYSREFREQ signal by an amount equal to SYSREFREQ_DELAY_STEP x SYSREFREQ_DLY_STEP. In SYNC mode, the value for this field can be determined based on the rb_CLKPOS value to satisfy the internal setup and hold time of the SYNC signal with respect to the CLKIN signal. In SYSREF Repeater Mode, the value for this field can be used as a coarse global delay. Values greater than 0x3F are invalid. Since larger values include more delay steps, larger values have greater total step size variation across PVT relative to smaller values. Refer to the data sheet or the device TICS Pro profile for detailed description of the delay step computation procedure.	
0	SYSREFREQ_CLR	R/W	1h	Clears SYSREFREQ_LATCH and resets synchronization path timing for SYSREFREQ signal. Holding this bit high keeps internal SYSREFREQ signal low in all modes except SYSREF repeater mode, overriding the state of SYSREFREQ_FORCE. This bit must be set and cleared once before the SYNC or clock position capture operations are performed.	

#### 7.1.15 R16 Register (Offset = 10h) [Reset = 1005h]

R16 is shown in Table 7-17.

Return to the Summary Table.

#### Table 7-17. R16 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-12	SYSREF_PULSE_CNT	R/W	1h	Programs the number of pulses generated in pulser mode. The pulser is a counter gating the SYSREF divider; consequently, the pulse duration and frequency are equal to the duty cycle and frequency of the SYSREF divider output, respectively.  0h = Reserved 1h = 1 pulse 2h = 2 pulses Fh = 15 pulses
11-0	SYSREF_DIV	R/W	5h	Sets the SYSREF divider. Maximum input frequency from SYSREF_DIV_PRE must be ≤ 3200MHz. Maximum output frequency must be ≤ 100MHz. Odd divides (with duty cycle < 50%) are only allowed when the delay generators are bypassed.  0h = Reserved 1h = Reserved 2h = /2 3h = /3 FFFh = /4095

## 7.1.16 R17 Register (Offset = 11h) [Reset = 07F0h]

R17 is shown in Table 7-18.

Return to the Summary Table.

#### Table 7-18. R17 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-11	UNDISCLOSED	R	0h	Program this field to 0x0.
10-4	SYSREF0_DLY_I	R/W	7Fh	Sets the delay step for the SYSREFOUT0 delay generator. Must satisfy SYSREFOUT0_DLY_I + SYSREFOUT0_DLY_Q = 127
3-2	SYSREF0_DLY_PHASE	R/W	Oh	Sets the quadrature phase of the interpolator clock used for the SYSREFOUT0 delay generator retimer.  0h = ICLK' 1h = QCLK' 2h = ICLK 3h = QCLK
1-0	SYSREF_MODE	R/W	Oh	Controls how the SYSREF signal is generated and is also impacted by the SYSREF_DLY_BYP field. Continuous mode generates a continuous SYSREF clock that is derived from the SYSREF divider and delay. In pulser mode, a pulse at the SYSREFREQ pin causes a specific number (determined by SYSREF_PULSE_CNT) of pulses to be generated for the SYSREF outputs. In Repeater mode, a pulse at the SYSREFREQ pins generate a single pulse at the SYSREF outputs and only the propagation delay through the device is added. Oh = Continuous  1h = Pulser 2h = Repeater 3h = Reserved

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback

#### 7.1.17 R18 Register (Offset = 12h) [Reset = FE00h]

R18 is shown in Table 7-19.

Return to the Summary Table.

#### Table 7-19. R18 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	SYSREF1_DLY_I	R/W	7Fh	Sets the delay step for the SYSREFOUT0 delay generator. Must satisfy SYSREFOUT0_DLY_I + SYSREFOUT0_DLY_Q = 127
8-7	SYSREF1_DLY_PHASE	R/W	Oh	Sets the quadrature phase of the interpolator clock used for the SYSREFOUT1 delay generator retimer.  0h = ICLK' 1h = QCLK' 2h = QCLK 3h = ICLK
6-0	SYSREF0_DLY_Q	R/W	0h	Determines the strength of QCLK for delay generation. Must satisfy SYSREF0_DLY_I + SYSREF0_DLY_Q = 127

#### 7.1.18 R19 Register (Offset = 13h) [Reset = FE00h]

R19 is shown in Table 7-20.

Return to the Summary Table.

## Table 7-20. R19 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	SYSREF2_DLY_I	R/W	7Fh	Determines the strength of ICLK for delay generation. Must satisfy SYSREF2_DLY_I + SYSREF2_DLY_Q = 127
8-7	SYSREF2_DLY_PHASE	R/W	0h	Sets the quadrature phase of the interpolator clock used for the SYSREFOUT2 delay generator retimer.  0h = ICLK' 1h = QCLK' 2h = QCLK 3h = ICLK
6-0	SYSREF1_DLY_Q	R/W	0h	Determines the strength of QCLK for delay generation. Must satisfy SYSREF1_DLY_I + SYSREF1_DLY_Q = 127

#### 7.1.19 R20 Register (Offset = 14h) [Reset = FE00h]

R20 is shown in Table 7-21.

Return to the Summary Table.

Table 7-21. R20 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	SYSREF3_DLY_I	R/W	7Fh	Sets the delay step for the SYSREFOUT1 delay generator. Must satisfy SYSREFOUT1_DLY_I + SYSREFOUT1_DLY_Q = 127
8-7	SYSREF3_DLY_PHASE	R/W	0h	Sets the quadrature phase of the interpolator clock used for the SYSREFOUT3 delay generator retimer.  0h = ICLK' 1h = QCLK' 2h = QCLK 3h = ICLK
6-0	SYSREF2_DLY_Q	R/W	0h	Determines the strength of QCLK for delay generation. Must satisfy SYSREF3_DLY_I + SYSREF3_DLY_Q = 127

#### 7.1.20 R21 Register (Offset = 15h) [Reset = FE00h]

R21 is shown in Table 7-22.

Return to the Summary Table.

#### Table 7-22. R21 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	LOGISYSREF_DLY_I	R/W	7Fh	Determines the strength of logic ICLK for delay generation. Must satisfy LOGISYSREF_DLY_I+LOGISYSREF_DLY_Q = 127
8-7	LOGISYSREF_DLY_PHA SE	R/W	0h	Sets the quadrature phase of the interpolator clock used for the LOGISYSREFOUT delay generator retimer.  0h = ICLK' 1h = QCLK' 2h = QCLK 3h = ICLK
6-0	SYSREF3_DLY_Q	R/W	0h	Determines the strength of QCLK for delay generation. Must satisfy SYSREFx_DLY_I + SYSREFx_DLY_Q = 127

#### 7.1.21 R22 Register (Offset = 16h) [Reset = 0800h]

R22 is shown in Table 7-23.

Return to the Summary Table.

#### Table 7-23. R22 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-14	SYSREF1_DLY_SCALE	R/W	Oh	Sets the frequency range of the SYSREFOUT1 delay generator. Set according to phase interpolator frequency.  0h = 400MHz to 800MHz  1h = 200MHz to 400MHz  2h = 150MHz to 200MHz  3h = Reserved
13-12	SYSREF0_DLY_SCALE	R/W	Oh	Sets the frequency range of the SYSREFOUT0 delay generator. Set according to phase interpolator frequency.  0h = 400MHz to 800MHz  1h = 200MHz to 400MHz  2h = 150MHz to 200MHz  3h = Reserved
11-9	SYSREF_DLY_DIV	R/W	4h	Sets the delay generator clock division, determining the phase interpolator frequency and the delay generator resolution. Values other than those listed below are reserved.  0h = /1 (Up to 1.6GHz) 1h = /2 (1.6GHz to 3.2GHz) 2h = /4 (3.2GHz to 6.4GHz) 4h = /8 (6.4GHz to 12.8GHz)
8-7	UNDISCLOSED	R/W	0h	Program this field to 0x0.
6-0	LOGISYSREF_DLY_Q	R/W	0h	Sets the delay step for the LOGISYSREFOUT delay generator. Must satisfy LOGISYSREFOUT_DLY_I + LOGISYSREFOUT_DLY_Q = 127.

#### 7.1.22 R23 Register (Offset = 17h) [Reset = 4000h]

R23 is shown in Table 7-24.

Return to the Summary Table.

#### Table 7-24. R23 Register Field Descriptions

				ster i leiu Descriptions	
Bit	Field	Туре	Reset	Description	
15	TS_EN	R/W	0h	Enables the on-die temperature sensor. Temperature sensor counter (TS_CNT_EN) must also be enabled for readback.	
14	UNDISCLOSED	R/W	1h	Program this field to 0x1.	
13	MUXOUT_EN	R/W	0h	Enables or tri-states the MUXOUT pin driver.  0h = Tri-States 1h = Push-Pull	
12-7	UNDISCLOSED	R/W	0h	Program this field to 0x0.	
6	MUXOUT_SEL	R/W	0h	Selects MUXOUT pin function. 0h = Lock Detect 1h = Readback	
5-4	LOGISYSREF_DLY_SCA LE	R/W	Oh	Sets the frequency range of the LOGISYSREFOUT delay generator. Set according to phase interpolator frequency. 0h = 400MHz to 800MHz 1h = 200MHz to 400MHz 2h = 150MHz to 200MHz 3h = Reserved	
3-2	SYSREF3_DLY_SCALE	R/W	Oh	Sets the frequency range of the SYSREFOUT3 delay generator. Set according to phase interpolator frequency.  0h = 400MHz to 800MHz  1h = 200MHz to 400MHz  2h = 150MHz to 200MHz  3h = Reserved	
1-0	SYSREF2_DLY_SCALE	R/W	Oh	Sets the frequency range of the SYSREFOUT2 delay generator. Set according to phase interpolator frequency.  0h = 400MHz to 800MHz  1h = 200MHz to 400MHz  2h = 150MHz to 200MHz  3h = Reserved	

## 7.1.23 R24 Register (Offset = 18h) [Reset = 0000h]

R24 is shown in Table 7-25.

Return to the Summary Table.

## Table 7-25. R24 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-14	UNDISCLOSED	R	0h	Program this field to 0x0.
13-12	UNDISCLOSED	R/W	0h	Program this field to 0x0.
11-1	rb_TS	R	0h	Readback value of on-die temperature sensor.
0	TS_CNT_EN	R/W	0h	Enables temperature sensor counter. Temperature sensor (EN_TS) must be enabled for accurate data.

## 7.1.24 R25 Register (Offset = 19h) [Reset = 0211h]

R25 is shown in Table 7-26.

Return to the Summary Table.

#### Table 7-26. R25 Register Field Descriptions

		Tubic 7 2	LO. INEO INCE	Jister i leid Descriptions
Bit	Field	Туре	Reset	Description
15-7	UNDISCLOSED	R/W	4h	Program this field to 0x4.
6	CLK_DIV_RST	R/W	Oh	Resets the main clock divider. If the clock divider value is changed during operation, set this bit high then low after setting the new divider value. Synchronizing the device with the SYSREFREQ pins in SYSREFREQ_MODE = 0x0 and SYNC_EN = 0x1 also resets the main clock divider. This bit has no effect when outside of Divider Mode.
5-3	CLK_DIV	R/W	2h	CLK_DIV and CLK_MULT are aliases for the same field. When CLK_MUX=1 (Buffer Mode), this field is ignored. When CLK_MUX = 2 (Divider Mode), the clock divider is CLK_DIV + 1. Valid range for CLK_DIV is 1 to 7. Setting this to 0 disables the main clock divider and reverts to buffer mode. When CLK_MUX = 3 (Multiplier Mode), CLK_MULT the multiplier value is CLK_MULT. Valid range is 1 to 4. Setting outside this range disables multiplier mode and reverts to buffer mode. Valid range is 0x1 to 0x4.
2-0	CLK_MUX	R/W	1h	Selects the function for the main clock outputs  0h = Reserved  1h = Buffer  2h = Dividers  3h = Multiplier

#### 7.1.25 R28 Register (Offset = 1Ch) [Reset = 0A08h]

R28 is shown in Table 7-27.

Return to the Summary Table.

#### Table 7-27. R28 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-13	UNDISCLOSED	R	0h	Program this field to 0x0.
12	VCO_CORE_FORCE	R/W	0h	Forces the multiplier PLL's VCO to the value selected by VCO_CORE. Not required for Multiplier Mode programming, but can optionally be used to reduce calibration time.
11-9	VCO_CORE	R/W	5h	When VCO_CORE_FORCE=0, specifies start VCO for multiplier calibration. When VCO_CORE_FORCE=1, this VCO core is forced. Programming of this field is not required for Multiplier Mode programming, but can be used to debugging purposes or to reduce calibration time.
8-0	UNDISCLOSED	R/W	8h	Program this field to 0x8.



#### 7.1.26 R29 Register (Offset = 1Dh) [Reset = 05FFh]

R29 is shown in Table 7-28.

Return to the Summary Table.

#### Table 7-28. R29 Register Field Descriptions

	<u> </u>				
Bit	Field	Туре	Reset	Description	
15-13	UNDISCLOSED	R	0h	Program this field to 0x0.	
12-8	UNDISCLOSED	R/W	5h	Program this field to 0x5.	
7-0	VCO_CAPCTRL	R/W		Sets the starting value for the VCO tuning capacitance during multiplier calibration. Not required for Multiplier Mode programming, but can be used to reduce calibration time.	

## 7.1.27 R33 Register (Offset = 21h) [Reset = 7777h]

R33 is shown in Table 7-29.

Return to the Summary Table.

#### Table 7-29. R33 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-0	UNDISCLOSED	R/W	7777h	Program this field to 0x6666. Note that this is different than the reset value.

#### 7.1.28 R34 Register (Offset = 22h) [Reset = 0007h]

R34 is shown in Table 7-30.

Return to the Summary Table.

#### Table 7-30. R34 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-14	UNDISCLOSED	R	0h	Program this field to 0x0.
13-0	UNDISCLOSED	R/W	7h	Program this field to 0x5. Note that this is different than the reset value.



## 7.1.29 R65 Register (Offset = 41h) [Reset = 65F0h]

R65 is shown in Table 7-31.

Return to the Summary Table.

#### Table 7-31. R65 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-9	UNDISCLOSED	R/W	32h	Program this field to 0x32.
8-4	rb_VCO_CORE	R	1Fh	Readback for the multiplier VCO Core. There are only valid values and the VCO is determined by the bit that is low.  Fh = VCO1  17h = VCO2  1Bh = VCO3  1Dh = VCO4  1Eh = VCO5
3-0	UNDISCLOSED	R/W	0h	Program this field to 0x0.

## 7.1.30 R67 Register (Offset = 43h) [Reset = 50C8h]

R67 is shown in Table 7-32.

Return to the Summary Table.

#### Table 7-32. R67 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-0	UNDISCLOSED	R/W	50C8h	Program this field to 0x51CB. Note that this is different than the reset
				value.

#### 7.1.31 R72 Register (Offset = 48h) [Reset = 0000h]

R72 is shown in Table 7-33.

Return to the Summary Table.

#### Table 7-33. R72 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15	UNDISCLOSED	R	0h	Program this field to 0x0.
14-3	UNDISCLOSED	R/W	0h	Program this field to 0x0.
2	SYSREFREQ_FORCE	R/W	0h	Setting this bit emulates the behavior of a logic HIGH at SYSREFREQ pins and causes external signals on SYSREFREQ pins to be ignored.
1-0	SYSREF_DLY_BYP	R/W	Oh	Option to bypass delay generator retiming. Under normal circumstances (SYSREF_DLY_BYP = 0) the delay generator is engaged for continuous or pulser modes (Generator Modes), and bypassed in Repeater Mode. Generally this typically utilize a different delay mechanism. In certain cases, bypassing the delay generator retiming in Generator Mode by setting SYSREF_DLY_BYP = 1 can substantially reduce the device current consumption if the SYSREF delay can be compensated at the JESD receiver. In other cases, retiming the SYSREFREQ signal to the delay generators by setting SYSREF_DLY_BYP = 2 can improve the accuracy of the SYSREF output phase with respect to the CLKIN phase, or can vary the delay of individual outputs independently, as long as coherent phase relationship exists between the interpolator divider phase and the SYSREFREQ phase.  Oh = Engage in Generator Mode, Bypass in Repeater Mode 1h = Bypass in All Modes 2h = Engage in All Modes 3h = Reserved

#### 7.1.32 R73 Register (Offset = 49h) [Reset = 0000h]

R73 is shown in Table 7-34.

Return to the Summary Table.

#### Table 7-34. R73 Register Field Descriptions

				<u> </u>
Bit	Field	Туре	Reset	Description
15-13	UNDISCLOSED	R	0h	Program this field to 0x0.
12-0	UNDISCLOSED	R/W	0h	Program this field to 0x1000. Note that this is different than the reset value.

#### 7.1.33 R75 Register (Offset = 4Bh) [Reset = 0006h]

R75 is shown in Table 7-35.

Return to the Summary Table.

Table 7-35. R75 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15	rb_CLK2_EN	R	0h	Readback Pin Status
14	rb_CLK1_EN	R	0h	Readback Pin Status
13	rb_CLK0_EN	R	0h	Readback Pin Status
12	rb_MUXSEL1	R	0h	Readback Pin Status
11	rb_MUXSEL0	R	0h	Readback Pin Status
10	rb_LOGIC_EN	R	0h	Readback Pin Status
9-8	rb_LD	R	0h	Readback for Multiplier PLL lock detect.  0h = Unlocked (VTUNE low)  1h = Reserved  2h = Locked  3h = Unlocked (VTUNE high)
7	rb_DIVSEL2	R	0h	Readback Pin Status
6	rb_DIVSEL1	R	0h	Readback Pin Status
5	rb_DIVSEL0	R	0h	Readback Pin Status
4	rb_CE	R	0h	Readback Pin Status
3-0	UNDISCLOSED	R/W	6h	Program this field to 0x3. Note that this is different than the reset value.

#### 7.1.34 R76 Register (Offset = 4Ch) [Reset = 0000h]

R76 is shown in Table 7-36.

Return to the Summary Table.

Table 7-36. R76 Register Field Descriptions

П					·
	Bit	Field	Туре	Reset	Description
	15-4	UNDISCLOSED	R/W	0h	Program this field to 0x0.
	3	rb_PWRSEL2	R	0h	Readback Pin Status
	2	rb_PWRSEL1	R	0h	Readback Pin Status
	1	rb_PWRSEL0	R	0h	Readback Pin Status
	0	rb_CLK3_EN	R	0h	Readback Pin Status

## 7.1.35 R86 Register (Offset = 56h) [Reset = 0000h]

R86 is shown in Table 7-37.

Return to the Summary Table.

Table 7-37. R86 Register Field Descriptions

Bit	Field	Туре	Reset	Description
15-3	UNDISCLOSED	R/W	0h	Program this field to 0x0.
2	MUXOUT_EN_OVRD	R/W	0h	No description
1-0	UNDISCLOSED	R/W	0h	Program this field to 0x0.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback

#### 7.1.36 R90 Register (Offset = 5Ah) [Reset = 0000h]

R90 is shown in Table 7-38.

Return to the Summary Table.

Table 7-38. R90 I	Register	Field	<b>Descriptions</b>
-------------------	----------	-------	---------------------

Bit	Field	Туре	Reset	Description
15-8	UNDISCLOSED	R	0h	Program this field to 0x0.
7	UNDISCLOSED	R/W	0h	Program this field to 0x0.
6	LOGICLK_DIV_BYP3	R/W	0h	This bit must be set to 1 if LOGICLK_DIV_BYP=1, 0 otherwise.
5	LOGICLK_DIV_BYP2	R/W	0h	This bit must be set to 1 if LOGICLK_DIV_BYP=1, 0 otherwise.
4-0	UNDISCLOSED	R/W	0h	Program this field to 0x0.

## 8 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

#### 8.1 Application Information

#### 8.1.1 SYSREFREQ Input Configuration

The SYSREFREQ pins support single-ended or differential input in AC or DC coupling mode. The SYSREFREQ pins have an internal  $50\Omega$  termination with capacitive ground, which acts as  $100\Omega$  differential.

Figure 8-1 shows the generic SYSREFREQ input circuit recommendation to support all AC/DC, single-ended or differential inputs. Some of the discrete components in Figure 8-1 are just placeholder for individual input signal (single-ended or differential input) and AC or DC coupled input.




Figure 8-1. SYSREFREQ Input Circuit Recommendations

The following figures show the individual circuit diagram for each configurations:




Figure 8-2. AC-Coupled Differential Input




Figure 8-3. AC-Coupled, Single-Ended Input




Figure 8-4. DC-Coupled Differential Input




Figure 8-5. DC-Coupled, Single-Ended Input

- 1. AC coupled differential and single-ended input configurations required the resistor terminations (R2 and R3) to create the VCM at each pin and resistor values must select to maintain greater than 150mV potential difference between pin P and pin N.
  - a. As an example, to create the VCM of 1.5V at pin P and 1.65V at pin N, with the 2.5V VCC, set R3 =  $550\Omega$  and R2 = 1kΩ
  - For single-ended input configuration, place R6 =  $50\Omega$  to avoid any reflection at complementary input pin.
- 2. DC coupled differential and single-ended input configuration required to have the source common-mode voltage matched with the device input common mode specifications.
  - a. For single-ended input configuration, keep the R1, R2, R3 and R4 resistors. This method creates the same common-mode voltage at both pins, and the resistive dividers create 75 $\Omega$  at pin P and 50 $\Omega$ Thevenin's equivalent at pin N.
  - b. As an example, to have the common-mode voltage of 1.35V at each pin, set the resistive divider components values to R1 =  $130\Omega$ , R2 =  $165\Omega$ , R3 =  $86.6\Omega$  and R4 =  $110\Omega$  with the 2.5V VCC.

#### 8.1.2 Treatment of Unused Pins

In many cases, not all pins are used. Table 8-1 lists the recommendation on how to handle these unused pins.

Table 8-1. Treatment of Unused or Partially Used Pins

PIN(S)	TREATMENT
All VCC Pins	These pins must always be connected to the power supply. If the block that powers by these VCC pins (as implied by the pin name) is not used, then the bypassing can be minimized or eliminated.
SYSREFREQ	<ol> <li>If driving single-ended input, the complementary input pin terminates based on Section 8.1.1.</li> <li>If the SYSREFREQ pins are unused, tie the pins to the VCC with a 1kΩ resistor.</li> </ol>
CLKIN Complementary Input	If driving single-ended input, the complementary pin terminate with $50\Omega$ resistor AC-coupled to ground.
VBIAS01 and VBIAS23	If multiplier is not used, connect these pins capacitor (1µF) to ground.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback



Table 8-1. Treatment of Unused or Partially Used Pins (continued)

PIN(S)	TREATMENT
CLKOUT SYSREFOUT LOGICLKOUT LOGISYSREFOUT	If not used, connect a AC-coupling capacitor and $50\Omega$ to ground.
CE, CLKx_EN, LOGIC_EN, SYSREF_EN	<ol> <li>If operating device in SPI controlled mode, these pins must tied to VCC with 1kΩ resistor.</li> <li>If not operating in both SPI and pin mode, these pins must connect to ground with 1kΩ resistor.</li> </ol>
CAL, MUXSELx, DIVSELx, PWRSELx	1. If these pins are unused, connect these pins to ground with a $1k\Omega$ resistor.

#### 8.1.3 Current Consumption

The current consumption varies as a function of the setup condition. By adding up all the block currents shown in Table 8-2, users can obtain reasonable estimate of the current for any setup condition.

**Table 8-2. Current Consumption per Block** 

BL	оск	CONDITIONS		CURRENT (mA)		
Device Core		CLK_MUX = Buffer Mode	294			
		CLK_MUX = Divide Mode	CLK_MUX = Divide Mode			
		CLK_MUX = Multiply Mode	CLK_MUX = Multiply Mode			
	Core	SYSREF_EN=1	•	80		
0.400==	Dolay Congretor	Generator Mode (SYSREF_MOI	DE=0,1)	53		
SYSREF SYNC	Delay Generator	Repeater Mode (SYSREF_MOD	E=2)	40		
Windowing	Mindowing Circuitm	Windowing Circuitry	SYSREF_MODE=0,1	113		
g	Windowing Circuitry	(CLKPOS_CAPTURE_EN=1)	SYSREF_MODE=2	0		
	SYSREF Pulser	SYSREF_MODE=1	•	7		
011/01/7		SYSREF_EN=0		25		
CLKOUT (Per active clock	Core	SYSREF EN = 1	Delay Not Used	30		
channel)		STOREF_EN - I	Delay Used	40		
,	Output Buffer	CHx_EN = CLKOUTx_EN=1	4+6*CLKOUTx_PWR			
	Core	SYSREFOUT_EN = CHx_EN =	74 + SYSREFOUTx_PWR*5			
SYSREFOUT	Output Buffer	SYSREFOUT_EN = CHx_EN = (SYSREFOUTx_PWR and SYSI interact which makes the output the formula predicts in some cas	2*SYSREFOUTx_PWR + 2*SYSREFOUTx_VCM			
	Come		SYSREF_EN=0	49		
LOCICLICOLIT	Core	LOGIC EN=1	SYSREF_EN=1	59		
LOGICLKOUT	0 5 . 5	LOGICLKOUT_EN=1	CML(R <sub>P</sub> =50Ω)	16+1*LOGICLKOUT_PWR		
	Output Buffer		LVDS	12		
	Core	LOGIC_EN=1	SYSREF_EN=0	0		
LOGISYSREFOUT	Core	LOGISYSREFOUT_EN=1	SYSREF_EN=1	55		
LUGISTSKEFUUT	Output Buffer	LOGIC_EN=1	CML(R <sub>P</sub> =50Ω)	16+1*LOGICLKOUT_PWR		
	Output buller	LOGISYSREFOUT_EN=1	LVDS	12		

# 8.2 Typical Applications

#### 8.2.1 Local Oscillator Distribution Application

For this application, the additive noise impact of using the LMX1906-SP as a x2 multiplier is exported when added to the LMX2615-SP 3GHz output clock. This particular setup used a single-ended clock to drive the LMX1906-SP for the sake of simplicity of hooking up two EVMs together, but driving the device differentially is generally recommended.

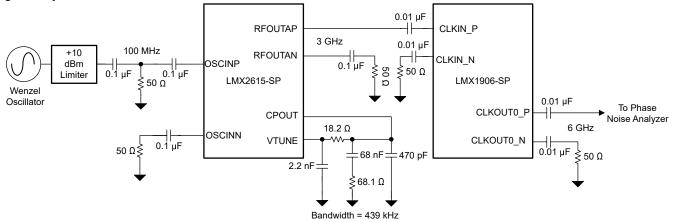


Figure 8-6. Typical Application Schematic

#### 8.2.1.1 Design Requirements

Table 8-3 shows the design parameters for this example.

If not all outputs or SYSREF are used, TI recommends to compress the layout to minimize trace lengths, especially that of the input trace.

PARAMETERS	VALUE
LMX2615-SP Input Frequency	100MHz
LMX2615-SP Output Frequency	3GHz
LMX1906-SP Clock Input Frequency	3GHz
LMX1906-SP Clock Output Frequency	6GHz
LMX1906-SP Multiplier Value	x2

Table 8-3. Design Parameters

## 8.2.1.2 Detailed Design Procedure

In this example, a 3GHz input clock is being multiplied up to a 6GHz input clock. The external components do not change that much based on internal configuration. The TICS Pro software is very useful in calculating the necessary register values and configuring the device.



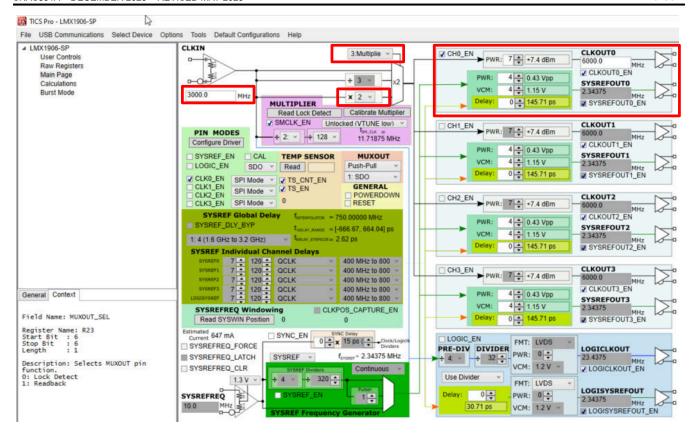


Figure 8-7. LMX1906-SP TICS Pro Setup

#### 8.2.1.3 Application Plot

Figure 8-8 the total plot is the sum of the noise of the LMX1906-SP multiplier noise and the LMX2615-SP 3GHz output (scaled to 6GHz by adding 6dB). Note that the LMX1906-SP does increase the phase noise in the 1MHz to 20MHz range, but beyond 20MHz, the input multiplier actually filters the output noise floor.

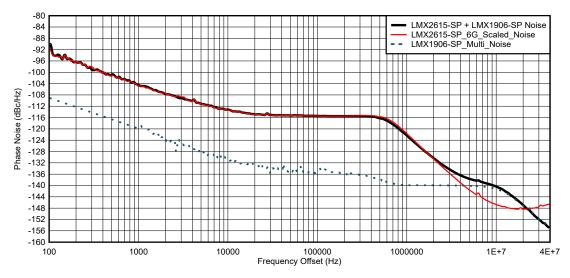


Figure 8-8. LMX1906-SP Multiplier Output

#### 8.2.2 JESD204B/C Clock Distribution Application

This application shows the JESD204B/C clock distribution circuit using the LMX1906-SP, which can take the high frequency input from LMX2615-SP and generate 4 pairs of JESD clocks to data converters along with clocks for FPGA.

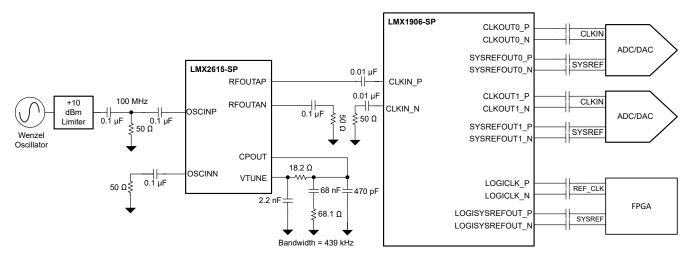


Figure 8-9. Typical JESD Clocks Block Diagram

#### 8.3 Power Supply Recommendations

This device uses a 2.5V supply for the whole device. A direct connection to a switching power supply can result in unwanted spurs at the output. Bypassing can be done individually at all the power pins. TI recommends placing smaller capacitors with higher frequency of minimum impedance on the same layer as the device, as close to the pins as possible. Since the frequencies of nearly all signals in the device are 100MHz or greater, therefore larger value bypass capacitors with low frequency of minimum impedance are only used for internal LDO stability, and the distance to the device (and the loop inductance of the bypass path) can be larger. Isolate the supply pins for the clocks and the LOGICLK with a small resistor or ferrite bead if both are being used simultaneously. See the *Pin Configuration and Functions* section for additional recommendations for each pin.

#### Note

This device has minimal PSRR due to the low operating voltage and internal filtering by LDOs. Connecting this device to a low noise supply that does not have excessive spurious noise is important.

#### 8.3.1 Power-Up Timing

To power up the device, some power sequencing is required.

- 1. Apply power to the device and verify that the VCC pins reach proper levels.
- 2. Although the power-on reset happens automatically, the user can do a software reset by toggling the RESET bit from 1 to 0. Verify that the time between programming these two commands is at least 1µs.
- 3. Program the registers as desired.

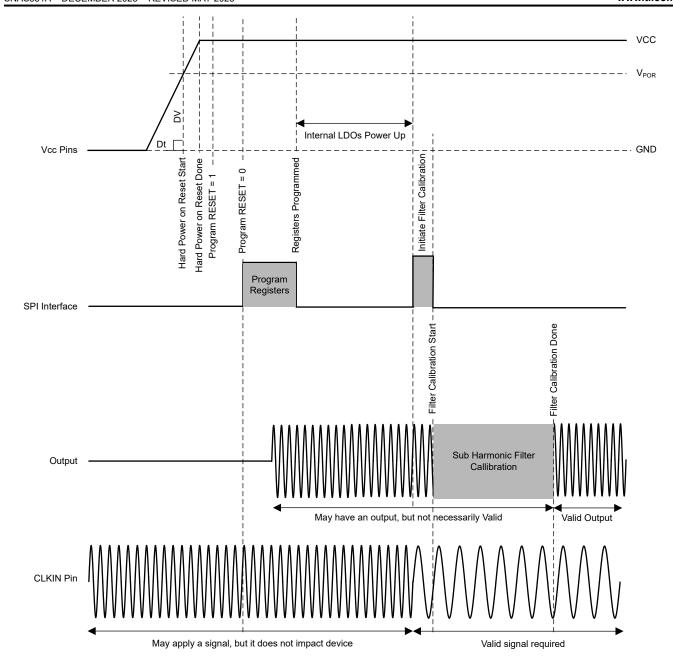


Figure 8-10. Power-Up Timing

#### 8.4 Layout

#### 8.4.1 Layout Guidelines


- If using a single-ended output, terminate the complementary side with  $50\Omega$  so that the impedance for the signal output is same as complementary pin side.
- · GND pins on the outer perimeter of the package can be routed on the package back to the DAP.
- Minimize the length of the CLKIN trace for optimal phase noise. Poor matching can degrade the noise floor.
- · Verify that the DAP on the device is well-grounded with many vias.
- Use a low loss dielectric material, such as Rogers 4003C, for optimal output power.
- Be aware that if all the outputs and SYSREF are operating, the current consumption can be high enough to
  exceed the recommended internal junction temperature of 125°C; a heat sink can be necessary.

Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated



## 8.4.2 Layout Example

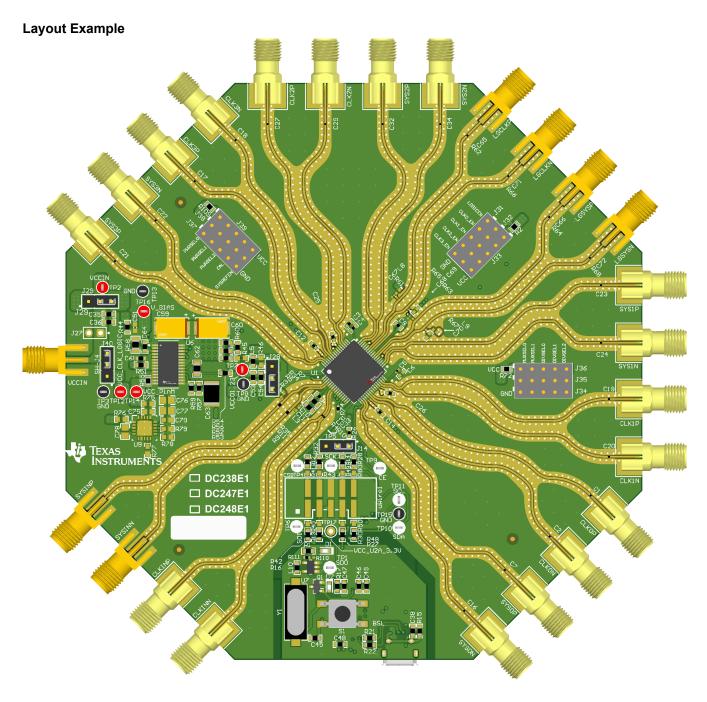



## 9 Device and Documentation Support

#### 9.1 Device Support

TI offers an extensive line of development tools and software to simulate the device performance and program the device.

Table 9-1. Development Tools and Software

TOOL	TYPE	DESCRIPTION
PLLatinum™ Sim	Software	Simulates phase noise in all modes
TICS Pro	Software	Programs the device with a user-friendly GUI with interactive feedback and hex register export.

#### 9.2 Documentation Support

#### 9.2.1 Related Documentation

Texas Instruments, LMX1906-SP Evaluation Module, EVM user's guide

## 9.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on Notifications to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

#### 9.4 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

#### 9.5 Trademarks

PLLatinum<sup>™</sup> and TI E2E<sup>™</sup> are trademarks of Texas Instruments.

Rohde & Schwarz® is a registered trademark of Rohde & Schwarz GmbH & Co KG.

All trademarks are the property of their respective owners.

#### 9.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 9.7 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

#### 10 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

#### Changes from Revision \* (December 2023) to Revision A (May 2025) Page Changed divider mode supported divide values by removing /6 and /8 throughout the data sheet......1 Updated SMCLK enable conditions in the State Machine Clock section and Register Map ......19



# 11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2025 Texas Instruments Incorporated

Submit Document Feedback


**PAP0064E** 



#### **PACKAGE OUTLINE**

## PowerPAD™ TQFP - 1.2 mm max height

PPLIASSTT0CCQQLIAADDFFLIATTPAACOK

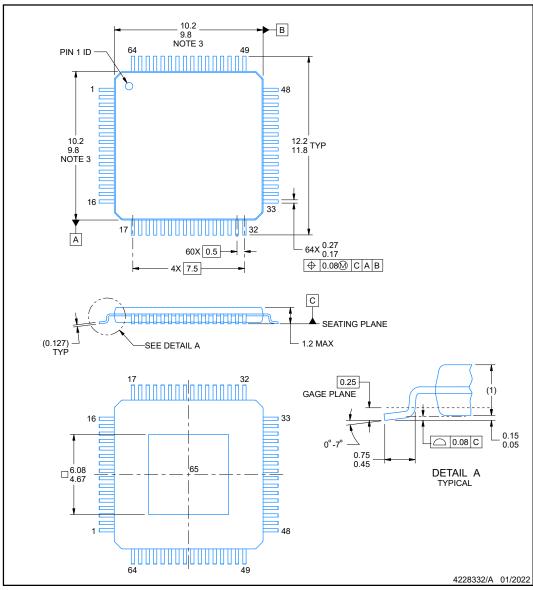

NOTES:

PowerPAD is a trademark of Texas Instruments.

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
   This drawing is subject to change without notice.
   This dimension does not include mold flash, protrusions, or gate burrs.
   Strap features may not be present.
   Reference JEDEC registration MS-026.



Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated




#### **EXAMPLE BOARD LAYOUT**

#### **PAP0064E**

#### PowerPAD™ TQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

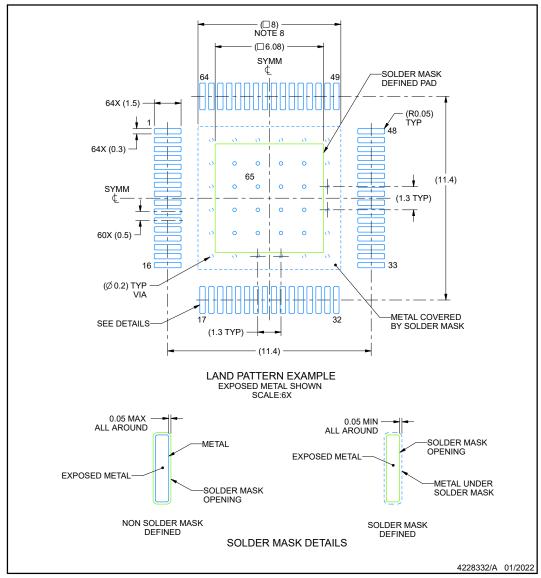

#### NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
  7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
  8. This package is designed to be soldered to a thermal pad on the board. See technical brief, Powerpad thermally enhanced package, Texas Instruments Literature No. SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).

  9. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

  10. Size of metal pad may vary due to creepage requirement.






#### **EXAMPLE STENCIL DESIGN**

#### **PAP0064E**

#### PowerPAD™ TQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

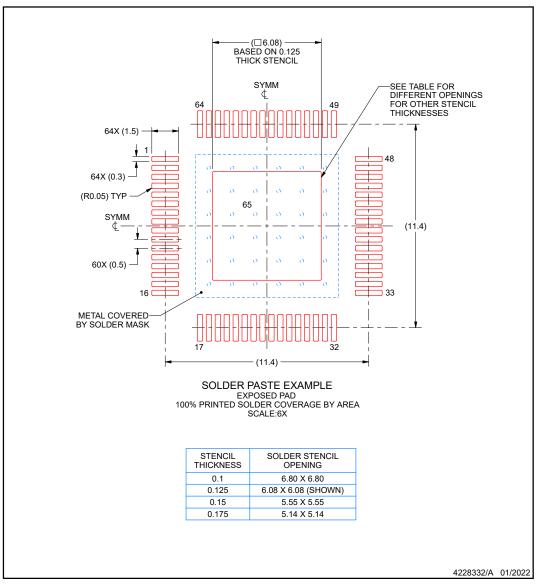

#### NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.12. Board assembly site may have different recommendations for stencil design.



Submit Document Feedback

Copyright © 2025 Texas Instruments Incorporated

www.ti.com 7-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
5962R2320201PXE	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	-55 to 125	5962R23202 01PXE
LMX1906PAP/EM	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	25 to 25	LMX1906 PAP/EM
LMX1906PAP/EM.A	Active	Production	HTQFP (PAP)   64	250   SMALL T&R	Yes	NIPDAU	Level-3-260C-168 HR	25 to 25	LMX1906 PAP/EM

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 1-Aug-2025

#### **TAPE AND REEL INFORMATION**





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

#### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
5962R2320201PXE	HTQFP	PAP	64	250	178.0	24.4	13.0	13.0	1.5	16.0	24.0	Q2
LMX1906PAP/EM	HTQFP	PAP	64	250	178.0	24.4	13.0	13.0	1.5	16.0	24.0	Q2

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 1-Aug-2025



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
5962R2320201PXE	HTQFP	PAP	64	250	213.0	191.0	55.0
LMX1906PAP/EM	HTQFP	PAP	64	250	213.0	191.0	55.0

#### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025