



SLOS394B – JULY 2002 – REVISED NOVEMBER 2009

LOW-DISTORTION, HIGH SLEW RATE, CURRENT-FEEDBACK AMPLIFIERS

Check for Samples: THS3061 THS3062

FEATURES

Unity Gain Bandwidth: 300 MHz
0.1-dB Bandwidth: 120 MHz (G = 2)

UMENTS

High Slew Rate: 7000 V/µs

• HD3 at 10 MHz: -81 dBc (G = 2, R_L = 150 Ω)

• High Output Current: ±145 mA into 50 Ω

Power-Supply Voltage Range: ±5 V to ±15 V

APPLICATIONS

High-Speed Signal Processing

• Test and Measurement Systems

VDSL Line Driver

High-Voltage ADC Preamplifier

Video Line Driver

DESCRIPTION


The THS3061 (single) and THS3062 (dual) are high-voltage, high slew-rate current feedback amplifiers utilizing Texas Instruments' BICOM-1 process. Designed for low-distortion with a high slew rate of 7000 V/µs, the THS306x amplifiers are ideally suited for applications requiring large, linear output signals such as video line drivers and VDSL line drivers.


The THS3061 and THS3062 provide well-regulated ac performance characteristics with power supplies ranging from ±5-V operation up to ±15-V supplies. Most notably, the 0.1-dB flat bandwidth is exceedingly high, reaching beyond 100 MHz, and the THS306x has less than 0.3 dB of peaking in the frequency response when configured in unity gain. The unity-gain bandwidth of 300 MHz provides excellent distortion characteristics at 10 MHz. The flexibility of the current-feedback design allows a 220-MHz, -3-dB bandwidth in a gain of 10, indicating excellent performance even at high gains.

The THS306x consumes 8.3 mA per-channel quiescent current at room temperature, and has the capability of producing up to ±145 mA of output current. The THS3061 is packaged in an 8-pin SOIC and an 8-pin MSOP with PowerPAD™. The THS3062 is available in an 8-pin SOIC with PowerPAD and an 8-pin MSP with PowerPAD.

RELATED DEVICES AND DESCRIPTIONS

DEVICE	DESCRIPTION
THS3001	Low Distortion Current-Feedback Amplifier
THS3112	Dual Current-Feedback Amplifier With 175 mA Drive
THS3122	Dual Current-Feedback Amplifier With 350 mA Drive
OPA691	Wideband Current-Feedback Amplifier with 350 mA Drive

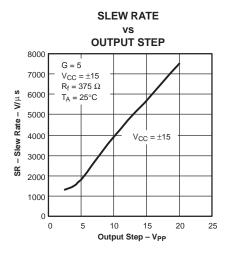



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PowerPAD is a trademark of Texas Instruments. All other trademarks are the property of their respective owners.





This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature range unless otherwise noted. (1)

Vs	Supply voltage	±16.5 V
VI	Input voltage	±V _S
Io	Output current	200 mA
V_{ID}	Differential input voltage	±3 V
	Continuous power dissipation	See Dissipation Ratings Table
TJ	Maximum junction temperature	+150°C
T _J (2)	Maximum junction temperature, continuous operation, long term reliability	+125°C
T _{stg}	Storage temperature range	−65°C to +150°C

⁽¹⁾ The absolute maximum ratings under any condition is limited by the constraints of the silicon process. Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

PACKAGE DISSIPATION RATINGS

PACKAGE	θ _{JC} (°C/W)	θ _{JA} (°C/W) ⁽¹⁾	POWER RATING (T _J = +125°C) ⁽²⁾			
	(C/VV)	(C/W)\ /	T _A ≤ +25°C	T _A = +85°C		
D (8 pin)	38.3	97.5	1.02 W	410 mW		
DDA (8 pin) ⁽³⁾	9.2	45.8	2.18 W	873 mW		
DGN (8 pin) ⁽³⁾	4.7	58.4	1.71 W	680 mW		

⁽¹⁾ This data was taken using the JEDEC High-K test PCB.

(2) This data was taken using 2 oz. trace and copper pad that is soldered directly to a 3 in x 3 in PCB.

RECOMMENDED OPERATING CONDITIONS

		MIN	MAX	UNIT
Cumply yeltogo	Dual supply	±5	±15	V
Supply voltage	Single supply	10	30	V

Submit Documentation Feedback

⁽²⁾ The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

⁽³⁾ The THS306x may incorporate a PowerPAD on the underside of the chip. This acts as a heatsink and must be connected to a thermally dissipative plane for proper power dissipation. Failure to do so may result in exceeding the maximum junction temperature which could permanently damage the device. See TI technical brief SLMA002 for more information about utilizing the PowerPAD thermally enhanced package.




ORDERING INFORMATION(1)


PART NUMBER	PACKAGE TYPE	PACKAGE MARKING	TRANSPORT MEDIA, QUANTITY
Single	·		
THS3061D	SOIC-8		Rails, 75
THS3061DR	SOIC-0	_	Tape and Reel, 2500
THS3061DGN	MSOP-8-PP ⁽²⁾	DID	Rails, 80
THS3061DGNR	WISOP-6-PP\/	BIB	Tape and Reel, 2500
Dual			
THS3062D	SOIC-8		Rails, 75
THS3062DR	3010-0	_	Tape and Reel, 2500
THS3062DDA	SOIC-8-PP ⁽²⁾		Rails, 75
THS3062DDAR	3010-8-PP	_	Tape and Reel, 2500
THS3062DGN	MSOP-8-PP ⁽²⁾	BIC	Rails, 80
THS3062DGNR	IVISOP-6-PP(=/	BIC	Tape and Reel, 2500

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.
- (2) The PowerPAD is electrically isolated from all other pins.

PIN ASSIGNMENTS

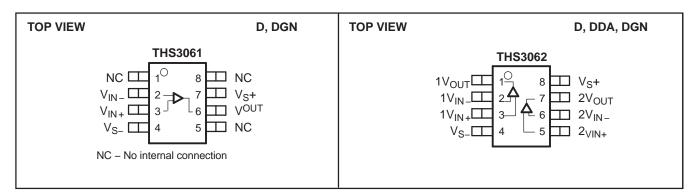

PARAMETER MEASUREMENT INFORMATION








Figure 2. Inverting Test Circuit



ELECTRICAL CHARACTERISTICS

At $V_S = \pm 15$ V: $R_f = 560 \Omega$, $R_L = 150 \Omega$, and G = 2, unless otherwise noted.

						THS3061			
				TYP	OVER TEMPERATURE				
PARAMETER		TEST CONDITIONS		+25°C	+25°C	0°C to +70°C	-40°C to +85°C	UNITS	MIN/ TYP/ MAX
AC PERF	FORMANCE								
		$G=1,\ R_f=750\Omega$		300					
	nal bandwidth	$G = 2$, $R_f = 560 \Omega$		275				MHz	Tyro
$(V_0 = 100)$ Peaking <		G = 5, $R_f = 357 \Omega$		260				IVITIZ	Тур
· ·	,	$G = 10, R_f = 200 \Omega$		220					
Bandwidt	h for 0.1-dB flatness	$G = 2, V_O = 100 \text{mV}_{PP}$		120				MHz	Тур
Peaking a	at a gain of 1	$V_O = 100 \text{ mV}_{PP}$		0.3				dB	Тур
Large-sig	nal bandwidth	$G = 2, V_O = 4 V_{PP}$		120				MHz	Тур
Claw rata	(050/ to 750/ lovel)	G = 5, 20 V-Step		7000				1//110	Tun
Siew rate	(25% to 75% level)	G = 2, 10 V-Step		5700				V/µs	Тур
Rise and	fall time	G = 2, V _O = 10 V-Step		1				ns	Тур
Settling	0.1%	0 0 1/ 0 1/ 0/		30				ns	Тур
time to	0.01%	$G = -2$, $V_O = 2$ V-Step		125				ns	Тур
Harmonic	distortion								
2nd order harmonic 3rd order harmonic		$G = 2, f = 10 \text{ MHz},$ $R_L = 1$	R _L = 150 Ω	-78				dBc	T
			$R_L = 1 k\Omega$	-73					Тур
			$R_L = 150 \Omega$	-81					_
			$R_L = 1 k\Omega$	-82				dBc	Тур
3rd order	intermodulation distortion	$G = 2$, $f_c = 10$ MHz, $V_O = 2$ $V_{PP(envelope)}$ $\Delta f = 2$	00 kHz	-93				dBc	Тур
Input volta	age noise	f > 10 kHz		2.6				nV/√ Hz	Тур
Input curr	rent noise (noninverting)	f > 10 kHz		20				pA/√Hz	Тур
Input curr	rent noise (inverting)			36				pA/√Hz	Тур
Differentia	al gain (NTSC, PAL)	C 0 D 450 O		0.02%					Тур
Differentia	al phase (NTSC, PAL)	$G = 2, R_L = 150 \Omega$		0.01°					Тур
DC PERF	FORMANCE								
Open-loo	p transimpedance gain	$V_O = 0 \text{ V}, R_L = 1 \text{ k}\Omega$		1	0.7	0.6	0.6	ΜΩ	Min
Input offs	et voltage			±0.7	±3.5	±4.4	±4.5	mV	Max
	Average offset voltage drift	1				±10	±10	μV/°C	Тур
Input bias	s current (inverting)			±2.0	±20	±32	±35	μA	Max
	Average bias current drift (-)	$V_{CM} = 0 V$				±25	±30	nA/°C	Тур
Input bias	Input bias current (noninverting)			±6.0	±25	±38	±40	Α	Max
Average bias current drift (+)		†				±45	±50	nA/°C	Тур
INPUT									
Common-	-mode input range			±13.9	±13.1	±13.1	±13.1	V	Min
Common-	-mode rejection ratio	$V_{CM} = \pm 0.5 \text{ V}$		72	60	58	58	dB	Min
		Noninverting		518				kΩ	Тур
Input resi	stance	Inverting		71				Ω	Тур
Input capa	acitance	Noninverting		1				pF	Тур



At V $_{S}$ = ±15 V: R_{f} = 560 $\Omega,~R_{L}$ = 150 $\Omega,$ and G = 2, unless otherwise noted.

			THS3061, THS3062						
2.2		TYP	OVER TEMPERATURE						
PARAMETER	TEST CONDITIONS +25		+25°C	0°C to +70°C	-40°C to +85°C	UNITS	MIN/ TYP/ MAX		
OUTPUT									
Voltage output owing	$R_L = 1 \text{ k}\Omega$	±13.7	±13.4	±13.4	±13.3	V	Min		
Voltage output swing	$R_L = 150 \Omega$	±13	±12.6	±12.4	±12.3		IVIIII		
Current output, sourcing	$R_L = 50 \Omega$	145	140	135	130	mA	Min		
Current output, sinking	$R_L = 50 \Omega$	-145	-140	-135	-130	mA	Min		
POWER SUPPLY									
Closed-loop output impedance	G = 1, f = 1 MHz	0.1				Ω	Тур		
Specified operating voltage		±15				V	Тур		
Maximum operating voltage			±16.5	±16.5	±16.5	V	Max		
Maximum quiescent current/channel		8.3	10	11.7	12	mA	Max		
Minimum quiescent current/channel		8.3	6.1	6	6	mA	Min		
Power-supply rejection (+PSRR)	V _{S+} = 14.50 V to 15.50 V	76	65	63	63	dB	Min		
Power-supply rejection (-PSRR)	$V_{S-} = -14.50 \text{ V to } -15.50 \text{ V}$	74	65	63	63	dB	Min		



ELECTRICAL CHARACTERISTICS

At $V_S = \pm 5$ V: $R_f = 560 \Omega$, $R_L = 150 \Omega$, and G = 2, unless otherwise noted.

	5 V: R _f = 560 Ω, R _L = 150 Ω					THS3061	, THS306	52	
		TEST CONDITIONS		TYP			TEMPER		
PARAMETER TEST CO		TEST COND	TIONS	+25°C	+25°C	0°C to +70°C	-40°C to +85°C	UNITS	MIN/ TYP/ MAX
AC PERF	FORMANCE						1		1
		$G = 1$, $R_f = 750$ Ω		275					
Small-sig	nal bandwidth	$G = 2$, $R_f = 560$ Ω		250					_
	mV _{PP} , peaking < 0.3 dB)	$G = 5, R_f = 383 \Omega$		230				MHz	Тур
		G = 10, R _f = 200 Ω		210					
Bandwidt	h for 0.1-dB flatness	$G = 2$, $V_O = 100 \text{ mV}_{PP}$		100				MHz	Тур
Peaking a	at a gain of 1	$V_O = 100 \text{ mV}_{PP}$		< 0.3				dB	Тур
Large-sig	nal bandwidth	$G = 2, V_O = 4 V_{PP}$		100				MHz	Тур
Class sata	(050/ to 350/ level)	G = 1, 5-V Step, R _f = 7	50 Ω	2700				1//	T
Siew rate	(25% to 75% level)	G = 5, 5-V Step, R _f = 3	57 Ω	1300				V/µs	Тур
Rise and	fall time	G = 2, V _O = 5-V Step		2				ns	Тур
Settling	0.1%	C = 2 V = 2 V C+		20					T
time to	0.01%	$G = -2$, $V_O = 2-V$ Step		160				ns	Тур
Harmonic	distortion								
	2nd order harmonic		R _L = 150 Ω	-76				dBc	Тур
	Zild Older Hamilonic	G = 2, f = 10 MHz, $V_O = 2 V_{PP}$	$R_L = 1 k\Omega$	-70					
Ord ander have ania	Ord order harmonia		$R_L = 150 \Omega$	-79					Tun
3rd order harmonic		$R_L = 1 k\Omega$	-77				dBc	Тур	
3rd order	rd order intermodulation distortion		-91				dBc	Тур	
Input volta	age noise	f > 10 kHz		2.6				nV/√Hz	Тур
	ent noise (noninverting)	f > 10 kHz		20				pA/√Hz	Тур
	ent noise (inverting)			36				pA/√Hz	Тур
Differentia	al gain (NTSC, PAL)	0 0 0 450 0		0.025%					Тур
Differentia	al phase (NTSC, PAL)	$G = 2, R_L = 150 \Omega$		0.01°					Тур
DC PERF	FORMANCE	ı							
Open-loo	p transimpedance gain	$V_O = 0 \text{ V}, R_L = 1 \text{ k}\Omega$		0.8	0.6	0.5	0.5	ΜΩ	Min
Input offs	et voltage			±0.3	±3.5	±4.4	±4.5	mV	Max
	Average offset voltage drift					±9	±9	μV/°C	Тур
Input bias	s current (inverting)			±2.0	±20	±32	±35	μΑ	Max
	Average bias current drift (-)	$V_{CM} = 0 V$				±20	±25	nA/°C	Тур
Input bias	s current (noninverting)			±6.0	±25	±38	±40	μΑ	Max
	Average bias current drift (+)					±30	±35	nA/°C	Тур
INPUT									
Common-	-mode input range			±3.9	±3.1	±3.1	±3.1	V	Min
Common-	-mode rejection ratio	$V_{CM} = \pm 0.5 \text{ V}$		70	60	58	58	dB	Min
Input resi	stance	Noninverting		518				kΩ	Тур
		Inverting		71				Ω	Тур
Input cap		Noninverting		1				pF	Тур
OUTPUT		T			T		1	I	1
Voltage o	output swing	$R_L = 1 k\Omega$		±4.1	±3.8	±3.8	±3.7	V	Min
. onago o		$R_L = 150 \Omega$		±4.0	±3.6	±3.6	±3.5	v	



At V $_{S}$ = ±5 V: R_{f} = 560 $\Omega,$ R_{L} = 150 Ω , and G = 2, unless otherwise noted.

			THS3061, THS3062						
PARAMETER		TYP	OVER TEMPERATURE						
	TEST CONDITIONS	+25°C	+25°C	0°C to +70°C	-40°C to +85°C	UNITS	MIN/ TYP/ MAX		
Current output, sourcing	R _L = 50 Ω	63	61	60	59	mA	Min		
Current output, sinking		-63	-61	-60	-59	mA	Min		
Closed-loop output impedance	G = 1, f = 1 MHz	0.1				Ω	Тур		
POWER SUPPLY									
Specified operating voltage		±5				V	Тур		
Minimum operating voltage			±4.5	±4.5	±4.5	V	Min		
Maximum quiescent current		6.3	8.0	9.2	9.5	mA	Max		
Minimum quiescent current		6.3	5.0	4.7	4.6	mA	Min		
Power-supply rejection (+PSRR)	V _{S+} = 4.50 V to 5.50 V	73	65	63	63	dB	Min		
Power-supply rejection (-PSRR)	$V_{S-} = -4.50 \text{ V to } -5.50 \text{ V}$	75	65	63	63	dB	Min		

TYPICAL CHARACTERISTICS

Table of Graphs

		FIGURE
Small-signal frequency response		3-14
Large-signal frequency response		15, 16
Harmonic distortion	vs Frequency	17-23
Harmonic distortion	vs Output voltage	24-29
Output impedance	vs Frequency	30
Common-mode rejection ratio	vs Frequency	31
Input current noise	vs Frequency	32
Voltage noise density	vs Frequency	33
Power-supply rejection ratio	vs Frequency	34
Common-mode rejection ratio (DC)	vs Input common-mode range	35
Supply current	vs Power-supply voltage	36, 37
Slew rate	vs Output voltage	38, 39
Slew rate	vs Output step	40
Input offset voltage	vs Output voltage swing	41
Overdrive recovery time		42, 43
Differential gain	vs Number of 150-Ω loads	44, 45
Differential phase	vs Number of 150-Ω loads	46, 47



SMALL-SIGNAL FREQUENCY RESPONSE




Figure 3.

TYPICAL CHARACTERISTICS

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 4.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 5.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 6.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 7.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 8.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 9.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 10.

SMALL-SIGNAL FREQUENCY RESPONSE




Figure 11.






Figure 12.




Figure 13.




Figure 14.

THS3061

HARMONIC DISTORTION




Figure 15.

THS3062




Figure 16.

HARMONIC DISTORTION




Figure 17.




Figure 18.




Figure 19.







Figure 20.



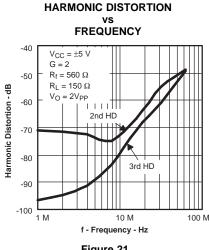





HARMONIC DISTORTION

Figure 21.


Figure 22.


THS3061


HARMONIC DISTORTION


Figure 23.

THS3061









Harmonic

-85

-90

-95

-100

0

3

V_O - Output Voltage - V

Figure 24.



HARMONIC DISTORTION

0


Figure 26.


HARMONIC DISTORTION

Vo - Output Voltage - V

5

THS3061 HARMONIC DISTORTION **vs OUTPUT VOLTAGE**






VS OUTPUT VOLTAGE -60 2nd HD 1 MHz -70 фB 2nd HD f = 8 MHz Harmonic Distortion --80 3rd HD 8 MHz -90 3rd HD f = 1 MHz V_{CC} = ±5 V -100 $R_f = 560 \Omega$ $R_L = 150 \Omega$ 5 V_O - Output Voltage - V

Figure 27.


Figure 28.

Figure 29.





COMMON-MODE REJECTION RATIO vs FREQUENCY



INPUT CURRENT NOISE
vs
FREQUENCY




Figure 31.

Figure 32.







Figure 30.



POWER-SUPPLY REJECTION RATIO vs FREQUENCY



COMMON-MODE REJECTION RATIO (DC)







Figure 33.





THS3062 SUPPLY CURRENT vs POWER-SUPPLY VOLTAGE




Figure 37.

Figure 35.

SLEW RATE vs OUTPUT VOLTAGE


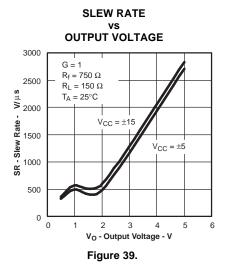


Figure 38.












Figure 40.

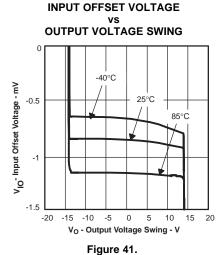







DIFFERENTIAL GAIN

DIFFERENTIAL GAIN
vs
NUMBER OF 150-Ω LOADS

Figure 42.







Figure 43.



0.08 G=2 $R_f=560~\Omega$ PAL Modulation O=0.04 O=0.04

DIFFERENTIAL PHASE

VS

NUMBER OF 150-Ω LOADS

Figure 46.

Figure 47.



APPLICATION INFORMATION

INTRODUCTION

The THS306x is a high-speed operational amplifier configured in a current-feedback architecture. The device is built using Texas Instruments' BiCOM-I 30-V. dielectrically process. а complementary bipolar process with NPN and PNP transistors possessing f_Ts of several GHz. This configuration implements exceptionally an high-performance amplifier that has a wide bandwidth, high slew rate, fast settling time, and low distortion.

MAXIMUM SLEW RATE FOR REPETITIVE SIGNALS

The THS3061 and THS3062 are recommended for high slew rate, pulsed applications where the internal nodes of the amplifier have time to stabilize between pulses. It is recommended to have at least a 20-ns delay between pulses.

The THS3061 and THS3062 are not recommended for applications with repetitive signals (sine, square, sawtooth, or other types) that exceed 900 V/µs. Using this device in these types of applications results in an excessive current draw from the power supply and possible device damage. For applications with a high slew rate and repetitive signals, the THS3091 and THS3095 (singles) or the THS3092 and THS3096 (duals) are recommended instead.

RECOMMENDED FEEDBACK AND GAIN RESISTOR VALUES

As with all current-feedback amplifiers, the bandwidth of the THS306x is an inversely proportional function of the value of the feedback resistor. The recommended resistors for optimum frequency response are shown in Table 1. These should be used as a starting point, and once optimum values are found, 1% tolerance resistors should be used to

maintain frequency response characteristics. For most applications, a feedback-resistor value of 750 Ω is recommended—a good compromise between bandwidth and phase margin that yields a very stable amplifier.

As shown in Table 1, to maintain the highest bandwidth with increasing gain, the feedback resistor is reduced. The advantage of dropping the feedback resistance (and the gain-resistor value) is that the noise of the system is also reduced compared to no reduction of these resistor values (see NOISE CALCULATIONS). Thus, keeping the bandwidth as high as possible maintains very good distortion performance of the amplifier by keeping the excess loop gain as high as possible.

Table 1. Recommended Resistor Values for Optimum Frequency Response

GAIN	R_F for $V_{CC} = \pm 15 \text{ V}$	R_F for $V_{CC} = \pm 5 V$
1	750 Ω	750 Ω
2, –1	560 Ω	560 Ω
5	357 Ω	383 Ω
10	200 Ω	200 Ω

Care must be taken to not set these values too low. The amplifier's output must drive the feedback resistance (and gain resistance), and this may place a burden on the amplifier. The end result is that distortion may actually increase due to the low-impedance load presented to the amplifier. The designer must carefully manage the amplifier bandwidth and the associated loading effects for optimum performance.

The THS3061/62 amplifiers exhibit very good distortion performance and bandwidth, and can use power supplies up to 15 V. The excellent current-drive capability of up to 145 mA into a 50- Ω load allows many versatile applications. One application is driving a twisted pair line (that is, a telephone line). Figure 48 shows a simple circuit for driving a twisted pair differentially.



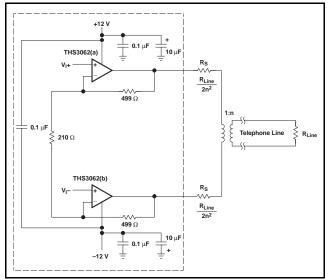


Figure 48. Simple Line Driver With THS3062

Figure 49. Noise Model

Due to the high supply voltages and the large current-drive capability, the power dissipation of the amplifier must be carefully considered. To have as much power dissipation as possible in a small package, the THS3062 is available only in a MSOP-8 PowerPAD package (DGN), and an even lower thermal-impedance SOIC-8 PowerPAD (DDA). The thermal impedance of a standard SOIC package is too large to allow useful applications with up to 30 V across the power-supply terminals with this dual amplifier. But the THS3061 (a single amplifier) can be used in the standard SOIC package. Again, the amplifier power dissipation must be carefully examined, or else the amplifiers could overheat, severely degrading performance. See the Power Dissipation and Thermal Considerations section for more information on thermal management.

NOISE CALCULATIONS

Noise can cause errors on very small signals. This is especially true for amplifying small signals coming over a transmission line or an antenna. The noise model for current-feedback amplifiers (CFB) is the same as for voltage feedback amplifiers (VFB). The only difference between the two is that CFB amplifiers generally specify different current-noise parameters for each input, while VFB amplifiers usually only specify one noise-current parameter. The noise model is shown in Figure 49. This model includes all of the noise sources as follows:

- en = Amplifier internal voltage noise (nV/ $\sqrt{\text{Hz}}$)
- IN+ = Noninverting current noise (pA/ $\sqrt{\text{Hz}}$)
- IN— = Inverting current noise (pA/√Hz)
- eRx = Thermal voltage noise associated with each resistor (eRx = 4 kTRx)

The total equivalent input noise density (eni) is calculated by using the following equation:

$$\begin{split} & \text{e}_{ni} = \sqrt{\left(\text{e}_{n}\right)^{2} + \left(\text{IN} + \times \text{R}_{S}\right)^{2} + \left(\text{IN} - \times \left(\text{R}_{f} \, \| \, \text{R}_{g}\right)\right)^{2} + 4 \, \text{kTR}_{S} + 4 \, \text{kT}\left(\text{R}_{f} \, \| \, \text{R}_{g}\right)} \\ & \text{where} \\ & \text{k} = \text{Boltzmann's constant} = 1.380658 \times 10^{-23} \\ & \text{T} = \text{Temperature in degrees Kelvin (273 + ^{\circ}\text{C})} \\ & \text{R}_{f} \, \| \, \text{R}_{g} = \text{Parallel resistance of R}_{f} \, \text{and R}_{g} \end{split}$$

To calculate the equivalent output noise of the amplifier, multiply the equivalent input noise density (e_{ni}) by the overall amplifier gain (A_{V}) .

$$e_{no} = e_{ni} A_V = e_{ni} \left(1 + \frac{R_f}{R_g} \right)$$
 (Noninverting Case)

As the previous equations show, to keep noise at a minimum, small value resistors should be used. As the closed-loop gain is increased (by reducing R_{F} and R_{G}), the input noise is reduced considerably because of the parallel resistance term. This leads to the general conclusion that the most dominant noise sources are the source resistor (R_{S}) and the internal amplifier noise voltage (e_{n}) . Because noise is summed in a root-mean-squares method, noise sources smaller than 25% of the largest noise source can be effectively ignored. This can greatly simplify the formula and make noise calculations much easier.

PCB LAYOUT TECHNIQUES FOR OPTIMAL PERFORMANCE

Achieving optimum performance with high-frequency devices in the THS306x family requires careful attention to board layout, parasitic effects, and external component types.

Recommendations to optimize performance include:



- Minimize parasitic capacitance to any ac ground for all signal I/O pins. Parasitic capacitance on the output and input pins can cause instability. To reduce unwanted capacitance, a window around the signal I/O pins should be opened in all of the ground and power planes around those pins. Ground and power planes should be unbroken elsewhere on the board.
- Minimize the distance (< 0.25") from the power supply pins to high frequency 0.1-µF decoupling capacitors. At the device pins, the ground and power plane layout should not be in close proximity to the signal I/O pins. Avoid narrow power and ground traces to minimize inductance between the pins and the decoupling capacitors. The power supply connections should always be decoupled with these capacitors. Larger (6.8 µF or more) tantalum decoupling capacitors, effective at lower frequencies, should also be used on the main supply pins. These may be placed somewhat farther from the device and may be shared among several devices in the same area of the printed circuit board (PCB). The primary goal is to minimize the impedance in the differential-current return paths. For driving differential loads with the THS3062, adding a capacitor between the power-supply improves 2nd-order harmonic-distortion performance. This also minimizes the current loop formed by the differential drive.
- Careful selection and placement of external components preserve the high frequency performance of the THS306x family. Resistors a very low reactance type. Surface-mount resistors work best and allow a tighter overall layout. Again, keep leads and PCB trace lengths as short as possible. Never use wirebound-type resistors in a high-frequency application. Since the output pin and inverting input pins are the most sensitive to parasitic capacitance, always position the feedback and series-output resistors, if any, as close as possible to the inverting-input pins and output pins. Other network components, such as input-termination resistors, should be placed close to the gain-setting resistors. Even with a low parasitic capacitance shunting the external resistors, excessively high resistor values can create significant time constants that can degrade performance. Good axial metal-film surface-mount resistors have approximately 0.2 pF in shunt with the resistor. For resistor values > 2.0 k Ω , this parasitic capacitance can add a pole and/or a zero that can affect circuit operation. Keep resistor values as low as possible, consistent with load-driving considerations.

- Connections to other wideband devices on the board may be made with short direct traces or through onboard transmission lines. For short connections, consider the trace and the input to the next device as a lumped capacitive load. Relatively wide traces (50 mils to 100 mils) should be used, preferably with ground and power planes opened up around them. Estimate the total capacitive load and determine if isolation resistors on the outputs are necessary. Low parasitic capacitive loads (< 4 pF) may not need an R_S the THS306x family is nominally compensated to operate with a 2-pF parasitic load. Higher parasitic capacitive loads without an R_S are allowed as the signal gain increases (increasing the unloaded phase margin). If a long trace is required, and the 6-dB signal loss intrinsic to a doubly-terminated transmission line is acceptable, implement a matched-impedance transmission line using microstrip or stripline techniques (consult an ECL design handbook for microstrip and stripline layout techniques).
 - A $50-\Omega$ environment is not necessary onboard, and in fact, a higher-impedance environment improves distortion as shown in the distortion-versus-load plots. With a characteristic board-trace impedance based on board material and trace dimensions, a matching series resistor is used in the trace from the output of the THS306x, as well as a terminating shunt resistor at the input of the destination device.
 - Remember also that the terminating impedance is the parallel combination of the shunt resistor and the input impedance of the destination device: this total effective impedance should be set to match the trace impedance. If the 6-dB attenuation of a doubly-terminated transmission line is unacceptable. а long trace can be series-terminated at the source end only. Treat the trace as a capacitive load in this case. This does not preserve signal integrity as well as a doubly-terminated line. If the input impedance of the destination device is low, there is some signal attenuation due to the voltage divider formed by the series output into the terminating impedance.
- Socketing a high speed part like the THS306x family is not recommended. The additional lead length and pin-to-pin capacitance introduced by the socket can create an extremely troublesome parasitic network that can make it almost impossible to achieve a smooth, stable frequency response. Best results are obtained by soldering the THS306x family parts directly onto the board.

PowerPAD DESIGN CONSIDERATIONS

The THS306x family is available in a thermally-enhanced PowerPAD family of packages. These packages are constructed using a downset



leadframe upon which the die is mounted [see Figure 50(a) and Figure 50(b)]. This arrangement results in the lead frame being exposed as a thermal pad on the underside of the package [see Figure 50(c)]. Because this thermal pad has direct thermal contact with the die, excellent thermal performance can be achieved by providing a good thermal path away from the thermal pad.

The PowerPAD package allows for both assembly and thermal management in one manufacturing operation. During the surface-mount solder operation (when the leads are being soldered), the thermal pad can also be soldered to a copper area underneath the package. Through the use of thermal paths within this copper area, heat can be conducted away from the package into either a ground plane or other heat dissipating device.

The PowerPAD package represents a breakthrough in combining the small area and ease of assembly of surface mount, compared with awkward mechanical methods of heatsinking.

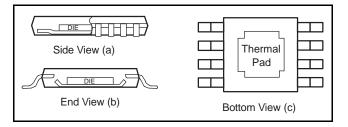


Figure 50. Views of Thermally Enhanced Package

Although there are many ways to properly heatsink the PowerPAD package, the following steps illustrate the recommended approach.

PowerPAD PCB LAYOUT CONSIDERATIONS

1. Prepare the PCB with a top-side etch pattern as shown in Figure 51. There should be etch for the leads as well as etch for the thermal pad.

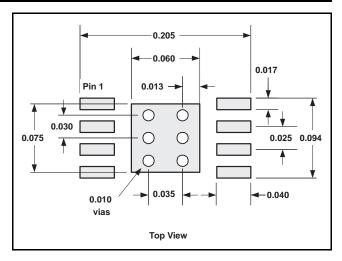


Figure 51. DGN PowerPAD PCB Etch and Via Pattern

- Place five holes in the area of the thermal pad.
 These holes should be 10 mils in diameter. Keep them small so that solder wicking through the holes is not a problem during reflow.
- 3. Additional vias may be placed anywhere along the thermal plane outside of the thermal pad area. This helps dissipate the heat generated by the THS306x-family IC. These additional vias may be larger than the 10-mil diameter vias directly under the thermal pad. They can be larger because they are not in the thermal pad area to be soldered, so wicking is not a problem.
- 4. Connect all holes to the internal ground plane.
- 5. When connecting these holes to the ground plane, **do not** use the typical web or spoke via connection methodology. Web connections have a high thermal resistance that is useful for slowing the heat transfer during soldering operations, making the soldering of vias that have plane connections easier. In this application, however, low thermal resistance is desired for the most efficient heat transfer. Therefore, the holes under the THS306x family PowerPAD package should make their connection to the internal ground plane with a complete connection around the entire circumference of the plated-through hole.
- 6. The top-side solder mask should leave the terminals of the package and the thermal pad area with its five holes exposed. The bottom-side solder mask should cover the five holes of the thermal pad area. This prevents solder from being pulled away from the thermal pad area during the reflow process.
- 7. Apply solder paste to the exposed thermal pad area and all IC terminals.
- 8. With these preparatory steps in place, the IC is simply placed in position and run through the



solder reflow operation as any standard surface-mount component. This results in a properly-installed device.

POWER DISSIPATION AND THERMAL CONSIDERATIONS

To maintain maximum output capability, the THS360x does not incorporate automatic thermal shutoff protection. The designer must ensure that the design does not violate the absolute maximum junction temperature of the device. Failure may result if the absolute maximum junction temperature of +150°C is exceeded. For best performance, design for a maximum junction temperature of +125°C. Between +125°C and +150°C, damage does not occur, but the performance of the amplifier begins to degrade.

The thermal characteristics of the device are dictated by the package and the PC board. Maximum power dissipation for a given package can be calculated using Equation 1.

$$P_{\text{Dmax}} = \frac{T_{\text{max}} - T_{\text{A}}}{\theta_{\text{JA}}}$$

where

 P_{Dmax} is the maximum power dissipation in the amplifier (W).

 \underline{T}_{max} is the absolute maximum junction temperature (°C).

T_A is the ambient temperature (°C).

 $\theta_{JA} = \theta_{JC} + \theta_{CA}$

 θ_{JC} is the thermal coefficient from the silicon junctions to the case (°C/W).

 θ_{CA} is the thermal coefficient from the case to ambient air (°C/W).

(1)

For systems where heat dissipation is more critical, the THS306x family of devices is offered in an 8-pin MSOP with PowerPAD, and the THS3062 is available in the SOIC-8 PowerPAD package offering even better thermal performance. The thermal coefficients for the PowerPAD packages are substantially improved over traditional SOICs. Maximum power dissipation levels are given in the graph for the available packages. Data for the PowerPAD packages assumes a board layout that follows the PowerPAD layout guidelines referenced above and detailed in the PowerPAD application note number SLMA002. The following graph also illustrates the effect of not soldering the PowerPAD to a PCB. The thermal impedance increases substantially, which can cause serious heat and performance issues. Always be sure to solder the PowerPAD to the PCB for optimum performance.

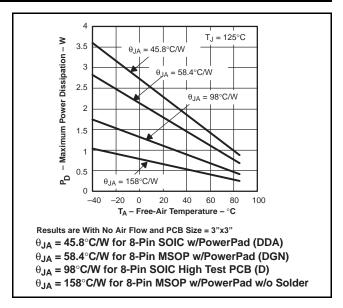


Figure 52. Maximum Power Dissipation vs Ambient Temperature

When determining whether or not the device satisfies the maximum power dissipation requirement, it is important not only to consider quiescent power dissipation, but also dynamic power dissipation. Often, this is difficult to quantify because the signal pattern is inconsistent, but an estimate of the RMS power dissipation can provide visibility into a possible problem.

DRIVING A CAPACITIVE LOAD

Driving capacitive loads with high-performance amplifiers is not a problem as long as certain precautions are taken. The first is to realize that the THS306x has been internally compensated to maximize its bandwidth and slew-rate performance. When the amplifier is compensated in this manner, capacitive loading directly on the output decreases the device's phase margin, leading to high-frequency ringing or oscillations. Therefore, for capacitive loads of greater than 10 pF, it is recommended that a resistor be placed in series with the output of the amplifier as shown in Figure 53. A minimum value of 10 Ω works well for most applications. For example, transmission 75-Ω systems. settina series-resistor value to 75 Ω both isolates any capacitive loading and provides the proper line impedance matching at the source end.

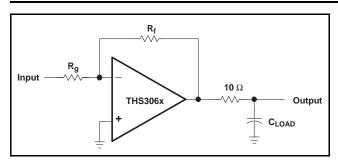


Figure 53. Driving a Capacitive Load

General Configurations

A common error for the first-time CFB-amplifier user is creating a unity gain buffer amplifier by shorting the output directly to the inverting input. In this configuration, a CFB amplifier oscillates, and is *not* recommended. The THS306x, like all CFB amplifiers, *must* have a feedback resistor for stable operation. Additionally, placing capacitors directly from the output to the inverting input is not recommended, because at high frequencies, a capacitor has a very low impedance. This results in an unstable amplifier

and should not be considered when using a current-feedback amplifier. Because of this, integrators and simple low-pass filters, which are easily implemented on a VFB amplifier, must be designed slightly differently. If filtering is required, simply place an RC-filter at the noninverting terminal of the operational-amplifier (see Figure 54).

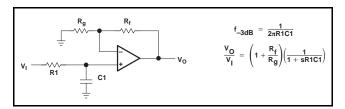


Figure 54. Single-Pole Low-Pass Filter



If a multiple-pole filter is required, a Sallen-Key filter can work very well with CFB amplifiers. This is because the filtering elements are not in the negative feedback loop and stability is not compromised. Because of their high slew rates and high bandwidths, CFB amplifiers can pass very accurate signals and help minimize distortion. An example is shown in Figure 55.

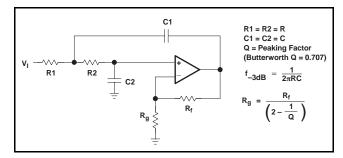


Figure 55. 2-Pole Low-Pass Sallen-Key Filter

There are two simple ways to create an integrator with a CFB amplifier. The first, shown in Figure 56, adds a resistor in series with the capacitor. This is acceptable, because at high frequencies, the resistor is dominant and the feedback impedance never drops below the resistor value. The second, shown in Figure 57, uses positive feedback to create the integration. Caution is advised because oscillations can occur due to the positive feedback.

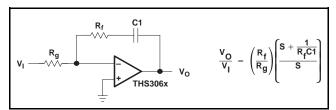


Figure 56. Inverting CFB Integrator

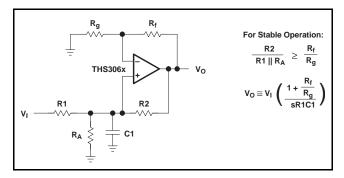


Figure 57. Noninverting CFB Integrator

The THS306x may also be employed as a very good video-distribution amplifier. One characteristic of distribution amplifiers is the fact that the differential phase (dP) and the differential gain (dG) are compromised as the number of lines increases and the closed-loop gain increases. Be sure to use termination resistors throughout the distribution system to minimize reflections and capacitive loading.

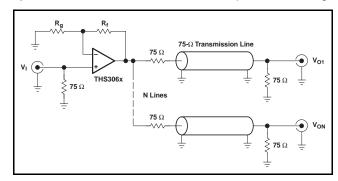


Figure 58. Video Distribution Amplifier Application



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

CI	changes from Revision A (October, 2002) to Revision B			
•	Updated document format to current standards	1		
•	Deleted lead temperature specification from Absolute Maximum Ratings table	2		
•	Added Maximum Slew Rate for Repetitive Signals section	13		

www.ti.com 11-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
THS3061D	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3061
THS3061D.A	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3061
THS3061DGN	Obsolete	Production	HVSSOP (DGN) 8	-	=	Call TI	Call TI	-40 to 85	BIB
THS3061DGNR	Obsolete	Production	HVSSOP (DGN) 8	-	=	Call TI	Call TI	-40 to 85	BIB
THS3061DGNRG4	Active	Production	HVSSOP (DGN) 8	2500 LARGE T&R	-	Call TI	Call TI	-40 to 85	
THS3061DR	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3061
THS3061DR.A	Active	Production	SOIC (D) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3061
THS3062D	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3062
THS3062D.A	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	3062
THS3062DDA	Active	Production	SO PowerPAD (DDA) 8	75 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	3062
THS3062DDA.A	Active	Production	SO PowerPAD (DDA) 8	75 TUBE	Yes	SN	Level-1-260C-UNLIM	-40 to 85	3062
THS3062DDAG3	Active	Production	SO PowerPAD (DDA) 8	75 TUBE	-	Call TI	Call TI	-40 to 85	
THS3062DGN	Active	Production	HVSSOP (DGN) 8	80 TUBE	Yes	NIPDAU NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	BIC
THS3062DGN.A	Active	Production	HVSSOP (DGN) 8	80 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BIC

⁽¹⁾ Status: For more details on status, see our product life cycle.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.



PACKAGE OPTION ADDENDUM

www.ti.com 11-Nov-2025

(6) Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 23-May-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS3061DR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

www.ti.com 23-May-2025



*All dimensions are nominal

Device Package Typ		Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
THS3061DR	SOIC	D	8	2500	350.0	350.0	43.0	

PACKAGE MATERIALS INFORMATION

www.ti.com 23-May-2025

TUBE



*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
THS3061D	D	SOIC	8	75	505.46	6.76	3810	4
THS3061D.A	D	SOIC	8	75	505.46	6.76	3810	4
THS3062D	D	SOIC	8	75	505.46	6.76	3810	4
THS3062D.A	D	SOIC	8	75	505.46	6.76	3810	4
THS3062DDA	DDA	HSOIC	8	75	505.46	6.76	3810	4
THS3062DDA.A	DDA	HSOIC	8	75	505.46	6.76	3810	4
THS3062DGN	DGN	HVSSOP	8	80	330	6.55	500	2.88
THS3062DGN.A	DGN	HVSSOP	8	80	330	6.55	500	2.88

3 x 3, 0.65 mm pitch

SMALL OUTLINE PACKAGE

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



INSTRUMENTS www.ti.com

$\textbf{PowerPAD}^{^{\text{\tiny{TM}}}}\,\textbf{VSSOP - 1.1 mm max height}$

SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 11. Board assembly site may have different recommendations for stencil design.



PowerPAD[™] HVSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE



NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

 2. This drawing is subject to change without notice.

 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 11. Board assembly site may have different recommendations for stencil design.






Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4202561/G





PLASTIC SMALL OUTLINE

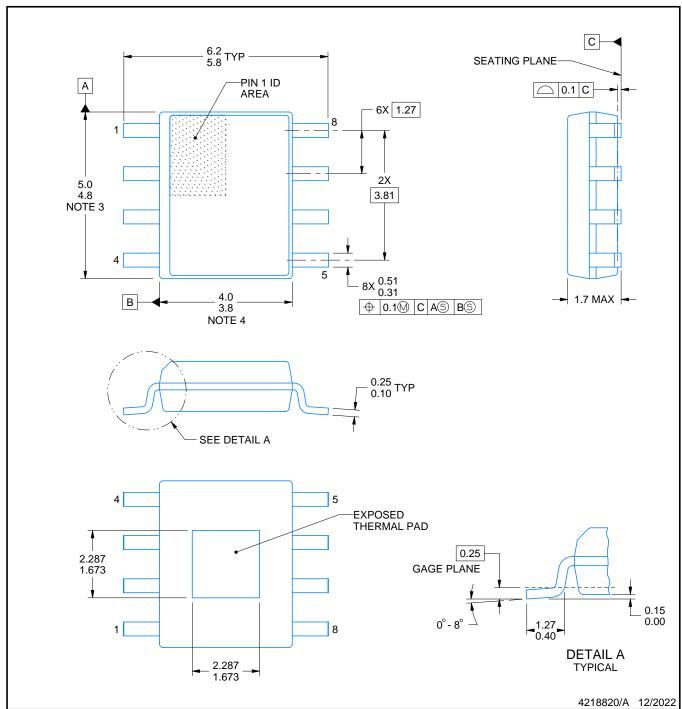


PowerPAD is a trademark of Texas Instruments.

NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MS-012, variation BA.



PLASTIC SMALL OUTLINE

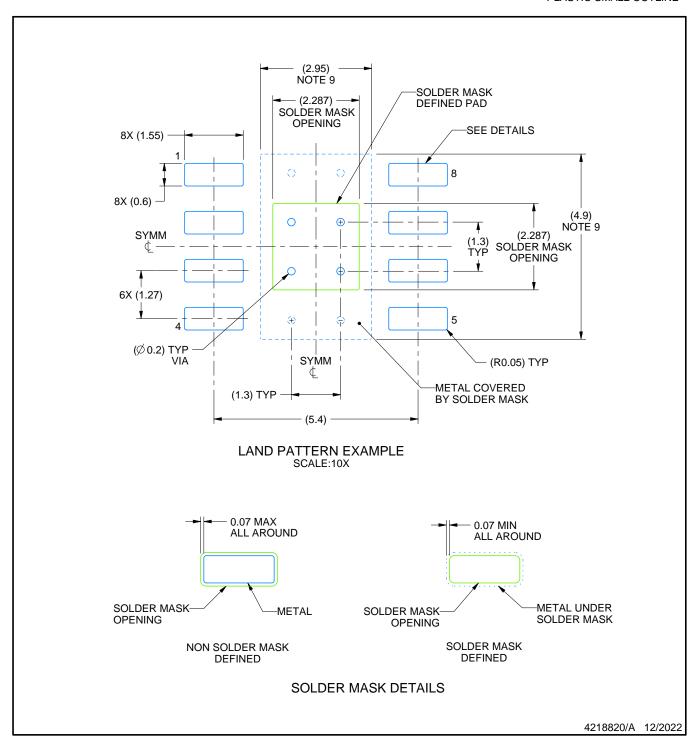


NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- Solder mask tolerances between and around signal pads can vary based on board fabrication site.
 This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004).
- 9. Size of metal pad may vary due to creepage requirement.



PLASTIC SMALL OUTLINE

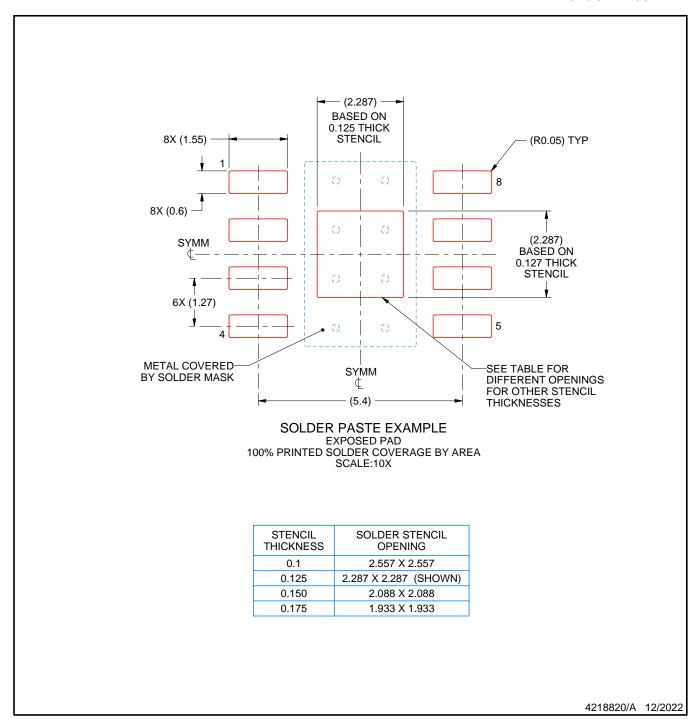

NOTES: (continued)

- 10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 11. Board assembly site may have different recommendations for stencil design.





SMALL OUTLINE INTEGRATED CIRCUIT



NOTES:

- 1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
- 4. This dimension does not include interlead flash.
- 5. Reference JEDEC registration MS-012, variation AA.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025