

ESD341 1 チャネル $\pm 30\text{kV}$ ESD 保護ダイオード、0201 パッケージ

1 特長

- IEC 61000-4-2 レベル 4 ESD 保護
 - 30kV 接触放電
 - 30kV エアギャップ放電
- IEC 61000-4-5 サージ保護
 - 5.4A (8/20 μs)
- IO 容量:
 - 0.66pF (標準値)
- DC ブレークダウン電圧: $\pm 6.2\text{V}$ (標準値)
- 超低リーク電流: 100nA (最大値)
- 低い ESD クランプ電圧: 10.2V (16A TLP の場合)
- 低挿入損失: 5GHz (-3dB 帯域幅, DPL)
- 最大 3.4Gbps の高速インターフェイスをサポート
- 産業用温度範囲: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 省スペースの業界標準 0201 フットプリント (0.6mm $\times$ 0.3mm $\times$ 0.3mm)

2 アプリケーション

- 最終製品:
 - ウェアラブル
 - スマート・スピーカ
 - ポータブル・エレクトロニクス
 - 小型家電
 - ラップトップおよびデスクトップ PC
 - テレビ、モニタ
 - ヘッド・ユニット
 - 後部座席用エンターテインメント
 - ドッキング・ステーション
- インターフェイス:
 - USB 2.0
 - USB 3.0
 - HDMI 1.4 および 2.0
 - LVDS
 - DisplayPort
 - SIM カード

3 概要

ESD341 は、HDMI 1.4 回路保護用の双方向 TVS ESD 保護ダイオードです。ESD341 は、IEC 61000-4-2 国際規格で規定されている最大レベル (レベル 4) の ESD 耐性を備えています。

このデバイスの IO 容量は 0.66pF (標準値) で、最高 3.4Gbps の高速インターフェイス保護を実現し、HDMI 1.4b などのプロトコルをサポートしています。低い動的抵抗および低いクランピング電圧により、過渡現象に対してシステム・レベルの保護を確保します。


30kV の ESD 定格と 5.4A のサージ耐性を備えており、小型パッケージで堅牢な過渡保護を提供し、ポータブル電子機器やウェアラブルなどスペースに制約のあるアプリケーションで 3.6V の電源レールを保護します。

ESD341 は、業界標準の 0201 (DPL) パッケージで供給されます。

製品情報 (1)

部品番号	パッケージ	本体サイズ (公称)
ESD341	X2SON (2)	0.60mm $\times$ 0.30mm

- (1) 利用可能なパッケージについては、このデータシートの末尾にある注文情報を参照してください。

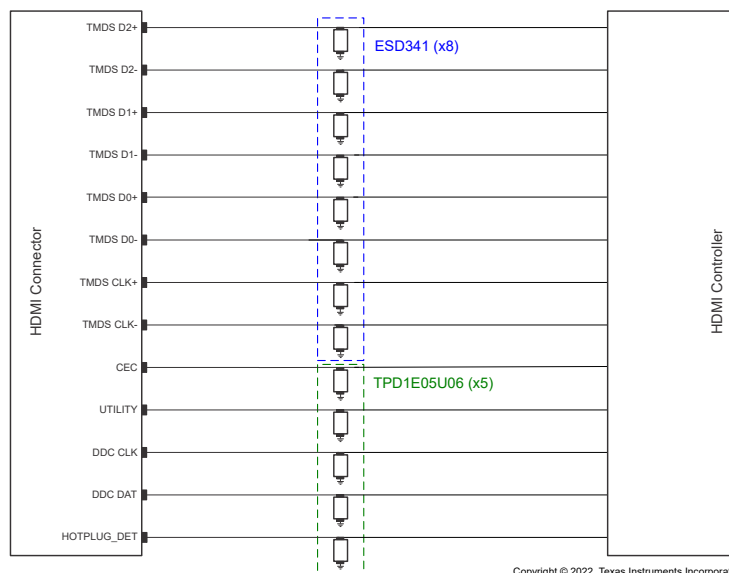

Copyright © 2022, Texas Instruments Incorporated

代表的なアプリケーション



Table of Contents

1 特長	1	8 Application and Implementation	9
2 アプリケーション	1	8.1 Application Information.....	9
3 概要	1	8.2 Typical Application.....	9
4 Revision History	2	9 Power Supply Recommendations	11
5 Pin Configuration and Functions	3	10 Layout	11
6 Specifications	4	10.1 Layout Guidelines.....	11
Absolute Maximum Ratings.....	4	10.2 Layout Example.....	11
6.1 ESD Ratings—JEDEC Specification.....	4	11 Device and Documentation Support	12
6.2 ESD Ratings—IEC Specification.....	4	11.1 Documentation Support.....	12
Recommended Operating Conditions.....	4	11.2 Receiving Notification of Documentation Updates..	12
6.3 Thermal Information.....	4	11.3 サポート・リソース.....	12
6.4 Electrical Characteristics.....	5	11.4 Trademarks.....	12
6.5 Typical Characteristics.....	6	11.5 Electrostatic Discharge Caution.....	12
7 Detailed Description	8	11.6 Glossary.....	12
7.1 Overview.....	8	12 Mechanical, Packaging, and Orderable	
7.2 Functional Block Diagram.....	8	Information	12
7.3 Feature Description.....	8	12.1 Tape and Reel Information.....	14
7.4 Device Functional Modes.....	8		

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision * (April 2022) to Revision A (July 2022)	Page
• データシートのステータスを「事前情報」から「量産データ」に変更	1

5 Pin Configuration and Functions




图 5-1. DPL Package, 2-Pin X2SON (Top View)

表 5-1. Pin Functions

PIN		TYPE ⁽¹⁾	DESCRIPTION
NO.	NAME		
1	IO	I/O	ESD Protected Channel. If used as ESD IO, connect pin 2 to ground
2	IO	I/O	ESD Protected Channel. If used as ESD IO, connect pin 1 to ground

(1) I = input, O = output

6 Specifications

Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

		MIN	MAX	UNIT
Peak Pulse ^{(2) (3)}	IEC 61000-4-5 power ($t_p - 8/20 \mu s$)		54	W
	IEC 61000-4-5 Current ($t_p - 8/20 \mu s$)		5.4	A
T_A	Ambient Operating Temperature	-40	125	°C
T_J	Junction Temperature	-40	125	°C
T_{stg}	Storage Temperature	-65	155	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute maximum ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If briefly operating outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not sustain damage, but it may not be fully functional. Operating the device in this manner may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) Voltages are with respect to GND unless otherwise noted.
- (3) Measured at 25°C

6.1 ESD Ratings—JEDEC Specification

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001	±2500	V
		Charged device model (CDM), per JEDEC specification JS-002	±1000	V

6.2 ESD Ratings—IEC Specification

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	IEC 61000-4-2 contact discharge	±30000	V
		IEC 61000-4-2 air-gap discharge	±30000	

Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_{IO}	Input pin voltage	Pin 1 to 2 or Pin 2 to 1	-3.6		3.6	V
T_A	Operating free-air temperature		-40		125	°C

6.3 Thermal Information

THERMAL METRIC ⁽¹⁾		ESD341	UNIT
		DPL (X2SON)	
		2 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	356.8	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	208.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	136.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	3.0	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	135.7	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	NA	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.4 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
V _{RWM}	Reverse stand-off voltage	Pin 1 to Pin 2 or Pin 2 to Pin 1	-3.6		3.6	V
V _{BRF}	Break-down voltage	I _{IO} = 1 mA, Pin 1 to Pin 2	5	6.2	7.2	V
V _{BRR}	Break-down voltage	I _{IO} = -1 mA, Pin 2 to Pin 1	-7.2	-6.2	-5	V
V _{HOLD}	Holding voltage ⁽²⁾	TLP, Pin 1 to Pin 2 or Pin 2 to Pin 1		6.2		V
V _{Clamp_TLP}	Clamp voltage with TLP ⁽²⁾	I _{PP} = 1 A, TLP, Pin 1 to Pin 2		6.3		V
		I _{PP} = 5 A, TLP, Pin 1 to Pin 2		7.4		
		I _{PP} = 16 A, TLP, Pin 1 to Pin 2		10.2		
		I _{PP} = 1 A, TLP, Pin 2 to Pin 1		6.3		
		I _{PP} = 5 A, TLP, Pin 2 to Pin 1		7.4		
		I _{PP} = 16 A, TLP, Pin 2 to Pin 1		10.2		
V _{Clamp_Surge}	Clamp voltage with surge strike ⁽⁴⁾	I _{PP} = 5.4 A, t _p = 8/20 μs, Pin 1 to Pin 2 or Pin 2 to Pin 1		8.8		V
I _{LEAK}	Leakage current	V _{IO} = 3.6 V, Pin 1 to Pin 2 or Pin 2 to Pin 1		5	100	nA
R _{DYN}	Dynamic resistance ⁽³⁾	Pin 1 to Pin 2		0.25		Ω
		Pin 2 to Pin 1				
C _L	Line capacitance	V _{IO} = 0 V; f = 1 MHz, Pin 1 to Pin 2, T _A = 25°C		0.66		pF


(1) Typical parameters are measured at 25°C

(2) Transition line pulse with 100 ns width and 10 ns rise and fall time

(3) Extraction of R_{DYN} using least squares fit of TLP characteristics between I = 10 A and I = 20 A


(4) Nonrepetitive current pulse 8 to 20 μs exponentially decaying waveform according to IEC 61000-4-5

6.5 Typical Characteristics

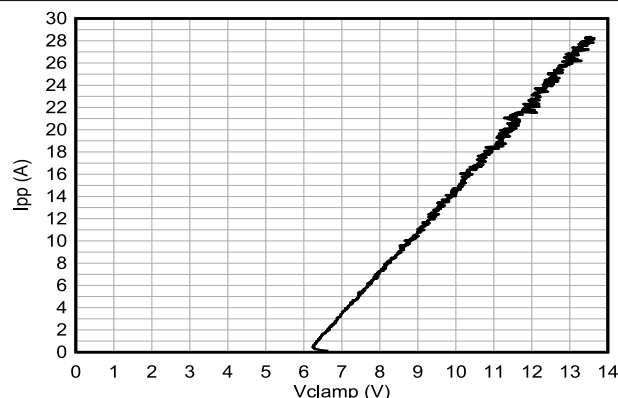

$t_p = 100$ ns, Transmission Line Pulse (TLP)

图 6-1. Positive TLP Curve

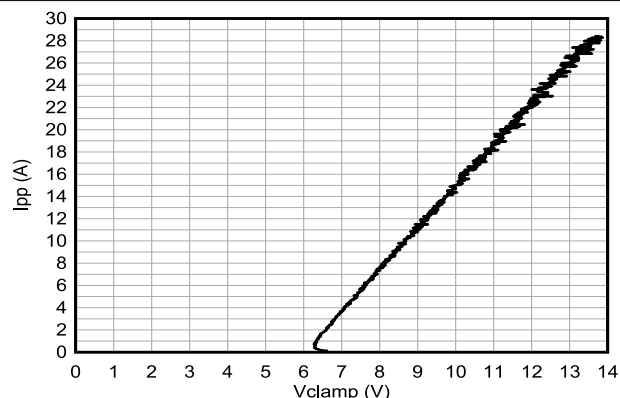

$t_p = 100$ ns, Transmission Line Pulse (TLP)

图 6-2. Negative TLP Curve

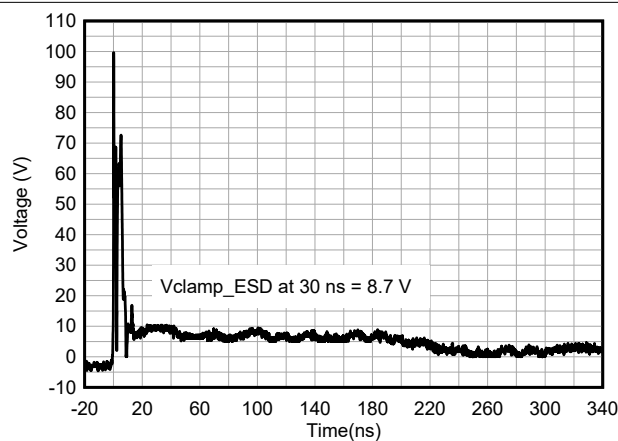


图 6-3. +8-kV Clamped IEC Waveform

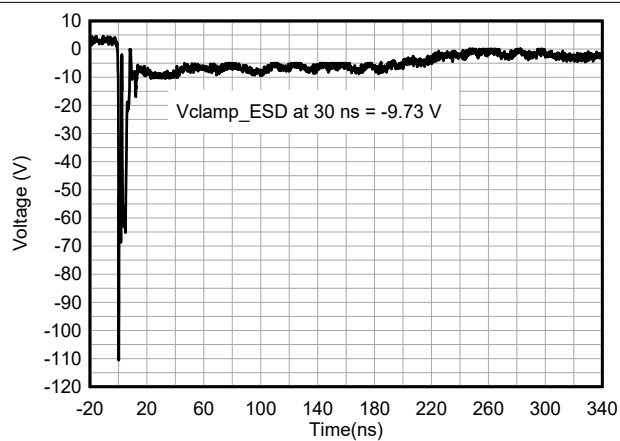


图 6-4. -8-kV Clamped IEC Waveform

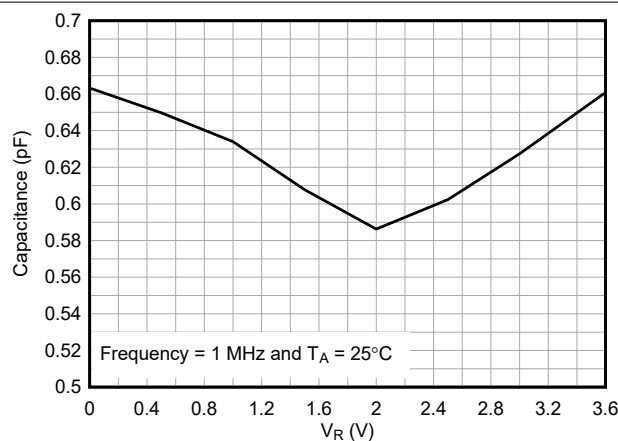


图 6-5. Bias Voltage vs. Capacitance

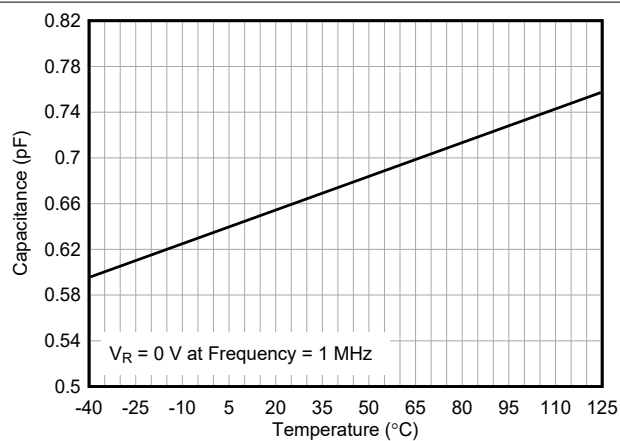


图 6-6. Temperature vs. Capacitance

6.5 Typical Characteristics (continued)

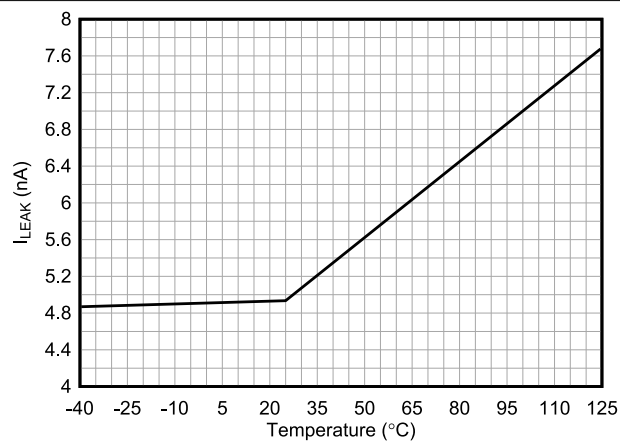


Figure 6-7. Temperature vs. Leakage Current

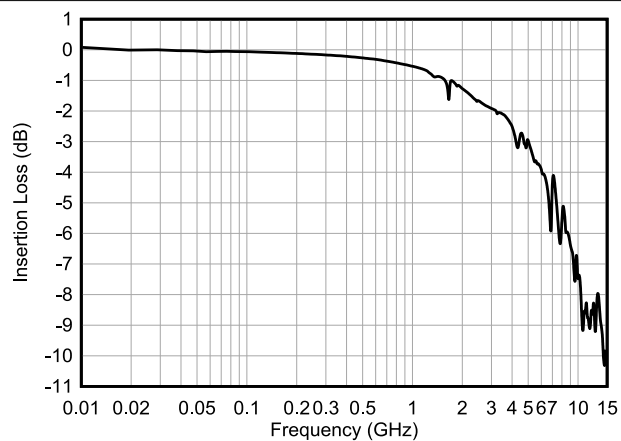



Figure 6-8. Insertion Loss

7 Detailed Description

7.1 Overview

The ESD341 device is a bidirectional ESD Protection Diode with ultra-low capacitance. This device can dissipate ESD strikes above the maximum level specified by the IEC 61000-4-2 International Standard. The ultra-low capacitance allows this device to protect high-speed signal pins including HDMI 1.4b.

7.2 Functional Block Diagram



Copyright © 2016, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 IEC 61000-4-2 ESD Protection

The I/O pins can withstand ESD events up to ± 30 kV contact and ± 30 kV air gap. An ESD-surge clamp diverts the current to ground.

7.3.2 IEC 61000-4-5 Surge Protection

The I/O pins can withstand surge events up to 5.4 A and 54 W (8/20 μ s waveform). An ESD-surge clamp diverts this current to ground.

7.3.3 IO Capacitance

The capacitance between each I/O pin to ground is 0.66 pF (typical). This device supports data rates up to 3.4 Gbps.

7.3.4 DC Breakdown Voltage

The DC breakdown voltage of each I/O pin is ± 6.2 V (typical). This DC breakdown voltage ensures that sensitive equipment is protected from surges above the reverse standoff voltage of ± 3.6 V.

7.3.5 Ultra Low Leakage Current

The I/O pins feature an ultra-low leakage current of 100 nA (maximum) with a bias of ± 3.6 V.

7.3.6 Low ESD Clamping Voltage

The I/O pins feature an ESD clamp that is capable of clamping the voltage to 7.4 V ($I_{PP} = 5$ A, TLP).

7.3.7 Supports High Speed Interfaces

This device is capable of supporting high speed interfaces up to 3.4 Gbps, because of the extremely low IO capacitance.

7.3.8 Industrial Temperature Range

This device features an industrial operating range of -40°C to $+125^{\circ}\text{C}$.

7.4 Device Functional Modes

The ESD341 device is a passive integrated circuit that triggers when voltages are above V_{BRF} or below V_{BRR} . During ESD events, voltages as high as ± 30 kV (air or contact) can be directed to ground through the internal diode network. When the voltages on the protected line fall below the V_{HOLD} of ESD341 (usually within 10s of nano-seconds) the device reverts to passive.

8 Application and Implementation


注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

8.1 Application Information

The ESD341 is a diode type TVS which provides a path to ground for dissipating ESD events on high-speed signal lines between a human interface connector and a system. As the current from ESD passes through the TVS, only a small voltage drop is present across the diode. This is the voltage presented to the protected IC. The low R_{DYN} of the triggered TVS holds this voltage (V_{CLAMP}) to a safe level for the protected IC.

8.2 Typical Application

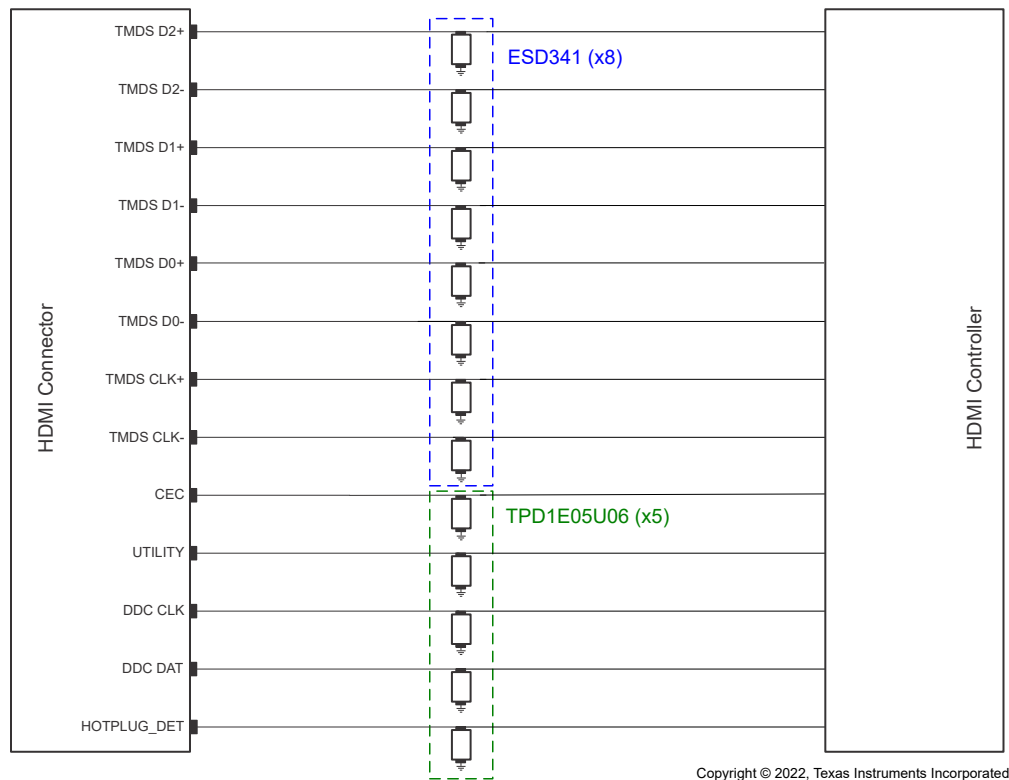

8-1. HDMI 1.4 Application

8.2.1 Design Requirements

For this design example, 8 ESD341 devices and 5 TPD1E05U06 devices are being used in an HDMI 1.4 application, which provides a complete port protection scheme.

表 8-1 lists the parameters for the HDMI 1.4 application.

表 8-1. Design Parameters

DESIGN PARAMETER	VALUE
TMDS signal range on pins	0 V to 3.6 V
Other signal range on pins	0 V to 5 V
Operating frequency	1.7 GHz

8.2.2 Detailed Design Procedure

8.2.2.1 Signal Range

The ESD341 supports signal ranges between -3.6 V and 3.6 V, which supports the TMDS signals. The TPD1E05U06 supports signal ranges between 0 V and 5.5 V, which supports the other signals (CEC, UTILITY, DDC CLK, DDC DAT, and HOTPLUG_DET) in the HDMI 1.4 application.

8.2.2.2 Operating Frequency

The ESD341 has a 0.66 pF (typical) capacitance, which supports the 3.4 Gbps data rate needed for the HDMI 1.4 application.

8.2.3 Application Curves

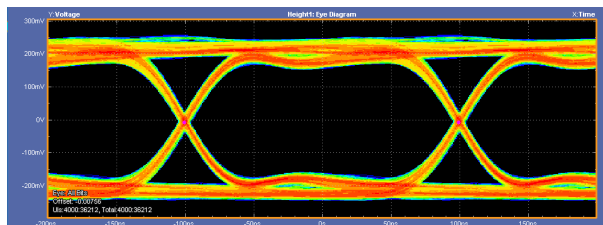


图 8-2. Data Rate > 3.4 Gbps Eye Diagram (Bare Board)

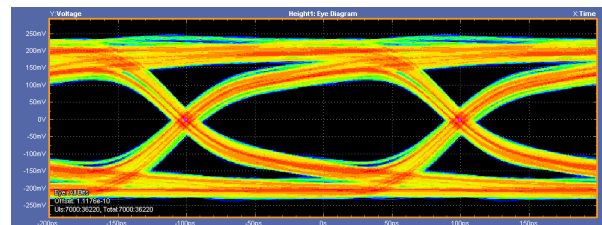


图 8-3. Data Rate > 3.4 Gbps Eye Diagram (with ESD341)

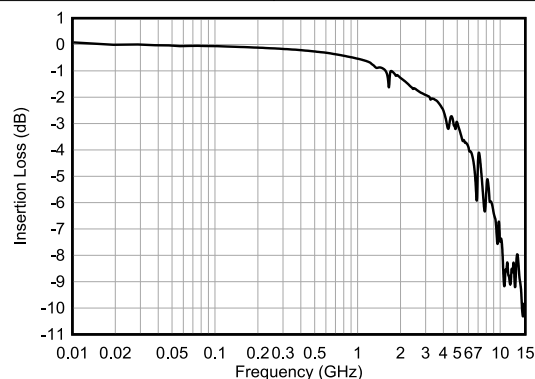


图 8-4. Insertion Loss

9 Power Supply Recommendations


This is a passive TVS diode-based ESD protection device, therefore there is no need to power it. Take care that the maximum voltage specifications for each pin are not violated.

10 Layout

10.1 Layout Guidelines

- The optimum placement of the ESD protection device is as close to the connector as possible
 - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures
 - The PCB designer must minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector
- Route the protected traces as straight as possible
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible
 - Electric fields tend to build up on corners, increasing EMI coupling
- If pin 1 or pin 2 is connected to ground, use a thick and short trace for this return path

10.2 Layout Example

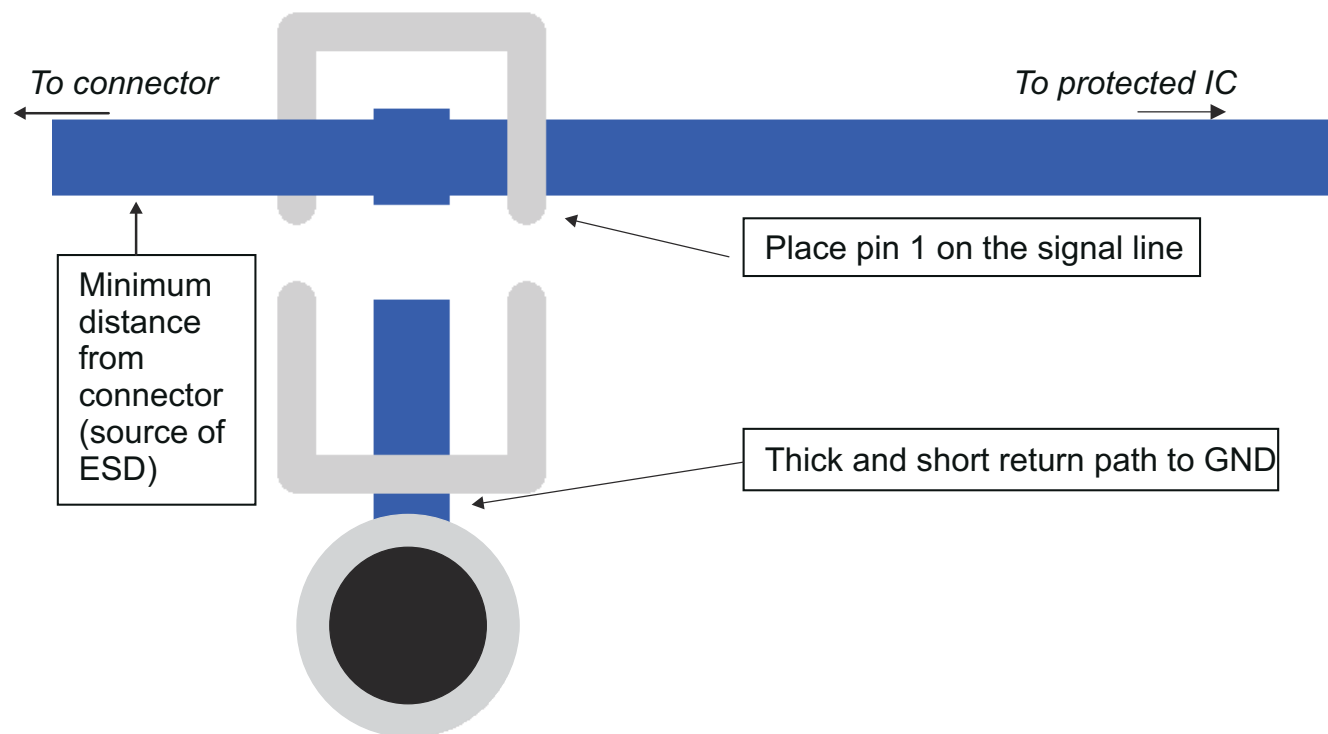

✎ 10-1. Layout Recommendation

11 Device and Documentation Support

11.1 Documentation Support

11.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [ESD Layout Guide application reports](#)
- Texas Instruments, [Generic ESD Evaluation Module user's guide](#)
- Texas Instruments, [Picking ESD Diodes for Ultra High-Speed Data Lines application reports](#)
- Texas Instruments, [Reading and Understanding an ESD Protection data sheet](#)

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 サポート・リソース

TI E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

11.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

11.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.


12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

MECHANICAL DATA



DPL (R-PX2SON-N2)

PLASTIC SMALL OUTLINE NO-LEAD

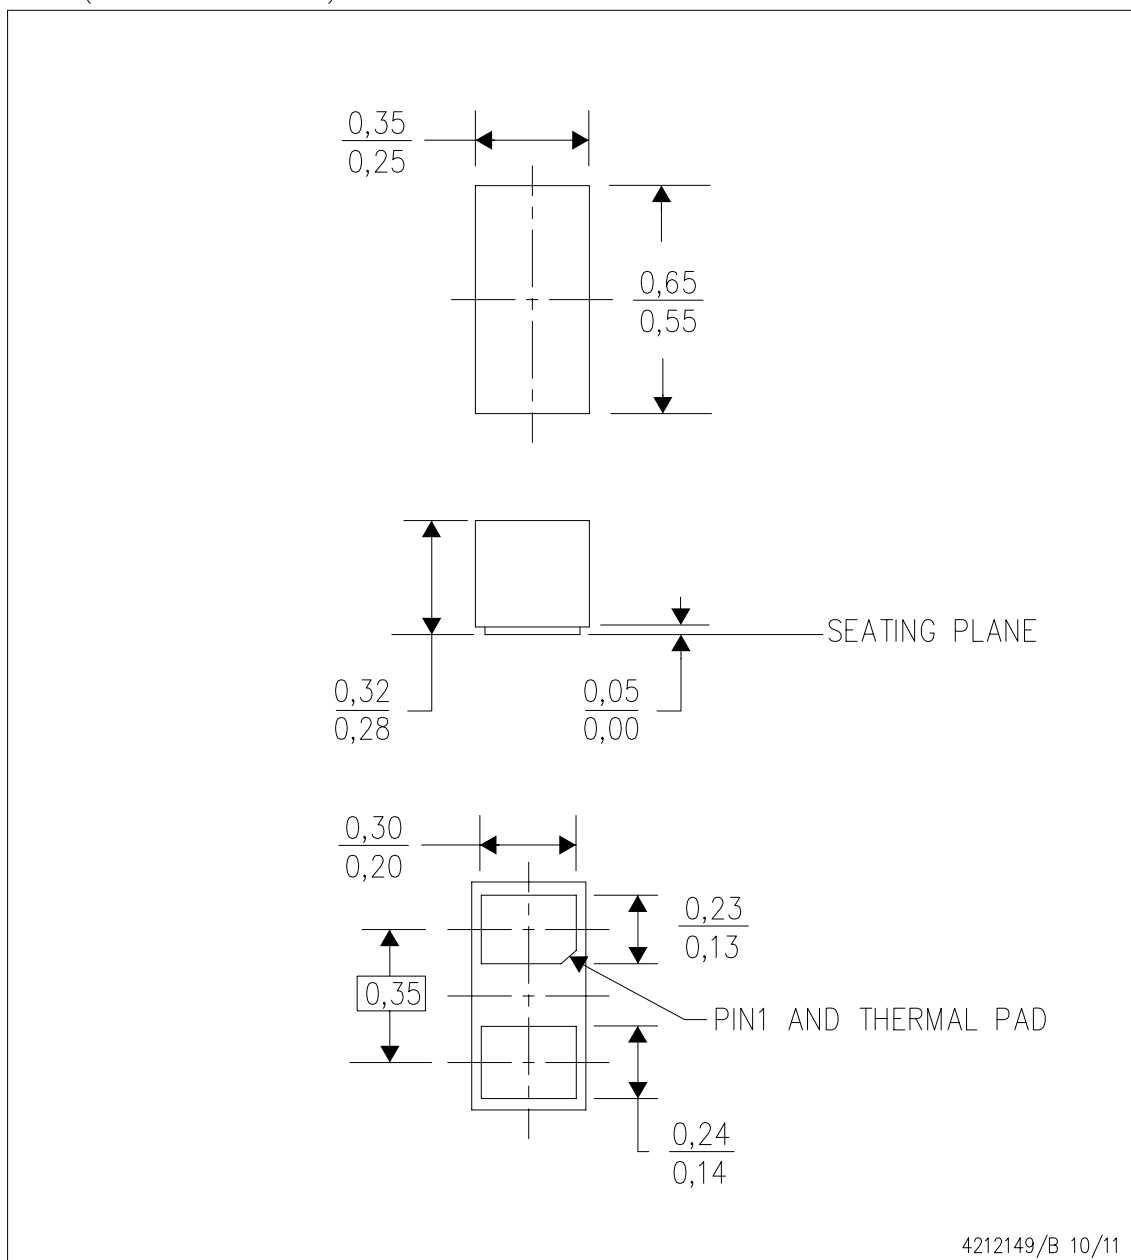


- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. Small Outline No-Lead (SON) package configuration.
 - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.

12.1 Tape and Reel Information

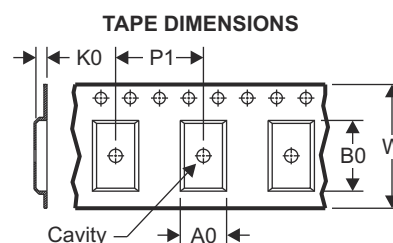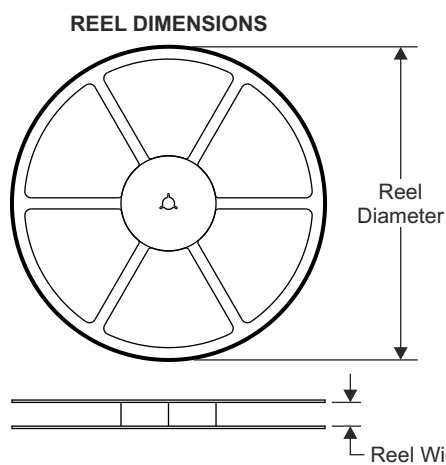


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

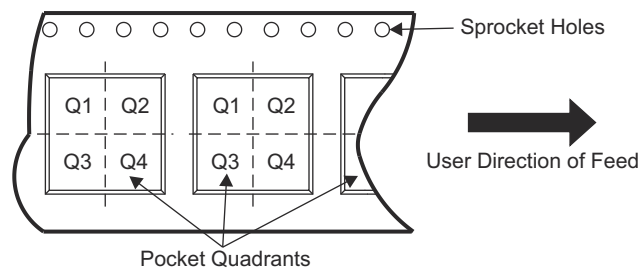

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ESD341DPLR	X2SON	DPL	2	15000	178	8.4	0.36	0.66	0.33	0.2	8	Q1

TAPE AND REEL BOX DIMENSIONS

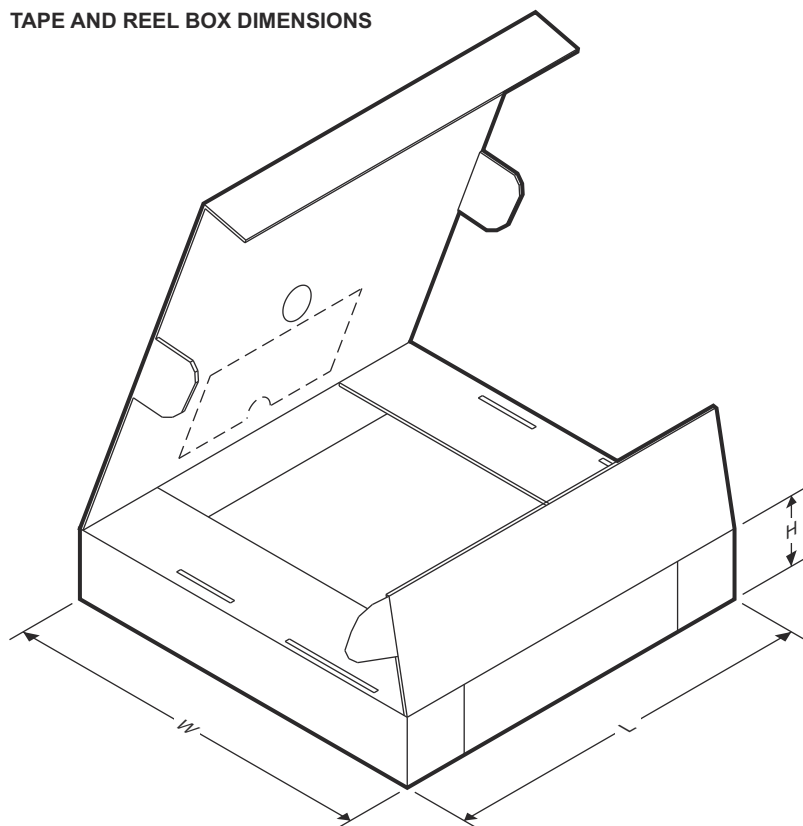

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ESD341DPLR	X2SON	DPL	2	15000	205	200	33

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
ESD341DPLR	Active	Production	X2SON (DPL) 2	15000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3
ESD341DPLR.B	Active	Production	X2SON (DPL) 2	15000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	3

- ⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).
- ⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- ⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- ⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- ⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- ⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月