









TMUX6208, TMUX6209

SCDS419E - NOVEMBER 2020 - REVISED JULY 2024

# TMUX620x 36 V, Low-Ron, 8:1 1-Channel and 4:1, 2-Channel Precision Multiplexers with 1.8 V Logic

#### 1 Features

Single supply range: 4.5 V to 36 V Dual supply range: ±4.5 V to ±18 V

Low on-resistance: 4 Ω Low charge injection: 3 pC

High current support: 400 mA (maximum) (WQFN)

High current support: 300 mA (maximum) (TSSOP)

-40°C to +125°C operating temperature

1.8 V logic compatible inputs

Integrated pull-down resistor on logic pins

Fail-safe logic

Rail-to-rail operation

Bidirectional signal path

Break-before-make switching

## 2 Applications

- Factory automation and control
- Programmable logic controllers (PLC)
- Analog input modules
- Semiconductor test equipment
- Battery test equipment
- Ultrasound scanners
- Patient monitoring and diagnostics
- Optical networking
- Optical test equipment
- Wired networking
- Data acquisition systems (DAQ)

### 3 Description

The TMUX6208 is a precision 8:1, single channel multiplexer while the TMUX6209 is a 4:1, 2 channel multiplexer featuring low on resistance and charge injection. The devices work with a single supply (4.5V to 36V), dual supply (±4.5V to ±18V), or asymmetric supply (such as VDD = 12V, VSS = -5V). The TMUX620x supports bidirectional analog and digital signals on the source (Sx) and drain (D) pins ranging from  $V_{SS}$  to  $V_{DD}$ .


All logic control inputs support logic high levels from 1.8 V to V<sub>DD</sub>, ensuring both TTL and CMOS logic compatibility when operating in the valid supply voltage range. Fail-Safe Logic circuitry allows voltages on the control pins to be applied before the supply pin, protecting the device from potential damage.

The TMUX620x are part of the precision switches and multiplexers family of devices. These devices have very low on and off leakage currents and low charge injection, allowing them to be used in high precision measurement applications.

Table 3-1. Device Information

PART NUMBER	CONFIGURATION	PACKAGE (1)
TMUX6208	1 Channel 8:1 Multiplexer	TSSOP (16) (PW) WQFN (16) (RUM)
TMUX6209	2 Channel 4:1 Multiplexer	

(1) For all available packages, see the package option addendum at the end of the data sheet.



TMUX6208 and TMUX6209 Block Diagram



# **Table of Contents**


1 Features1	7.8 Propagation Delay23
2 Applications 1	7.9 Charge Injection24
3 Description1	7.10 Off Isolation24
4 Device Comparison Table3	7.11 Crosstalk
5 Pin Configuration and Functions3	7.12 Bandwidth
6 Specifications5	7.13 THD + Noise27
6.1 Absolute Maximum Ratings5	7.14 Power Supply Rejection Ratio (PSRR)27
6.2 ESD Ratings5	8 Detailed Description28
6.3 Thermal Information6	8.1 Overview
6.4 Recommended Operating Conditions6	8.2 Functional Block Diagram28
6.5 Source or Drain Continuous Current6	8.3 Feature Description28
6.6 ±15 V Dual Supply: Electrical Characteristics7	8.4 Device Functional Modes30
6.7 ±15 V Dual Supply: Switching Characteristics8	8.5 Truth Tables30
6.8 36 V Single Supply: Electrical Characteristics9	9 Application and Implementation31
6.9 36 V Single Supply: Switching Characteristics 10	9.1 Application Information31
6.10 12 V Single Supply: Electrical Characteristics 11	9.2 Typical Application31
6.11 12 V Single Supply: Switching Characteristics12	9.3 Power Supply Recommendations33
6.12 ±5 V Dual Supply: Electrical Characteristics13	9.4 Layout33
6.13 ±5 V Dual Supply: Switching Characteristics 14	10 Device and Documentation Support36
6.14 Typical Characteristics15	10.1 Documentation Support36
7 Parameter Measurement Information20	10.2 Receiving Notification of Documentation Updates36
7.1 On-Resistance20	10.3 Support Resources36
7.2 Off-Leakage Current20	10.4 Trademarks36
7.3 On-Leakage Current21	10.5 Electrostatic Discharge Caution36
7.4 Transition Time21	10.6 Glossary36
7.5 t <sub>ON(EN)</sub> and t <sub>OFF(EN)</sub> 22	11 Revision History36
7.6 Break-Before-Make22	12 Mechanical, Packaging, and Orderable
7.7 t <sub>ON (VDD)</sub> Time23	Information37



# **4 Device Comparison Table**

PRODUCT	DESCRIPTION
TMUX6208	Low-Leakage-Current, Precision, 8:1, 1-Ch. multiplexer
TMUX6209	Low-Leakage-Current, Precision, 4:1, 2-Ch. multiplexer

# **5 Pin Configuration and Functions**






Figure 5-1. TMUX6208: PW Package 16-Pin TSSOP Figure 5-2. TMUX6208: RUM Package 16-Pin WQFN Top View

	Table	5-1	TMU	(6208	Pin	<b>Functions</b>
--	-------	-----	-----	-------	-----	------------------

NAME	PW NO.	RUM NO.	TYPE <sup>(1)</sup>	DESCRIPTION <sup>(2)</sup>
A0	1	15	1	Logic control input, has internal 4 M $\Omega$ pull-down resistor. Controls the switch configuration as shown in Section 8.5.
A1	16	14	1	Logic control input, has internal 4 M $\Omega$ pull-down resistor. Controls the switch configuration as shown in Section 8.5.
A2	15	13	1	Logic control input, has internal 4 M $\Omega$ pull-down resistor. Controls the switch configuration as shown in Section 8.5.
D	8	6	I/O	Drain pin. Can be an input or output.
EN	2	16	ı	Active high logic enable, has internal 4 M $\Omega$ pull-down resistor. When this pin is low, all switches are turned off. When this pin is high, the Ax logic input determines which switch is turned on.
GND	14	12	Р	Ground (0 V) reference.
S1	4	2	I/O	Source pin 1. Can be an input or output.
S2	5	3	I/O	Source pin 2. Can be an input or output.
S3	6	4	I/O	Source pin 3. Can be an input or output.
S4	7	5	I/O	Source pin 4. Can be an input or output.
S5	12	10	I/O	Source pin 5. Can be an input or output.
S6	11	9	I/O	Source pin 6. Can be an input or output.
S7	10	8	I/O	Source pin 7. Can be an input or output.
S8	9	7	I/O	Source pin 8. Can be an input or output.
VDD	13	11	Р	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1 $\mu$ F to 10 $\mu$ F between V <sub>DD</sub> and GND.
VSS	3	1	Р	Negative power supply. This pin is the most negative power-supply potential. In single-supply applications, this pin can be connected to ground. For reliable operation, connect a decoupling capacitor ranging from 0.1 $\mu F$ to 10 $\mu F$ between $V_{SS}$ and GND.
Thermal P	ad		_	The thermal pad is not connected internally. It is recommended that the pad be tied to GND or VSS for best performance.

- (1) I = input, O = output, I/O = input and output, P = power.
- (2) Refer to Section 8.4 for what to do with unused pins.



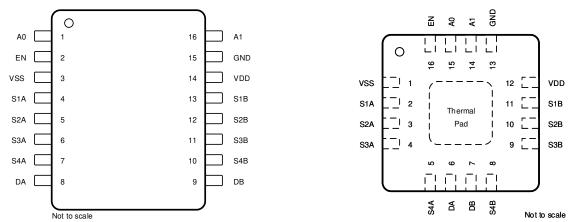


Figure 5-3. TMUX6209: PW Package 16-Pin TSSOP Figure 5-4. TMUX6209: RUM Package 16-Pin WQFN Top View

### Table 5-2. TMUX6209 Pin Functions

NAME	PW NO.	RUM NO.	TYPE <sup>(1)</sup>	DESCRIPTION <sup>(2)</sup>		
A0	1	15	I	Logic control input, has internal pull-down resistor. Controls the switch configuration as shown in Section 8.5.		
A1	16	14	I	Logic control input, has internal pull-down resistor. Controls the switch configuration as shown in Section 8.5.		
DA	8	6	I/O	shown in Section 8.5.  Logic control input, has internal pull-down resistor. Controls the switch configuration as shown in Section 8.5.  Drain Terminal A. Can be an input or an output.  Drain Terminal B. Can be an input or an output.  Active high logic enable, has internal pull-up resistor. When this pin is low, all switches a		
DB	9	7	I/O	Drain Terminal B. Can be an input or an output.		
EN	2	16	I	Active high logic enable, has internal pull-up resistor. When this pin is low, all switches are turned off. When this pin is high, the Ax logic input determines which switch is turned on.		
GND	15	13	Р			
S1A	4	2	I/O			
S1B	13	11	I/O	·		
S2A	5	3	I/O	Source pin 2A. Can be an input or output.		
S2B	12	10	I/O	·		
S3A	6	4	I/O	Source pin 3A. Can be an input or output.		
S3B	11	9	I/O	Source pin 3B. Can be an input or output.		
S4A	7	5	I/O	Source pin 4A. Can be an input or output.		
S4B	10	8	I/O	Source pin 4B. Can be an input or output.		
VDD	14	12	Р	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1 $\mu$ F to 10 $\mu$ F between V <sub>DD</sub> and GND.		
VSS	3	1	Р	Negative power supply. This pin is the most negative power-supply potential. In single-supply applications, this pin can be connected to ground. For reliable operation, connect a decoupling capacitor ranging from 0.1 $\mu$ F to 10 $\mu$ F between V <sub>SS</sub> and GND.		
Thermal Pa	ad		_	The thermal pad is not connected internally. It is recommended that the pad be tied to GND or VSS for best performance.		

- (1) I = input, O = output, I/O = input and output, P = power.
- (2) Refer to Section 8.4 for what to do with unused pins.

# 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1) (2)

		MIN	MAX	UNIT
V <sub>DD</sub> – V <sub>SS</sub>			38	V
$V_{DD}$	Supply voltage	-0.5	38	V
V <sub>SS</sub>		-38	0.5	V
V <sub>ADDRESS</sub> or V <sub>EN</sub>	Logic control input pin voltage (EN, A0, A1, A2)	-0.5	38	V
I <sub>ADDRESS</sub> or I <sub>EN</sub>	Logic control input pin current (EN, A0, A1, A2)	-30	30	mA
V <sub>S</sub> or V <sub>D</sub>	Source or drain voltage (Sx, D)	V <sub>SS</sub> -0.5	V <sub>DD</sub> +0.5	V
I <sub>IK</sub>	Diode clamp current <sup>(3)</sup>	-30	30	mA
I <sub>S</sub> or I <sub>D (CONT)</sub>	Source or drain continuous current (Sx, D)		I <sub>DC</sub> + 10 % <sup>(4)</sup>	mA
T <sub>A</sub>	Ambient temperature	-55	150	°C
T <sub>stg</sub>	Storage temperature	-65	150	°C
TJ	Junction temperature		150	°C
В	Total power dissipation (QFN package) <sup>(5)</sup>		1650	mW
P <sub>tot</sub>	Total power dissipation (TSSOP package) <sup>(5)</sup>		700	mW

- (1) Stresses beyond those listed under Absolute Maximum Rating may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Condition. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.
- (3) Pins are diode-clamped to the power-supply rails. Over voltage signals must be voltage and current limited to maximum ratings.
- 4) Refer to Source or Drain Continuous Current table for I<sub>DC</sub> specifications.
- (5) For QFN package: P<sub>tot</sub> derates linearily above T<sub>A</sub> = 70°C by 24.4mW/°C. For TSSOP package: P<sub>tot</sub> derates linearily above T<sub>A</sub> = 70°C by 10.8mW/°C.

### 6.2 ESD Ratings

			VALUE	UNIT
TMUX620x				
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/ JEDEC JS-001, all pins <sup>(1)</sup>	±2000	V
	ectrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup>	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



### **6.3 Thermal Information**

		TMU		
	THERMAL METRIC(1)	PW (TSSOP)	RUM (WQFN)	UNIT
		16 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	93.5	41.2	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	24.9	24.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	40.0	16.1	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	1.0	0.2	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	39.4	16.1	°C/W
R <sub>0JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	2.8	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

# **6.4 Recommended Operating Conditions**

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
$V_{DD} - V_{SS}$ (1)	Power supply voltage differential	4.5	36	V
$V_{DD}$	Positive power supply voltage	4.5	36	V
V <sub>S</sub> or V <sub>D</sub>	Signal path input/output voltage (source or drain pin) (Sx, D)	V <sub>SS</sub>	$V_{DD}$	V
V <sub>ADDRESS</sub> or V <sub>EN</sub>	Address or enable pin voltage	0	36	V
I <sub>S</sub> or I <sub>D (CONT)</sub>	Source or drain continuous current (Sx, D)		I <sub>DC</sub> (2)	mA
T <sub>A</sub>	Ambient temperature	-40	125	°C

 $V_{DD}$  and  $V_{SS}$  can be any value as long as 4.5 V  $\leq$  ( $V_{DD} - V_{SS}$ )  $\leq$  36 V, and the minimum  $V_{DD}$  is met. Refer to *Source or Drain Continuous Current* table for  $I_{DC}$  specifications.

### 6.5 Source or Drain Continuous Current

at supply voltage of  $V_{DD}$  ± 10%,  $V_{SS}$  ± 10 % (unless otherwise noted)

CONTIN	UOUS CURRENT PER CHANNEL (I <sub>DC</sub> )	T <sub>A</sub> = 25°C	T <sub>A</sub> = 85°C	T <sub>A</sub> = 125°C	UNIT
PACKAGE	TEST CONDITIONS	1 A - 25 C	1 A = 85 C	1A - 123 C	ONII
	±15 V Dual Supply	300	190	110	mA
	+36 V Single Supply <sup>(1)</sup>	280	170	100	mA
PW (TSSOP)	+12 V Single Supply	220	150	90	mA
	±5 V Dual Supply	210	140	90	mA
	+5 V Single Supply	170	110	70	mA
	±15 V Dual Supply	400	230	120	mA
	+36 V Single Supply <sup>(1)</sup>	380	220	110	mA
RUM (WQFN)	+12 V Single Supply	310	190	100	mA
	±5 V Dual Supply	300	190	100	mA
	+5 V Single Supply	230	150	90	mA

(1) Specified for nominal supply voltage only.

### 6.6 ±15 V Dual Supply: Electrical Characteristics

 $V_{DD}$  = +15 V ± 10%,  $V_{SS}$  = -15 V ±10%, GND = 0 V (unless otherwise noted)

Typical at  $V_{DD}$  = +15 V,  $V_{SS}$  = -15 V,  $T_A$  = 25°C (unless otherwise noted) **TEST CONDITIONS** UNIT PARAMETER  $\mathsf{T}_\mathsf{A}$ MIN **TYP** MAX **ANALOG SWITCH** 25°C 4 5.9 Ω  $V_S = -10 \text{ V to } +10 \text{ V}$  $I_{D} = -10 \text{ mA}$ -40°C to +85°C  $\mathsf{R}_{\mathsf{ON}}$ 7.4 Ω On-resistance Refer to On-Resistance -40°C to +125°C 8.7 Ω 25°C Ω  $V_S = -10 \text{ V to } +10 \text{ V}$ On-resistance mismatch between  $I_D = -10 \text{ mA}$  $\Delta R_{ON}$ -40°C to +85°C 8.0 Ω channels Refer to On-Resistance -40°C to +125°C 0.9 Ω 25°C Ω 0.4 1.5  $V_S = -10 \text{ V to } +10 \text{ V}$  $I_{S} = -10 \text{ mA}$ On-resistance flatness -40°C to +85°C 1.7 Ω R<sub>ON FLAT</sub> Refer to On-Resistance -40°C to +125°C 1.8 Ω  $V_S = 0 V, I_S = -10 \text{ mA}$ Ω/°C On-resistance drift -40°C to +125°C 0.02 R<sub>ON DRIFT</sub> Refer to On-Resistance  $V_{DD} = 16.5 \text{ V}, V_{SS} = -16.5 \text{ V}$ 25°C -0.40.04 0.4 nΑ Switch state is off -40°C to +85°C -1 nΑ V<sub>S</sub> = +10 V / -10 V Source off leakage current(1) I<sub>S(OFF)</sub>  $V_D = -10 \text{ V} / + 10 \text{ V}$ -40°C to +125°C -5 5 nΑ Refer to Section 7.2  $V_{DD} = 16.5 \text{ V}, V_{SS} = -16.5 \text{ V}$ 25°C -0.40.04 0.4 nΑ Switch state is off -40°C to +85°C 6 -6 nΑ Drain off leakage current(1)  $V_S = +10 \text{ V} / -10 \text{ V}$  $I_{D(OFF)}$  $V_D = -10 \text{ V} / + 10 \text{ V}$ -40°C to +125°C -42 42 nΑ Refer to Section 7.2  $V_{DD} = 16.5 \text{ V}, V_{SS} = -16.5 \text{ V}$ 25°C -0.40.04 0.4 nΑ Switch state is on I<sub>S(ON)</sub> Channel on leakage current(2) -40°C to +85°C -5 5 nΑ  $V_S = V_D = \pm 10 \text{ V}$  $I_{D(ON)}$ Refer to Section 7.3 -40°C to +125°C -40 40 nΑ LOGIC INPUTS (EN, A0, A1, A2)  $V_{\text{IH}}$ Logic voltage high -40°C to +125°C 1.3 36 ٧ -40°C to +125°C 0 8.0 ٧  $V_{IL}$ Logic voltage low Input leakage current -40°C to +125°C 0.4 μΑ  $I_{IH}$ Input leakage current -40°C to +125°C -0.005 $I_{IL}$ μΑ  $C_{IN}$ Logic input capacitance -40°C to +125°C 3.5 pF POWER SUPPLY 25°C 35 57 μΑ  $V_{DD} = 16.5 \text{ V}, V_{SS} = -16.5 \text{ V}$  $V_{\text{DD}}$  supply current -40°C to +85°C 60 μΑ  $I_{DD}$ Logic inputs = 0 V, 5 V, or  $V_{DD}$ -40°C to +125°C 75 μΑ 25°C 3 14 μΑ  $V_{DD} = 16.5 \text{ V}, V_{SS} = -16.5 \text{ V}$  $I_{SS}$ V<sub>SS</sub> supply current -40°C to +85°C 15 μΑ Logic inputs = 0 V, 5 V, or V<sub>DD</sub>

22

μΑ

-40°C to +125°C

<sup>(1)</sup> When  $V_S$  is positive,  $V_D$  is negative, or when  $V_S$  is negative,  $V_D$  is positive.

<sup>(2)</sup> When V<sub>S</sub> is at a voltage potential, V<sub>D</sub> is floating, or when V<sub>D</sub> is at a voltage potential, V<sub>S</sub> is floating.



# 6.7 ±15 V Dual Supply: Switching Characteristics

 $V_{DD} = +15 \text{ V} \pm 10\%, \ V_{SS} = -15 \text{ V} \pm 10\%, \ \text{GND} = 0 \text{ V} \ \text{(unless otherwise noted)}$  Typical at  $V_{DD} = +15 \text{ V}, \ V_{SS} = -15 \text{ V}, \ T_A = 25^{\circ}\text{C} \ \text{(unless otherwise noted)}$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN TYP	MAX	UNIT
		V <sub>S</sub> = 10 V	25°C	140	195	ns
t <sub>TRAN</sub>	Transition time from control input	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C		220	ns
		Refer to Transition Time	-40°C to +125°C		240	ns
		V - 40 V	25°C	140	195 220	ns
t <sub>ON (EN)</sub>	Turn-on time from enable	$V_S = 10 \text{ V}$ $R_L = 300 \Omega, C_L = 35 \text{ pF}$	-40°C to +85°C		220	ns
ON (LIV)		Refer to Section 7.5	-40°C to +125°C		240	ns
			25°C	200		ns
t	Turn-off time from enable	$V_S = 10 \text{ V}$ $R_L = 300 \Omega, C_L = 35 \text{ pF}$	-40°C to +85°C	200		ns
toff (EN)	Turn-on time nom enable	Refer to Section 7.5	-40°C to +125°C			ns
			25°C	60	290	
		$V_S = 10 \text{ V},$			240 195 220 240 268 285 298	ns
t <sub>BBM</sub>	Break-before-make time delay	$R_L = 300 \Omega$ , $C_L = 35 pF$ Refer to Break-Before-Make	-40°C to +85°C	1		ns
		Titles to Broan Boiles mane	-40°C to +125°C	1		ns
	Davisa turn on time	V <sub>DD</sub> rise time = 1 μs	25°C	0.16		ms
T <sub>ON (VDD)</sub>	Device turn on time (V <sub>DD</sub> to output)	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C	0.17		ms
		Refer to Turn-on (VDD) Time	-40°C to +125°C	0.17		ms
t <sub>PD</sub>	Propagation delay	$R_L = 50 \Omega$ , $C_L = 5 pF$ Refer to Section 7.8	25°C	1.8		ns
Q <sub>INJ</sub>	Charge injection	V <sub>S</sub> = 0 V, C <sub>L</sub> = 100 pF Refer to Section 7.9	25°C	3		pC
O <sub>ISO</sub>	Off-isolation	$\begin{array}{l} R_L = 50~\Omega~,~C_L = 5~pF \\ V_S = 0~V,~f = 100~kHz \\ Refer~to~Off~Isolation \end{array}$	25°C	-82		dB
O <sub>ISO</sub>	Off-isolation	$R_L = 50 \ \Omega$ , $C_L = 5 \ pF$ $V_S = 0 \ V$ , $f = 1 \ MHz$ Refer to Off Isolation	25°C	-62		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \ \Omega$ , $C_L = 5 \ pF$ $V_S = 0 \ V$ , $f = 100 \ kHz$ Refer to Crosstalk	25°C	-85		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \ \Omega$ , $C_L = 5 \ pF$ $V_S = 0 \ V$ , $f = 1 MHz$ Refer to Crosstalk	25°C	-65		dB
BW	-3dB Bandwidth (TMUX6208)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ Refer to Bandwidth	25°C	30		MHz
BW	-3dB Bandwidth (TMUX6209)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ Refer to Bandwidth	25°C	52		MHz
IL	Insertion loss	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ , $f = 1 MHz$	25°C	-0.35		dB
ACPSRR	AC Power Supply Rejection Ratio	$\begin{aligned} &V_{PP} = 0.62 \text{ V on V}_{DD} \text{ and V}_{SS} \\ &R_L = 50 \Omega \text{ , } C_L = 5 \text{ pF,} \\ &f = 1 \text{ MHz} \\ &Refer \text{ to ACPSRR} \end{aligned}$	25°C	-74		dB
THD+N	Total Harmonic Distortion + Noise	$\begin{split} V_{PP} &= 15 \text{ V, } V_{BIAS} = 0 \text{ V} \\ R_L &= 10 \text{ k}\Omega \text{ , } C_L = 5 \text{ pF,} \\ f &= 20 \text{ Hz to } 20 \text{ kHz} \\ \text{Refer to THD + Noise} \end{split}$	25°C	0.0003		%
C <sub>S(OFF)</sub>	Source off capacitance	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	15		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6208)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	135		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6209)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	68		pF
C <sub>S(ON)</sub> , C <sub>D(ON)</sub>	On capacitance (TMUX6208)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	185		pF
C <sub>S(ON)</sub> , C <sub>D(ON)</sub>	On capacitance (TMUX6209)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	115		pF

Submit Document Feedback

# 6.8 36 V Single Supply: Electrical Characteristics

 $V_{DD} = +36 \text{ V} \pm 10\%, \ V_{SS} = 0 \text{ V}, \ \text{GND} = 0 \text{ V} \ \text{(unless otherwise noted)}$   $\text{Typical at V}_{DD} = +36 \text{ V}, \ V_{SS} = 0 \text{ V}, \ T_{A} = 25^{\circ}\text{C} \ \text{(unless otherwise noted)}$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
ANALOG	SWITCH						
		V <sub>S</sub> = 0 V to 30 V	25°C		4	6.2	Ω
R <sub>ON</sub>	On-resistance	$I_{D} = -10 \text{ mA}$	-40°C to +85°C			7.9	Ω
		Refer to On-Resistance	-40°C to +125°C			9.4	Ω
		V <sub>S</sub> = 0 V to 30 V	25°C		0.2	0.7	Ω
$\Delta R_{ON}$	On-resistance mismatch between channels	$I_D = -10 \text{ mA}$	-40°C to +85°C			0.8	Ω
	onarmois .	Refer to On-Resistance	-40°C to +125°C			6.2 7.9 9.4 0.7	Ω
		V <sub>S</sub> = 0 V to 30 V	25°C		0.4	1.8	Ω
R <sub>ON FLAT</sub>	On-resistance flatness	$I_{S} = -10 \text{ mA}$	-40°C to +85°C			2.5	Ω
		Refer to On-Resistance	-40°C to +125°C			3.1	Ω
R <sub>ON DRIFT</sub>	On-resistance drift	V <sub>S</sub> = 18 V, I <sub>S</sub> = -10 mA Refer to On-Resistance	-40°C to +125°C		0.015		Ω/°C
		$V_{DD}$ = 39.6 V, $V_{SS}$ = 0 V Switch state is off $V_{S}$ = 30 V / 1 V $V_{D}$ = 1 V / 30 V Refer to Section 7.2	25°C	-0.4	0.04	0.4	nA
I <sub>S(OFF)</sub>	Source off leakage current <sup>(1)</sup>		-40°C to +85°C	-2		2	nA
			-40°C to +125°C	-10		10	nA
In/OEE)	Drain off leakage current <sup>(1)</sup>	V <sub>DD</sub> = 39.6 V, V <sub>SS</sub> = 0 V Switch state is off V <sub>S</sub> = 30 V / 1 V	25°C	-0.5	0.05	0.5	nA
			-40°C to +85°C	-12		12	nA
-D(OFF)		V <sub>D</sub> = 1 V / 30 V Refer to Section 7.2	-40°C to +125°C	-85		85	nA
		V <sub>DD</sub> = 39.6 V, V <sub>SS</sub> = 0 V Switch state is on V <sub>S</sub> = V <sub>D</sub> = 30 V or 1 V	25°C	-0.5	0.05	0.5	nA
. ` ′	Channel on leakage current <sup>(2)</sup>		-40°C to +85°C	-11		11	nA
-D(ON)		Refer to Section 7.3	-40°C to +125°C	-78		78	nA
LOGIC INF	PUTS (EN, A0, A1, A2)						
V <sub>IH</sub>	Logic voltage high		-40°C to +125°C	1.3		36	V
V <sub>IL</sub>	Logic voltage low		-40°C to +125°C	0		0.8	V
I <sub>IH</sub>	Input leakage current		-40°C to +125°C		0.4	2	μA
I <sub>IL</sub>	Input leakage current		-40°C to +125°C	-0.1	-0.005		μΑ
C <sub>IN</sub>	Logic input capacitance		-40°C to +125°C		3.5		pF
POWER S	UPPLY						
		$V_{DD}$ = 39.6 V, $V_{SS}$ = 0 V Logic inputs = 0 V, 5 V, or $V_{DD}$	25°C		55	86	μΑ
I <sub>DD</sub>	V <sub>DD</sub> supply current		-40°C to +85°C			90	μΑ
ΔRON  RON FLAT  RON DRIFT  IS(OFF)  IS(OFF)  IS(ON) ID(ON)  LOGIC INP  VIL  IIIH  IIIL  CIN  POWER SI			-40°C to +125°C			105	μA

 $<sup>\</sup>begin{array}{ll} \text{(1)} & \text{When $V_S$ is positive, $V_D$ is negative, and vice versa.} \\ \text{(2)} & \text{When $V_S$ is at a voltage potential, $V_D$ is floating, and vice versa.} \end{array}$ 



# 6.9 36 V Single Supply: Switching Characteristics

 $\begin{aligned} &V_{DD} = +36 \text{ V} \pm 10\%, \, V_{SS} = 0 \text{ V}, \, \text{GND} = 0 \text{ V} \, \text{(unless otherwise noted)} \\ &\text{Typical at } V_{DD} = +36 \text{ V}, \, V_{SS} = 0 \text{ V}, \, T_{A} = 25^{\circ}\text{C} \, \, \text{(unless otherwise noted)} \end{aligned}$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
		V <sub>S</sub> = 18 V	25°C		105	200	ns
t <sub>TRAN</sub>	Transition time from control input	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			225	ns
		Refer to Transition Time	-40°C to +125°C			240	ns
		V <sub>S</sub> = 18 V	25°C		115	200	ns
t <sub>ON (EN)</sub>	Turn-on time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			220	ns
		Refer to Section 7.5	-40°C to +125°C			240	ns
		V <sub>S</sub> = 18 V	25°C		90	290	ns
t <sub>OFF (EN)</sub>	Turn-off time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			305	ns
		Refer to Section 7.5	-40°C to +125°C			315	ns
		V <sub>S</sub> = 18 V,	25°C		40		ns
t <sub>BBM</sub>	Break-before-make time delay	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C	1			ns
		Refer to Break-Before-Make	-40°C to +125°C	1			ns
		V- rigo timo = 1 uo	25°C		0.14		ms
T <sub>ON (VDD)</sub>	Device turn on time	$V_{DD}$ rise time = 1 μs $R_L$ = 300 $\Omega$ , $C_L$ = 35 pF	-40°C to +85°C		0.15		ms
,	(V <sub>DD</sub> to output)	Refer to Turn-on (VDD) Time	-40°C to +125°C		0.15		ms
t <sub>PD</sub>	Propagation delay	$R_L = 50 \Omega$ , $C_L = 5 pF$ Refer to Section 7.8	25°C		2.5		ns
Q <sub>INJ</sub>	Charge injection	V <sub>S</sub> = 18 V, C <sub>L</sub> = 100 pF Refer to Section 7.9	25°C		2		рС
O <sub>ISO</sub>	Off-isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1 MHz$ Refer to Off Isolation	25°C		-62		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 100 kHz$ Refer to Crosstalk	25°C		-85		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1 MHz$ Refer to Crosstalk	25°C		-65		dB
BW	-3dB Bandwidth (TMUX6208)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ Refer to Bandwidth	25°C		30		MHz
BW	-3dB Bandwidth (TMUX6209)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$	25°C		50		MHz
IL	Insertion loss	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1 MHz$	25°C		-0.35		dB
ACPSRR	AC Power Supply Rejection Ratio	$\begin{aligned} & \text{V}_{PP} = \text{0.62 V on V}_{DD} \text{ and V}_{SS} \\ & \text{R}_{L} = \text{50 } \Omega \text{ , C}_{L} = \text{5 pF,} \\ & \text{f} = \text{1 MHz} \\ & \text{Refer to ACPSRR} \end{aligned}$	25°C		-70		dB
THD+N	Total Harmonic Distortion + Noise	$V_{PP}$ =18 V, $V_{BIAS}$ = 18 V $R_{L}$ = 10 k $\Omega$ , $C_{L}$ = 5 pF, f = 20 Hz to 20 kHz Refer to THD + Noise	25°C		0.0003		%
C <sub>S(OFF)</sub>	Source off capacitance	V <sub>S</sub> = 18 V, f = 1 MHz	25°C		15		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6208)	V <sub>S</sub> = 18 V, f = 1 MHz	25°C		138		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6209)	V <sub>S</sub> = 18 V, f = 1 MHz	25°C		68		pF
C <sub>S(ON),</sub> C <sub>D(ON)</sub>	On capacitance (TMUX6208)	V <sub>S</sub> = 18 V, f = 1 MHz	25°C		185		pF
C <sub>S(ON)</sub> , C <sub>D(ON)</sub>	On capacitance (TMUX6209)	V <sub>S</sub> = 18 V, f = 1 MHz	25°C		115		pF

Submit Document Feedback



# 6.10 12 V Single Supply: Electrical Characteristics

 $V_{DD} = +12~V \pm 10\%,~V_{SS} = 0~V,~GND = 0~V~(unless~otherwise~noted)$  Typical at  $V_{DD} = +12~V,~V_{SS} = 0~V,~T_A = 25^{\circ}C~(unless~otherwise~noted)$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
ANALOG	SWITCH	"					
		V <sub>S</sub> = 0 V to 10 V	25°C		7	11.8	Ω
R <sub>ON</sub>	On-resistance	$I_{D} = -10 \text{ mA}$	-40°C to +85°C			14.2	Ω
		Refer to On-Resistance	-40°C to +125°C			16.5	Ω
			25°C		0.2	0.7	Ω
$\Delta R_{ON}$	On-resistance mismatch between channels	$I_{D} = -10 \text{ mA}$	-40°C to +85°C			0.8	Ω
		Refer to On-Resistance	-40°C to +125°C			11.8 14.2 16.5 0.7	Ω
		V <sub>S</sub> = 0 V to 10 V	25°C		1.7	3.4	Ω
R <sub>ON FLAT</sub>	On-resistance flatness	$I_S = -10 \text{ mA}$	-40°C to +85°C			3.8	Ω
		Refer to On-Resistance	-40°C to +125°C			4.6	Ω
R <sub>ON DRIFT</sub>	On-resistance drift	V <sub>S</sub> = 6 V, I <sub>S</sub> = -10 mA Refer to On-Resistance	-40°C to +125°C		0.03		Ω/°C
I <sub>S(OFF)</sub>	Source off leakage current <sup>(1)</sup>	$V_{DD}$ = 13.2 V, $V_{SS}$ = 0 V Switch state is off $V_{S}$ = 10 V / 1 V $V_{D}$ = 1 V / 10 V Refer to Section 7.2	25°C	-0.4	0.04	0.4	nA
			-40°C to +85°C	-1		1	nA
			-40°C to +125°C	-8		8	nA
I <sub>D(OFF)</sub>	Drain off leakage current <sup>(1)</sup>	$V_{DD} = 13.2 \text{ V, } V_{SS} = 0 \text{ V}$ Switch state is off $V_{S} = 10 \text{ V / 1 V}$ $V_{D} = 1 \text{ V / 10 V}$ Refer to Section 7.2	25°C	-0.4	0.05	0.4	nA
			-40°C to +85°C	-5		5	nA
D(OIT)			-40°C to +125°C	-30		30	nA
		$V_{DD}$ = 13.2 V, $V_{SS}$ = 0 V Switch state is on $V_{S}$ = $V_{D}$ = 10 V or 1 V Refer to Section 7.3	25°C	-0.4	0.05	0.4	nA
I <sub>S(ON)</sub>	Channel on leakage current <sup>(2)</sup>		-40°C to +85°C	-4		4	nA
-D(ON)			-40°C to +125°C	-28		28	nA
LOGIC INF	PUTS (EN, A0, A1, A2)	·				·	
V <sub>IH</sub>	Logic voltage high		-40°C to +125°C	1.3		36	V
V <sub>IL</sub>	Logic voltage low		-40°C to +125°C	0		0.8	V
I <sub>IH</sub>	Input leakage current		-40°C to +125°C		0.4	2	μA
I <sub>IL</sub>	Input leakage current		-40°C to +125°C	-0.1	-0.005		μA
C <sub>IN</sub>	Logic input capacitance		-40°C to +125°C		3.5		pF
POWER S	UPPLY						
		V <sub>DD</sub> = 13.2 V, V <sub>SS</sub> = 0 V Logic inputs = 0 V, 5 V, or V <sub>DD</sub>	25°C		30	48	μA
$I_{DD}$	V <sub>DD</sub> supply current		-40°C to +85°C			54	μA
RON FLAT  RON DRIFT  S(OFF)  D(OFF)  S(ON) D(ON)  OGIC INP  /IL  IIH  IIL  CIN  POWER SU			-40°C to +125°C			65	μA

<sup>(1)</sup> When  $V_S$  is positive,  $V_D$  is negative, or when  $V_S$  is negative,  $V_D$  is positive.

<sup>(2)</sup> When  $V_S$  is at a voltage potential,  $V_D$  is floating, or when  $V_D$  is at a voltage potential,  $V_S$  is floating.



# 6.11 12 V Single Supply: Switching Characteristics

 $\begin{aligned} &V_{DD} = +12 \text{ V} \pm 10\%, \text{ V}_{SS} = 0 \text{ V}, \text{ GND} = 0 \text{ V} \text{ (unless otherwise noted)} \\ &\text{Typical at V}_{DD} = +12 \text{ V}, \text{ V}_{SS} = 0 \text{ V}, \text{ T}_{A} = 25^{\circ}\text{C} \text{ (unless otherwise noted)} \end{aligned}$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
		V <sub>S</sub> = 8 V	25°C		180	210	ns
t <sub>TRAN</sub>	Transition time from control input	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			245	ns
		Refer to Transition Time	-40°C to +125°C			276	ns
		V <sub>S</sub> = 8 V	25°C		115	202	ns
t <sub>ON (EN)</sub>	Turn-on time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			235	ns
		Refer to Section 7.5	-40°C to +125°C			265	ns
		V <sub>S</sub> = 8 V	25°C		290	318	ns
OFF (EN)	Turn-off time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C			350	ns
, ,		Refer to Section 7.5	-40°C to +125°C			210 245 276 202 235 265 318	ns
		V = 9 V	25°C		50		ns
ВВМ	Break-before-make time delay	$V_S = 8 \text{ V},$ $R_L = 300 \Omega, C_L = 35 \text{ pF}$	-40°C to +85°C	1		350 370 370 36 7 1 7 1 5 5 2	ns
		Refer to Break-Before-Make	-40°C to +125°C	1			ns
		V	25°C		0.16		ms
T <sub>ON (VDD)</sub>	Device turn on time	$V_{DD}$ rise time = 1 $\mu$ s R <sub>I</sub> = 300 $\Omega$ , C <sub>I</sub> = 35 pF	-40°C to +85°C		0.17	1	ms
0.1 (122)	(V <sub>DD</sub> to output)	Refer to Turn-on (VDD) Time	-40°C to +125°C		0.17	1	ms
t <sub>PD</sub>	Propagation delay	$R_L = 50 \Omega$ , $C_L = 5 pF$ Refer to Section 7.8	25°C		2.5		ns
Q <sub>INJ</sub>	Charge injection	$V_S = 6 \text{ V, } C_L = 100 \text{ pF}$ Refer to Section 7.9	25°C		2		pC
O <sub>ISO</sub>	Off-isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 100 kHz$	25°C		-82		dB
O <sub>ISO</sub>	Off-isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1 MHz$ Refer to Off Isolation	25°C		-62		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 100 kHz$ Refer to Crosstalk	25°C		-85		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1MHz$ Refer to Crosstalk	25°C		-65		dB
BW	-3dB Bandwidth (TMUX6208)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ Refer to Bandwidth	25°C		28		MHz
BW	-3dB Bandwidth (TMUX6209)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$	25°C		55		MHz
lL	Insertion loss	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 6 V$ , $f = 1 MHz$	25°C		-0.6		dB
ACPSRR	AC Power Supply Rejection Ratio	$V_{PP}$ = 0.62 V on $V_{DD}$ and $V_{SS}$ $R_L$ = 50 $\Omega$ , $C_L$ = 5 pF, f = 1 MHz Refer to ACPSRR	25°C		-74		dB
THD+N	Total Harmonic Distortion + Noise	$V_{PP}$ = 6 V, $V_{BIAS}$ = 6 V $R_L$ = 10 k $\Omega$ , $C_L$ = 5 pF, f = 20 Hz to 20 kHz Refer to THD + Noise	25°C	(	0.0007		%
C <sub>S(OFF)</sub>	Source off capacitance	V <sub>S</sub> = 6 V, f = 1 MHz	25°C		17		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6208)	V <sub>S</sub> = 6 V, f = 1 MHz	25°C		155		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6209)	V <sub>S</sub> = 6 V, f = 1 MHz	25°C		78		pF
C <sub>S(ON),</sub> C <sub>D(ON)</sub>	On capacitance (TMUX6208)	V <sub>S</sub> = 6 V, f = 1 MHz	25°C		200		pF
C <sub>S(ON)</sub> , C <sub>D(ON)</sub>	On capacitance (TMUX6209)	V <sub>S</sub> = 6 V, f = 1 MHz	25°C		122		pF

Submit Document Feedback



# 6.12 ±5 V Dual Supply: Electrical Characteristics

 $V_{DD} = +5 \text{ V} \pm 10\%, \ V_{SS} = -5 \text{ V} \pm 10\%, \ \text{GND} = 0 \text{ V} \ \text{(unless otherwise noted)}$  Typical at  $V_{DD} = +5 \text{ V}, \ V_{SS} = -5 \text{ V}, \ T_A = 25^{\circ}\text{C} \ \text{(unless otherwise noted)}$ 

	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN	TYP	MAX	UNIT
ANALOG	SWITCH						
		V <sub>DD</sub> = +4.5 V, V <sub>SS</sub> = -4.5 V	25°C		7	13.5	Ω
R <sub>ON</sub>	On-resistance	$V_{DD} = +4.5 \text{ V}, V_{SS} = -4.5 \text{ V}$ $V_{S} = -4.5 \text{ V} \text{ to } +4.5 \text{ V}$	-40°C to +85°C			16.2	Ω
		$I_D = -10 \text{ mA}$	-40°C to +125°C			18.5	Ω
			25°C		0.2	0.7	Ω
$\Delta R_{ON}$	On-resistance mismatch between channels	$V_S = -4.5 \text{ V to } +4.5 \text{ V}$ $I_D = -10 \text{ mA}$	-40°C to +85°C			0.8	Ω
Ron flat Ron drift	Citatilleis	ID = =10 IIIA	-40°C to +125°C			0.9	Ω
			25°C		2	3.8	Ω
R <sub>ON FLAT</sub>	On-resistance flatness	$V_S = -4.5 \text{ V to } +4.5 \text{ V}$ $I_D = -10 \text{ mA}$	-40°C to +85°C			4.2	Ω
		ID = = 10 IIIA	-40°C to +125°C			4.9	Ω
R <sub>ON DRIFT</sub>	On-resistance drift	V <sub>S</sub> = 0 V, I <sub>S</sub> = -10 mA	-40°C to +125°C		0.03		Ω/°C
-		V <sub>DD</sub> = +5.5 V, V <sub>SS</sub> = -5.5 V	25°C	-0.5	0.02	0.5	nA
I <sub>S(OFF)</sub>	Source off leakage current <sup>(1)</sup>	Switch state is off $V_S = +4.5 \text{ V} / -4.5 \text{ V}$ $V_D = -4.5 \text{ V} / + 4.5 \text{ V}$	-40°C to +85°C	-1.5		1.5	nA
			-40°C to +125°C	-8		8	nA
		V <sub>DD</sub> = +5.5 V, V <sub>SS</sub> = -5.5 V	25°C	-0.5	0.04	0.5	nA
I <sub>D(OFF)</sub>	Drain off leakage current <sup>(1)</sup>	Switch state is off $V_S = +4.5 \text{ V} / -4.5 \text{ V}$ $V_D = -4.5 \text{ V} / + 4.5 \text{ V}$	-40°C to +85°C	-3.5		3.5	nA
			-40°C to +125°C	-28		28	nA
		V <sub>DD</sub> = +5.5 V, V <sub>SS</sub> = -5.5 V	25°C	-0.5	0.04	0.5	nA
I <sub>S(ON)</sub>	Channel on leakage current <sup>(2)</sup>	Switch state is on $V_S = V_D = \pm 4.5 \text{ V}$	-40°C to +85°C	-3		3	nA
$I_{D(ON)}$			-40°C to +125°C	-26		26	nA
LOGIC INF	PUTS (EN, A0, A1, A2)						
V <sub>IH</sub>	Logic voltage high		-40°C to +125°C	1.3		36	V
V <sub>IL</sub>	Logic voltage low		-40°C to +125°C	0		0.8	V
I <sub>IH</sub>	Input leakage current		-40°C to +125°C		0.4	2	μA
I <sub>IL</sub>	Input leakage current		-40°C to +125°C	-0.1	-0.005		μA
C <sub>IN</sub>	Logic input capacitance		-40°C to +125°C		3.5		pF
POWER S	UPPLY	-	1			-	
			25°C		25	38	μA
I <sub>DD</sub>	V <sub>DD</sub> supply current	$V_{DD}$ = +5.5 V, $V_{SS}$ = -5.5 V Logic inputs = 0 V, 5 V, or $V_{DD}$	-40°C to +85°C			44	μA
		Logic iriputs – u v, a v, or v <sub>DD</sub>	-40°C to +125°C			55	μA
			25°C		2	6.2	μA
I <sub>SS</sub>	V <sub>SS</sub> supply current	$V_{DD}$ = +5.5 V, $V_{SS}$ = -5.5 V Logic inputs = 0 V, 5 V, or $V_{DD}$	-40°C to +85°C			7	μA
		Logic inputs – o v, o v, oi vpp	-40°C to +125°C			15	μA

 <sup>(1)</sup> When V<sub>S</sub> is positive, V<sub>D</sub> is negative, or when V<sub>S</sub> is negative, V<sub>D</sub> is positive.
 (2) When V<sub>S</sub> is at a voltage potential, V<sub>D</sub> is floating, or when V<sub>D</sub> is at a voltage potential, V<sub>S</sub> is floating.




# 6.13 ±5 V Dual Supply: Switching Characteristics

 $V_{DD} = +5 \text{ V} \pm 10\%, \ V_{SS} = -5 \text{ V} \pm 10\%, \ \text{GND} = 0 \text{ V} \ \text{(unless otherwise noted)}$  Typical at  $V_{DD} = +5 \text{ V}, \ V_{SS} = -5 \text{ V}, \ T_A = 25^{\circ}\text{C} \ \text{(unless otherwise noted)}$ 

•	PARAMETER	TEST CONDITIONS	T <sub>A</sub>	MIN TYP	MAX	UNIT
		V <sub>S</sub> = 3 V	25°C	125	250	ns
t <sub>TRAN</sub>	Transition time from control input	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C		280	ns
		Refer to Transition Time	-40°C to +125°C		305	ns
		V <sub>S</sub> = 3 V	25°C	128	245	ns
t <sub>ON (EN)</sub>	Turn-on time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C		278	ns
Con (en)  Coff (en)  C		Refer to Section 7.5	-40°C to +125°C		305	ns
		V <sub>S</sub> = 3 V	25°C	300	372	ns
t <sub>OFF</sub> (EN)	Turn-off time from enable	$R_L = 300 \Omega, C_L = 35 pF$	-40°C to +85°C		400	ns
, ,		Refer to Section 7.5	-40°C to +125°C		420	ns
		V = 2 V	25°C	50		ns
t <sub>RBM</sub>	Break-before-make time delay	$V_S = 3 V$ , $R_L = 300 \Omega$ , $C_L = 35 pF$	-40°C to +85°C	1		ns
55	,	Refer to Break-Before-Make	-40°C to +125°C	1		ns
			25°C	0.16		ms
Ton (vdd)	Device turn on time	$V_{DD}$ rise time = 1 $\mu$ s R <sub>L</sub> = 300 $\Omega$ , C <sub>L</sub> = 35 pF	-40°C to +85°C	0.17	1	ms
· ON (VDD)	(V <sub>DD</sub> to output)	Refer to Turn-on (VDD) Time	-40°C to +125°C	0.17	1	ms
t <sub>PD</sub>	Propagation delay	$R_L = 50 \Omega$ , $C_L = 5 pF$ Refer to Section 7.8	25°C	2	•	ns
Q <sub>INJ</sub>	Charge injection	V <sub>S</sub> = 0 V, C <sub>L</sub> = 100 pF Refer to Section 7.9	25°C	1.2		рС
O <sub>ISO</sub>	Off-isolation	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ , $f = 100 kHz$ Refer to Off Isolation	25°C	-82		dB
O <sub>ISO</sub>	Off-isolation	$R_L$ = 50 $\Omega$ , $C_L$ = 5 pF $V_S$ = 0 V, f = 1 MHz Refer to Off Isolation	25°C	-62		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ , $f = 100 kHz$ Refer to Crosstalk	25°C	-85		dB
X <sub>TALK</sub>	Crosstalk	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ , $f = 1 MHz$ Refer to Crosstalk	25°C	-65		dB
BW	-3dB Bandwidth (TMUX6208)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ Refer to Bandwidth	25°C	28		MHz
BW	-3dB Bandwidth (TMUX6209)	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$	25°C	54		MHz
IL	Insertion loss	$R_L = 50 \Omega$ , $C_L = 5 pF$ $V_S = 0 V$ , $f = 1 MHz$	25°C	-0.7		dB
ACPSRR	AC Power Supply Rejection Ratio	$V_{PP}$ = 0.62 V on $V_{DD}$ and $V_{SS}$ $R_L$ = 50 $\Omega$ , $C_L$ = 5 pF, f = 1 MHz Refer to ACPSRR	25°C	-76		dB
THD+N	Total Harmonic Distortion + Noise	$V_{PP}$ = 5 V, $V_{BIAS}$ = 0 V $R_L$ = 10 k $\Omega$ , $C_L$ = 5 pF, f = 20 Hz to 20 kHz Refer to THD + Noise	25°C	0.0017		%
C <sub>S(OFF)</sub>	Source off capacitance	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	18		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6208)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	160		pF
C <sub>D(OFF)</sub>	Drain off capacitance (TMUX6209)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	80		pF
C <sub>S(ON),</sub> C <sub>D(ON)</sub>	On capacitance (TMUX6208)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	205		pF
C <sub>S(ON)</sub> , C <sub>D(ON)</sub>	On capacitance (TMUX6209)	V <sub>S</sub> = 0 V, f = 1 MHz	25°C	124		pF


Submit Document Feedback

# **6.14 Typical Characteristics**

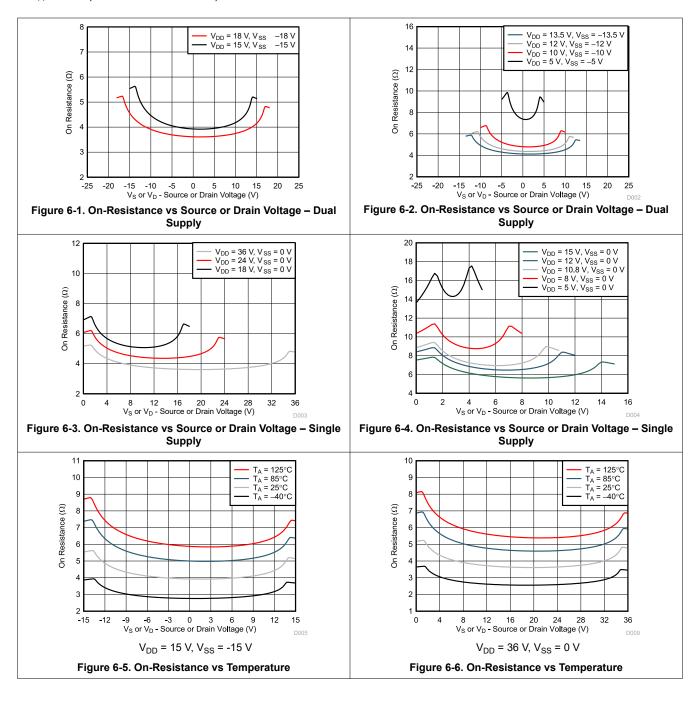




at T<sub>A</sub> = 25°C (unless otherwise noted)

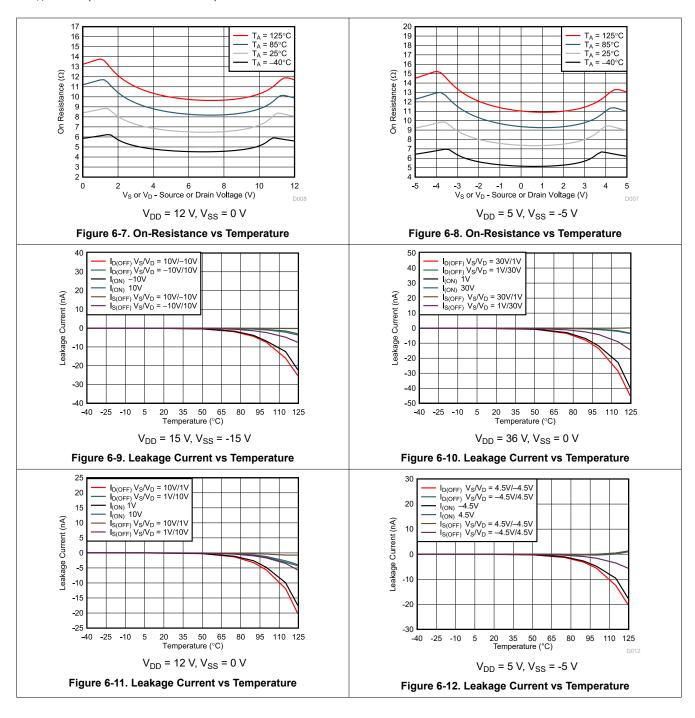



Submit Document Feedback



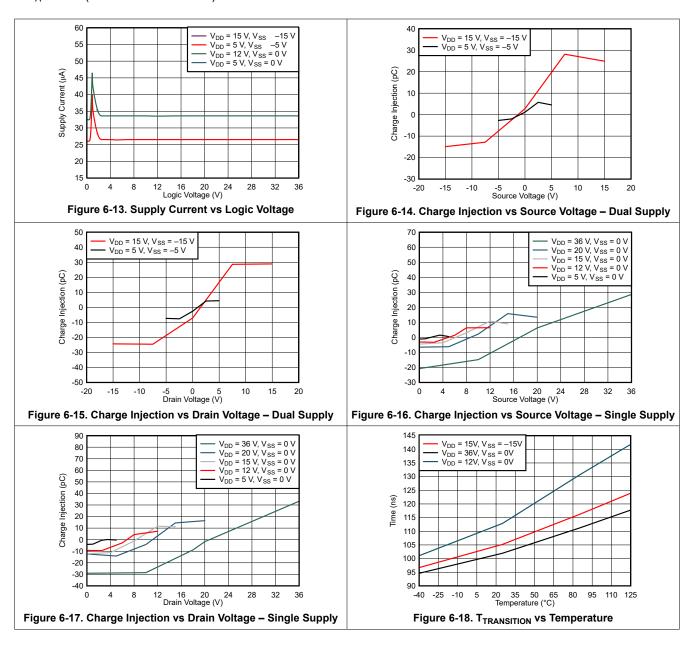



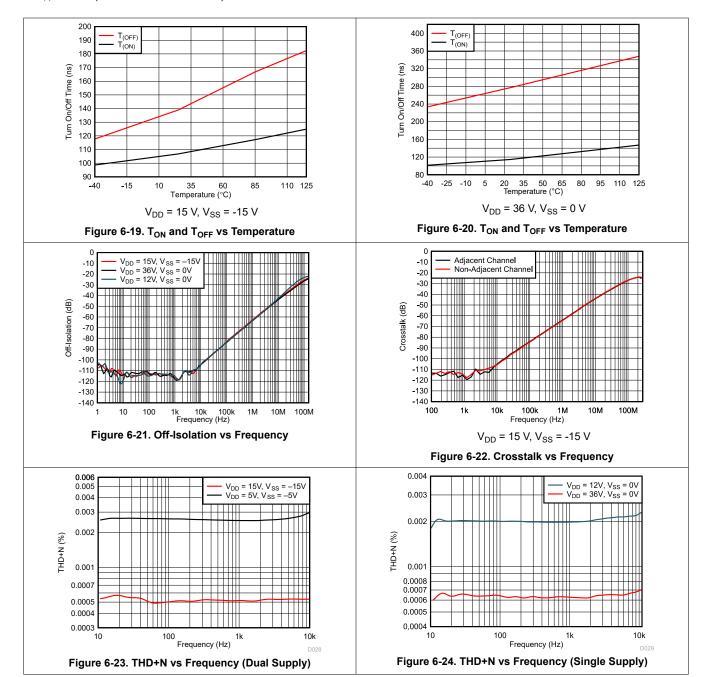

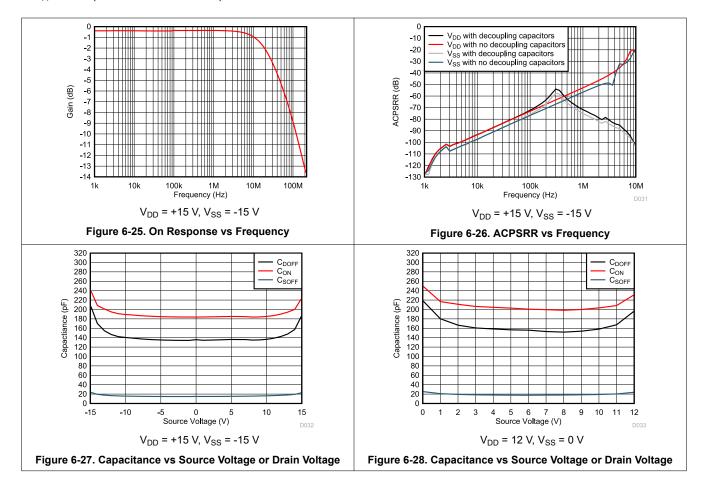

### 7 Parameter Measurement Information

#### 7.1 On-Resistance

The on-resistance of a device is the ohmic resistance between the source (Sx) and drain (D) pins of the device. The on-resistance varies with input voltage and supply voltage. The symbol  $R_{ON}$  is used to denote on-resistance. Figure 7-1 shows the measurement setup used to measure  $R_{ON}$ . Voltage (V) and current ( $I_{SD}$ ) are measured using this setup, and  $R_{ON}$  is computed with  $R_{ON} = V / I_{SD}$ .

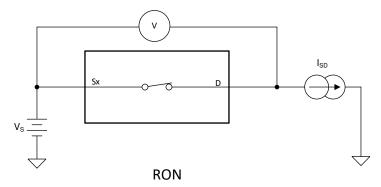


Figure 7-1. On-Resistance Measurement Setup

### 7.2 Off-Leakage Current

There are two types of leakage currents associated with a switch during the off state:

- · Source off-leakage current
- Drain off-leakage current

Source leakage current is defined as the leakage current flowing into or out of the source pin when the switch is off. This current is denoted by the symbol  $I_{S(OFF)}$ .

Drain leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is off. This current is denoted by the symbol  $I_{D(OFF)}$ .

Figure 7-2 shows the setup used to measure both off-leakage currents.

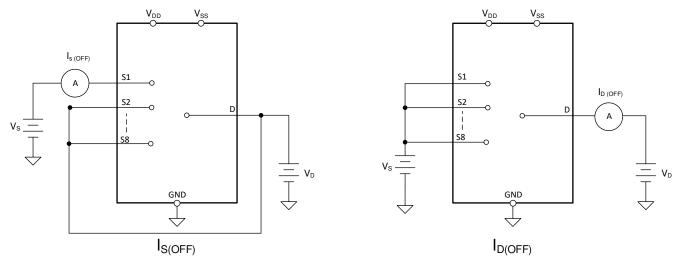


Figure 7-2. Off-Leakage Measurement Setup

Submit Document Feedback

### 7.3 On-Leakage Current

Source on-leakage current is defined as the leakage current flowing into or out of the source pin when the switch is on. This current is denoted by the symbol  $I_{S(ON)}$ .

Drain on-leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is on. This current is denoted by the symbol  $I_{D(ON)}$ .

Either the source pin or drain pin is left floating during the measurement. Figure 7-3 shows the circuit used for measuring the on-leakage current, denoted by  $I_{S(ON)}$  or  $I_{D(ON)}$ .

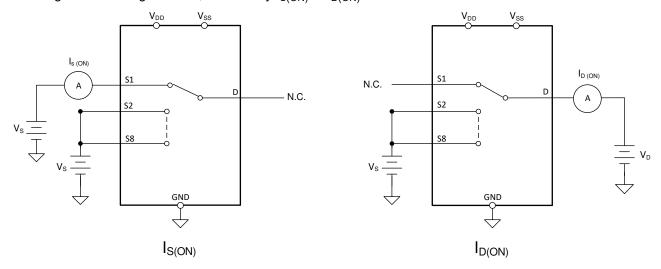


Figure 7-3. On-Leakage Measurement Setup

#### 7.4 Transition Time

Transition time is defined as the time taken by the output of the device to rise or fall 90% after the address signal has risen or fallen past the logic threshold. The 90% transition measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-4 shows the setup used to measure transition time, denoted by the symbol  $t_{TRANSITION}$ .

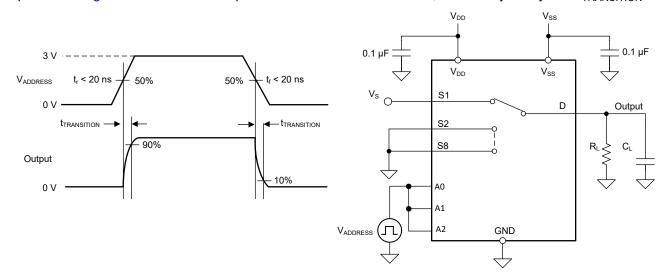


Figure 7-4. Transition-Time Measurement Setup

## 7.5 t<sub>ON(EN)</sub> and t<sub>OFF(EN)</sub>

Turn-on time is defined as the time taken by the output of the device to rise to 90% after the enable has risen past the logic threshold. The 90% measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-5 shows the setup used to measure turn-on time, denoted by the symbol  $t_{ON(EN)}$ .

Turn-off time is defined as the time taken by the output of the device to fall to 10% after the enable has fallen past the logic threshold. The 10% measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-5 shows the setup used to measure turn-off time, denoted by the symbol t<sub>OFF(FN)</sub>.

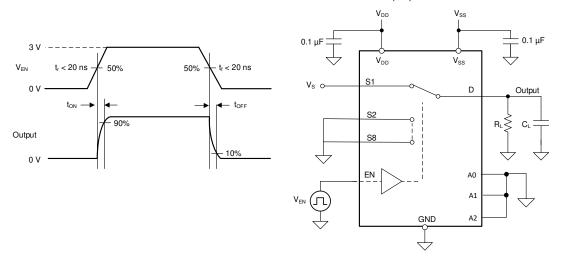


Figure 7-5. Turn-On and Turn-Off Time Measurement Setup

#### 7.6 Break-Before-Make

Break-before-make delay is a safety feature that prevents two inputs from connecting when the device is switching. The output first breaks from the on-state switch before making the connection with the next on-state switch. The time delay between the *break* and the *make* is known as break-before-make delay. Figure 7-6 shows the setup used to measure break-before-make delay, denoted by the symbol t<sub>OPEN(BBM)</sub>.

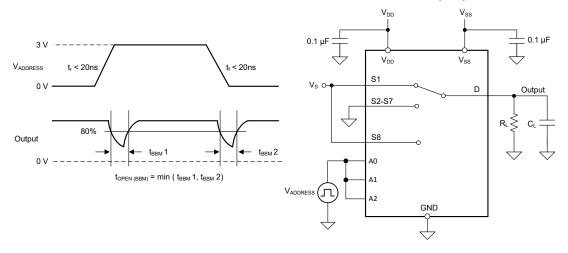


Figure 7-6. Break-Before-Make Delay Measurement Setup

Submit Document Feedback

# 7.7 t<sub>ON (VDD)</sub> Time

The  $t_{ON\ (VDD)}$  time is defined as the time taken by the output of the device to rise to 90% after the supply has risen past the supply threshold. The 90% measurement is used to provide the timing of the device turning on in the system. Figure 7-7 shows the setup used to measure turn on time, denoted by the symbol  $t_{ON\ (VDD)}$ .

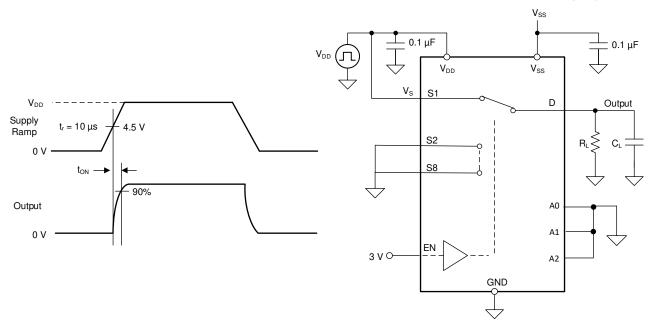


Figure 7-7. t<sub>ON (VDD)</sub> Time Measurement Setup

### 7.8 Propagation Delay

Propagation delay is defined as the time taken by the output of the device to rise or fall 50% after the input signal has risen or fallen past the 50% threshold. Figure 7-8 shows the setup used to measure propagation delay, denoted by the symbol  $t_{PD}$ .

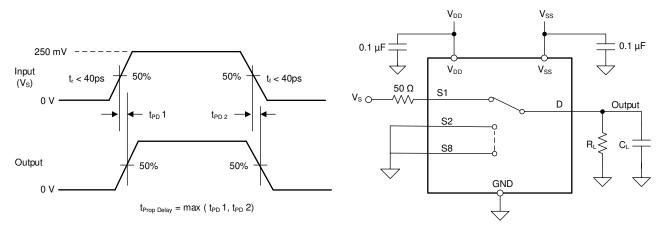


Figure 7-8. Propagation Delay Measurement Setup

### 7.9 Charge Injection

The TMUX6208 has a transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source or drain of the device is known as charge injection, and is denoted by the symbol Q<sub>INJ</sub>. Figure 7-9 shows the setup used to measure charge injection from source (Sx) to drain (D).

The TMUX6208 and have a transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source or drain of the device is known as charge injection, and is denoted by the symbol  $Q_{INJ}$ . Figure 7-9 shows the setup used to measure charge injection from source (Sx) to drain (D).

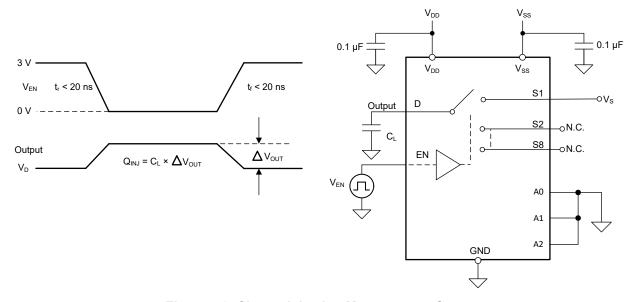


Figure 7-9. Charge-Injection Measurement Setup

#### 7.10 Off Isolation

Off isolation is defined as the ratio of the signal at the drain pin (D) of the device when a signal is applied to the source pin (Sx) of an off-channel. Figure 7-10 shows the setup used to measure, and the equation used to calculate off isolation.

Submit Document Feedback



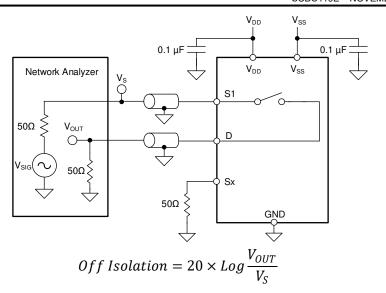


Figure 7-10. Off Isolation Measurement Setup

### 7.11 Crosstalk

Crosstalk is defined as the ratio of the signal at the drain pin (D) of a different channel, when a signal is applied at the source pin (Sx) of an on-channel. Figure 7-11 shows the setup used to measure and the equation used to calculate crosstalk.

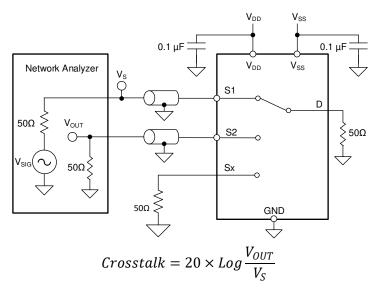


Figure 7-11. Crosstalk Measurement Setup

### 7.12 Bandwidth

Bandwidth is defined as the range of frequencies that are attenuated by less than 3 dB when the input is applied to the source pin (Sx) of an on-channel, and the output is measured at the drain pin (D) of the device. Figure 7-12 shows the setup used to measure bandwidth.

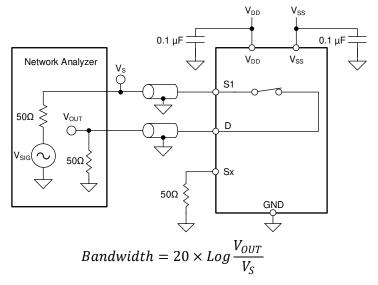


Figure 7-12. Bandwidth Measurement Setup

Submit Document Feedback

#### 7.13 THD + Noise

The total harmonic distortion (THD) of a signal is a measurement of the harmonic distortion, and is defined as the ratio of the sum of the powers of all harmonic components to the power of the fundamental frequency at the mux output. The on-resistance of the device varies with the amplitude of the input signal and results in distortion when the drain pin is connected to a low-impedance load. Total harmonic distortion plus noise is denoted as THD.

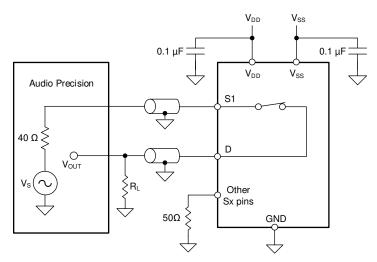


Figure 7-13. THD Measurement Setup

### 7.14 Power Supply Rejection Ratio (PSRR)

PSRR measures the ability of a device to prevent noise and spurious signals that appear on the supply voltage pin from coupling to the output of the switch. The DC voltage on the device supply is modulated by a sine wave of 620mVPP. The ratio of the amplitude of signal on the output to the amplitude of the modulated signal is the ACPSRR. A high ratio represents a high degree of tolerance to supply rail variation.

The below shows how the decoupling capacitors reduce high frequency noise on the supply pins. This helps stabilize the supply and immediately filter as much of the supply noise as possible.

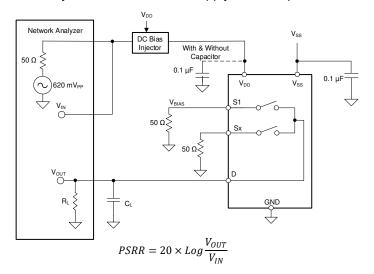



Figure 7-14. ACPSRR Measurement Setup

## 8 Detailed Description

#### 8.1 Overview

The TMUX6208 is an 8:1, 1-channel multiplexer and the TMUX6209 is a 4:1, 2 channel multiplexer. Each input is turned on or turned off based on the state of the address lines and enable pin.

### 8.2 Functional Block Diagram

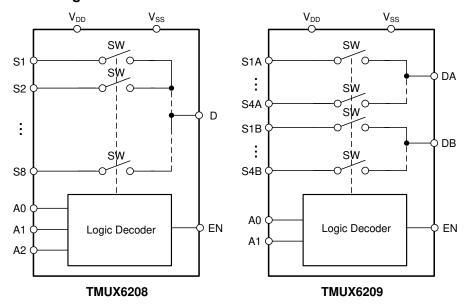

### 8.3 Feature Description

#### 8.3.1 Bidirectional Operation

The TMUX6208 and TMUX6209 conduct equally well from source (Sx) to drain (D) or from drain (D) to source (Sx). Each channel has very similar characteristics in both directions and supports both analog and digital signals.

#### 8.3.2 Rail-to-Rail Operation

The valid signal path input or output voltage for TMUX6208 and TMUX6209 ranges from  $V_{SS}$  to  $V_{DD}$ .

#### 8.3.3 1.8 V Logic Compatible Inputs

TMUX6208 and TMUX6209 support 1.8-V logic compatible control for all logic control inputs. 1.8-V logic level inputs allows the to interface with processors that have lower logic I/O rails and eliminates the need for an external translator, which saves both space and BOM cost. For more information on 1.8 V logic implementations refer to Simplifying Design with 1.8 V logic Muxes and Switches.

#### 8.3.4 Integrated Pull-Down Resistor on Logic Pins

The TMUX620x has internal weak pull-down resistors to GND to ensure the logic pins are not left floating. The value of this pull-down resistor is approximatly 4 M $\Omega$ , but is clamped to about 1  $\mu$ A at higher voltages. This feature integrates up to four external components and reduces system size and cost.

#### 8.3.5 Fail-Safe Logic

TMUX6208 and TMUX6209 support Fail-Safe Logic on the control input pins (EN and Ax) allowing it to operate up to 36 V, regardless of the state of the supply pins. This feature allows voltages on the control pins to be applied before the supply pin, protecting the device from potential damage. Fail-Safe Logic minimizes system complexity by removing the need for power supply sequencing on the logic control pins. For example, the Fail-Safe Logic feature allows the TMUX6208 and TMUX6209 logic input pins to ramp up to +36 V while V<sub>DD</sub>

Product Folder Links: TMUX6208 TMUX6209



and  $V_{SS}$  = 0 V. The logic control inputs are protected against positive faults of up to +36 V in powered-off condition, but do not offer protection against negative overvoltage conditions.

#### 8.3.6 Latch-Up Immune

Latch-Up is a condition where a low impedance path is created between a supply pin and ground. This condition is caused by a trigger (current injection or overvoltage), but once activated, the low impedance path remains even after the trigger is no longer present. This low impedance path may cause system upset or catastrophic damage due to excessive current levels. The Latch-Up condition typically requires a power cycle to eliminate the low impedance path.

The TMUX62xx family of devices are constructed on Silicon on Insulator (SOI) based process where an oxide layer is added between the PMOS and NMOS transistor of each CMOS switch to prevent parasitic structures from forming. The oxide layer is also known as an insulating trench and prevents triggering of latch up events due to overvoltage or current injections. The latch-up immunity feature allows the TMUX62xx family of switches and multiplexers to be used in harsh environments. For more information on latch-up immunity refer to *Using Latch Up Immune Multiplexers to Help Improve System Reliability*.

### 8.3.7 Ultra-Low Charge Injection

Figure 8-1 shows that the TMUX620x have a transmission gate topology. Any mismatch in the stray capacitance associated with the NMOS and PMOS causes an output level change whenever the switch is opened or closed.




Figure 8-1. Transmission Gate Topology

The TMUX620x contain specialized architecture to reduce charge injection on the Drain (D). To further reduce charge injection in a sensitive application, a compensation capacitor (Cp) can be added on the Source (Sx). This will ensure that excess charge from the switch transition will be pushed into the compensation capacitor on the Source (Sx) instead of the Drain (D). As a general rule of thumb, Cp should be 20x larger than the equivalent load capacitance on the Drain (D). Figure 8-2 shows charge injection variation with different compensation capacitors on the Source side. This plot was captured on the TMUX6219 as part of the TMUX62xx family with a 100pF load capacitance.




Figure 8-2. Charge Injection Compesation

#### 8.4 Device Functional Modes

When the EN pin of the TMUX6208 is pulled high, one of the switches is closed based on the state of the Ax pin. Similarly, when the EN pin of the TMUX6209 is pulled high, two of the switches are closed based on the state of the address lines. When the EN pin is pulled low, all of the switches are in an open state regardless of the state of the Ax pin. The control pins can be as high as 36V.

The TMUX6208 and TMUX6209 can be operated without any external components except for the supply decoupling capacitors. The EN and Ax pins have internal pull-down resistors of 4 M $\Omega$ . If unused, Ax and EN pins must be tied to GND in order to ensure the device does not consume additional current as highlighted in Implications of Slow or Floating CMOS Inputs. Unused signal path inputs (Sx or D) should be connected to GND.

### 8.5 Truth Tables

Table 8-1 shows the truth tables for the TMUX6208.

Table 8-1. TMUX6208 Truth Table

EN	A2	A1	A0	Selected Source Connected To Drain (D) Pin
0	X <sup>(1)</sup>	X	X	All sources are off (HI-Z)
1	0	0	0	S1
1	0	0	1	S2
1	0	1	0	S3
1	0	1	1	S4
1	1	0	0	S5
1	1	0	1	S6
1	1	1	0	S7
1	1	1	1	S8

(1) X denotes do not care.

Table 8-2 show the truth tables for the TMUX6209.

Table 8-2. TMUX6209 Truth Table

EN	A1	A0	Selected Source Connected To Drain (D) Pin
0	X <sup>(1)</sup>	×	All sources are off (HI-Z)
1	0	0	S1x
1	0	1	S2x
1	1	0	S3x
1	1	1	S4x

(1) X denotes do not care.

# 9 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

### 9.1 Application Information

The TMUX6208 and TMUX6209 are part of the precision switches and multiplexers family of devices. These devices operate with dual supplies ( $\pm 4.5$  V to  $\pm 18$  V), a single supply (4.5 V to 36 V), or asymmetric supplies (such as VDD = 12 V, VSS = -5 V), and offer true rail-to-rail input and output. The TMUX6208 and TMUX6209 offer low RON, low on and off leakage currents and ultra-low charge injection performance. These features make the TMUX62xx a family of precision, robust, high-performance analog multiplexers for high-voltage, industrial applications.

## 9.2 Typical Application

One example to take advantage of TMUX6208 performance is the implementation of multiplexed data aquisition front end for multiple input sensors. Applications such as analog input modules for programmable logic controllers (PLCs), data aquisition (DAQ), and seminconducter test systems commonly need to monitor multiple signals into a single ADC channel. The multiple inputs can come from different system voltages being monitored, or environemental sensors such as temperature or humidity. Figure 9-1 shows a simplified example of monitoring multiple inputs into a single ADC using a multiplexer.

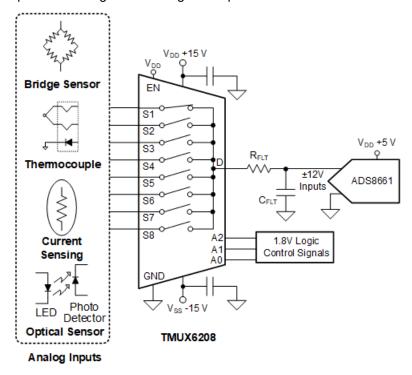


Figure 9-1. Multiplexed Data Aqcuisition Front End



### 9.2.1 Design Requirements

**Table 9-1. Design Parameters** 

PARAMETER	VALUE
Positive supply (VDD)	+15 V
Negative supply (V <sub>SS</sub> )	-15 V
Input / output signal range	-12 V to 12 V (limit of ADC)
Control logic thresholds	1.8 V compatible
Temperature range	-40°C to +125°C

#### 9.2.2 Detailed Design Procedure

The application shown in Figure 9-1 demonstrates how a multiplexer can be used to simplfy the signal chain and monitor multiple input signals to a single ADC channel. In this example the ADC (ADS8661) has software programmable input ranges up to ±12.288 V. The ADC also has overvotlage protection up to ±20 V which allows for the multiplexer to be powered with wider supply voltages than the input signal range to maximize on-resistance performance of the multiplexer, while still maintaining system level overvotlage protection beyond the usuable signal range. Both the multiplexer and the ADC are capable of operation in extended industrial temperature range of -40°C to +125°C allowing for use in a wider array of industrial systems.

Many SAR ADCs have an analog input structure that consists of a sampling switch and a sampling capacitor. Many signal chains will have a driver amplifier to help charge the input of the ADC to meet a fast system aquisition time. However a driver amplifier is not always needed to drive SAR ADCs. Figure 9-2 shows a typical diagram of a sensor driving the SAR ADC input directly after being passed through the multiplxer. A filter capacitor (C<sub>FLT</sub>) is connected to the input of the ADC to reduce the sampling charge injection and provides a charge bucket to quickly charge the internal sample-and-hold capacitor of the ADC.

The sensor block simplifies the device into a Thevenin equivalant voltage source ( $V_{TH}$ ) and resistance ( $R_{TH}$ ) which can be extracted from the device datasheets. Similarly the multixplexer can be thought of as a series resistance ( $R_{ON(MUX)}$ ) and capacitance ( $C_{ON(MUX)}$ ). To ensure maximum precison of the signal chain the system should be able to settle within 1/2 of an LSB within the acquisition time of the ADC. Figure 9-2 shows the time constant can be calculated. This equation highlights the importance of selecting a multiplexer with low on-resistance to further reduce the system time constant. Additionally low charge injection performance of the multiplexer is helpful to reduce conversion errors and improve accuracy of the measurements.

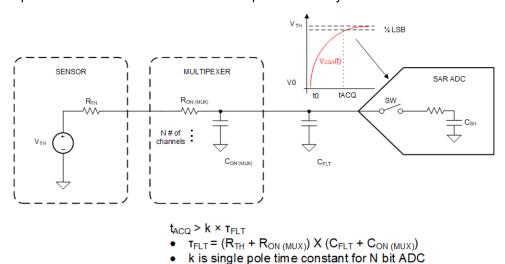


Figure 9-2. Driving SAR ADC

Submit Document Feedback

### 9.2.3 Application Curve

The low on and off leakage currents of TMUX620x and ultra-low charge injection performance make this device ideal for implementing high precision industrial systems. Figure 9-3 shows the plot for the charge injection versus source voltage for the TMUX6208.




Figure 9-3. Charge Injection vs Drain Voltage

### 9.3 Power Supply Recommendations

The TMUX6208 and TMUX6209 operate across a wide supply range of of  $\pm 4.5$  V to  $\pm 18$  V (4.5 V to 36 V in single-supply mode). The device also perform well with asymmetrical supplies such as  $V_{DD}$  = 12 V and  $V_{SS}$  = -5 V.

Power-supply bypassing improves noise margin and prevents switching noise propagation from the supply rails to other components. Good power-supply decoupling is important to achieve optimum performance. For improved supply noise immunity, use a supply decoupling capacitor ranging from 0.1  $\mu$ F to 10  $\mu$ F at both the V<sub>DD</sub> and V<sub>SS</sub> pins to ground. Place the bypass capacitors as close to the power supply pins of the device as possible using low-impedance connections. TI recommends using multi-layer ceramic chip capacitors (MLCCs) that offer low equivalent series resistance (ESR) and inductance (ESL) characteristics for power-supply decoupling purposes. For very sensitive systems, or for systems in harsh noise environments, avoiding the use of vias for connecting the capacitors to the device pins may offer superior noise immunity. The use of multiple vias in parallel lowers the overall inductance and is beneficial for connections to ground and power planes. Always ensure the ground (GND) connection is established before supplies are ramped.

#### 9.4 Layout

## 9.4.1 Layout Guidelines

When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self–inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. Figure 9-4 shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.



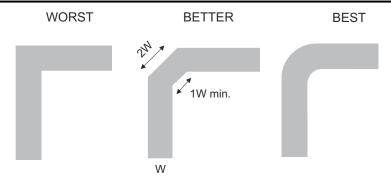


Figure 9-4. Trace Example

Route high-speed signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points, through-hole pins are not recommended at high frequencies.

Figure 9-5 and Figure 9-6 illustrate an example of a PCB layout with the TMUX6208. Some key considerations are:

- For reliable operation, connect a decoupling capacitor ranging from 0.1 μF to 10 μF between VDD/VSS and GND. We recommend a 0.1 μF and 1 μF capacitor, placing the lowest value capacitor as close to the pin as possible. Make sure that the capacitor voltage rating is sufficient for the supply voltage.
- · Keep the input lines as short as possible.
- Use a solid ground plane to help reduce electromagnetic interference (EMI) noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when necessary.
- Using multiple vias in parallel will lower the overall inductance and is beneficial for connection to ground planes.

Submit Document Feedback



### 9.4.2 Layout Example

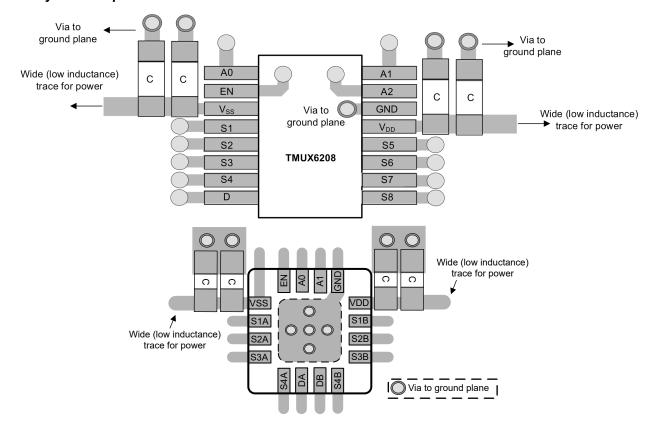


Figure 9-5. TMUX6208 Layout Example

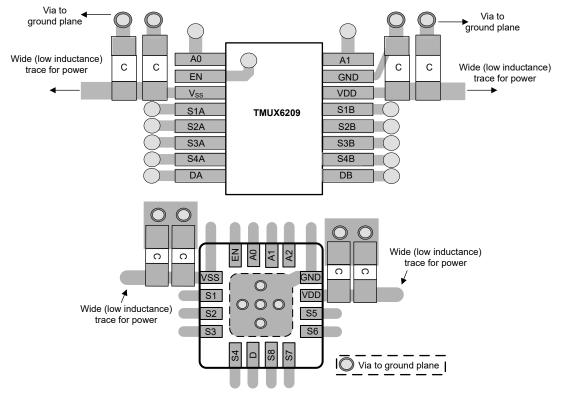


Figure 9-6. TMUX6209 Layout Example



## 10 Device and Documentation Support

### **10.1 Documentation Support**

#### 10.1.1 Related Documentation

- Texas Instruments, Improve Stability Issues with Low CON Multiplexers application brief.
- · Texas Instruments, Improving Signal Measurement Accuracy in Automated Test Equipment application brief
- Texas Instruments, Sample & Hold Glitch Reduction for Precision Outputs Reference Design reference guide.
- Texas Instruments, Simplifying Design with 1.8 V logic Muxes and Switches application brief.
- Texas Instruments, System-Level Protection for High-Voltage Analog Multiplexers application reports.
- Texas Instruments, *True Differential, 4 x 2 MUX, Analog Front End, Simultaneous-Sampling ADC Circuit* application reports.
- Texas Instruments, QFN/SON PCB Attachment application reports.
- Texas Instruments, Quad Flatpack No-Lead Logic Packages application reports.
- Texas Instruments, Using Latch Up Immune Multiplexers to Help Improve System Reliability application reports.

### 10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 10.3 Support Resources

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

### 10.4 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

#### 10.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 10.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

### 11 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

С	hanges from Revision D (January 2022) to Revision E (July 2024)	Page
•	Updated HBM ESD for all packages	5
	Updated IIH max specification	

Product Folder Links: TMUX6208 TMUX6209



Changes from Revision C (August 2021) to Revision D (January 2022)					
• Up	dated the Truth Tables section	30			
Chan	ges from Revision B (April 2021) to Revision C (August 2021)	Page			
	anged the status of the QFN package for the TMUX6208 and TMUX6209 from: preview to				
<ul> <li>Ad</li> </ul>	ded ESD detail for RUM package	5			
	ded the Integrated Pull-Down Resistor on Logic Pins section				
	dated the Ultra-Low Charge Injection section				
<ul> <li>Up</li> </ul>	dated the TMUX620x Layout Example figures in the Layout Example section	35			
Chan	ges from Revision A (January 2021) to Revision B (April 2021)	Page			
	ded thermal information for QFN package				
• Ad		6			
<ul> <li>Ad</li> </ul>	ded I <sub>DC</sub> specs for QFN package in <i>Source or Drain Continuous Current</i> tabledated V <sub>DD</sub> rise time value from 100ns to 1µs in T <sub>ON(VDD)</sub> test condition	6			
Chan	ges from Revision A (January 2021) to Revision B (April 2021)				

## 12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Changed the document status From: Advanced Information To: Production Data ......1

8-Nov-2025

www.ti.com

### PACKAGING INFORMATION

Orderable part number	Status (1)	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
TMUX6208PWR	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	X208
TMUX6208PWR.B	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	X208
TMUX6208RUMR	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X208
TMUX6208RUMR.B	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X208
TMUX6209PWR	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	X209
TMUX6209PWR.B	Active	Production	TSSOP (PW)   16	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	X209
TMUX6209RUMR	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X209
TMUX6209RUMR.B	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X209
TMUX6209RUMRG4	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X209
TMUX6209RUMRG4.B	Active	Production	WQFN (RUM)   16	3000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TMUX X209

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 8-Nov-2025

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Jul-2025

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

## QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TMUX6208PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TMUX6208RUMR	WQFN	RUM	16	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
TMUX6209PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TMUX6209RUMR	WQFN	RUM	16	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2
TMUX6209RUMRG4	WQFN	RUM	16	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2



www.ti.com 24-Jul-2025




## \*All dimensions are nominal

7 III GIII I GII GII GII GII GII GII GII							
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TMUX6208PWR	TSSOP	PW	16	2000	353.0	353.0	32.0
TMUX6208RUMR	WQFN	RUM	16	3000	367.0	367.0	35.0
TMUX6209PWR	TSSOP	PW	16	2000	353.0	353.0	32.0
TMUX6209RUMR	WQFN	RUM	16	3000	367.0	367.0	35.0
TMUX6209RUMRG4	WQFN	RUM	16	3000	367.0	367.0	35.0

4 x 4, 0.65 mm pitch


PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

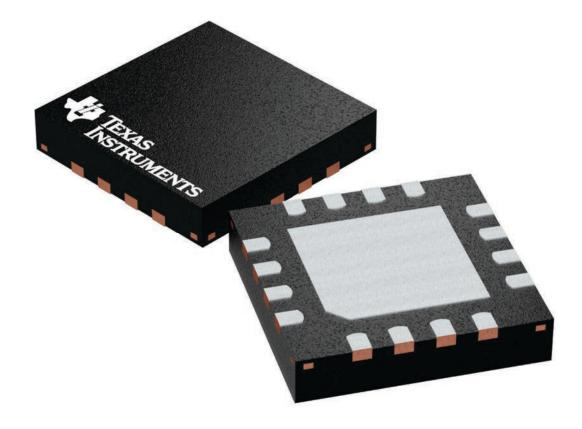



PLASTIC QUAD FLATPACK - NO LEAD

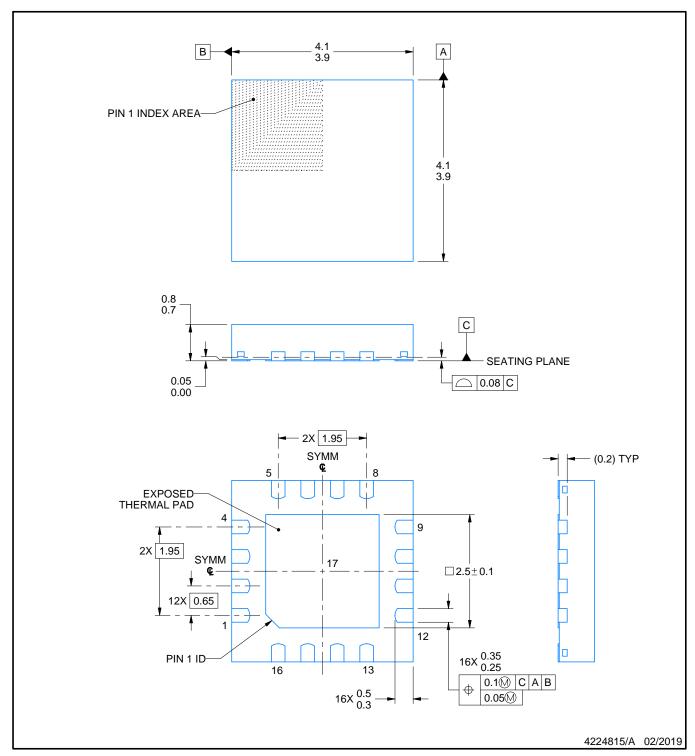


## NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
  2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD

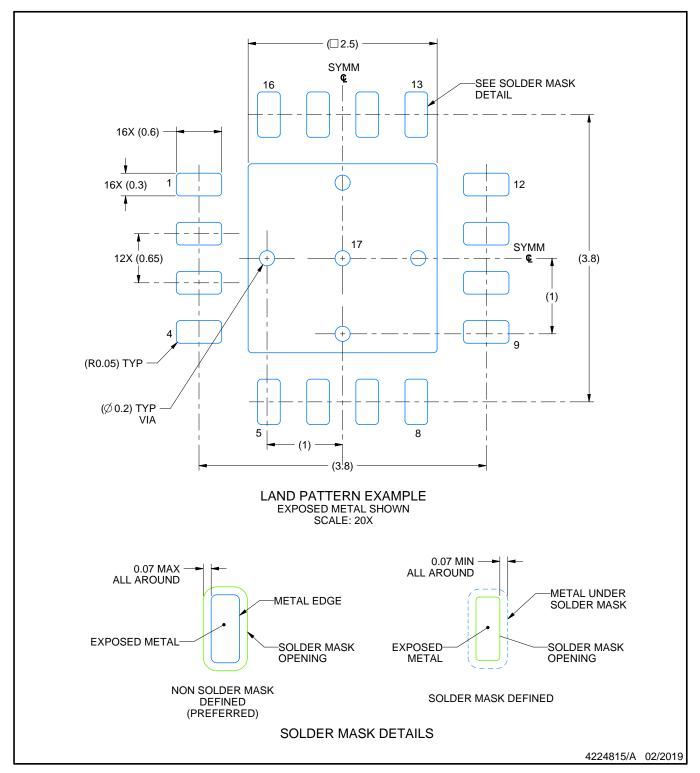


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLATPACK - NO LEAD

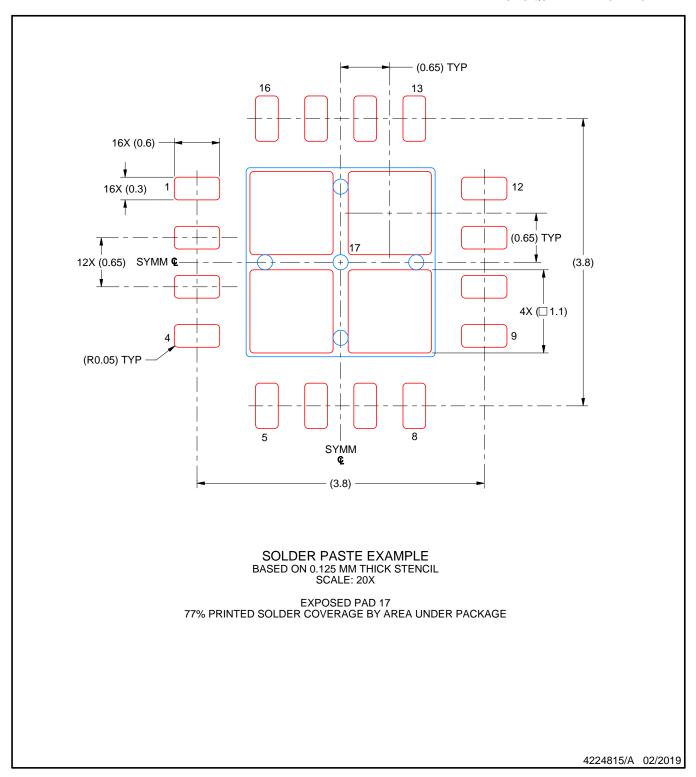

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SMALL OUTLINE PACKAGE



## NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025