

TPD3S714-Q1 Automotive USB 2.0 Interface Protection With Short-to-Battery and Short-Circuit Protection

1 Features

- AEC-Q100 Qualified (Grade 1)
 - Operating Temperature Range : -40°C to $+125^{\circ}\text{C}$
- **Functional Safety-Capable**
 - Documentation available to aid functional safety system design
- Short-to-Battery (up to 18 V) and Short-to-Ground Protection on $V_{\text{BUS_CON}}$
- Short-to-Battery (up to 18 V) and Short-to- V_{BUS} Protection on $\text{VD}+$, $\text{VD}-$
- IEC 61000-4-2 ESD Protection on $V_{\text{BUS_CON}}$, $\text{VD}+$, $\text{VD}-$
 - $\pm 8\text{-kV}$ Contact Discharge
 - $\pm 15\text{-kV}$ Air Gap Discharge
- ISO 10605 330-pF, 330- Ω ESD Protection on $V_{\text{BUS_CON}}$, $\text{VD}+$, $\text{VD}-$
 - $\pm 8\text{-kV}$ Contact Discharge
 - $\pm 15\text{-kV}$ Air Gap Discharge
- Low R_{ON} nFET V_{BUS} Switch (63-m Ω Typical)
- High Speed Data Switches (1-GHz, -3-dB Bandwidth)
- Hiccup Current Limit
 - 550-mA Overcurrent Limit (Minimum)
- Fast Overvoltage Response Time
 - 2- μs Typical (V_{BUS} Switch)
 - 200-ns Typical (Data Switches)
- Integrated Input Enable for V_{BUS} , $\text{VD}+$, $\text{VD}-$
- Fault Output Signal
- Thermal Shutdown Feature
- 16-Pin SSOP Package (4.9 mm \times 3.9 mm)

2 Applications

- End Equipment
 - Head Units
 - Rear Seat Entertainment
 - Telematics
 - USB Hub
 - Navigation Modules
 - Media Interface
- Interfaces
 - USB 2.0

3 Description


The TPD3S714-Q1 is a single-chip solution for short-to-battery, short-circuit, and ESD protection for the USB connector's V_{BUS} and data lines in automotive USB hubs, head units, rear seat entertainment, telematics, and media interface applications. The integrated data switches provide best-in-class bandwidth for minimal signal degradation during USB short-to-battery events. The high bandwidth of 1 GHz allows for a clean USB 2.0 high-speed (480 Mbps) eye diagram with the long captive cables that are common in the automotive USB environment

The short-to-battery protection isolates the internal system circuits from any overvoltage conditions at the $V_{\text{BUS_CON}}$, $\text{VD}+$, and $\text{VD}-$ pins. On these pins, the TPD3S714-Q1 can handle overvoltages up to 18 V for hot plug and DC events. The overvoltage protection circuit provides the most reliable short-to-battery isolation in the industry, shutting off the switches and protecting the upstream transceiver from harmful voltage and current spikes. The $V_{\text{BUS_CON}}$ pin also provides an accurate current limited load switch up to 0.5 A. The overcurrent protection automatically limits current to prevent drooping of the upstream rail during short-to-ground events. Additionally, this device also integrates system level IEC 61000-4-2 and ISO 10605 ESD protection on $V_{\text{BUS_CON}}$, $\text{VD}+$, and $\text{VD}-$ pins which removes the need to provide external high-voltage, low capacitance ESD diodes

Device Information (1)

| PART NUMBER | PACKAGE | BODY SIZE (NOM) |
|-------------|-----------|--------------------------|
| TPD3S714-Q1 | SSOP (16) | 4.90 mm \times 3.90 mm |

- (1) For all available packages, see the orderable addendum at the end of the data sheet.

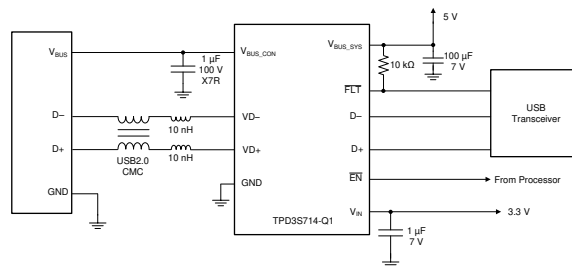

Copyright © 2016, Texas Instruments Incorporated

Typical Application Schematic



Table of Contents

| | | | |
|--|-----------|--|-----------|
| 1 Features | 1 | 8.4 Device Functional Modes..... | 16 |
| 2 Applications | 1 | 9 Application and Implementation | 17 |
| 3 Description | 1 | 9.1 Application Information..... | 17 |
| 4 Revision History | 2 | 9.2 Typical Application..... | 17 |
| 5 Pin Configuration and Functions | 3 | 10 Power Supply Recommendations | 20 |
| 6 Specifications | 4 | 10.1 V_{BUS} Path..... | 20 |
| 6.1 Absolute Maximum Ratings..... | 4 | 10.2 V_{IN} Pin..... | 20 |
| 6.2 ESD Ratings—AEC Specification..... | 4 | 11 Layout | 21 |
| 6.3 ESD Ratings—IEC Specification..... | 4 | 11.1 Layout Guidelines..... | 21 |
| 6.4 ESD Ratings—ISO Specification..... | 4 | 11.2 Layout Example..... | 21 |
| 6.5 Recommended Operating Conditions..... | 4 | 12 Device and Documentation Support | 22 |
| 6.6 Thermal Information..... | 5 | 12.1 Documentation Support..... | 22 |
| 6.7 Electrical Characteristics..... | 5 | 12.2 Receiving Notification of Documentation Updates..... | 22 |
| 6.8 Timing Requirements..... | 8 | 12.3 Support Resources..... | 22 |
| 6.9 Typical Characteristics..... | 9 | 12.4 Trademarks..... | 22 |
| 7 Parameter Measurement Information | 12 | 12.5 Electrostatic Discharge Caution..... | 22 |
| 8 Detailed Description | 14 | 12.6 Glossary..... | 22 |
| 8.1 Overview..... | 14 | 13 Mechanical, Packaging, and Orderable Information | 22 |
| 8.2 Functional Block Diagram..... | 14 | | |
| 8.3 Feature Description..... | 14 | | |

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| | |
|--|-------------|
| Changes from Revision B (August 2017) to Revision C (August 2020) | Page |
| • Updated the numbering format for tables, figures and cross-references throughout the document..... | 1 |
| • Added functional safety link to the Features section..... | 1 |
| Changes from Revision A (April 2016) to Revision B (August 2017) | Page |
| • Updated ESD Protection on V_{BUS_CON}, $VD+$, $VD-$ section..... | 15 |
| Changes from Revision * (January 2016) to Revision A (April 2016) | Page |
| • Updated Typical Application Schematic, Figure 7-1 and Figure 7-2 | 1 |
| • Updated Electrical Characteristics table..... | 1 |
| • Added content to Short-to-Battery Tolerance | 1 |
| • Updated IEC waveform graphs with cleaner data in Typical Characteristics | 1 |

5 Pin Configuration and Functions

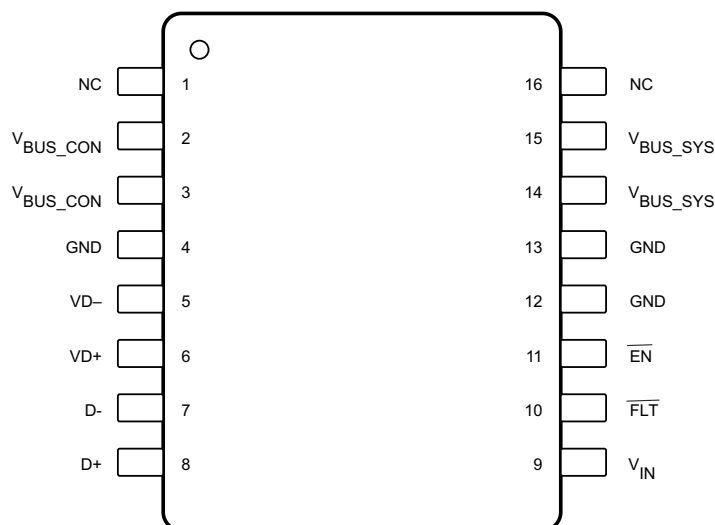


Figure 5-1. DBQ Package 16-Pin SSOP Top View

Pin Functions

| PIN | | TYPE | DESCRIPTION |
|-----|----------------------|--------|---|
| NO. | NAME | | |
| 1 | NC | NC | No connect, leave floating or connect to ground. Do not connect to V _{BUS_CON} |
| 2 | V _{BUS_CON} | O | Connect to USB connector V _{BUS_CON} ; provides IEC 61000-4-2 ESD protection |
| 3 | | | |
| 4 | GND | Ground | Connect to PCB ground plane |
| 5 | VD- | I/O | Connect to USB connector D-; provides IEC 61000-4-2 ESD protection |
| 6 | VD+ | I/O | Connect to USB connector D+; provides IEC 61000-4-2 ESD protection |
| 7 | D- | I/O | Connect to internal D- transceiver |
| 8 | VD+ | I/O | Connect to internal D+ transceiver |
| 9 | V _{IN} | I | Connect to 3.3-V I/O. Controls the OVP threshold for VD+/VD- |
| 10 | FLT | O | Open-Drain fault pin. Refer device description for operation |
| 11 | EN | I | Enable Active-Low Input. Drive EN low to enable the device. Drive EN high to disable the device |
| 12 | GND | Ground | Connect to PCB ground plane |
| 13 | | | |
| 14 | V _{BUS_SYS} | I | Connect to internal V _{BUS} plane |
| 15 | | | |
| 16 | NC | NC | No connect, leave floating or connect to ground. Do not connect to V _{BUS_CON} |

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾ ⁽²⁾

| | | MIN | MAX | UNIT |
|----------------------|--|------|-----------------------|------|
| V _{BUS_CON} | Supply voltage from USB connector | −0.3 | 18 | V |
| V _{BUS_SYS} | Internal supply DC voltage rail on the PCB | −0.3 | 6 | V |
| VD+, VD− | Voltage range from connector-side USB data lines | −0.3 | 18 | V |
| D+, D− | Voltage range for internal USB data lines | −0.3 | V _{IN} + 0.3 | V |
| V _{IN} | Voltage range for V _{IN} supply input | −0.3 | 4 | V |
| EN | Voltage on enable pin | | 7 | V |
| T _A | Operating free air temperature | −40 | 125 | °C |
| T _{STG} | Storage temperature | −65 | 150 | °C |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.

6.2 ESD Ratings—AEC Specification

| | | VALUE | UNIT |
|--------------------|-------------------------|---|-------|
| V _(ESD) | Electrostatic discharge | Human-body model (HBM), per AEC Q100-002 ⁽¹⁾ | ±4000 |
| | | Charged-device model (CDM), per AEC Q100-011 | ±1500 |

- (1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 ESD Ratings—IEC Specification

| | | | VALUE | UNIT |
|--------------------|-------------------------|---|----------------------------------|--------|
| V _(ESD) | Electrostatic discharge | IEC 61000-4-2, V _{BUS_CON} , VD+, VD− pins | Contact discharge ⁽¹⁾ | ±8000 |
| | | | Air-gap discharge ⁽¹⁾ | ±15000 |

- (1) See the [ESD System Test Setup](#) diagram for details on system level ESD testing setup.

6.4 ESD Ratings—ISO Specification

| | | | VALUE | UNIT |
|--------------------|-------------------------|---|----------------------------------|--------|
| V _(ESD) | Electrostatic discharge | ISO 10605 (330 pF, 330 Ω), V _{BUS_CON} , VD+, VD− pins | Contact discharge ⁽¹⁾ | ±8000 |
| | | | Air-gap discharge ⁽¹⁾ | ±15000 |

- (1) See the [ESD System Test Setup](#) diagram for details on system level ESD testing setup.

6.5 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

| | | MIN | NOM | MAX | UNIT |
|----------------------|--|------|--------------------------|-----------------------|------|
| V _{BUS_CON} | Supply voltage from USB connector | | | 5.25 | V |
| V _{BUS_SYS} | Internal supply DC voltage rail on the PCB | 4.75 | | 5.25 | V |
| VD+, VD− | Voltage range from connector-side USB data lines | 0 | | V _{IN} + 0.3 | V |
| D+, D− | Voltage range for internal USB data lines | 0 | | V _{IN} + 0.3 | V |
| V _{IN} | Voltage range for V _{IN} supply | 3 | | 3.6 | V |
| I _{BUS} | Current through V _{BUS} switch | | | 500 | mA |
| EN | Voltage range for enable | 0 | | 5.9 | V |
| C _{SYS} | Input capacitance ⁽¹⁾ | | V _{BUS_SYS} pin | 100 | μF |

6.5 Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

| | | | MIN | NOM | MAX | UNIT |
|-------------------|--|--------------------------|-----|-----|-----|------|
| C _{LOAD} | Output load capacitance ⁽¹⁾ | V _{BUS_CON} pin | 1 | | | μF |
| C _{VIN} | V _{IN} capacitance ⁽¹⁾ | V _{IN} pin | 1 | | | μF |

(1) See Figure 9-1 for configuration details

6.6 Thermal Information

| THERMAL METRIC ⁽¹⁾ | | TPD3S714-Q1 | UNIT |
|-------------------------------|--|-------------|------|
| | | DBQ (SSOP) | |
| | | 16 PINS | |
| θ _{JA} | Junction-to-ambient thermal resistance | 98.8 | °C/W |
| θ _{JCTop} | Junction-to-case (top) thermal resistance | 48 | °C/W |
| θ _{JB} | Junction-to-board thermal resistance | 41.6 | °C/W |
| ψ _{JT} | Junction-to-top characterization parameter | 8.5 | °C/W |
| ψ _{JB} | Junction-to-board characterization parameter | 41.2 | °C/W |
| θ _{JCbot} | Junction-to-case (bottom) thermal resistance | N/A | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.7 Electrical Characteristics

over operating free-air temperature range, $\overline{EN} = 0$ V, V_{BUS_SYS} = 5 V, V_{IN} = 3.3 V, VD+/VD–/D+/D–/V_{BUS_CON} = float (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | | MIN | TYP | MAX | UNIT |
|------------------------------|--|---|--|-----|-----|-----|------|
| SUPPLY CURRENT CONSUMPTION | | | | | | | |
| I _{VBUS_SLEEP} | V _{BUS} sleep current consumption | Measured at V _{BUS_SYS} pin, $\overline{\text{EN}}$ = 5 V | | | 45 | 150 | μA |
| I _{VBUS} | V _{BUS} operating current consumption | Measured at V _{BUS_SYS} pin | | | 285 | 380 | μA |
| I _{VIN} | Leakage current for V _{IN} | Measured at V _{IN} pin, V _{IN} = 3.6 V | | | 12 | 25 | μA |
| I _{ON(LEAK)} | Leakage through V _{BUS} while shorted to battery and powered on | Measured flowing in to V _{BUS_SYS} pin, V _{BUS_SYS} = 5 V, V _{BUS_CON} = 18 V | | | | 120 | μA |
| I _{OFF(LEAK)} | Leakage through V _{BUS} while shorted to battery and unpowered | Measured flowing out of V _{BUS_SYS} pin, V _{BUS_SYS} = 0 V, V _{BUS_CON} = 18 V | | | | 50 | μA |
| I _{VD(OFF_LEAK)} | Leakage into data path while shorted to battery and unpowered | Measured flowing in to VD+ or VD– pins, V _{BUS_SYS} = 0 V, VD+ or VD– = 18 V, V _{IN} = 0 V, D+/D– = 0 V | | | | 80 | μA |
| I _{VD(ON_LEAK)} | Leakage into data path while shorted to battery and powered on | Measured flowing in to VD+ or VD– pins, V _{BUS_SYS} = 5 V, VD+ or VD– = 18 V, D+/D– = 0 V | | | | 80 | μA |
| V _{IN} PIN | | | | | | | |
| V _{UVLO(RISING)} | Undervoltage lockout rising for V _{IN} | V _{IN} | Ramp V _{IN} down until $\overline{\text{FLT}}$ is deasserted, $\overline{\text{EN}}$ = 5 V | 2.6 | 2.7 | 2.9 | V |
| V _{UVLO(FALLING)} | Undervoltage lockout falling for V _{IN} | | Ramp V _{IN} until $\overline{\text{FLT}}$ is asserted, $\overline{\text{EN}}$ = 5 V | 2.5 | 2.6 | 2.8 | |
| EN, FLT PINS | | | | | | | |
| V _{IH} | High-level input voltage | EN | Set $\overline{\text{EN}}$ = 0 V; Sweep EN to 1.4 V; Measure when $\overline{\text{FLT}}$ is asserted | 1.2 | | | V |
| V _{IL} | Low-level input voltage | $\overline{\text{EN}}$ | Set $\overline{\text{EN}}$ = 3.3 V; Sweep $\overline{\text{EN}}$ from 3.3 V to 0.5 V; Measure when $\overline{\text{FLT}}$ is deasserted | | | 0.8 | V |
| I _{IL} | Input leakage current | EN | V _(EN) = 3.3 V ; Measure Current into EN pin | | | 1 | μA |
| V _{OL} | Low-level output voltage | FLT | I _{OL} = 3 mA | | | 0.4 | V |
| OCP CIRCUIT—V _{BUS} | | | | | | | |
| I _{LIM} | Overcurrent limit | V _{BUS} | Progressively load V _{BUS_CON} until device asserts FLT | 550 | 700 | 850 | mA |
| OVERTEMPERATURE PROTECTION | | | | | | | |

6.7 Electrical Characteristics (continued)

over operating free-air temperature range, $\overline{EN} = 0$ V, $V_{BUS_SYS} = 5$ V, $V_{IN} = 3.3$ V, $VD+/VD-/D+/D-/V_{BUS_CON} =$ float (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------|--|--|-----|-----|-----|------|
| $T_{SD(RISING)}$ | The rising overtemperature protection shutdown threshold | $V_{BUS_SYS} = 5$ V, $\overline{EN} = 0$ V, No Load on V_{BUS_CON} , T_A stepped up until \overline{FLT} is asserted | 150 | 165 | 180 | °C |
| $T_{SD(FALLING)}$ | The falling overtemperature protection shutdown threshold | $V_{BUS_SYS} = 5$ V, $\overline{EN} = 0$ V, No Load on V_{BUS_CON} , T_A stepped down from $T_{SD(RISING)}$ until \overline{FLT} is deasserted | 125 | 130 | 140 | °C |
| $T_{SD(HYST)}$ | The overtemperature protection shutdown threshold hysteresis | $T_{SD(RISING)} - T_{SD(FALLING)}$ | 10 | 35 | 55 | °C |

OVP CIRCUIT— V_{BUS}

| | | | | | | | | | |
|--------------------------|---|----------------|--|--|--|------|-----|------|----|
| $V_{OVP(RISING)}$ | Input overvoltage protection threshold | V_{BUS_CON} | Increase V_{BUS_CON} from 5 V to 7 V. Measure when \overline{FLT} is asserted | | | 5.4 | 5.6 | 5.8 | V |
| $V_{HYS(OVP)}$ | Hysteresis on OVP | V_{BUS_CON} | Difference between rising and falling OVP thresholds on V_{BUS_CON} | | | 50 | | | mV |
| $T_{OVP(FALLING)}$ | Input overvoltage protection threshold | V_{BUS_CON} | Decrease V_{BUS_CON} from 7 V to 5 V. Measure when \overline{FLT} is deasserted | | | 5.36 | | 5.74 | V |
| $V_{UVLO(SYS_RISING)}$ | Undervoltage lockout rising for V_{BUS_SYS} | V_{BUS_SYS} | V_{BUS_SYS} voltage rising from 0 V to 5 V | | | 3.1 | 3.3 | 3.6 | V |
| $V_{HYS(UVLO_SYS)}$ | V_{BUS_SYS} UVLO hysteresis | V_{BUS_SYS} | Difference between rising and falling UVLO thresholds on V_{BUS_SYS} | | | 50 | 75 | 100 | mV |
| $V_{UVLO(SYS_FALLING)}$ | Undervoltage lockout falling for V_{BUS_SYS} | V_{BUS_SYS} | V_{BUS_SYS} voltage falling from 7 V to 3 V | | | 3 | 3.2 | 3.5 | V |
| $V_{SHRT(RISING)}$ | Short-to-ground comparator rising threshold | V_{BUS_CON} | Increase V_{BUS_CON} voltage from 0 V until the device transitions from the short-circuit to over-current mode of operation | | | 2.5 | 2.6 | 2.7 | V |
| $V_{SHRT(FALLING)}$ | Short-to-ground comparator falling threshold | V_{BUS_CON} | Set $V_{BUS_SYS} = 5$ V; $V_{IN} = 3.3$ V; $\overline{EN} = 0$ V; Decrease V_{BUS_CON} voltage from 5 V until the device transitions from the overcurrent to short-circuit mode of operation | | | 2.4 | 2.5 | 2.6 | V |
| $V_{SHRT(HYST)}$ | Short-to-ground comparator hysteresis | V_{BUS_CON} | Difference between $V_{SHRT(RISING)}$ and $V_{SHRT(FALLING)}$ | | | 100 | 125 | 150 | mV |
| I_{SHRT} | Short-to-ground current source | V_{BUS_CON} | Current sourced from V_{BUS_SYS} when device is in short-circuit mode | | | 150 | | 350 | mA |

OVP CIRCUIT— $VD+/VD-$

| | | | | | | | | | |
|--------------------|--|-----------|--|--|--|------------------|-----------------|------------------|----|
| $V_{OVP(RISING)}$ | Input overvoltage protection threshold | $VD+/VD-$ | Increase $VD+$ or $VD-$ (with $D+$ and $D-$) from 3.3 V to 4.5 V. Measure the value at which \overline{FLT} is asserted | | | $V_{IN} + 0.6$ | $V_{IN} + 0.8$ | $V_{IN} + 1$ | V |
| $V_{HYS(OVP)}$ | Hysteresis on OVP | $VD+/VD-$ | Difference between rising and falling OVP thresholds on $VD+/VD-$ | | | 50 | | | mV |
| $V_{OVP(FALLING)}$ | Input overvoltage protection threshold | $VD+/VD-$ | Decrease $VD+$ or $VD-$ (with $D+$ or $D-$) from 4.5 V to 2 V. Measure the value at \overline{FLT} is deasserted | | | $V_{IN} + 0.525$ | $V_{IN} + 0.75$ | $V_{IN} + 0.975$ | V |

SHORT-TO-BATTERY

| | | | | | | | | | |
|-------------------|--|----------------|--|--|--|--|----|--|---|
| $V_{(VBUS_STB)}$ | V_{BUS} hotplug short-to-battery tolerance | V_{BUS_CON} | Charge battery-equivalent capacitor to test voltage then discharge to pin under test through a 1-meter, 18-gauge wire. (See Figure 7-1 for more details) | | | | 18 | | V |
| $V_{(DATA_STB)}$ | Data line hotplug short-to-battery tolerance | $VD+/VD-$ | | | | | 18 | | V |

DATA LINE SWITCHES— $VD+$ to $D+$ or $VD-$ to $D-$

| | | | | | | | | | |
|----------------|---------------------------|--|--|--|--|-----|-----|--|----------|
| C_{ON} | Equivalent on capacitance | | Capacitance of $D+/D-$ switches when enabled - measure on connector side across bias voltage 0 V to 0.4 V | | | 6.2 | | | pF |
| R_{ON} | On resistance | | Measure resistance between $D+$ and $VD+$ or $D-$ and $VD-$, voltage between 0 and 0.4 V | | | 4 | 6.5 | | Ω |
| $R_{ON(Flat)}$ | On resistance flatness | | Measure resistance between $D+$ and $VD+$ or $D-$ and $VD-$, sweep voltage between 0 V and 0.4 V | | | 0.2 | 1 | | Ω |
| BW_{ON} | On bandwidth (–3 dB) | | Measure S_{21} bandwidth from $D+$ to $VD+$ or $D-$ to $VD-$ with voltage swing = 400 mVpp, $V_{CM} = 0.2$ V | | | 860 | | | MHz |

6.7 Electrical Characteristics (continued)

over operating free-air temperature range, $\overline{EN} = 0\text{ V}$, $V_{BUS_SYS} = 5\text{ V}$, $V_{IN} = 3.3\text{ V}$, $VD+/VD-/D+/D-/V_{BUS_CON} = \text{float}$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|--------------------------|-----------------------------|--|-----|------|-------|------|
| BW _{ON_DIFF} | On bandwidth (–3 dB) | Measure S _{DD21} bandwidth from D+ to VD+ and D– to VD– with voltage swing = 800 mVpp differential, V _{CM} = 0.2 V | | 1050 | | MHz |
| X _{talk} | Crosstalk | Measure S ₂₁ bandwidth from D+ to VD– or D– to VD+ with voltage swing = 400 mVpp. Be sure to terminate open sides to 50 ohms. f = 480 MHz | | –34 | | dB |
| nFET SWITCH—VBus | | | | | | |
| R _(DISCHARGE) | Output discharge resistance | $\overline{EN} = 5\text{ V}$, Set $V_{BUS_CON} = 5\text{ V}$ and measure current flow to ground | | | 12500 | Ω |
| R _{ON} | Switch ON resistance | $V_{BUS_CON} = 5\text{ V}$, I _{OUT} = 0.5 A | | 63 | 150 | mΩ |

6.8 Timing Requirements

over operating free-air temperature range, $\overline{EN} = 0\text{ V}$, $V_{BUS_SYS} = 5\text{ V}$, $V_{IN} = 3.3\text{ V}$, $VD+/VD-/D+/D-/V_{BUS_CON} = \text{float}$ (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-----------------------------------|-----------------------------------|---|-----|-----|-----|---------------|
| ENABLE PIN | | | | | | |
| t_{ON} | Enable on time | Time between enable device until \overline{FLT} deasserts | | 13 | | ms |
| OVERCURRENT PROTECTION | | | | | | |
| t_{BLANK} | Overcurrent blanking time | Time from overcurrent condition until \overline{FLT} assertion and V_{BUS} FET turnoff | | | 2 | ms |
| t_{RETRY} | Overcurrent retry time | Time from overcurrent FET shut off until FET turns back on | | 100 | | ms |
| t_{RECV} | Overcurrent recovery time | Time from end of t_{RETRY} until \overline{FLT} deassertion if overcurrent condition is removed | | 8 | | ms |
| OVERVOLTAGE PROTECTION | | | | | | |
| $t_{OVP_response}$ | OVP response time – V_{BUS} | Measured from OVP Condition to FET turnoff | | 2 | 4 | μs |
| $t_{OVP_response}$ | OVP response time – data switches | Measured from OVP Condition to FET turnoff | | 200 | | ns |
| SHORT-TO-GROUND PROTECTION | | | | | | |
| t_{SHRT} | Short to ground response time | $C_{LOAD} = 0\text{ uF}$, Time from short condition until current falls below 120% of I_{SHRT} | | 2 | 4 | μs |

6.9 Typical Characteristics

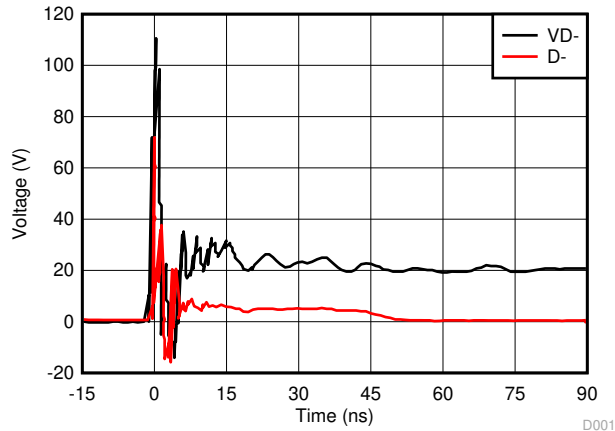


Figure 6-1. 8-kV IEC Contact Waveform

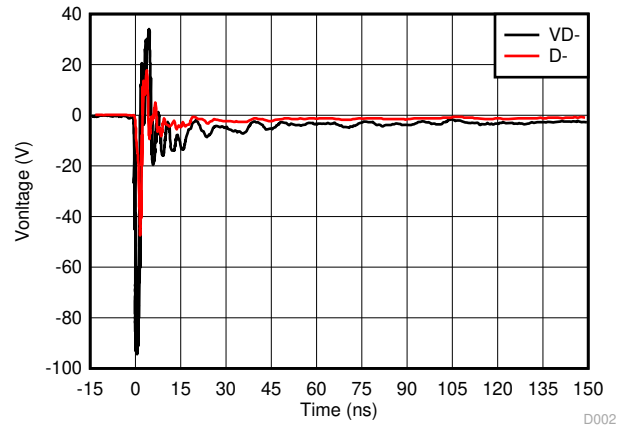


Figure 6-2. -8-kV IEC Contact Waveform

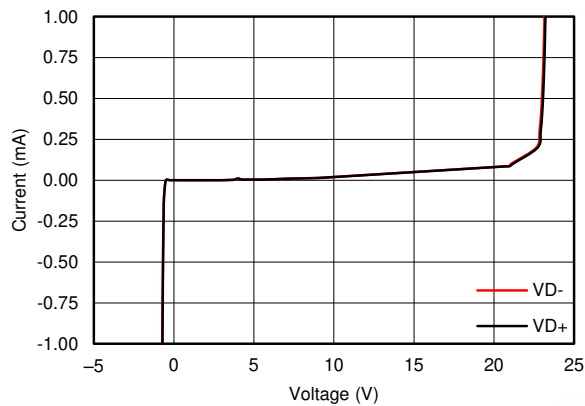


Figure 6-3. Data Line I-V Curve

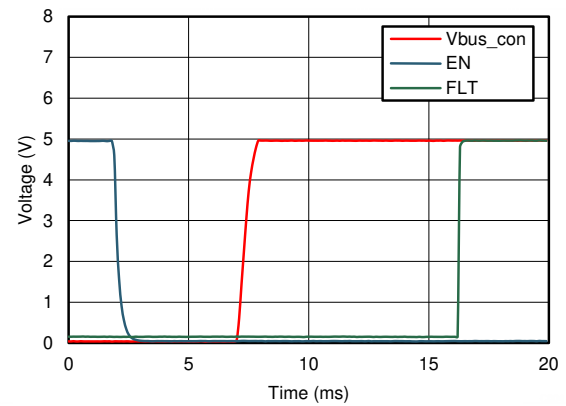


Figure 6-4. V_{BUS} t_{ON} Time

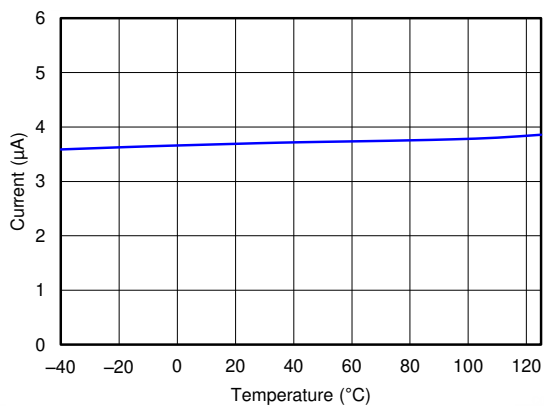


Figure 6-5. VD± Short-to-5 V (while Enabled) Across Temperature

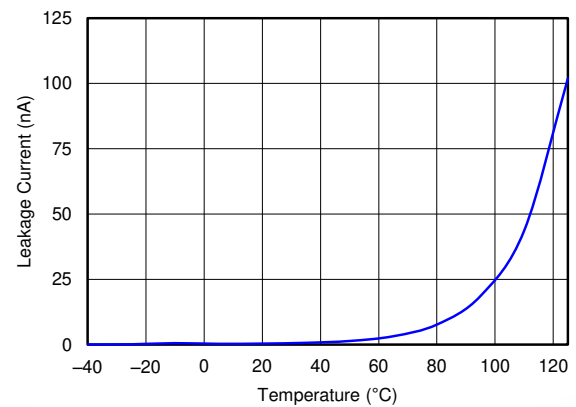
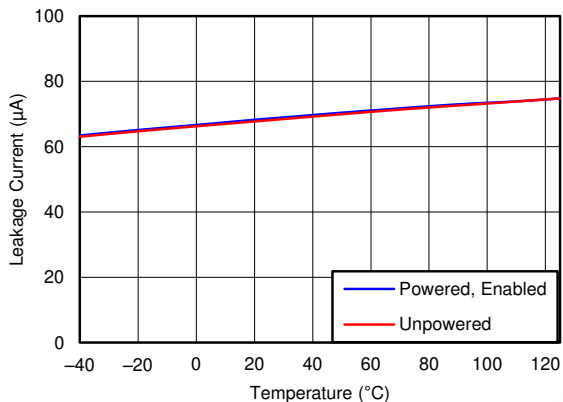
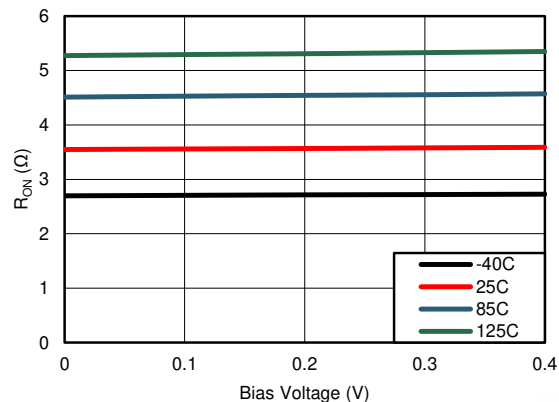
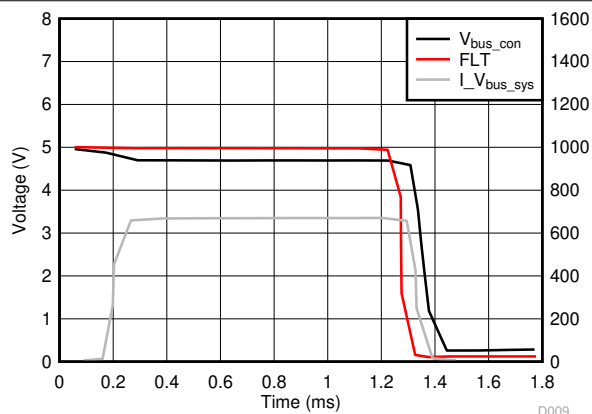
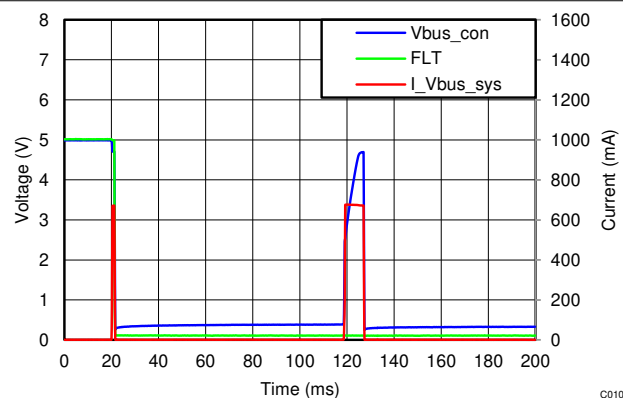
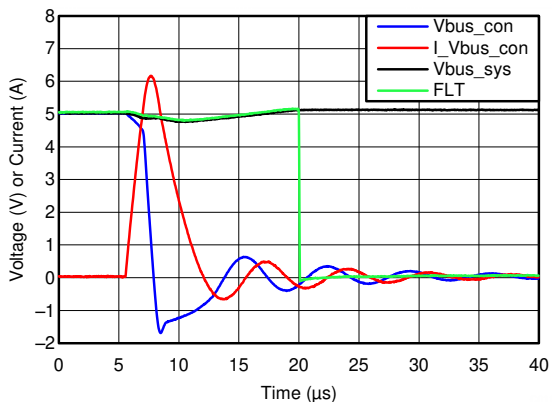
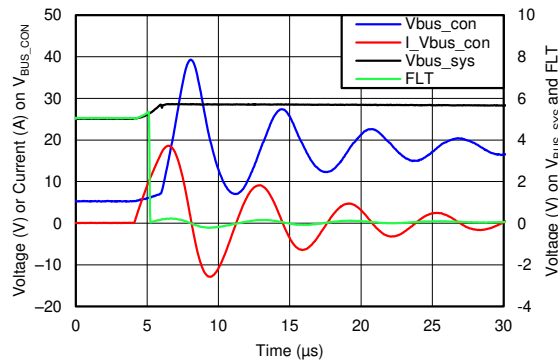


Figure 6-6. VD± Short-to-5 V (while Unpowered) Across Temperature

Figure 6-7. $V_{D\pm}$ Short-to-18 V Across TemperatureFigure 6-8. Data Switch R_{ON} vs Bias VoltageFigure 6-9. Overcurrent t_{BLANK} Response WaveformFigure 6-10. Overcurrent t_{BLANK_RETRY} Response WaveformFigure 6-11. V_{BUS} Short-to-Ground Response WaveformFigure 6-12. V_{BUS} Short-to-18 V Response Waveform

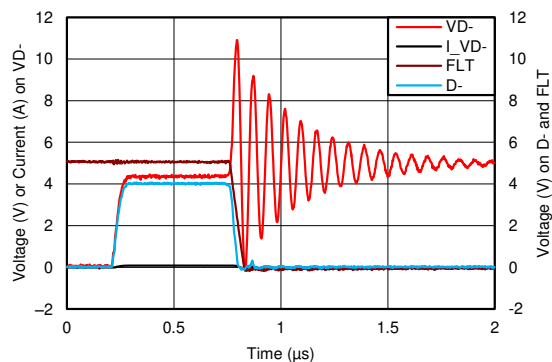


Figure 6-13. Data Switch Short-to-5 V Response Waveform

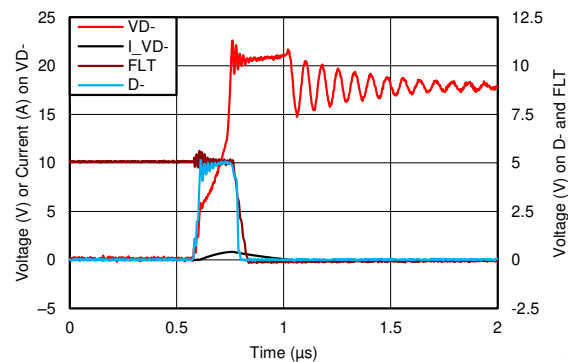


Figure 6-14. Data Switch Short-to-18 V Response Waveform

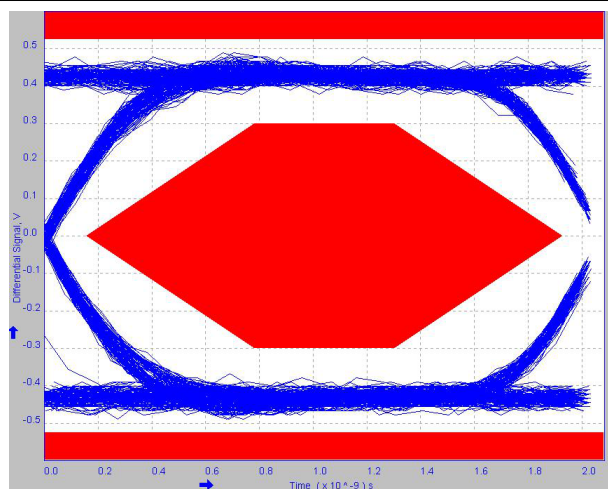


Figure 6-15. USB2.0 Eye Diagram (No TPD3S714-Q1)

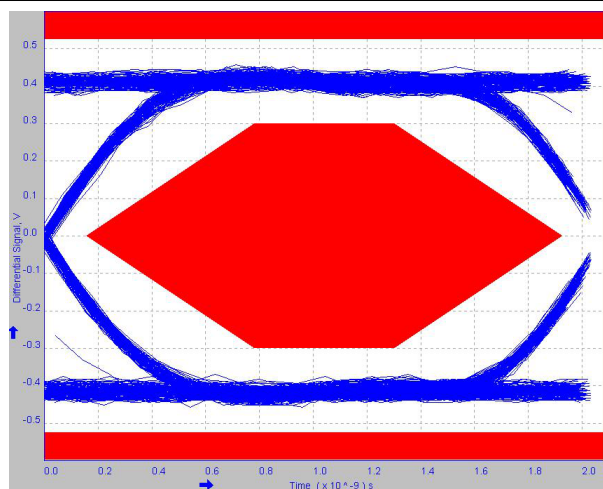


Figure 6-16. USB2.0 Eye Diagram (With TPD3S714-Q1)

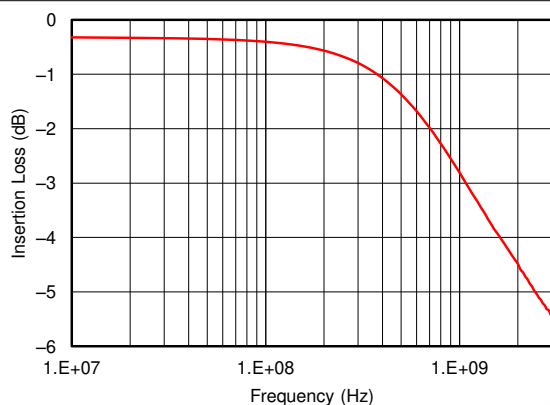


Figure 6-17. Data Switch Differential Bandwidth

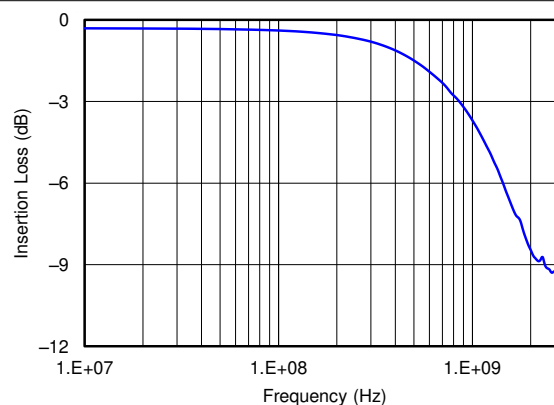


Figure 6-18. Data Switch Single-Ended Bandwidth


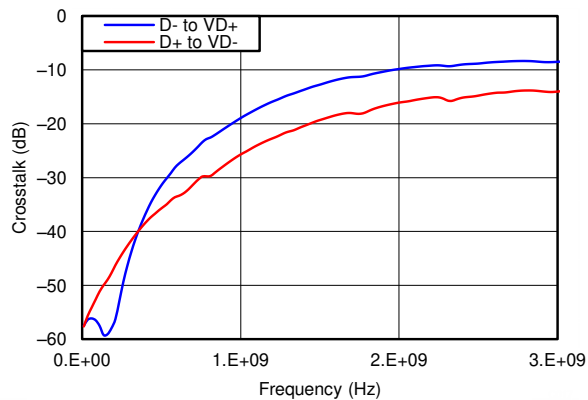



Figure 6-19. Data Switch Crosstalk

7 Parameter Measurement Information

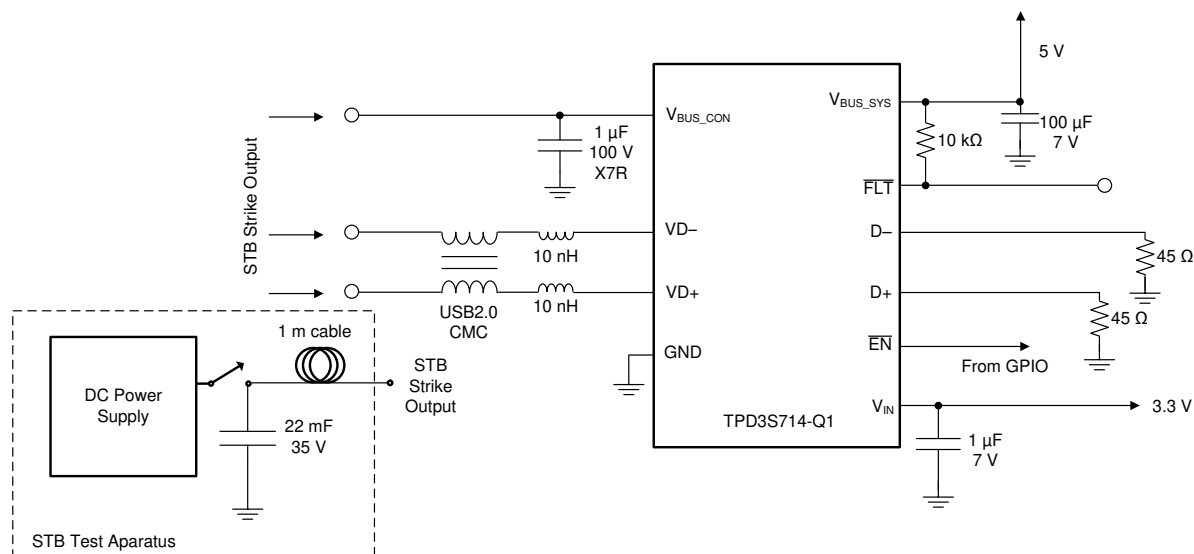

Copyright © 2016, Texas Instruments Incorporated

Figure 7-1. Short-to-Battery System Test Setup

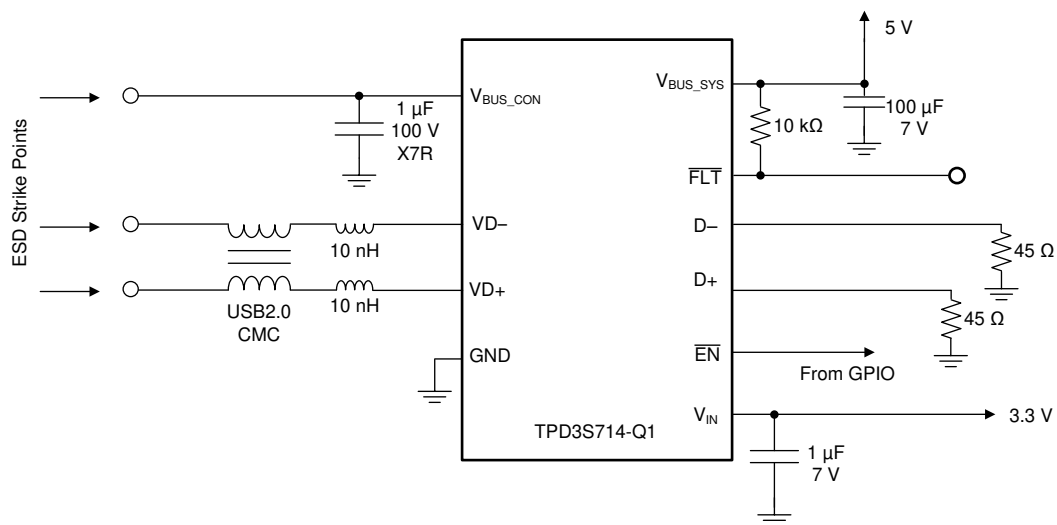

Copyright © 2016, Texas Instruments Incorporated

Figure 7-2. ESD System Test Setup


8 Detailed Description

8.1 Overview

The TPD3S714-Q1 provides a single-chip ESD protection and overvoltage protection solution for automotive USB interfaces. It offers short to battery protection up to 18 V and short to ground protection on V_{BUS_CON} . The TPD3S714-Q1 also provides a \overline{FLT} pin that indicates to the system if a fault condition has occurred. The TPD3S714-Q1 offers ESD clamps on the V_{BUS_CON} , $VD+$, and $VD-$ pins, thus eliminating the need for external TVS clamp circuits in the application.

The TPD3S714-Q1 has internal circuitry that controls the turnon of the internal nFET switches. An internal oscillator controls the timers that enable the switches and resets the open-drain \overline{FLT} output. If V_{BUS_CON} is less than V_{OVP} , the switches are enabled. After an internal delay, the charge-pump starts-up, turns on the internal nFET switch through a soft start. Once the nFET is completely turned ON, TPD3S714-Q1 releases \overline{FLT} pin to HIGH. At any time, if any of the external pins rise above V_{OVP} , \overline{FLT} pin is pulled LOW. The nFET switches are turned OFF.

8.2 Functional Block Diagram

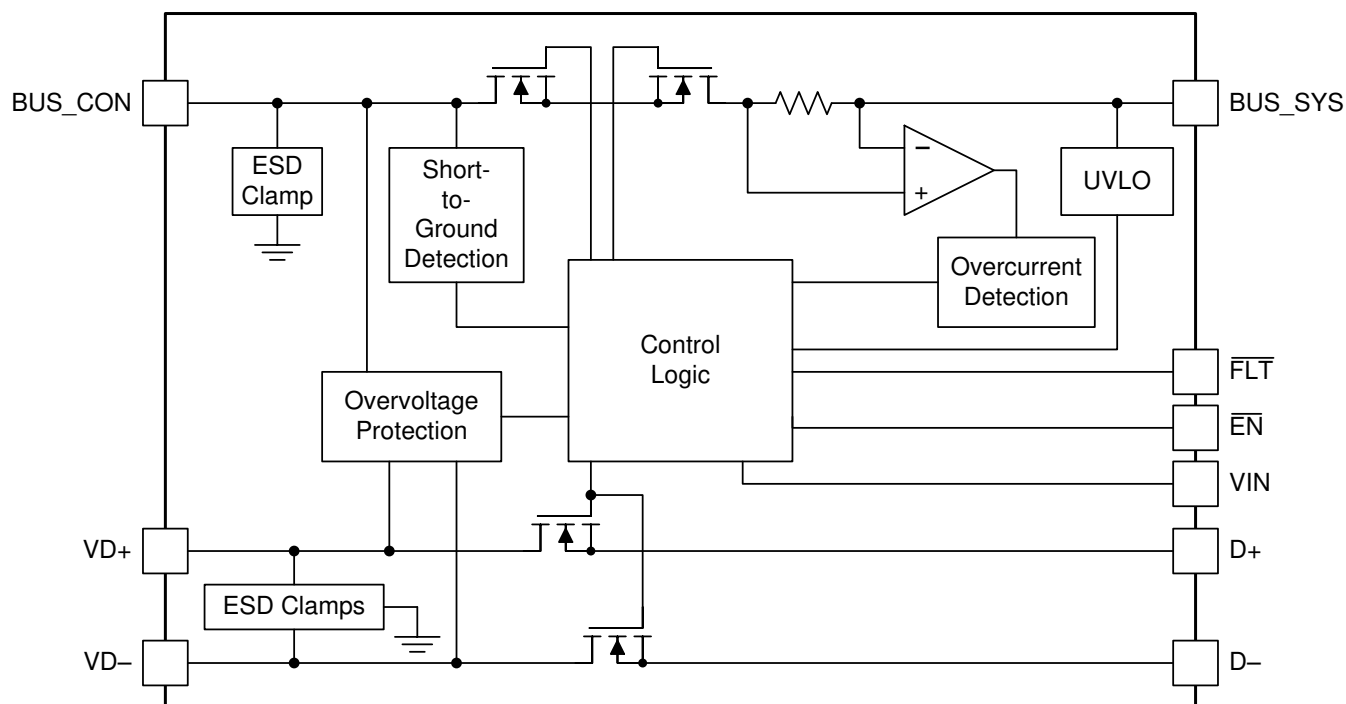

Copyright © 2016, Texas Instruments Incorporated

8.3 Feature Description

8.3.1 AEC-Q100 Qualified

The TPD3S714-Q1 is an automotive qualified device according to the AEC-Q100 standards. This device is qualified to operate from -40 to $+125^{\circ}\text{C}$ ambient temperature.

8.3.2 Short-to-Battery and Short-to-Ground Protection on V_{BUS_CON}

The V_{BUS_CON} pin is protected against shorts to battery and shorts to ground.

Once a voltage on V_{BUS_CON} is detected as too low (below the V_{SHRT} threshold) after the device is enabled, the device enters short-circuit protection mode and asserts \overline{FLT} . It sources the I_{SHRT} current until it detects the voltage rising above the V_{SHRT} threshold, where it resumes standard operating mode and deasserts \overline{FLT} .

Once a voltage above the V_{OVP} threshold is detected by the device, it shuts off all FETs and asserts a fault on the FLT pin. Once the excessive voltage is removed, the device automatically re-enables and FLT deasserts (see the [Timing Requirements](#) table for more details).

8.3.3 Short-to-Battery and Short-to- V_{BUS} Protection on VD+, VD–

The VD+ and VD– pins are protected against shorts to battery and shorts to bus. The OVP threshold on the VD+ and VD– pins is low enough that it protects against shorts to V_{BUS} .

Once a voltage above the V_{OVP} threshold is detected by the device, it shuts off all FETs and asserts a fault on the FLT pin. Once the excessive voltage is removed, the device automatically re-enables and FLT deasserts.

8.3.4 ESD Protection on V_{BUS_CON} , VD+, VD–

The protected pins (V_{BUS_CON} , VD+, VD–) are tested to pass the IEC 61000-4-2 ESD standard up to Level 4 ESD protection. Additionally, these pins are tested against ISO 10605 with the 330-pF, 330- Ω equivalent network. This guarantees passing of at least ± 8 -kV contact discharge and ± 15 -kV air gap discharge according to both standards using test setup shown in [Figure 7-2](#).

8.3.5 Low R_{ON} nFET V_{BUS} Switch

The V_{BUS} switch has a low R_{ON} that provides minimal voltage droop from system to connector. Typical resistance is 63 m Ω and is specified for 150 m Ω at 125°C ambient temperature.

8.3.6 High Speed Data Switches

The D+ and D– switches have a very low capacitance and a high bandwidth (1-GHz typical), allowing for a clean USB 2.0 eye diagram.

8.3.7 Hiccup Current Limit

The V_{BUS} path of this device has an integrated overcurrent protection circuit. Above the overcurrent threshold (550-mA minimum), the device goes into a fault state where it limits current to the threshold. After a short blanking time, the device cycles on and off to try to check if the connected device is still in overcurrent.

8.3.8 Fast Overvoltage Response Time

The overvoltage FETs are designed to have a fast turnoff time to protect the upstream SoC as quickly as possible. Typical response time for complete turnoff is 2 μ s for the V_{BUS} path and 200 ns for the data path.

8.3.9 Integrated Input Enable

The TPD3S714-Q1 has an enable input to turn on and off the device. The \overline{EN} pin disables and enables the V_{BUS} and data paths.

8.3.10 Fault Output Signal

The TPD3S714-Q1 has a fault pin, \overline{FLT} that indicates when there is any sort of fault condition because of OVP, OCP, or short-circuit.

8.3.11 Thermal Shutdown Feature

In the event that the device exceeds the maximum allowable junction temperature, it shuts down the device to prevent damage to itself and indicate via the fault pin.

8.3.12 16-pin SSOP Package

This device is packaged in a standard 16-pin SSOP leaded package.

8.4 Device Functional Modes

8.4.1 Normal Operation

The TPD3S714-Q1 operates normally (all FETs on) when enabled, both V_{BUS_SYS} and V_{IN} are above their UVLO thresholds, and the device is not in any fault conditions.

8.4.2 Overvoltage Condition

When the $VD+$, $VD-$, or V_{BUS_CON} pins exceed their OVP threshold, the device enters the overvoltage state. All FETs are disabled and the \overline{FLT} pin is asserted. Once the protected pins drop below their OVP threshold, the device automatically turns back on.

8.4.3 Overcurrent Condition

When the current through the V_{BUS} path exceeds the I_{LIM} current threshold, the device enters into the overcurrent state. The TPD3S714-Q1 limits current to the I_{LIM} threshold by dropping voltage across the V_{BUS} FET to maintain constant current. Once it continues to sense an overcurrent condition for the blanking time t_{BLANK} , the device disables itself for the retry time, t_{RETRY} and then retry automatically for the retry time, t_{BLANK_RETRY} . In the event that the current is below the overcurrent threshold, the device deasserts fault and resumes normal operation.

8.4.4 Short-Circuit Condition

When the voltage on the V_{BUS_CON} side drops below the V_{SHRT} threshold while enabled, the TPD3S714-Q1 enters the short-circuit mode. It sources a constant current of I_{SHRT} until it rises above the V_{SHRT} threshold. Once that occurs, the device automatically re-enters normal operation and deasserts fault.

8.4.5 Device Logic Tables

Table 8-1 shows the TPD3S714-Q1 V_{BUS} Logic Table.

Table 8-1. TPD3S714-Q1 V_{BUS} Logic Table

| VOLTAGE CONDITION | | | CURRENT CONDITION | | |
|-----------------------|----------------|-----------------|----------------------------------|---|---------|
| V_{BUS_CON} | V_{BUS_SYS} | \overline{EN} | CURRENT FLOW | COMMENT | FLT PIN |
| X | <UVLO | X | No Flow | Switch off because of UVLO | High-Z |
| <OVP and > V_{SHRT} | >UVLO | Low | V_{BUS_SYS} to V_{BUS_CON} | Current flows through the switch, normal host mode | High-Z |
| X | >UVLO | High | No Flow | Switch off | Low |
| < V_{SHRT} | >UVLO | Low | V_{BUS_SYS} to V_{BUS_CON} | Current flow through switch, device detects short circuit, current limited to I_{SHRT} | Low |
| X | X | Low | >OCP | Device switches off because of overcurrent limit, auto-retrys until <OCP or thermal shutdown conditions occur | Low |
| >OVP | >UVLO | Low | No Flow | Switch off because of OVP | Low |
| X | X | X | No Flow | Thermal Shutdown Condition | Low |

Table 8-2 shows the TPD3S714-Q1 Data Line Logic Table

Table 8-2. TPD3S714-Q1 Data Line Logic Table

| VOLTAGE CONDITION | | CURRENT CONDITION | | |
|-------------------|-----------------|-------------------|---|---------|
| $VD+/VD-$ | \overline{EN} | SWITCHES ON? | COMMENT | FLT PIN |
| <OVP | Low | Yes | Device operates normally, data transfer can occur | High-Z |
| X | High | No | Switches off | Low |
| >OVP | Low | No | Switches off because of OVP limit | Low |
| X | X | No | Thermal Shutdown Condition | Low |

9 Application and Implementation

Note


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The TPD3S714-Q1 offers fully featured automotive USB2.0 protection including short-to-battery, overcurrent, and ESD protection. Care must be taken during the implementation to make sure the device provides adequate protection to the system.

9.2 Typical Application

Figure 9-1 shows a fully featured USB2.0 high speed port, with an 18-V short-to-battery requirement on the connector side.

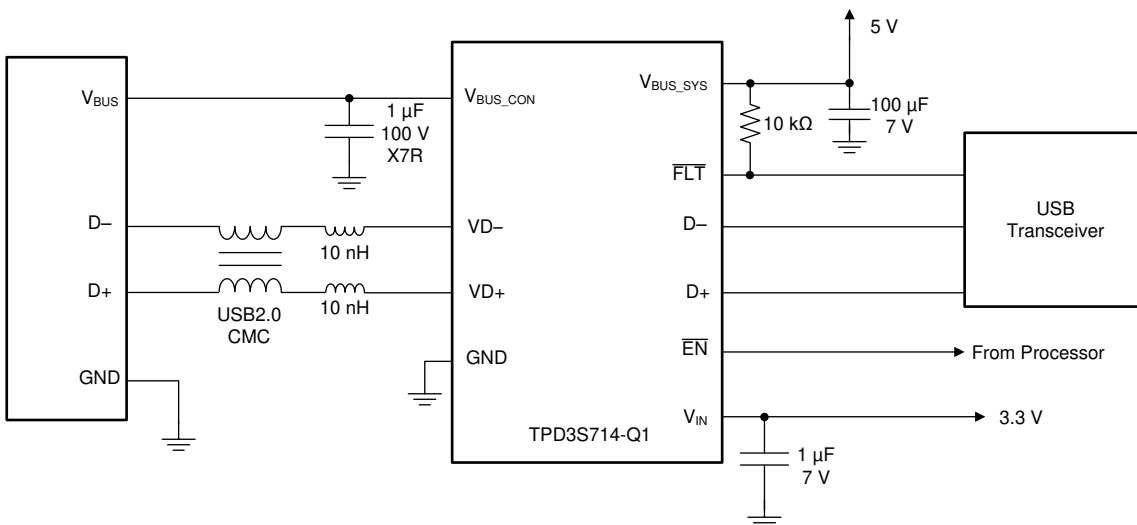

Copyright © 2016, Texas Instruments Incorporated

Figure 9-1. Typical Application Configuration for TPD3S714-Q1

9.2.1 Design Requirements

For this design example, the input parameters shown in Table 9-1 are used:

Table 9-1. Design Parameters

| DESIGN PARAMETER | EXAMPLE VALUE |
|--|---------------|
| Short-to-battery tolerance on VD+, VD-, VBUS_CON | 18 V |
| Maximum current in normal operation on VBUS | 500 mA |
| USB data rate | 480 Mbps |

9.2.2 Detailed Design Procedure

To begin the design process, the designer must know the following parameters:

- Short-to-Battery tolerance on connector pins
- Maximum current in normal operation on V_{BUS}
- USB Data Rate

9.2.2.1 Short-to-Battery Tolerance

The TPD3S714-Q1 is capable of handling up to 18-V DC on the $VD+$, $VD-$, and V_{BUS_CON} pins. In the event of a short-to-battery on V_{BUS_CON} , significant ringing is expected because of the hot plug-like nature of the short-to-battery event. In typical ceramic capacitor configurations, a standard RLC response is expected which results in a ringing of nearly two times the applied DC voltage. The TPD3S714-Q1 is capable of withstanding the transient ringing from hot plug-like events, assuming some precautions are taken.

Careful capacitor selection on the V_{BUS_CON} pin must be observed. A capacitor with a low derating percentage under the applied voltages must be used to prevent excess ringing. In the example, a 1- μ F 100-V tolerant ceramic X7R capacitor is used. It is best practice to carefully select the capacitors used in this circuit to prevent derating-based voltage spikes under hot plug events. See the application example graphs, [Figure 9-4](#) and [Figure 9-5](#) to compare ringing of a 100-V capacitor to a 50-V capacitor. [Figure 9-6](#) shows the 100-V capacitor with the TPD3S714-Q1 installed.

Another alternative to a high rated ceramic capacitor is to implement either a standard R-C snubber circuit, or a small external TVS diode. Depending on the short-to-battery tolerance needed, no special precautions may be needed.

For more information on this topic, see the white paper [Designing USB for short-to-battery tolerance in automotive environments](#).

9.2.2.2 Maximum Current on V_{BUS}

The TPD3S714-Q1 is capable of operating up to 5500 mA of current (minimum) until going into current limit mode. In this example, the maximum current for USB2.0 of 500 mA has been chosen.

9.2.2.3 USB Data Rate

The TPD3S714-Q1 is capable of operating at the maximum USB2.0 High Speed data rate of 480 Mbps because of the high data switch bandwidth of 1 GHz (typical). In this design example the maximum data rate of 480 Mbps has been chosen.

9.2.3 Application Curves

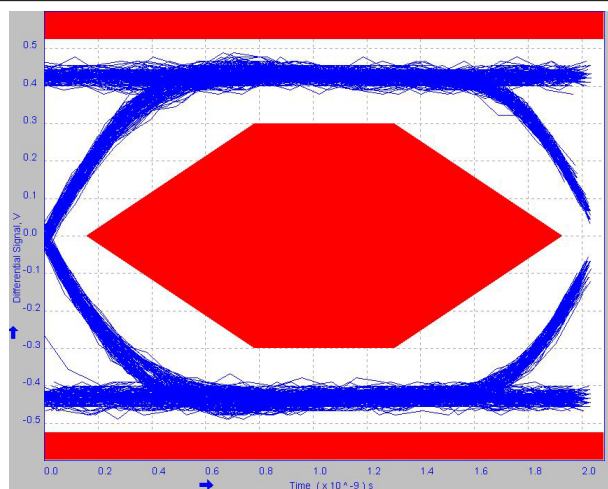


Figure 9-2. USB2.0 Eye Diagram (Board Only, Through Path)

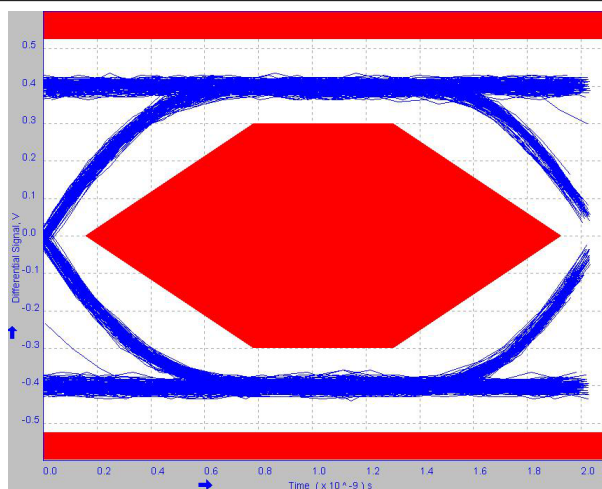


Figure 9-3. USB2.0 Eye Diagram (System from Typical Application Schematic)

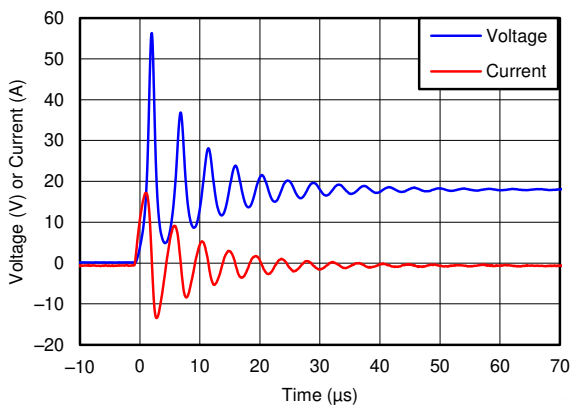


Figure 9-4. 50-V, 1-μF X7R Ceramic Shorted to 18-V (Not Recommended)

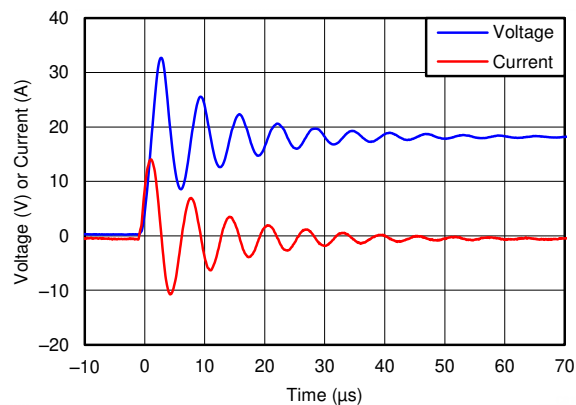


Figure 9-5. 100-V, 1-μF X7R Ceramic Shorted to 18 V

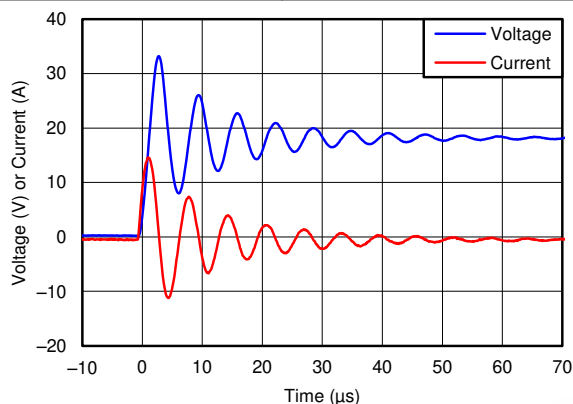


Figure 9-6. TPD3S714-Q1 and 100-V, 1-μF X7R Shorted to 18 V (Powered Off)

10 Power Supply Recommendations

10.1 V_{BUS} Path

The V_{BUS_SYS} pins provide power to the chip and supply current through the load switch to V_{BUS_CON}. A 100-μF bulk capacitor is recommended on V_{BUS_SYS} to supply the USB port and maintain compliance. A 1-μF capacitor is recommended on the V_{BUS_CON} pin with adequate voltage rating to tolerate short-to-battery conditions. A supply voltage above the UVLO threshold for V_{BUS_SYS} must be supplied for the device to power on.

10.2 V_{IN} Pin

The V_{IN} pin provides a voltage reference for the data switch OVP level as well as a bypass for ESD clamping. A 1-μF capacitor must be placed as close to the pin as possible and the supply must be set to be above the UVLO threshold for V_{IN}.

11 Layout

11.1 Layout Guidelines

Proper routing and placement maintains signal integrity for high-speed signals. The following guidelines apply to the TPD3S714-Q1:

- Place the bypass capacitors as close as possible to the V_{IN} , V_{BUS_SYS} , and V_{BUS_CON} pins. Capacitors must be attached to a solid ground. This minimizes voltage disturbances during transient events such as short-to-battery, ESD, or overcurrent conditions.
- High speed traces (data switch path) must be routed as straight as possible and any sharp bends must be minimized.

Our standard ESD recommendations apply to the $VD+$, $VD-$, and V_{BUS_CON} pins as well:

- The optimum placement is as close to the connector as possible.
 - EMI during an ESD event can couple from the trace being struck to other nearby unprotected traces, resulting in early system failures.
 - The PCB designer must minimize the possibility of EMI coupling by keeping any unprotected traces away from the protected traces which are between the TVS and the connector.
- Route the protected traces as straight as possible.
- Eliminate any sharp corners on the protected traces between the TVS and the connector by using rounded corners with the largest radii possible.
 - Electric fields tend to build up on corners, increasing EMI coupling.

11.2 Layout Example

Figure 11-1 shows a full layout for a standard USB2.0 port. A common mode choke and inductors are used on the high speed data lines, and the requisite bypassing caps are placed on V_{BUS_CON} , V_{BUS_SYS} , and V_{IN} .

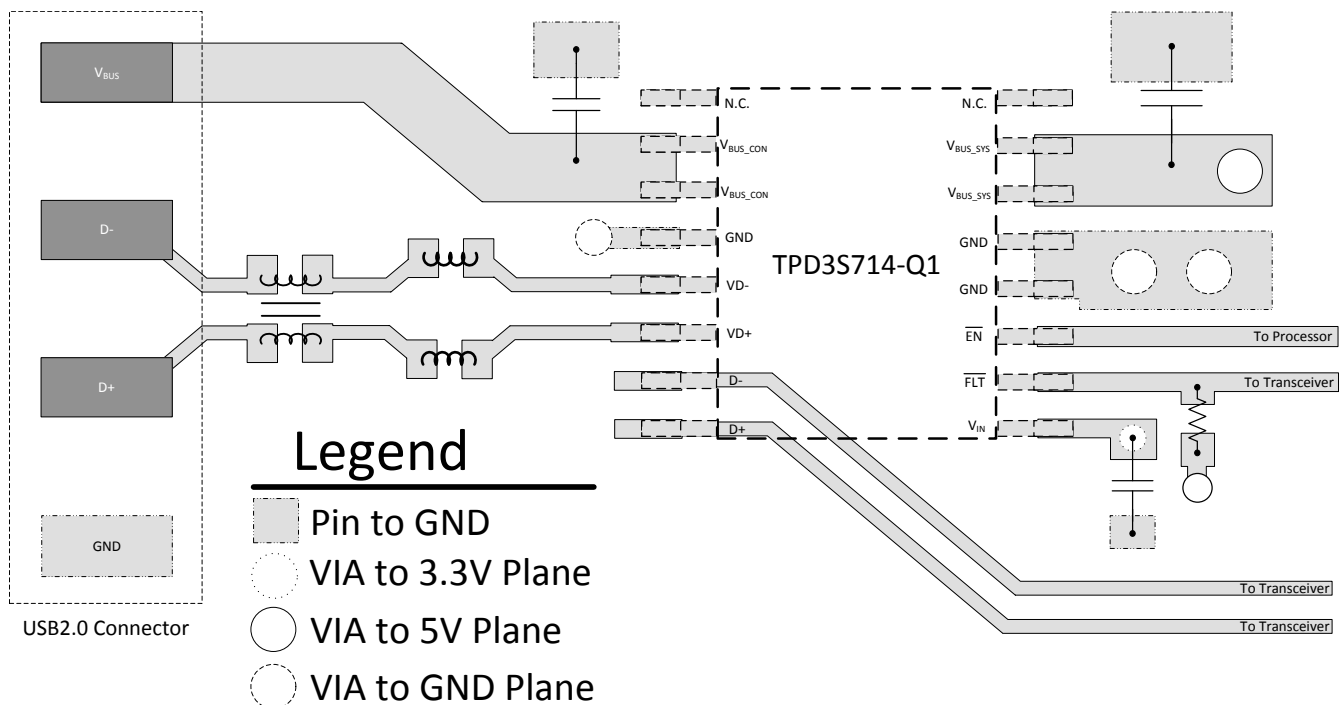


Figure 11-1. Typical Layout Example for TPD3S714-Q1

12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation see the following:

- [TPD3S714-Q1EVM User's Guide](#)
- [Reading and Understanding an ESD Protection Datasheet](#)
- [ESD Layout Guide](#)

12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.3 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

12.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.


ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.


13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



PACKAGE OUTLINE
SSOP - 1.75 mm max height




SHRINK SMALL-OUTLINE PACKAGE

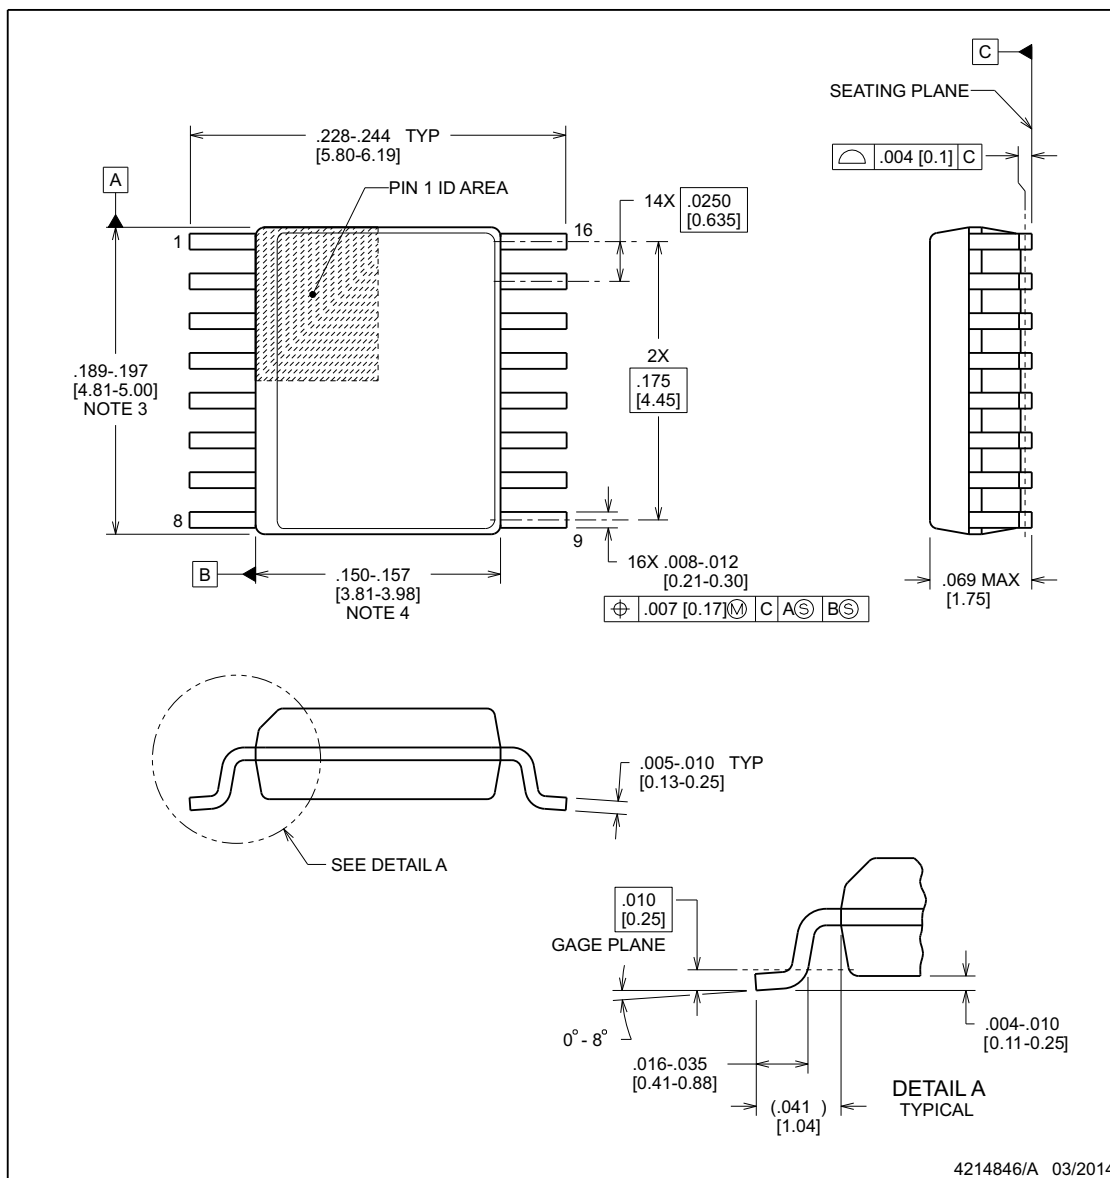

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 inch, per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MO-137, variation AB.

EXAMPLE BOARD LAYOUT**DBQ0016A****SSOP - 1.75 mm max height**

SHRINK SMALL-OUTLINE PACKAGE

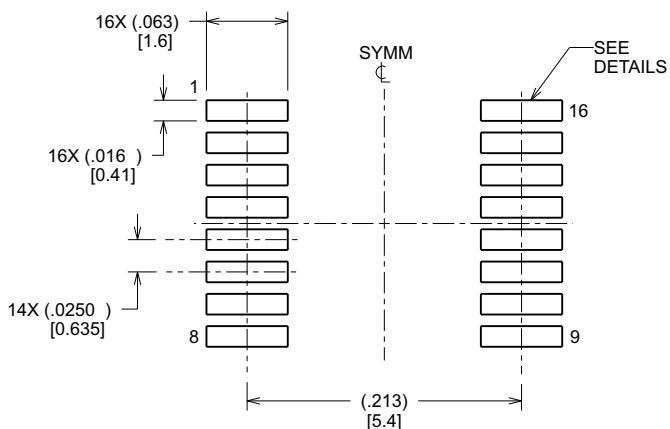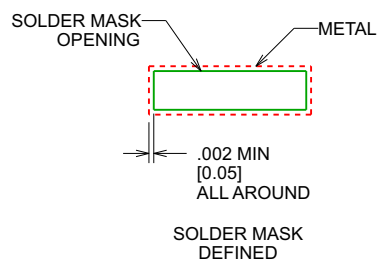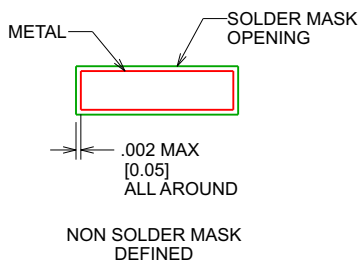LAND PATTERN EXAMPLE
SCALE:8X

SOLDER MASK DETAILS

4214846/A 03/2014

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

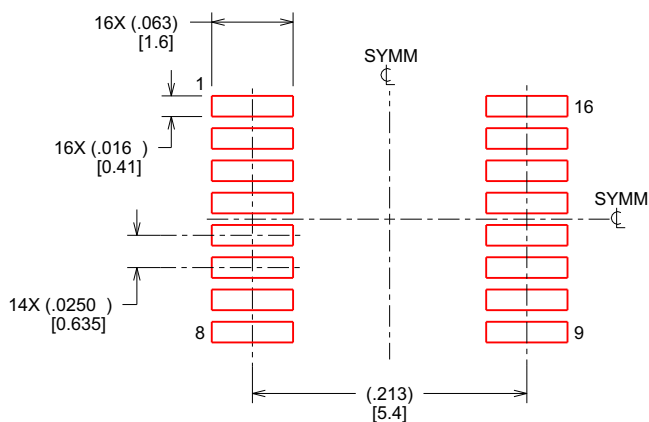

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.127 MM] THICK STENCIL
SCALE:8X

4214846/A 03/2014

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

www.ti.com

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|---------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPD3S714QDBQRQ1 | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | RJ714Q |
| TPD3S714QDBQRQ1.A | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | RJ714Q |
| TPD3S714QDBQRQ1.B | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 125 | RJ714Q |

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPD3S714QDBQRQ1 | SSOP | DBQ | 16 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPD3S714QDBQRQ1 | SSOP | DBQ | 16 | 2500 | 353.0 | 353.0 | 32.0 |



DBQ0016A

PACKAGE OUTLINE

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE



4214846/A 03/2014

NOTES:


1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 inch, per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MO-137, variation AB.

EXAMPLE BOARD LAYOUT



DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

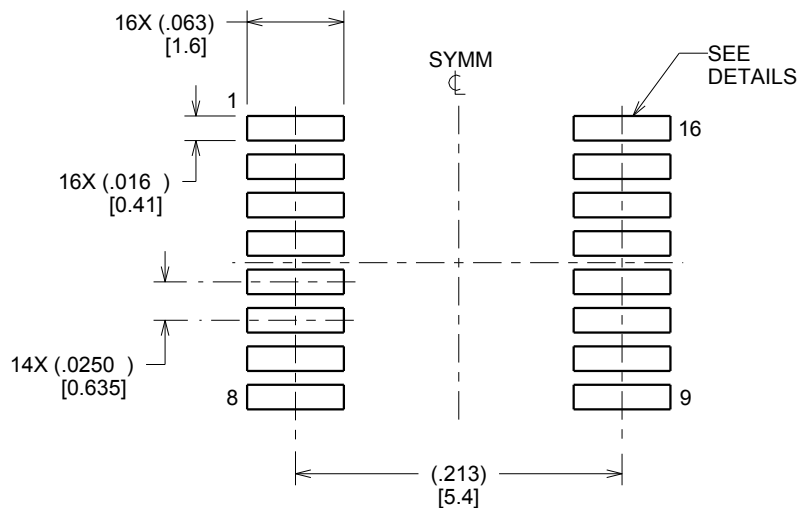

LAND PATTERN EXAMPLE
SCALE:8X

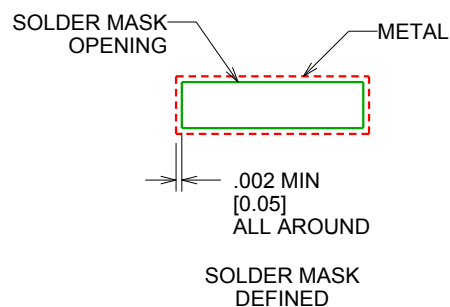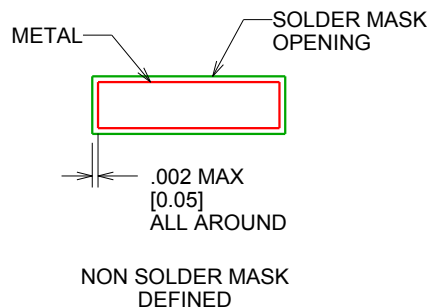

SOLDER MASK DETAILS

4214846/A 03/2014

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBQ0016A

SSOP - 1.75 mm max height

SHRINK SMALL-OUTLINE PACKAGE

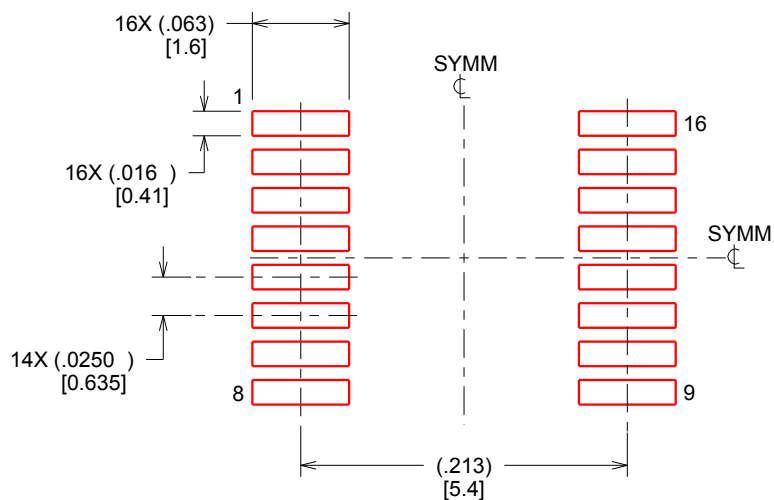

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.127 MM] THICK STENCIL
SCALE:8X

4214846/A 03/2014

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated