











TPS386000-Q1

SBVS149B - SEPTEMBER 2010 - REVISED JANUARY 2016

TPS386000-Q1 Quad Supply Voltage Supervisors With Programmable Delay and Watchdog Timer

Features

- **Qualified for Automotive Applications**
- AEC Q100 Test Guidance With the Following Results:
 - Device Temperature Grade 1: -40°C to 125°C Ambient Operating Temperature Range
 - Device HBM ESD Classification Level H2
 - Device CDM ESD Classification Level C4B
- Four Complete SVS Modules on one Silicon **Platform**
- Programmable Delay Time: 1.4 ms to 10 s
- Very Low Quiescent Current: 12 µA Typical
- Threshold Accuracy: 0.25% Typical
- SVS-1: Manual Reset (MR) Input
- SVS-1, 2, 3: Adjustable Threshold Down to 0.4 V
- SVS-4:
 - Adjustable Threshold at Any Positive or Negative Voltage with VREF (1.2 V)
 - Window Comparator
- Watchdog Timer with Dedicated Output
- Well-Controlled RESETn Output During Power-Up
- Open-Drain RESETn and WDO
- Package: 4-mm x 4-mm, 20-pin VQFN

Applications

- Automotive
- **ADAS**
 - Front Camera, Surround View, Long-Range Radar, and Short-Range Radar

3 Description

The TPS386000-Q1 family of voltage supervisors can monitor four power rails that are greater than 0.4 V and one power rail less than 0.4 V (including negative voltage) with a 0.25% (typical) threshold accuracy. Each of the four supervisory circuits (SVS-n) assert a RESETn or RESETn output signal when the SENSEm input voltage drops below the programmed threshold. With external resistors, the threshold of each SVS-n can be programmed (where n = 1, 2, 3, 4 and m = 1, 2, 3, 4L, 4H).

Each SVS-n has a programmable delay before releasing RESETn or RESETn. The delay time can be set from 1.4 ms to 10 s through the CTn pin connection. Only SVS-1 has an active-low manual reset (\overline{MR}) input; a logic-low input to \overline{MR} asserts RESET1 or RESET1.

SVS-4 monitors the threshold window using two comparators. The extra comparator can configured as a fifth SVS to monitor negative voltage with voltage reference output VREF.


The TPS386000-Q1 device has a very low quiescent current of 12 µA (typical) and is available in a small, 4-mm x 4-mm, VQFN-20 package.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)		
TPS38600-Q1	VQFN (20)	4.00 mm × 4.00 mm		

(1) For all available packages, see the orderable addendum at the end of the datasheet.

TPS386000-Q1 Typical Application Circuit

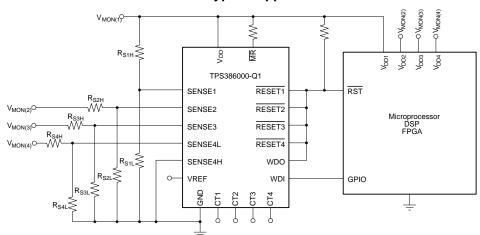

Page



Table of Contents

1	Features 1		8.2 Functional Block Diagram	16
2	Applications 1		8.3 Feature Description	17
3	Description 1		8.4 Device Functional Modes	19
4	Revision History2	9	Application and Implementation	<mark>2</mark> 1
5	Pin Configuration and Functions		9.1 Application Information	21
6	Specifications4		9.2 Typical Application	23
U	6.1 Absolute Maximum Ratings	10	Power Supply Recommendations	24
	6.2 ESD Ratings	11	Layout	24
	6.3 Recommended Operating Conditions		11.1 Layout Guidelines	24
	6.4 Thermal Information		11.2 Layout Example	25
	6.5 Electrical Characteristics	12	Device and Documentation Support	26
	6.6 Timing Requirements		12.1 Documentation Support	26
	6.7 Switching Characteristics		12.2 Community Resources	26
	6.8 Typical Characteristics11		12.3 Trademarks	26
7	Parametric Measurement information 14		12.4 Electrostatic Discharge Caution	26
8	Detailed Description 15		12.5 Glossary	26
•	8.1 Overview	13	Mechanical, Packaging, and Orderable Information	26

4 Revision History

Changes from Revision A (October 2013) to Revision B


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

•	Added ESD Ratings table, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and	
	Mechanical, Packaging, and Orderable Information section.	1
•	Changed all references of V _{CC} (and I _{CC}) to V _{DD} (and I _{DD}) throughout the document	3
•	Changed ITN to IT- and ITP to IT+ throughout	3
•	Changed V _{HYSN} to V _{HYS} and V _{HYS} to V _{HYS}	5
•	Moved timing and switching parameters (t _W , t _D , t _{WDT}) from the <i>Electrical Characteristics</i> table to the respective <i>Timing Requirements</i> and <i>Switching Characteristics</i> tables	6
•	Deleted Test Circuit section	. 14
•	Deleted references to push-pull reset and active-high outputs	. 17

Changes from Original (September 2010) to Revision A Added AEC Q100 text to features which includes ambient operating temperature range, HBM and CDM classification levels Deleted Latch-up performance text from ABSOLUTE MAXIMUM RATINGS table 4



5 Pin Configuration and Functions



NC = No internal connection

Pin Functions

PIN		1/0	DESCRIPTION				
NAME	NO.	1/0	DESCH	KIPTION			
CT1	5	_	Reset delay programming pin for SVS-1	Connecting this pin to V _{DD} through a 40-			
CT2	4 —		Reset delay programming pin for SVS-2	$k\Omega$ to 200- $k\Omega$ resistor, or leaving it open, selects a fixed delay time (see the			
CT3	3	_	Reset delay programming pin for SVS-3	Electrical Characteristics). Connecting a			
CT4	2	_	Reset delay programming pin for SVS-4	capacitor > 220 pF between this pin and GND selects the programmable delay time (see the <i>Reset Delay Time</i> section).			
GND	12	_	Ground				
MR	1	I	Manual reset input for SVS-1. Logic low I RESET1.	evel of this pin asserts RESET1 or			
NC	Not connected. TI recommends to connect this pin to the GND pin (pin 1) is next to this pin.						
RESET1	15	0	Active low reset output of SVS-1	RESETn is an open-drain output pin.			
RESET2	16	0	Active low reset output of SVS-2	When RESETn is asserted, this pin remains in a low-impedance state.			
RESET3	17	0	Active low reset output of SVS-3	When RESETn is released, this pin			
RESET4	18	0	Active low reset output of SVS-4	goes to a high-impedance state after the delay time programmed by CTn.			
SENSE1	10	I	Monitor voltage input to SVS-1	When the voltage at this terminal drops below the threshold voltage (V _{IT}), RESET1 is asserted.			
SENSE2	9	I	Monitor voltage input to SVS-2	When the voltage at this terminal drops below the threshold voltage (V _{IT}), RESET2 is asserted.			
SENSE3	8	I	Monitor voltage input to SVS-3	When the voltage at this terminal drops below the threshold voltage (V _{IT}), RESET3 is asserted.			
SENSE4L	7	I	Falling monitor voltage input to SVS-4. We below the threshold voltage (V _{IT}), RESE				
SENSE4H	6	I	Rising monitor voltage input to SVS-4. W the threshold voltage (V _{IT+}), RESET4 or I used to monitor the negative voltage rail	RESET4 is asserted. This pin can also be			



Pin Functions (continued)

P	IN	1/0	DESCRIPTION		
NAME NO.		I/O	DESCRIPTION		
V _{DD} 14		I	Supply voltage. TI recommends connecting a 0.1-µF ceramic capacitor close to this pin.		
VREF	13	0	Reference voltage output. By connecting a resistor network between this pin and the negative power rail, SENSE4H can monitor the negative power rail. This pin is intended to only source current into resistor(s). Do not connect only capacitors and do not connect resistor(s) to a higher voltage than this pin.		
WDI	20	I	Watchdog timer (WDT) trigger input. Inputting either a positive or negative logic edge every 610 ms (typical) prevents WDT time out at the WDO or WDO pin. Timer starts from releasing event of RESET1 or RESET1.		
WDO	19	0	Watchdog timer output. This is an open-drain output pin. When WDT times out, this pin goes to a low-impedance state to GND. If there is no WDT timeout, this pin stays in a high-impedance state.		
(Thermal Pad)	(PAD)	_	This is the IC substrate. This pad must be connected only to GND or to the floating thermal pattern on the printed circuit board (PCB).		

6 Specifications

6.1 Absolute Maximum Ratings

Over operating junction temperature range (unless otherwise noted) (1)

		MIN	MAX	UNIT
	Input, V _{DD}		7	
Voltage	CT pin, V _{CT1} , V _{CT2} , V _{CT3} , V _{CT4}	-0.3	$V_{DD} + 0.3$	V
remage	V _{RESET1} , V _{RESET2} , V _{RESET3} , V _{RESET4} , V _{MR} , V _{SENSE1} , V _{SENSE2} , V _{SENSE3} , V _{SENSE4L} , V _{SENSE4H} , V _{WDI} , V _{WDO}	-0.3 7		•
Current	RESETn , RESETn, WDO, WDO, VREF pin current		5	mA
Power Dissipation	Continuous total	See Thermal Information		tion Table.
	Operating virtual junction, T _J ⁽²⁾	-40	150	
Temperature	Operating ambient, T _A	-40	125	°C
	Storage, T _{stg}	-65	150	

⁽¹⁾ Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

	<u> </u>			VALUE	UNIT
		Human-body model (HBM), per AEC Q100	-002 ⁽¹⁾	±2000	
V _(ECD)	Electrostatic discharge	Charged device model (CDM) per AEC	All pins	±500	V
V _(ESD)	Liber secure districtings	Charged-device model (CDM), per AEC Q100-011	Corner pins (1, 5, 6, 10, 11, 15, 16)	±750	•

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

⁽²⁾ As a result of the low dissipated power in this device, it is assumed that $T_J = T_A$.



6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM MAX	UNIT
V_{DD}	Supply voltage		1.8	6.5	V
	Reset delay programming	CT1, CT2, CT3, CT4	0	V_{DD}	V
	Manual reset input	MR	0	V_{DD}	V
	Watchdog timer trigger input WDI		0	V_{DD}	V
T _A	Operating free-air temperature		-40	125	°C
TJ	Operating junction temperature		-40	150	°C

6.4 Thermal Information

		TPS386000-Q1	
	THERMAL METRIC ⁽¹⁾	RGP (VQFN)	UNIT
		20 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	50.8	°C/W
R _{0JC(top)}	Junction-to-case (top) thermal resistance	1.5	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	21.0	°C/W
ΨЈТ	Junction-to-top characterization parameter	42.8	°C/W
ΨЈВ	Junction-to-board characterization parameter	8.8	°C/W
R _{0JC(bot)}	Junction-to-case (bottom) thermal resistance	21.2	°C/W

For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report, SPRA953.

6.5 Electrical Characteristics

Over the operating temperature range of $T_J = -40^{\circ}\text{C}$ to +125°C, 1.8 V < V_{DD} < 6.5 V, R_{RESETn} (n = 1, 2, 3, 4) = 100 k Ω to V_{DD} , C_{RESETn} (n = 1, 2, 3, 4L, 4H) = 50 pF to GND, R_{WDO} = 100 k Ω to R_{WDO} = 50 pF to GND, R_{WDO} = 100 k Ω to R_{WDO} = 1

	PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{DD}	Input supply range			1.8		6.5	V
			V_{DD} = 3.3 V, $\overline{\text{RESETn}}$ or RESETn not asserted, WDI toggling ⁽¹⁾ , no output load, and VREF open		11	19	
I _{DD}	Supply current (curre	פונו ווונס עםט אווו)	V_{DD} = 6.5 V, $\overline{\text{RESETn}}$ or RESETn not asserted, WDI toggling ⁽¹⁾ , no output load, and VREF open		13	22	μА
	Power-up reset volta	ge ⁽²⁾⁽³⁾	V_{OL} (max) = 0.2 V, I_{RESETn} = 15 μ A			0.9	V
V _{IT}	Negative-going input	threshold voltage	SENSE1, SENSE2, SENSE3, SENSE4L	396	400	404	mV
V _{IT+}	Positive-going input t	hreshold voltage	SENSE4H	396	400	404	mV
V _{HYS} -	Hysteresis (positive-o	going) on V _{IT}	SENSE1, SENSE2, SENSE3, SENSE4L		3.5	10	mV
V _{HYS+}	Hysteresis (negative-	going) on V _{IT+}	SENSE4H		3.5	10	mV
I _{SENSE}	Input current at SEN	SEm pin	V _{SENSEm} = 0.42 V	-25	±1	+25	nA
	CTn pin charging	CT1	$C_{CT1} > 220 \text{ pF}, V_{CT1} = 0.5 \text{ V}^{(4)}$	245	300	355	^
I _{CT}	current	CT2, CT3, CT4	$C_{CTn} > 220 \text{ pF}, V_{CTn} = 0.5 \text{ V}^{(4)}$	235	300	365	nA
V _{TH(CTn)}	CTn pin threshold		C _{CTn} > 220 pF	1.18	1.238	1.299	V
V _{IL}	MR and WDI logic lo	w input		0		0.3 × V _{DD}	V

⁽¹⁾ Toggling WDI for a period less than t_{WDT} negatively affects I_{DD} .

⁽²⁾ These specifications are beyond the recommended V_{DD} range, and only define RESETn or RESETn output performance during V_{DD} ramp up.

⁽³⁾ The lowest supply voltage (V_{DD}) at which RESETn or RESETn becomes active; t_{RISE}(VDD) ≥ 15 μs/V.

⁽⁴⁾ CTn (where n = 1, 2, 3, or 4) are constant current charging sources working from a range of 0 V to $V_{TH(CTn)}$, and the device is tested at $V_{CTn} = 0.5 \text{ V}$. For I_{CT} performance between 0V and $V_{TH(CTn)}$, see Figure 26.



Electrical Characteristics (continued)

Over the operating temperature range of $T_J = -40^{\circ}\text{C}$ to +125°C, 1.8 V < V_{DD} < 6.5 V, R_{RESETn} (n = 1, 2, 3, 4) = 100 k Ω to V_{DD} , C_{RESETn} (n = 1, 2, 3, 4L, 4H) = 50 pF to GND, R_{WDO} = 100 k Ω to V_{DD} , R_{WDO} = 50 pF to GND, R_{WDO} = 100 k Ω to $R_$

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{IH}	MR and WDI logic high input		0.7 × V _{DD}			V
	Low-level RESETn or RESETn output	I _{OL} = 1 mA			0.4	
V _{OL}	voltogo	SENSEn = 0V, 1.3 V < V_{DD} < 1.8 V, I_{OL} = 0.4 mA ⁽²⁾			0.3	V
	Low-level WDO output voltage	I _{OL} = 1 mA			0.4	
I _{LKG}	RESETn, RESETn, WDO, and WDO leakage current	V_{RESETn} = 6.5 V, \overline{RESETn} , $RESETn$, \overline{WDO} , and WDO are logic high	-300		300	nA
V_{REF}	Reference voltage output	1 μ A < I _{VREF} < 0.2 mA (source only, no sink)	1.18	1.20	1.22	V
C _{IN}	Input pin capacitance	CTn: 0 V to V _{DD} , other pins: 0 V to 6.5 V		5		рF

6.6 Timing Requirements

Over operating temperature range of T_J = -40°C to 125°C, 1.8 V < V_{DD} < 6.5 V, R_{RESETn} (n = 1, 2, 3, 4) = 100 k Ω to V_{DD} , C_{RESETn} (n = 1, 2, 3, 4L, 4H) = 50 pF to GND, R_{WDO} = 100 k Ω to V_{DD} , C_{WDO} = 50 pF to GND, V_{MR} = 100 k Ω to V_{DD} , WDI = GND, and CTn (n = 1, 2, 3, 4) = open, unless otherwise noted. Nominal values are at T_J = 25°C.

			MIN	NOM	MAX	UNIT
t_W Input pulse width to SENSEm and \overline{MR} pins	SENSEm: 1.05 $V_{IT-} \rightarrow 0.95 \ V_{IT-}$ or 0.95 $V_{IT+} \rightarrow 1.05 \ V_{IT+}$		4		μs	
		$\overline{\text{MR}}$: 0.7 $V_{DD} \rightarrow 0.3 V_{DD}$	1		ns	

6.7 Switching Characteristics

Over operating temperature range of T_J = -40°C to 125°C, 1.8 V < V_{DD} < 6.5 V, R_{RESETn} (n = 1, 2, 3, 4) = 100 k Ω to V_{DD} , C_{RESETn} (n = 1, 2, 3, 4L, 4H) = 50 pF to GND, R_{WDO} = 100 k Ω to V_{DD} , C_{WDO} = 50 pF to GND, V_{MR} = 100 k Ω to V_{DD} , WDI = GND, and CTn (n = 1, 2, 3, 4) = open, unless otherwise noted. Typical values are at T_J = 25°C.


PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t _D	DECETA OF DECETA delegations	CTn = Open	14	20	24	 .
	RESETn or RESETn delay time	CTn = V _{DD}	225	300	375	ms
t _{WDT}	Watchdog timer time-out period ⁽¹⁾		450	600	750	ms

(1) Start from RESET1 or RESET1 release or last WDI transition.

Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated




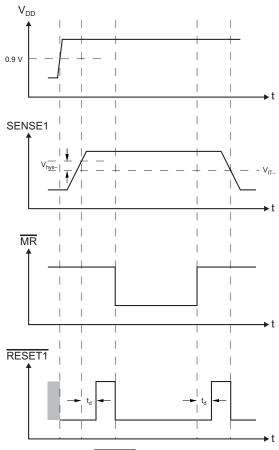

NOTE: The TPS386000-Q1 is shown here using $\overline{\text{RESETn.}}$


Figure 1. SVS-1 Timing Diagram



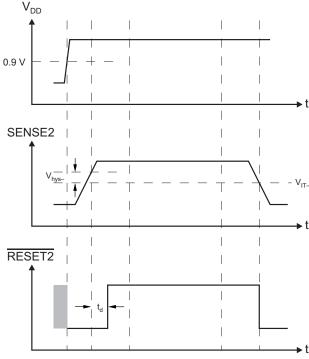

NOTE: The TPS386000-Q1 is shown here using $\overline{\text{RESETn.}}$

Figure 2. SVS-2 Timing Diagram

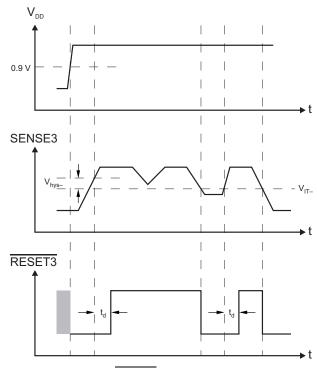


NOTE: The TPS386000-Q1 is shown here using $\overline{\text{RESETn.}}$

Figure 3. SVS-3 Timing Diagram

Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated



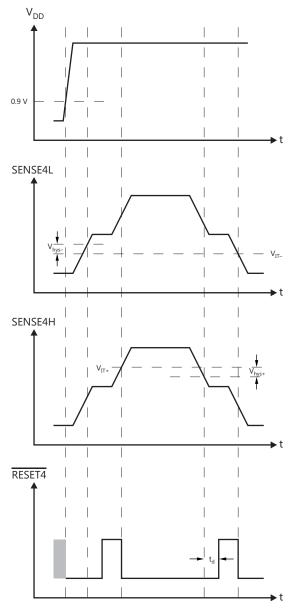


NOTE: The TPS386000-Q1 is shown here using RESETn.

Figure 4. SVS-4 Timing Diagram

Submit Documentation Feedback



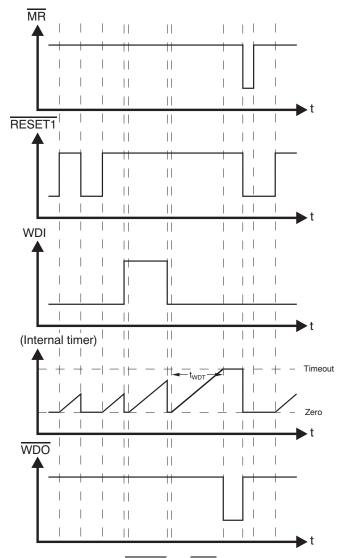


NOTE: The TPS386000-Q1 is shown here using $\overline{\text{RESETn}}$ and $\overline{\text{WDO}}.$

Figure 5. WDT Timing Diagram



6.8 Typical Characteristics

At $T_A = +25$ °C, and $V_{DD} = 3.3$ V, unless otherwise noted.

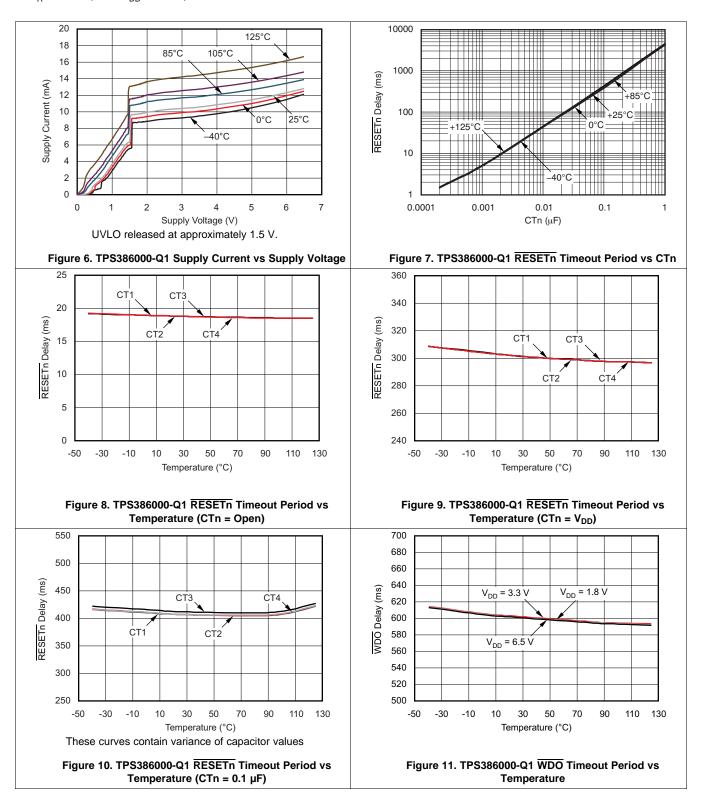

Copyright © 2010–2016, Texas Instruments Incorporated

Submit Documentation Feedback

TEXAS INSTRUMENTS

Typical Characteristics (continued)

At $T_A = +25$ °C, and $V_{DD} = 3.3$ V, unless otherwise noted.




Figure 12. TPS386000-Q1 SENSEn Minimum Pulse Width vs SENSEn Threshold Overdrive Voltage




Figure 13. TPS386000-Q1 SENSE1 Threshold Voltage vs
Temperature




Figure 14. TPS386000-Q1 SENSE2 Threshold Voltage vs Temperature




Figure 15. TPS386000-Q1 SENSE3 Threshold Voltage vs Temperature




Figure 16. TPS386000-Q1 SENSE4L Threshold Voltage vs Temperature




Figure 17. TPS386000-Q1 SENSE4H Threshold Voltage vs Temperature


Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated



Typical Characteristics (continued)


At $T_A = +25$ °C, and $V_{DD} = 3.3$ V, unless otherwise noted.



0.200 0.180 3 0.160 $V_{DD} = 1.8 V$ Output Voltage 0.140 $V_{DD} = 3.3 V$ 0.120 0.100 0.080 Low-Level 0.060 $V_{DD} = 6.5 \text{ V}$ 0.040 0.020 0 30 -50 -30 -10 10 50 70 90 110 130 Temperature (°C) All RESETn and WDO

Figure 18. Output Voltage Low vs Output Current

Figure 19. Output Voltage Low at 1 mA vs Temperature







Figure 20. Output Voltage High vs Output Current

Figure 21. Output Voltage High at 1 mA vs Temperature



 $(V_{DD} = 1.8 V)$




Figure 23. TPS386000-Q1 V_{REF} Output Load Regulation $(V_{DD} = 3.3 V)$

Copyright © 2010-2016, Texas Instruments Incorporated

TEXAS INSTRUMENTS

Typical Characteristics (continued)

At $T_A = +25$ °C, and $V_{DD} = 3.3$ V, unless otherwise noted.

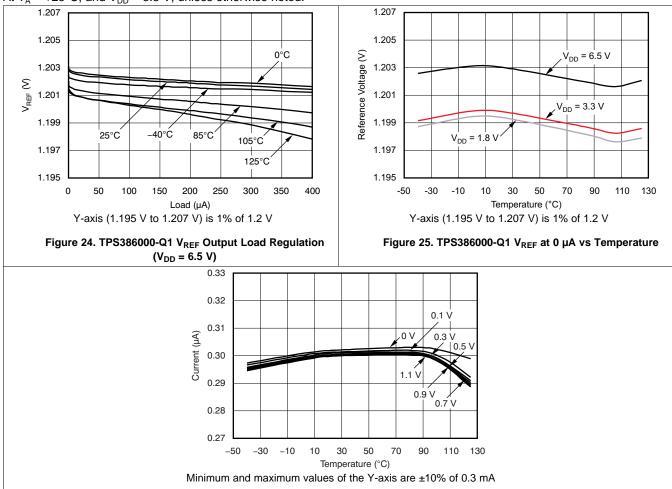


Figure 26. TPS386000-Q1 CT1 to CT4 Pin Charging Current vs Temperature Over CT Pin Voltage

7 Parametric Measurement information

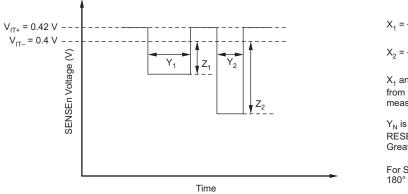


Figure 27. Test Circuit

Product Folder Links: TPS386000-Q1

$$X_1 = \frac{Z_1}{0.4} \times 100 \, (\%)$$

$$X_2 = \frac{Z_2}{0.4} \times 100 \, (\%)$$

 $\rm X_1$ and $\rm X_2$ are overdrive (%) values calculated from the actual SENSEn voltage amplitudes measured as $\rm Z_1$ and $\rm Z_2$.

 Y_N is the minimum pulse width that gives RESETn or RESETn transition. Greater Z_N produces shorter Y_N .

For SENSE4H, this graph must be inverted 180° on the voltage axis.



8 Detailed Description

8.1 Overview

The TPS386000-Q1 multi-channel supervisory device family combines four complete SVS function sets into one IC. The design of each SVS channel <u>is based</u> on the single-channel supervisory device series, TPS3808. The TPS386000-Q1 is designed to assert RESETn or RESETn signals, as shown in Table 1, Table 2, Table 3, and Table 4. The RESETn or RESETn outputs remain asserted during a user-configurable delay time after the event of reset release (see the *Reset Delay Time* section).



8.2 Functional Block Diagram

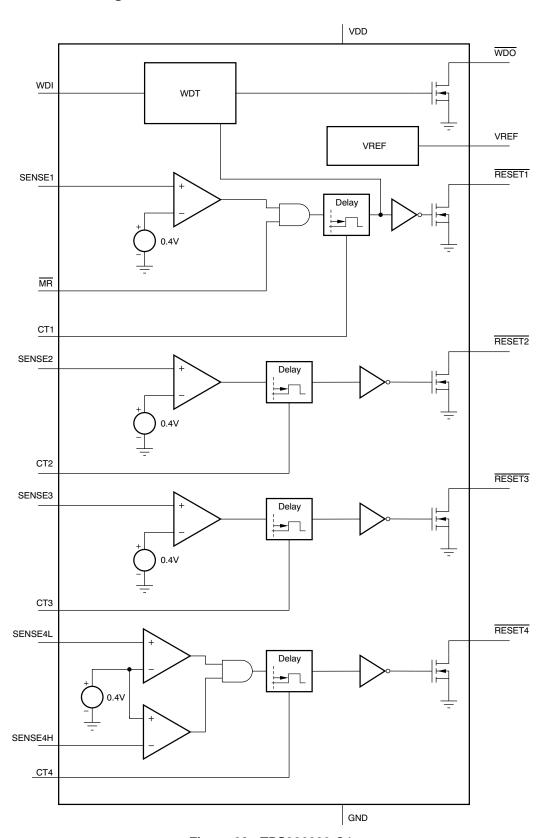


Figure 28. TPS386000-Q1

Submit Documentation Feedback

Copyright © 2010–2016, Texas Instruments Incorporated



8.3 Feature Description

8.3.1 Voltage Monitoring

Each SENSEm (m = 1, 2, 3, 4L) pin can be set to any voltage threshold above 0.4 V using an external resistor divider. The SENSE4H pin can be used for any overvoltage detection greater than 0.4 V, or for negative voltage detection using an external resistor divider (see the Sensing Voltage Less Than 0.4 V section). A broad range of voltage threshold and reset delay time adjustments can be supported, allowing these devices to be used in a wide array of applications.

8.3.2 RESET Output

In a typical TPS386000-Q1 application, RESETn or RESETn outputs are connected to the reset input of a processor (DSP, CPU, FPGA, ASIC, etc.), or connected to the enable input of a voltage regulator (DC-DC, LDO, etc.)

The TPS386000-Q1 provides open-drain reset outputs. Pullup resistors must be used to hold these lines high when RESETn is not asserted, or when RESETn is asserted. By connecting pullup resistors to the proper voltage rails (up to 6.5 V), RESETn or RESETn output nodes can be connected to the other devices at the correct interface voltage levels. The pullup resistor should be no smaller than 10 k Ω because of the safe operation of the output transistors. By using wired-OR logic, any combination of RESETn can be merged into one logic signal.

All RESETn or RESETn connections must be compatible with the VDD logic level.

The RESETn or RESETn outputs are defined for VDD voltage higher than 0.9 V. To ensure that the target processor(s) are properly reset, the VDD supply input should be fed by the available power rail as early as possible in application circuits. Table 1, Table 2, Table 3, and Table 4 are truth tables that describe how the outputs are asserted or released. Figure 1, Figure 2, Figure 3, and Figure 4 show the SVS-n timing diagrams. When the condition(s) are met, the device changes the state of SVS-n from asserted to released after a user-configurable delay time. However, the transitions from released-state to asserted-state are performed almost immediately with minimal propagation delay. Figure 3 describes relationship between threshold voltages ($V_{\text{IT-}}$ and $V_{\text{HYS-}}$) and SENSEm voltage; and all SVS-1, SVS-2, SVS-3, and SVS-4 have the same behavior of Figure 3.

8.3.3 Manual Reset

The manual reset (\overline{MR}) input allows external logic signal from other processors, logic circuits, and/or discrete sensors to initiate a device reset. Because \overline{MR} is connected to SVS-1, the $\overline{RESET1}$ or $\overline{RESET1}$ pin is intended to be connected to processor(s) as a primary reset source. A logic low at \overline{MR} causes $\overline{RESET1}$ or $\overline{RESET1}$ to assert. After \overline{MR} returns to a logic high and SENSE1 is above its reset threshold, $\overline{RESET1}$ or $\overline{RESET1}$ is released after the user-configured reset delay time. Note that unlike the $\overline{TPS3808}$ series, the $\overline{TPS386000}$ -Q1 does not integrate an internal pullup resistor between \overline{MR} and \overline{VDD} .

To control the MR function from more than one logic signal, the logic signals can be combined by wired-OR into the MR pin using multiple NMOS transistors and one pullup resistor.

8.3.4 Watchdog Timer

The TPS386000-Q1 provides a watchdog timer with a dedicated watchdog error output, $\overline{\text{WDO}}$ or WDO. The WDO or WDO output enables application board designers to easily detect and resolve the hang-up status of a processor. As with $\overline{\text{MR}}$, the watchdog timer function of the device is also tied to SVS-1. Figure 5 shows the timing diagram of the WDT function. Once $\overline{\text{RESET1}}$ or RESET1 is released, the internal watchdog timer starts its countdown. Inputting a logic level transition at WDI resets the internal timer count and the timer restarts the countdown. If the TPS386000-Q1 fails to receive any WDI rising or falling edge within the WDT period, the WDT times out and asserts $\overline{\text{WDO}}$ or WDO. After $\overline{\text{WDO}}$ or WDO is asserted, the device holds the status with the internal latch circuit. To clear this timeout status, a reset assertion of $\overline{\text{RESET1}}$ or RESET is required. That is, a negative pulse to $\overline{\text{MR}}$, a SENSE1 voltage less than $V_{\text{IT-}}$, or a VDD power-down is required.

To reset the processor by WDT timeout, $\overline{\text{WDO}}$ can be combined with $\overline{\text{RESET1}}$ by using the wired-OR with the TPS386000-Q1 option.

For legacy applications where the watchdog timer timeout causes $\overline{\text{RESET1}}$ to assert, connect $\overline{\text{WDO}}$ to $\overline{\text{MR}}$; see Figure 31 for the connections and see Figure 29 and Figure 30 for the timing diagram. This legacy support configuration is available with the TPS386000-Q1.



Feature Description (continued)

8.3.5 Immunity to SENSEn Voltage Transients

The TPS386000-Q1 is relatively immune to short negative transients on the SENSEn pin. Sensitivity to transients depends on threshold overdrive, as shown in the typical performance graph *TPS386000-Q1 SENSEn Minimum Pulse Width vs SENSEn Threshold Overdrive Voltage* (Figure 12).

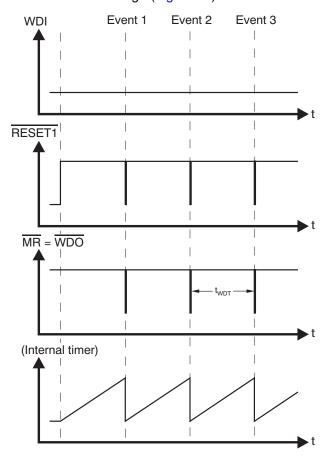


Figure 29. Legacy WDT Configuration Timing Diagram

Submit Documentation Feedback



Feature Description (continued)

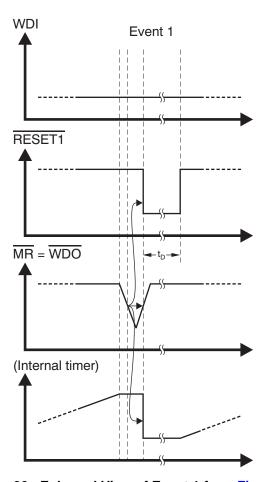


Figure 30. Enlarged View of Event 1 from Figure 29

8.4 Device Functional Modes

8.4.1 Overview

The TPS386000-Q1 multi-channel supervisory device family combines four complete SVS function sets into one IC. The design of each SVS channel is based on the single-channel supervisory device series, TPS3808. The TPS386000-Q1 is designed to assert RESETn or RESETn signals, as shown in Table 1, Table 2, Table 3, and Table 4. The RESETn or RESETn outputs remain asserted during a user-configurable delay time after the event of reset release (see the *Reset Delay Time* section).

Table 1. SVS-1 Truth Table

		OUTPUT	
CONE	DITION	TPS386000-Q1	STATUS
$\overline{MR} = Low$	SENSE1 < V _{IT}	RESET1 = Low	Reset asserted
$\overline{MR} = Low$	SENSE1 > V _{IT} _	RESET1 = Low	Reset asserted
MR = High	SENSE1 < V _{IT}	RESET1 = Low	Reset asserted
MR = High	SENSE1 > V _{IT}	RESET1 = High	Reset released after delay



Table 2. SVS-2 Truth Table

	OUTPUT	
CONDITION	TPS386000-Q1	STATUS
SENSE2 < V _{IT} _	RESET2 = Low	Reset asserted
SENSE2 > V _{IT} _	RESET2 = High	Reset released after delay

Table 3. SVS-3 Truth Table

	OUTPUT	
CONDITION	TPS386000-Q1	STATUS
SENSE3 < V _{IT} _	RESET3 = Low	Reset asserted
SENSE3 > V _{IT} _	RESET3 = High	Reset released after delay

Table 4. SVS-4 Truth Table

		OUTPUT			
CONI	DITION	TPS386000-Q1	STATUS		
SENSE4L < V _{IT} _	SENSE4H > V _{IT+}	RESET4 = Low	Reset asserted		
SENSE4L < V _{IT}	SENSE4H < V _{IT+}	RESET4 = Low	Reset asserted		
SENSE4L > V _{IT}	SENSE4H > V _{IT+}	RESET4 = Low	Reset asserted		
SENSE4L > V _{IT}	SENSE4H < V _{IT+}	RESET4 = High	Reset released after delay		

Table 5. Watchdog Timer (WDT) Truth Table

		OUTPUT			
WDO	WDO WDO RESET1		WDI PULSE INPUT	TPS386000-Q1	STATUS
Low	High	Asserted	Toggling	$\overline{\text{WDO}} = \text{low}$	Remains in WDT timeout
Low	High	Asserted	610 ms after last WDI↑ or WDI↓	$\overline{\text{WDO}} = \text{low}$	Remains in WDT timeout
Low	High	Released	Toggling	WDO = low	Remains in WDT timeout
Low	High	Released	610 ms after last WDI↑ or WDI↓	$\overline{\text{WDO}} = \text{low}$	Remains in WDT timeout
High	Low	Asserted	Toggling	WDO = high	Normal operation
High	Low	Asserted	610 ms after last WDI↑ or WDI↓	$\overline{\text{WDO}} = \text{high}$	Normal operation
High	Low	Released	Toggling	$\overline{\text{WDO}} = \text{high}$	Normal operation
High	Low	Released	610 ms after last WDI↑ or WDI↓	WDO = low	Enters WDT timeout



Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

9.1.1 SENSE Input

The SENSEm inputs are pins that allow any system voltages to be monitored. If the voltage at the SENSE1, SENSE2, SENSE3, or SENSE4L pins drops below V_{IT-}, then the corresponding reset outputs are asserted. If the voltage at the SENSE4H pin exceeds V_{IT+}, then RESET4 or RESET4 is asserted. The comparators have a builtin hysteresis to ensure smooth reset output assertions and deassertions. Although not required in most cases, for extremely noise applications, it is good analog design practice to place a 1 nF to 10 nF bypass capacitor at the SENSEm input in order to reduce sensitivity to transients, layout parasitics, and interference between power rails monitored by this device. A typical connection of resistor dividers are shown in Figure 31. All the SENSEm pins can be used to monitor voltage rails down to 0.4 V. Threshold voltages can be calculated by following equations:

(1) $V_{DD1 target} = (1 + R_{S1H}/R_{S1L}) \times 0.4 (V)$ (2)

$$V_{DD2 \text{ target}} = (1 + R_{S2H}/R_{S2L}) \times 0.4 \text{ (V)}$$

$$V_{DD3 \text{ target}} = (1 + R_{S3H}/R_{S3L}) \times 0.4 \text{ (V)}$$
 (4)

$$V_{DD4 \text{ target1}} = \{1 + R_{S4H}/R_{S4M} + R_{S4L}\} \times 0.4 \text{ (V)}$$

where

$$V_{DD4_target2} = \{1 + R_{S4H} + R_{S4M})/R_{S4L}\} \times 0.4 (V)$$

where

9.1.2 Window Comparator

The comparator at the SENSE4H pin has the opposite comparison polarity to the other SENSEm pins. In the configuration shown in Figure 31, this comparator monitors overvoltage of the VDD4 node; combined with the comparator at SENSE4L, SVS-4 forms a window comparator.

9.1.3 Sensing Voltage Less Than 0.4 V

Copyright © 2010-2016, Texas Instruments Incorporated

By using voltage reference output VREF, the SVS-4 comparator can monitor negative voltage or positive voltage lower than 0.4 V. Figure 32 shows this usage in an application circuit. SVS-4 monitors the positive and negative voltage power rail (for example, +15V and -15V supply to an op amp) and the RESET4 or RESET4 output status continues to be as described in Table 4. Note that R_{S42H} is located at higher voltage position than R_{S42I}. The threshold voltage calculations are shown in the following equations:

$$VDD41_target = (1 + R_{S41H}/R_{S41I}) \times 0.4 \text{ (V)}$$
(7)

$$VDD42_target = (1 + R_{S42L}/R_{S42H}) \times 0.4 - R_{S42L}/R_{S42H} \times V_{REF} = 0.4 - R_{S42L}/R_{S42H} \times 0.8 \; (V)$$

(8)

Application Information (continued)

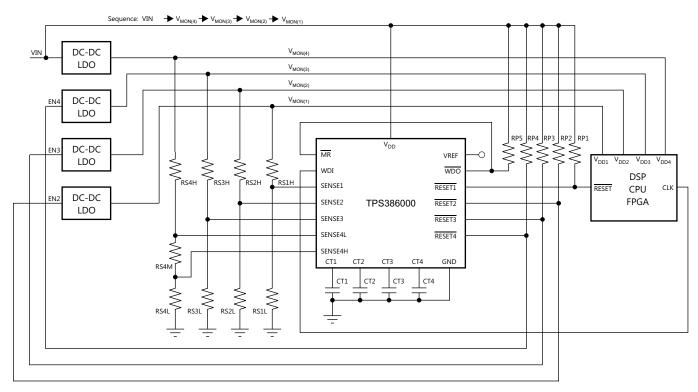


Figure 31. Typical Application Circuit (SVS-4: Window Comparator)

9.1.4 Reset Delay Time

Each of the SVS-n channels can be configured independently in one of three modes. Table 6 describes the delay time settings.

Table 6. Delay Timing Selection

CTn CONNECTION	DELAY TIME			
Pullup to V _{DD}	300 ms (typical)			
Open	20 ms (typical)			
Capacitor to GND	Programmable			

To select the 300-ms fixed delay time, the CTn pin should be pulled up to VDD using a resistor from 40 k Ω to 200 k Ω . Note that there is a pulldown transistor from CTn to GND that turns on every time the device powers on to determine and confirm CTn pin status; therefore, a direct connection of CTn to VDD causes a large current flow. To select the 20-ms fixed delay time, the CTn pin should be left open. To program a user-defined adjustable delay time, an external capacitor must be connected between CTn and GND. The adjustable delay time can be calculated by the following equation:

$$C_{CT} (nF) = [t_{DELAY} (ms) - 0.5(ms)] \times 0.242$$
 (9)

Using this equation, a delay time can be set to between 1.4 ms to 10 s. The external capacitor should be greater than 220 pF (nominal), so that the TPS386000-Q1 can distinguish it from an open CT pin. The reset delay time is determined by the time it takes an on-chip, precision 300 nA current source to charge the external capacitor to 1.24 V. When the RESETn or RESETn outputs are asserted, the corresponding capacitors are discharged. When the condition to release RESETn or RESETn occurs, the internal current sources are enabled and begin to charge the external capacitors. When the CTn voltage on a capacitor reaches 1.24 V, the corresponding RESETn or RESETn pins are released. Note that a low leakage type capacitor (such as ceramic) should be used, and that stray capacitance around this pin may cause errors in the reset delay time.



9.2 Typical Application

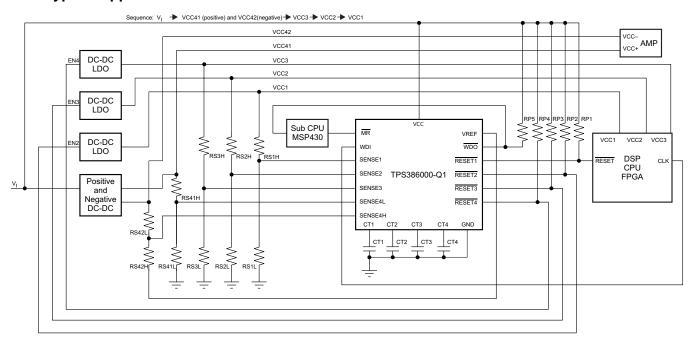


Figure 32. Application Schematic

9.2.1 Design Requirements

This design is intended to monitor the voltage rails for an FPGA. Table 7 summarizes the design requirements.

 PARAMETER
 DESIGN REQUIREMENT

 VDD
 5 V

 VMON(1)
 1.8 V -5%

 VMON(2)
 1.5 V -5%

 VMON(3)
 1.2 V -5%

 VMON(4)
 1 V ±5%

 Approximate start-up time
 100 ms

Table 7. Design Requirements

9.2.2 Detailed Design Procedure

Select the pullup resistors to be 100 k Ω to ensure that $V_{OL} \le 0.4 \text{ V}$.

Use Equation 9 to set CT = 22 nF for all channels to obtain an approximate start-up delay of 100 ms.

Select RSnL = 10 k Ω for all channels to ensure DC accuracy.

Use Equation 1 through Equation 6 to determine the values of RSnH and RS4M. Using standard 1% resistors, Table 8 shows the results.


Table 8. Design Results

RESISTOR	VALUE (kΩ)
RS1H	32.4
RS2H	25.5
RS3H	18.7
RS4H	14.3
RS4M	1



The FPGA does not have a separate watchdog failure input, so a legacy connection is used by connecting $\overline{\text{WDO}}$ to $\overline{\text{MR}}$.

9.2.3 Application Curves

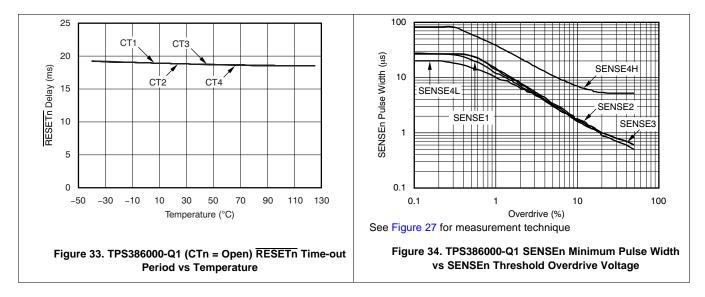

10 Power Supply Recommendations

The TPS386000-Q1 can operate using a 1.8-V to a 6.5-V input supply. TI recommends placing a $0.1-\mu F$ capacitor placed next to the V_{DD} pin to the GND node. This power supply should be less than 1.8 V in normal operation to ensure that the internal UVLO circuit does not assert reset.

11 Layout

11.1 Layout Guidelines

Follow these guidelines to lay out the printed-circuit-board (PCB) that is used for the TPS386000-Q1 family of devices.

- Keep the traces to the timer capacitors as short as possible to optimize accuracy.
- Avoid long traces from the SENSE pin to the resistor divider. Instead, run the long traces from the RSnH to V_{MON(n)}.
- Place the V_{DD} decoupling capacitor (C_{VDD}) close to the device.
- Avoid using long traces for the V_{DD} supply node. The V_{DD} capacitor (C_{VDD}), along with parasitic inductance from the supply to the capacitor, can form an LC tank and create ringing with peak voltages above the maximum V_{DD} voltage.

Submit Documentation Feedback



11.2 Layout Example

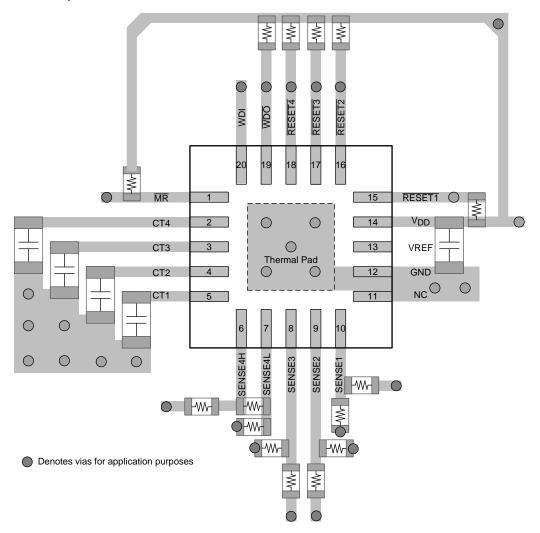


Figure 35. Example Layout (RGP Package)

Copyright © 2010–2016, Texas Instruments Incorporated

Submit Documentation Feedback



12 Device and Documentation Support

12.1 Documentation Support

12.1.1 Related Documentation

For related documentation, see the following:

- TPS386000-Q1 Pin FMEA, Application Report, SLVA627
- Optimizing Resistor Dividers at a Comparator Input, Application Report, SLVA450

12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.3 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.5 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

www.ti.com 10-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
TPS386000QRGPRQ1	Active	Production	QFN (RGP) 20	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	TPS 386000Q
TPS386000QRGPRQ1.A	Active	Production	QFN (RGP) 20	3000 LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	TPS 386000Q

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF TPS386000-Q1:

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

PACKAGE OPTION ADDENDUM

www.ti.com 10-Nov-2025

Catalog : TPS386000

NOTE: Qualified Version Definitions:

• Catalog - TI's standard catalog product

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Jul-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS386000QRGPRQ1	QFN	RGP	20	3000	330.0	12.4	4.25	4.25	1.15	8.0	12.0	Q2

PACKAGE MATERIALS INFORMATION

www.ti.com 19-Jul-2025




*All dimensions are nominal

Device Package Type		Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)	
TPS386000QRGPRQ1	QFN	RGP	20	3000	353.0	353.0	32.0	

4 x 4, 0.5 mm pitch

VERY THIN QUAD FLATPACK

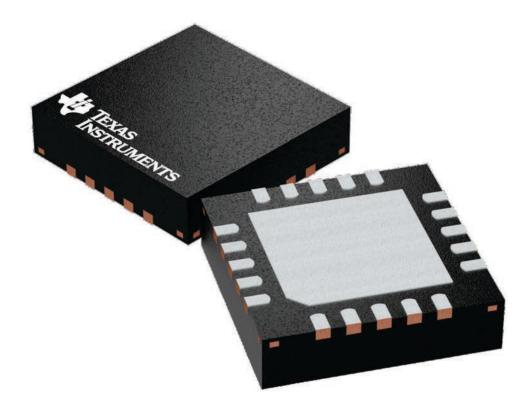

Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4224735/A



RGP (S-PVQFN-N20) PLASTIC QUAD FLATPACK NO-LEAD 4,15 3,85 A В 15 11 10 16 4,15 3,85 20 6 Pin 1 Index Area Top and Bottom 0,20 Nominal Lead Frame 1,00 0,80 Seating Plane _____0,08 C Seating Height $\frac{0.05}{0.00}$ C THERMAL PAD 20 SIZE AND SHAPE 4X 2,00 SHOWN ON SEPARATE SHEET 16 10 0,50 15 $20X \frac{0,30}{0,18}$

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M—1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) package configuration.
- D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
- E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.

0,10 M C A B 0,05 M C

4203555/G 07/11

🖒 Check thermal pad mechanical drawing in the product datasheet for nominal lead length dimensions.



Bottom View

RGP (S-PVQFN-N20)


PLASTIC QUAD FLATPACK NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No—Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.

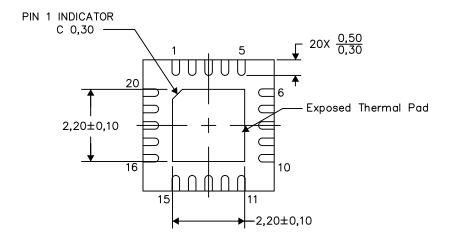

Bottom View

Exposed Thermal Pad Dimensions


4206346-4/AA 11/13

NOTES: A. All linear dimensions are in millimeters



RGP (S-PVQFN-N20)

PLASTIC QUAD FLATPACK NO-LEAD

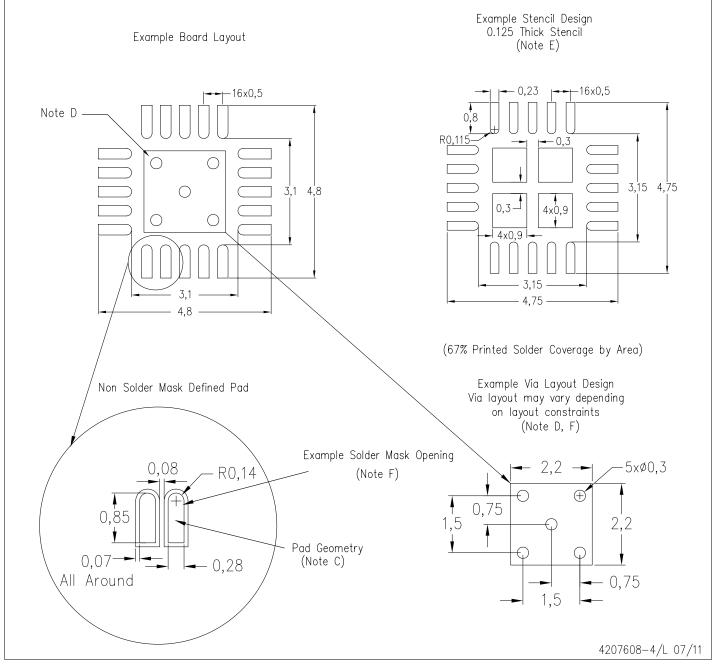

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat—Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at www.ti.com www.ti.com.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025