





TPSM63606

SLVSGB4B - OCTOBER 2021 - REVISED APRIL 2022


TPSM63606 High-Density, 3-V to 36-V Input, 1-V to 16-V Output, 6-A Synchronous Buck DC/DC Power Module With Enhanced HotRod™ QFN Package

1 Features

- **Functional Safety-Capable**
 - Documentation available to aid functional safety system design
- Versatile 36-V_{IN}, 6-A_{OUT} synchronous buck module
 - Integrated MOSFETs, inductor, and controller
 - Adjustable output voltage from 1 V to 16 V
 - 5.0-mm × 5.5-mm × 4-mm overmolded package
 - 40°C to 125°C junction temperature range
 - Frequency adjustable from 200 kHz to 2.2 MHz
 - Negative output voltage capability
- Ultra-high efficiency across the full load range
 - 95%+ peak efficiency
 - External bias option for improved efficiency
 - Shutdown quiescent current of 0.6 µA (typical)
- Ultra-low conducted and radiated EMI signatures
 - Low-noise package with dual input paths and integrated capacitors reduces switch ringing
 - Spread-spectrum modulation (S suffix)
 - Resistor-adjustable switch-node slew rate
 - Meets CISPR 11 and 32 class B emissions
- Suitable for scalable power supplies
 - Pin compatible with the TPSM63604 (36 V, 4 A)
- Inherent protection features for robust design
 - Precision enable input and open-drain PGOOD indicator for sequencing, control, and V_{IN} UVLO
 - Overcurrent and thermal shutdown protections
- Create a custom design using the TPSM63606 with the WEBENCH® Power Designer

2 Applications

- Test and measurement, aerospace and defense
- Factory automation and control
- Buck and inverting buck-boost power supplies

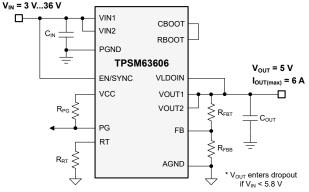

Typical Schematic

3 Description

Deriving from a family of synchronous buck modules, the TPSM63606 is a highly integrated 36-V, 6-A DC/DC solution that combines power MOSFETs, a shielded inductor, and passives in an Enhanced HotRod™ QFN package. The module has VIN and VOUT pins located at the corners of the package for optimized input and output capacitor placement. Four larger thermal pads beneath the module enable a simple layout and easy handling in manufacturing.


With an output voltage from 1 V to 16 V, the TPSM63606 is designed to quickly and easily implement a low-EMI design in a small PCB footprint. The total solution requires as few as four external components and eliminates the magnetics and compensation part selection from the design process.

Although designed for small size and simplicity in space-constrained applications, the TPSM63606 module offers many features for robust performance: precision enable with hysteresis for adjustable inputvoltage UVLO, resistor-programmable switch node slew rate and spread spectrum option for improved EMI. integrated VCC. bootstrap, and input capacitors for increased reliability and higher density, constant switching frequency over the full load current range, and a PGOOD indicator for sequencing, fault protection, and output voltage monitoring.

Device Information

PART NUMBER	PACKAGE ⁽¹⁾	BODY SIZE (NOM)
TPSM63606	B3QFN (20)	5.0 mm × 5.5 mm
TPSM63606S	63QFN (20)	5.0 11111 ^ 5.5 11111

For all available packages, see the orderable addendum at the end of the data sheet.

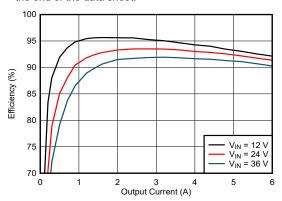

Typical Efficiency, $V_{OUT} = 5 V$, $F_{SW} = 1 MHz$



Table of Contents

1 Features	1	8.3 Feature Description	15
2 Applications	1	8.4 Device Functional Modes	
3 Description		9 Applications and Implementation	22
4 Revision History	2	9.1 Application Information	22
5 Device Comparison Table		9.2 Typical Applications	
6 Pin Configuration and Functions	3	10 Power Supply Recommendations	
7 Specifications		11 Layout	
7.1 Absolute Maximum Ratings	5	11.1 Layout Guidelines	
7.2 ESD Ratings	<u>5</u>	11.2 Layout Example	32
7.3 Recommended Operating Conditions	6	12 Device and Documentation Support	
7.4 Thermal Information	6	12.1 Device Support	34
7.5 Electrical Characteristics	7	12.2 Documentation Support	35
7.6 System Characteristics	9	12.3 Receiving Notification of Documentation Updates	s <mark>35</mark>
7.7 Typical Characteristics	10	12.4 Support Resources	35
7.8 Typical Characteristics (V _{IN} = 12 V)	12	12.5 Trademarks	35
7.9 Typical Characteristics (V _{IN} = 24 V)	13	12.6 Electrostatic Discharge Caution	35
8 Detailed Description	14	12.7 Glossary	35
8.1 Overview	14	13 Mechanical, Packaging, and Orderable	
8.2 Functional Block Diagram		Information	35

4 Revision History

Changes from Revision A (December 2021) to Revision B (April 2022)	Page
Added link to the TPSM6360x module family	
Increased peak reflow case temperature to 250°C	
Removed reference to the external capacitor in Section 8.3.11	
Added module weight	
Changes from Revision * (October 2021) to Revision A (December 2021)	Page
Changed document status from Advance Information to Production Data	1

5 Device Comparison Table

Device	Orderable Part Number	Rated Output Current	Junction Temperature Range	Spread Spectrum	Slew-Rate Control	External Sync
TPSM63602	TPSM63602RDHR	2 A	–40°C to 125°C	No	Yes	Yes
TPSM63603	TPSM63603RDHR	3 A	–40°C to 125°C	No	Yes	Yes
TPSM63603S	TPSM63603SRDHR	3 A	–40°C to 125°C	Yes	Yes	Yes
TPSM63603E	TPSM63603EXTRDHR	3 A	–55°C to 125°C	Yes	Yes	Yes
TPSM63604	TPSM63604RDLR	4 A	–40°C to 125°C	No	Yes	Yes
TPSM63606	TPSM63606RDLR	6 A	–40°C to 125°C	No	Yes	Yes
TPSM63606S	TPSM63606SRDLR	6 A	–40°C to 125°C	Yes	Yes	Yes
TPSM63606E	TPSM63606EXTRDLR	6 A	–55°C to 125°C	Yes	Yes	Yes

6 Pin Configuration and Functions

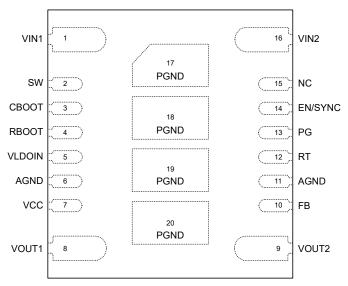


Figure 6-1. 20-Pin QFN RDL Package (Top View)

Table 6-1. Pin Functions

Pin		Type ⁽¹⁾	Decariation
Name	NO.	Type	Description
VIN1, VIN2	1, 16	Р	Input supply voltage. Connect the input supply to these pins. Connect input capacitors between these pins and PGND in close proximity to the device.
SW	2	0	Switch node. Do not place any external component on this pin or connect to any signal. The amount of copper placed on this pin must be kept to a minimum to prevent issues with noise and EMI.
CBOOT	3	I/O	Bootstrap pin for the internal high-side gate driver. A 100-nF bootstrap capacitor is internally connected from this pin to SW within the module to provide the bootstrap voltage. CBOOT is brought out to use in conjunction with RBOOT to effectively lower the value of the internal series bootstrap resistance to adjust the switch-node slew rate, if necessary.
RBOOT	4	I/O	External bootstrap resistor connection. Internal to the device, a $100-\Omega$ bootstrap resistor is connected between RBOOT and CBOOT. RBOOT is brought out to use in conjunction with CBOOT to effectively lower the value of the internal series bootstrap resistance to adjust the switch-node slew rate, if necessary.
VLDOIN	5	Р	Input bias voltage. Input to the internal LDO that supplies the internal control circuits. Connect to an output voltage point to improve efficiency. Connect an optional high-quality 0.1-µF to 1-µF capacitor from this pin to ground for improved noise immunity. If the output voltage is above 12 V, connect this pin to ground.



Table 6-1. Pin Functions (continued)

Pin		T (1)	Description
Name	NO.	Type ⁽¹⁾	Description
AGND	6, 11	G	Analog ground. Zero-voltage reference for internal references and logic. All electrical parameters are measured with respect to this pin. <i>These pins must be connected to PGND</i> . See Section 11.2 for a recommended layout.
VCC	7	0	Internal LDO output. Used as a supply to the internal control circuits. Do not connect to any external loads. A 1-µF capacitor internally connects from VCC to AGND.
VOUT1, VOUT2	8, 9	Р	Output voltage. These pins are connected to the internal buck inductor. Connect these pins to the output load and connect external output capacitors between these pins and PGND.
FB	10	I	Feedback input. Connect the midpoint of the feedback resistor divider to this pin. Connect the upper resistor (R_{FBT}) of the feedback divider to V_{OUT} at the desired point of regulation. Connect the lower resistor (R_{FBB}) of the feedback divider to AGND. Do not leave open or connect to ground.
RT	12	I	Frequency setting pin used to set the switching frequency between 200 kHz and 2.2 MHz by placing an external resistor from RT to AGND. Do not leave open or connect to ground.
PG	13	0	Open-drain power-good monitor output that asserts low if the FB voltage is not within the specified window thresholds. A 10 -k Ω to 100 -k Ω pullup resistor to a suitable voltage is required. If not used, PG can be left open or connected to GND.
EN/SYNC	14	I	Precision enable input pin. High = on, Low = off. Can be connected to VIN. Precision enable allows the pin to be used as an adjustable input voltage UVLO. It also functions as the synchronization input pin. Used to synchronize the device switching frequency to a system clock. Triggers on the rising edge of an external clock. A capacitor can be used to AC couple the synchronization signal to this pin. The module can be turned off by using an open-drain/collector device to connect this pin to AGND. Connect an external resistor divider between this pin, VIN and AGND to create an external UVLO.
NC	15	_	No connection. Tie to GND or leave open.
PGND	17, 18, 19, 20	G	Power ground. This is the return current path for the power stage of the device. Connect these pads to the input supply return, the load return, and the capacitors associated with the VIN and VOUT pins. See Section 11.2 for a recommended layout.

⁽¹⁾ P = Power, G = Ground, I = Input, O = Output

7 Specifications

7.1 Absolute Maximum Ratings

Limits apply over $T_J = -40^{\circ}\text{C}$ to 150°C (unless otherwise noted). (1)

		MIN	MAX	UNIT
	VIN1, VIN2 to AGND, PGND	-0.3	42	V
	RBOOT to SW	-0.3	5.5	V
· ·	CBOOT to SW	-0.3	5.5	V
	VLDOIN to AGND, PGND	-0.3	min (V _{VIN} + 0.3, 16)	V
Input voltage	EN/SYNC to AGND, PGND	-0.3	42	V
	RT to AGND, PGND	-0.3	5.5	V
Output voltage	FB to AGND, PGND	-0.3	16	V
	PG to AGND, PGND	0	20	V
	PGND to AGND	-1	2	V
Input current	VCC to AGND, PGND	-0.3	5.5	V
	SW to AGND, PGND ⁽²⁾	-0.3	42	V
	VOUT1, VOUT2 to AGND, PGND	-0.3	16	V
Input current	PG		10	mA
TJ	Junction temperature	-40	150	°C
T _A	Ambient temperature	-40	125	°C
T _{stg}	Storage temperature	-55	150	°C
Peak reflow case temperature			250	°C
Maximum number of reflows allowed			3	
Mechanical vibration	MIL-STD-883D, Method 2007.2, 20 Hz to 2 kHz		20	G
Mechanical shock	MIL-STD-883D, Method 2002.3, 1 ms, 1/2 sine, mounted		500	G

⁽¹⁾ Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

7.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±1500	V
V _(ESD)	Liectrostatic discharge	Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±500	V

⁽¹⁾ JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

⁽²⁾ A voltage of 2 V below PGND and 2 V above VIN can appear on this pin for ≤ 200 ns with a duty cycle of ≤ 0.01%.

⁽²⁾ JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



7.3 Recommended Operating Conditions

Limits apply over $T_1 = -40^{\circ}$ C to 125°C (unless otherwise noted).

		MIN	NOM	MAX	UNIT
Input voltage	VIN (input voltage range after start-up)	3		36	V
Input voltage	VLDOIN			min (V _{VIN} , 12)	V
Output voltage	VOUT ⁽¹⁾	1		16	V
Output current	IOUT ⁽²⁾	0		6	Α
Frequency	F _{SW} set by RT or SYNC	200		2200	kHz
Input current	PG			2	mA
Output voltage	PG			16	V
TJ	Operating junction temperature	-40		125	°C
T _A	Operating ambient temperature	-40		105	°C

- (1) Under no conditions should the output voltage be allowed to fall below zero volts.
- (2) Maximum continuous DC current may be derated when operating with high switching frequency and/or high ambient temperature. Refer to the *Typical Characteristics* section for details.

7.4 Thermal Information

		TPSM63606	
	THERMAL METRIC ⁽¹⁾	RDL (QFN)	UNIT
		20 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance (TPSM63606 EVM)	22.6	°C/W
$R_{\theta JA}$	Junction-to-ambient thermal resistance (2)	33.1	°C/W
ΨЈТ	Junction-to-top characterization parameter (3)	1	°C/W
ΨЈВ	Junction-to-board characterization parameter (4)	12.3	°C/W

- (1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report
- (2) The junction-to-ambient thermal resistance, $R_{\theta JA}$, applies to devices soldered directly to a 75 mm × 75 mm four-layer PCB with 2 oz. copper and natural convection cooling. Additional airflow and PCB copper area reduces $R_{\theta JA}$.
- (3) The junction-to-top board characterization parameter, ψ_{JT}, estimates the junction temperature, T_J, of a device in a real system, using a procedure described in JESD51-2A (section 6 and 7). T_J = ψ_{JT} × P_{DIS} + T_T; where P_{DIS} is the power dissipated in the device and T_T is the temperature of the top of the device.
- (4) The junction-to-board characterization parameter, ψ_{JB}, estimates the junction temperature, T_J, of a device in a real system, using a procedure described in JESD51-2A (sections 6 and 7). T_J = ψ_{JB} × P_{DIS} + T_B; where P_{DIS} is the power dissipated in the device and T_B is the temperature of the board 1mm from the device.

Product Folder Links: TPSM63606



7.5 Electrical Characteristics

Limits apply over $T_J = -40^{\circ}\text{C}$ to 125°C , $V_{\text{IN}} = 24 \text{ V}$, $V_{\text{OUT}} = 3.3 \text{ V}$, $V_{\text{LDOIN}} = 5 \text{ V}$, $F_{\text{SW}} = 800 \text{ kHz}$ (unless otherwise noted). Minimum and maximum limits are specified through production test or by design. Typical values represent the most likely parametric norm and are provided for reference only.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
SUPPLY VOLT	AGE					
	lanut energting voltage range	Needed to start up (over the I _{OUT} range)	3.95		36	V
V _{IN}	Input operating voltage range	Once operating (over the I _{OUT} range)	3		36	V
V _{IN_HYS}	Hysteresis ⁽¹⁾			1		V
I _{Q VIN}	Input operating quiescent current (non-switching)	T _A = 25°C, V _{EN/SYNC} = 3.3 V, V _{FB} = 1.5 V		7		μA
SDN VIN	VIN shutdown quiescent current	V _{EN/SYNC} = 0 V, T _A = 25°C		1		μA
ENABLE	1					
V _{EN RISE}	EN voltage rising threshold		1.161	1.263	1.365	V
 V _{EN_FALL}	EN voltage falling threshold			0.91		V
 ∕ _{EN HYS}	EN voltage hysteresis		0.303	0.353	0.404	V
V _{EN WAKE}	EN wake-up threshold		0.4			V
l _{EN}	Input current into EN/SYNC (non-switching)	V _{EN/SYNC} = 3.3 V, V _{FB} = 1.5 V		10		nA
t _{EN}	EN high to start of switching delay ⁽¹⁾	LIVOTIVO / IB		0.7		ms
VCC INTERNA		1				
		3.4 V ≤ V _{VLDOIN} ≤ 12.5 V		3.3		V
V _{CC}	Internal LDO VCC voltage	V _{VLDOIN} = 3.1 V, non-switching		3.1		
		$V_{\text{VLDOIN}} < 3.1 \text{ V}^{(1)}$		3.6		
V _{CC_UVLO}	VCC UVLO rising threshold	$V_{IN} < 3.6 V^{(2)}$		3.6		
./	VCC UVLO hysteresis ⁽²⁾	Hysteresis below V _{CC UVLO}		1.1		
V _{CC_UVLO_HYS}		V _{EN/SYNC} = 3.3 V, V _{FB} = 1.5 V		25	31	
VLDOIN FEEDBACK	Input current into VLDOIN pin (non-switching) ⁽³⁾	VEN/SYNC - 3.3 V, VFB - 1.3 V			31	μA
	Adjustable sutnut veltage range	Over the L. renge			16	V
V _{OUT}	Adjustable output voltage range	Over the I _{OUT} range	1	4.0	16	
V _{FB}	Feedback voltage Feedback voltage accuracy	$T_A = 25^{\circ}\text{C}$, $I_{OUT} = 0$ A Over the V_{IN} range, $V_{OUT} = 1$ V, $I_{OUT} = 0$	-1%	1.0	+1%	V
	Load regulation	A, F _{SW} = 200 kHz		0.40/		
V _{FB}	Load regulation	$T_A = 25^{\circ}C, 0 A \le I_{OUT} \le 6 A$		0.1%		
V _{FB}	Line regulation	$T_A = 25^{\circ}C$, $I_{OUT} = 0$ A, $4 \text{ V} \le V_{IN} \le 36 \text{ V}$		0.1%		
FB	Input current into FB	V _{FB} = 1 V		10		nA
CURRENT	T ₋	I			- 1	
OUT	Output current	T _A = 25°C	0		6	A
OCL	Output overcurrent (DC) limit threshold			8.3		A
L_HS	High-side switch current limit	Duty cycle approaches 0%	8.3	9.3	10.3	Α
L_LS	Low-side switch current limit		6.5	7.1	7.7	Α
L_NEG	Negative current limit			-3		Α
VHICCUP	Ratio of FB voltage to in-regulation FB voltage to enter hiccup	Not during soft start		40%		
^t w	Short circuit wait time ("hiccup" time before soft start)			80		ms
SOFT START						
ss	Time from first SW pulse to V _{FB} at 90%	V _{IN} ≥ 4.2 V	3.5	5	7	ms
tss2	Time from first SW pulse to release of FPWM lockout if output not in regulation ⁽¹⁾	V _{IN} ≥ 4.2 V	9.5	13	17	ms
POWER GOOD)					
PG _{OV}	PG upper threshold – rising	% of V _{OUT} setting	105%	107%	110%	
PG _{UV}	PG lower threshold – falling	% of V _{OUT} setting	92%	94%	96.5%	
PG _{HYS}	PG threshold hysteresis (rising & falling)	% of V _{OUT} setting		1.3%		
V _{IN_PG_VALID}	Input voltage for valid PG output	46 μA pull-up, V _{EN/SYNC} = 0 V	1.0			V
V _{PG LOW}	PG low-level output voltage	2 mA pullup to PG pin, V _{EN/SYNC} = 3.3 V			0.4	V



Limits apply over $T_J = -40^{\circ}\text{C}$ to 125°C , $V_{\text{IN}} = 24$ V, $V_{\text{OUT}} = 3.3$ V, $V_{\text{LDOIN}} = 5$ V, $F_{\text{SW}} = 800$ kHz (unless otherwise noted). Minimum and maximum limits are specified through production test or by design. Typical values represent the most likely parametric norm and are provided for reference only.

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I _{PG}	Input current into PG pin when open drain output is high	V _{PG} = 3.3 V		10		nA
I _{OV}	Pulldown current at the SW node during an overvoltage condition			0.5		mA
t _{PG_FLT_RISE}	Delay time to PG high signal		1.5	2.0	2.5	ms
t _{PG_FLT_FALL}	Glitch filter time constant for PG function			120		μs
SWITCHING I	FREQUENCY					
f _{SW_RANGE}	Switching frequency range by RT or SYNC		200		2200	kHz
f _{SW_RT1}	Default switching frequency by R _{RT}	R _{RT} = 66.5 kΩ	180	200	220	kHz
f _{SW_RT2}	Default switching frequency by R _{RT}	R _{RT} = 5.76 kΩ	1980	2200	2420	kHz
f _{S_SS}	Frequency span of spread spectrum operation – largest deviation from center frequency	Spread spectrum active (TPSM63606S)		2%		
f _{PSS}	Spread spectrum pattern frequency ⁽¹⁾	Spread spectrum active, f _{SW} = 2.1 MHz			1.5	Hz
SYNCHRONIZ	ZATION				'	
V _{EN_SYNC}	Minimum edge amplitude to sync using EN/SYNC	Rise/fall time < 30 ns			2.4	V
t _B	Blanking of EN after rising or falling edges ⁽¹⁾		4		28	μs
t _{SYNC_EDGE}	EN/SYNC signal hold time after edge for edge recognition ⁽¹⁾		100			ns
POWER STA	GE					
V _{BOOT_UVLO}	Voltage on CBOOT pin relative to SW that turns off the high-side switch			2.1		V
t _{ON(min)}	Minimum ON pulse width ⁽¹⁾	V _{OUT} = 1 V, I _{OUT} = 1 A, RBOOT shorted to CBOOT		55	70	ns
t _{ON(max)}	Maximum ON pulse width ⁽¹⁾			9		μs
t _{OFF(min)}	Minimum OFF pulse width	V _{IN} = 4 V, I _{OUT} = 1 A, RBOOT shorted to CBOOT		65	85	ns
THERMAL SH	IUTDOWN				'	
T _{SHD}	Thermal shutdown threshold (1)	Temperature rising	158	168	180	°C
T _{SHD-HYS}	Thermal shutdown hysteresis (1)			10		°C

- (1) Parameter specified by design, statistical analysis and production testing of correlated parameters. Not production tested.
- (2) Production tested with $V_{IN} = 3 \text{ V}$.
- (3) This is the current used by the device while not switching, open loop, with FB pulled to +5% of nominal. It does not represent the total input current to the system while regulating.

Product Folder Links: TPSM63606

7.6 System Characteristics


The following specifications apply only to the typical applications circuit, with nominal component values. Specifications in the typical (TYP) column apply to $T_J = 25^{\circ}$ C only. These specifications are not ensured by production testing.

	PARAMETER	TEST CONDITIONS	MIN	TYP MA	X UNIT
SUPPLY					
I _{IN}	Input supply current when in regulation	V _{IN} = V _{EN/SYNC} = 24 V, V _{OUT} = V _{VLDOIN} = 3.3 V, F _{SW} = 750 kHz, I _{OUT} = 0 A		15	mA
OUTPUT	VOLTAGE			-	
ΔV _{OUT1}	Load regulation	V _{IN} = 24 V, V _{OUT} = 3.3 V, I _{OUT} = 0.1 A to 6 A		1	mV
ΔV_{OUT2}	Line regulation	V _{IN} = 4 V to 36 V, V _{OUT} = 3.3 V, I _{OUT} = 6 A		1	mV
ΔV _{OUT3}	Load transient	V _{IN} = 24 V, V _{OUT} = 3.3 V, I _{OUT} = 1 A to 4 A at 1 A/μs, C _{OUT(derated)} = 50 μF		100	mV
EFFICIEN	NCY				
		V _{IN} = 12 V, V _{OUT} = V _{VLDOIN} = 3.3 V, I _{OUT} = 5 A, F _{SW} = 750 kHz		91%	
		V _{IN} = 24 V, V _{OUT} = V _{VLDOIN} = 3.3 V, I _{OUT} = 5 A, F _{SW} = 750 kHz		90%	
η	Efficiency	V _{IN} = 12 V, V _{OUT} = V _{VLDOIN} = 5 V, I _{OUT} = 5 A, F _{SW} = 1 MHz	9:	3.2%	
		V _{IN} = 24 V, V _{OUT} = V _{VLDOIN} = 5 V, I _{OUT} = 5 A, F _{SW} = 1 MHz	92	2.2%	
		V _{IN} = 24 V, V _{OUT} = V _{VLDOIN} = 12 V, I _{OUT} = 4 A, F _{SW} = 2 MHz	99	5.6%	




7.7 Typical Characteristics

V_{IN} = 24 V, unless otherwise specified

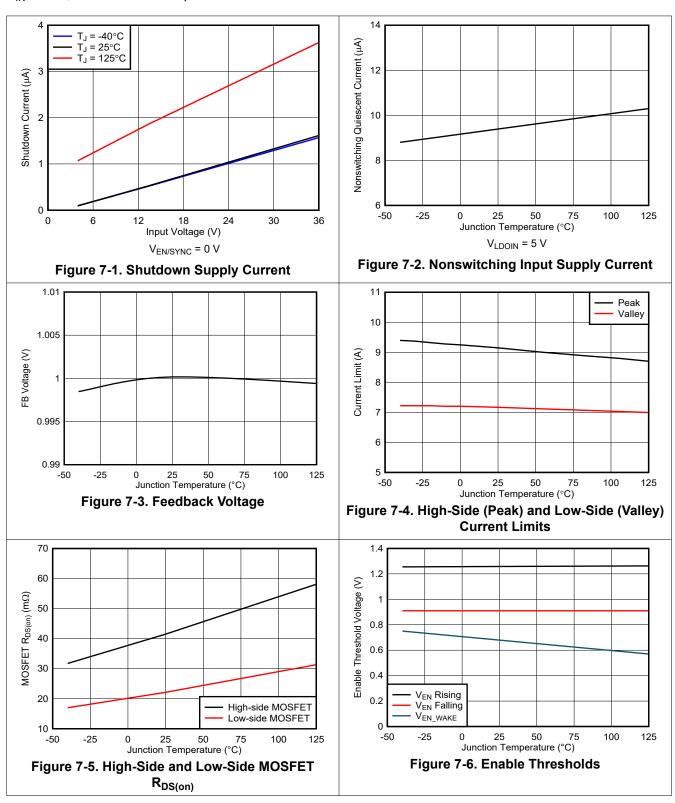

www.ti.com

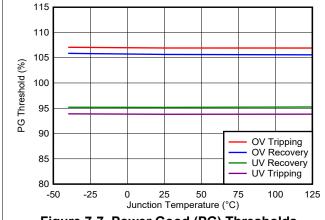

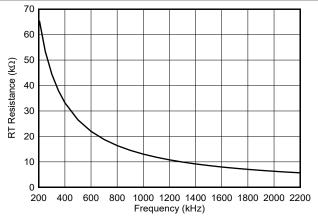



Figure 7-8. Switching Frequency Set by RT Resistor

Figure 7-7. Power Good (PG) Thresholds




7.8 Typical Characteristics (V_{IN} = 12 V)

Unless otherwise indicated, T_A = 25°C, VLDOIN is tied to VOUT (except for V_{OUT} = 2.5 V), and the module is soldered to a 76-mm × 63-mm, 4-layer PCB. The SOA curves are taken with $T_{J(max)}$ = 125°C and $T_{A(max)}$ = 105°C. Refer to Section 9.2 for circuit designs.

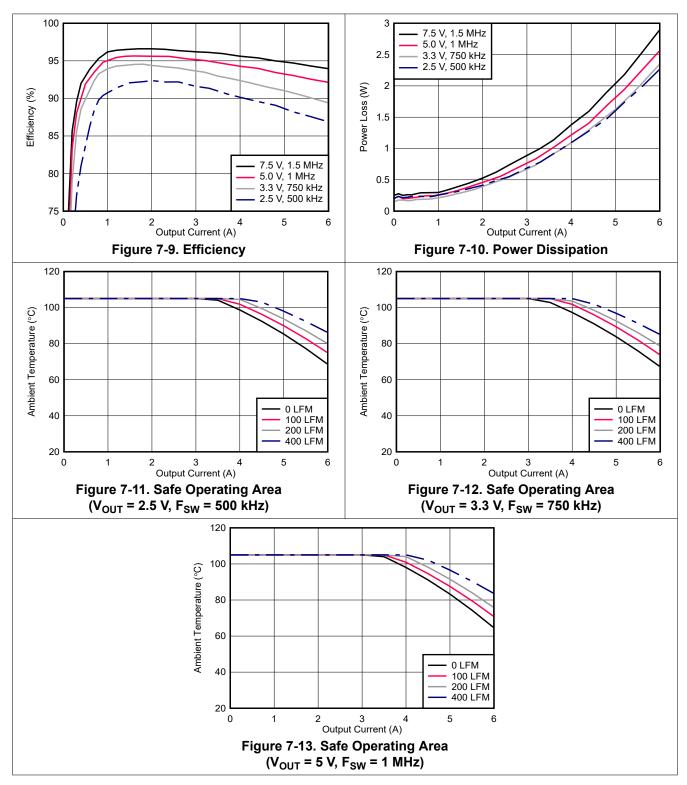

7.9 Typical Characteristics (V_{IN} = 24 V)

Unless otherwise indicated, T_A = 25°C, VLDOIN is tied to VOUT (except for V_{OUT} = 2.5 V), and the module is soldered to a 76-mm × 63-mm, 4-layer PCB. The SOA curves are taken with $T_{J(max)}$ = 125°C and $T_{A(max)}$ = 105°C. Refer to Section 9.2 for circuit designs.

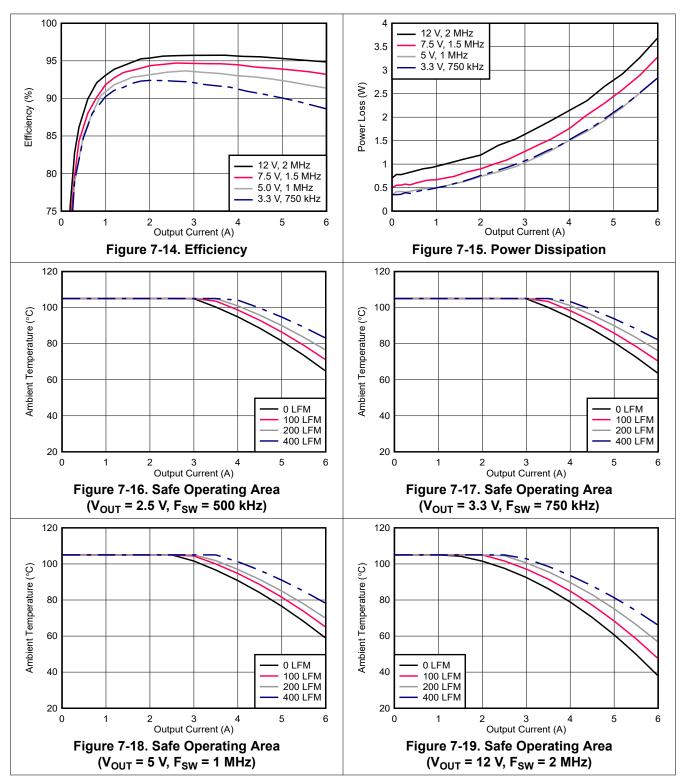



8 Detailed Description

8.1 Overview

The TPSM63606 is an easy-to-use, synchronous buck DC/DC power module designed for a wide variety of applications where reliability, small solution size, and low EMI signature are of paramount importance. With integrated power MOSFETs, a buck inductor, and PWM controller, the TPSM63606 operates over an input voltage range of 3 V to 36 V with transients as high as 42 V. The module delivers up to 6-A DC load current with high conversion efficiency and ultra-low input quiescent current in a very small solution footprint. Control loop compensation is not required, reducing design time and external component count.

With a programmable switching frequency from 200 kHz to 2.2 MHz using its RT pin or an external clock signal, the TPSM63606 incorporates specific features to improve EMI performance in noise-sensitive applications:

- · An optimized package and pinout design enables a shielded switch-node layout that mitigates radiated EMI.
- Parallel input and output paths with symmetrical capacitor layouts minimize parasitic inductance, switch-voltage ringing, and radiated field coupling
- Pseudo-random spread spectrum (PRSS) modulation in the TPSM63606S reduces peak emissions
- · Clock synchronization and FPWM mode enable constant switching frequency across the load current range.
- Integrated power MOSFETs with enhanced gate drive control enable low-noise PWM switching.


Together, these features significantly reduce EMI filtering requirements, while helping to meet CISPR 11 and CISPR 32 Class B EMI limits for conducted and radiated emissions.

The TPSM63606 module also includes inherent protection features for robust system requirements:

- · An open-drain PGOOD indicator for power-rail sequencing and fault reporting
- Precision enable input with hysteresis, providing:
 - Programmable line undervoltage lockout (UVLO)
 - Remote ON/OFF capability
- Internally fixed output-voltage soft start with monotonic start-up into prebiased loads
- · Hiccup-mode overcurrent protection with cycle-by-cycle peak and valley current limits
- · Thermal shutdown with automatic recovery.

Leveraging a pin arrangement designed for simple layout that requires only a few external components, the TPSM63606 is specified to maximum ambient and junction temperatures of 105°C and 125°C, respectively.

8.2 Functional Block Diagram

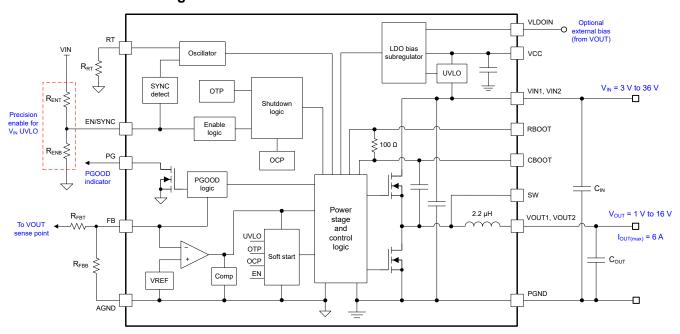

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

8.3 Feature Description

8.3.1 Input Voltage Range (VIN1, VIN2)

With a steady-state input voltage range from 3 V to 36 V, the TPSM63606 module is intended for step-down conversions from typical 12-V, 24-V, and 28-V input supply rails. The schematic circuit in Figure 8-1 shows all the necessary components to implement a TPSM63606-based buck regulator using a single input supply.

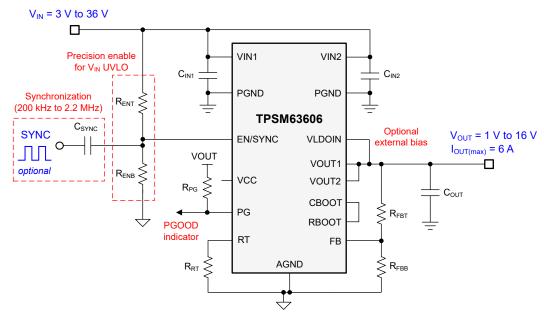


Figure 8-1. TPSM63606 Schematic Diagram with Input Voltage Operating Range of 3 V to 36 V

The minimum input voltage required for start-up is 3.95 V. Take extra care to make sure that the voltage at the VIN pins of the module (VIN1 and VIN2) does not exceed the absolute maximum voltage rating of 42 V during line or load transient events. Voltage ringing at the VIN pins that exceeds the absolute maximum ratings can damage the IC.

8.3.2 Adjustable Output Voltage (FB)

The TPSM63606 has an adjustable output voltage range from 1 V up to a maximum of 16 V or slightly less than V_{IN} , whichever is lower. Setting the output voltage requires two feedback resistors, designated as R_{FBT} and R_{FBB} in Figure 8-1. The reference voltage at the FB pin is set at 1 V with a feedback system accuracy over the full junction temperature range of $\pm 1\%$. The junction temperature range for the device is -40%C to 125%C.

Calculate the value for R_{FBT} using Equation 1 based on a recommended value for R_{FBB} of 10 k Ω .

$$R_{FBT} \left[k\Omega \right] = R_{FBB} \left[k\Omega \right] \cdot \left(\frac{V_{OUT} \left[V \right]}{1V} - 1 \right)$$
(1)

Table 8-1 lists the standard resistor values for several output voltages and the recommended switching frequency range to maintain reasonable peak-to-peak inductor ripple current. This table also includes the minimum required output capacitance for each output voltage setting to maintain stability. The capacitances as listed represent *effective* values for ceramic capacitors derated for DC bias voltage and temperature. Furthermore, place a feedforward capacitor, C_{FF}, in parallel with R_{FBT} to increase the phase margin when the output capacitance is close to the minimum recommended value.

Ta	Table 8-1. Standard R _{FBT} Values, Recommended F _{SW} Range and Minimum C _{OUT}								
_T (kΩ)	Suggested F _{SW}	C _{OUT(min)} (µF)	C _{FF} (pF)		V _{OUT}	$R_{FBT}(k\Omega)$	Suggested F _{SW}	C _{OUT(min)} (µ	

V _{OUT} (V)	R _{FBT} (kΩ)	Suggested F _{SW} Range (kHz)	C _{OUT(min)} (μF) (Effective)	C _{FF} (pF)	V _{OUT} (V)	R _{FBT} (kΩ)	Suggested F _{SW} Range (MHz)	C _{OUT(min)} (μF) (Effective)	C _{FF} (pF)
1	Short	300 to 500	300	_	5	40.2	0.8 to 1.2	30	22
1.2	2	400 to 600	200	_	7.5	64.9	1.2 to 1.6	25	15
1.8	8.06	500 to 700	120	100	10	90.9	1.6 to 2.0	18	_
2.5	15	650 to 900	70	68	12	110	1.7 to 2.2	12	_
3.3	23.2	700 to 950	50	47	15	140	1.8 to 2.2	10	_

(1) $R_{FBB} = 10 \text{ k}\Omega$

Note that higher feedback resistances consume less DC current. However, an upper R_{FBT} resistor value higher than 1 $M\Omega$ renders the feedback path more susceptible to noise. Higher feedback resistances generally require more careful layout of the feedback path. It is important to locate the feedback resistors close to the FB and AGND pins, keeping the feedback trace as short as possible (and away from noisy areas of the PCB). See Section 11.2 guidelines for more detail.

8.3.3 Input Capacitors

Input capacitors are necessary to limit the input ripple voltage to the module due to switching frequency AC currents. TI recommends using ceramic capacitors to provide low impedance and high RMS current rating over a wide temperature range. Equation 2 gives the input capacitor RMS current. The highest input capacitor RMS current occurs at D = 0.5, at which point, the RMS current rating of the capacitors should be greater than half the output current.

$$I_{CIN,rms} = \sqrt{D \cdot \left(I_{OUT}^2 \cdot (1-D) + \frac{\Delta I_L^2}{12}\right)}$$
(2)

where

• D = V_{OUT} / V_{IN} is the module duty cycle.

Ideally, the DC and AC components of input current to the buck stage are provided by the input voltage source and the input capacitors, respectively. Neglecting inductor ripple current, the input capacitors source current of amplitude (I_{OUT} - I_{IN}) during the D interval and sink I_{IN} during the 1 - D interval. Thus, the input capacitors conduct a square-wave current of peak-to-peak amplitude equal to the output current. The resultant capacitive component of AC ripple voltage is a triangular waveform. Together with the ESR-related ripple component, Equation 3 gives the peak-to-peak ripple voltage amplitude:

$$\Delta V_{IN} = \frac{I_{OUT} \cdot D \cdot (1 - D)}{F_{SW} \cdot C_{IN}} + I_{OUT} \cdot R_{ESR}$$
(3)

Equation 4 gives the input capacitance required for a particular load current:

$$C_{IN} \ge \frac{D \cdot (1 - D) \cdot I_{OUT}}{F_{SW} \cdot (\Delta V_{IN} - R_{ESR} \cdot I_{OUT})}$$
(4)

where

ΔV_{IN} is the input voltage ripple specification.

The TPSM63606 requires a minimum of two 10-µF ceramic input capacitors, preferably with X7R or X7S dielectric and in 1206 or 1210 footprint. Additional capacitance can be required for applications to meet conducted EMI specifications, such as CISPR 11 or CISPR 32.

www.ti.com

Table 8-2 includes a preferred list of capacitors by vendor. To minimize the parasitic inductance in the switching loops, position the ceramic input capacitors in a symmetrical layout close to the VIN1 and VIN2 pins and connect the capacitor return terminals to the PGND pins using a copper ground plane under the module.

Table 8-2. Recommended Ceramic Input Capacitors

Vendor ⁽¹⁾	Dielectric	Part Number	Case Size	Capacitance (μF) ⁽²⁾	Rated Voltage (V)
TDK	X7R	C3216X7R1H106K160AC	1206	10	50
Murata	X7S	GCM32EC71H106KA03K	1210	10	50
AVX	X7R	12105C106MAT2A	1210	10	50
Murata	X7R	GRM32ER71H106KA12L	1210	10	50

⁽¹⁾ Consult capacitor suppliers regarding availability, material composition, RoHS and lead-free status, and manufacturing process requirements for any capacitors identified in this table. See the *Third-Party Products Disclaimer*.

As discussed in Section 10, an electrolytic bulk capacitance (68 μ F to 100 μ F) provides low-frequency filtering and parallel damping to mitigate the effects of input parasitic inductance resonating with the low-ESR, high-Q ceramic input capacitors.

8.3.4 Output Capacitors

Table 8-1 lists the TPSM63606 minimum amount of required output capacitance. The effects of DC bias and temperature variation must be considered when using ceramic capacitance. For ceramic capacitors in particular, the package size, voltage rating, and dielectric material contribute to differences between the standard rated value and the actual effective value of the capacitance.

When including additional capacitance above $C_{OUT(min)}$, the capacitance can be ceramic type, low-ESR polymer type, or a combination of the two. See Table 8-3 for a preferred list of output capacitors by vendor.

Table 8-3. Recommended Ceramic Output Capacitors

rabio o di reccommendadi coranno carpat capacitore								
Vendor ⁽¹⁾	Dielectric	Part Number	Case Size	Capacitance (µF) ⁽²⁾	Voltage (V)			
Murata	X7R	GRM31CZ71C226ME15L	1206	22	16			
TDK	X7R	C3225X7R1C226M250AC	1210	22	16			
Murata	X7R	GRM32ER71C226KEA8K	1210	22	16			
TDK	X6S	C3216X6S1E226M160AC	1206	22	25			
AVX	X7R	12103C226KAT4A	1210	22	25			
Murata	X7R	GRM32ER71E226ME15L	1210	22	25			
AVX	X7R	1210ZC476MAT2A	1210	47	10			
Murata	X7R	GRM32ER71A476ME15L	1210	47	10			
Murata	X6S	GRM32EC81C476ME15L	1210	47	16			
TDK	X6S	C3216X6S0G107M160AC	1206	100	4			
Murata	X6T	GRM31CD80J107MEA8L	1206	100	6.3			
Murata	X7S	GRM32EC70J107ME15L	1210	100	6.3			

⁽¹⁾ Consult capacitor suppliers regarding availability, material composition, RoHS and lead-free status, and manufacturing process requirements for any capacitors identified in the table. See the *Third-Party Products Disclaimer*.

8.3.5 Switching Frequency (RT)

Connect a resistor, designated as R_{RT} in Figure 8-1, between RT and AGND to set the swiching frequency within the range of 200 kHz to 2.2 MHz. Use Equation 5 or refer to Figure 7-8 to calculate R_{RT} for a desired frequency.

$$R_{RT}\left[k\Omega\right] = \frac{13.46}{F_{SW}\left[MHz\right]} - 0.44$$
(5)

Refer to Table 8-1 or use the simplified expression in Equation 6 to find a switching frequency that sets an inductor ripple current of 25% to 40% of the 6-A module current rating at nominal input voltage:

⁽²⁾ Nameplate capacitance values (the effective values are lower based on the applied DC voltage and temperature).

⁽²⁾ Nameplate capacitance values (the effective values are lower based on the applied DC voltage and temperature)



$$F_{SW} [MHz] \simeq 0.25 \cdot V_{OUT} [V] \cdot (1 - V_{OUT} [V] / V_{IN(nom)} [V])$$
(6)

where

V_{IN(nom)} and V_{OUT} are the nominal input voltage (typically 12 V or 24 V) and output voltage of the application, respectively.

Note that a resistor value outside of the recommended range can cause the module to shut down. This prevents unintended operation if the RT pin is shorted to ground or left open. Do not apply a pulsed signal to this pin to force synchronization. Refer to Section 8.3.7 if clock synchronization is required.

8.3.6 Precision Enable and Input Voltage UVLO (EN/SYNC)

The EN/SYNC pin provides precision ON and OFF control for the TPSM63606. Once the EN/SYNC pin voltage exceeds the rising threshold and V_{IN} is above its minimum turn-on threshold, the device starts operation. The simplest way to enable the TPSM63606 is to connect EN/SYNC directly to VIN. This allows the TPSM63606 to start up when V_{IN} is within its valid operating range. However, many applications benefit from the use of an enable divider network as shown in Figure 8-1, which establishes a precision input undervoltage lockout (UVLO). This can be used for sequencing, to prevent re-triggering the device when used with long input cables, or to reduce the occurrence of deep discharge of a battery power source. An external logic signal can also be used to drive the enable input to toggle the output on and off and for system sequencing or protection.

Calculate R_{FNB} using Equation 7:

$$R_{ENB} [k\Omega] = R_{ENT} [k\Omega] \cdot \left(\frac{V_{EN_RISE} [V]}{V_{IN(on)} [V] - V_{EN_RISE} [V]} \right)$$
(7)

where

- A typical value for R_{ENT} is 100 kΩ.
- V_{EN RISE} is enable rising threshold voltage of 1.263 V (typical).
- V_{IN(on)} is the desired start-up input voltage.

Note

The EN/SYNC pin can also be used as an external clock synchronization input. See Section 8.3.7 for additional information. A blanking time of 4 μ s to 28 μ s is applied to the enable logic after a clock edge is detected. To effectively disable the output, the EN/SYNC input must stay low for longer than 28 μ s. Any logic change within the blanking time is ignored. A blanking time is not applied when the device is in shutdown mode.

8.3.7 Frequency Synchronization (EN/SYNC)

Synchronize the internal oscillator of the TPSM63606 by AC coupling a positive clock edge to EN/SYNC, as shown in Figure 8-1. The synchronization frequency range is 200 kHz to 2.2 MHz.

It is recommended to keep the parallel combination value of R_{ENT} and R_{ENB} in the 100-k Ω range. R_{ENT} is required for synchronization, but R_{ENB} can be left open. The external clock must be off before start-up to allow proper start-up sequencing. After a valid synchronization signal is applied for 2048 cycles, the clock frequency changes to that of the applied signal.

Referring to Figure 8-2, the AC-coupled voltage edge at the EN/SYNC pin must exceed the SYNC amplitude threshold, V_{EN_SYNC} , of 2.4 V to trip the internal synchronization pulse detector. In addition, the minimum EN/SYNC rising and falling pulse durations must be longer than the SYNC signal hold time, t_{SYNC_EDGE} , of 100 ns and shorter than the minimum blanking time, t_B . Use a 3.3-V or higher amplitude pulse signal coupled through a 1-nF capacitor, designated as C_{SYNC} in Figure 8-1.

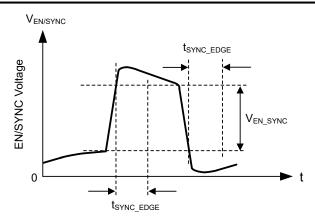


Figure 8-2. Typical SYNC Waveform

8.3.8 Spread Spectrum

The TPSM63606S includes pseudo-random spread spectrum (PRSS) modulation that provides a ±2% spread of the switching frequency and its harmonics. PRSS spreads the switching energy smoothly across higher-frequency bands, improving both conducted and radiated EMI performance, but is low enough to limit unwanted subharmonic emissions below the switching frequency.

The TPSM63606S uses a cycle-to-cycle frequency hopping method based on a linear feedback shift register (LFSR). This intelligent pseudo-random generator limits cycle-to-cycle frequency changes to optimize output ripple. The pseudo-random pattern repeats at less than 1.5 Hz, which is below the audio band. Spread spectrum is disabled when the module is synchronized to an external clock or when the switching frequency decreases to maintain regulation when operating in or close to dropout.

8.3.9 Power Good Monitor (PG)

The TPSM63606 provides a power-good status signal to indicate when the output voltage is within a regulation window of 94% to 107%. The PG voltage goes low when the feedback (FB) voltage is outside of the specified PGOOD thresholds (see Figure 7-7). This can occur during current limit and thermal shutdown, as well as when disabled and during start-up.

PG is an open-drain output, requiring an external pullup resistor to a DC supply, such as VCC or V_{OUT} . To limit current supplied by VCC, the recommended range of pullup resistance is 20 k Ω to 100 k Ω . A 120- μ s deglitch filter prevents false flag operation for short excursions of the output voltage, such as during line and load transients. When EN/SYNC is pulled low, PG is forced low and remains remains valid as long as the input voltage is above 1 V (typical). Use the PG signal for start-up sequencing of downstream regulators, as shown in Figure 8-3, or for fault protection and output monitoring.

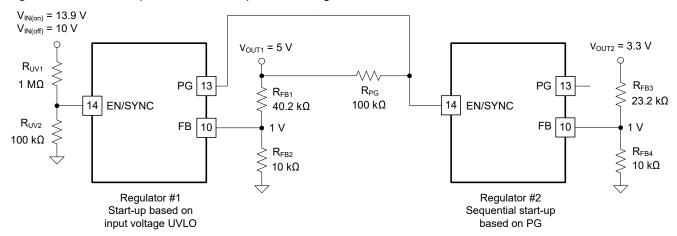


Figure 8-3. TPSM63606 Sequencing Implementation Using PG and EN/SYNC

8.3.10 Adjustable Switch-Node Slew Rate (RBOOT, CBOOT)

Adjust the switch-node slew rate of the TPSM63606 to slow the switch-node voltage rise time and improve EMI performance at high frequencies. However, slowing the rise time decreases efficiency. Care must be taken to balance the improved EMI versus the decreased efficiency.

Internal to the module, a $100-\Omega$ bootstrap resistor connects between the RBOOT and CBOOT pins as shown in Figure 8-4. Leaving these pins open incorporates the $100-\Omega$ resistor in the bootstrap circuit, slowing the switch voltage slew rate and optimizing EMI. However, if improved EMI is not required, connect RBOOT to Short the internal resistor, thus resulting in the highest efficiency. Place a resistor across RBOOT and CBOOT to allow adjustment of the internal resistance to balance EMI and efficiency performance.

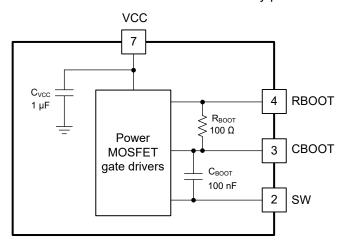


Figure 8-4. Internal BOOT Resistor

8.3.11 Bias Supply Regulator (VCC, VLDOIN)

VCC is the output of the internal LDO subregulator used to supply the control circuits of the TPSM63606. The nominal VCC voltage is 3.3 V. The VLDOIN pin is the input to the internal LDO. Connect this input to V_{OUT} to provide the lowest possible input supply current. If the VLDOIN voltage is less than 3.1 V, VIN1 and VIN2 directly power the internal LDO.

To prevent unsafe operation, VCC has UVLO protection that prevents switching if the internal voltage is too low. See $V_{CC\ UVLO\ HYS}$ in the *Electrical Characteristics*.

VCC must not be used to power external circuitry. Do not load VCC or short it to ground. VLDOIN is an optional input to the internal LDO. Connect an optional high quality 0.1-µF to 1-µF capacitor from VLDOIN to AGND for improved noise immunity.


The LDO provides the VCC voltage from one of two inputs: V_{IN} or VLDOIN. When VLDOIN is tied to ground or below 3.1 V, the LDO derives power from V_{IN} . The LDO input becomes VLDOIN when VLDOIN is tied to a voltage above 3.1 V. The VLDOIN voltage must not exceed both V_{IN} and 12 V.


Equation 8 specifies the LDO power loss reduction as:

$$P_{LDO-LOSS} = I_{LDO} \times (V_{IN-LDO} - V_{VCC})$$
(8)

The VLDOIN input provides an option to supply the LDO with a lower voltage than V_{IN} , thus minimizing the LDO input voltage relative to VCC and reducing power loss. For example, if the LDO current is 10 mA at 1 MHz with $V_{IN} = 24$ V and $V_{OUT} = 5$ V, the LDO power loss with VLDOIN tied to ground is 10 mA × (24 V - 3.3 V) = 207 mW, while the loss with VLDOIN tied to V_{OUT} is equal to 10 mA × (5 V - 3.3 V) = 17 mW - a reduction of 190 mW

Figure 8-5 and Figure 8-6 show typical efficiency plots with and without VLDOIN connected to VOUT.

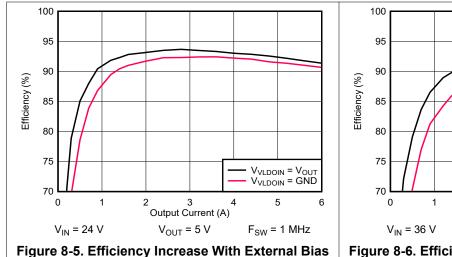

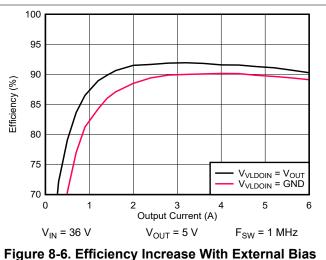

8.3.12 Overcurrent Protection (OCP)

The TPSM63606 is protected from overcurrent conditions using cycle-by-cycle current limiting of the peak inductor current. The current is compared every switching cycle to the current limit threshold. During an overcurrent condition, the output voltage decreases.

The TPSM63606 employs hiccup overcurrent protection if there is an extreme overload. In hiccup mode, the TPSM63606 module is shut down and kept off for 80 ms (typical) before a restart is attempted. If an overcurrent or short-circuit fault condition still exists, hiccup repeats until the fault condition is removed. Hiccup mode reduces power dissipation under severe overcurrent conditions, thus preventing overheating and potential damage to the device. Once the fault is removed, the module automatically recovers and returns to normal operation.

8.3.13 Thermal Shutdown

Thermal shutdown is an integrated self-protection used to limit junction temperature and prevent damage related to overheating. Thermal shutdown turns off the device when the junction temperature exceeds 168°C (typical) to prevent further power dissipation and temperature rise. Junction temperature decreases after shutdown, and the TPSM63606 attempts to restart when the junction temperature falls to 158°C (typical).

8.4 Device Functional Modes

8.4.1 Shutdown Mode

The EN/SYNC pin provides ON and OFF control for the TPSM63606. When $V_{\text{EN/SYNC}}$ is below approximately 0.4 V, the device is in shutdown mode. Both the internal LDO and the switching regulator are off. The quiescent current in shutdown mode drops to 0.6 μ A (typical). The TPSM63606 also employs internal undervoltage protection. If the input voltage is below its UV threshold, the regulator remains off.

8.4.2 Standby Mode

The internal LDO for the VCC bias supply has a lower enable threshold than the regulator itself. When $V_{\text{EN/SYNC}}$ is above 1.1 V (maximum) and below the precision enable threshold of 1.263 V (typical), the internal LDO is on and regulating. The precision enable circuitry is turned on once the internal V_{CC} is above its UVLO threshold. The switching action and voltage regulation are not enabled until $V_{\text{EN/SYNC}}$ rises above the precision enable threshold.

8.4.3 Active Mode

The TPSM63606 is in active mode when V_{VCC} and $V_{EN/SYNC}$ are above their relevant thresholds and no fault conditions are present. The simplest way to enable operation is to connect EN/SYNC to V_{IN} , which allows self start-up when the applied input voltage exceeds the minimum start-up voltage.

9 Applications and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The TPSM63606 synchronous buck module requires only a few external components to convert from a wide range of supply voltages to a fixed output voltage at an output current up to 6 A. To expedite and streamline the process of designing of a TPSM63606-based regulator, a comprehensive TPSM63606 guickstart calculator is available by download to assist the system designer with component selection for a given application.

9.2 Typical Applications

For the circuit schematic, bill of materials, PCB layout files, and test results of a TPSM63606-powered implementation, see the TPSM63606 EVM.

9.2.1 Design 1 – High-Efficiency 6-A Synchronous Buck Regulator for Industrial Applications

Figure 9-1 shows the schematic diagram of a 5-V, 6-A buck regulator with a switching frequency of 1 MHz. In this example, the target half-load and full-load efficiencies are 93.5% and 91.4%, respectively, based on a nominal input voltage of 24 V that ranges from 9 V to 36 V. A resistor R_{RT} of 13 kΩ sets the free-running switching frequency at 1 MHz. An optional SYNC input signal allows adjustment of the switching frequency from 700 kHz to 1.4 MHz for this specific application.

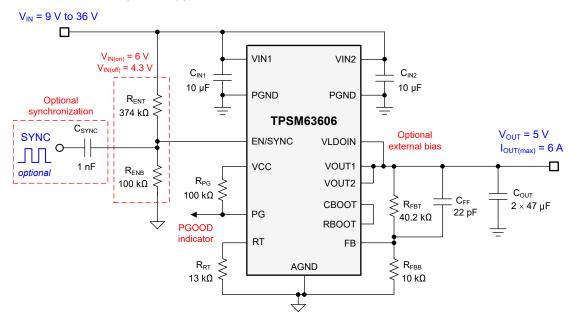


Figure 9-1. Circuit Schematic

9.2.1.1 Design Requirements

Table 9-1 shows the intended input, output, and performance parameters for this application example. Note that if the input voltage decreases below approximately 5.8 V, the regulator operates in dropout with the output voltage below its 5-V setpoint.

Product Folder Links: TPSM63606

Table 9	9-1.	Design	Parameters
---------	------	--------	-------------------

Design Parameter	Value
Input voltage range	9 V to 36 V
Input voltage UVLO turn on, off	6 V, 4.3 V
Output voltage	5 V
Maximum output current	6 A
Switching frequency	1 MHz
Output voltage regulation	±1%
Module shutdown current	< 1 µA

Table 9-2 gives the selected buck module power-stage components with availability from multiple vendors. This design uses an all-ceramic output capacitor implementation.

Table 9-2. List of Materials for Application Circuit 1

Reference Designator	Qty	Specification	Manufacturer ⁽¹⁾	Part Number
		10 μF, 50 V, X7R, 1210, ceramic	Taiyo Yuden	UMJ325KB7106KMHT
0.0	2	10 μr, 30 V, λ/K, 1210, ceramic	TDK	CNA6P1X7R1H106K
C _{IN1} , C _{IN2}	2	10 μF, 50 V, X7S, 1210, ceramic	Murata	GCM32EC71H106KA03
		10 με, 50 ν, λεο, τε το, ceramic	TDK	CGA6P3X7S1H106M
		47 μF, 6.3 V, X7R, 1210, ceramic	Murata	GRM32ER70J476ME20K
		47 μr, 0.5 V, λ/R, 1210, ceramic	AVX	12106C476MAT2A
C _{OUT1} , C _{OUT2}	2	47 F 40 V V7D 4040	Murata	GRM32ER71A476ME15L
		47 μF, 10 V, X7R, 1210, ceramic	AVX	1210ZC476MAT2A
		100 μF, 6.3 V, X7S, 1210, ceramic	Murata	GRM32EC70J107ME15L
U ₁	1	TPSM63606 36-V, 6-A synchronous buck module	Texas Instruments	TPSM63606RDLR

⁽¹⁾ See the Third-Party Products Disclaimer.

More generally, the TPSM63606 module is designed to operate with a wide range of external components and system parameters. However, the integrated loop compensation is optimized for a certain range of output capacitance.

9.2.1.2 Detailed Design Procedure

9.2.1.2.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the TPSM63606 module with WEBENCH® Power Designer.

- 1. Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
- 2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

- Run electrical simulations to see important waveforms and circuit performance.
- Run thermal simulations to understand board thermal performance.
- · Export customized schematic and layout into popular CAD formats.
- Print PDF reports for the design, and share the design with colleagues.

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

9.2.1.2.2 Output Voltage Setpoint

The output voltage of a TPSM63606 module is externally adjustable using a resistor divider. A recommended value for R_{FBB} of 10 k Ω establishes a divider current of 0.1 mA. Select the value for R_{FBT} from Table 8-1 or calculate using Equation 9:

$$R_{FBT} \left[k\Omega \right] = R_{FBB} \left[k\Omega \right] \cdot \left(\frac{V_{OUT} \left[V \right]}{1V} - 1 \right) = 10 k\Omega \cdot \left(\frac{5 V}{1V} - 1 \right) = 40 k\Omega$$
(9)

Choose the closest standard value of $40.2 \text{ k}\Omega$ for R_{FBT}.

9.2.1.2.3 Switching Frequency Selection

Connect a $13-k\Omega$ resistor from RT to AGND to set a switching frequency of 1 MHz, which is ideal for an output of 5 V as it establishes an inductor peak-to-peak ripple current in the range of 20% to 40% of the 6-A rated output current at a nominal input voltage of 24 V.

9.2.1.2.4 Input Capacitor Selection

The TPSM63606 requires a minimum input capacitance of 2×10 - μ F ceramic, preferably with X7R dielectric. The voltage rating of input capacitors must be greater than the maximum input voltage. For this design, select two 10- μ F, X7R, 50-V, 1210 case size, ceramic capacitors connected from VIN1 and VIN2 to PGND as close as possible to the module. See Figure 11-2 for recommneded layout placement.

9.2.1.2.5 Output Capacitor Selection

From Table 8-1, the TPSM63606 requires a minimum of $25 \mu F$ of effective output capacitance for proper operation at an output voltage of 5 V. Use high-quality ceramic type capacitors with sufficient voltage and temperature rating. If needed, connect additional output capacitance to reduce ripple voltage or for applications with specific load transient requirements.

For this design example, use two 47- μ F, 6.3-V or 10-V, X7R, 1210, ceramic capacitors connected close to the module from the VOUT1 and VOUT2 pins to PGND. The total effective capacitance at 5 V is approximately 52 μ F and 38 μ F at 25°C and -40°C, respectively.

9.2.1.2.6 Other Connections


Short RBOOT to CBOOT and connect VLDOIN to the 5-V output for best efficiency. To increase phase margin when using an output capacitance close to the minimum recommended in Table 8-1, use a feedforward capacitor, designated as C_{FF} in Figure 9-1, across the upper feedback resistor. Based on the feedback resistor values in this application, a capacitor of 22 pF sets a zero-pole pair at 180 kHz and 900 kHz, respectively.

Submit Document Feedback


Copyright © 2022 Texas Instruments Incorporated

9.2.1.3 Application Curves

Unless otherwise indicated, V_{IN} = 24 V, V_{OUT} = 5 V, I_{OUT} = 6 A (0.83- Ω resistive load), and F_{SW} = 1 MHz.

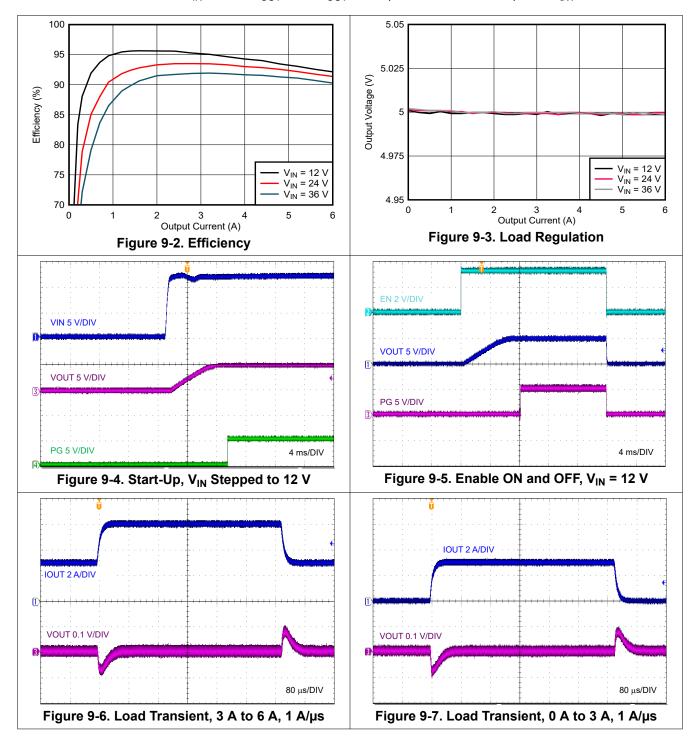



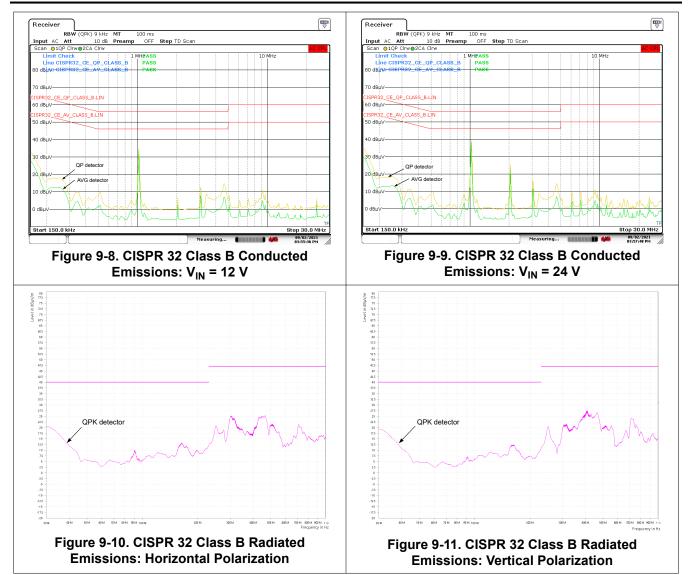

9.2.2 Design 2 - Inverting Buck-Boost Regulator with Negative Output Voltage

Figure 9-12 shows the schematic diagram of an inverting buck-boost (IBB) regulator with an output of -12 V at -2.5 A and a switching frequency of 2 MHz. In this example, the target half-load and full-load efficiencies are 91.5% and 90.5%, respectively, based on a nominal input voltage of 12 V that ranges from 9 V to 24 V.

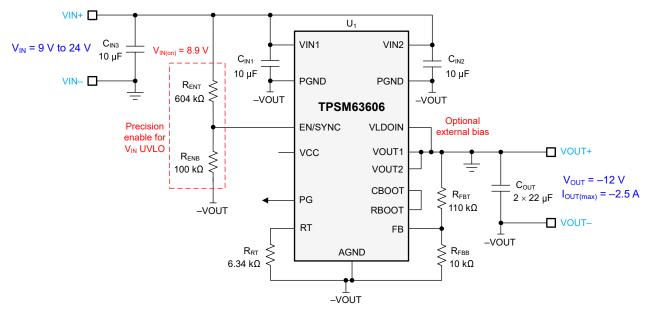


Figure 9-12. Circuit Schematic

9.2.2.1 Design Requirements

Table 9-3 shows the intended input, output, and performance parameters for this application example. With an IBB topology, the module sees a total current of $I_{IN} + |-I_{OUT}|$, which is highest at minimum input voltage.

rable 3-3. Design rarameters						
Design Parameter	Value					
Input voltage range	9 V to 24 V					
Input voltage UVLO turn on	8.9 V					
Output voltage	–12 V					
Full-load current	–2.5 A					
Switching frequency	2 MHz					
Output voltage regulation	±1%					

Table 9-3. Design Parameters

Table 9-4 gives the selected buck module power-stage components with availability from multiple vendors. This design uses an all-ceramic output capacitor implementation.

Table 9-4. List of Materials for Application Circuit 2

Table of the clother materials of the product of the clother control of the clother cl										
Ref Des	Qty	Specification	Manufacturer ⁽¹⁾	Part Number						
0 0 0	2	10 vF 50 V V7D 1210 coronic	Kemet	C1210C106K5RACTU						
$C_{IN1}, C_{IN2}, C_{IN3}$	3	10 μF, 50 V, X7R, 1210, ceramic	TDK	CNA6P1X7R1H106K						
		22 μF, 16 V, X7R, 1206, ceramic	Murata	GRM31CZ71C226ME15L						
	•	0	•	0	0	0	0	22 μF, 25 V, X7R, 1210, ceramic	Murata	GRM32ER71E226ME15L
C _{OUT1} , C _{OUT2}	2	22 μr, 25 V, λ/R, 1210, ceramic	AVX	12103C226KAT4A						
		47 μF, 16 V, X6S, 1210, ceramic	Murata	GRM32EC81C476ME15L						
U ₁	1	TPSM63606 36-V, 6-A synchronous buck module	Texas Instruments	TPSM63606RDLR						

(1) See the *Third-Party Products Disclaimer*.

9.2.2.2 Detailed Design Procedure

9.2.2.2.1 Output Voltage Setpoint

For an output voltage of –12 V, choose upper and lower feedback resistance of 110 k Ω and 10 k Ω , respectively, using Equation 1.

9.2.2.2.2 IBB Maximum Output Current

The achievable output current with an *IBB topology* using the TPSM63606 is $I_{OUT(max)} = I_{LDC(max)} \times (1 - D)$, where $I_{LDC(max)} = 6$ A is the rated current of the module and $D = |V_{OUT}| / (V_{IN} + |V_{OUT}|)$ is the IBB duty cycle. Figure 9-13 provides the maximum output current capability as a function of input voltage for output voltage setpoints of -3.3 V, -5 V, and -12 V.

9.2.2.2.3 Switching Frequency Selection

Connect a 6.34-k Ω resistor from RT to AGND to set a switching frequency of 2 MHz, which is ideal for an output of -12 V as it establishes an inductor peak-to-peak ripple current of approximately 40% of the 6-A rated module current at the nominal input voltage of 12 V.

9.2.2.2.4 Input Capacitor Selection

Use two 10-µF, 50-V, X7R-dielectric ceramic capacitors in 1210 case size connected symmetrically from the VIN1 and VIN2 pins to PGND as close as possible to the module. More specifically, these capacitors appear from the drain of the internal high-side MOSFET to the source of the low-side MOSFET, effectively connecting from the positive input voltage to the negative output voltage terminals.

The sum of the input and output voltages, V_{IN} + $|-V_{OUT}|$, is the effective applied voltage across the capacitors. The total effective capacitance at 25°C and input voltages of 12 V and 24 V (corresponding to applied voltages of 24 V and 36 V) is approximately 12 μ F and 8 μ F, respectively. Check the capacitance versus voltage derating curve in the capacitor data sheet.

Use an additional 10- μ F, 50-V capacitor directly across the input. This capacitor is designated as C_{IN3} and connects across the VIN+ and VIN- terminals as shown in Figure 9-12.

9.2.2.2.5 Output Capacitor Selection

For this IBB design example, use two 22- μ F, 25-V, X7R-dielectric ceramic capacitors in 1210 case size connected symmetrically close to the module from the VOUT1 and VOUT2 pins to PGND. The total effective capacitance is approximately 16 μ F with DC bias of 12 V.

9.2.2.2.6 Other Considerations

Short RBOOT to CBOOT and connect VLDOIN to the power stage GND terminal (corresponding to VOUT1, VOUT2 of the module) for best efficiency.


The right-half-plane zero of an IBB topology is at its lowest frequency at minimum input voltage and highest load current. Using the TPSM63606 quickstart calculator, select the output capacitance to set that the loop crossover frequency at less than one third of the lowest right-half-plane zero frequency for a given application.

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

9.2.2.3 Application Curves

Unless otherwise indicated, V_{IN} = 12 V, V_{OUT} = -12 V, I_{OUT} = -2.5 A (4.8- Ω resistive load), and F_{SW} = 2 MHz.

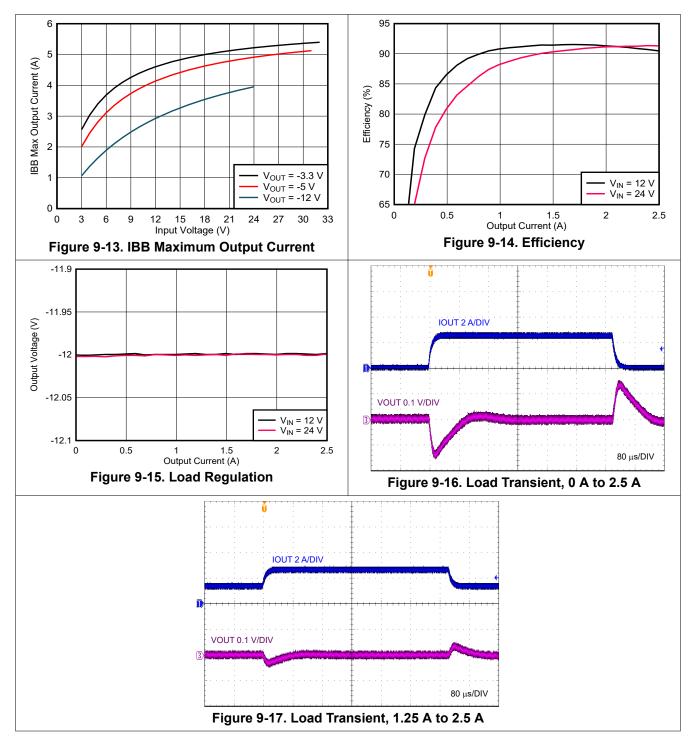



10 Power Supply Recommendations

The TPSM63606 buck module is designed to operate over a wide input voltage range of 3 V to 36 V. The characteristics of the input supply must be compatible with the *Absolute Maximum Ratings* and *Recommended Operating Conditions* in this data sheet. In addition, the input supply must be capable of delivering the required input current to the loaded regulator circuit. Estimate the average input current with Equation 10.

$$I_{IN} = \frac{V_{OUT} \cdot I_{OUT}}{V_{IN} \cdot \eta}$$
(10)

where

n is the efficiency.

If the module is connected to an input supply through long wires or PCB traces with a large impedance, take special care to achieve stable performance. The parasitic inductance and resistance of the input cables can have an adverse affect on module operation. More specifically, the parasitic inductance in combination with the low-ESR ceramic input capacitors form an underdamped resonant circuit, possibly resulting in instability, voltage transients, or both, each time the input supply is cycled ON and OFF. The parasitic resistance causes the input voltage to dip during a load transient. If the module is operating close to the minimum input voltage, this dip can cause false UVLO triggering and a system reset.

The best way to solve such issues is to reduce the distance from the input supply to the module and use an electrolytic input capacitor in parallel with the ceramics. The moderate ESR of the electrolytic capacitor helps damp the input resonant circuit and reduce any overshoot or undershoot at the input. A capacitance in the range of 47 μ F to 100 μ F is usually sufficient to provide input parallel damping and helps hold the input voltage steady during large load transients. A typical ESR of 0.1 Ω to 0.4 Ω provides enough damping for most input circuit configurations.

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

11 Layout

Proper PCB design and layout is important in high-current, fast-switching module circuits (with high internal voltage and current slew rates) to achieve reliable device operation and design robustness. Furthermore, the EMI performance of the module depends to a large extent on PCB layout.

11.1 Layout Guidelines

The following list summarizes the essential guidelines for PCB layout and component placement to optimze DC/DC module performance, including thermals and EMI signature. Figure 11-1 and Figure 11-2 show a recommended PCB layout for the TPSM63606 with optimized placement and routing of the power-stage and small-signal components.

- Place input capacitors as close as possible to the VIN pins. Note the dual and symmetrical arrangement
 of the input capacitors based on the VIN1 and VIN2 pins located on each side of the module package.
 The high-frequency currents are split in two and effectively flow in opposing directions such that the related
 magnetic fields contributions cancel each other, leading to improved EMI performance.
 - Use low-ESR 1206 or 1210 ceramic capacitors with X7R or X7S dielectric. The module has integrated dual 0402 input capacitors for high-frequency bypass.
 - Ground return paths for the input capacitors should consist of localized top-side planes that connect to the PGND pads under the module.
 - Even though the VIN pins are connected internally, use a wide polygon plane on a lower PCB layer to connect these pins together and to the input supply.
- Place output capacitors as close as possible to the VOUT pins. A similar dual and symmetrical arrangement of the output capacitors enables magnetic field cancellation and EMI mitigation.
 - Ground return paths for the output capacitors should consist of localized top-side planes that connect to the PGND pads under the module.
 - Even though the VOUT pins are connected internally, use a wide polygon plane on a lower PCB layer to connect these pins together and to the load, thus reducing conduction loss and thermal stress.
- Keep the FB trace as short as possible by placing the feedback resistors close to the FB pin. Reduce noise
 sensitivity of the output voltage feedback path by placing the resistor divider close to the FB pin, rather than
 close to the load. FB is the input to the voltage-loop error anplifier and represents a high-impedance node
 sensitive to noise. Route a trace from the upper feedback resistor to the required point of output voltage
 regulation.
- Use a solid ground plane on the PCB layer directly below the top layer with the module. This plane acts as a noise shield by minimizing the magnetic fields associated with the currents in the switching loops. Connect AGND pins 6 and 11 directly to PGND pin 19 under the module.
- Provide enough PCB area for proper heatsinking. Use sufficient copper area to acheive a low thermal impedance commensurate with the maximum load current and ambient temperature conditions. Provide adequate heatsinking for the TPSM63606 to keep the junction temperature below 150°C. For operation at full rated load, the top-side ground plane is an important heat-dissipating area. Use an array of heat-sinking vias to connect the exposed pads (PGND) of the package to the PCB ground plane. If the PCB has multiple copper layers, connect these thermal vias to inner-layer ground planes. Make the top and bottom PCB layers preferably with two-ounce copper thickness (and no less than one ounce).

11.1.1 Thermal Design and Layout

For a DC/DC module to be useful over a particular temperature range, the package must allow for the efficient removal of the heat produced while keeping the junction temperature within rated limits. The TPSM63606 module is available in a small 5.5-mm × 5-mm 20-pin QFN (RDL) package to cover a range of application requirements. The *Thermal Information* table summarizes the thermal metrics of this package with related detail provided by the *Semiconductor and IC Package Thermal Metrics Application Report*.

The 20-pin QFN package offers a means of removing heat through the exposed thermal pads at the base of the package. This allows a significant improvement in heatsinking, and it becomes imperative that the PCB is designed with thermal lands, thermal vias, and one or more ground planes to complete the heat removal subsystem. The exposed pads of the TPSM63606 are soldered to the ground-connected copper lands on the PCB directly underneath the device package, reducing the thermal resistance to a very low value.



Preferably, use a four-layer board with 2-oz copper thickness for all layers to provide low impedance, proper shielding and lower thermal resistance. Numerous vias with a 0.3-mm diameter connected from the thermal lands to the internal and solder-side ground planes are vital to promote heat transfer. In a multi-layer PCB stack-up, a solid ground plane is typically placed on the PCB layer below the power-stage components. Not only does this provide a plane for the power-stage currents to flow, but it also represents a thermally conductive path away from the heat-generating device.

11.2 Layout Example

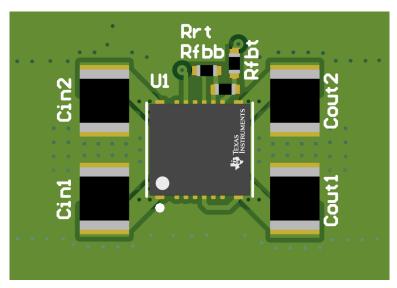


Figure 11-1. Typical Layout

Place the feedback components close to the FB pin Legend Top layer copper 000 Layer-2 GND plane Input Output Top solder capacitor capacitor 0.0 00 Position the input **Ó** O 00 capacitors very close Place an array of 00 00 PGND vias close to the to the VIN pins 00 00 IC for heat spreading Input Output capacitor capacitor 000 Place thermal vias at the

Figure 11-2. Typical Top Layer Design

VOUT pins for heat spreading

Submit Document Feedback

Copyright © 2022 Texas Instruments Incorporated

11.2.1 Package Specifications

Table 11-1. Package Specifications Table

	VALUE	UNIT	
Weight		748	mg
Flammability	Meets UL 94 V-0		
MTBF calculated reliability	Per Bellcore TR-332, 50% stress, T _A = 40°C, ground benign	2580	MHrs

12 Device and Documentation Support

12.1 Device Support

12.1.1 Third-Party Products Disclaimer

TI'S PUBLICATION OF INFORMATION REGARDING THIRD-PARTY PRODUCTS OR SERVICES DOES NOT CONSTITUTE AN ENDORSEMENT REGARDING THE SUITABILITY OF SUCH PRODUCTS OR SERVICES OR A WARRANTY, REPRESENTATION OR ENDORSEMENT OF SUCH PRODUCTS OR SERVICES, EITHER ALONE OR IN COMBINATION WITH ANY TI PRODUCT OR SERVICE.

12.1.2 Development Support

With an input operating voltage from 3 V to 36 V and rated output current from 2 A to 6 A, the TPSM63602/3/4/6 family of synchronous buck power modules specified in Table 12-1 provides flexibility, scalability and optimized solution size for a range of applications. These modules enable DC/DC solutions with high density, low EMI and increased flexibility. Available EMI mitigation features include pseudo-random spread spectrum (PRSS), RBOOT-configured switch-node slew rate control, and integrated input bypass capacitors. All modules are rated for an ambient temperature up to 105°C.

Table 12-1. Synchronous Buck DC/DC Power Module Family

DC/DC Module	Rated I _{OUT}	Package	Dimensions	Features	EMI Mitigation
TPSM63602	2 A	B0QFN (30)	6.0 × 4.0 × 1.8 mm		
TPSM63603	3 A	- BUQFIN (30)	0.0 * 4.0 * 1.6 111111	RT adjustable F _{SW} , external synchronization	PRSS, RBOOT, integrated input, VCC, and BOOT
TPSM63604	4 A	B3QFN (20)	5.5 × 5.0 × 4.0 mm		capacitors
TPSM63606	6 A	- B3QFN (20)			·

For development support see the following:

- TPSM63606 Quickstart Calculator
- TPSM63606 Simulation Models
- TPSM63606 and TPSM63606S EVM User's Guide
- TPSM63606 EVM Layout Files (Altium)
- For TI's reference design library, visit the TI Reference Design library.
- For TI's WEBENCH Design Environment, visit the WEBENCH® Design Center.
- To design a low-EMI power supply, review TI's comprehensive EMI Training Series.
- To design an inverting buck-boost (IBB) regulator, visit DC/DC inverting buck-boost modules.
- TI Reference Designs:
 - Multiple Output Power Solution For Kintex 7 Application
 - Arria V Power Reference Design
 - Altera Cyclone V SoC Power Supply Reference Design
 - Space-optimized DC/DC Inverting Power Module Reference Design With Minimal BOM Count
 - 3- To 11.5-V_{IN}, -5-V_{OUT}, 1.5-A Inverting Power Module Reference Design For Small, Low-noise Systems
- Technical Articles:
 - Powering Medical Imaging Applications With DC/DC Buck Converters
 - How To Create A Programmable Output Inverting Buck-boost Regulator
- To view a related device of this product, see the LM61460 36-V, 6-A synchronous buck converter.

12.1.2.1 Custom Design With WEBENCH® Tools

Click here to create a custom design using the TPSM63606 module with WEBENCH® Power Designer.

- Start by entering the input voltage (V_{IN}), output voltage (V_{OUT}), and output current (I_{OUT}) requirements.
- 2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
- 3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

www.ti.com

- · Run electrical simulations to see important waveforms and circuit performance.
- Run thermal simulations to understand board thermal performance.
- Export customized schematic and layout into popular CAD formats.
- Print PDF reports for the design, and share the design with colleagues.

Get more information about WEBENCH tools at www.ti.com/WEBENCH.

12.2 Documentation Support

12.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, Innovative DC/DC Power Modules selection guide
- Texas Instruments, Enabling Small, Cool and Quiet Power Modules with Enhanced HotRod™ QFN Package
 Technology white paper
- Texas Instruments, Benefits and Trade-offs of Various Power-Module Package Options white paper
- · Texas Instruments, Simplify Low EMI Design with Power Modules white paper
- Texas Instruments, Power Modules for Lab Instrumentation white paper
- Texas Instruments, An Engineer's Guide To EMI In DC/DC Regulators e-book
- Texas Instruments, Soldering Considerations for Power Modules application report
- Texas Instruments, Practical Thermal Design With DC/DC Power Modules application report
- Texas Instruments, Using New Thermal Metrics application report
- Texas Instruments, AN-2020 Thermal Design By Insight, Not Hindsight application report
- Texas Instruments, *Using the TPSM53602/3/4 for Negative Output Inverting Buck-Boost Applications* application report

12.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.4 Support Resources

TI E2E[™] support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

12.5 Trademarks

HotRod[™] and TI E2E[™] are trademarks of Texas Instruments.

WEBENCH® is a registered trademark of Texas Instruments.

All trademarks are the property of their respective owners.

12.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

12.7 Glossary

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this datasheet, refer to the left-hand navigation.

Copyright © 2022 Texas Instruments Incorporated

www.ti.com 9-Nov-2025

PACKAGING INFORMATION

Orderable part number	Status	Material type	Package Pins	Package qty Carrier	RoHS	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
						(4)	(5)		
TPSM63606RDLR	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Exempt	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606 B1
TPSM63606RDLR.A	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Exempt	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606 B1
TPSM63606RDLR.B	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	-	Call TI	Call TI	-40 to 125	
TPSM63606RDLRG4	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Yes	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606 B1
TPSM63606RDLRG4.A	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Yes	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606 B1
TPSM63606SRDLR	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Exempt	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606S B1
TPSM63606SRDLR.A	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	Exempt	NIPDAU	Level-3-250C-168 HR	-40 to 125	TPS63606S B1
TPSM63606SRDLR.B	Active	Production	B3QFN (RDL) 20	1000 LARGE T&R	-	Call TI	Call TI	-40 to 125	

⁽¹⁾ Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

⁽²⁾ Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

⁽⁴⁾ Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



PACKAGE OPTION ADDENDUM

www.ti.com 9-Nov-2025

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

PACKAGE MATERIALS INFORMATION

www.ti.com 18-Jun-2025

TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



*All dimensions are nominal

Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPSM63606RDLR	B3QFN	RDL	20	1000	330.0	16.4	5.28	5.78	4.28	8.0	16.0	Q1
TPSM63606RDLRG4	B3QFN	RDL	20	1000	330.0	16.4	5.28	5.78	4.28	8.0	16.0	Q1
TPSM63606SRDLR	B3QFN	RDL	20	1000	330.0	16.4	5.28	5.78	4.28	8.0	16.0	Q1


www.ti.com 18-Jun-2025



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPSM63606RDLR	B3QFN	RDL	20	1000	336.0	336.0	48.0
TPSM63606RDLRG4	B3QFN	RDL	20	1000	336.0	336.0	48.0
TPSM63606SRDLR	B3QFN	RDL	20	1000	336.0	336.0	48.0

PLASTIC QUAD FLAT PACK- NO LEAD

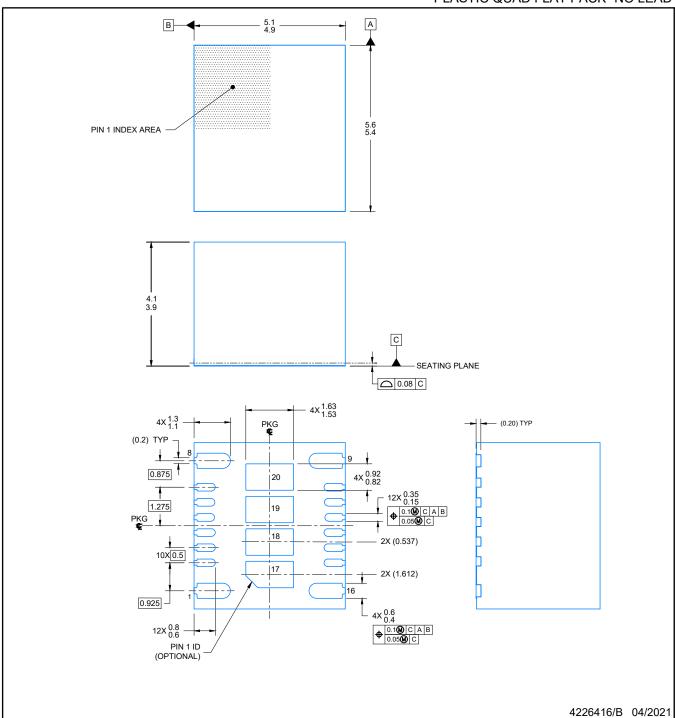


NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.



PLASTIC QUAD FLAT PACK- NO LEAD

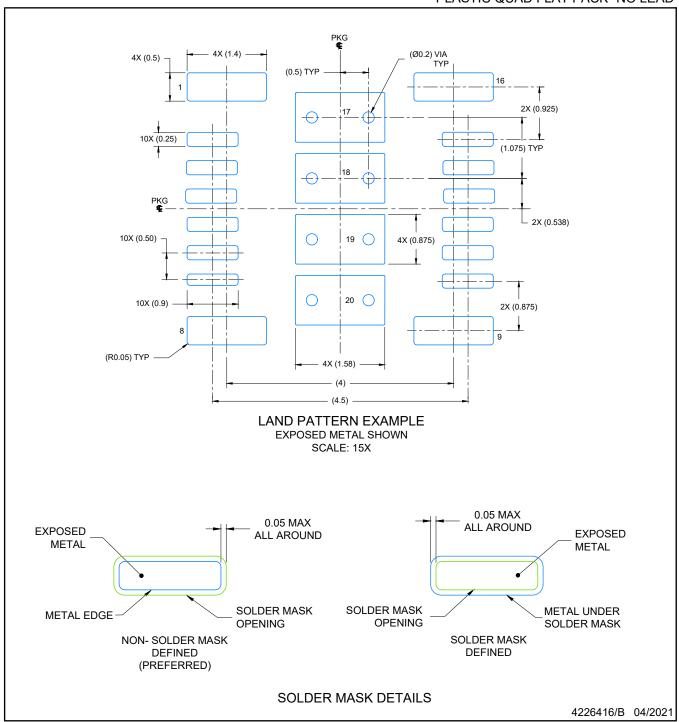


NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- 5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC QUAD FLAT PACK- NO LEAD

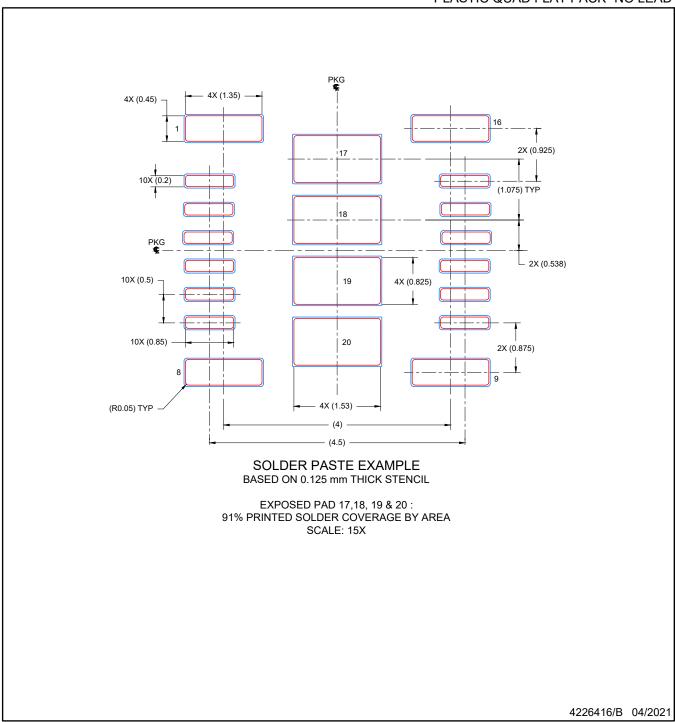

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025