





**XTR117** 

SBOS344D - SEPTEMBER 2005 - REVISED NOVEMBER 2023

# XTR117 4-20mA Current-Loop Transmitter

#### 1 Features

Low quiescent current: 130 µA 5-V regulator for external circuits

Low span error: 0.05%

Low nonlinearity error: 0.003%

Wide-loop supply range: 7.5 V to 36 V Temperature range: -40°C to +125°C Packages: VSON-8 and VSSOP-8

## 2 Applications

Two-wire, 4-20mA current-loop transmitter

Smart transmitter

Industrial process control

Test systems

Current amplifier

Voltage-to-current amplifier

## 3 Description

The XTR117 is a precision current output converter designed to transmit analog 4-mA-to-20-mA signals over an industry-standard current loop. The device provides accurate current scaling and output current limit functions.

The on-chip voltage regulator (5 V) can be used to power external circuitry. A current return pin (I<sub>RET</sub>) senses any current used in external circuitry to provide an accurate control of the output current.

The XTR117 is a fundamental building block of smart sensors using 4-mA-to-20-mA current transmission.

The XTR117 is specified for operation over the extended industrial temperature range, -40°C to +125°C.

#### **Package Information**


PRODUCT	PACKAGE <sup>(1)</sup>	PACKAGE SIZE <sup>(2)</sup>
XTR117	DGK (VSSOP, 8)	3 mm × 4.9 mm
	DRB (VSON, 8)	3 mm × 3 mm

- (1) For more information, see Section 10.
- (2)The package size (length × width) is a nominal value and includes pins, where applicable.

#### Related 4-20mA Devices(1)

DEVICE	DESCRIPTION
XTR115	5-V regulator output and 2.5-V reference output
XTR116	5-V regulator output and 4.096-V reference output

For complete 4-20mA bridge and RTO conditioner solutions, see the XTR product family at www.ti.com.

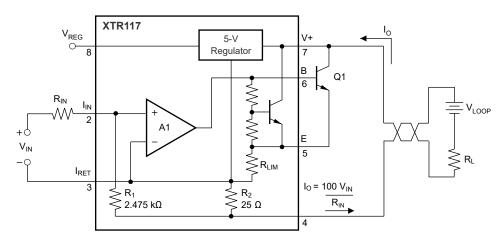


**Typical Application** 



## **Table of Contents**

1 Features	1	6.4 Device Functional Modes	8
2 Applications	1	7 Application and Implementation	<mark>9</mark>
3 Description	1	7.1 Application Information	
4 Pin Configuration and Functions	2	7.2 Typical Application	
5 Specifications	. 3	7.3 Layout	11
5.1 Absolute Maximum Ratings <sup>(1)</sup>	3	8 Device and Documentation Support	12
5.2 ESD Ratings	. 3	8.1 Related Documentation	
5.3 Recommended Operating Conditions		8.2 Receiving Notification of Documentation Updates	12
5.4 Thermal Information	3	8.3 Support Resources	12
5.5 Electrical Characteristics	4	8.4 Trademarks	12
5.6 Typical Characteristics	5	8.5 Electrostatic Discharge Caution	12
6 Detailed Description		8.6 Glossary	12
6.1 Overview		9 Revision History	
6.2 Functional Block Diagram		10 Mechanical, Packaging, and Orderable	
6.3 Feature Description		Information	13
·			

# **4 Pin Configuration and Functions**

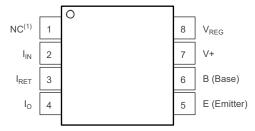




Figure 4-1. DGK Package, 8-Pin VSSOP (Top View)

Figure 4-2. DRB Package, 8-Pin VSON (Top View)

- (1) NC = No connection.
- (2) Connect thermal die pad to  $I_{\mbox{\scriptsize RET}}$  or leave unconnected on PCB.

Table 4-1. Pin Functions

PIN		TYPE <sup>(1)</sup>	DESCRIPTION	
NAME	NO.	ITPE\"	DESCRIPTION	
I <sub>IN</sub>	2	I	Current input pin	
I <sub>RET</sub>	3	I	Local ground return pin for V <sub>REG</sub>	
Io	4	0	Regulated 4-mA to 20-mA current-loop output	
E (Emitter)	5	I	nitter connection for external transistor	
B (Base)	6	0	Base connection for external transistor	
V+	7	Р	Loop power supply	
V <sub>REG</sub>	8	0	5-V regulator voltage output	
NC	1	_	Not connected.	
Thermal Pad	Pad	_	Thermal Pad. Connect to IRET or leave floating.	

(1) I = Input, O = Output, I/O = Input or Output, G = Ground, P = Power.



## **5 Specifications**

## 5.1 Absolute Maximum Ratings<sup>(1)</sup>

		MIN	MAX	UNIT
V+	Power supply (referenced to I <sub>O</sub> pin)		40	V
	Input voltage (referenced to I <sub>RET</sub> pin)	0	V+	V
	Output current limit	Continuous		
	V <sub>REG</sub> , short-circuit	Continuous		
	Operating temperature	-40	125	°C
	Storage temperature	-55	150	°C
	Junction temperature		165	°C

<sup>(1)</sup> Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

## 5.2 ESD Ratings

			VALUE	UNIT
V	Electrostatic discharge	Human-body model (HBM)	2000	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
V (ESD)		Charged device model (CDM)	1000	, v

## **5.3 Recommended Operating Conditions**

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V+	Power supply voltage	7.5	24	40	V
T <sub>A</sub>	Specified temperature	-40		125	°C

## **5.4 Thermal Information**

		XTR		
	THERMAL METRIC <sup>(1)</sup>	DGK (VSSOP)	DRB (VSON)	UNIT
		8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	173.9	60.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	95.2	33.2	°C/W
ΨЈТ	Junction-to-top characterization parameter	11.1	4.7	°C/W
ΨЈВ	Junction-to-board characterization parameter	93.7	33.0	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (top) thermal resistance	66.3	70.4	°C/W
R <sub>0JC(top)</sub>	Junction-to-case (bottom) thermal resistance	N/A	17.8	°C/W

<sup>(1)</sup> For information about traditional and new thermal metrics, see the Semiconductor and IC package thermal metrics application report.



### 5.5 Electrical Characteristics


at  $T_A$  = 25°C, V+ = 24 V,  $R_{IN}$  = 20 k $\Omega$ , and TIP29C external transistor (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN TYP	MAX	UNIT
OUTPUT					
Io	Output current equation		I <sub>O</sub> = I <sub>IN</sub> × 100		
	Output current, linear range		0.20	25	mA
I <sub>LIM</sub>	Overscale limit		32		mA
I <sub>MIN</sub>	Underscale limit	I <sub>REG</sub> = 0	0.13	0.20	mA
SPAN	,				
S	Span (current gain)		100		A/A
		I <sub>O</sub> = 200 μA to 25 mA	±0.05	±0.4	%
	Error <sup>(1)</sup>	I <sub>O</sub> = 200 μA to 25 mA, T <sub>A</sub> = -40 °C to +125°C	±3	±20	ppm/°C
	Nonlinearity	I <sub>O</sub> = 200 μA to 25 mA	±0.003	±0.02	%
INPUT					
		Ι <sub>IN</sub> = 40 μΑ	±100	±500	μV
Vos	Offset voltage (op amp)	I <sub>IN</sub> = 40 μA, T <sub>A</sub> = -40 °C to +125°C	±0.7	±6	μV/°C
		I <sub>IN</sub> = 40 μA, V+ = 7.5 V to 36 V	0.1	2	μV/V
	Diagram of the state of the sta		-35		nA
I <sub>B</sub>	Bias current	T <sub>A</sub> = -40 °C to +125°C	300		pA/°C
$\theta_n$	Noise	0.1 Hz to 10 Hz	0.6		μV <sub>pp</sub>
DYNAMI	C RESPONSE			'	
	Small-signal bandwidth	C <sub>LOOP</sub> = 0, R <sub>L</sub> = 0	380		kHz
	Slew rate		3.2		mA/µs
V <sub>REG</sub> <sup>(2)</sup>	,			'	
	Voltage		5		V
		I <sub>REG</sub> = 0 mA	±0.05	±0.1	V
	Voltage accuracy	I <sub>REG</sub> = 0 mA, T <sub>A</sub> = -40 °C to +125 °C	±0.1		mV/°C
		I <sub>REG</sub> = 0 mA, V+ = 7.5 V to 36 V	1		mV/V
	Voltage accuracy vs V <sub>REG</sub> current		See Figure 5-4		
	Short-circuit current		12		mA
POWER	SUPPLY			1	
1	0		130	200	
IQ	Quiescent current	T <sub>A</sub> = -40 °C to +125°C		250	μA

 $<sup>\</sup>begin{array}{ll} \text{(1)} & \text{Does not include initial error or temperature coefficient of $R_{\text{IN}}$.} \\ \text{(2)} & \text{Voltage measured with respect to $I_{\text{RET}}$ pin.} \end{array}$ 

## **5.6 Typical Characteristics**

At  $T_A = +25$ °C,  $V_T = 24$  V,  $R_{IN} = 20$  k $\Omega$ , and TIP29C external transistor (unless otherwise noted)

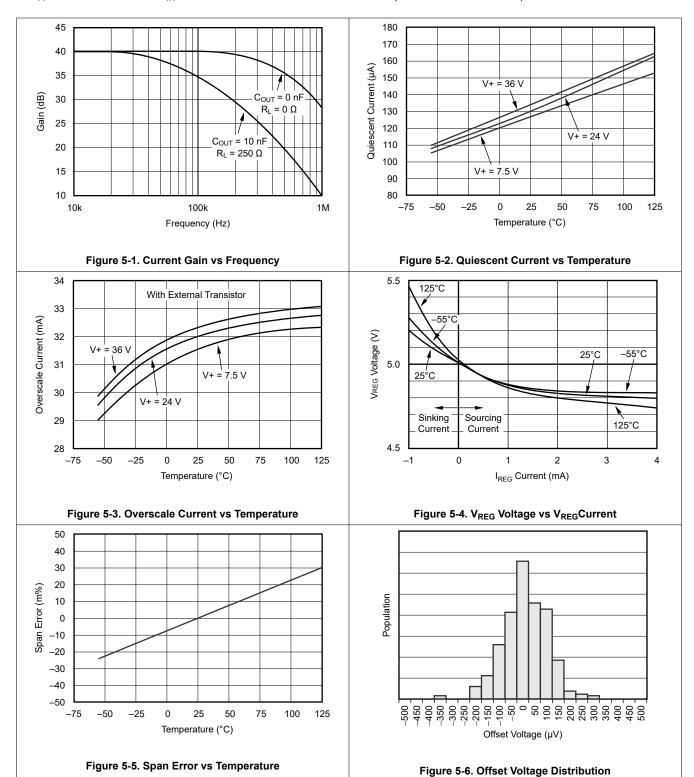

## **6 Detailed Description**

## 6.1 Overview

The XTR117 is a precision current output converter designed to transmit analog 4 mA to 20 mA signals over an industry-standard current loop. Figure 6-1 shows basic circuit connections with representative simplified input circuitry. The XTR117 is a two-wire current transmitter. The input current (pin 2) controls the output current. A portion of the output current flows into the V+ power supply, pin 7. The remaining current flows in  $Q_1$ . External input circuitry connected to the XTR117 can be powered from  $V_{REG}$ . Current drawn from these terminals must be returned to  $I_{RFT}$ , pin 3. The  $I_{RFT}$  pin is a *local ground* for input circuitry driving the XTR117.

The XTR117 is a current-input device with a gain of 100. A current flowing into pin 2 produces  $I_O = 100 \times I_{IN}$ . The input voltage at the  $I_{IN}$  pin is zero (referred to the  $I_{RET}$  pin). A voltage input is converted to an input current with an external input resistor,  $R_{IN}$ , as shown in Figure 6-1. Typical full-scale input voltages range from 1 V and upward. Full-scale inputs greater than 0.5 V are recommend to minimize the effects of offset voltage and drift of A1.


For improved precision use an external voltage reference:

DEVICE	VOLTAGE
REF35409	4.096 V
REF35300	3.0 V
REF35250	2.5 V

Use REF34xx for lower drift.

Possible choices for Q1<sup>(1)</sup>

TYPE	PACKAGE
2N4922G FCX690BTA	TO-126 SOT-89-3
MMBTA28-7-F	SOT-23-3

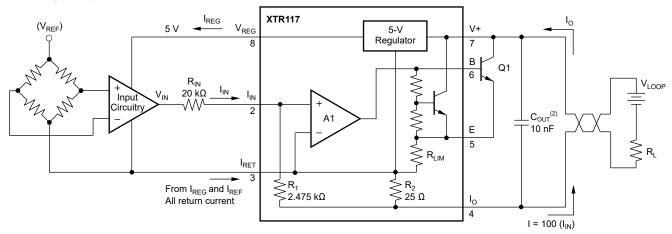


- (1) See Section 7.1.1.
- (2) See Section 7.1.6.

Figure 6-1. Basic Circuit Connections




### 6.2 Functional Block Diagram

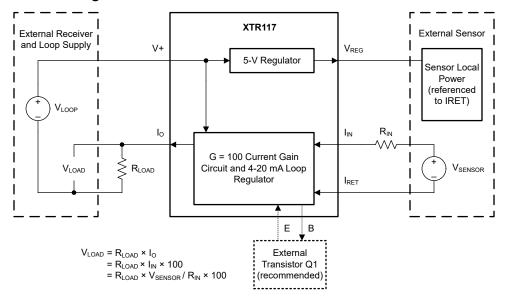

## **6.3 Feature Description**

### 6.3.1 Reverse-Voltage Protection

The XTR117 low compliance voltage rating (minimum operating voltage) of 7.5 V permits the use of various voltage protection methods without compromising operating range. Figure 6-2 shows a diode bridge circuit that allows normal operation even when the voltage connection lines are reversed. The bridge causes a two-diode drop (approximately 1.4 V) loss in loop supply voltage. This voltage drop results in a compliance voltage of approximately 9 V—satisfactory for most applications. A diode can be inserted in series with the loop supply voltage and the V+ pin to protect against reverse output connection lines with only a 0.7-V loss in loop supply voltage.

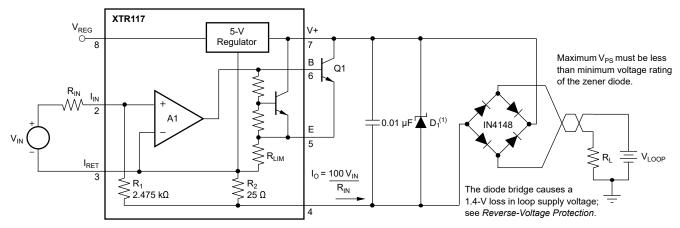

(1) 36-V Zener diode, such as 1N4753A or P6KE39A. Use lower-voltage Zener diodes with loop power-supply voltages < 30 V for increased protection; see Section 6.3.2.

Figure 6-2. Reverse Voltage Operation and Over-Voltage Surge Protection

#### 6.3.2 Overvoltage Surge Protection

Remote connections to current transmitters can sometimes be subjected to voltage surges. Best practice is to limit the maximum surge voltage applied to the XTR117 to as low as practical. Various Zener diode and surge clamping diodes are specially designed for this purpose. Select a clamp diode with as low a voltage rating as possible for best protection. The absolute maximum power-supply rating on the XTR117 is specified at 40 V. Keep overvoltages and transients less than 40 V to maintain reliable operation when the supply returns to normal (7.5 V to 36 V).

Most surge protection Zener diodes have a diode characteristic in the forward direction that conducts excessive current, possibly damaging receiving-side circuitry if the loop connections are reversed. If a surge-protection diode is used, use a series diode or diode bridge for protection against reversed connections.

#### 6.3.3 VSON Package

The XTR117 is offered in a VSON-8 package (also known as SON or DFN). The VSON is a QFN package with lead contacts on only two sides of the bottom of the package. This leadless package maximizes board space and enhances thermal and electrical characteristics through an exposed pad.

VSON packages are physically small, have a smaller routing area, improved thermal performance, and improved electrical parasitics. Additionally, the absence of external leads eliminates bent-lead issues.

The VSON package can be easily mounted using standard printed circuit board (PCB) assembly techniques. See the *QFN/SON PCB Attachment* and *Quad Flatpack No-Lead Logic Packages* application notes, both available for download at www.ti.com.

Connect the exposed leadframe die pad on the bottom of the package to I<sub>RET</sub> or leave unconnected.

#### **6.4 Device Functional Modes**

The device has one mode of operation that applies when operated within the *Recommended Operating Conditions*.

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated



## 7 Application and Implementation

#### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

## 7.1 Application Information

#### 7.1.1 External Transistor

The external transistor,  $Q_1$ , conducts the majority of the full-scale output current. Power dissipation in this transistor can approach 0.8 W with high loop voltage (40 V) and 20-mA output current. The XTR117 is designed to use an external transistor to avoid on-chip, thermal-induced errors. Heat produced by  $Q_1$  still causes ambient temperature changes that can influence the XTR117 performance. To minimize these effects, locate  $Q_1$  away from sensitive analog circuitry, including the XTR117. Mount  $Q_1$  so that heat is conducted to the outside of the transducer housing.

The XTR117 is designed to use virtually any NPN transistor with sufficient voltage, current, and power rating. Case style and thermal mounting considerations often influence the choice for any given application. Several possible choices are listed in Figure 6-1. A MOSFET transistor does not improve the accuracy of the XTR117 and is not recommended. Although the XTR117 can be used without an additional external transistor, this configuration is not always practical at higher loop voltages and currents because of self-heating concerns.

#### 7.1.2 Minimum Output Current

The quiescent current of the XTR117 (typically 130  $\mu$ A) is the lower limit of the output current. Zero input current ( $I_{IN}$  = 0) produces an  $I_O$  equal to the quiescent current. Output current does not begin to increase until  $I_{IN}$   $I_Q$ / 100. Current drawn from  $V_{REG}$  is added to this minimum output current. Up to 3.8 mA is available to power external circuitry while still allowing the output current to go to less than 4 mA.

#### 7.1.3 Offsetting the Input

A low-scale output of 4 mA is produced by creating a 40- $\mu$ A input current. Figure 7-1 shows how this input current is created with the proper value resistor from an external reference voltage ( $V_{REF}$ ).  $V_{REG}$  is used as shown in Figure 7-1, but does not have the temperature stability of a high-quality reference, such as the REF3425.




Figure 7-1. Creating Low-Scale Offset

## 7.1.4 Radio Frequency Interference

The long wire lengths of current loops invite radio-frequency (RF) interference. RF interference can be rectified by the input circuitry of the XTR117 or preceding circuitry. This effect generally appears as an unstable output current that varies with the position of loop supply or input wiring. Interference cab also enter at the input terminals. For integrated transmitter assemblies with short connections to the sensor, the interference more likely comes from the current-loop connections.

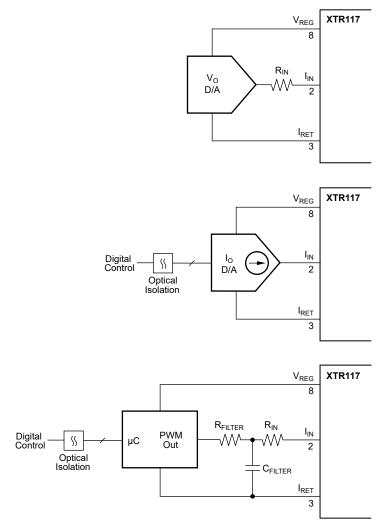


Figure 7-2. Digital Control Methods

### 7.1.5 Maximum Output Current

The XTR117 provides accurate, linear output up to 25 mA. Internal circuitry limits the output current to approximately 32 mA to protect the transmitter and loop power or measurement circuitry.

Extending the output current range of the XTR117 is possible by connecting an external resistor from pin 3 to pin 5 to change the current limit value.

## **CAUTION**

All output current must flow through internal resistors; therefore, damage is possible with excessive current. Output currents greater than 45 mA can cause permanent damage.

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated

### 7.1.6 Circuit Stability

The 4-20 mA control-loop stability must be evaluated for any XTR117 design. A 10-nF decoupling capacitor between V+ and  $I_O$  is recommended for most applications. As this capacitance appears in parallel with the load resistance  $R_{LOAD}$  from a stability perspective, the capacitor and resistor form a filter corner that can limit the bandwidth of the system. Therefore, for HART applications, use a bypass capacitance of 2 nF to 3 nF instead.

For applications with EMI and EMC concerns, use a bypass capacitor with sufficiently low ESR to decouple any ripple voltage from the  $V_{LOOP}$  supply. Otherwise, the ripple voltage couples onto the 4-mA to 20-mA current source, and appears as noise across  $R_{LOAD}$  after the current-to-voltage conversion.

## 7.2 Typical Application

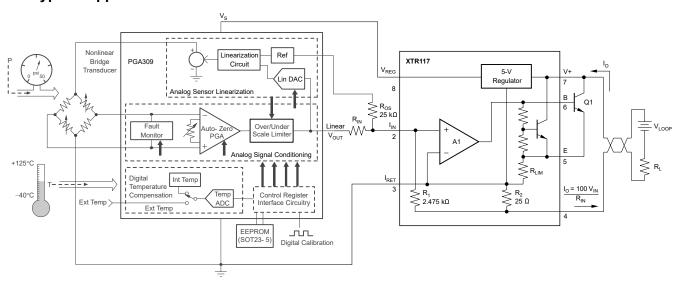


Figure 7-3. Complete 4 mA-20 mA Pressure Transducer Solution With PGA309 and XTR117

#### 7.3 Layout

## 7.3.1 Layout Guidelines

The exposed leadframe die pad on the VSON packages can be soldered to a thermal pad on the PCB. A mechanical drawing showing an example layout is attached at the end of this data sheet. Refinements to this layout can be required based on assembly process requirements. Mechanical drawings located at the end of this data sheet list the physical dimensions for the package and pad. The five holes in the landing pattern are optional, and are intended for use with thermal vias that connect the leadframe die pad to the heat-sink area on the PCB.

Soldering the exposed pad significantly improves board-level reliability during temperature cycling, key push, package shear, and similar board-level tests. Even with applications that have low power dissipation, solder the exposed pad to the PCB to provide structural integrity and long-term stability.



## 8 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

#### 8.1 Related Documentation

For related documentation see the following:

- Texas Instruments, Special Function Amplifiers Precision Labs video series on Current Loop Transmitters
- Texas Instruments, TIPD126 Bridge Sensor Signal Conditioner with Current Loop Output and EMC Protection Reference Design with XTR117

## 8.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

## 8.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

### 8.4 Trademarks

TI E2E<sup>™</sup> is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

## 8.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

#### 8.6 Glossary

TI Glossary

This glossary lists and explains terms, acronyms, and definitions.

Submit Document Feedback

Copyright © 2023 Texas Instruments Incorporated



## **9 Revision History**

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

C	nanges from Revision C (May 2012) to Revision D (November 2023)	Page
•	Updated the numbering format for tables, figures, and cross-references throughout the document	
•	Changed maximum recommended loop supply voltage range from 40 V to 36 V in Features, Specification	ons,
	and throughout the document	1
•	Changed package name MSOP to VSSOP and DFN to VSON throughout the document	1
•	Changed Device Information table title to Package Information and updated contents	
•	Added Pin Configurations and Functions, ESD Ratings, Recommended Operating Conditions, Thermal	
	Information, Detailed Description, Overview, Functional Block Diagram, Feature Description, Application	า and
	Implementation Typical Application, Device and Documentation Support, Related Documentation, and	
	Mechanical, Packaging, and Orderable Information sections	<mark>2</mark>
•	Changed absolute maximum loop supply voltage range from 50 V to 40 V in Absolute Maximum Ratings	s and
	throughout the document	3
•	Changed operating temperature minimum value from -55°C to -40°C in Absolute Maximum Ratings and	d
	Electrical Characteristics	3
•	Moved thermal resistance content from Electrical Characteristics to new Thermal Information	3
•	Changed thermal resistance from $\theta_{JA}$ = 150°C/W (MSOP) and 53 °C/W (DFN) to $R_{\theta JA}$ = 173.9 °C/W	
	(VSSOP) and 60.7 °C/W (VSON), respectively	3
•	Changed bias current vs temperature from 150 pA/°C to 300 pA/°C in <i>Electrical Characteristics</i>	4
•	Changed V <sub>REG</sub> vs output current parameter name to Voltage accuracy vs V <sub>REG</sub> current, in <i>Electrical</i>	1
	Characteristics	4
•	Deleted redundant temperature range content already stated in the <i>Absolute Maximum Ratings</i> and new <i>Recommended Operating Conditions</i>	/V 
	Updated Typical Characteristics title to remove typo	5
•	Changed Figure 7-1, Basic Circuit Connections	6
	Changed suggested Zener diode part numbers in Figure 7-2, Reverse Voltage Operation and Overvolta	
	Surge Protection	90 7
	Changed External Transistor applications information section to incorporate additional guidance regarding	na '
	transistor power dissipation and thermal concerns	i g
	Added Circuit Stability section	11

## 10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

Submit Document Feedback

www.ti.com 9-Nov-2025

#### PACKAGING INFORMATION

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
XTR117AIDGKR	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	Call TI   Nipdau	Level-3-260C-168 HR	-40 to 125	BOZ
XTR117AIDGKR.B	Active	Production	VSSOP (DGK)   8	2500   LARGE T&R	Yes	Call TI	Level-3-260C-168 HR	-40 to 125	BOZ
XTR117AIDGKT	Obsolete	Production	VSSOP (DGK)   8	-	-	Call TI	Call TI	-40 to 125	BOZ
XTR117AIDRBR	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	BOY
XTR117AIDRBR.B	Active	Production	SON (DRB)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	BOY
XTR117AIDRBT	Obsolete	Production	SON (DRB)   8	-	-	Call TI	Call TI	-40 to 125	BOY

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.



# **PACKAGE OPTION ADDENDUM**

www.ti.com 9-Nov-2025

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 23-Jul-2025

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device		Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
XTR117AIDGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
XTR117AIDRBR	SON	DRB	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

**PACKAGE MATERIALS INFORMATION** 

www.ti.com 23-Jul-2025



### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
XTR117AIDGKR	VSSOP	DGK	8	2500	353.0	353.0	32.0
XTR117AIDRBR	SON	DRB	8	3000	367.0	367.0	35.0



SMALL OUTLINE PACKAGE



#### NOTES:

PowerPAD is a trademark of Texas Instruments.

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-187.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
- 8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
- 9. Size of metal pad may vary due to creepage requirement.



SMALL OUTLINE PACKAGE



NOTES: (continued)

- 11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 12. Board assembly site may have different recommendations for stencil design.





Images above are just a representation of the package family, actual package may vary. Refer to the product data sheet for package details.

4203482/L





PLASTIC SMALL OUTLINE - NO LEAD



#### NOTES:

- All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- 2. This drawing is subject to change without notice.
- 3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC SMALL OUTLINE - NO LEAD



NOTES: (continued)

- 4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.



PLASTIC SMALL OUTLINE - NO LEAD



NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025