

# ***DLP5534PROJQ1EVM Evaluation Module User's Guide***

---



---



---

The DLP5534PROJQ1 Evaluation Module (EVM) is a complete electronic and optical 405 nm projector utilizing the DLP5534-Q1 chipset. The DLP5534-Q1 chipset consists of the DLP5534-Q1, the DLPC230-Q1, and the TPS99000-Q1. Electronics with the DLP5534-Q1 chipset is combined with illumination and projection optics and a 405 nm LED to make an automotive grade projector for applications such as transparent window display utilizing phosphor film(s) embedded in a window.

The DLP5534PROJQ1 EVM is not a production design. It is intended for evaluation only.

## **Contents**

1	User Guide Overview.....	2
	1.1 What is in the DLP5534PROJQ1 EVM .....	2
	1.2 Specifications.....	8
2	Quick Start .....	10
	2.1 Kit Assembly Instructions.....	10
	2.2 Software Installation .....	10
	2.3 Powering-Up EVM.....	10
	2.4 Connecting EVM to the DLPC230-Q1 Control Program .....	11
	2.5 Steps to Reprogram the Onboard Flash Memory.....	12

## **List of Figures**

1	DLP5534PROJQ1EVM Projector.....	2
2	EVM Controller PCB .....	3
3	EVM Illumination Driver PCB.....	5
4	EVM Cables .....	7
5	EVM Cable Connections .....	10
6	Connecting to the DLPC230-Q1 Using the DLPC230-Q1 Automotive Control Program .....	11
7	DLPC230-Q1 Automotive Control Program Communication Settings.....	12

## **List of Tables**

1	Controller PCB Ports .....	4
2	Controller LED Indicators .....	4
3	Controller PCB Switches.....	4
4	Illumination Driver PCB Ports .....	6
5	EVM Cables .....	7
6	Optical Specifications .....	8
7	Electrical Specifications.....	8
8	EVM PCB Components Which are Not Rated for –40°C to 105°C .....	9

## **Trademarks**


All trademarks are the property of their respective owners.

## 1 User Guide Overview

This user's guide presents an overview and general description of the DLP5534PROJQ1 EVM and provides first steps for getting started using the EVM.

### 1.1 What is in the DLP5534PROJQ1 EVM

The DLP5534PROJQ1 EVM integrates the contents of the DLP5534Q1 electronics EVM with 405 nm illumination and projection optics to produce a complete projector shown in [Figure 1](#). The projector utilizes a Luminus CBM-25X-UV 405 nm LED to produce a very bright 405 nm projector. A heatsink and fans are provided for cooling of the LED and electronics.

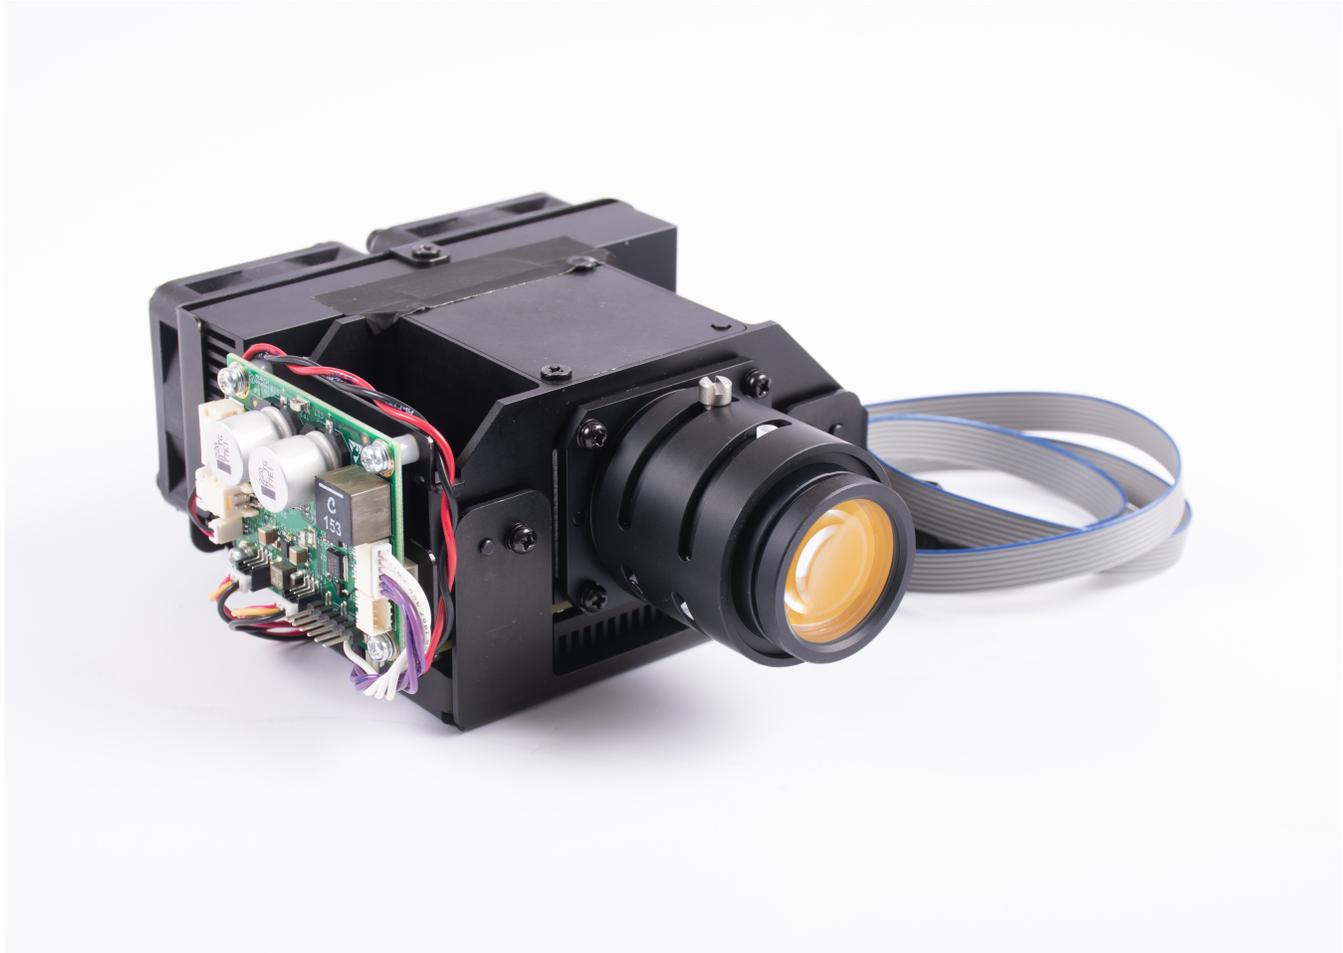

**Figure 1. DLP5534PROJQ1EVM Projector**

The DLP5534Q1 electronics EVM that is integrated into the projector consists of a Controller PCB, an Illumination Driver PCB, cables, and a USB to SPI adapter.

#### 1.1.1 Controller PCB

The Controller PCB shown in [Figure 2](#) includes the DLP5534-Q1 DMD, the DLPC230-Q1 DMD Controller, and the TPS99000-Q1. It supports video inputs from either a micro HDMI or OpenLDI interface and provides the formatting and control to display the video on the DLP5534-Q1 DMD. The EVM can be controlled with either an SPI or I<sup>2</sup>C interface. The SPI or I<sup>2</sup>C interface can also be used to reprogram the serial Flash that is used to store DLPC230-Q1 software and configuration. An optional second SPI port is provided for monitoring the TPS99000-Q1. The EVM includes a flex interface to control the Illumination Driver PCB. The EVM has external photodiode inputs and thermistor inputs which are not used for this application.

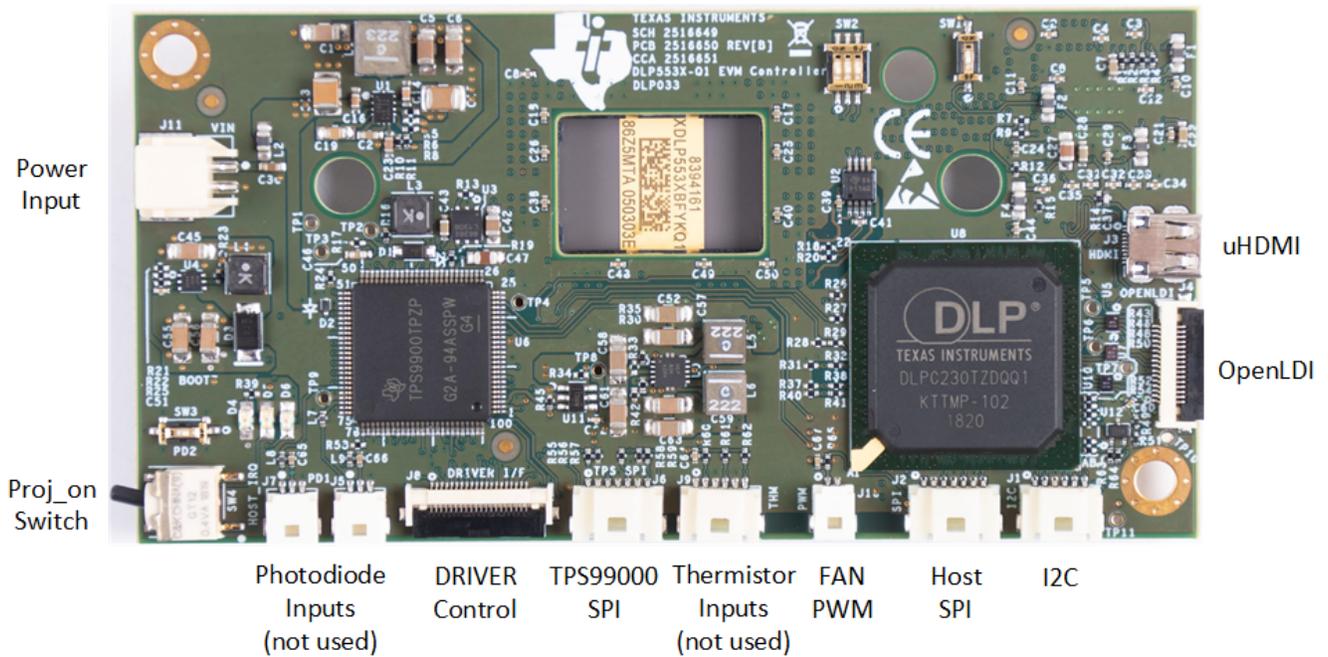


Figure 2. EVM Controller PCB

The Controller PCB contains the ports listed in [Table 1](#). Indicator LEDs are listed in [Table 2](#).

**Table 1. Controller PCB Ports**

SCHEMATIC REFERENCE	FUNCTION
J1	Host I <sup>2</sup> C, PROJ_ON, HOLD_BOOT, HOST_IRQ
J2	Host SPI
J3	Micro HDMI
J4	OpenLDI (Flex connector)
J5	Photodiode 1 <sup>(1)</sup>
J6	TPS99000-Q1 SPI Debug
J7	Photodiode 2 <sup>(1)</sup>
J8	LED Driver Interface
J9	LED Thermistor <sup>(1)</sup>
J10	Fan PWM output (optional)
J11	Controller Power

<sup>(1)</sup> Port unused for this application. Cable not provided.

**Table 2. Controller LED Indicators**

SCHEMATIC REFERENCE	FUNCTION
D4 (Green)	Input power to Controller (from Illumination Driver) Off: No power connected On: Power connected
D5 (Green)	PROJ_ON Off: System Off On: System On
D6 (Red)	HOST_IRQ Off: Interrupt not asserted On: Interrupt asserted

The Controller PCB switches are listed in [Table 3](#). SW4 is a toggle switch for PROJ\_ON which is used to turn on and off the electronics. Note that parts of the board are still powered when PROJ\_ON is in the off position. SW1, SW2, and SW3 are dip switches that control the states of configuration signals the DLPC230-Q1 reads when it comes out of reset. These switches should be set based on the desired configuration options.

**Table 3. Controller PCB Switches**

SCHEMATIC REFERENCE / SIGNAL NUMBER	FUNCTION
SW1 (1)	Spread Spectrum Enable Off: Disabled On: Enabled
SW2 (1)	Host Port Checksum Select Off: CRC On: Checksum
SW2 (2)	Host Interface Select Off: Host SPI On: Host I <sup>2</sup> C
SW2 (3)	Host SPI Mode Off: Mode 0 or 3 On: Mode 1 or 2
SW3	Hold in Boot Off: Do not hold in boot (continue to main application) On: Hold in boot
SW4	PROJ_ON Off: Turn off system On: Turn on system On state is toward the closest corner of the board <a href="#">Figure 2</a>


### 1.1.2 Illumination Driver PCB

The Illumination Driver PCB shown in [Figure 3](#) is controlled by the Controller PCB over a flex cable. Power can be input to the Illumination Driver from a lab supply. The Illumination driver provides reverse bias protection and supplies power to the Controller PCB over a separate cable. The Illumination Driver has outputs for one to three illuminators. These are typically LEDs, but it is possible other illuminators could be used. See [Section 1.2.2](#) for input and output specifications of the EVM. Depending on operating conditions, some parts and surfaces of the PCB can be hot.

**CAUTION**



Hot surface. Contact may cause burns. Do not touch!

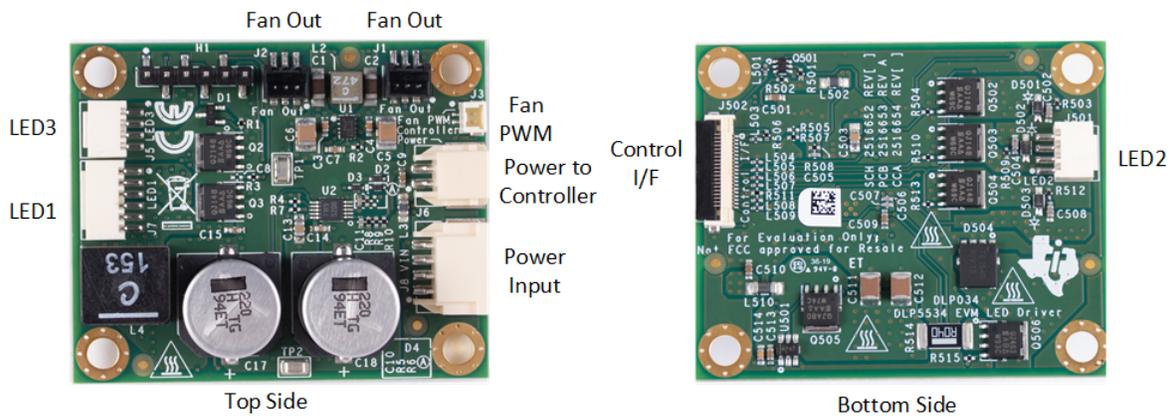

**Figure 3. EVM Illumination Driver PCB**

The Illumination Driver PCB contains the ports listed in [Table 4](#).

**Table 4. Illumination Driver PCB Ports**

SCHEMATIC REFERENCE	FUNCTION
J1	Fan Output
J2	Fan Output
J3	Fan PWM Input
J5	LED3 Illuminator Output (Not used)
J6	Controller Power
J7	LED1 Illumination Output
J8	Input Power
J501	LED2 Illumination Output (Not used)
J502	Controller to Driver Control Interface

### 1.1.3 EVM Cables

The EVM cables and Cheetah USB to SPI adapter are listed in [Table 5](#) and shown in [Figure 4](#).



**Figure 4. EVM Cables**

**Table 5. EVM Cables**

NAME	REFERENCE	QUANTITY
Cheetah™ SPI Host Adapter	A	1
Host SPI Cable	B	1
Host I <sup>2</sup> C Cable (Includes PROJ_ON, HOLD_BOOT, HOST_IRQ signals)	C	1
Driver to Controller Power Cable	D	1
Input Power Cable	E	1
LED1 Illuminator Power Cable	F	1
LED2 Illuminator Power Cable	G	1
LED3 Illuminator Power Cable	H	1
Fan PWM	I	1
Controller to Driver Control Flex	J	1
OpenLDI Flex Cable	K	1
Micro HDMI Cable	L	1


## 1.2 Specifications

### 1.2.1 Optical Specifications

The DLP5534PROJQ1 EVM utilizes the Luminus CBM-25X-UV 405 nm LED. Optical specifications for the projector are listed in [Table 6](#). The optics are optimized for high brightness. If higher contrast is desired the optics can be designed for a higher f/# with some loss of brightness.

**Table 6. Optical Specifications**

PARAMETER	MIN	NOM	MAX	UNIT
Optical Output Power		2.7		W
LED Center Wavelength		405		nm
f/#		2.0		
Throw Ratio (Distance/Width)		2.5		
Focus Range (Distance)	300		900	mm
Optical Offset		120%		
Contrast (Full on/off)		950:1		

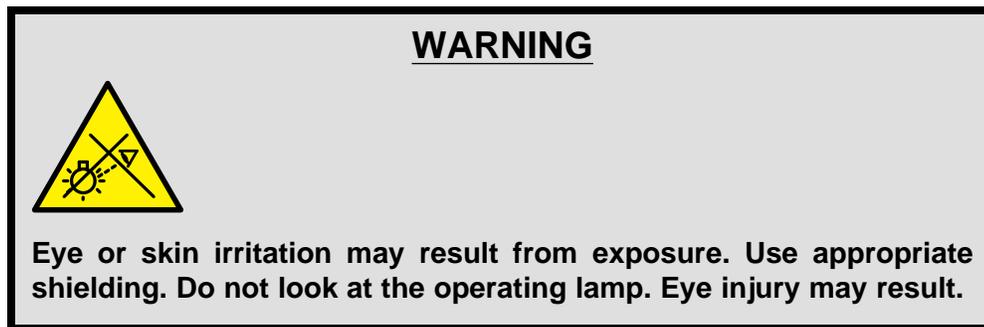

### 1.2.2 Electrical Specifications

**Table 7. Electrical Specifications**

PARAMETER	MIN	NOM	MAX	UNIT
<b>Input</b>				
Voltage (Input voltage must be ~10 V or higher for maximum projector brightness)	8	12	18	V
Input Current <sup>(1)</sup>			3.9	A
Input Power <sup>(1)</sup>			42	W
<b>Illumination Driver Output Load</b>				
Voltage			9	V
Current			4	A RMS
<b>Fan Output</b>				
Voltage		5		V
Current (total for all fans)			0.5	A
<b>Temperature</b>				
Operating DMD Temperature	-40		105	°C
Projector Ambient Temperature <sup>(1)(2)(3)</sup>	-40		70	°C

<sup>(1)</sup> 98/2 duty cycle, 4 A RMS current to LED, Fans at 100%.

<sup>(2)</sup> Operation at higher ambient temperatures is possible at lower LED output power.

<sup>(3)</sup> Some components are only rated to 85°C. Refer to [Table 8](#) for a list of these components.

### 1.2.3 Component Temperature Ratings

The PCB materials and most of the PCB components are rated to operate between  $-40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$ , including the DLP5534-Q1, the DLPC230-Q1, and the TPS99000-Q1.

Some components on PCBs, such as switches, connectors, and indicator LEDs, do not meet this temperature rating. The specifications for EVM components which are not rated between  $-40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$  are listed in [Table 8](#). Please refer to the EVM bill of materials to review the temperature specifications of all components used in the EVM design.

**Table 8. EVM PCB Components Which are Not Rated for  $-40^{\circ}\text{C}$  to  $105^{\circ}\text{C}$**

Board	Reference	Part Number	Manufacturer	Description	Temperature Minimum ( $^{\circ}\text{C}$ )	Temperature Maximum ( $^{\circ}\text{C}$ )
Controller	D4, D5	LTST-C171KGKT	Lite-On	LED, GREEN 0805	-55	85
Controller	D6	LTST-C171KRKT	Lite-On	LED, RED 0805	-55	85
Controller	J3	685119248123	Würth	CONN MICRO HDMI RIGHT ANGLE	-40	85
Controller	SW2	CVS-03TB	Copal Electronics Inc	SWITCH DIP SLIDE 3-POS 1 MM 6 V	-40	85
Controller	SW1, SW3	CVS-01TB	Copal Electronics Inc	SWITCH DIP SLIDE 1-POS 1 MM 6 V	-40	85
Controller	SW4	GT12MSABETR	C&K Comp	SWITCH, SPST, GULL	-30	85
Controller	U5, U7, U10, U503, U504	PCMF2HDMI2SZ	Nexperia	COMMON MODE CHOKE 4LN SMD ESD	-40	85
Controller	U501	TFP401AIPZPRQ1	Texas Instruments	IC PANELBUS DVI RCVR 100-HTQFP	-40	85

The Controller and Illumination Driver PCBs have a UL flame rating of  $130^{\circ}\text{C}$  maximum.

### 1.2.4 Input Video Specifications

The following input video resolutions are supported on the HDMI and OpenLDI interfaces. These input video resolutions are programmed in the Extended Display Identification Data (EDID) EEPROM for the EVM's HDMI interface allowing a connected computer to read the supported resolutions and timing. Note that some computers may not be able to output all of these resolutions, in particular  $576 \times 288$ .

- $1152 \times 1152$
- $1152 \times 576$
- $576 \times 288$

The recommended input source timings for the EVM's HDMI interface are specified in the DLPC230-Q1 data sheet. These timing parameters are also recommended for the OpenLDI interface.

### 1.2.5 SPI and I<sup>2</sup>C Timing

For more information on SPI and I<sup>2</sup>C specifications, see the DLPC230-Q1 data sheet.



## 2.4 Connecting EVM to the DLPC230-Q1 Control Program

1. Start the DLPC230-Q1 Control Program.
2. On the connection page set the DLPC230-Q1 Host to SPI and select the Cheetah from the drop down menu (see Figure 6). Note that the Cheetah must be connected to computer with USB cable for it to show up in the drop down box.


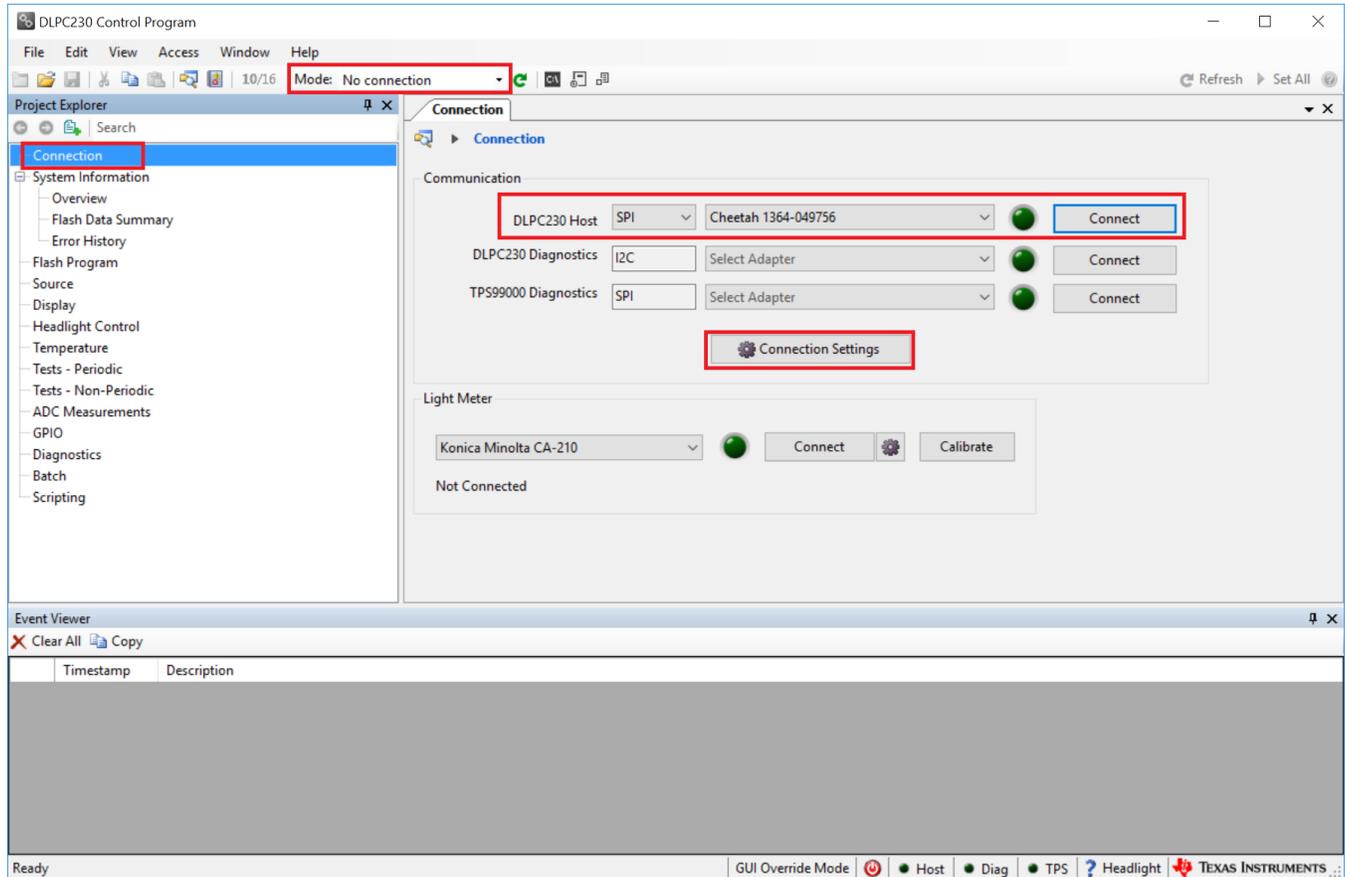


Figure 6. Connecting to the DLPC230-Q1 Using the DLPC230-Q1 Automotive Control Program

3. Select "Connection Settings" to confirm the SPI configuration shown in [Figure 7](#) matches the Controller PCB switch settings described in [Table 3](#). Specifically, SPI mode and CRC/Checksum may vary based on switch settings. Press "OK" once configuration is complete.

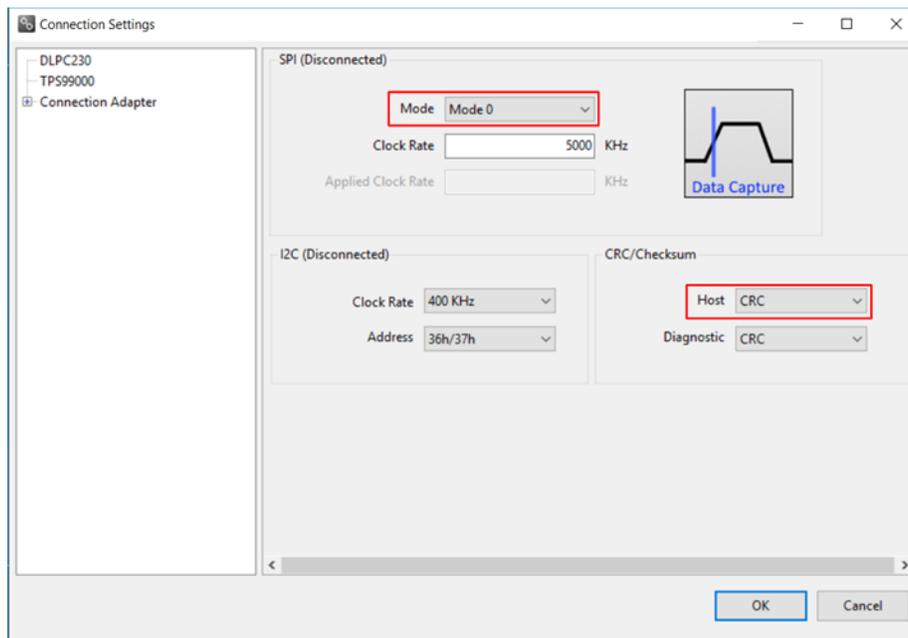

**Figure 7. DLPC230-Q1 Automotive Control Program Communication Settings**

4. Click the Connect button. The green circle next to the Connect button should then light up to indicate that connection was successful to the Cheetah Adapter.

## 2.5 Steps to Reprogram the Onboard Flash Memory

The DLP5534PROJQ1 EVM comes with onboard serial Flash that is pre-programmed with software and basic configuration. The software and configuration can be updated by reprogramming the serial Flash with the DLPC230-Q1 Automotive Control Program. Steps to re-program the serial Flash are listed below.

1. Using the DLPC230-Q1 Automotive Control Program, which is connected to the EVM, navigate to the "Flash Program" tab.
2. Using the folder icon, select an Image File (.bin) and open it.
3. Click "Program and Verify Flash Memory."

Note that if the device is in Display mode, it will automatically be switched to Standby during programming.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated