

SN74AVC4T245-Q1 Functional Safety FIT Rate, FMD and Pin FMA



Table of Contents

1 Overview	2
2 Functional Safety Failure In Time (FIT) Rates	3
2.1 TSSOP Package.....	3
2.2 WQFN Package.....	4
2.3 UQFN Package.....	5
3 Failure Mode Distribution (FMD)	6
4 Pin Failure Mode Analysis (Pin FMA)	7
4.1 TSSOP Package.....	8
4.2 WQFN Package.....	9
4.3 UQFN Package.....	10

Trademarks

All trademarks are the property of their respective owners.

1 Overview

This document contains information for the SN74AVC4T245-Q1 (TSSOP, WQFN, and UQFN packages) to aid in a functional safety system design. Information provided are:

- Functional safety failure in time (FIT) rates of the semiconductor component estimated by the application of industry reliability standards
- Component failure modes and their distribution (FMD) based on the primary function of the device
- Pin failure mode analysis (pin FMA)

Figure 1-1 shows the device functional block diagram for reference.

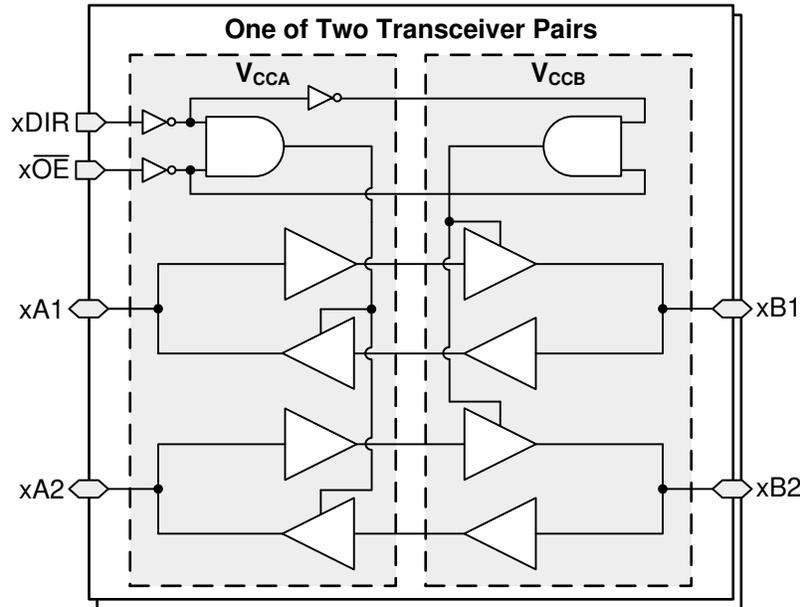


Figure 1-1. Functional Block Diagram

The SN74AVC4T245-Q1 was developed using a quality-managed development process, but was not developed in accordance with the IEC 61508 or ISO 26262 standards.

2 Functional Safety Failure In Time (FIT) Rates

2.1 TSSOP Package

This section provides functional safety failure in time (FIT) rates for the TSSOP package of the SN74AVC4T245-Q1 based on two different industry-wide used reliability standards:

- [Table 2-1](#) provides FIT rates based on IEC TR 62380 / ISO 26262 part 11
- [Table 2-2](#) provides FIT rates based on the Siemens Norm SN 29500-2

Table 2-1. Component Failure Rates per IEC TR 62380 / ISO 26262 Part 11

FIT IEC TR 62380 / ISO 26262	FIT (Failures Per 10 ⁹ Hours)
Total component FIT rate	15
Die FIT rate	2
Package FIT rate	13

The failure rate and mission profile information in [Table 2-1](#) comes from the reliability data handbook IEC TR 62380 / ISO 26262 part 11:

- Mission profile: motor control from table 11
- Power dissipation: 19 mW
- Climate type: world-wide table 8
- Package factor (lambda 3): table 17b
- Substrate material: FR4
- EOS FIT rate assumed: 0 FIT

Table 2-2. Component Failure Rates per Siemens Norm SN 29500-2

Table	Category	Reference FIT Rate	Reference Virtual T _J
5	CMOS, BICMOS Digital, analog, or mixed	5 FIT	55°C

The reference FIT rate and reference virtual T_J (junction temperature) in [Table 2-2](#) come from the Siemens Norm SN 29500-2 tables 1 through 5. Failure rates under operating conditions are calculated from the reference failure rate and virtual junction temperature using conversion information in SN 29500-2 section 4.

2.2 WQFN Package

This section provides functional safety failure in time (FIT) rates for the WQFN package of the SN74AVC4T245-Q1 based on two different industry-wide used reliability standards:

- [Table 2-3](#) provides FIT rates based on IEC TR 62380 / ISO 26262 part 11
- [Table 2-4](#) provides FIT rates based on the Siemens Norm SN 29500-2

Table 2-3. Component Failure Rates per IEC TR 62380 / ISO 26262 Part 11

FIT IEC TR 62380 / ISO 26262	FIT (Failures Per 10 ⁹ Hours)
Total component FIT rate	7
Die FIT rate	2
Package FIT rate	5

The failure rate and mission profile information in [Table 2-3](#) comes from the reliability data handbook IEC TR 62380 / ISO 26262 part 11:

- Mission profile: motor control from table 11
- Power dissipation: 19 mW
- Climate type: world-wide table 8
- Package factor (lambda 3): table 17b
- Substrate material: FR4
- EOS FIT rate assumed: 0 FIT

Table 2-4. Component Failure Rates per Siemens Norm SN 29500-2

Table	Category	Reference FIT Rate	Reference Virtual T _J
5	CMOS, BICMOS Digital, analog, or mixed	5 FIT	55°C

The reference FIT rate and reference virtual T_J (junction temperature) in [Table 2-4](#) come from the Siemens Norm SN 29500-2 tables 1 through 5. Failure rates under operating conditions are calculated from the reference failure rate and virtual junction temperature using conversion information in SN 29500-2 section 4.

2.3 UQFN Package

This section provides functional safety failure in time (FIT) rates for the UQFN package of the SN74AVC4T245-Q1 based on two different industry-wide used reliability standards:

- [Table 2-5](#) provides FIT rates based on IEC TR 62380 / ISO 26262 part 11
- [Table 2-6](#) provides FIT rates based on the Siemens Norm SN 29500-2

Table 2-5. Component Failure Rates per IEC TR 62380 / ISO 26262 Part 11

FIT IEC TR 62380 / ISO 26262	FIT (Failures Per 10 ⁹ Hours)
Total component FIT rate	8
Die FIT rate	2
Package FIT rate	6

The failure rate and mission profile information in [Table 2-5](#) comes from the reliability data handbook IEC TR 62380 / ISO 26262 part 11:

- Mission profile: motor control from table 11
- Power dissipation: 19 mW
- Climate type: world-wide table 8
- Package factor (lambda 3): table 17b
- Substrate material: FR4
- EOS FIT rate assumed: 0 FIT

Table 2-6. Component Failure Rates per Siemens Norm SN 29500-2

Table	Category	Reference FIT Rate	Reference Virtual T _J
5	CMOS, BICMOS Digital, analog, or mixed	5 FIT	55°C

The reference FIT rate and reference virtual T_J (junction temperature) in [Table 2-6](#) come from the Siemens Norm SN 29500-2 tables 1 through 5. Failure rates under operating conditions are calculated from the reference failure rate and virtual junction temperature using conversion information in SN 29500-2 section 4.

3 Failure Mode Distribution (FMD)

The failure mode distribution estimation for SN74AVC4T245-Q1 in [Table 3-1](#) comes from the combination of common failure modes listed in standards such as IEC 61508 and ISO 26262, the ratio of sub-circuit function size and complexity and from best engineering judgment.

The failure modes listed in this section reflect random failure events and do not include failures due to misuse or overstress.

Table 3-1. Die Failure Modes and Distribution

Die Failure Modes	Failure Mode Distribution (%)
Driver HIZ; no output	18%
Output functional – out of specification timing or voltage	27%
Driver stuck at fault high	21%
Driver stuck at fault low	24%
Driver stuck at undetermined state	10%

4 Pin Failure Mode Analysis (Pin FMA)

This section provides a failure mode analysis (FMA) for the pins of the SN74AVC4T245-Q1 (TSSOP, WQFN and UQFN packages). The failure modes covered in this document include the typical pin-by-pin failure scenarios:

- Pin short-circuited to ground (see [Table 4-2](#))
- Pin open-circuited (see [Table 4-3](#))
- Pin short-circuited to an adjacent pin (see [Table 4-4](#))
- Pin short-circuited to supply (see [Table 4-5](#) and [Table 4-6](#))

[Table 4-2](#) through [Table 4-6](#) also indicate how these pin conditions can affect the device as per the failure effects classification in [Table 4-1](#).

Table 4-1. TI Classification of Failure Effects

Class	Failure Effects
A	Potential device damage that affects functionality
B	No device damage, but loss of functionality
C	No device damage, but performance degradation
D	No device damage, no impact to functionality or performance

4.1 TSSOP Package

Figure 4-1 shows the SN74AVC4T245-Q1 pin diagram for the TSSOP package. For a detailed description of the device pins, see the *Pin Configuration and Functions* section in the SN74AVC4T245-Q1 data sheet.

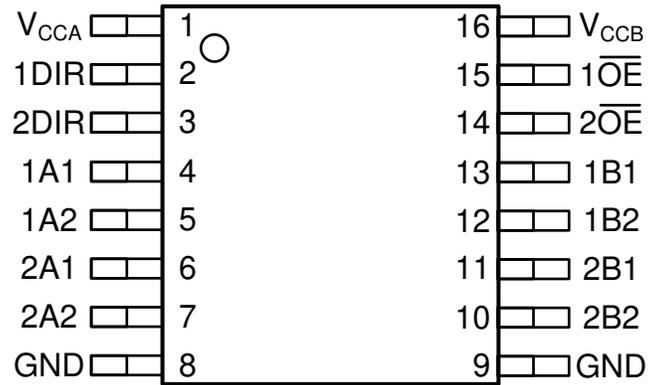


Figure 4-1. Pin Diagram (TSSOP) Package

4.2 WQFN Package

Figure 4-2 shows the SN74AVC4T245-Q1 pin diagram for the WQFN package. For a detailed description of the device pins, see the *Pin Configuration and Functions* section in the SN74AVC4T245-Q1 data sheet.

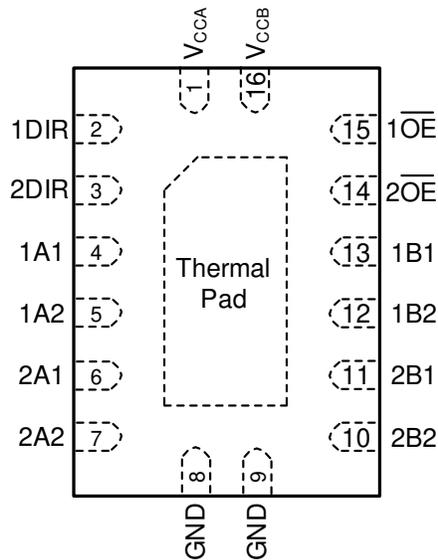


Figure 4-2. Pin Diagram (WQFN Package)

4.3 UQFN Package

Figure 4-3 shows the SN74AVC4T245-Q1 pin diagram for the UQFN package. For a detailed description of the device pins, see the *Pin Configuration and Functions* section in the SN74AVC4T245-Q1 data sheet.

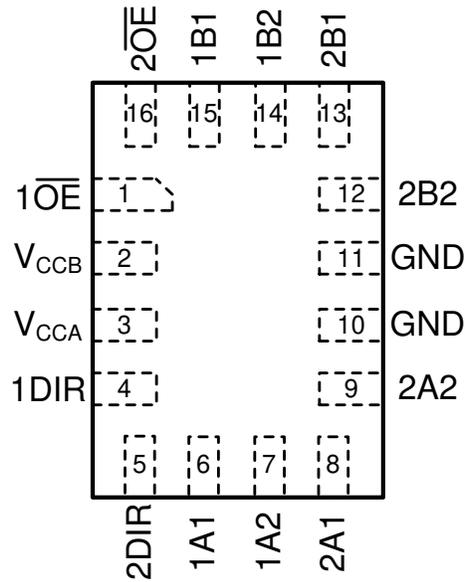


Figure 4-3. Pin Diagram (UQFN) Package

Table 4-2. Pin FMA for Device Pins Short-Circuited to Ground

Pin Name	Pin No.	Description of Potential Failure Effect(s)	Failure Effect Class
VCCA	1	GND short to VCC, device will be bypassed; may cause system damage, but not damage to the device.	B
DIR	2-3	Direction control will fix B --> A direction	B
1A1 - 2A2	4- 7	If configured as an output then damage is possible. If configured as input, damage does not occur, but output will not switch	A
GND	8 - 9	Normal operation	D
2B2 - 1B1	10 - 13	If configured as an output then damage is possible. If configured as input, damage does not occur, but output will not switch.	A
OE (active low)	14-15	Outputs will remain enabled	B
VCCB	16	GND short to VCC, device will be bypassed; may cause system damage, but not damage to the device.	B

Table 4-3. Pin FMA for Device Pins Open-Circuited

Pin Name	Pin No.	Description of Potential Failure Effect(s)	Failure Effect Class
VCCA	1	Device will not be powered	B
DIR	2-3	Pin is floating which can cause excessive current	A
1A1 - 2A2	4- 7	If configured as output, normal operation. If configured as input, damage does not occur, but output will not switch	B
GND	8 - 9	Device will not be powered	B
2B2 - 1B1	10 - 13	If configured as output, normal operation. If configured as input, damage does not occur, but output will not switch.	B
OE (active low)	14-15	Outputs will remain enabled	B
VCCB	16	Device will not be powered	B

Table 4-4. Pin FMA for Device Pins Short-Circuited to Adjacent Pin

Pin Name	Pin No.	Shorted to	Description of Potential Failure Effect(s)	Failure Effect Class
VCCA	1	DIR1	Direction control will fix A --> B direction	B
1DIR	2-3	DIR2	If both HIGH, direction control will fix A --> B direction. If both LOW, direction control will fix B --> A direction. If one DIR is HIGH and the other is LOW, bus contention during transitions can occur and may cause high current	A
1A1	4 - 5	1A2	If 1A1 and 1A2 are configured as outputs then damage is possible. If configured as inputs, both bits will always have the same value.	A
2A1	6-7	2A2	If 2A1 and 2A2 are configured as outputs then damage is possible. If configured as inputs, both bits will have the same value.	A
GND	8 - 9	GND	Normal operation	D
GND	9-10	2B2	If 2B2 is configured as an output then damage is possible. If configured as input, output 2A2 will be fixed LOW	A
2B2 or 2B1	10 - 13	1B2 or 1B1	If 2B2, 2B1, 1B2 and 1B1 are configured as outputs, then damage is possible. If configured as inputs, both shorted bits will always have the same value.	A
1B1	13-14	2OE (active low)	If 1B1 is configured as an output, then damage is possible. If configured as input, no damage, but output 1A1 will remain HIGH or LOW dependent on 2OE (active low)	A
2OE (active low)	14-15	1OE (active low)	If 2OE and 1OE are configured as HIGH and LOW damage is possible. If configured as HIGH or LOW, both bits will always have the same value.	A
1OE (active low)	24	VCCA	All associated outputs will be inactive and cannot be enabled.	B

Table 4-5. Pin FMA for Device Pins Short-Circuited to VCCA

Pin Name	Pin No.	Description of Potential Failure Effect(s)	Failure Effect Class
VCCA	1	Normal operation	D
DIR	2-3	Direction control will fix A --> B direction	B
1A1 - 2A2	4- 7	If configured as an output, then damage is possible. If configured as an input, damage does not occur, but output will not switch	A
GND	8 - 9	GND short to VCC, device will be bypassed; may cause system damage, but	B
2B2 - 1B1	10 - 13	If configured as an output then damage is possible. If configured as input, damage is possible if VIH/VIL not met	A
OE (active low)	14-15	Outputs will remain disabled	B
VCCB	16	VCCA short to VCCB, device will be bypassed - may cause system damage, but not device damage	B

Table 4-6. Pin FMA for Device Pins Short-Circuited to VCCB

Pin Name	Pin No.	Description of Potential Failure Effect(s)	Failure Effect Class
VCCA	1	VCCB short to VCCA, device will be bypassed; may cause system damage, but not damage to the device.	B
DIR	2-3	If VCCA is greater than VCCB, then the direction control will fix B-->A, If VCCA is less than VCCB, damage is possible if VIH/VIL not met	A
1A1 - 2A2	4- 7	If A1 is configured as an output then damage is possible. If configured as input, damage is possible if VIH/VIL is not met	A
GND	8 - 9	GND short to VCC, device will be bypassed; may cause system damage, but not damage to the device.	B
2B2 - 1B1	10 - 13	If B2 is configured as an output then damage is possible. If configured as an input, damage does not occur, but output will not switch	A
OE (active low)	14-15	If VCCA is greater than VCCB, then the outputs will remain disabled, If VCCA is less than VCCB, damage is possible if VIH/VIL is not met	A
VCCB	16	Normal operation	D

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated