

Energy Measurement Results for CTs and Shunts on a TI Designed Meter Using MSP430AFE2xx Devices

Kripasagar Venkat and Mekre Mesganaw

ABSTRACT

This application report describes the results obtained on a single phase electronic electricity meter using the Texas Instruments MSP430AFE2xx metering processors. These tests are indicative of the performance of a meter designed by Texas Instruments and is subject to differ based on sensor selection, board layouts and other design considerations. The results include energy accuracies for active and reactive energy for 50 mA to 100A, a dynamic range of 2000:1.

WARNING

Failure to adhere to these steps or not heed the safety requirements at each step may lead to shock, injury, and damage to the hardware. Texas Instruments is not responsible or liable in any way for shock, injury, or damage caused due to negligence or failure to heed advice.

Contents

1	Sensors	1
2	Current Transformer Results	3
3	Shunt Results	4

List of Figures

1	Analog Front End for Voltage Inputs	2
2	Analog Front End for Current Inputs	2

List of Tables

1	CT Results for Active and Reactive Energy Error	3
2	400 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error	4
3	200 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error	5
4	100 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error	6

1 Sensors

Any metering application requires that the sensors to be selected up front, depending on the accuracies required and the current ranges. In this document, current transformers (CT) and shunt resistors were selected as part of the testing. The current transformer selected is rated for 100A with a turns-ratio of 2000:1 and the shunt resistors selected are 100 $\mu\Omega$, 200 $\mu\Omega$ and 400 $\mu\Omega$.

1.1 Voltage Inputs

The voltage from the mains is usually 230 V or 110 V and needs to be brought down to a range of 500 mV. The analog front end for voltage consists of spike protection varistors (not shown) followed by a simple voltage divider and a RC low-pass filter that acts like an anti-alias filter.

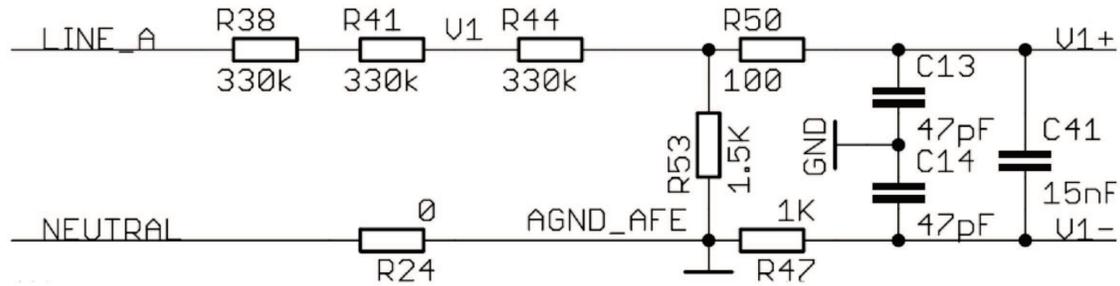


Figure 1. Analog Front End for Voltage Inputs

1.2 Current Inputs

The analog front end for current inputs is a little different from the analog front end for the voltage inputs. Figure 2 shows the analog front end used for current channel I1 and I2.

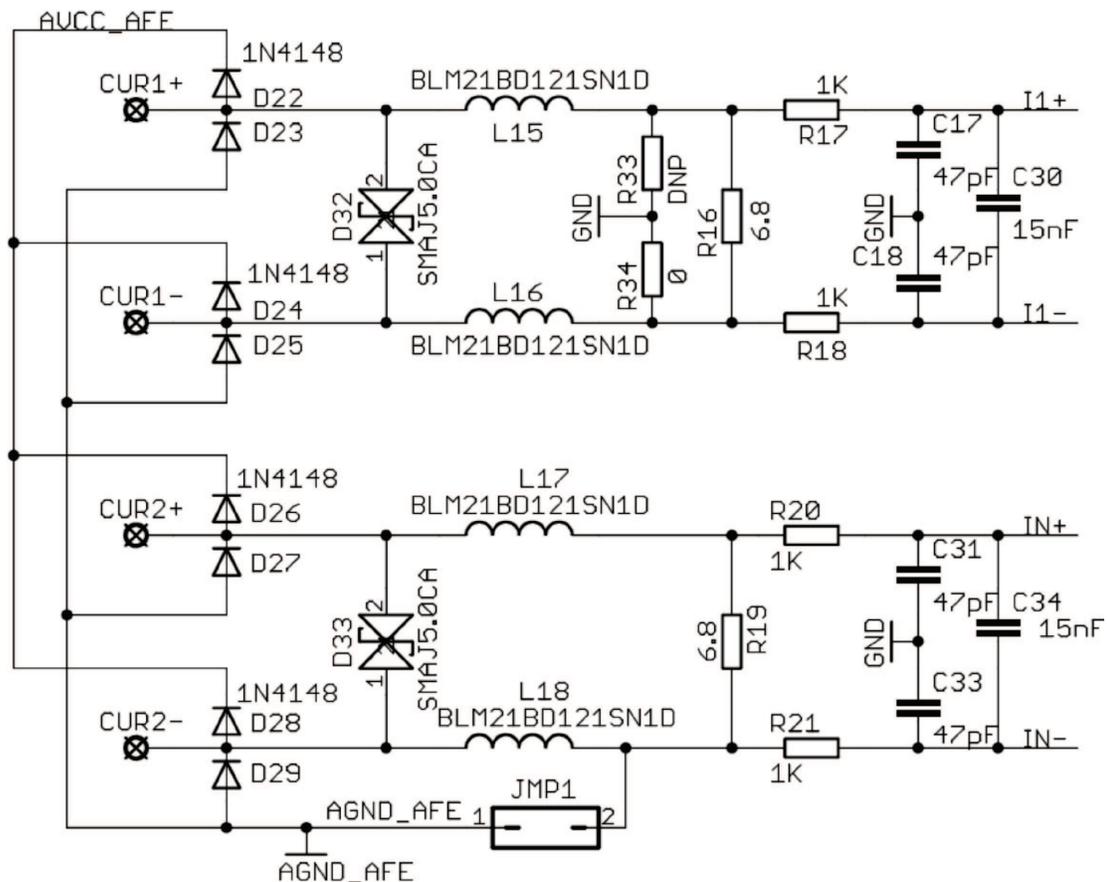


Figure 2. Analog Front End for Current Inputs

Resistor R16 is the burden resistor that would be selected based on the current range used and the turns-ratio specification of the CT (not required for shunt). The value of the burden resistor for this design is around 6.8 Ω . The anti-aliasing circuitry consisting of R and C follows the burden resistor. The input signal to the converter is a fully differential input with a voltage swing of ± 500 mV maximum with gain of the converter set to 1. Similar to the voltage channels, the common mode voltage is selectable to either analog ground (AGND_AFE) or internal reference. If a shunt resistor is used, you can place it between CUR1+ and CUR1- pins of the EVM. Note that the burden resistor can still exist for this condition and will not affect performance.

2 Current Transformer Results

The results obtained by the Current transformer are shown in this section. The gain selected on both the voltage and the current $\Sigma\Delta$ converter is 1.

Table 1. CT Results for Active and Reactive Energy Error ⁽¹⁾

Current	Active for CT			Reactive for CT	
	0 Deg (% error)	60 Deg (% error)	-60 Deg (% error)	60 Deg (% error)	-60 Deg (% error)
0.05	-0.045	-0.051	-0.16	-0.247	0.148
0.1	-0.025	-0.013	-0.118	-0.185	0.099
0.25	0.016	0.048	-0.045	0.019	0.083
0.5	0.029	0.067	-0.013	0.058	0.074
1	0.032	0.0077	0.01	0.08	0.061
2	0.016	0.067	-0.009	0.083	0.055
5	0.026	0.045	0.032	0.055	0.083
10	0.005	0.012	0.049	0.003	0.008
20	-0.021	-0.043	0.053	-0.0073	-0.014
30	-0.021	-0.053	0.075	-0.0107	-0.019
40	-0.043	-0.064	0.053	0.00037	-0.0557
50	-0.032	-0.075	0.086	0.0177	-0.0497
70	-0.053	-0.17	0.107	0.032	-0.0607
80	-0.049	-0.17	0.096	0.0283	-0.039
90	-0.05	-0.18	0.104	0.0393	-0.018
100	-0.051	-0.178	0.102	0.04	-0.03

⁽¹⁾ Performed with a 100A customized CT with a turns ratio of 2000:1.

Results summary:

- Results are measured at room temperature
- Results easily pass <0.1% error in accuracy for active energy measurements
- The results show consistency of the error performance over a dynamic range of 2000:1
- The same results can be achieved for any current ranges as long as they fall under this dynamic range

3 Shunt Results

The results obtained by the shunt resistor are shown in this section. The gain selected on the voltage converter is maintained at 1 and the current $\Sigma\Delta$ converter gain is varied depending on the shunt resistor value chosen.

Case 1: Shunt of 400 $\mu\Omega$

When the shunt value of 400 $\mu\Omega$ is chosen, the gain of the current $\Sigma\Delta$ converter is set to 8. This is line with the adherence to the voltage at the inputs of the $\Sigma\Delta$ converter do not cross 500 mV at the maximum current of 100A. The results for this configuration are shown in [Table 2](#).

Table 2. 400 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error ⁽¹⁾

Current	Active for 400 $\mu\Omega$ Shunt			Reactive for 400 $\mu\Omega$ Shunt	
	Zero Deg (% error)	60 Deg (% error)	-60 Deg (% error)	60 Deg (% error)	-60 Deg (% error)
0.05	0.205	0.237	0.263	-0.217	0.282
0.1	0.08	0.055	-0.004	-0.118	0.093
0.25	0.058	-0.07	0.2	-0.019	0.067
0.5	0.048	-0.09	0.18	0.055	0.055
1	0.0333	0.133	0.069	0.064	0.047
2	0.016	0.081	-0.088	-0.025	0.103
5	0.028	0.0345	0.0267	0.0517	0.0907
10	0.007	-0.02	0.0123	0.0203	0.0593
20	0.0073	-0.0073	-0.0177	0.0107	0.053
30	0.014	0	-0.0073	0.0213	0.064
40	0.0177	0	-0.0073	0.0287	0.075
50	0.0357	0.011	0.0247	0.0497	0.0823
70	0.0567	0.025	0.043	0.0677	0.0927
80	0.075	0.046	0.0603	0.0857	0.114
90	0.0823	0.0567	0.082	0.1073	0.1353
100	0.1033	0.0688	0.107	0.1247	0.1463

⁽¹⁾ Vishay Meter Shunt Resistor WSMS3124 family: <http://www.vishay.com/docs/30173/wsms3124.pdf>

Results summary:

- Results are measured at room temperature
- Results easily pass <0.1% error in accuracy for active energy measurements except for lowest current
- The results show consistency of the error performance over a dynamic range of 2000:1
- The same results can be achieved for any current ranges as long as they fall under this dynamic range

Case 2: Shunt of 200 $\mu\Omega$

When the shunt value of 200 $\mu\Omega$ is chosen, the gain of the current $\Sigma\Delta$ converter is set to 16. This is line with the adherence to the voltage at the inputs of the $\Sigma\Delta$ converter do not cross 500 mV at the maximum current of 100A. The results for this configuration are shown in [Table 3](#).

Table 3. 200 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error ⁽¹⁾

Current	Active for 200 $\mu\Omega$ Shunt			Reactive for 200 $\mu\Omega$ Shunt	
	Zero Deg (% error)	60 Deg (% error)	-60 Deg (% error)	60 Deg (% error)	-60 Deg (% error)
0.05	-0.228	-0.223	-0.273	-0.379	0.397
0.1	-0.143	-0.129	-0.271	-0.366	0.369
0.25	-0.166	-0.107	-0.274	-0.339	0.294
0.5	-0.141	-0.177	-0.119	-0.2425	0.3015
1	-0.0985	0.0655	-0.131	-0.0605	0.0945
2	-0.088	-0.178	-0.0755	-0.1597	0.0547
5	-0.1107	-0.114	-0.148	-0.069	-0.001
10	-0.002	-0.014	-0.005	-0.019	0.0587
20	-0.0213	0.0037	-0.0247	-0.032	0.0533
30	-0.0143	0	-0.021	-0.032	0.051
40	-0.0177	-0.0143	-0.0497	-0.0343	0.0463
50	-0.0463	-0.0393	-0.0283	-0.0247	0.039
70	-0.0643	-0.0783	-0.1347	-0.071	0.021
80	-0.101	-0.149	-0.1527	-0.092	-0.063
90	-0.1273	-0.1277	-0.1987	-0.1773	-0.1027
100	-0.255	-0.195	-0.241	-0.209	-0.1667

⁽¹⁾ Vishay Meter Shunt Resistor WSMS3124 family: <http://www.vishay.com/docs/30173/wsms3124.pdf>

Results summary:

- Results are measured at room temperature
- Results easily pass <0.2% error in accuracy for active energy measurements except for lowest current
- Errors tend to be higher for higher gains of the PGA on the $\Sigma\Delta$ converter
- The results show consistency of the error performance over a dynamic range of 2000:1
- The same results can be achieved for any current ranges as long as they fall under this dynamic range

Case 3: Shunt of 100 $\mu\Omega$

When the shunt value of 100 $\mu\Omega$ is chosen, the gain of the current $\Sigma\Delta$ converter is set to 32. This is line with the adherence to the voltage at the inputs of the $\Sigma\Delta$ converter do not cross 500 mV at the maximum current of 100A. The results for this configuration are shown in Table 4.

Table 4. 100 $\mu\Omega$ Shunt Results for Active and Reactive Energy Error ⁽¹⁾

Current	Active for 100 $\mu\Omega$ Shunt (% error)			Reactive for 100 $\mu\Omega$ Shunt	
	Zero Deg (% error)	60 Deg (% error)	-60 Deg (% error)	60 Deg (% error)	-60 Deg (% error)
0.05	-0.441	-0.362	-0.383	-0.326	0.295
0.1	-0.338	-0.308	-0.367	-0.285	0.303
0.25	-0.181	-0.2985	-0.3655	-0.559	0.2915
0.5	-0.061	-0.2285	-0.228	-0.273	0.243
1	-0.039	-0.0453	-0.005	-0.182	0.143
2	-0.012	0.0723	-0.218	-0.1497	-0.0267
5	0.013	0.127	-0.147	-0.1403	-0.086
10	0.014	0.1593	-0.1513	0.008	0.0633
20	-0.0073	0.1813	-0.1707	-0.0107	0.0533
30	-0.0107	0.146	-0.202	-0.0107	0.032
40	-0.057	0.1247	-0.223	-0.039	0.0213
50	-0.0533	0.0927	0.0787	-0.043	-0.0143
70	-0.1913	-0.3433	-0.305	-0.142	-0.0603
80	-0.2517	-0.1277	-0.4093	-0.181	-0.1843
90	-0.4457	-0.2413	-0.448	-0.333	-0.2377
100	-0.499	-0.361	-0.693	-0.4247	-0.4143

⁽¹⁾ Vishay Meter Shunt Resistor WSMS3124 family: <http://www.vishay.com/docs/30173/wsms3124.pdf>

Results summary:

- Results are measured at room temperature
- Results easily pass <0.5% error in accuracy for active energy measurements except for lowest current
- High current tends to heat the resistor; these thermal effects are prone to show worse results at high temperatures. In most cases, these are outliers.
- Errors tend to be worse for PGA gain of 32 on the $\Sigma\Delta$ converter
- The results show consistency of the error performance over a dynamic range of 2000:1
- The same results can be achieved for any current ranges as long as they fall under this dynamic range

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community e2e.ti.com