

Using Space Grade Power Components to Power AMD Kintex XQRKU060 FPGA



Kenneth Matthews

ABSTRACT

This application note provides a recommended space rated power design for the AMD® Kintex® UltraScale™ XQRKU060 FPGA. The report outlines recommendations for the individual power rails and the benefits of rad-hard (-SP) and rad-tolerant (-SEP) devices. Then, example power block diagrams are provided for each of the different power design variations to include both 5 V and 12 V inputs.

Table of Contents

1 Introduction	2
2 Space Qualification Flow Overview	2
3 Space Rated Power Devices	3
4 Example Power Maps	4
4.1 Rad-Hard Power for XQRKU060.....	4
4.2 Rad-Tolerant Power for XQRKU060.....	5
5 Conclusion	5
6 References	5

List of Figures

Figure 4-1. Rad-Hard Power for XQRKU060.....	4
Figure 4-2. Rad-Tolerant Power for XQRKU060.....	5

List of Tables

Table 2-1. Space Enhanced Plastic and QMLV-RHA.....	2
Table 3-1. Selection Guide for Space Grade Power Management.....	3

Trademarks

UltraScale™ is a trademark of Xilinx.
AMD® is a registered trademark of AMD.
Kintex® is a registered trademark of Xilinx.
All trademarks are the property of their respective owners.

1 Introduction

Architectural advancements continue to be developed in FPGAs with the growing need for more on-board processing and the ability to program in space applications. As such, AMD's XQRKU060 FPGA have seen a wide use in different satellite payloads. As new FPGAs are developed, the power requirements have continued to evolve requiring the need for higher currents, and lower voltages. The designs that power the XQRKU060 must be able to meet these increased requirements and be resilient to withstand the harsh environment of space.

This application note reviews two product grades TI offers with proven radiation performance and provides a selection guide for comparing the different power management devices within each flow. The report also covers the value the space grade power management portfolio brings to the overall system, and provides example power maps for both rad-hard and rad-tolerant implementations.

2 Space Qualification Flow Overview

TI has a long history supporting the space industry by providing hermetically sealed QMLV (Qualified Manufacturer List, Class V) and RHA (Radiation Hardness Assured) components all in accordance with the MIL-PRF-38535 specification. In addition to the qualification standard, these devices are typically supported with extensive Total Ionizing Dose (TID) and Single Event Effects (SEE) radiation reports that are readily available in the product folder for each device. TI continues to support the highest-reliability space applications with ongoing and new development in hermetically sealed QMLV devices.

However, with the reduction in launch costs and stricter budgets, this has resulted in a different approach to satellite manufacturing for new commercial and government applications. To provide a design, TI has provided more cost-effective and smaller designs through a growing portfolio of devices in rad-tolerant Space Enhanced Plastic (denoted by -SEP) to meet the reduced assurance requirements for LEO and MEO constellations. [Table 2-1](#) provides an overview between the differences of Space Enhanced Plastic and QMLV-RHA. For more information on TI's rad-tolerant flow, see how to [Reduce the Risk in Low-Earth Orbit Missions with Space Enhanced Plastic Products](#).

Table 2-1. Space Enhanced Plastic and QMLV-RHA

	Rad-tolerant (-SEP)	Rad-hard (-SP)
Packaging	Plastic	Ceramic-Hermetic
Single Controlled Baseline	Yes	Yes
Meets DLA spec for less than 2% Sn	Au	Al
Production Burn-in	No	Yes
Typical Temperature Range	-55°C - 125°C	-55°C - 125°C
Radiation: TID Characterization	30 to 50 krad(Si)	100 krad(Si)
Radiation Lot Acceptance Testing (RLAT)	20, 30 or 50 krad(Si)	100 krad(Si)
Radiation: SEE Characterization	43MeV-cm ² /mg	75MeV-cm ² /mg
Outgassing tested per ASTM E595	Yes	N/A
Lot Level Temp Cycle	Yes	Yes
Per tube, tray or reel single lot date code	Yes	Yes
Life Test Per Wafer Lot	No	Yes

3 Space Rated Power Devices

TI's portfolio of leading power density ICs is capable of providing a full power management design through a selection of buck converters, LDOs, DDR termination regulators, PWM controllers, and gate drivers as shown in [Table 3-1](#).

The TPS7H4001-SP and TPS7H4003-SEP are high current (18 A) buck converters with integrated FETs and the key feature of being able to parallel up to 4 devices 90 degrees out of phase without the need for external clocking meant to meet the increasing need for higher current on the core rail. The 0.6 V reference allows them to meet the low voltage requirement typically seen for this rail. The TPS50601A-SP is a smaller 6 A highly efficient buck converter with over a decade in flight heritage used to power many of the auxiliary rails. The footprint compatible TPS7H4002-SP can also be used for powering auxiliary rails as it is architecturally very similar to the TPS50601A-SP with a lower current limit for smaller inductor sizing. For a similar 6 A rad-tolerant design, the TPS7H4010-SEP provides an extremely compact design in a 4x6 mm WQFN package and is the widest V_{in} space grade switching regulator at 32 V_{in} .

The RHA buck converters are limited to a 7 V_{in} recommended operating condition. If a designer needs to accommodate a higher input voltage, the TPS7H5001-SP or TPS7H5005-SEP PWM controller can be used to build a discrete buck converter. This highly flexible controller paired with a gate driver is capable of working with both Si and GaN FETs to be used as a first stage conversion or in a high efficient GaN supply that powers the core rail directly. The 0.6 V reference with +0.7%/-1.0% reference accuracy provides a very tight tolerance to meet the core voltage. To pair with the controller, the TPS7H6003-SP is a half-bridge gate driver to drive eGaN FETs. This driver has integrated LDOs with 5 V output on the low-side and high-side to properly control the gate drive voltage and added input interlock protection to protect against shoot-through events for a highly reliable design.

For noise sensitive rails, TI can provide a number of low-dropout regulators. The TPS7H1101A-SP offers the most integrated design with enable, configurable soft-start, and power good for power sequencing as well as added protective features like current foldback protection. For a rad-tolerant alternative, the TPS73801-SEP provides an extremely versatile LDO to be used across the wide input range (2.2 - 20 V_{in}) all in a small plastic 6.5 x 3.5 mm SOT package. The [TPS7H1111-SP](#) and [TPS7H1111-SEP](#) can be used as alternatives for applications needing high PSRR and noise performance.

Lastly, for powering DDR memory, the TPS7H3301-SP or TPS7H3302-SEP is a linear design with the capability to sink and source current and able to power DDR1, DDR2, DDR3, DDR3L, and DDR4. The links in [Table 3-1](#) direct you to the product page of each device for more product specific information.

Table 3-1. Selection Guide for Space Grade Power Management

	Function	V_{in} Range (V)	Lowest V_{out} (V)	I_{out} (A)
TPS50601A-SP	Buck Converter	3 - 7	0.8	6
TPS7H4002-SP	Buck Converter	3 - 7	0.8	3
TPS7H4001-SP	Buck Converter	3 - 7	0.6	18
TPS7H1101A-SP	LDO	1.5 - 7	0.8	3
TPS7H3301-SP	DDR Termination Regulator	2.3 - 3.5	0.5 (VTT)	3
TPS7H5001-SP	PWM Controller	Scalable	0.6	Scalable
TPS7H6003-SP	GaN half-bridge driver	Scalable	-	-
TPS7H4010-SEP	Buck Converter	3.5 - 32	1	6
TPS7H4003-SEP	Buck Converter	3 - 7	0.6	18
TPS73801-SEP	LDO	2.2 - 20	1.21	1
TPS7H3302-SEP	DDR Termination Regulator	2.3 - 3.5	0.5 (VTT)	3
TPS7H5005-SEP	PWM Controller	Scalable	0.6	Scalable

For more detailed information in meeting DC and AC regulation requirements, see the following white paper: [Powering a New Era of High-Performance Space-Grade Xilinx FPGAs](#).

4 Example Power Maps

The following sections provide two example power maps. One section with rad-hard hermetically sealed devices for traditional space, and one section with space enhanced plastic devices for new space applications.

4.1 Rad-Hard Power for XQRKU060

Figure 4-1 shows an example power map for a power management design capable of meeting 100 krad(Si) in TID performance and DSEE immune to 75MeV-cm²/mg.

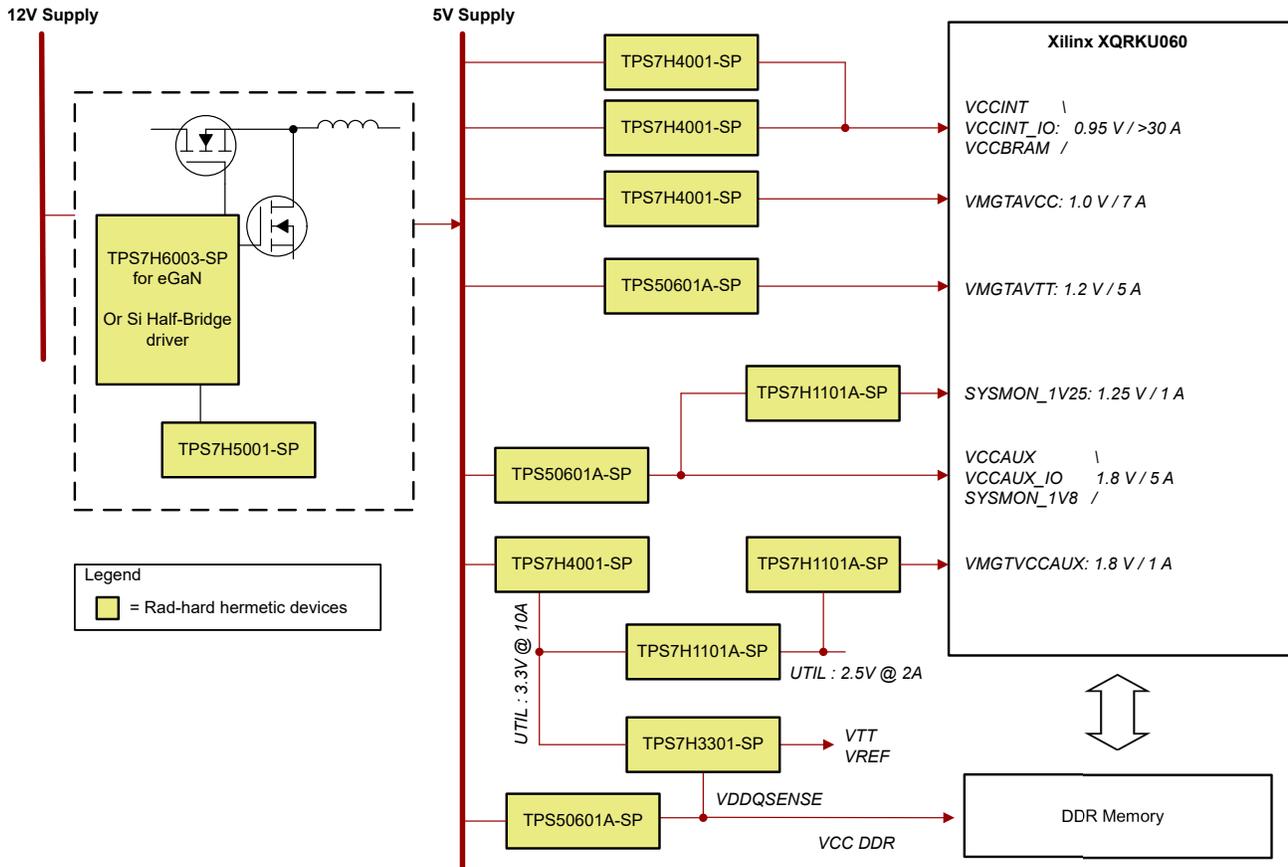


Figure 4-1. Rad-Hard Power for XQRKU060

4.2 Rad-Tolerant Power for XQRKU060

Figure 4-2 shows an example power map for a power management design capable of meeting 30 krad(Si) in TID performance and DSEE immune to 43MeV-cm²/mg.

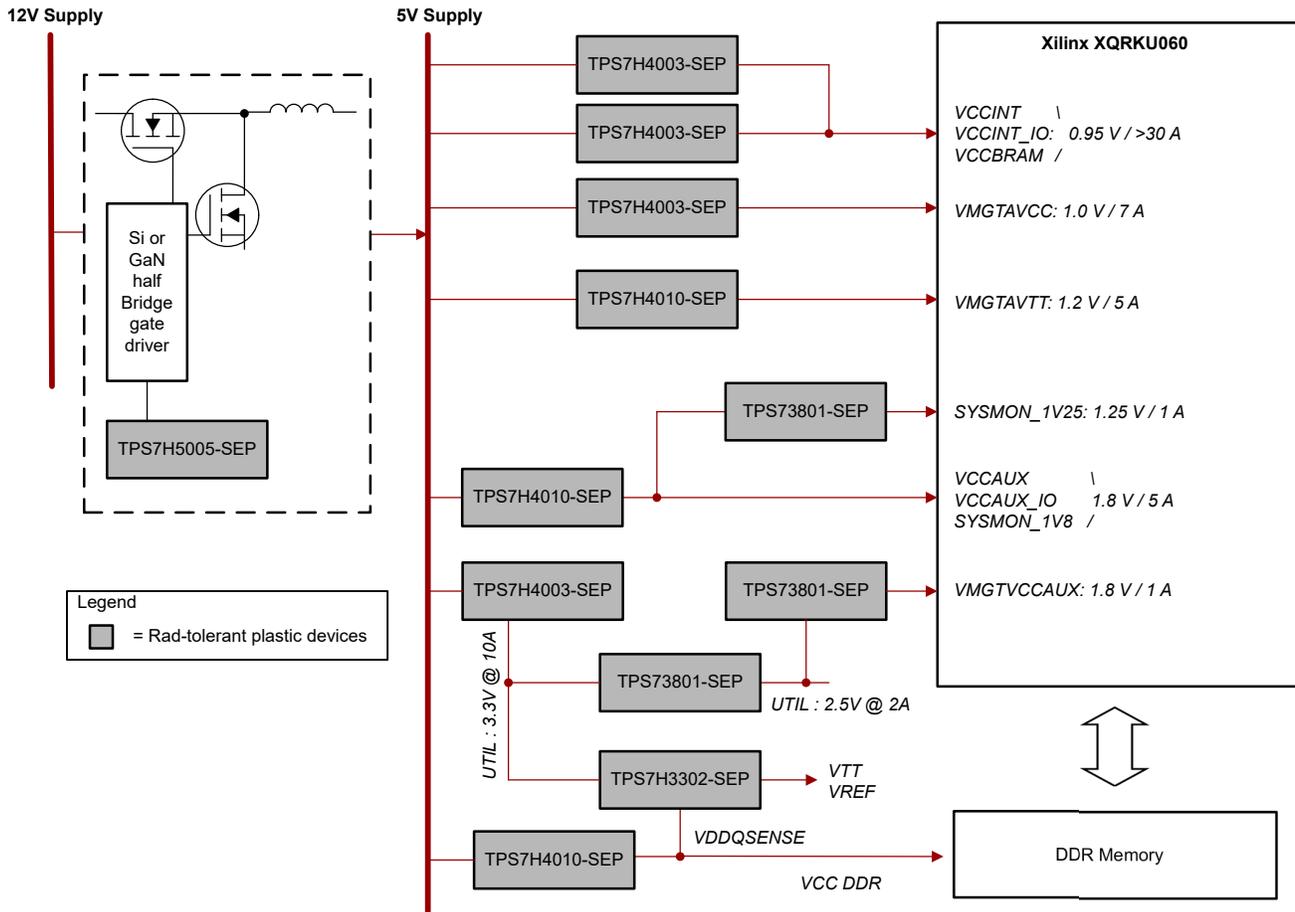


Figure 4-2. Rad-Tolerant Power for XQRKU060

5 Conclusion

TI space grade power management product offerings provides a full board design for powering the AMD Kintex XQRKU060. Two different space qualification flows are offered to support a dynamic range of varying mission assurance profiles. With easily accessible radiation reports and a robust set of documentation and design tools, designers need to feel confident in designing a robust and reliable power supply. Using space grade ICs with proven data can help reduce mission risk and enable faster time to market, in addition to the technical benefits the power management portfolio provides.

6 References

- Texas Instruments, [Reduce the Risk in Low-Earth Orbit Missions with Space Enhanced Plastic Products.](#), application note.
- Advanced Micro Devices, [Radiation Tolerant Kintex UltraScale XQRKU060 FPGA](#), data sheet.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2023, Texas Instruments Incorporated