


OPAx205 4 μ V、0.08 μ V/°C、低消費電力、スーパー・ベータ、バイポーラ e-trim[™] オペアンプ

1 特長

- e-trim[™] オペアンプの性能
 - 低いオフセット電圧: 25 μ V (最大値)、15 μ V (最大値、高グレード)
 - 低いオフセット電圧ドリフト: $\pm 0.5\mu$ V/°C (標準値)、 $\pm 0.2\mu$ V/°C (最大値、高グレード)
- スーパー・ベータ入力
 - 入力バイアス電流: 500pA (最大値)
 - 入力電流ノイズ: 110fA/ $\sqrt{\text{Hz}}$
- 低ノイズ
 - 0.1~10Hz: 0.2 μ V_{PP}
 - 電圧ノイズ: 7.2nV/ $\sqrt{\text{Hz}}$
- A_{OL}、CMRR、PSRR: 126dB 超 (全温度範囲)
- ゲイン帯域幅積: 3.6MHz
- 低い静止電流: 240 μ A (最大値)
- スルーレート: 4V/ μ s
- 過負荷電力制限
- レール・ツー・レール出力
- EMI および RFI フィルタ入力
- 広い電源範囲: 4.5V~36V
- 温度範囲: -40°C~+125°C
- 標準グレード (OPAx205A) および高グレード (OPA2205、プレビュー) で供給
- OPA206 と OPA2206 は ± 40 V の過電圧保護機能を備えています

2 アプリケーション

- 流量トランスミッタ
- ストリング・インバータ
- データ・アキュイジション (DAQ)
- ソース・メジャー・ユニット (SMU)
- 実験室およびフィールド計測
- バッテリー試験装置
- アナログ入力モジュール
- 圧力トランスミッタ



OPAx205 のオフセット電圧ドリフト

3 概要

OPA205、OPA2205、OPA4205 (OPAx205) は、業界標準の OPAx277 ファミリの次世代製品です。OPA206 および OPA2206 は、同じオペアンプ・コアを持つ関連デバイスですが、電源電圧を ± 40 V 超過する入力過電圧保護の追加機能を備えています。これらのデバイスは、スーパー・ベータ入力を備えた高精度バイポーラ e-trim[™] オペアンプです。テキサス・インスツルメンツ独自のトリミング技術は、 $\pm 4\mu$ V ($\pm 2\mu$ V、高グレード) の標準的な入力オフセット電圧と、 $\pm 0.08\mu$ V ($\pm 0.04\mu$ V、高グレード) の標準的な入力オフセット電圧ドリフトを実現するために使用されています。


バイポーラ・プロセスで設計された OPAx205 は、わずか 220 μ A の静止電流に対して 3.6MHz のゲイン帯域幅を備えています。このデバイスは、1kHz においてわずか 7.2nV/ $\sqrt{\text{Hz}}$ という低電圧ノイズ密度も達成しています。スーパー・ベータ入力により、OPAx205 は、100pA (標準値) の非常に小さい入力バイアス電流と 110fA/ $\sqrt{\text{Hz}}$ の電流ノイズ密度を実現しています。

高い性能を備えた OPAx205 は、流量および圧力トランスミッタ、携帯型データ・アキュイジション (DAQ) システム、高密度ソース・メジャー・ユニット (SMU) など、高精度と低消費電力を必要とするシステムに最適です。

製品情報

部品番号	チャネル	パッケージ ⁽¹⁾
OPA205	シングル	D (SOIC, 8)
OPA2205 ⁽²⁾	デュアル	D (SOIC, 8)
	デュアル	DGK (VSSOP, 8)
OPA4205	クワッド	D (SOIC, 14)
	クワッド	PW (TSSOP, 14)

- 利用可能なパッケージについては、データシートの末尾にあるパッケージ・オプションについての付録を参照してください。
- 高グレード・バージョンは、プレビューです (量産データではありません)。

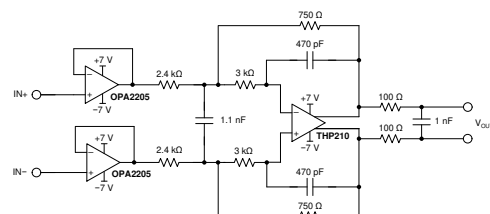

OPA2205 の代表的なアプリケーション



Table of Contents

1 特長	1	8.2 Functional Block Diagram	22
2 アプリケーション	1	8.3 Feature Description	23
3 概要	1	8.4 Device Functional Modes	24
4 Revision History	2	9 Application and Implementation	25
5 Pin Configuration and Functions	4	9.1 Application Information.....	25
6 Specifications	6	9.2 Typical Applications.....	25
6.1 Absolute Maximum Ratings.....	6	9.3 Power Supply Recommendations.....	28
6.2 ESD Ratings.....	6	9.4 Layout.....	28
6.3 Recommended Operating Conditions.....	6	10 Device and Documentation Support	30
6.4 Thermal Information: OPA205.....	7	10.1 Device Support.....	30
6.5 Thermal Information: OPA2205.....	7	10.2 ドキュメントのサポート.....	30
6.6 Thermal Information: OPA4205.....	7	10.3 ドキュメントの更新通知を受け取る方法.....	30
6.7 Electrical Characteristics: $V_S = \pm 5\text{ V}$	8	10.4 サポート・リソース.....	30
6.8 Electrical Characteristics: $V_S = \pm 15\text{ V}$	10	10.5 Trademarks.....	30
6.9 Typical Characteristics.....	12	10.6 静電気放電に関する注意事項.....	30
7 Parameter Measurement Information	21	10.7 用語集.....	30
7.1 Typical Specifications and Distributions.....	21	11 Mechanical, Packaging, and Orderable Information	30
8 Detailed Description	22		
8.1 Overview.....	22		

4 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision E (December 2022) to Revision F (March 2023)	Page
• 標準グレードのデバイス仕様に合わせてタイトルを変更.....	1
• OPA2205 D (SOIC, 8) パッケージと関連する内容を量産データとして追加.....	1
• OPA4205 D (SOIC, 14) パッケージと関連する内容を量産データとして追加.....	1
• Changed maximum input bias from $\pm 0.4\text{ nA}$ to $\pm 0.5\text{ nA}$	21
• Changed offset and offset drift values to match standard-grade device specifications in <i>Detailed Design Description</i>	26
• Changed Figure 9-6 to show correct V_{S+} connection	29

Changes from Revision D (September 2022) to Revision E (December 2022)	Page
• OPA4205 TSSOP パッケージと関連する内容を量産データとして追加.....	1
• Changed typical input offset voltage from $8\text{ }\mu\text{V}$ to $4\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	8
• Changed maximum input offset voltage from $50\text{ }\mu\text{V}$ to $25\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	8
• Changed maximum input offset voltage over temperature from $80\text{ }\mu\text{V}$ to $55\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	8
• Changed typical input offset voltage from $8\text{ }\mu\text{V}$ to $4\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	10
• Changed maximum input offset voltage from $50\text{ }\mu\text{V}$ to $25\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	10
• Changed maximum input offset voltage over temperature from $80\text{ }\mu\text{V}$ to $55\text{ }\mu\text{V}$ in <i>Electrical Characteristics</i>	10

Changes from Revision C (July 2022) to Revision D (September 2022)	Page
• OPA205 (SOIC) をプレビューから量産データ (アクティブ) に変更.....	1

Changes from Revision B (August 2021) to Revision C (July 2022)	Page
• OPA205 D (SOIC) パッケージを事前情報 (プレビュー) として追加.....	1

Changes from Revision A (May 2021) to Revision B (August 2021) Page

- Changed Figure 6-22, *Voltage Noise Density vs Frequency*, to show voltage noise density instead of current noise density..... 12
-

Changes from Revision * (April 2020) to Revision A (May 2021) Page

- 文書全体にわたって表、図、相互参照の採番方法を更新..... 1
 - OPA2205 を事前情報 (プレビュー) から量産データ (アクティブ) に変更..... 1
 - Changed both *Electrical Characteristics* tables to show differentiated performance between OPA2205 (high grade) and OPA2205A (standard grade)..... 8
-

5 Pin Configuration and Functions

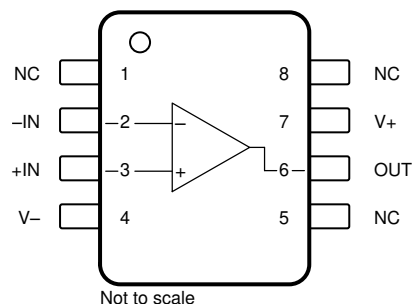


图 5-1. OPA205 D Package, 8-Pin SOIC (Top View)

表 5-1. Pin Functions: OPA205

PIN		TYPE	DESCRIPTION
NAME	NO.		
+IN	3	Input	Noninverting input
-IN	2	Input	Inverting input
NC	1, 5, 8	—	No internal connection (can be left floating)
OUT	6	Output	Output
V+	7	—	Positive (highest) power supply
V-	4	—	Negative (lowest) power supply


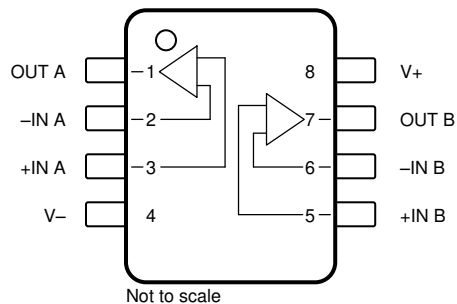


图 5-2. OPA2205 DGK Package, 8-Pin VSSOP and D Package, 8-pin SOIC (Top View)

表 5-2. Pin Functions: OPA2205

PIN		TYPE	DESCRIPTION
NAME	NO.		
+IN A	3	Input	Noninverting input, channel A
-IN A	2	Input	Inverting input, channel A
+IN B	5	Input	Noninverting input, channel B
-IN B	6	Input	Inverting input, channel B
OUT A	1	Output	Output, channel A
OUT B	7	Output	Output, channel B
V+	8	—	Positive (highest) power supply
V-	4	—	Negative (lowest) power supply

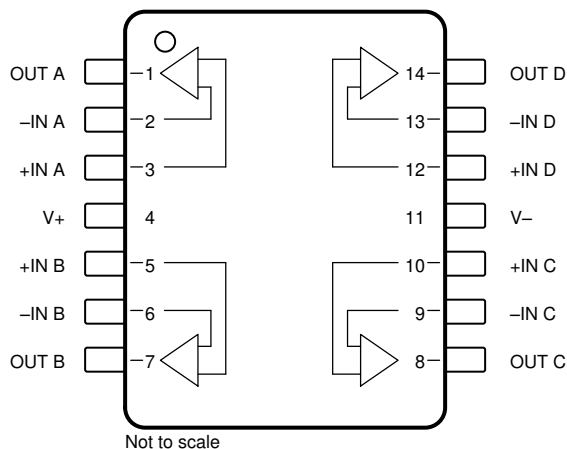

5-3. OPA4205 PW Package, 14-Pin TSSOP and D Package, 14-Pin SOIC (Top View)

Pin Functions: OPA4205

PIN		TYPE	DESCRIPTION
NAME	NO.		
+IN A	3	Input	Noninverting input, channel A
+IN B	5	Input	Noninverting input, channel B
+IN C	10	Input	Noninverting input, channel C
+IN D	12	Input	Noninverting input, channel D
–IN A	2	Input	Inverting input, channel A
–IN B	6	Input	Inverting input, channel B
–IN C	9	Input	Inverting input, channel C
–IN D	13	Input	Inverting input, channel D
OUT A	1	Output	Output, channel A
OUT B	7	Output	Output, channel B
OUT C	8	Output	Output, channel C
OUT D	14	Output	Output, channel D
V+	4	—	Positive (highest) power supply
V–	11	—	Negative (lowest) power supply

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

			MIN	MAX	UNIT
V _S	Supply voltage, V _S = (V ₊) – (V _–)	Single supply		40	V
		Dual supply		±20	
	Signal input pin voltage	Common-mode	(V _–) – 0.5	(V ₊) + 0.5	V
		Differential		±0.5	
	Signal input pin current			±10	mA
	Output short-circuit ⁽²⁾		Continuous		
T _A	Operating temperature		–40	150	°C
T _J	Junction temperature			150	°C
T _{STG}	Storage temperature		–65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) Short-circuit to ground, one amplifier per package.

6.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	±2000	V
		Charged-device model (CDM), per ANSI/ESDA/JEDEC JS-002 ⁽²⁾	±1000	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V _S	Supply voltage, V _S = (V ₊) – (V _–)	Single supply	4.5		36	V
		Dual supply	±2.25		±18	
T _A	Operating temperature		–40		125	°C

6.4 Thermal Information: OPA205

THERMAL METRIC ⁽¹⁾		OPA205		UNIT
		D (SOIC)		
		8 PINS		
R _{θJA}	Junction-to-ambient thermal resistance	121.5		°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	64.3		°C/W
R _{θJB}	Junction-to-board thermal resistance	65.0		°C/W
ψ _{JT}	Junction-to-top characterization parameter	18.2		°C/W
ψ _{JB}	Junction-to-board characterization parameter	64.3		°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A		°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Thermal Information: OPA2205

THERMAL METRIC ⁽¹⁾		OPA2205		UNIT
		D (SOIC)	DGK (VSSOP)	
		8 PINS	8 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	126.9	175.6	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	67.1	63.1	°C/W
R _{θJB}	Junction-to-board thermal resistance	70.3	97.2	°C/W
ψ _{JT}	Junction-to-top characterization parameter	18.8	7.8	°C/W
ψ _{JB}	Junction-to-board characterization parameter	69.5	95.5	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.6 Thermal Information: OPA4205

THERMAL METRIC ⁽¹⁾		OPA4205		UNIT
		D (SOIC)	PW (TSSOP)	
		14 PINS	14 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	86.5	117.1	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	38.5	36.0	°C/W
R _{θJB}	Junction-to-board thermal resistance	43.5	59.3	°C/W
ψ _{JT}	Junction-to-top characterization parameter	7.4	2.6	°C/W
ψ _{JB}	Junction-to-board characterization parameter	42.9	58.3	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	N/A	N/A	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.7 Electrical Characteristics: $V_S = \pm 5\text{ V}$

at $T_A = 25^\circ\text{C}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	OPA2205			±2	±15	μV
			T _A = −40°C to +125°C			±25	
		OPAx205A			±4	±25	
			T _A = −40°C to +125°C			±55	
dV _{OS} /dT	Input offset voltage drift	OPA2205	T _A = −40°C to +125°C		±0.04	±0.2	μV/°C
		OPAx205A	T _A = −40°C to +125°C		±0.08	±0.5	
PSRR	Power supply rejection ratio	OPA2205, V _S = ±2.25 V to ±18 V			±0.05	±0.25	μV/V
			T _A = −40°C to +125°C			±0.5	
		OPAx205A, V _S = ±2.25 V to ±18 V			±0.05	±0.5	
			T _A = −40°C to +125°C			±1	
	Channel separation, (dual, quad)	f = dc			130		dB
		f = 100 kHz			110		
INPUT BIAS CURRENT							
I _B	Input bias current	OPA2205			±0.1	±0.4	nA
			T _A = 0°C to 85°C			±0.6	
			T _A = −40°C to +125°C			±0.9	
		OPAx205A			±0.1	±0.5	
			T _A = 0°C to 85°C			±0.75	
			T _A = −40°C to +125°C			±1	
I _{OS}	Input offset current				±0.1	±0.4	nA
		T _A = 0°C to 85°C				±0.5	
		T _A = −40°C to +125°C				±0.6	
NOISE							
	Input voltage noise	f = 0.1 Hz to 10 Hz			0.2		μV _{PP}
e _n	Input voltage noise density	f = 10 Hz			7.4		nV/√Hz
		f = 100 Hz			7.2		
		f = 1 kHz			7.2		
i _n	Input current noise density	f = 1 kHz			110		fA/√Hz
INPUT VOLTAGE							
V _{CM}	Common-mode voltage			(V−) + 1		(V+) − 1.4	V
CMRR	Common-mode rejection ratio	OPA2205, (V−) + 1 V < V _{CM} < (V+) − 1.4 V, T _A = −40°C to +125°C		124	140		dB
		OPAx205A, (V−) + 1 V < V _{CM} < (V+) − 1.4 V, T _A = −40°C to +125°C		124	140		
INPUT IMPEDANCE							
Z _{ID}	Differential				9 4.4		MΩ pF
Z _{ICM}	Common-mode				300 4.4		GΩ pF

6.7 Electrical Characteristics: $V_S = \pm 5\text{ V}$ (continued)

at $T_A = 25^\circ\text{C}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	OPA2205, T _A = −40°C to +125°C, (V−) + 200 mV < V _O < (V+) − 200 mV	R _L = 10 kΩ	126	132	dB	
			R _L = 2 kΩ	126	130		
		OPAx205A, T _A = −40°C to +125°C, (V−) + 200 mV < V _O < (V+) − 200 mV	R _L = 10 kΩ	126	132		
			R _L = 2 kΩ	126	130		
FREQUENCY RESPONSE							
GBW	Gain-bandwidth product			3.6		MHz	
SR	Slew rate	4-V step, gain = −1		3.2		V/μs	
	Phase margin	R _L = 10 kΩ, C _L = 25 pF		67		degrees	
t _S	Settling time	To 0.024% (12-bit), 4-V step, gain = 1, C _L = 30 pF	Falling	2.2		μs	
			Rising	2.8			
	Overload recovery time	Gain = −10		0.3		μs	
THD+N	Total harmonic distortion + noise	V _O = 5 V _{PP} , gain = +1, f = 1 kHz, R _L = 2 kΩ		0.0004		%	
OUTPUT							
	Voltage output swing from rail	A _{OL} > 126 dB	R _L = 10 kΩ	(V−) + 0.2	(V+) − 0.2	V	
			R _L = 2 kΩ	(V−) + 0.2	(V+) − 0.2		
		T _A = −40°C to +125°C, R _L = 10 kΩ		(V−) + 0.2	(V+) − 0.2		
I _{SC}	Short-circuit current			±25		mA	
C _{LOAD}	Capacitive load drive			See Typical Characteristics			
R _O	Open-loop output impedance			See Typical Characteristics			
POWER SUPPLY							
I _Q	Quiescent current per amplifier	I _O = 0 mA		220	240	μA	
			T _A = −40°C to +125°C		310		

6.8 Electrical Characteristics: $V_S = \pm 15\text{ V}$

at $T_A = 25^\circ\text{C}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage	OPA2205			±2	±15	μV
			T _A = −40°C to +125°C			±25	
		OPAx205A			±4	±25	
			T _A = −40°C to +125°C			±55	
dV _{OS} /dT	Input offset voltage drift	OPA2205	T _A = −40°C to +125°C		±0.04	±0.2	μV/°C
		OPAx205A	T _A = −40°C to +125°C		±0.08	±0.5	
PSRR	Power supply rejection ratio	OPA2205, V _S = ±2.25 V to ±18 V			±0.05	±0.25	μV/V
			T _A = −40°C to +125°C			±0.5	
		OPAx205A, V _S = ±2.25 V to ±18 V			±0.05	±0.5	
			T _A = −40°C to +125°C			±1	
	Channel separation, (dual, quad)	f = dc			130		dB
		f = 100 kHz			110		
INPUT BIAS CURRENT							
I _B	Input bias current	OPA2205			±0.1	±0.4	nA
			T _A = 0°C to 85°C			±0.6	
			T _A = −40°C to +125°C			±0.9	
		OPAx205A			±0.1	±0.5	
			T _A = 0°C to 85°C			±1	
			T _A = −40°C to +125°C			±1.2	
I _{OS}	Input offset current				±0.1	±0.4	nA
		T _A = 0°C to 85°C				±0.8	
		T _A = −40°C to +125°C				±0.9	
NOISE							
	Input voltage noise	f = 0.1 Hz to 10 Hz			0.2		μV _{PP}
e _n	Input voltage noise density	f = 10 Hz			7.4		nV/√Hz
		f = 100 Hz			7.2		
		f = 1 kHz			7.2		
i _n	Input current noise density	f = 1 kHz			110		fA/√Hz
INPUT VOLTAGE							
V _{CM}	Common-mode voltage				(V−) + 1	(V+) − 1.4	V
CMRR	Common-mode rejection ratio	OPA2205, (V−) + 1 V < V _{CM} < (V+) − 1.4 V			126	140	dB
			T _A = −40°C to +125°C			124	
		OPAx205A, (V−) + 1 V < V _{CM} < (V+) − 1.4 V			126	140	
			T _A = −40°C to +125°C			124	
INPUT IMPEDANCE							
Z _{ID}	Differential				9 4.4		MΩ pF
Z _{ICM}	Common-mode				300 4.3		GΩ pF

6.8 Electrical Characteristics: $V_S = \pm 15\text{ V}$ (continued)

at $T_A = 25^\circ\text{C}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ connected to $V_S / 2$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	OPA2205, T _A = −40°C to +125°C	R _L = 10 kΩ, (V−) + 200 mV < V _O < (V+) − 200 mV	132	135	dB	
			R _L = 2 kΩ, (V−) + 350 mV < V _O < (V+) − 350 mV	132	135		
		OPAx205A, T _A = −40°C to +125°C	R _L = 10 kΩ, (V−) + 200 mV < V _O < (V+) − 200 mV	126	132		
			R _L = 2 kΩ, (V−) + 350 mV < V _O < (V+) − 350 mV	126	130		
FREQUENCY RESPONSE							
GBW	Gain-bandwidth product	C _L = 30 pF		3.6		MHz	
SR	Slew rate	10-V step, gain = −1		4		V/μs	
	Phase margin	R _L = 10 kΩ, C _L = 25 pF		58		degrees	
t _s	Settling time	To 0.024% (12-bit), 10-V step, gain = 1, C _L = 30 pF	Falling	2.8		μs	
			Rising	4.5			
	Overload recovery time	Gain = −10		0.2		μs	
THD+N	Total harmonic distortion + noise	V _O = 5 V _{PP} , gain = +1, f = 1 kHz, R _L = 2 kΩ		0.0004		%	
OUTPUT							
	Voltage output swing from rail	A _{OL} > 126 dB	R _L = 10 kΩ	(V−) + 0.2	(V+) − 0.2	V	
			R _L = 2 kΩ	(V−) + 0.35	(V+) − 0.35		
		T _A = −40°C to +125°C, R _L = 10 kΩ		(V−) + 0.2	(V+) − 0.2		
I _{SC}	Short-circuit current			±25		mA	
C _{LOAD}	Capacitive load drive			See Typical Characteristics			
R _O	Open-loop output impedance			See Typical Characteristics			
POWER SUPPLY							
I _Q	Quiescent current per amplifier	I _O = 0 mA		220	240	μA	
			T _A = −40°C to +125°C		310		

6.9 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

表 6-1. Table of Graphs


DESCRIPTION	FIGURE
Offset Voltage Production Distribution at 25°C	图 6-1
Offset Voltage at 125°C	图 6-2
Offset Voltage at -40°C	图 6-3
Offset Voltage vs Temperature	图 6-4
Offset Voltage Drift Distribution	图 6-5
Offset Voltage vs Output Voltage	图 6-6
Offset Voltage vs Power Supply Voltage	图 6-7
Power-Supply Rejection Ratio vs Temperature	图 6-8
Power-Supply and Common-Mode Rejection Ratio vs Frequency	图 6-9
Common-Mode Rejection Ratio vs Temperature	图 6-10
Offset Voltage vs Common-Mode Voltage	图 6-11
Offset Voltage vs V_{CM} at Low Supply	图 6-12
Offset Voltage vs V_{CM} at High Supply	图 6-13
Open-Loop Gain and Phase vs Frequency	图 6-14
Open-Loop Gain vs Swing From the Rail	图 6-15
Open-Loop Gain vs Temperature	图 6-16
Closed-Loop Gain vs Frequency	图 6-17
Input Bias Production Distribution	图 6-18
Input Bias vs Common-Mode Voltage	图 6-19
Input Bias and Input Offset Current vs Temperature	图 6-20
Input Offset Current Production Distribution	图 6-21
Voltage Noise Density vs Frequency	图 6-22
0.1-Hz to 10-Hz Noise	图 6-23
Total Harmonic Distortion + Noise Ratio vs Frequency	图 6-24
Total Harmonic Distortion + Noise Ratio vs Output Amplitude	图 6-25
Current Noise vs Frequency	图 6-26
Maximum Output Voltage vs Frequency	图 6-27
Output Voltage Swing vs Output Sourcing Current	图 6-28
Output Voltage Swing vs Output Sinking Current	图 6-29
Open-Loop Output Impedance vs Frequency	图 6-30
No Phase Reversal	图 6-31
Small-Signal Overshoot vs Capacitive Load, Gain = +1	图 6-32
Small-Signal Overshoot vs Capacitive Load, Gain = -1	图 6-33
Phase Margin vs Capacitive Load	图 6-34
Positive Overload Recovery, Gain = -1	图 6-35
Negative Overload Recovery, Gain = -1	图 6-36
Settling Time	图 6-37
Small-Signal Step Response, Gain = +1	图 6-38
Small-Signal Step Response, Gain = -1	图 6-39
Large-Signal Step Response, Gain = +1	图 6-40
Large-Signal Step Response, Gain = -1	图 6-41
Short-Circuit Current vs Temperature	图 6-42
Electromagnetic Interference Rejection (EMIRR)	图 6-43
Quiescent Current vs Supply Voltage	图 6-44

6.9 Typical Characteristics

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)


表 6-1. Table of Graphs (continued)

DESCRIPTION	FIGURE
Quiescent Current vs Temperature	6-45

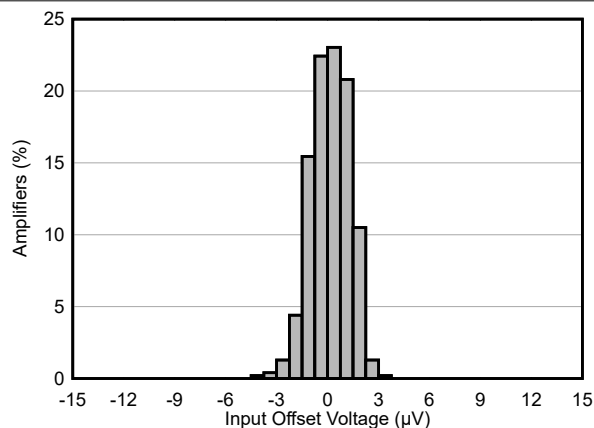


$T_A = 25^\circ\text{C}$

图 6-1. Offset Voltage Production Distribution at 25°C

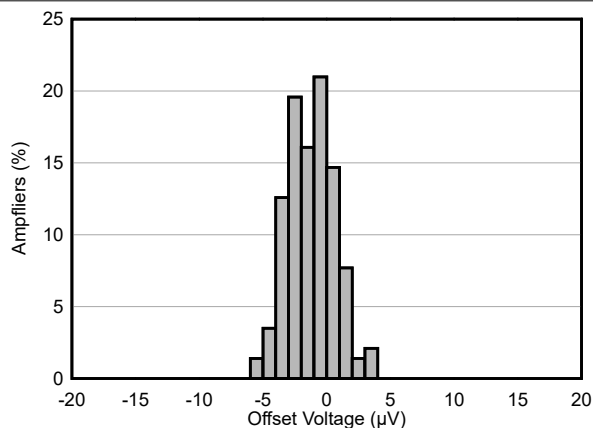

$T_A = 125^\circ\text{C}$

图 6-2. Offset Voltage Distribution at 125°C

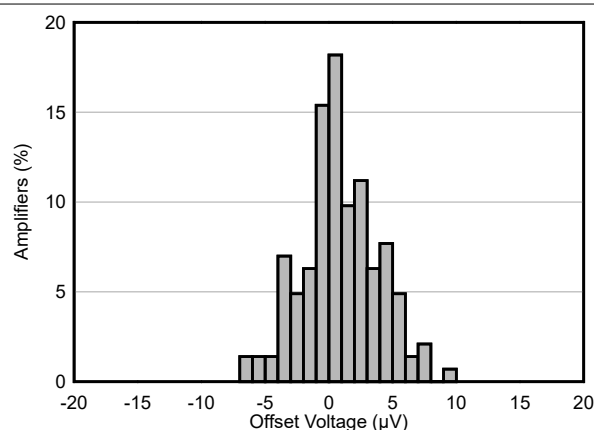

$T_A = -40^\circ\text{C}$

图 6-3. Offset Voltage Distribution at -40°C

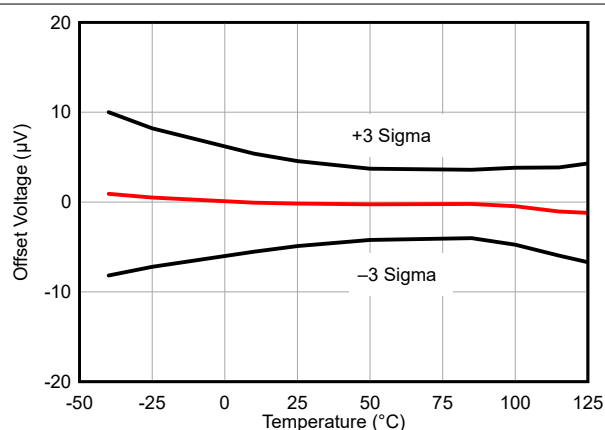


图 6-4. Offset Voltage vs Temperature

6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

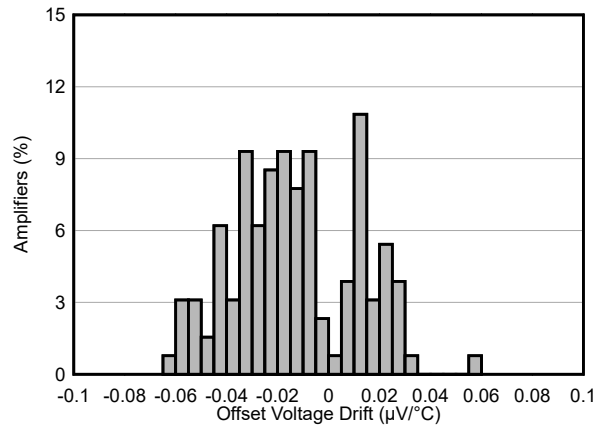


FIG 6-5. Offset Voltage Drift Distribution

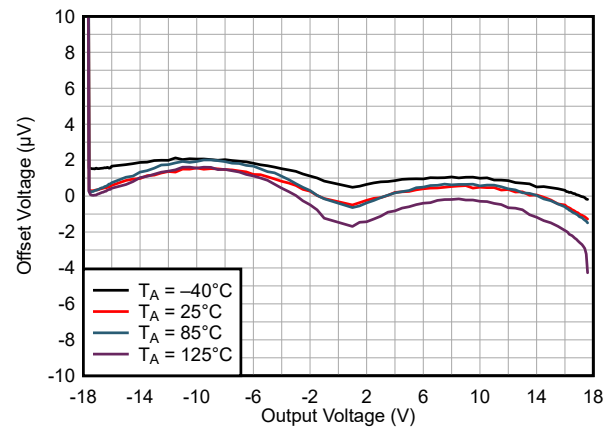


FIG 6-6. Offset Voltage vs Output Voltage

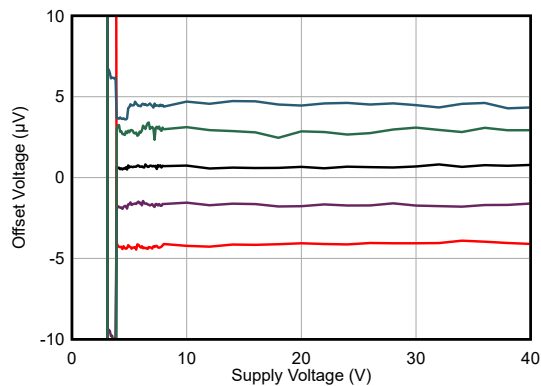


FIG 6-7. Offset Voltage vs Power Supply Voltage

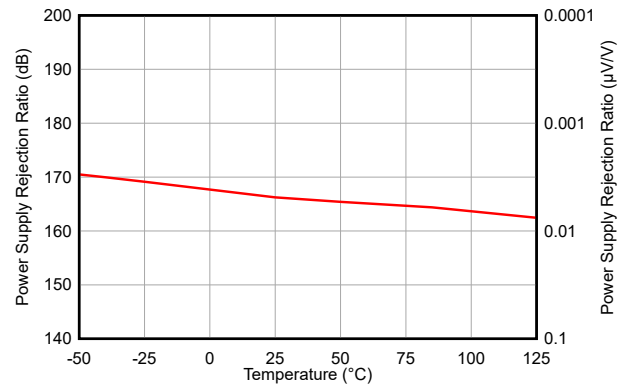


FIG 6-8. Power-Supply Rejection Ratio vs Temperature

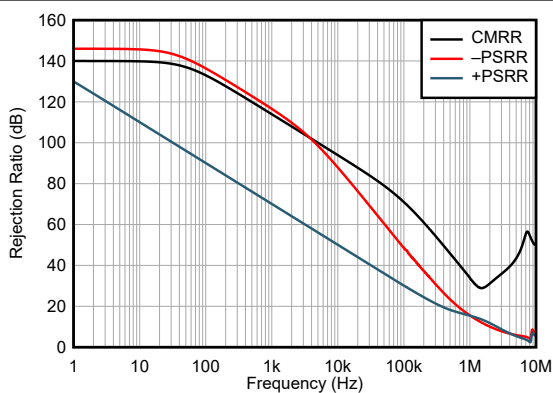


FIG 6-9. Power-Supply and Common-Mode Rejection Ratio vs Frequency

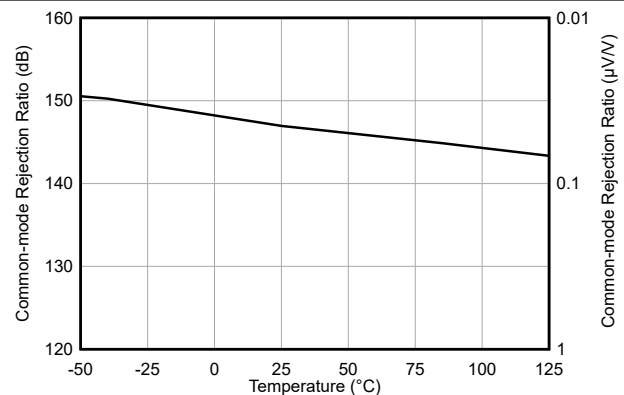


FIG 6-10. Common-Mode Rejection Ratio vs Temperature

6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

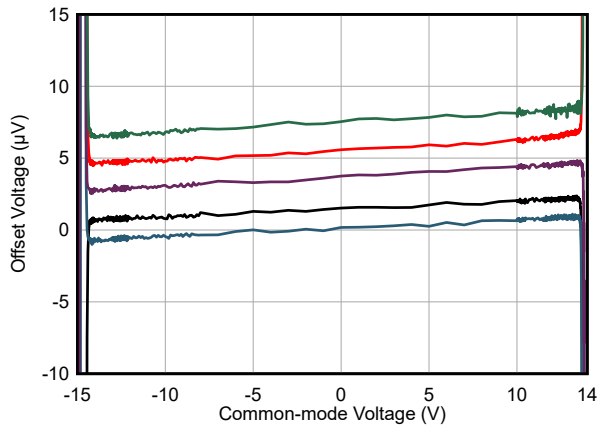


Figure 6-11. Offset Voltage vs Common-Mode Voltage

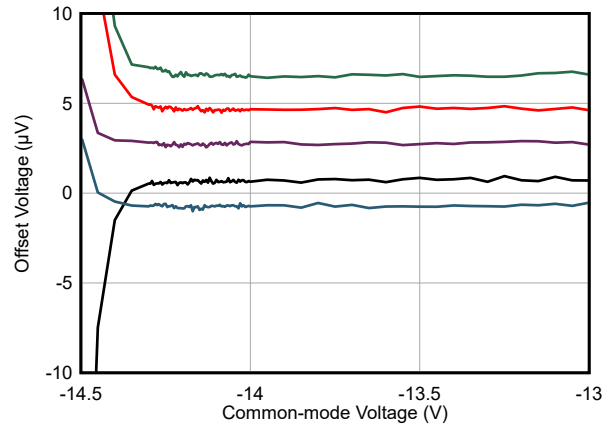


Figure 6-12. Offset Voltage vs V_{CM} at Low Supply

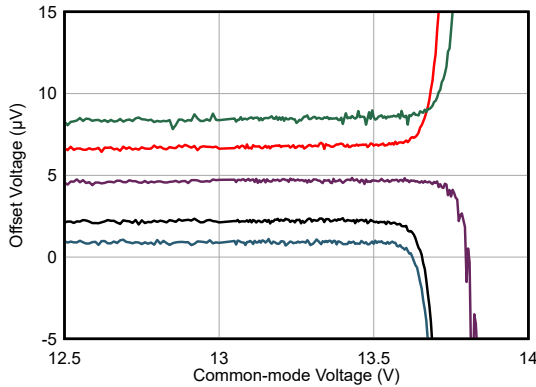


Figure 6-13. Offset Voltage vs V_{CM} at High Supply

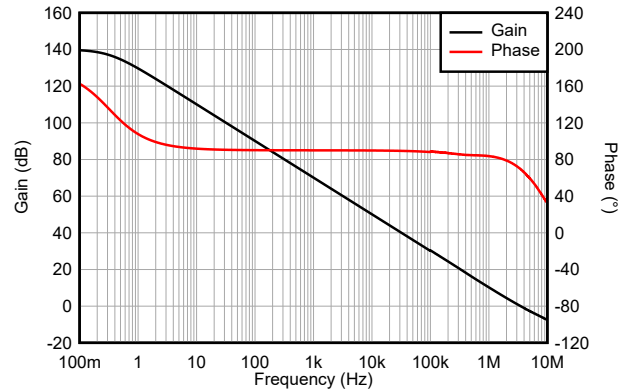


Figure 6-14. Open-Loop Gain and Phase vs Frequency

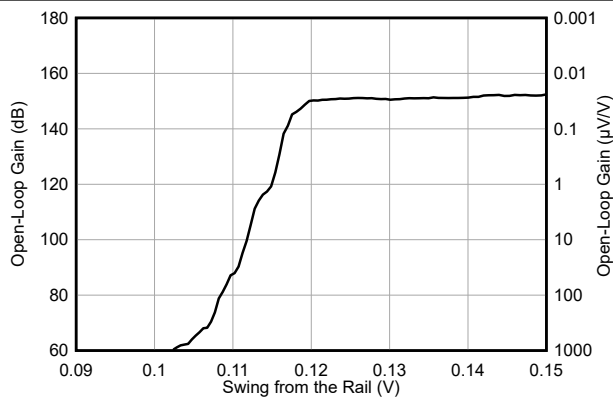


Figure 6-15. Open-Loop Gain vs Swing From the Rail

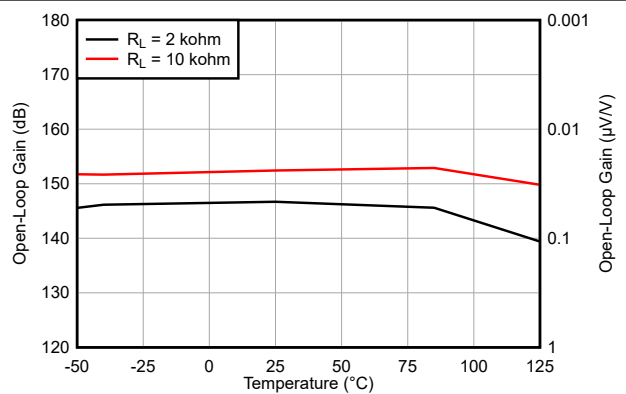


Figure 6-16. Open-Loop Gain vs Temperature

6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{mid supply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

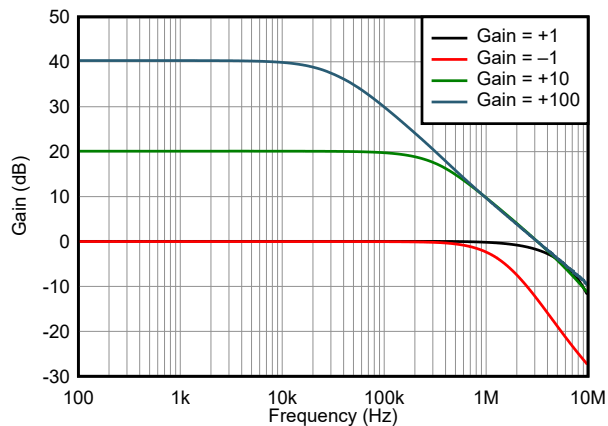


FIG 6-17. Closed-Loop Gain vs Frequency

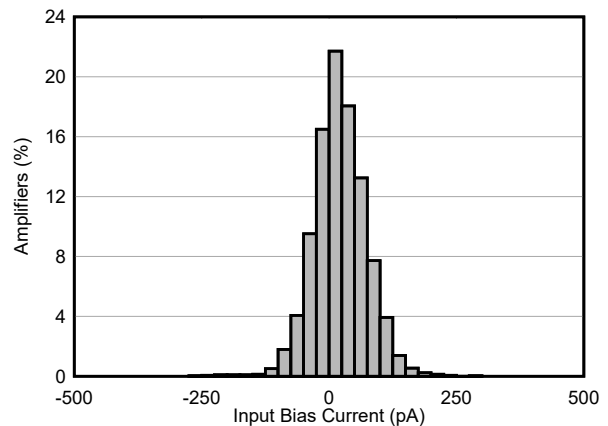


FIG 6-18. Input Bias Production Distribution

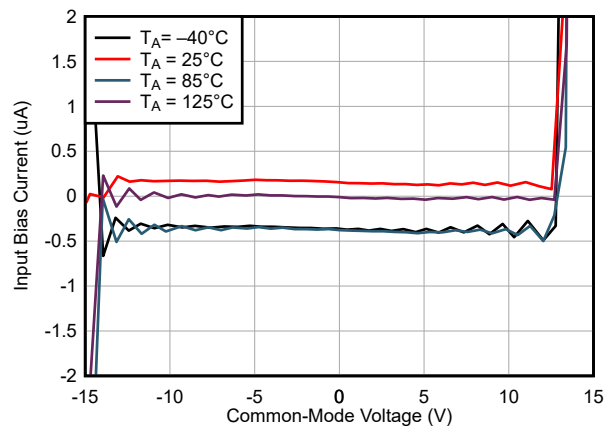


FIG 6-19. Input Bias vs Common-Mode Voltage

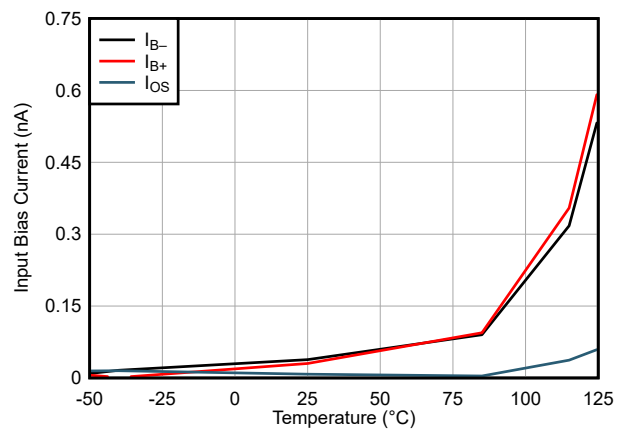


FIG 6-20. Input Bias and Input Offset Current vs Temperature

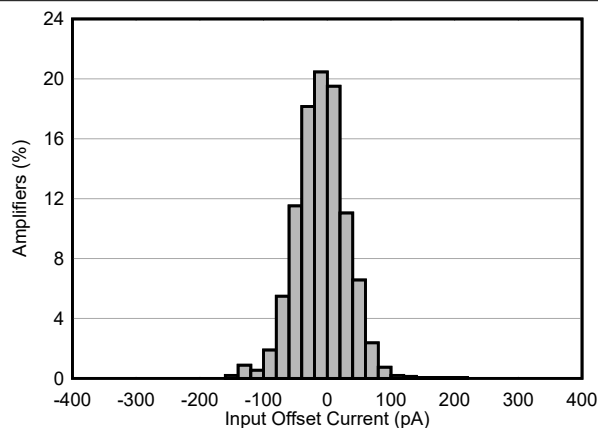


FIG 6-21. Input Offset Current Production Distribution


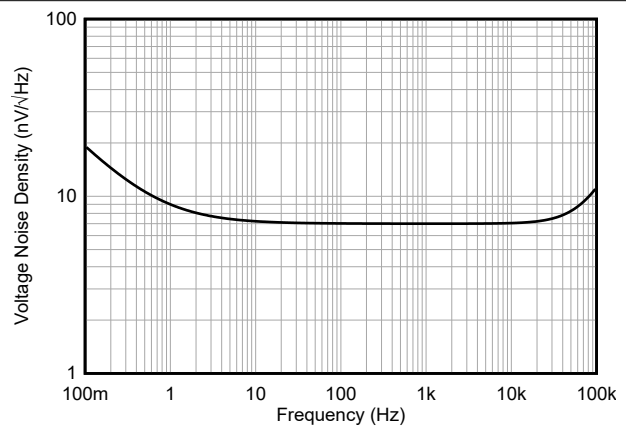



FIG 6-22. Voltage Noise Density vs Frequency

6.9 Typical Characteristics (continued)


at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

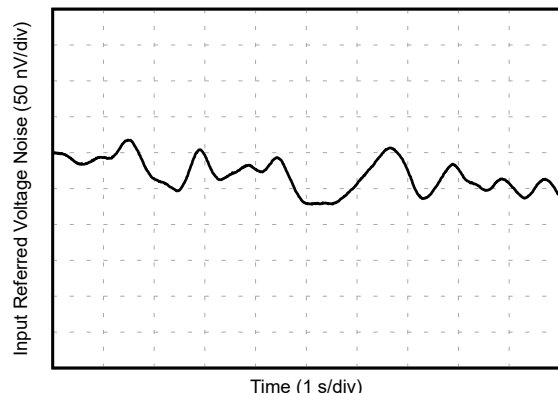


6-23. 0.1-Hz to 10-Hz Noise

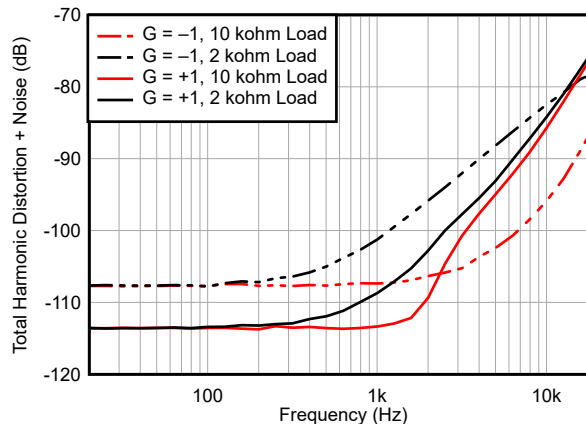


6-24. Total Harmonic Distortion + Noise Ratio vs Frequency

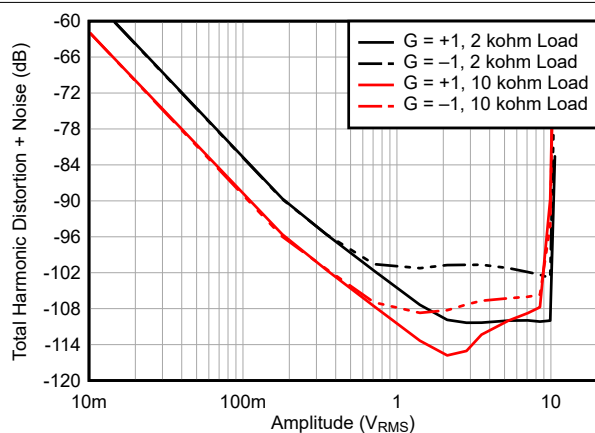


6-25. Total Harmonic Distortion + Noise Ratio vs Output Amplitude

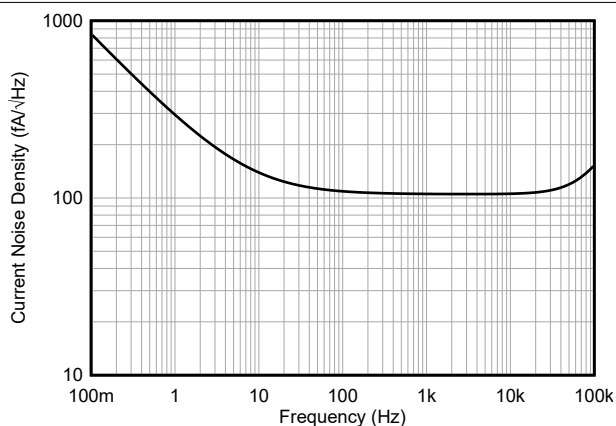

6-26. Current Noise vs Frequency

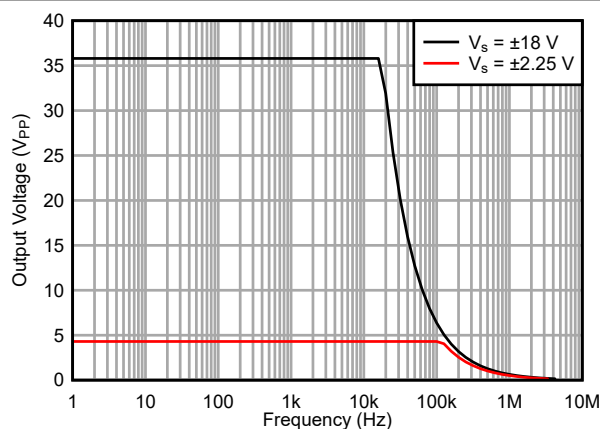

6-27. Maximum Output Voltage vs Frequency

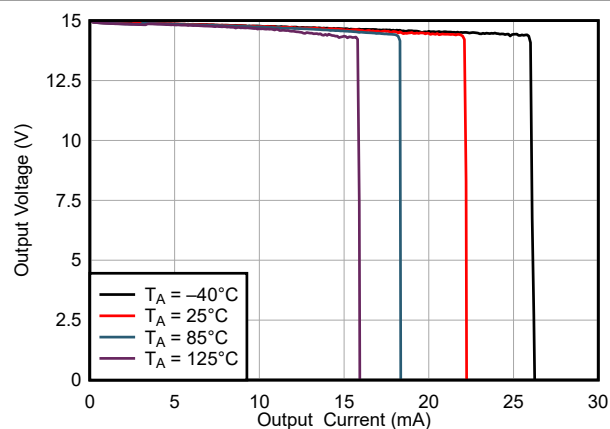

6-28. Output Voltage Swing vs Output Sourcing Current

6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

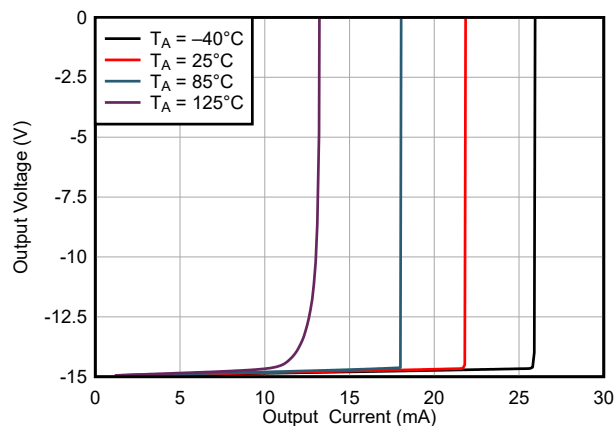


FIG 6-29. Output Voltage Swing vs Output Sinking Current

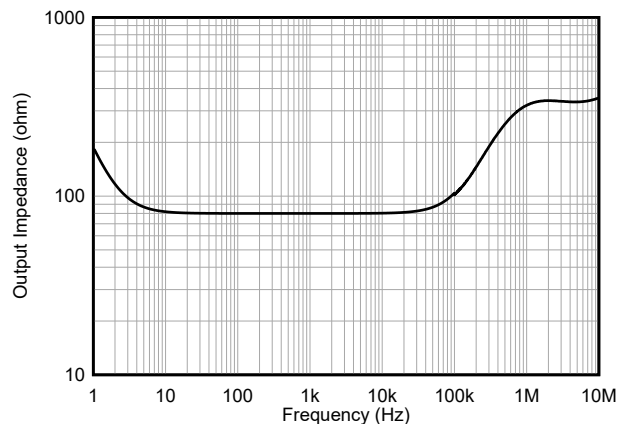


FIG 6-30. Open-Loop Output Impedance vs Frequency

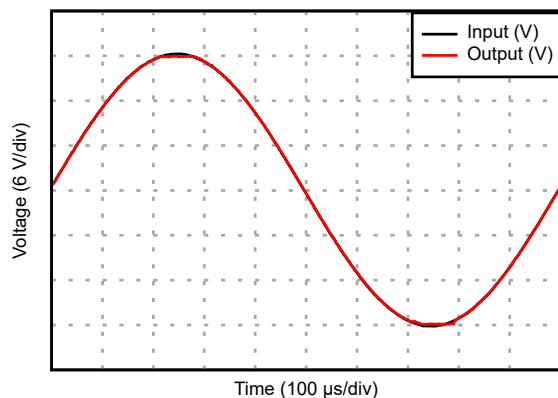


FIG 6-31. No Phase Reversal

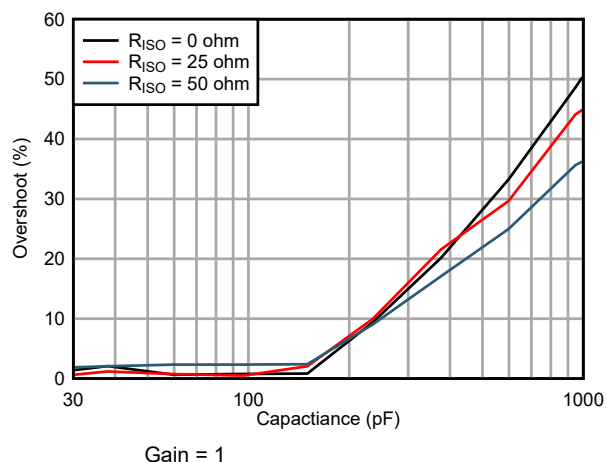


FIG 6-32. Small-Signal Overshoot vs Capacitive Load, Gain = +1

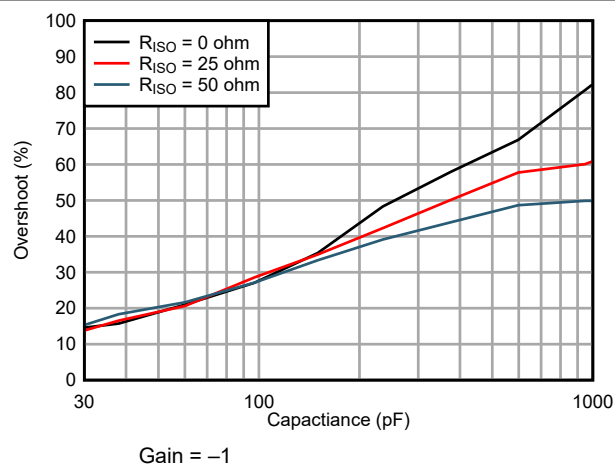


FIG 6-33. Small-Signal Overshoot vs Capacitive Load, Gain = -1


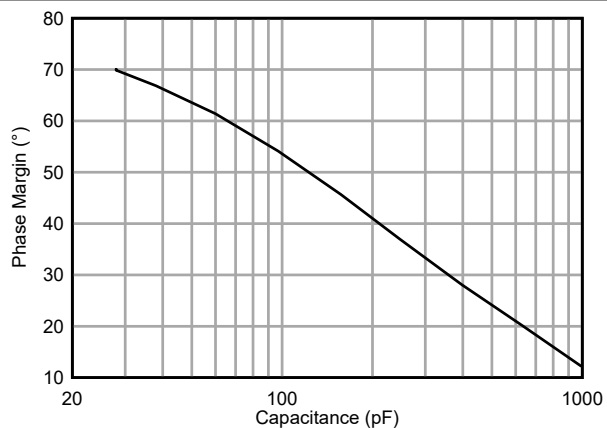


FIG 6-34. Phase Margin vs Capacitive Load


6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

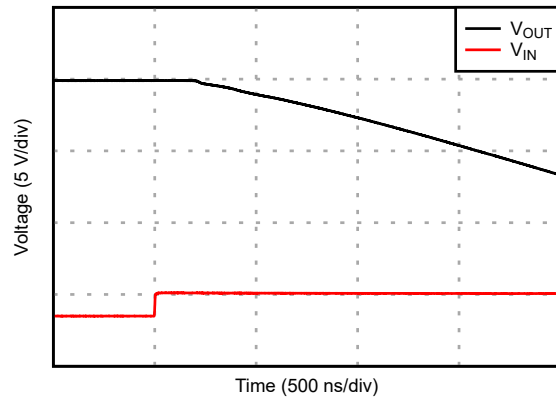


Gain = -1

6-35. Positive Overload Recovery, Gain = -1

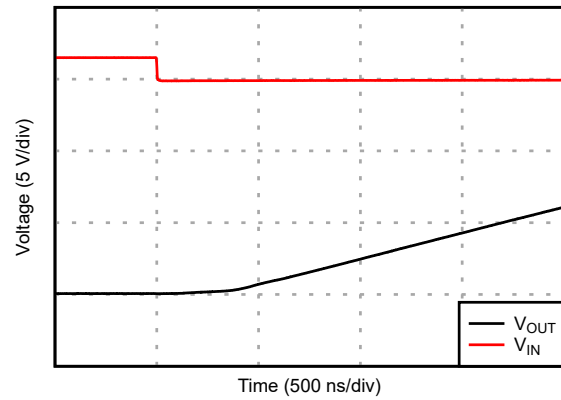


Gain = -1

6-36. Negative Overload Recovery, Gain = -1

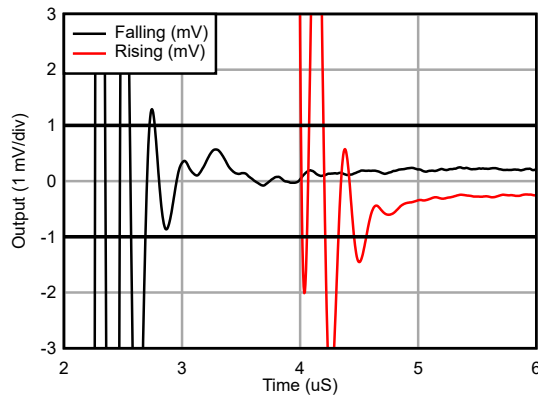


6-37. Settling Time

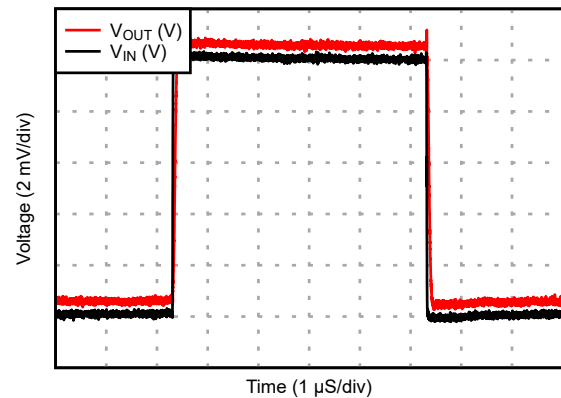


Gain = 1

6-38. Small-Signal Step Response, Gain = +1

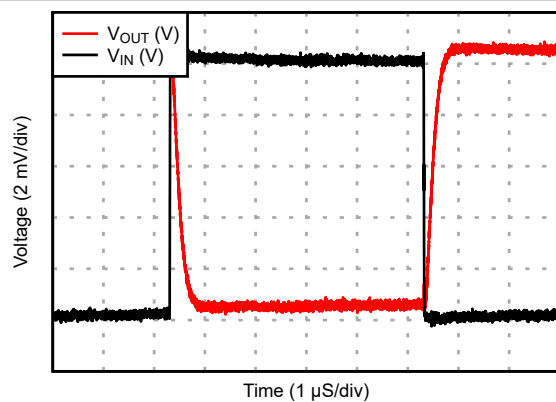

Gain = -1

6-39. Small-Signal Step Response, Gain = -1

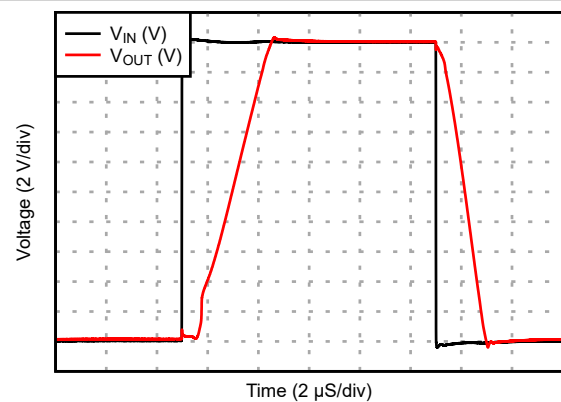


Gain = 1

6-40. Large-Signal Step Response, Gain = +1


6.9 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$, $V_{CM} = V_{OUT} = \text{midsupply}$, and $R_L = 10\text{ k}\Omega$ (unless otherwise noted)

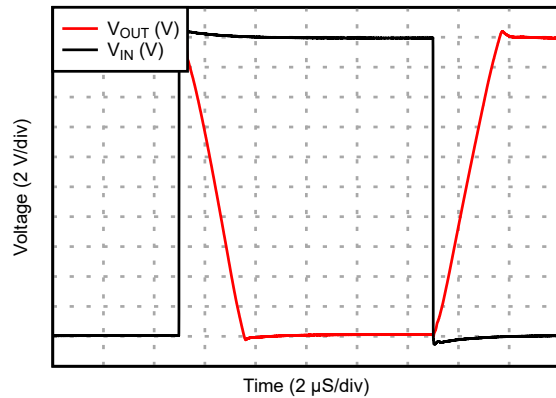


Gain = -1


6-41. Large-Signal Step Response, Gain = -1

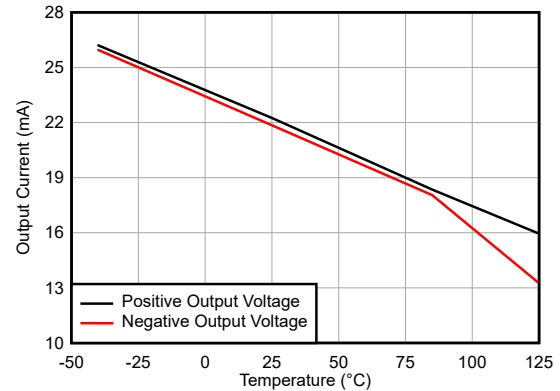


6-42. Short-Circuit Current vs Temperature

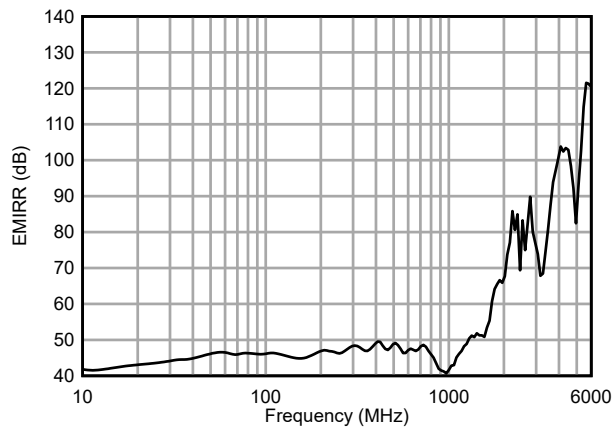

6-43. Electromagnetic Interference Rejection

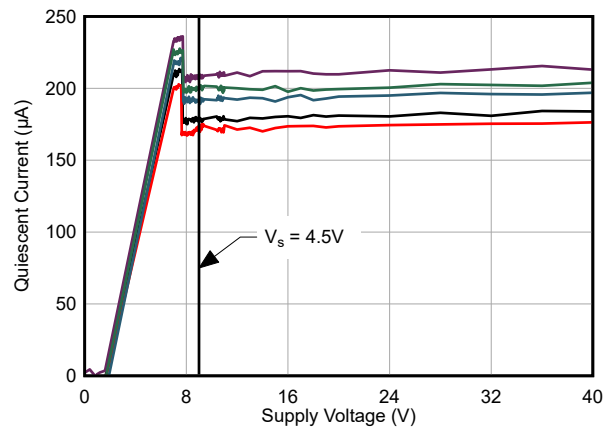

6-44. Quiescent Current vs Supply Voltage

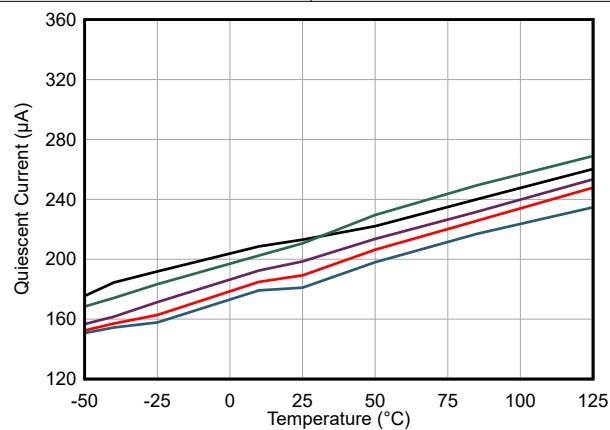

6-45. Quiescent Current vs Temperature

7 Parameter Measurement Information

7.1 Typical Specifications and Distributions

To design a more robust circuit, designers often have questions about a typical specification of an amplifier. As a result of natural variations in process technology and manufacturing procedures, every specification of an amplifier exhibits some amount of deviation from the ideal value, such as the input bias current of an amplifier. These deviations often follow *Gaussian* (bell curve), or *normal* distributions. Circuit designers can leverage this information to guard-band their system, even when there is no minimum or maximum specification in the [Electrical Characteristics](#).

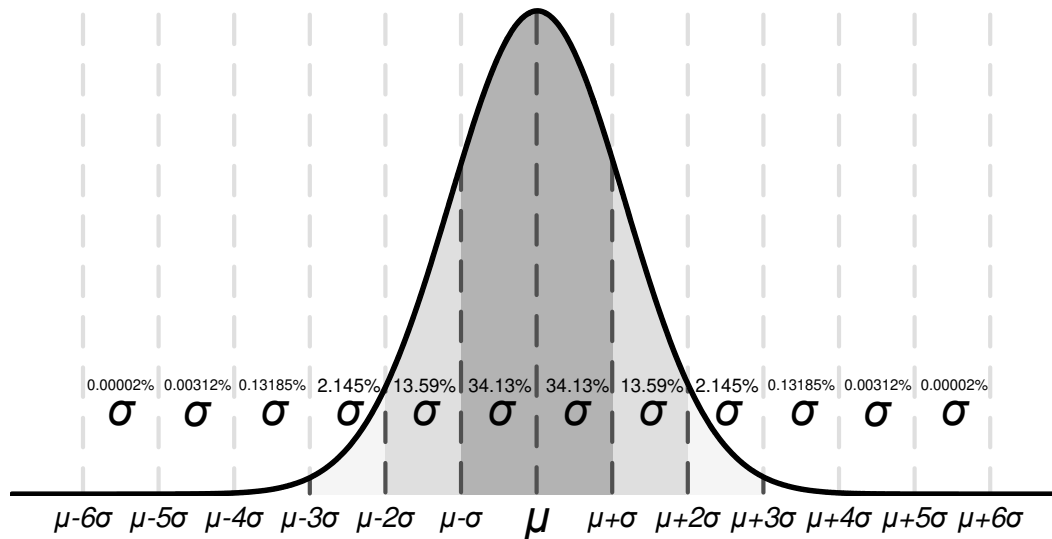


FIG 7-1. Ideal Gaussian Distribution

FIG 7-1 shows an example distribution, where μ , is the mean of the distribution, and where σ , or *sigma*, is the standard deviation of a system. For a specification that exhibits this kind of distribution, approximately two-thirds (68.26%) of all units can be expected to have a value within one standard deviation, or one sigma, of the mean (from $\mu - \sigma$ to $\mu + \sigma$).

Depending on the specification, values listed in the *typical* column of [Electrical Characteristics](#) are represented in different ways. As a general guideline, if a specification naturally has a nonzero mean (for example, gain bandwidth), then the typical value is equal to the mean (μ). However, if a specification naturally has a mean near zero (for example, input bias current), then the typical value is equal to the mean plus one standard deviation ($\mu + \sigma$) to most accurately represent the typical value.

Use this chart to calculate the approximate probability of a specification in a unit. For example, the OPAx205 typical input bias current is ± 0.1 nA; therefore, 68.2% of all devices are expected to have an input bias from ± 0.1 nA. At 4σ , 99.9937% of the distribution has an input bias less than ± 0.28 nA, which means that 0.0063% of the population is outside of these limits, and corresponds to approximately 1 in 15,873 units.

Units that are found to exceed any tested minimum or maximum specifications are removed from production material. For example, the OPAx205 have a maximum input bias of ± 0.5 nA at 25°C. Although this value corresponds to approximately 6σ (approximately 1 in 500 million units), TI removes any unit with a larger input bias from production material.

For specifications with no value in the minimum or maximum column, consider selecting a sigma value of sufficient guard band for your application, and design worst-case conditions using this value. Use this information to only estimate the performance of a device.


8 Detailed Description

8.1 Overview

The OPAx205 are the first 36-V bipolar, e-trim operational amplifiers that uses a package-level offset trim to minimize the offset voltage and offset voltage drift introduced during the manufacturing process. This trim is performed after the device has been assembled to remove any offset errors introduced throughout the manufacturing process, and trim communication is disabled afterward. These devices also feature super-beta inputs that decrease the input bias current and input current noise.

The following section shows the simplified diagram of the OPAx205.

8.2 Functional Block Diagram

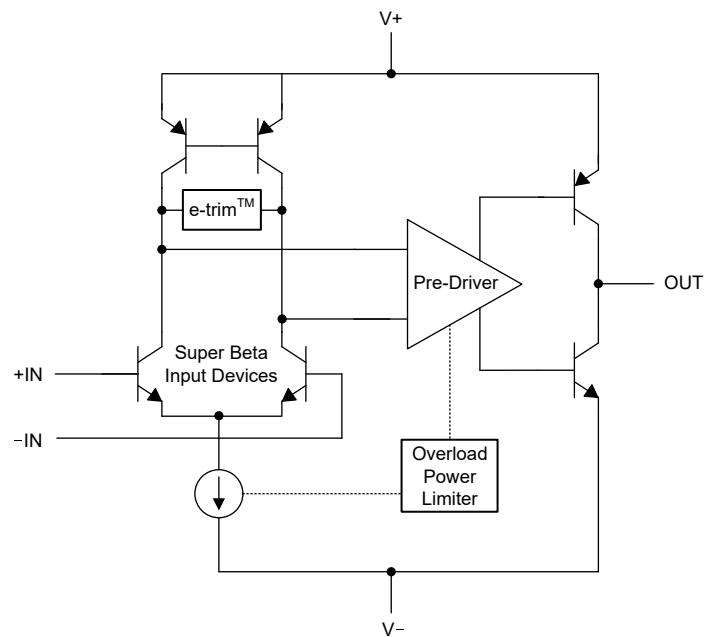

8.3 Feature Description

8.3.1 Input Offset Trimming

The OPAx205 are the industry's first e-trim operational amplifiers built on a bipolar process. The input offset voltage of an amplifier is determined by the inherent mismatch between the input transistors. The offset can be minimized using laser-trimming performed during the manufacturing process while the devices are still in the bare silicon form. However, when the silicon is packaged, the packaging process introduces additional offset due to mechanic stresses. TI's new trimming processes are used to trim the offset after the packaging process is complete to minimize both inherent and package-induced offsets. After trimming, communication is disabled to make sure the amplifiers operate properly in the final system.

A comparison between production offset values for the industry-popular, laser-trimmed [OPA2277](#) and the OPAx205 proprietary trim can be seen in [Figure 8-1](#) and [Figure 8-2](#).

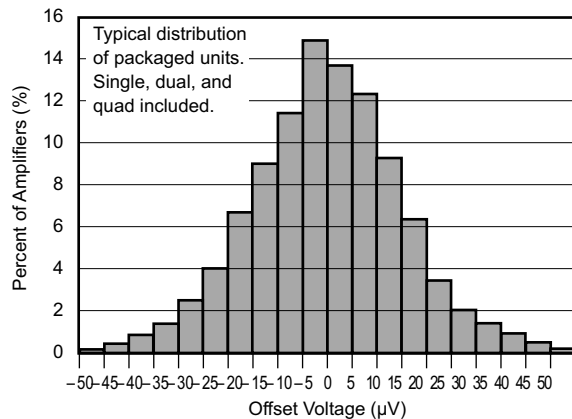


Figure 8-1. OPA2277 Laser-Trimmed Operational Amplifier Offset

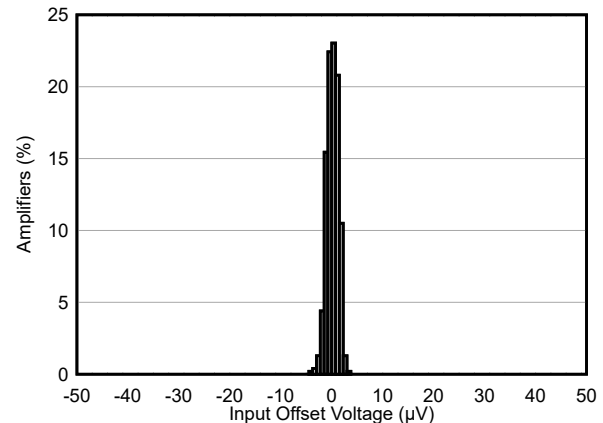


Figure 8-2. OPAx205 e-trim™ Operational Amplifier Offset

The OPAx205 are also trimmed at two temperatures to minimize the input offset voltage drift over temperature. The final performance of the offset drift can be seen in [Figure 8-3](#).

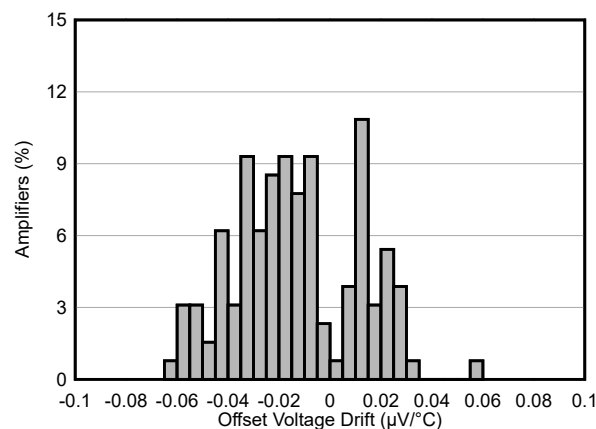


Figure 8-3. OPAx205 e-trim™ Operational Amplifier Drift

8.3.2 Lower Input Bias With Super-Beta Inputs

The OPAx205 have a super-beta input transistor architecture. In a transistor, the beta value is the ratio between the current flowing into the base and the current flowing from the collector to the emitter. A super-beta transistor is one where the beta value has been increased from several hundred to thousands. In a bipolar amplifier, the input bias current is the current flowing into the base of the input transistor pair, as well as a small leakage current that flows through the ESD diodes. A super-beta input reduces the input bias current of the amplifier. In addition, the super-beta inputs lower the input current noise that is directly related to the input bias current of the device. A comparison between the input bias current of the OPA2277 and the OPAx205 super-beta input bias currents can be seen in [Figure 8-4](#) and [Figure 8-5](#).

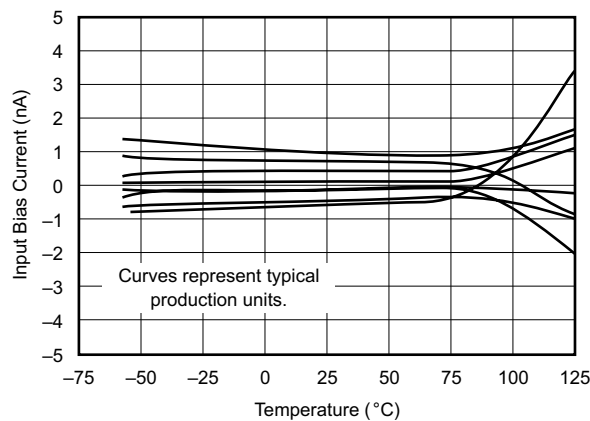


Figure 8-4. OPA2277 Input Bias Current

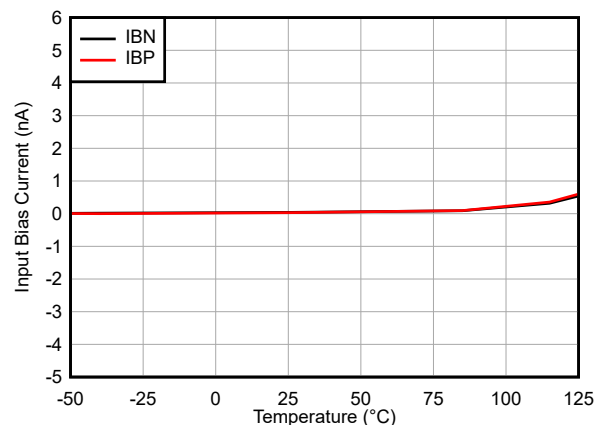


Figure 8-5. OPAx205 Super-Beta Input Bias Current

8.3.3 Overload Power Limiter

In many bipolar-based amplifiers, the output stage of the amplifier can draw significant (several milliamperes) of quiescent current if the output voltage becomes clipped (that is, the output voltage becomes limited by the negative or positive supply voltage). This condition can cause the system to enter a high-power consumption state, and potentially cause oscillations between the power supply and signal chain. The OPAx205 have an advanced output stage design that eliminates this problem. When the output voltage reaches either supply (V_+ or V_-), there is virtually no additional current consumption from the nominal quiescent current. This feature helps eliminate any potential system problems when the signal chain is disrupted by large external transient voltage.

8.3.4 EMI Rejection

The OPAx205 use integrated electromagnetic interference (EMI) filtering to reduce the effects of EMI from sources, such as wireless communications and densely populated boards with a mix of analog signal chain and digital components. EMI immunity can be improved through circuit design techniques that improve the system performance. Additional information can be found in the [EMI Rejection Ratio of Operational Amplifiers application report](#).

8.4 Device Functional Modes

The OPAx205 have a single functional mode and are operational with any supply between 4.5 V (± 2.25 V) and 36 V (± 18 V).

9 Application and Implementation

注

以下のアプリケーション情報は、TI の製品仕様に含まれるものではなく、TI ではその正確性または完全性を保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

9.1 Application Information

The OPAx205 are unity-gain stable operational amplifiers with very low offset voltage, offset voltage drift, voltage noise, current noise and power consumption. These features make this device family a great choice for a variety of space-constrained and power-constrained systems.

9.2 Typical Applications

9.2.1 High-Precision Signal-Chain Input Buffer

A common application for the OPAx205 is an input buffer for the signal chain of a data acquisition (DAQ) or field instrumentation system. This amplifier family is selected because of the low offset and drift that maintain system accuracy across a variety of operating conditions. The low power consumption of the OPAx205 enables the device to be used in battery-operated or high-density applications, where thermal dissipation is difficult. The low 1/f (flicker) noise and broadband noise allow for higher-accuracy signal chains, such as those using a 24-bit delta-sigma analog-to-digital converter (ADC). If a higher sampling rate is needed, the OPAx205 can be paired with a fully differential amplifier, such as the [THP210](#), to drive the ADC inputs. [Figure 9-1](#) shows the OPA2205 configured as an input buffer to a differential ADC driver.

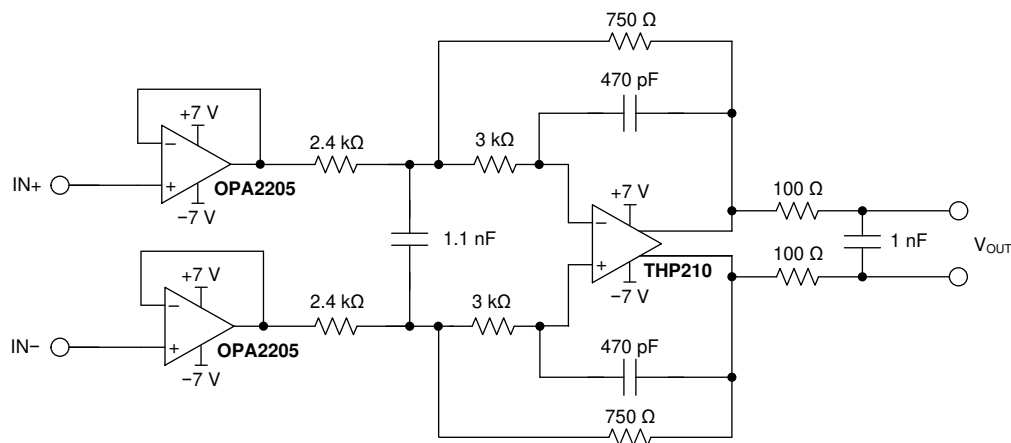


Figure 9-1. OPA2205 Configured as a DAQ Input Buffer

9.2.1.1 Design Requirements

The design requirements for this application are:

- Input range: ± 10 V
- Input frequency: 10 kHz
- Output voltage: ± 3.3 V
- Quiescent current: < 1.5 mA

9.2.1.2 Detailed Design Procedure

In this application, the input signal ranges from -10 V to $+10$ V with a frequency of up to 10 kHz. Because of possible portable-use cases for this data acquisition system (DAQ), low power consumption is required to minimize battery drain and thermal dissipation requirements.

To maintain high system accuracy the OPA2205 is selected as input buffers. This device is selected because of the high dc precision (4 μ V offset and 0.08 μ V/ $^{\circ}$ C offset drift), low flicker noise (0.2 μ Vpp), and low quiescent current (220 μ A). The buffers are followed by a high-precision, fully differential amplifier such as the THP210, which is capable of accurately driving a 24-bit, fully differential ADC such as the [ADS127L01](#).

9.2.1.3 Application Curves

The gain plot for this system can be seen in [Figure 9-2](#). This plot shows proper attenuation of the ± 10 -V signal to the target ± 3.3 -V output, and adequate bandwidth to support the input frequency range.

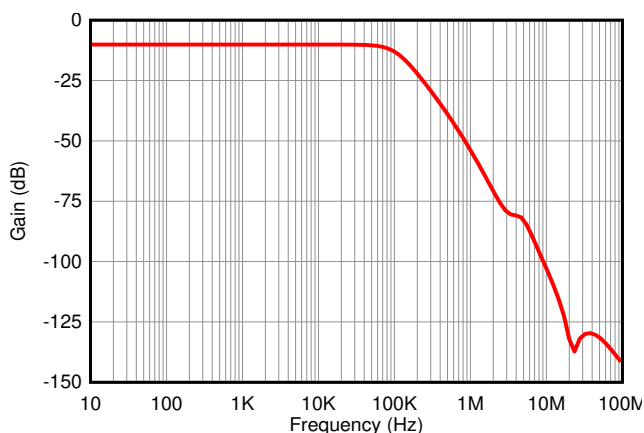


Figure 9-2. Gain Plot of DAQ Front End

9.2.2 Discrete, Two-Op-Amp Instrumentation Amplifier

Figure 9-3 shows the OPA2205 configured as a two-op-amp, discrete instrumentation amplifier. This configuration allows for a differential signal measurement, such as the signal from a load cell, with higher input impedance to the signal chain than most monolithic instrumentation amplifiers. The strong ac and dc performance of the OPA2205 enables high accuracy measurements.

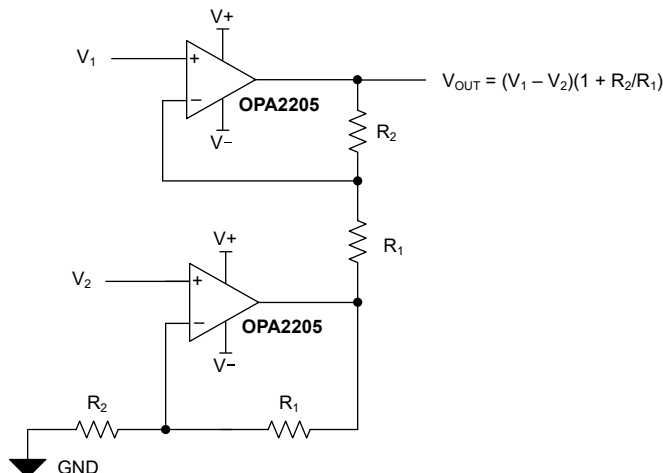


Figure 9-3. OPA2205 Configured as a Two-Op-Amp, Discrete Instrumentation Amplifier

9.2.3 Second-Order Low-Pass Filter

The OPAx205 has a very-low broadband voltage noise of only 7.2 nV/√Hz and flicker noise of 0.2 μV_{PP} given the low power consumption of only 220 μA, making this device an excellent choice for low-power filter applications.

Figure 9-4 is an example of one channel of the OPAx205 configured as a second-order low-pass filter with a cutoff frequency of 50 kHz.

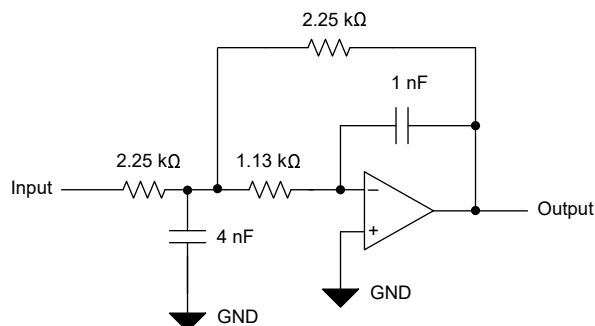


Figure 9-4. Second-Order Low-Pass Filter

9.3 Power Supply Recommendations

The OPAx205 operate with a power supply between 4.5 V to 36 V (± 2.25 V to ± 18 V). Parameters that can exhibit significant variance with regard to operating voltage are presented in [セクション 6.9](#).

Place 0.1- μ F bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high-impedance power supplies. For more detailed information on bypass capacitor placement, see [セクション 9.4.1](#).


9.4 Layout

9.4.1 Layout Guidelines


For best operational performance of the device, use good PCB layout practices, including:

- Connect low-ESR, 0.1- μ F ceramic bypass capacitors between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable for single-supply applications. Noise can propagate into analog circuitry through the power pins of the circuit as a whole, as well as through the individual op amp. Bypass capacitors are used to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
- Make sure to physically separate digital and analog grounds paying attention to the flow of the ground current. Separate grounding for analog and digital portions of circuitry is one of the simplest and most effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces EMI noise pickup.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better as opposed to in parallel with the noisy trace.
- Place the external components as close to the device as possible. As shown in [図 9-5](#), keep RF and RG close to the inverting input to minimize parasitic capacitance.
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.
- Clean the PCB following board assembly for best performance.
- Any precision integrated circuit can experience performance shifts due to moisture ingress into the plastic package. After any aqueous PCB cleaning process, bake the PCB assembly to remove moisture introduced into the device packaging during the cleaning process. A low-temperature, post-cleaning bake at 85°C for 30 minutes is sufficient for most circumstances.

9.4.2 Layout Example

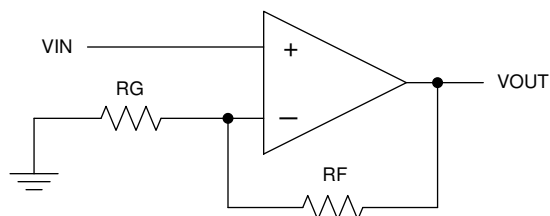

9-5. Schematic Representation

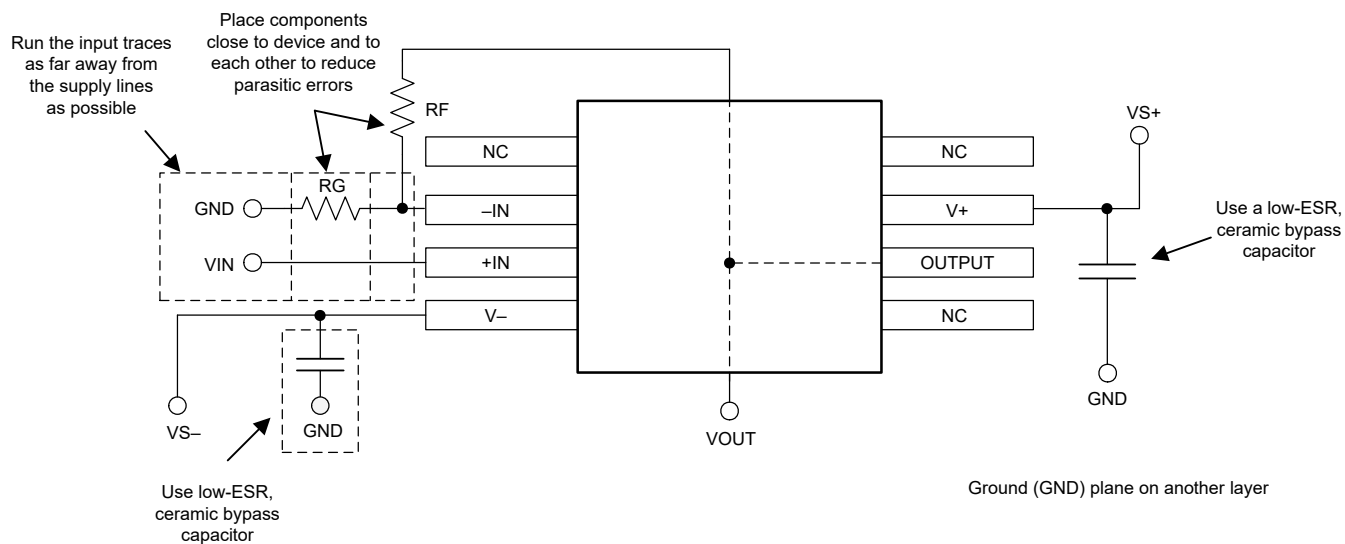

9-6. Operational Amplifier Board Layout for Noninverting Configuration

10 Device and Documentation Support

10.1 Device Support

10.1.1 Development Support

The following evaluation modules are available:

- [DIP-ADAPTER-EVM](#)
- [DIYAMP-EVM](#)

10.1.1.1 PSpice® for TI

PSpice® for TI は、アナログ回路の性能評価に役立つ設計およびシミュレーション環境です。レイアウトと製造に移る前に、サブシステムの設計とプロトタイプ・ソリューションを作成することで、開発コストを削減し、市場投入までの期間を短縮できます。

10.2 ドキュメントのサポート

10.2.1 関連資料

関連資料については、以下を参照してください。

- テキサス・インスツルメンツ、『[DIP-ADAPTER-EVM ユーザー・ガイド](#)』
- テキサス・インスツルメンツ、『[DIYAMP-SOIC-EVM ユーザー・ガイド](#)』

10.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#) のデバイス製品フォルダを開いてください。「更新の通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

10.4 サポート・リソース

[TI E2E™ サポート・フォーラム](#)は、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、該当する貢献者により、現状のまま提供されるものです。これらは TI の仕様を構成するものではなく、必ずしも TI の見解を反映したものではありません。TI の[使用条件](#)を参照してください。

10.5 Trademarks

e-trim™ and TI E2E™ are trademarks of Texas Instruments.

PSpice® is a registered trademark of Cadence Design Systems, Inc.

すべての商標は、それぞれの所有者に帰属します。

10.6 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

10.7 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA205ADR	Active	Production	SOIC (D) 8	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP205A
OPA205ADR.B	Active	Production	SOIC (D) 8	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP205A
OPA205ADT	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP205A
OPA205ADT.B	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP205A
OPA2205ADGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	22A5
OPA2205ADGKR.B	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	22A5
OPA2205ADGKT	Active	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	22A5
OPA2205ADGKT.B	Active	Production	VSSOP (DGK) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	22A5
OPA2205ADR	Active	Production	SOIC (D) 8	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2205A
OPA2205ADR.B	Active	Production	SOIC (D) 8	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2205A
OPA2205ADT	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2205A
OPA2205ADT.B	Active	Production	SOIC (D) 8	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	2205A
OPA4205ADR	Active	Production	SOIC (D) 14	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4205A
OPA4205ADR.B	Active	Production	SOIC (D) 14	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4205A
OPA4205ADT	Active	Production	SOIC (D) 14	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4205A
OPA4205ADT.B	Active	Production	SOIC (D) 14	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OPA4205A
OPA4205APWR	Active	Production	TSSOP (PW) 14	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP4205A
OPA4205APWR.B	Active	Production	TSSOP (PW) 14	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP4205A
OPA4205APWT	Active	Production	TSSOP (PW) 14	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP4205A
OPA4205APWT.B	Active	Production	TSSOP (PW) 14	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	OP4205A

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

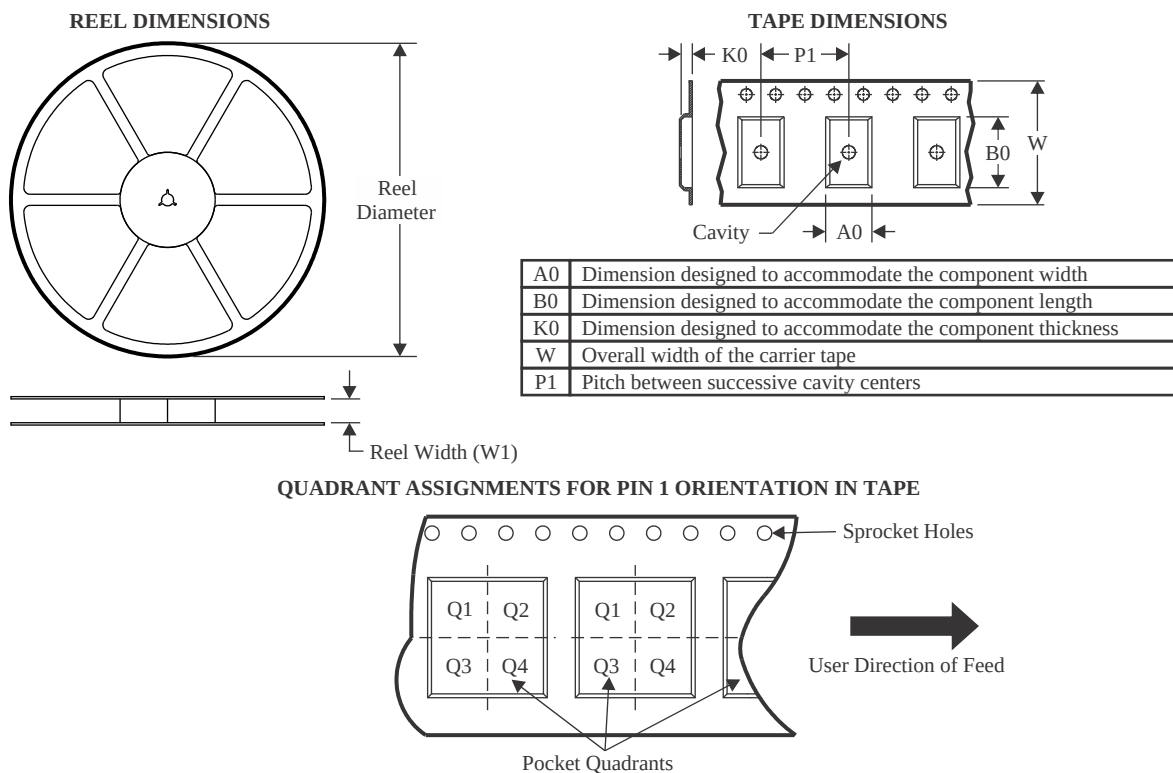

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
OPA205ADR	SOIC	D	8	3000	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA205ADT	SOIC	D	8	250	180.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA2205ADGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2205ADGKT	VSSOP	DGK	8	250	180.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1
OPA2205ADR	SOIC	D	8	3000	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA2205ADT	SOIC	D	8	250	180.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1
OPA4205ADR	SOIC	D	14	3000	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
OPA4205ADT	SOIC	D	14	250	180.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

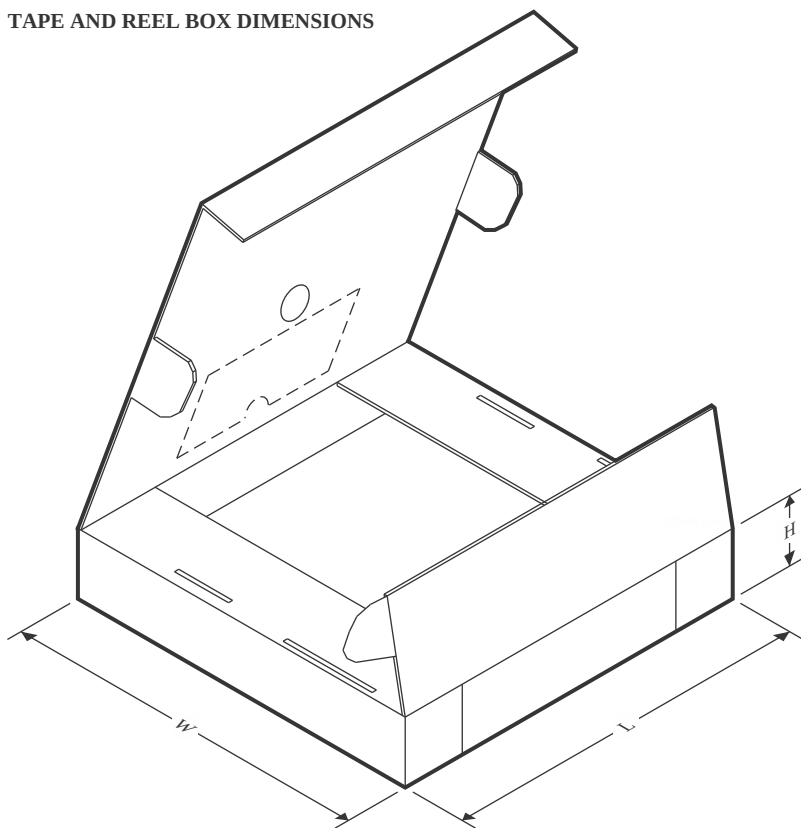


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
OPA205ADR	SOIC	D	8	3000	356.0	356.0	35.0
OPA205ADT	SOIC	D	8	250	210.0	185.0	35.0
OPA2205ADGKR	VSSOP	DGK	8	2500	356.0	356.0	35.0
OPA2205ADGKT	VSSOP	DGK	8	250	210.0	185.0	35.0
OPA2205ADR	SOIC	D	8	3000	356.0	356.0	35.0
OPA2205ADT	SOIC	D	8	250	210.0	185.0	35.0
OPA4205ADR	SOIC	D	14	3000	356.0	356.0	35.0
OPA4205ADT	SOIC	D	14	250	210.0	185.0	35.0

D0014A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

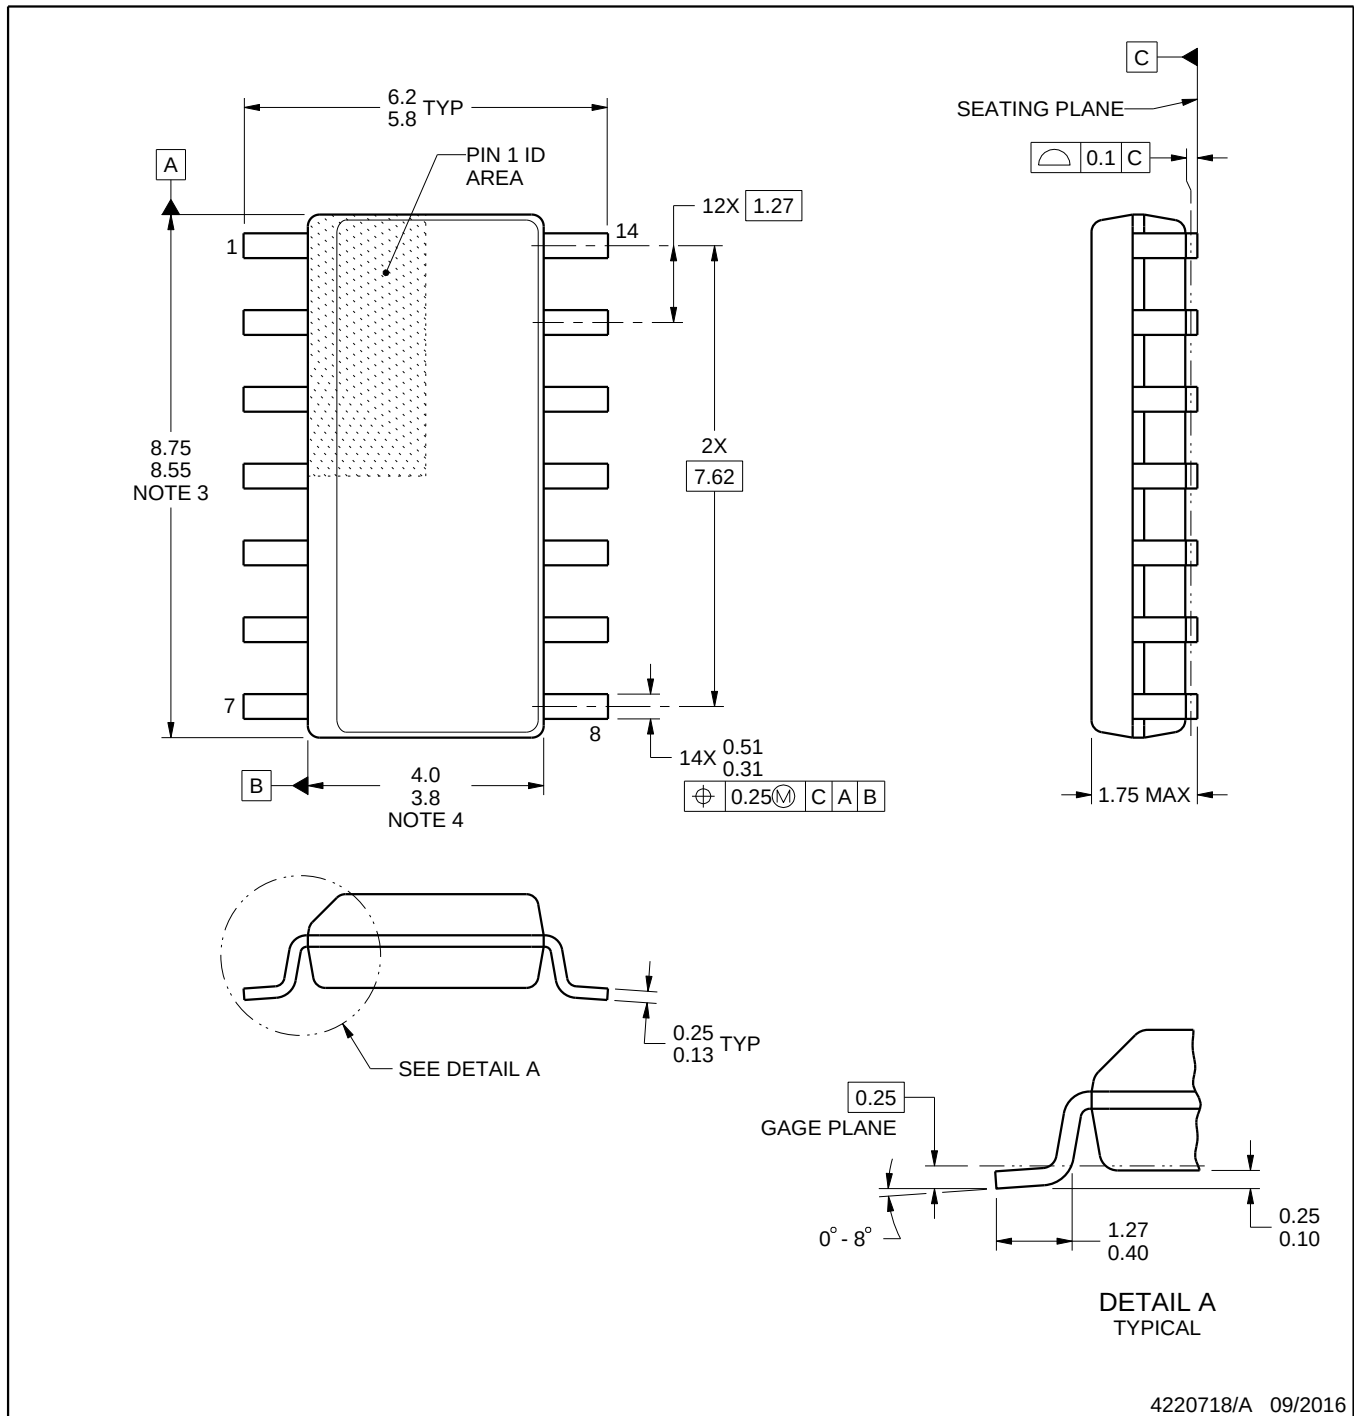**NOTES:**


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

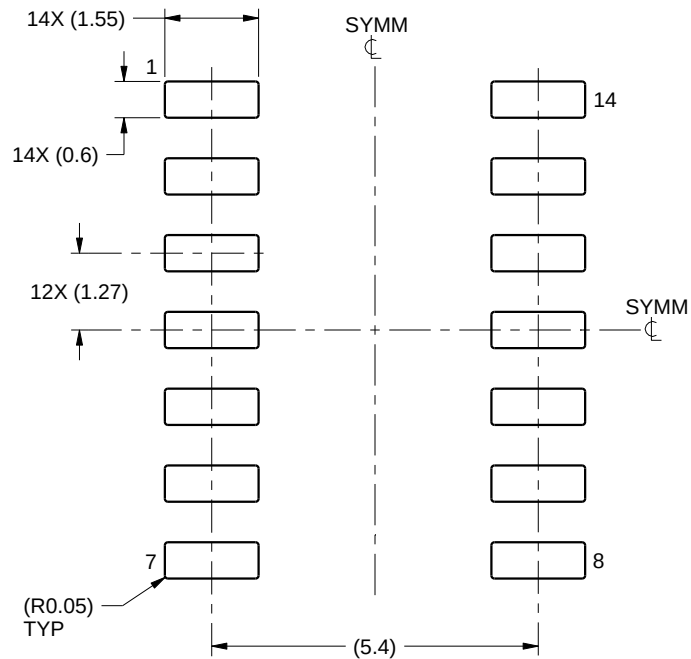

LAND PATTERN EXAMPLE
SCALE:8X

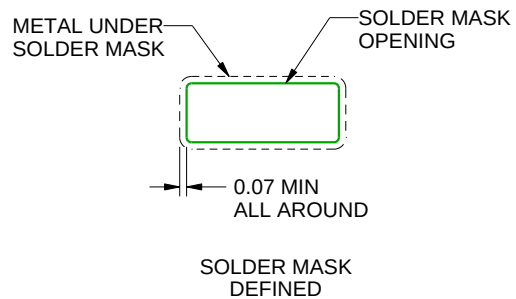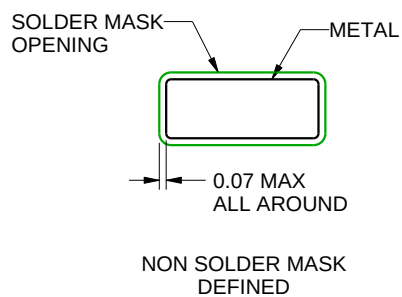

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

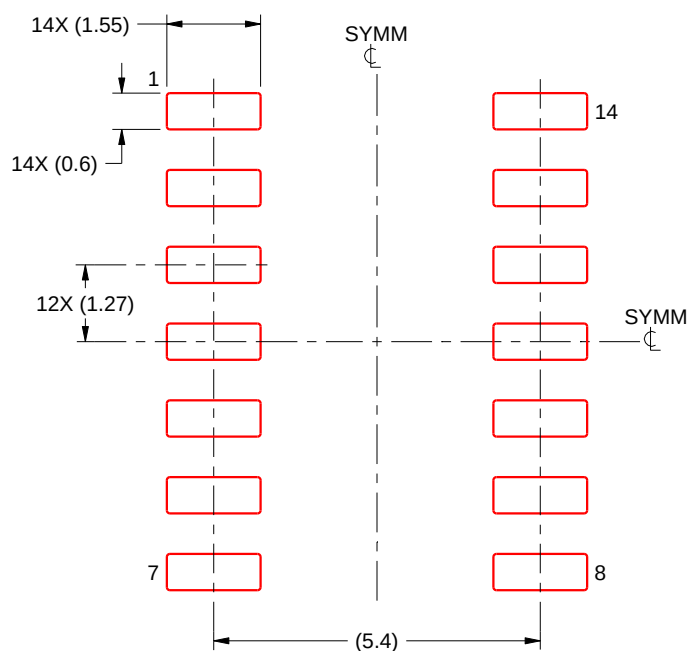


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X


4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

D0008A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

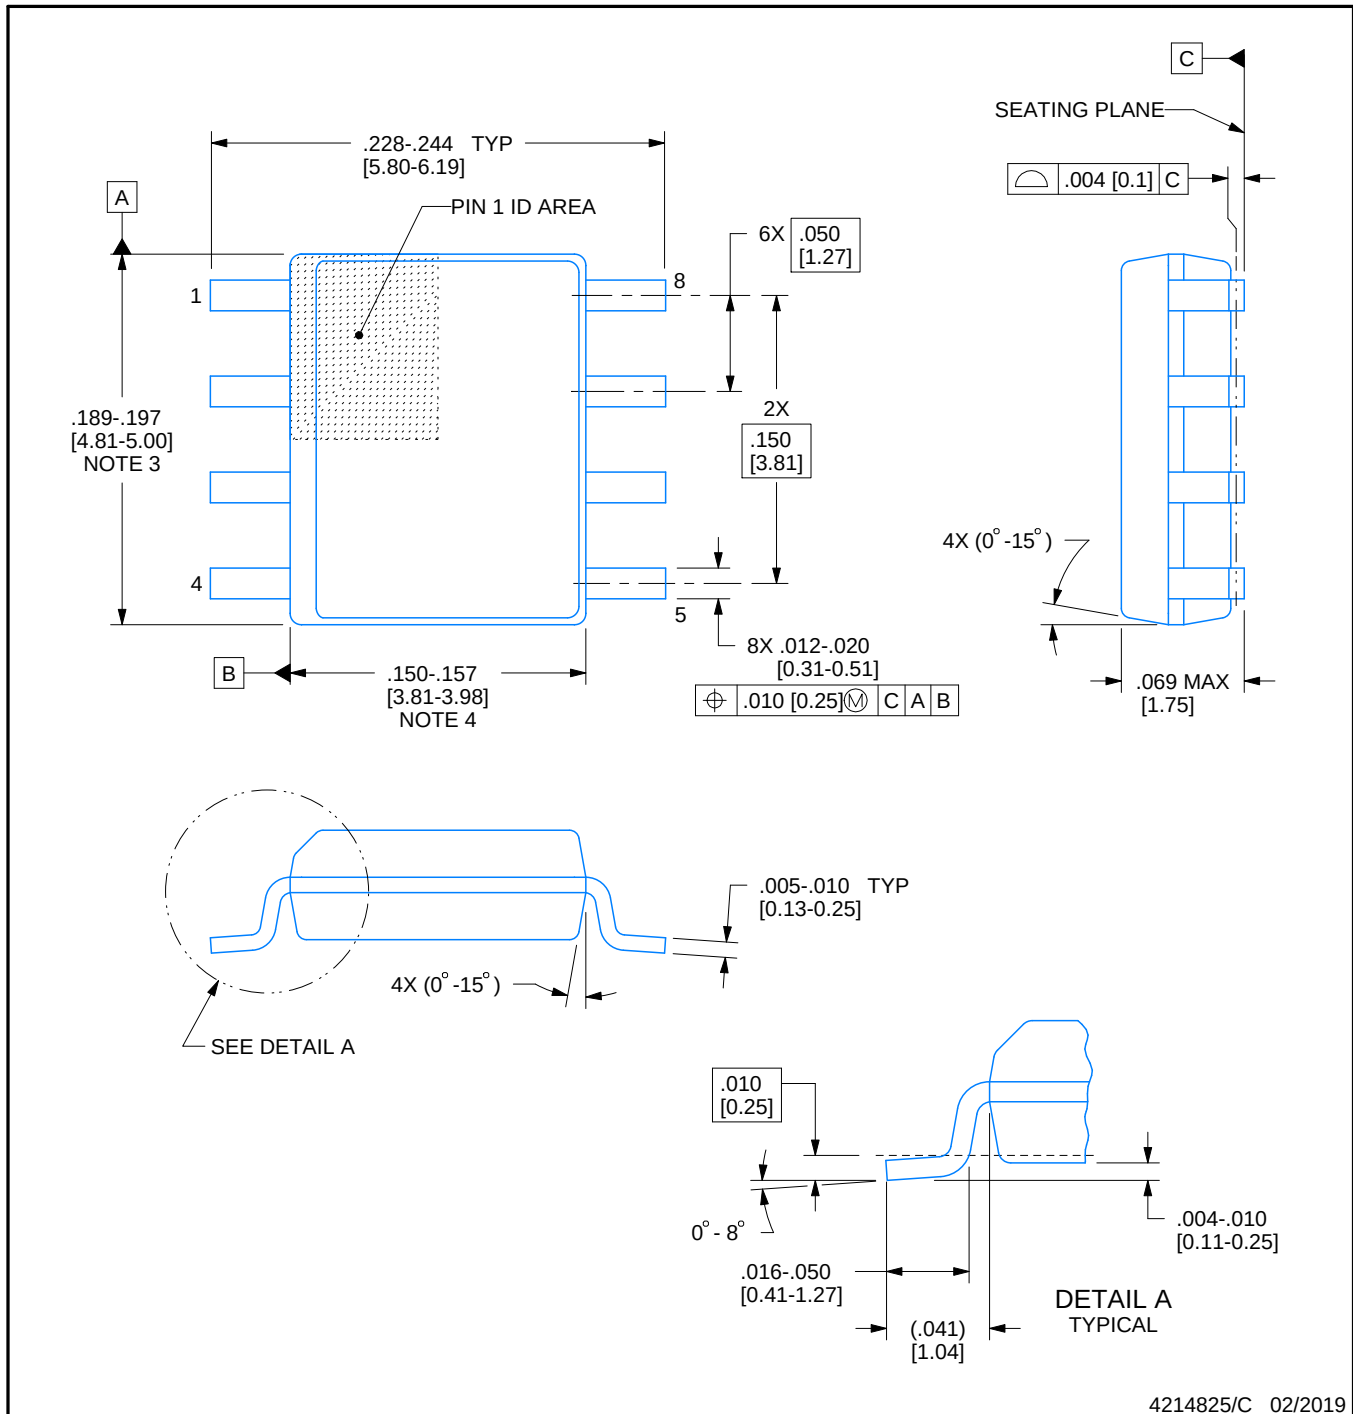

4214825/C 02/2019


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed $.006$ [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

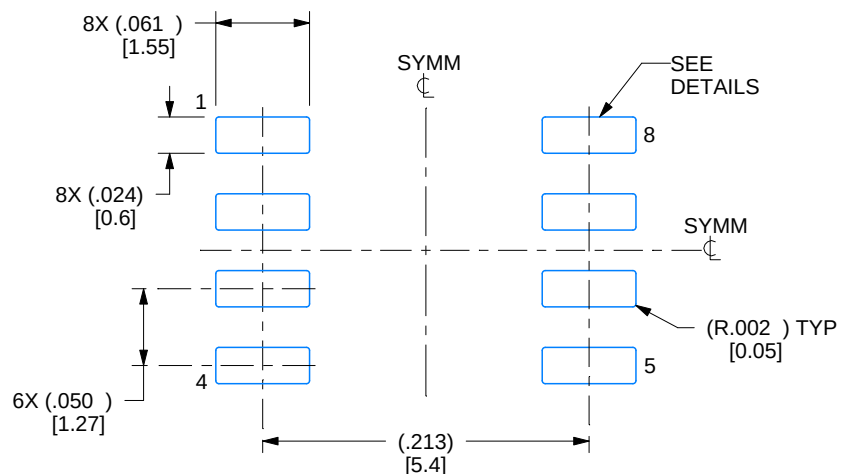

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

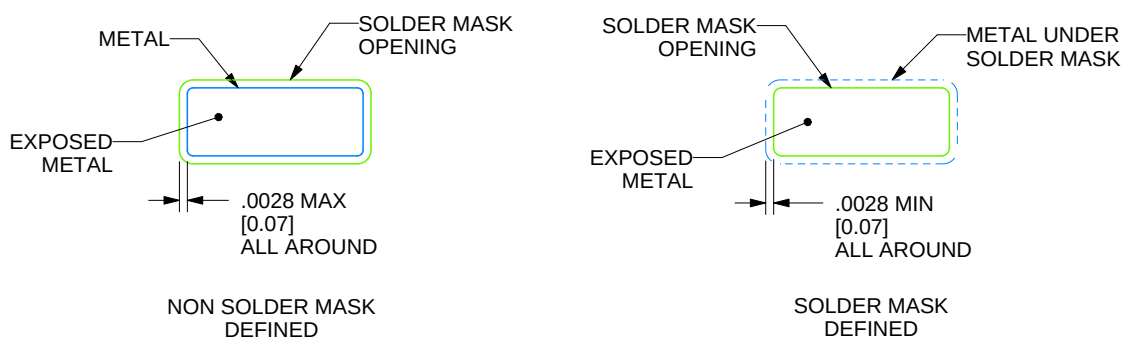

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

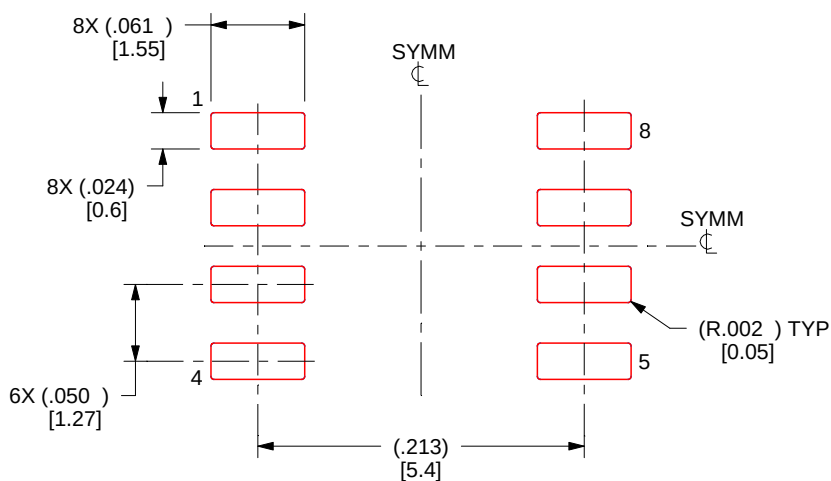

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



VSSOP - 1.1 mm max height

[illegible]

PowerPAD is a trademark of Texas Instruments.


- 
- TEXAS
INSTRUMENTS
www.ti.com

EXAMPLE BOARD LAYOUT



DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

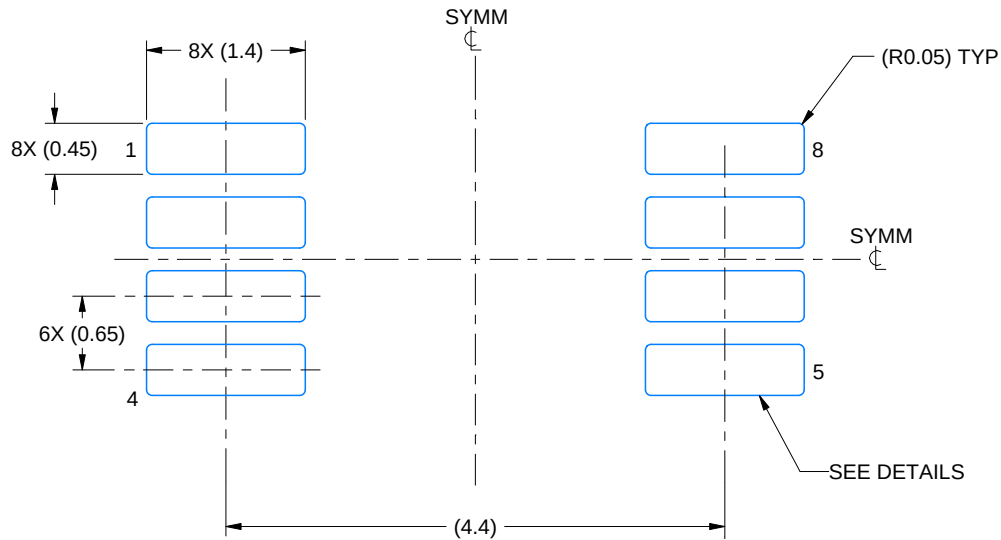

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

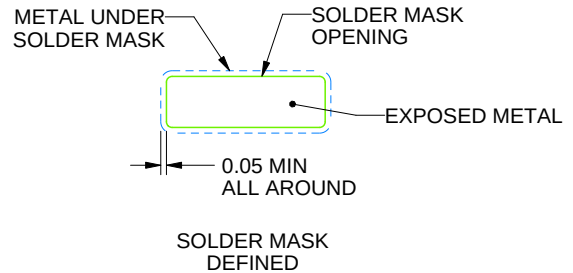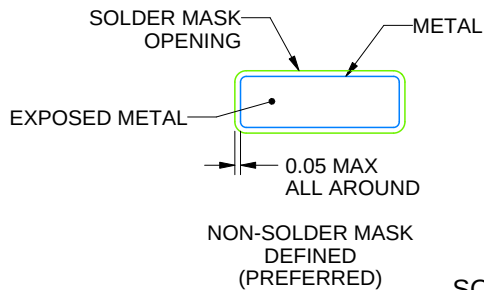

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

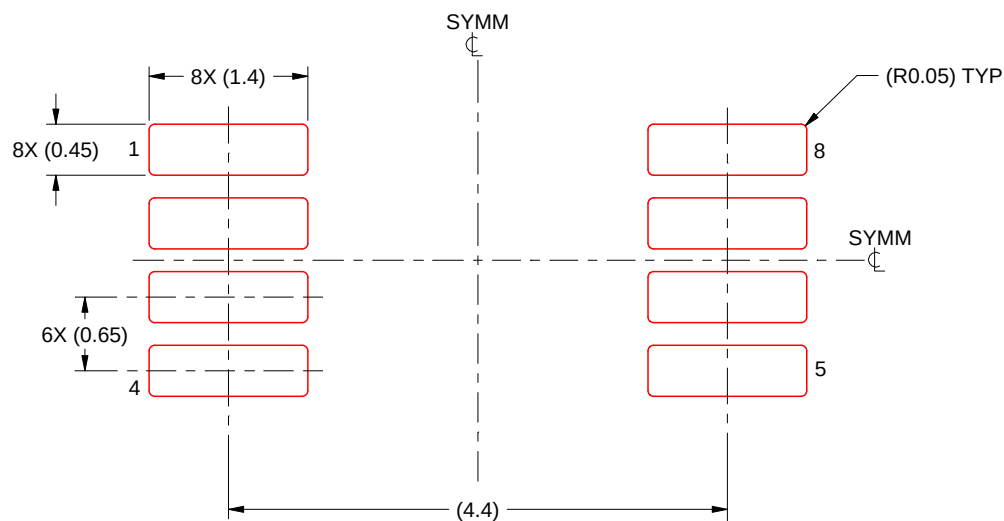

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)


11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

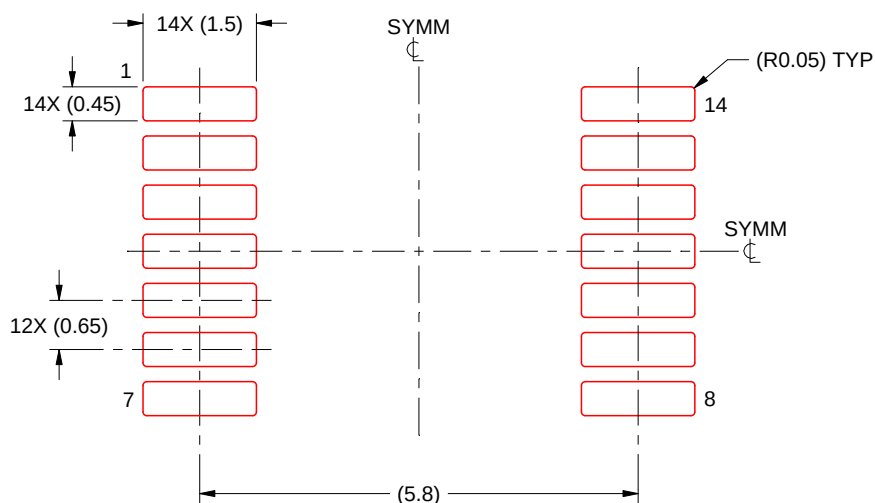

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用される テキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated