


## 3-V To 5.5-V MULTICHANNEL RS-232 LINE DRIVER/RECEIVER WITH ±15-kV ESD PROTECTION

### FEATURES

- Qualified for Automotive Applications
- RS-232 Bus-Pin ESD Protection Exceeds ±15 kV Using Human-Body Model (HBM)
- Meets or Exceeds the Requirements of TIA/EIA-232-F and ITU v.28 Standards
- Operates With 3-V to 5.5-V  $V_{CC}$  Supply
- Operates up to 250 kbit/s
- Two Drivers and Two Receivers
- Low Standby Current . . . 1  $\mu$ A Typical
- External Capacitors . . . 4 × 0.1  $\mu$ F
- Accepts 5-V Logic Input With 3.3-V Supply

**PW PACKAGE  
(TOP VIEW)**

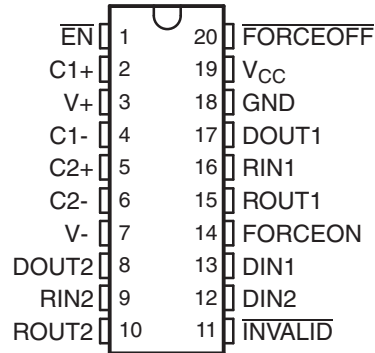

### DESCRIPTION/ORDERING INFORMATION

The TRS3223 consists of two line drivers, two line receivers, and a dual charge-pump circuit with ±15-kV ESD protection pin to pin (serial-port connection pins, including GND). The device meets the requirements of TIA/EIA-232-F and provides the electrical interface between an asynchronous communication controller and the serial-port connector. The charge pump and four small external capacitors allow operation from a single 3-V to 5.5-V supply. The device operates at data signaling rates up to 250 kbit/s and a maximum of 30-V/ $\mu$ s driver output slew rate.

Flexible control options for power management are available when the serial port is inactive. The auto-powerdown feature functions when **FORCEON** is low and **FORCEOFF** is high. During this mode of operation, if the device does not sense a valid RS-232 signal, the driver outputs are disabled. If **FORCEOFF** is set low and **EN** is high, both drivers and receivers are shut off, and the supply current is reduced to 1  $\mu$ A. Disconnecting the serial port or turning off the peripheral drivers causes auto-powerdown to occur. Auto-powerdown can be disabled when **FORCEON** and **FORCEOFF** are high. With auto-powerdown enabled, the device is activated automatically when a valid signal is applied to any receiver input. The **INVALID** output is used to notify the user if an RS-232 signal is present at any receiver input. **INVALID** is high (valid data) if any receiver input voltage is greater than 2.7 V or less than –2.7 V, or has been between –0.3 V and 0.3 V for less than 30  $\mu$ s. **INVALID** is low (invalid data) if the receiver input voltage is between –0.3 V and 0.3 V for more than 30  $\mu$ s. See Figure 4 for receiver input levels.

### ORDERING INFORMATION<sup>(1)</sup>

| $T_A$          | PACKAGE <sup>(2)</sup> |              | ORDERABLE PART NUMBER | TOP-SIDE MARKING |
|----------------|------------------------|--------------|-----------------------|------------------|
| –40°C to 125°C | TSSOP – PW             | Reel of 2000 | TRS3223QPWRQ1         | T3223            |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**DRIVER FUNCTION TABLE (EACH DRIVER)<sup>(1)</sup>**

| INPUTS |         |          |                           | OUTPUT<br>DOUT | DRIVER STATUS                                 |
|--------|---------|----------|---------------------------|----------------|---|
| DIN    | FORCEON | FORCEOFF | VALID RIN<br>RS-232 LEVEL |                |   |
| X      | X       | L        | X                         | Z              | Powered off                                   |
| L      | H       | H        | X                         | H              | Normal operation with auto-powerdown disabled |
| H      | H       | H        | X                         | L              |   |
| L      | L       | H        | Yes                       | H              | Normal operation with auto-powerdown enabled  |
| H      | L       | H        | Yes                       | L              |   |
| L      | L       | H        | No                        | Z              | Powered off by auto-powerdown feature         |
| H      | L       | H        | No                        | Z              |   |


(1) H = high level, L = low level, X = irrelevant, Z = high impedance

**RECEIVER FUNCTION TABLE (EACH RECEIVER)<sup>(1)</sup>**

| INPUTS |                        |                           | OUTPUT<br>ROUT |
|--------|------------------------|---------------------------|----------------|
| RIN    | $\overline{\text{EN}}$ | VALID RIN<br>RS-232 LEVEL |                |
| L      | L                      | X                         | H              |
| H      | L                      | X                         | L              |
| X      | H                      | X                         | Z              |
| Open   | L                      | No                        | H              |

(1) H = high level, L = low level, X = irrelevant, Z = high impedance (off),  
Open = input disconnected or connected driver off

**LOGIC DIAGRAM**

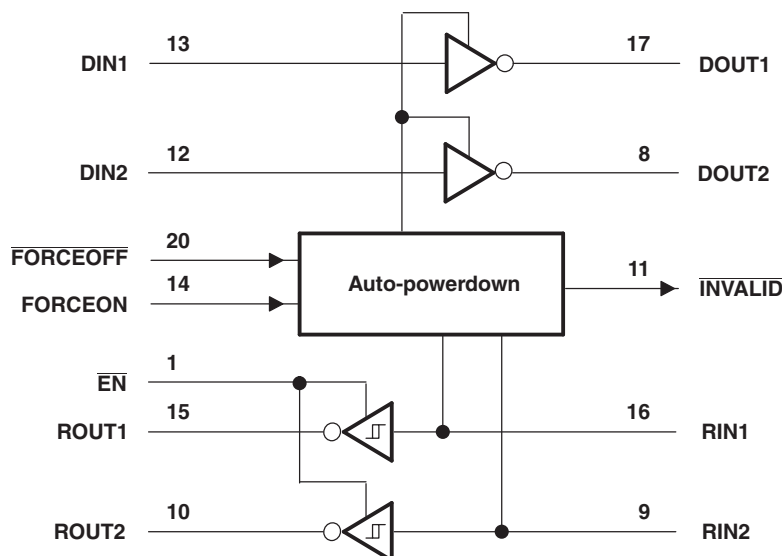

## ABSOLUTE MAXIMUM RATINGS<sup>(1)(2)</sup>

over operating free-air temperature range (unless otherwise noted)

|                  |  |   |                                   |
|------------------|--|---|-----------------------------------|
| V <sub>CC</sub>  | Supply voltage range                     |   | –0.3 V to 6 V                     |
| V+               | Positive output supply voltage range     |   | –0.3 V to 7 V                     |
| V–               | Negative output supply voltage range     |   | 0.3 V to –7 V                     |
| V+ – V–          | Supply voltage difference                |   | 13 V                              |
| V <sub>I</sub>   | Input voltage range                      | Driver, $\overline{\text{FORCEOFF}}$ , $\overline{\text{FORCEON}}$ , $\overline{\text{EN}}$ | –0.3 V to 6 V                     |
|                  |  | Receiver  | –25 V to 25 V                     |
| V <sub>O</sub>   | Output voltage range                     | Driver  | –13.2 V to 13.2 V                 |
|                  |  | Receiver, $\overline{\text{INVALID}}$   | –0.3 V to V <sub>CC</sub> + 0.3 V |
| θ <sub>JA</sub>  | Package thermal impedance <sup>(3)</sup> |   | 83°C/W                            |
| T <sub>J</sub>   | Operating virtual-junction temperature   |   | 150°C                             |
| T <sub>stg</sub> | Storage temperature range                |   | –65°C to 150°C                    |

(1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltages are with respect to network GND.

(3) The package thermal impedance is calculated in accordance with JESD 51-7.

## RECOMMENDED OPERATING CONDITIONS<sup>(1)</sup>

see [Figure 6](#)

|                 |                                |  | MIN | NOM | MAX | UNIT |
|-----------------|--------------------------------|--|-----|-----|-----|------|
| V <sub>CC</sub> | Supply voltage                 | V <sub>CC</sub> = 3.3 V  | 3   | 3.3 | 3.6 | V    |
|                 |                                | V <sub>CC</sub> = 5 V  | 4.5 | 5   | 5.5 |      |
| V <sub>IH</sub> | High-level input voltage       | Driver and control, DIN, $\overline{\text{EN}}$ , $\overline{\text{FORCEOFF}}$ , $\overline{\text{FORCEON}}$ | 2   |     |     | V    |
|                 |                                |  | 2.4 |     |     |      |
| V <sub>IL</sub> | Low-level input voltage        | Driver and control, DIN, $\overline{\text{EN}}$ , $\overline{\text{FORCEOFF}}$ , $\overline{\text{FORCEON}}$ |     |     | 0.8 | V    |
| V <sub>I</sub>  | Input voltage                  | Driver and control, DIN, $\overline{\text{EN}}$ , $\overline{\text{FORCEOFF}}$ , $\overline{\text{FORCEON}}$ | 0   |     | 5.5 | V    |
|                 |                                | Receiver   | –25 |     | 25  |      |
| T <sub>A</sub>  | Operating free-air temperature |  | –40 |     | 125 | °C   |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

## ELECTRICAL CHARACTERISTICS<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 6](#))

| PARAMETER       |                         | TEST CONDITIONS   |   | MIN   | TYP <sup>(2)</sup> | MAX | UNIT |
|-----------------|-------------------------|---|---|-------|--------------------|-----|------|
| I <sub>I</sub>  | Input leakage current   | $\overline{\text{EN}}$ , $\overline{\text{FORCEOFF}}$ , $\overline{\text{FORCEON}}$ |   | ±0.01 |                    | ±1  | μA   |
| I <sub>CC</sub> | Auto-powerdown disabled | V <sub>CC</sub> = 3.3 V or 5 V, T <sub>A</sub> = 25°C                               | No load, $\overline{\text{FORCEOFF}}$ and $\overline{\text{FORCEON}}$ at V <sub>CC</sub>                                    |       | 0.3                | 2   | mA   |
|                 | Powered off             |   | No load, $\overline{\text{FORCEOFF}}$ at GND  |       | 1                  | 20  |      |
|                 | Auto-powerdown enabled  |   | No load, $\overline{\text{FORCEOFF}}$ at V <sub>CC</sub> , $\overline{\text{FORCEON}}$ at GND, All RIN are open or grounded |       | 1                  | 20  | μA   |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

## DRIVER SECTION ELECTRICAL CHARACTERISTICS<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 6](#))

| PARAMETER        | TEST CONDITIONS   | MIN  | TYP <sup>(2)</sup> | MAX | UNIT |
|------------------|---|--|--------------------|-----|------|
| V <sub>OH</sub>  | High-level output voltage<br>DOUT at R <sub>L</sub> = 3 kΩ to GND                                       | 5  | 5.4                |     | V    |
| V <sub>OL</sub>  | Low-level output voltage<br>DOUT at R <sub>L</sub> = 3 kΩ to GND  | –5   | –5.4               |     | V    |
| I <sub>IH</sub>  | High-level input current<br>V <sub>I</sub> = V <sub>CC</sub>  |  | ±0.01              | ±1  | μA   |
| I <sub>IL</sub>  | Low-level input current<br>V <sub>I</sub> = GND   |  | ±0.01              | ±1  | μA   |
| I <sub>OS</sub>  | Short-circuit output current <sup>(3)</sup><br>V <sub>CC</sub> = 3.6 V, V <sub>O</sub> = 0 V            |  | ±35                | ±60 | mA   |
|                  | V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 0 V   |  | ±35                | ±60 |      |
| r <sub>o</sub>   | Output resistance<br>V <sub>CC</sub> , V <sub>+</sub> , and V <sub>–</sub> = 0 V, V <sub>O</sub> = ±2 V | 300  | 10M                |     | Ω    |
| I <sub>off</sub> | Output leakage current<br>FORCEOFF = GND  | V <sub>O</sub> = ±12 V, V <sub>CC</sub> = 3 V to 3.6 V   |                    | ±25 | μA   |
|                  |   | V <sub>O</sub> = ±10 V, V <sub>CC</sub> = 4.5 V to 5.5 V |                    | ±25 |      |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

(3) Short-circuit durations should be controlled to prevent exceeding the device absolute power-dissipation ratings, and not more than one output should be shorted at a time.

## DRIVER SECTION SWITCHING CHARACTERISTICS<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 6](#))

| PARAMETER          |  | TEST CONDITIONS   |                                    | MIN | TYP <sup>(2)</sup> | MAX | UNIT   |
|--------------------|--|---|------------------------------------|-----|--------------------|-----|--------|
|                    | Maximum data rate  | C <sub>L</sub> = 1000 pF, One DOUT switching, R <sub>L</sub> = 3 kΩ (see <a href="#">Figure 1</a> ) |                                    | 250 |                    |     | kbit/s |
| t <sub>sk(p)</sub> | Pulse skew <sup>(3)</sup>                                    | C <sub>L</sub> = 150 pF to 2500 pF, R <sub>L</sub> = 3 kΩ to 7 kΩ (see <a href="#">Figure 2</a> )   |                                    | 100 |                    |     | ns     |
| SR(tr)             | Slew rate, transition region (see <a href="#">Figure 1</a> ) | V <sub>CC</sub> = 3.3 V, R <sub>L</sub> = 3 kΩ to 7 kΩ  | C <sub>L</sub> = 150 pF to 1000 pF | 6   |                    | 30  | V/μs   |
|                    |  |   | C <sub>L</sub> = 150 pF to 2500 pF | 4   |                    | 30  |        |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

(3) Pulse skew is defined as |t<sub>PLH</sub> – t<sub>PHL</sub>| of each channel of the same device.

## RECEIVER SECTION ELECTRICAL CHARACTERISTICS<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 6](#))

| PARAMETER  | TEST CONDITIONS                        | MIN                   | TYP <sup>(2)</sup>    | MAX | UNIT |
|--|--|-----------------------|-----------------------|-----|------|
| V <sub>OH</sub> High-level output voltage                                | I <sub>OH</sub> = −1 mA                | V <sub>CC</sub> − 0.6 | V <sub>CC</sub> − 0.1 |     | V    |
| V <sub>OL</sub> Low-level output voltage                                 | I <sub>OL</sub> = 1.6 mA               |                       |                       | 0.4 | V    |
| V <sub>IT+</sub> Positive-going input threshold voltage                  | V <sub>CC</sub> = 3.3 V                |                       | 1.6                   | 2.4 | V    |
|  | V <sub>CC</sub> = 5 V                  |                       | 1.9                   | 2.4 |      |
| V <sub>IT−</sub> Negative-going input threshold voltage                  | V <sub>CC</sub> = 3.3 V                | 0.6                   | 1.1                   |     | V    |
|  | V <sub>CC</sub> = 5 V                  | 0.8                   | 1.4                   |     |      |
| V <sub>hys</sub> Input hysteresis (V <sub>IT+</sub> − V <sub>IT−</sub> ) |  |                       | 0.5                   |     | V    |
| I <sub>off</sub> Output leakage current                                  | $\overline{\text{EN}} = V_{\text{CC}}$ |                       | ±0.05                 | ±10 | μA   |
| r <sub>i</sub> Input resistance  | V <sub>I</sub> = ±3 V to ±25 V         | 3                     | 5                     | 8.3 | kΩ   |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

## RECEIVER SECTION SWITCHING CHARACTERISTICS<sup>(1)</sup>

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 6](#))

| PARAMETER   | TEST CONDITIONS  | TYP <sup>(2)</sup> | UNIT |
|---|--|--------------------|------|
| t <sub>PLH</sub> Propagation delay time, low-level to high-level output | C <sub>L</sub> = 150 pF, See <a href="#">Figure 3</a>                        | 150                | ns   |
| t <sub>PHL</sub> Propagation delay time, high-level to low-level output | C <sub>L</sub> = 150 pF, See <a href="#">Figure 3</a>                        | 150                | ns   |
| t <sub>en</sub> Output enable time                                      | C <sub>L</sub> = 150 pF, R <sub>L</sub> = 3 kΩ, See <a href="#">Figure 4</a> | 200                | ns   |
| t <sub>dis</sub> Output disable time                                    | C <sub>L</sub> = 150 pF, R <sub>L</sub> = 3 kΩ, See <a href="#">Figure 4</a> | 200                | ns   |
| t <sub>sk(p)</sub> Pulse skew <sup>(3)</sup>                            | See <a href="#">Figure 3</a>   | 50                 | ns   |

(1) Test conditions are C1–C4 = 0.1 μF at V<sub>CC</sub> = 3.3 V ± 0.3 V; C1 = 0.047 μF, C2–C4 = 0.33 μF at V<sub>CC</sub> = 5 V ± 0.5 V.

(2) All typical values are at V<sub>CC</sub> = 3.3 V or V<sub>CC</sub> = 5 V, and T<sub>A</sub> = 25°C.

(3) Pulse skew is defined as |t<sub>PLH</sub> − t<sub>PHL</sub>| of each channel of the same device.

## AUTO-POWERDOWN SECTION ELECTRICAL CHARACTERISTICS

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 5](#))

| PARAMETER               |  | TEST CONDITIONS  | MIN            | MAX | UNIT |
|-------------------------|--|--|----------------|-----|------|
| $V_{T+}(\text{valid})$  | Receiver input threshold for $\overline{\text{INVALID}}$ high-level output voltage | FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$                             |                | 2.7 | V    |
| $V_{T-}(\text{valid})$  | Receiver input threshold for $\overline{\text{INVALID}}$ high-level output voltage | FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$                             | –2.7           |     | V    |
| $V_{T}(\text{invalid})$ | Receiver input threshold for $\overline{\text{INVALID}}$ low-level output voltage  | FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$                             | –0.3           | 0.3 | V    |
| $V_{OH}$                | $\overline{\text{INVALID}}$ high-level output voltage                              | $I_{OH} = -1 \text{ mA}$ , FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$  | $V_{CC} - 0.6$ |     | V    |
| $V_{OL}$                | $\overline{\text{INVALID}}$ low-level output voltage                               | $I_{OL} = 1.6 \text{ mA}$ , FORCEON = GND, $\overline{\text{FORCEOFF}} = V_{CC}$ |                | 0.4 | V    |


## AUTO-POWERDOWN SECTION SWITCHING CHARACTERISTICS

over recommended ranges of supply voltage and operating free-air temperature (unless otherwise noted) (see [Figure 5](#))


| PARAMETER            |   | TYP <sup>(1)</sup> | UNIT |
|----------------------|---|--------------------|------|
| $t_{\text{valid}}$   | Propagation delay time, low- to high-level output | 1                  | μs   |
| $t_{\text{invalid}}$ | Propagation delay time, high- to low-level output | 30                 | μs   |
| $t_{\text{en}}$      | Supply enable time                                | 100                | μs   |

(1) All typical values are at  $V_{CC} = 3.3 \text{ V}$  or  $V_{CC} = 5 \text{ V}$ , and  $T_A = 25^\circ\text{C}$ .

## PARAMETER MEASUREMENT INFORMATION

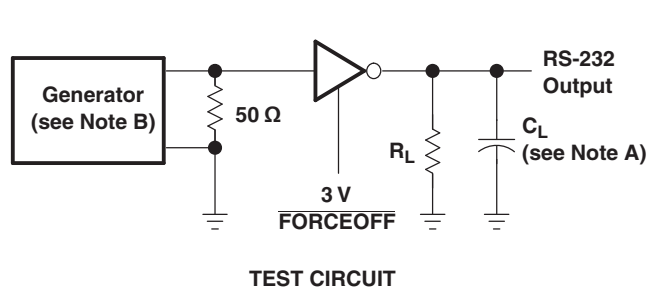



$$SR(tr) = \frac{6\text{ V}}{t_{THL} \text{ or } t_{TLH}}$$

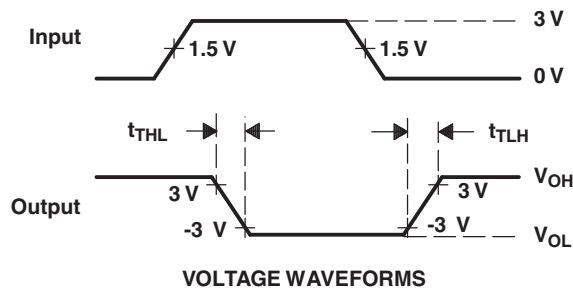

A.  $C_L$  includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50\ \Omega$ , 50% duty cycle,  $t_r \leq 10\text{ ns}$ ,  $t_f \leq 10\text{ ns}$ .



Figure 1. Driver Slew Rate

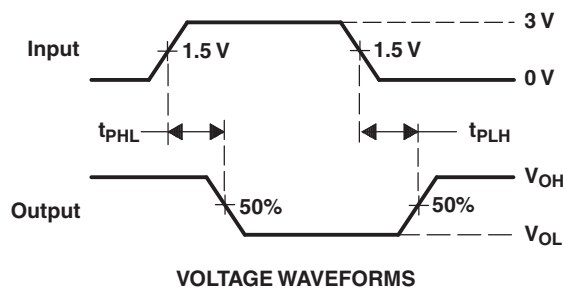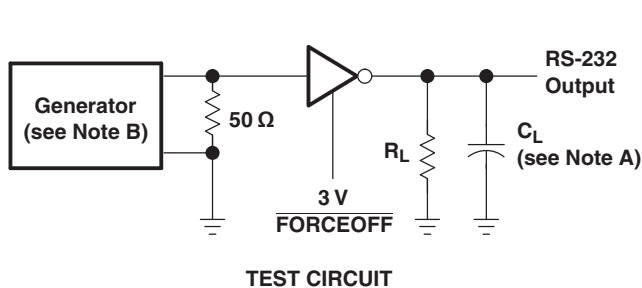

A.  $C_L$  includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 250 kbit/s,  $Z_O = 50\ \Omega$ , 50% duty cycle,  $t_r \leq 10\text{ ns}$ ,  $t_f \leq 10\text{ ns}$ .

Figure 2. Driver Pulse Skew

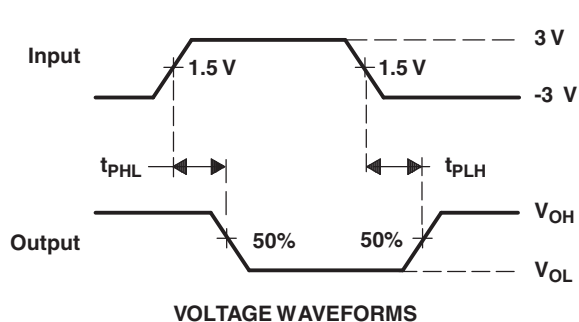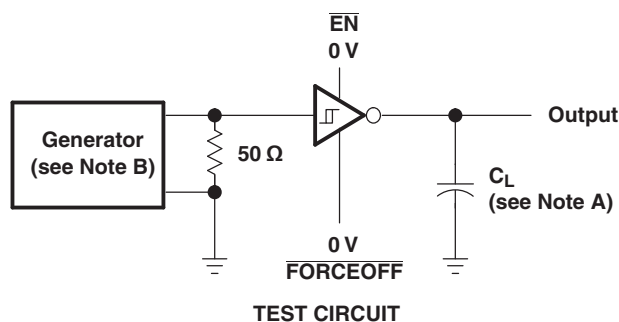


A.  $C_L$  includes probe and jig capacitance.

B. The pulse generator has the following characteristics:  $Z_O = 50\ \Omega$ , 50% duty cycle,  $t_r \leq 10\text{ ns}$ ,  $t_f \leq 10\text{ ns}$ .

Figure 3. Receiver Propagation Delay Times

### PARAMETER MEASUREMENT INFORMATION (continued)

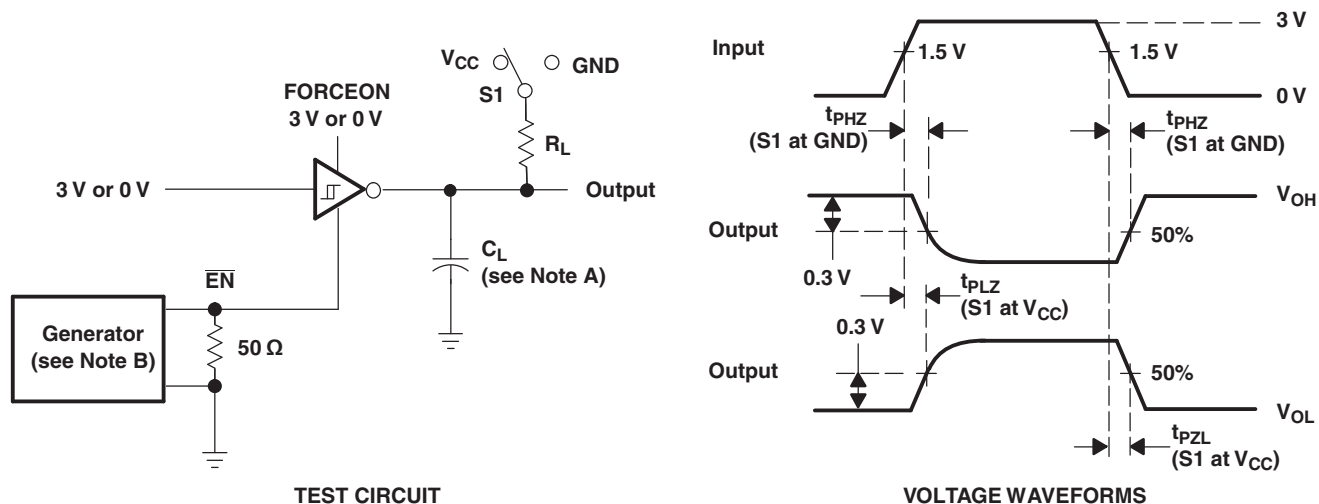




A.C<sub>L</sub> includes probe and jig capacitance.

B. The pulse generator has the following characteristics:  $Z_0 = 50 \, \Omega$ , 50% duty cycle,  $t_r \leq 10 \, \text{ns}$ ,  $t_f \leq 10 \, \text{ns}$ .

### Figure 4. Receiver Enable and Disable Times



# PARAMETER MEASUREMENT INFORMATION (continued)

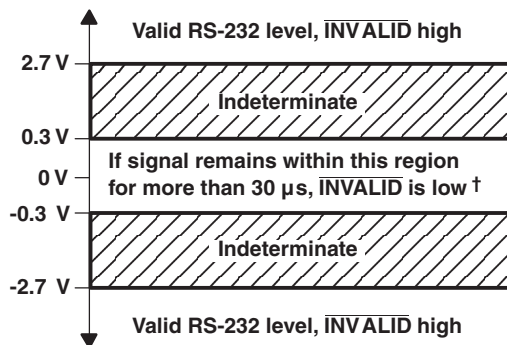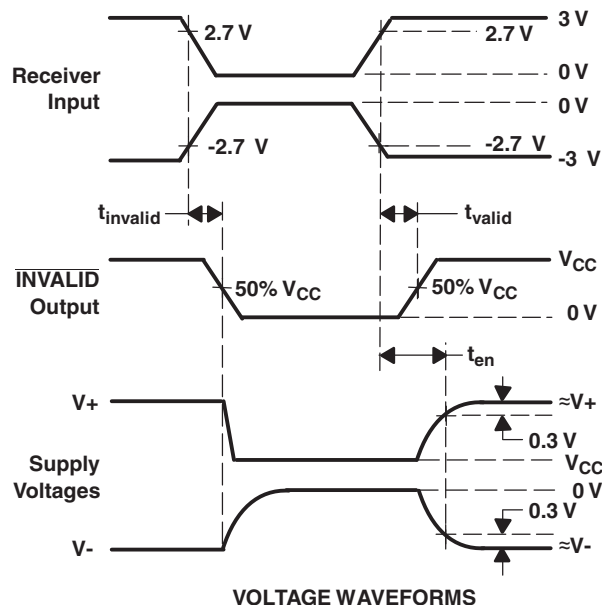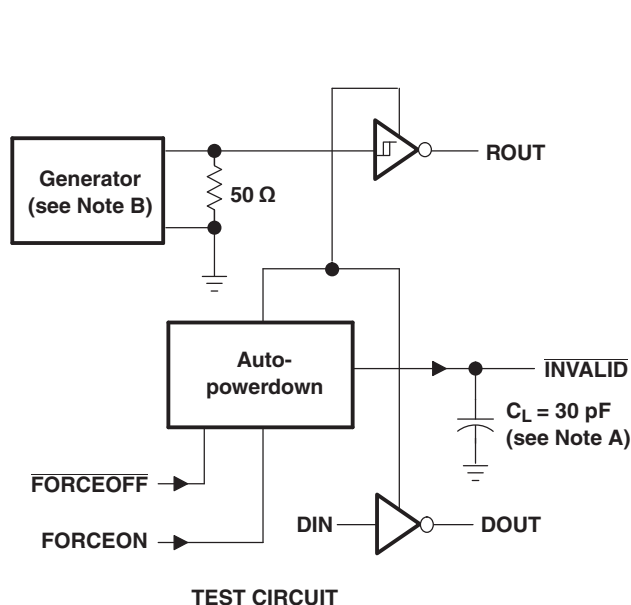


$^\dagger$  Auto-powerdown disables drivers and reduces supply current to 1  $\mu\text{A}$ .

A.  $C_L$  includes probe and jig capacitance.

B. The pulse generator has the following characteristics: PRR = 5 kbit/s,  $Z_O = 50 \Omega$ , 50% duty cycle,  $t_r \leq 10 \text{ ns}$ ,  $t_f \leq 10 \text{ ns}$ .

Figure 5.  $\overline{\text{INVALID}}$  Propagation Delay Times and Supply Enabling Time

# APPLICATION INFORMATION

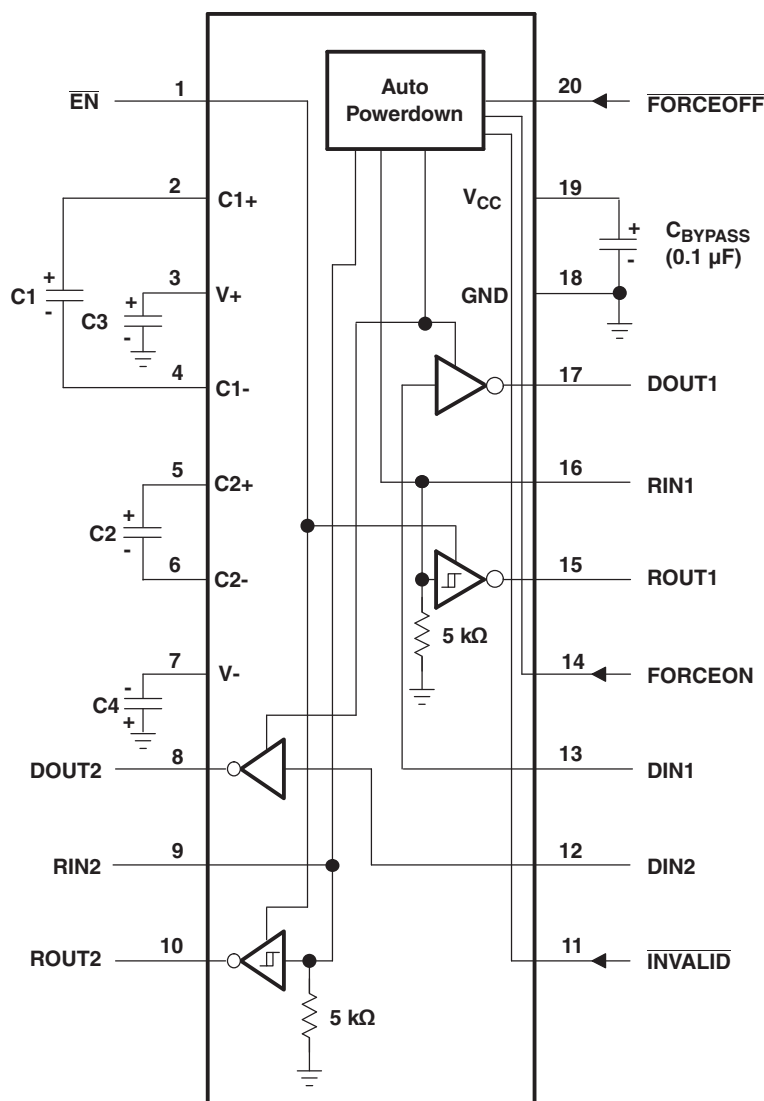

A.C3 can be connected to  $V_{CC}$  or GND.

B.Resistor values shown are nominal.

C.Nonpolarized ceramic capacitors are acceptable. If polarized tantalum or electrolytic capacitors are used, they should be connected as shown.

$V_{CC}$  vs CAPACITOR VALUES

| $V_{CC}$          | C1            | C2, C3, C4   |
|-------------------|---------------|--------------|
| 3.3 V $\pm$ 0.3 V | 0.1 $\mu$ F   | 0.1 $\mu$ F  |
| 5 V $\pm$ 0.5 V   | 0.047 $\mu$ F | 0.33 $\mu$ F |
| 3 V to 5.5 V      | 0.1 $\mu$ F   | 0.47 $\mu$ F |

Figure 6. Typical Operating Circuit and Capacitor Values

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TRS3223QPWRQ1 | TSSOP        | PW              | 20   | 2000 | 330.0              | 16.4               | 6.95    | 7.0     | 1.4     | 8.0     | 16.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TRS3223QPWRQ1 | TSSOP        | PW              | 20   | 2000 | 353.0       | 353.0      | 32.0        |



## TSSOP - 1.2 mm max height

### SMALL OUTLINE PACKAGE



1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X



4220206/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated