

TUSB2E22 eUSB2-USB 2.0 双路中继器

1 特性

- 符合 USB 2.0 和 eUSB2 标准 (修订版 1.1)
- 支持低速 (LS)、全速 (FS)、高速 (HS)
- 具有 2:2 交叉开关多路复用器的双路中继器
- 支持主机和器件模式 (DRD)
- 四种 eUSB2 补偿设置, 可满足不同的系统要求
- eUSB2 LS/FS 信令满足 eUSB2 接口的 1.2V 选项要求

2 应用

- 通信设备
- 企业系统
- 笔记本电脑和台式机
- 工业
- 平板电脑
- 便携式电子产品

3 说明

TUSB2E22 允许在使用较低电压工艺的较新处理器上实现符合 USB 2.0 标准的端口。

TUSB2E22 是一款支持器件和主机模式且符合 USB 标准的 eUSB2-USB 2.0 中继器。

TUSB2E22 支持 USB 低速 (LS)、全速 (FS) 和高速 (HS) 信号。

TUSB2E22 旨在连接在 1.2V 单端信令下工作的 eUSB2 eDSPr 或 eUSPr。


TUSB2E22 通过 EQ0 和 EQ1 引脚提供四种补偿设置级别。这些设置可用于优化不同 eUSB2 通道损耗曲线的补偿。

封装信息


器件型号	封装 ⁽¹⁾	封装尺寸 ⁽²⁾
TUSB2E22	YCG (DSBGA, 25)	2mm × 2mm
	RZA (VQFN, 20)	3.5mm × 3.5mm

(1) 如需了解所有可用封装, 请参阅数据表末尾的可订购产品附录。

(2) 封装尺寸 (长 × 宽) 为标称值, 并包括引脚 (如适用)。

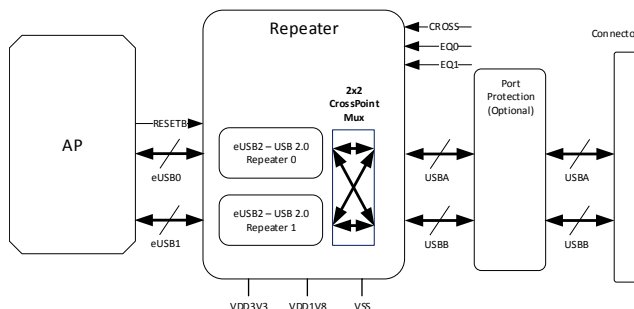

简化版原理图

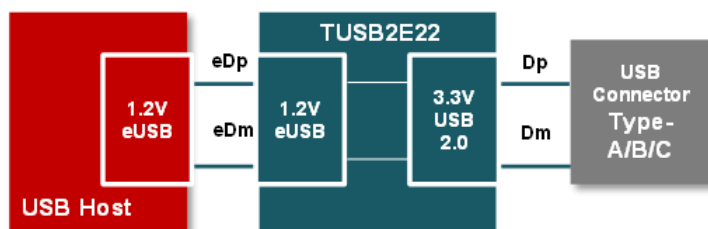

TUSB2E22



Table of Contents

1 特性	1	7.4 Device Functional Modes.....	13
2 应用	1	8 Applications and Implementation	14
3 说明	1	8.1 Application Information.....	14
4 Pin Configuration and Functions	3	8.2 Typical Dual Port System Implementation.....	14
5 Specifications	6	8.3 Power Supply Recommendations.....	15
5.1 Absolute Maximum Ratings.....	6	8.4 Layout.....	16
5.2 ESD Ratings.....	6	9 Device and Documentation Support	19
5.3 Recommended Operating Conditions.....	6	9.1 Documentation Support.....	19
5.4 Thermal Information.....	7	9.2 接收文档更新通知.....	19
5.5 Electrical Characteristics.....	7	9.3 支持资源.....	19
5.6 Switching Characteristics.....	9	9.4 Trademarks.....	19
5.7 Timing Requirements.....	10	9.5 静电放电警告.....	19
6 Parametric Measurement Information	11	9.6 术语表.....	19
7 Detailed Description	12	10 Revision History	19
7.1 Overview.....	12	11 Mechanical, Packaging, and Orderable Information	20
7.2 Functional Block Diagram.....	12		
7.3 Feature Description.....	13		

4 Pin Configuration and Functions

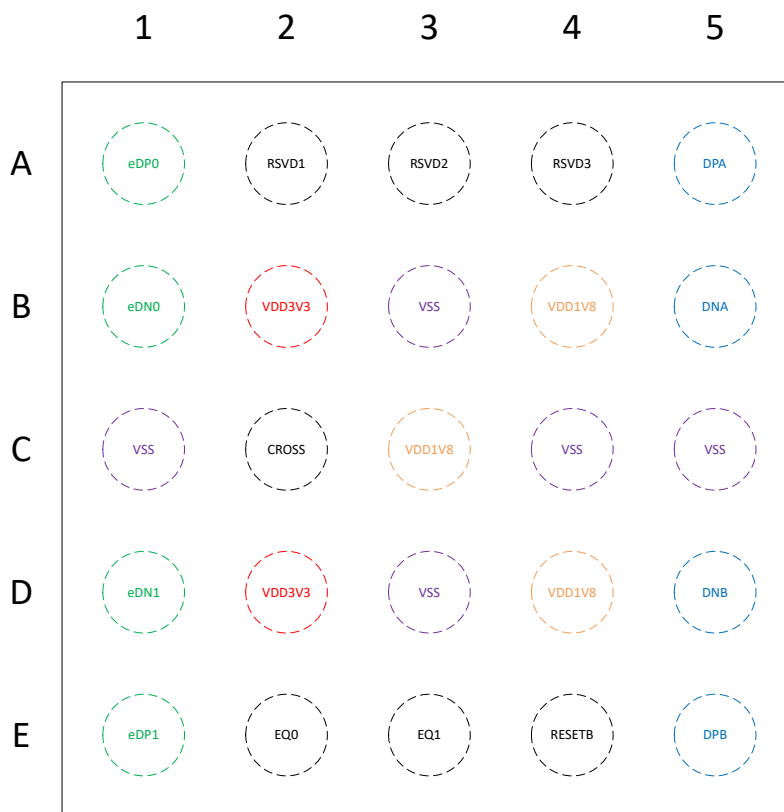


图 4-1. YCG Package, 25-Pin DSBGA (Top View)

Legend		
3.3 V Rails	1.8 V Rails	eUSB2 Data Signals
USB2 Data Signals		GPIO Digital Input or Output

表 4-1. Pin Functions

PIN		TYPE	RESET STATE	ASSOCIATED ESD SUPPLY	DESCRIPTION
NO.	NAME				
B2, D2	VDD3V3	PWR	N/A	N/A	3.3 V Supply Voltage
C3, B4, D4	VDD1V8	PWR	N/A	N/A	1.8 V Analog Supply Voltage
C1, C4, B3, D3, C5	VSS	GND	N/A	N/A	GND
E4	RESETB	Digital Input	N/A	VDD1V8	Active Low Reset. Upon deassertion of RESETB both repeaters will be enabled and be in eUSB2 default mode awaiting configuration from eDSPr or eUSPr.
C2	CROSS	Digital Input	N/A	VDD3V3	Indicates mux orientation. Used to specify orientation of internal Crossbar switch CROSS = Low: eUSB0 « - » USB A and eUSB1 « - » USB B CROSS = High: eUSB0 « - » USB B and eUSB1 « - » USB A Sampled at deassertion of RESETB
A2	RSVD1	Digital I/O	Hi-Z	VDD3V3	Reserved pins connect 1 k Ω pull up to 1.8 V
A3	RSVD2	Digital I/O	Hi-Z	VDD3V3	Reserved pins connect 1 k Ω pull up to 1.8 V
A4	RSVD3	Digital Output	Hi-Z	VDD3V3	Reserved pin leave it unconnected

表 4-1. Pin Functions (续)

PIN		TYPE	RESET STATE	ASSOCIATED ESD SUPPLY	DESCRIPTION
NO.	NAME				
E2	EQ0	Digital I/O	Hi-Z (input)	VDD3V3	Compensation Level 0: EQ1=low EQ0= low Compensation Level 1: EQ1=low EQ0=high Compensation Level 2: EQ1=high EQ0=low Compensation Level 3: EQ1=high EQ0=high Pins are sampled at RESETB deassertion
E3	EQ1	Digital I/O	Hi-Z (input)	VDD3V3	
A1	eDP0	Analog I/O	Hi-Z	VDD1V8	
B1	eDN0	Analog I/O	Hi-Z	VDD1V8	
D1	eDN1	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 1 D- pin
E1	eDP1	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 1 D+ pin
A5	DPA	Analog I/O	Hi-Z	VDD3V3	USB port A D+ pin
B5	DNA	Analog I/O	Hi-Z	VDD3V3	USB port A D- pin
D5	DNB	Analog I/O	Hi-Z	VDD3V3	USB port B D- pin
E5	DPB	Analog I/O	Hi-Z	VDD3V3	USB port B D+ pin

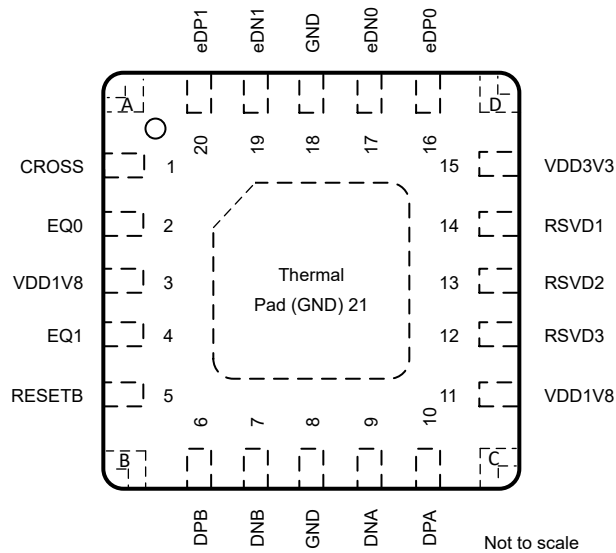


图 4-2. 0.5-mm Pitch RZA Package, 20-Pin VQFN (Top View)

表 4-2. Pin Functions

PIN		TYPE ⁽¹⁾	RESET STATE	ASSOCIATED ESD SUPPLY	DESCRIPTION
NAME	NO.				
VDD3V3	15	PWR	N/A	N/A	3.3 V supply voltage
VDD1V8	3, 11	PWR	N/A	N/A	1.8 V analog supply voltage
GND	8, 18, Thermal Pad (21), Corner Anchors (A, B, C, D)	GND	N/A	N/A	GND
RESETB	5	Digital Input	N/A	VDD1V8	Active Low Reset. Upon deassertion of RESETB both repeaters will be enabled and be in eUSB2 default mode awaiting configuration from eDSPr or eUSPr.
CROSS	1	Digital Input	N/A	VDD3V3	Indicates mux orientation. Used to specify orientation of internal Crossbar switch CROSS = Low: eUSB0 « - » USBA and eUSB1 « - » USBB CROSS = High: eUSB0 « - » USBB and eUSB1 « - » USBA Sampled at deassertion of RESETB
RSVD1	14	Digital I/O	Hi-Z	VDD3V3	Reserved pins connect 1 k Ω pull up to 1.8 V
RSVD2	13	Digital I/O	Hi-Z	VDD3V3	Reserved pins connect 1 k Ω pull up to 1.8 V
RSVD3	12	Digital Output	Hi-Z	VDD3V3	Reserved pin leave it unconnected

表 4-2. Pin Functions (续)

PIN		TYPE ⁽¹⁾	RESET STATE	ASSOCIATED ESD SUPPLY	DESCRIPTION
NAME	NO.				
EQ0	2	Digital I/O	Hi-Z (input)	VDD3V3	Compensation Level 0: EQ1=low EQ0= low Compensation Level 1: EQ1=low EQ0=high Compensation Level 2: EQ1=high EQ0=low Compensation Level 3: EQ1=high EQ0=high Pins are sampled at RESETB deassertion
EQ1	4	Digital I/O	Hi-Z (input)	VDD3V3	
eDP0	16	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 0 D+ pin
eDN0	17	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 0 D- pin
eDN1	19	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 1 D- pin
eDP1	20	Analog I/O	Hi-Z	VDD1V8	eUSB2 port 1 D+ pin
DPA	10	Analog I/O	Hi-Z	VDD3V3	USB port A D+ pin
DNA	9	Analog I/O	Hi-Z	VDD3V3	USB port A D- pin
DNB	7	Analog I/O	Hi-Z	VDD3V3	USB port B D- pin
DPB	6	Analog I/O	Hi-Z	VDD3V3	USB port B D+ pin

(1) PWR = power, GND = ground, I = input, O = output

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Supply voltage range	V _{DD3V3}	- 0.3	4.32	V
Analog Supply voltage range	V _{DD1V8}	- 0.3	2.1	V
Voltage range	DPA, DNA, DPB, DNB , 1000 total number of short events and cumulative duration of 1000 hrs.	- 0.3	6	V
Voltage range	eDP0, eDN0, eDP1, eDN1	- 0.3	1.6	V
Voltage range	CROSS, RESETB, RSVD1, RSVD2, RSVD3, EQ1, EQ0	- 0.3	2.1	V
Junction temperature	T _{J(max)}		125	°C
Storage temperature	T _{stg}	- 65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

5.2 ESD Ratings

			VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±1500	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _{DD3V3}	Supply voltage (VDD3V3)	3.0	3.3	3.6	V
V _{DD1V8}	Analog Supply voltage (VDD1V8)	1.62	1.8	1.98	V
T _A	Operating free-air temperature	-20		85	°C
T _J	Junction temperature	-20		105	°C
T _{CASE}	Case temperature	-20		105	°C
T _{PCB}	PCB temperature (1mm away from the device)	-20		92	°C

5.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TUSB2E22	TUSB2E22	UNIT
		YCG (DSBGA)	RZA (VQFN)	
		25 PINS	20 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	73.5	46.0	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	0.4	39.0	°C/W
$R_{\theta JC(bottom)}$	Junction-to-case (bottom) thermal resistance	—	13.2	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	18.9	21.3	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	0.2	1.6	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	18.9	21.2	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

5.5 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DIGITAL INPUTS						
V_{IH}	High level input voltage	CROSS, EQ1, EQ0	1.053			V
V_{IL}	Low-level input voltage	CROSS, EQ1, EQ0			0.693	V
V_{IL}	Low-level input voltage	RESETB			0.35	V
V_{IH}	High level input voltage	RESETB	0.75			V
I_{IH}	High level input current	$V_{IH} = 1.98\text{ V}$, $V_{DD3V3} = 3.0\text{ V}$ or 0 V , $V_{DD1V8} = 1.62\text{ V}$ or 0 V CROSS, RESETB, EQ1, EQ0			2	μA
I_{IL}	Low level input current	$V_{IL} = 0\text{ V}$, $V_{DD3V3} = 3.0\text{ V}$ or 0 V , $V_{DD1V8} = 1.62\text{ V}$ or 0 V CROSS, RESETB, EQ1, EQ0			2	μA
USBA (DPA, DNA), USBB (DPB, DNB)						
Z_{in_Dx}	Impedance to GND, no pull up/down	$V_{in} = 3.6\text{ V}$, $V_{DD3V3} = 3.0\text{ V}$ USB 2.0 Specification Section 7.1.6	390			$k\Omega$
R_{PUI}	Bus Pull-up Resistor on Upstream Facing Port (idle)	USB 2.0 Specification Section 7.1.5	0.92	1.1	1.475	$k\Omega$
R_{PUR}	Bus Pull-up Resistor on Upstream Facing Port (receiving)	USB 2.0 Specification Section 7.1.5	1.525	2.2	2.99	$k\Omega$
R_{PD}	Bus Pull-down Resistor on Downstream Facing Port	USB 2.0 Specification Section 7.1.5	14.35	19	24.6	$k\Omega$
V_{HSTERM}	Termination voltage in highspeed	USB 2.0 Specification Section 7.1.6.2, The output voltage in the high-speed idle state	– 10		10	mV
USB TERMINATION						
Z_{HSTERM}	Driver Output Resistance (which also serves as high speed termination)	($V_{OH} = 0$ to 600 mV) USB 2.0 Specification Section 7.1.1.1,	40.5	45	49.5	Ω
USBA, USBB INPUT LEVELS LS/FS						
V_{IH}	High (driven)	USB 2.0 Specification Section 7.1.4 (measured at connector)	2			V
V_{IHZ}	High (floating)	USB 2.0 Specification Section 7.1.4 (HOST downstream port pull down resistor enabled and external device pull up $1.5K \pm 5\%$ to $3.0\text{--}3.6\text{ V}$).	2.7		3.6	V
V_{IL}	Low	USB 2.0 Specification Section 7.1.4			0.8	V
USBA, USBB OUTPUT LEVELS LS/FS						

5.5 Electrical Characteristics (续)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{OL}	Low	USB 2.0 Specification Section 7.1.1, (measured at connector with RL of 1.425 kΩ to 3.6 V.)	0		0.3	V
V _{OH}	High (Driven)	USB 2.0 Specification Section 7.1.1 (measured at connector with RL of 14.25 kΩ to GND.)	2.8		3.6	V
Z _{FSTERM}	Driver Series Output Resistance	USB 2.0 Specification Section 7.1.1, Measured it during VOL or VOH	28		44	Ω
V _{CRS}	Output Signal Crossover Voltage	Measured as in USB 2.0 Specification Section 7.1.1 Figure 7-8; Excluding the first transition from the Idle state	1.3		2	V
USBA, USBB OUTPUT LEVELS HS						
V _{HSOH}	High-speed data signaling high	USB 2.0 Specification Section 7.1.7.2, measured single ended peak voltage per USB 2.0 test measurement spec, Test load is an ideal 45 Ω to GND on DP and DN	360		440	mV
V _{HSOL}	High-speed data signaling low, driver is off termination is on (measured single ended)	USB 2.0 Specification Section 7.1.7.2, Test load is an ideal 45 Ω to GND on DP and DN.	- 10		10	mV
V _{CHIRPJ}	Chirp J level (differential voltage)	USB 2.0 Specification Section 7.1.7.2 , Test load is an ideal 45 Ω to GND on DP and DN.	700	900	1100	mV
V _{CHIRPK}	Chirp K level (differential voltage)	USB 2.0 Specification Section 7.1.7.2 , Test load is an ideal 45 Ω to GND on DP and DN.	-900	-700	-500	mV
U2_TX _{CM}	High-speed TX DC Common Mode		-50	200	500	mV
eUSB2 TERMINATION						
R _{SRC_HS}	High speed transmit source termination impedance	eUSB2 Specification Section 7.1.1	33	40	47	Ω
Δ R _{SRC_HS}	High speed source impedance mismatch	eUSB2 Specification Section 7.1.1			4	Ω
R _{RCV_DIF}	High speed differential receiver termination (repeater)	eUSB2 Specification Section 7.1.2	74	80	86	Ω
R _{PD}	Pull-down resistors on eDP/eDN	eUSB2 Specification Section 7.3, active during LS, FS and HS	6	8	10	kΩ
R _{SRC_LSFS}	Transmit output impedance	eUSB2 Specification Section 7.2.1, Table 7-13 TX output impedance to match spec version 1.10	28	44	59	Ω
eUSB0, eUSB1 FS/LS INPUT LEVELS						
V _{IL}	Single-ended input low	eUSB2 Specification Section 7.2.1, Table 7-13	- 0.1		0.399	V
V _{IH}	Single-ended input high	eUSB2 Specification Section 7.2.1, Table 7-13	0.819		1.386	V
V _{HYS}	Receive single-ended hysteresis voltage	eUSB2 Specification Section 7.2.1, Table 7-13	43.2			mV
eUSB0, eUSB1 FS/LS OUTPUT LEVELS						
V _{OL}	Single-ended output low	eUSB2 Specification Section 7.2.1, Table 7-13			0.198	V
V _{OH}	Single-ended output high	eUSB2 Specification Section 7.2.1, Table 7-13	0.918		1.32	V
eUSB0, eUSB1 HS INPUT LEVELS						

5.5 Electrical Characteristics (续)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{RX_CM}	Receive DC common mode range (low)	eUSB2 Specification Section 7.1.2 (normative), low DC common mode RX must tolerate			120	mV
V _{RX_CM}	Receive DC common mode range (high)	eUSB2 Specification Section 7.1.2 (normative), high DC common mode RX must tolerate	280			mV
V _{CM_RX_AC}	Receiver AC common mode (50MHz-480MHz)	eUSB2 Specification Section 7.1.2 (informative), across the DC common mode range of 120 mV to 280 mV. (RX capability tested with intentional TX Rise/Fall Time mismatch and prop delay mismatch)	- 60		60	mV
C _{RX_CM}	Receive center-tapped capacitance	eUSB2 Specification Section 7.1.2 (informative)	15		50	pF
V _{RX_DIF_SENS}	Receive differential sensitivity, RX should be able to receive less than this value.	eUSB2 Specification Section 7.1.2, V _{CM} = 120 mV to 450 mV			120	mVp-p

eUSB0, eUSB1 HS OUTPUT LEVELS

V _{ETX_CM_AC}	Transmit CM AC (50MHz-480MHz)	eUSB2 Specification Section 7.1.1, An ideal 80 Ω Rx differential termination and center tap cap of 15pF, with maximum DC common mode range	- 30		30	mV
V _{EHSOD}	Transmit differential (terminated)	Measured p2p, R _L = 80 Ω, ideal 80 Ω Rx differential termination load		400		mV
V _{E_TX_CM}	Transmit DC common mode	eUSB2 Specification Section 7.1.1	170		230	mV

5.6 Switching Characteristics

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DPA, DNA, DPB, DNB, FS Driver Switching Characteristics						
T _{FR}	Rise Time (10% - 90%)	USB 2.0 Specification Figure 7-8; Figure 7-9	4		20	ns
T _{FF}	Fall Time (10% - 90%)	USB 2.0 Specification Figure 7-8; Figure 7-9	4		20	ns
T _{FRFM}	(T _{FR} /T _{FM})	USB 2.0 Specification 7.1.2, Excluding the first transition from the Idle state	90		111.1	%
DPA, DNA, DPB, DNB, LS Driver Switching Characteristics						
T _{LR}	Rise Time (10% - 90%)	USB 2.0 Specification Figure 7-8	75		300	ns
T _{LF}	Fall Time (10% - 90%)	USB 2.0 Specification Figure 7-8	75		300	ns
eDP0, eDN0, eDP1, eDN1, HS Driver Switching Characteristics						
T _{EHSRF_M}	Transmit rise/fall mismatch	eUSB2 Specification Section 7.2.1, Rise/fall mismatch = absolute delta of (rise - fall time) / (average of rise and fall time).			25	%
eDP0, eDN0, eDP1, eDN1, LS/FS Driver Switching Characteristics						
T _{ERF}	Rise/Fall Time (10% - 90%)	eUSB2 Specification Section 7.2.1	2		6	ns
T _{ERF_MM}	Transmit rise/fall mismatch	eUSB2 Specification Section 7.2.1			25	%

5.7 Timing Requirements

		MIN	NOM	MAX	UNIT
RESET TIMING					
$t_{_VDD1V8_RAM_P}$	Ramp time for VDD1V8 to reach minimum 1.62 V			2	ms
$t_{_VDD3V3_RAM_P}$	Ramp time for VDD3V3 to reach minimum 3.0 V			2	ms
$t_{_su_CROSS}$	Setup time for CROSS sampled at the deassertion of RESETB	0			ms
$t_{_hd_CROSS}$	Hold time for CROSS sampled at the deassertion of RESETB	3			ms
$t_{_aRESETB}$	duration for RESETB to be asserted low to complete reset while powered	10			us
$t_{_RH_READY}$	Time for eUSB2 interface to be ready after RESETB is deasserted or (VDD1V8 and VDD3V3) reach minimum recommended voltages, whichever is later			3	ms

6 Parametric Measurement Information

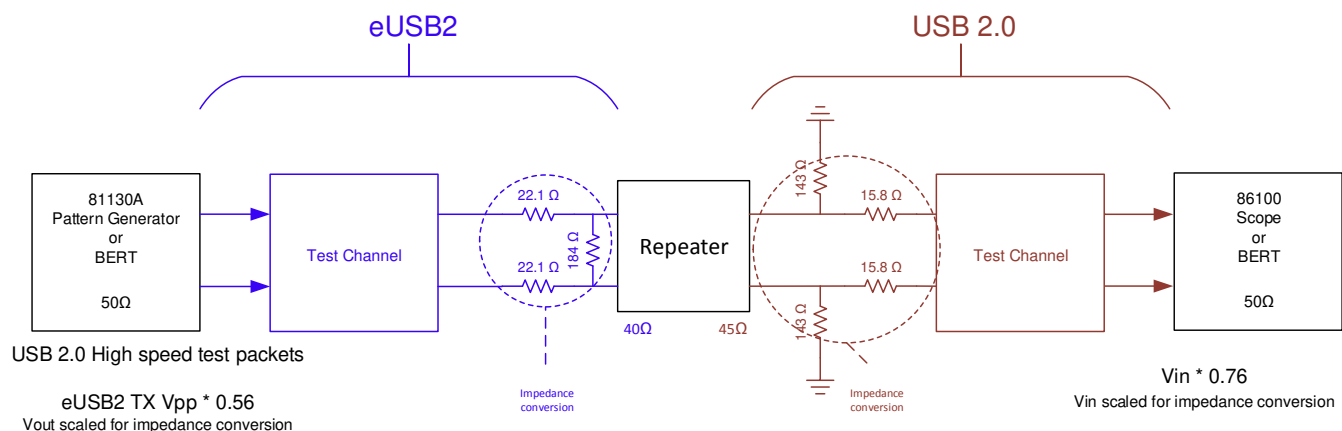


图 6-1. USB 2.0 TX Output (Egress) Jitter, Eye Mask Test Setup

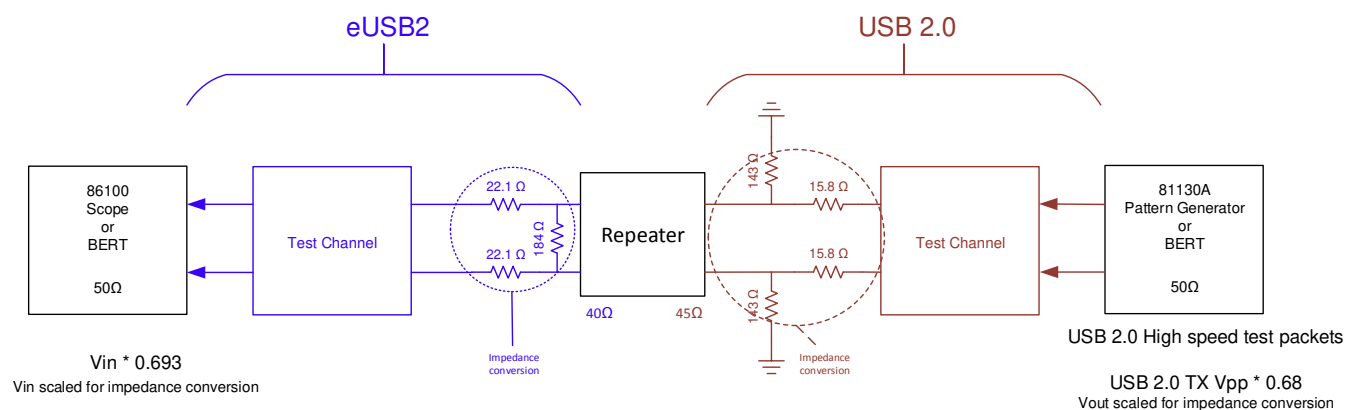


图 6-2. eUSB2 TX Output (Ingress) Jitter, Eye Mask Test Setup


7 Detailed Description

7.1 Overview

The TUSB2E22 is a dual eUSB2 to USB 2.0 repeater that resides between SoC with one or two eUSB2 port and an external connector that supports USB 2.0. Each repeater is independently configurable as either a host or device repeater (DRD repeater).

The USB 2.0 ports A and B can be swapped by an internal crossbar switch by configuring CROSS pin at reset. CROSS pin is ignored after power up reset.

7.2 Functional Block Diagram

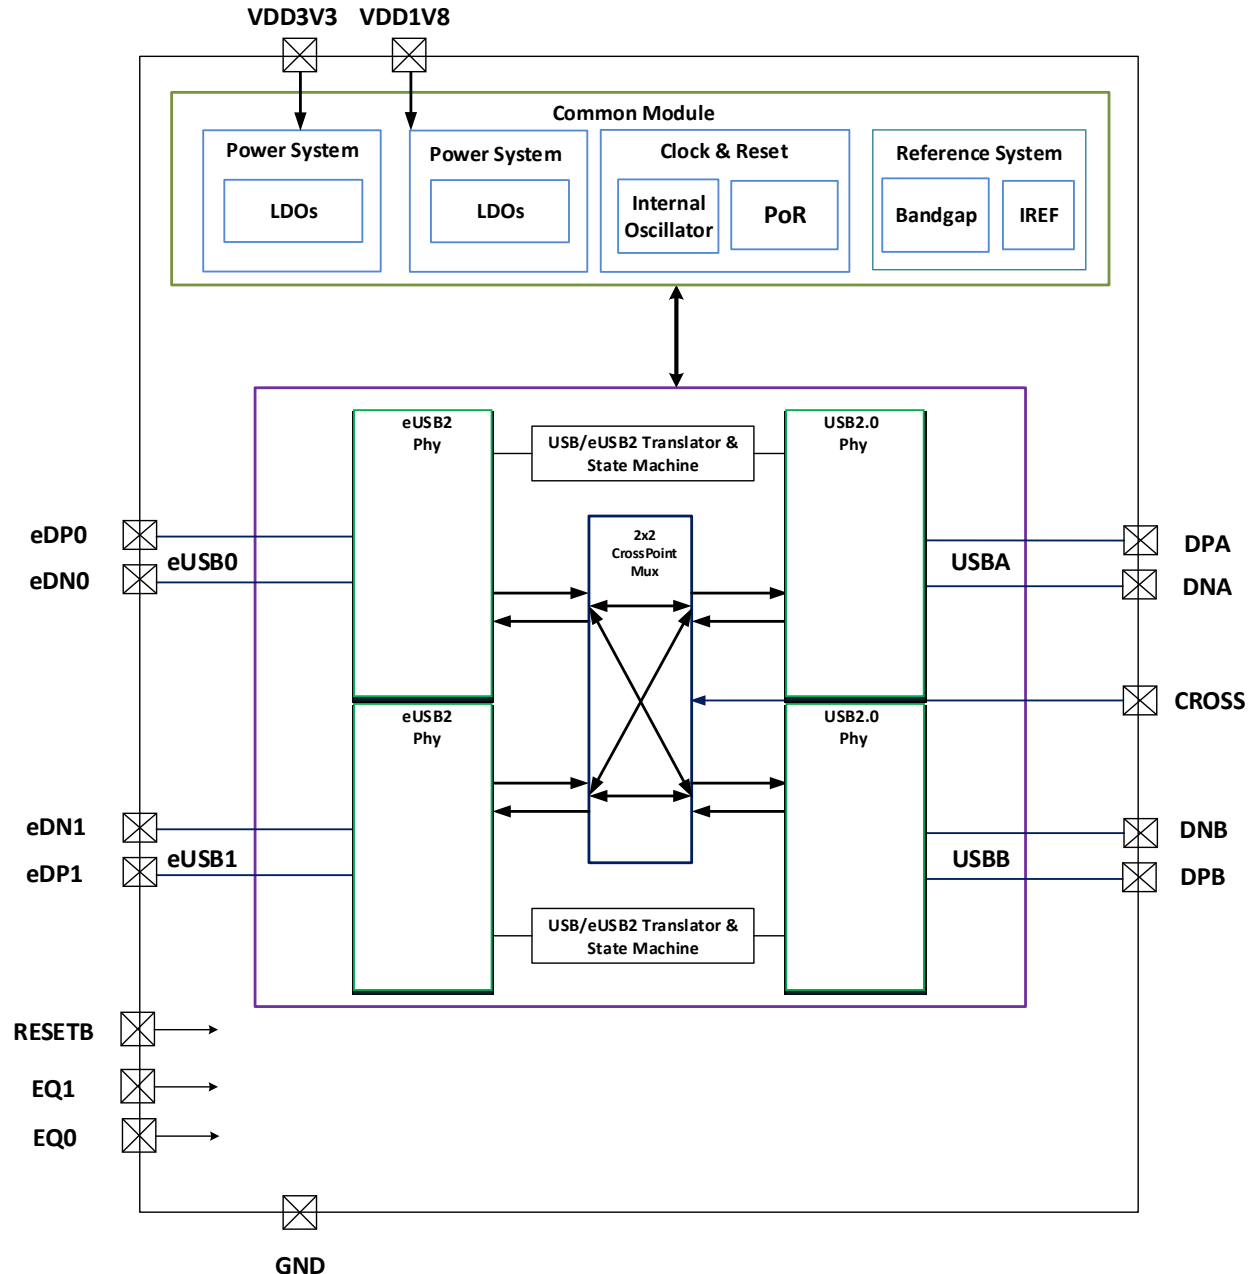

7.3 Feature Description

7.3.1 USB 2.0

TUSB2E22 supports two USB 2.0 ports. Each port supports Low Speed, Full Speed and High Speed operations.

7.3.2 eUSB2

TUSB2E22 supports two eUSB2 ports with 1.2V single ended signaling. Each port support Low Speed, Full Speed and High Speed operations.

7.3.3 Cross MUX

TUSB2E22 supports a cross mux functionality that can map either of the two eUSB2 ports to the two USB 2.0 ports providing design flexibility.

7.4 Device Functional Modes

7.4.1 Repeater Mode

Upon deassertion of RESETB and after t_{RH_READY} , TUSB2E22 will enable and enter default state and be ready to accept eUSB2 packets.

表 7-1. Number of Hubs Supported with Host and/or Peripheral Repeater

Number of eUSB2 Repeaters	Number of Hubs Operating at HS	Number of Hubs Operating at FS	
1	4	2	Number of hubs operating at FS is reduced due to $T_{e_to_U_DJ1}$ and T_{RJR1} . Number of hubs operating at HS is reduced due to SOP truncation and EOP dribble
2	3	1	
0	5	5	non-eUSB2 system for reference

7.4.2 Power Down Mode

RESETB could be used as a power down pin when asserted low. Power down mode will put TUSB2E22 in lowest power mode.

7.4.3 CROSS

CROSS pin will control the orientation of the integrated cross bar mux.

Upon deassertion of RESETB followed by internally generated reset signal and 1ms delay, CROSS pin is sampled and latched.

The system needs to make sure that CROSS meets t_{su_CROSS} and t_{hd_CROSS} with respect to power supply ramp and RESETB deassertion per [节 8.3](#).

Changes to the state of the CROSS input while RESETB is high will be ignored.

表 7-2. eUSB2 to USB Mapping

	CROSS = 0	CROSS = 1
eUSB0 (eDP0, eDN0)	USBA (DPA, DNA)	USBB (DPB, DNB)
eUSB1 (eDP1, eDN1)	USBB (DPB, DNB)	USBA (DPA, DNA)

8 Applications and Implementation

备注

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

8.1 Application Information

TUSB2E22 can be used in either HOST or Peripheral implementation. The mode is configured by the eUSB2 SoC.

8.2 Typical Dual Port System Implementation

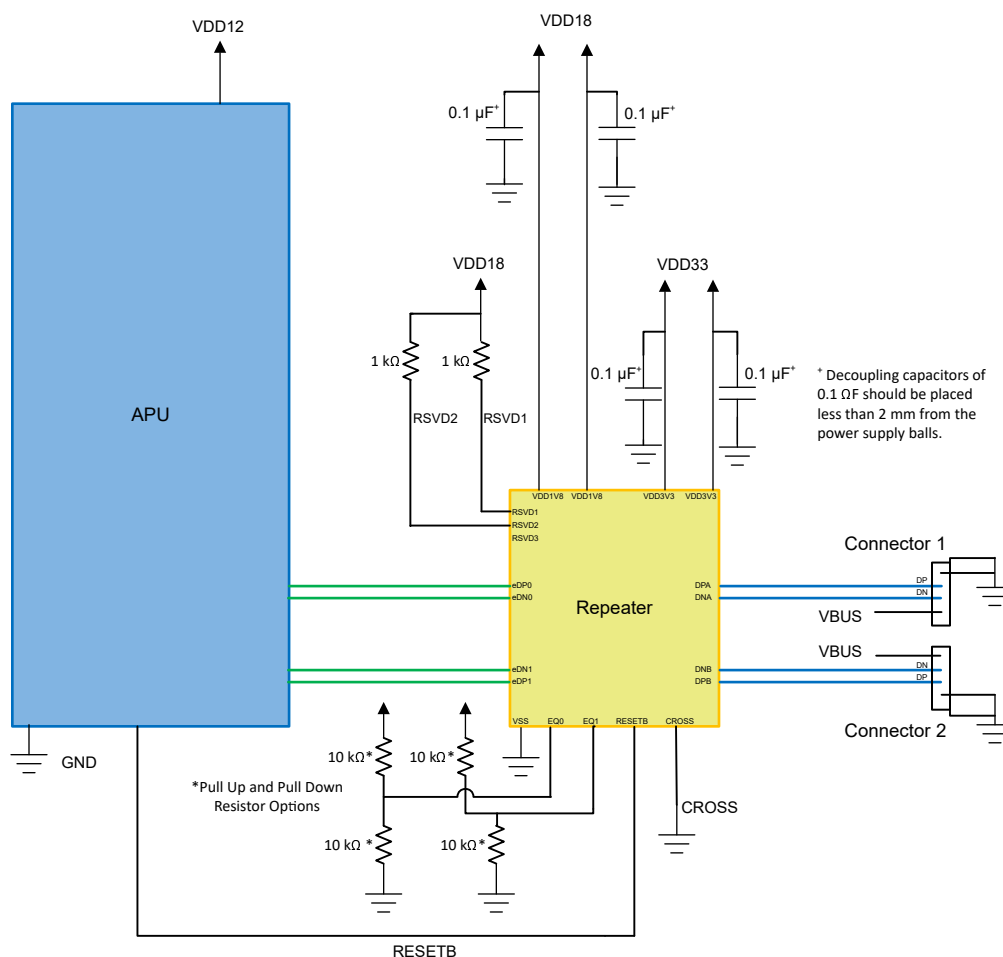


图 8-1. Typical Dual Port System Implementation

8.2.1 Design Requirements

TUSB2E22 supports the 1.2 V option of the eUSB2 specification. eUSB2 SoC must be compliant to the 1.2 V option of the eUSB2 specification.

8.2.2 Detailed Design Procedure

TUSB2E22 has four loss compensation settings for high speed operation and proper setting should be selected to match the system loss profile to optimize jitter performance. USB 2.0 high speed eye diagram measurements could be used as a guide to confirm the loss compensation is optimum for a given system.

8.2.3 Application Curve

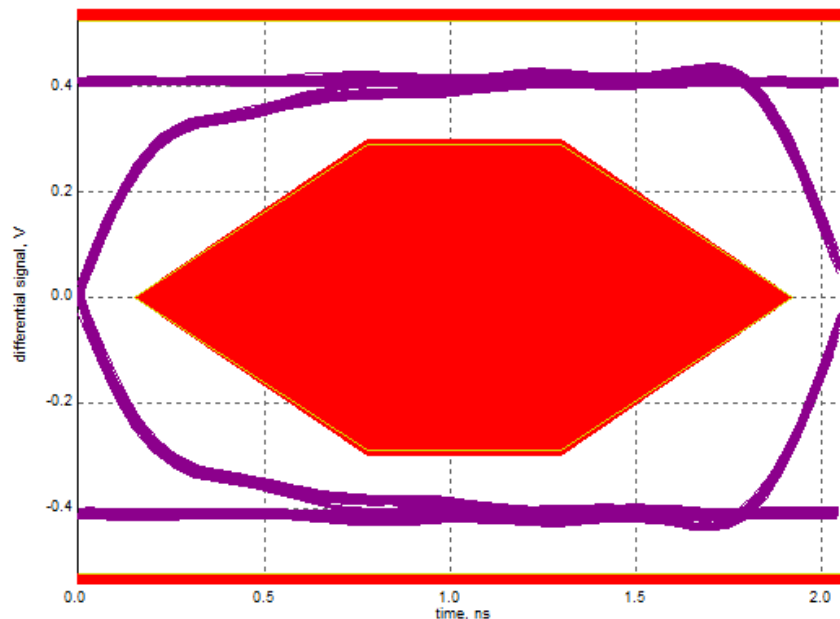


图 8-2. Typical USB 2.0 High Speed Eye Diagram

8.3 Power Supply Recommendations

8.3.1 Power Up Reset

RESETB pin is active low reset pin and can also be used as a power down pin.

TUSB2E22 does not have power supply sequence requirements between VDD3V3 and VDD1V8.

Maximum VDD3V3 and VDD1V8 ramp time to reach minimum supply voltages should be 2 ms.

Internal power on reset circuit along with the external RESETB input pin allows for proper initialization when RESETB is deasserted high prior to the power rails being valid. If RESETB deassert high before the power supplies are stable, internal power on reset circuit will hold off internal reset until the supplies are stable.

Upon deassertion of RESETB followed by internally generated reset signal and 1ms delay, CROSS pin is sampled and latched.

Upon deassertion of RESETB and after t_{RH_READY} , TUSB2E22 will enable and enter default state and be ready to accept eUSB2 packets. Each repeater will either be in host repeater mode or device repeater mode depending on the receipt of either host mode enable or peripheral mode enable.

8.4 Layout

8.4.1 Layout Guidelines

1. Place supply bypass capacitors as close to VDD1V8 and VDD3V3 pins as possible and avoid placing the bypass caps near the eDP/eDN and DP/DN traces.
2. Route the high-speed USB signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points on twisted pair lines; through-hole pins are not recommended.
3. When it becomes necessary to turn 90°, use two 45° turns or an arc instead of making a single 90° turn. This reduces reflections on the signal traces by minimizing impedance discontinuities.
4. Do not route USB traces under or near crystals, oscillators, clock signal generators, switching regulators, mounting holes, magnetic devices or ICs that use or duplicate clock signals.
5. Avoid stubs on the high-speed USB signals due to signal reflections. If a stub is unavoidable, then the stub must be less than 200 mil.
6. Route all high-speed USB signal traces over continuous GND planes, with no interruptions.
7. Avoid crossing over anti-etch, commonly found with plane splits.
8. Due to high frequencies associated with the USB, a printed circuit board with at least four layers is recommended; two signal layers separated by a ground and power layer as shown in 图 8-3.




图 8-3. Four-Layer Board Stack-Up

8.4.2 Example YCG Layout For Application With No Cross MUX Function.

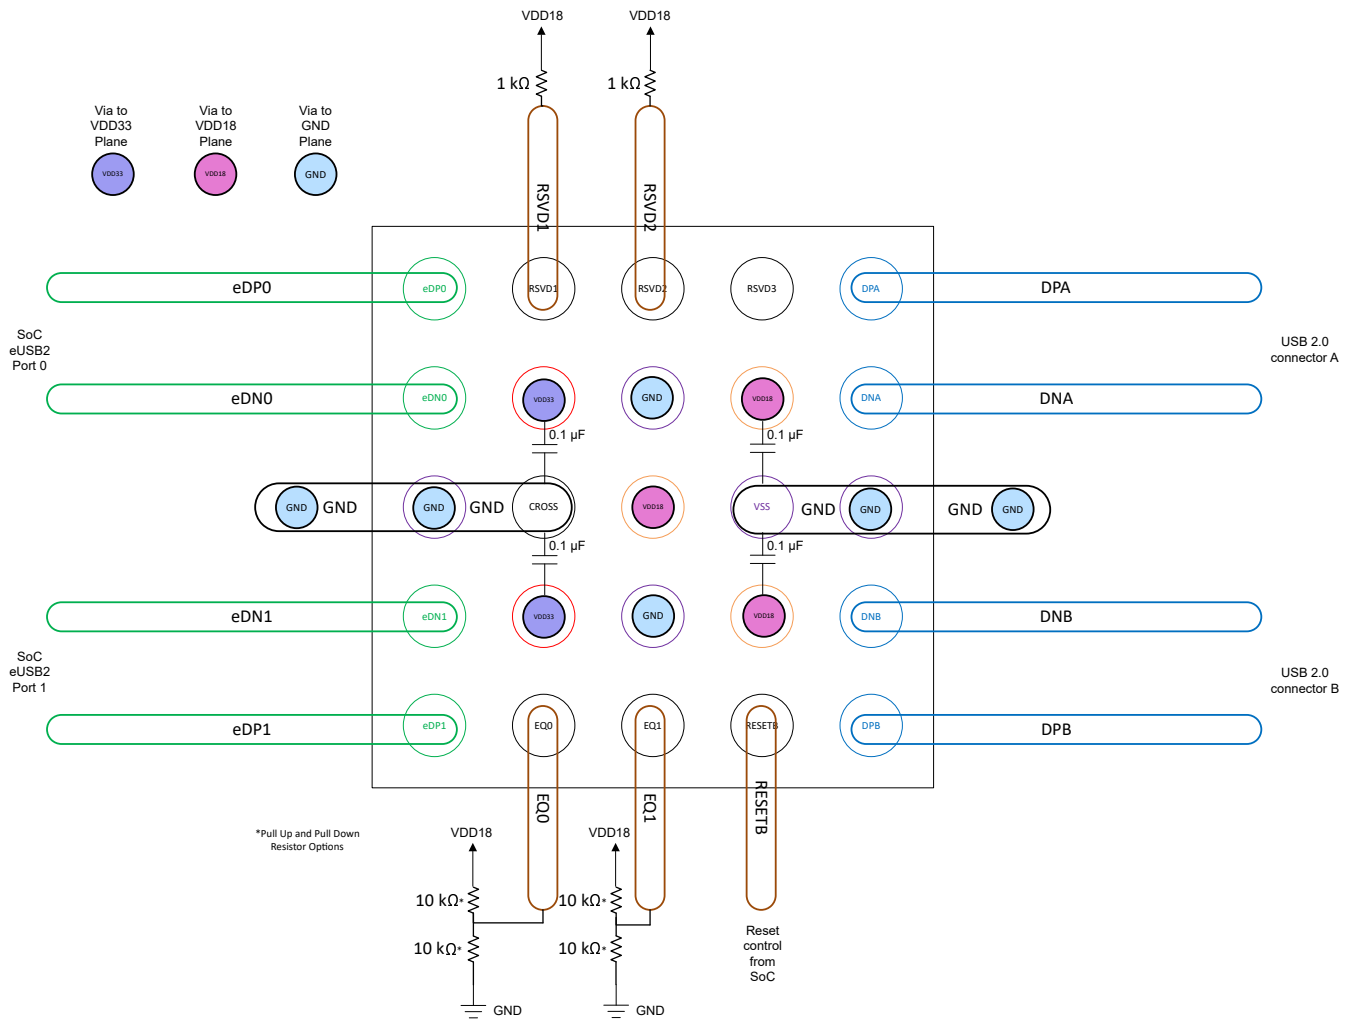


图 8-4. Example Layout of Application With No Cross MUX Function

8.4.3 Example RZA Layout For Application With No Cross MUX Function

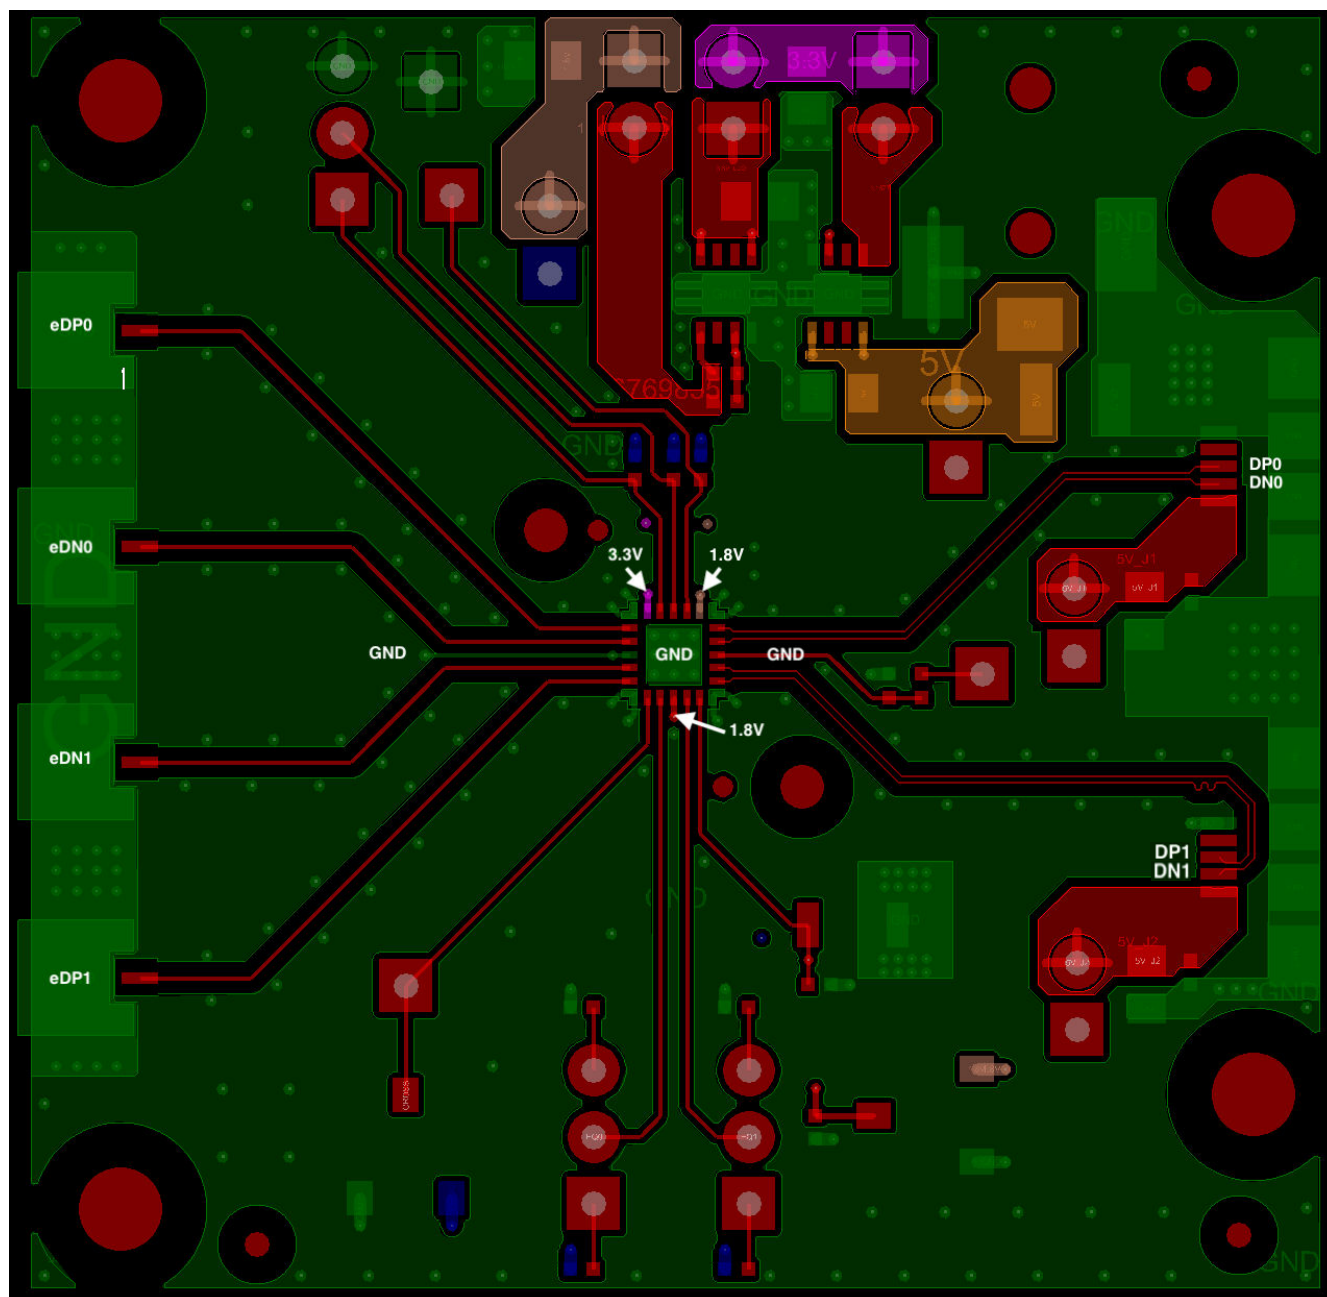


图 8-5. VQFN Example Layout

9 Device and Documentation Support

9.1 Documentation Support

9.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [USB 2.0 Board Design and Layout Guidelines](#)
- Texas Instruments, [High-Speed Layout Guidelines Application Report](#)
- Texas Instruments, [High-Speed Interface Layout Guidelines](#)

9.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](#) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.3 支持资源

TI E2E™ 中文支持论坛是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的[使用条款](#)。

9.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

9.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.6 术语表

TI 术语表 本术语表列出并解释了术语、首字母缩略词和定义。

10 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision B (October 2023) to Revision C (August 2024)	Page
• 将 YCG (DSBGA , 25) 封装尺寸从 1.75mm × 1.75mm 更改为 2mm × 2mm.....	1


Changes from Revision A (December 2019) to Revision B (October 2023)	Page
• 通篇更新了表格、图和交叉参考的编号格式.....	1
• 更新了 封装信息 表以包含封装引线尺寸.....	1
• Added the RZA VQFN package option.....	3
• Added example layout for VQFN with no cross MUX control	18

Changes from Revision * (February 2019) to Revision A (December 2019)**Page**

• 首次公开发布数据表.....	1
------------------	---

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.




YCG0025

PACKAGE OUTLINE

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

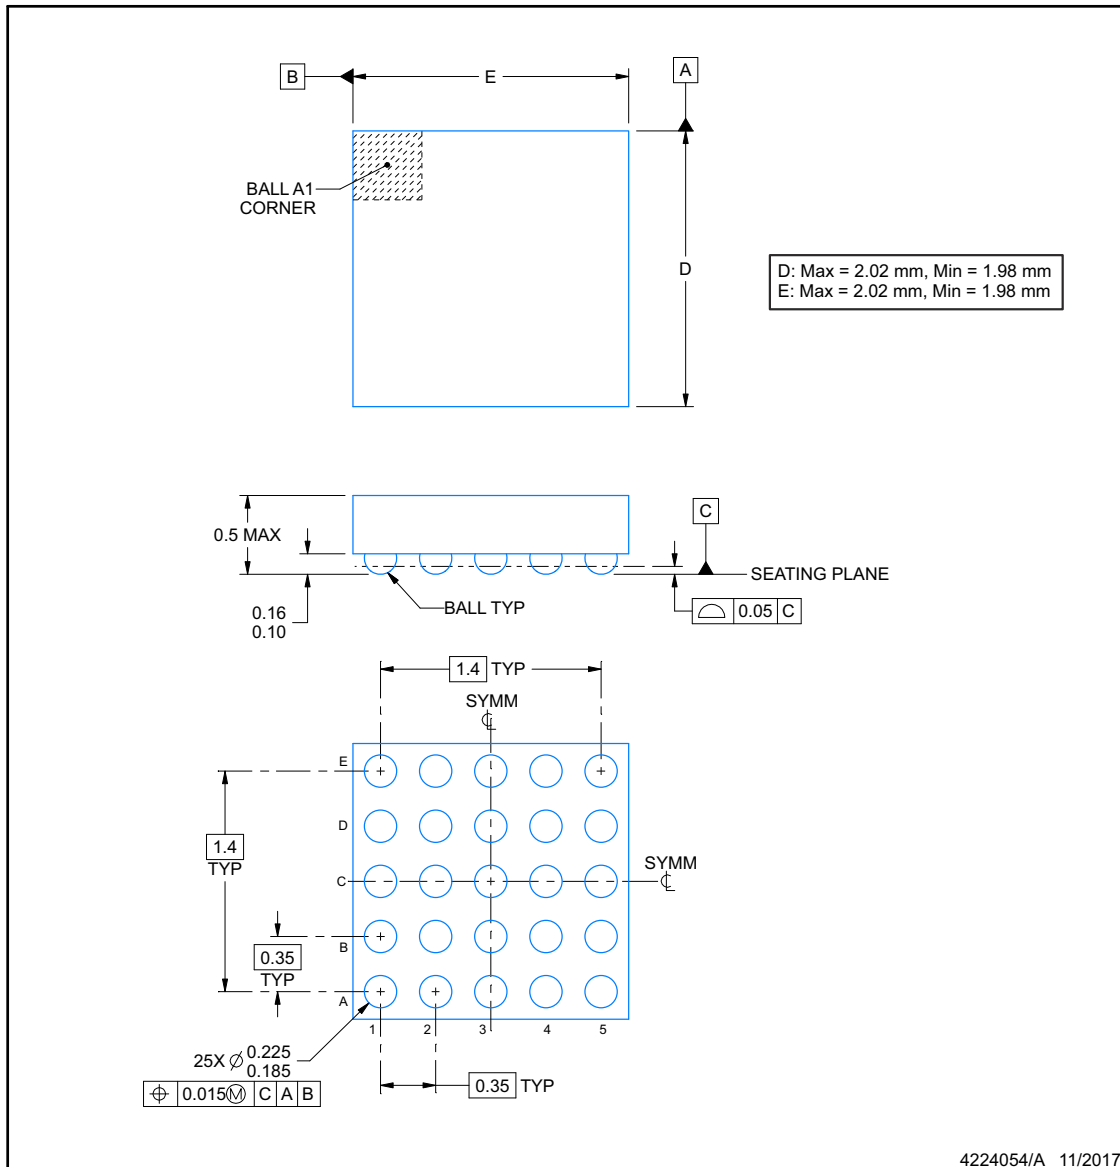


NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT**YCG0025****DSBGA - 0.5 mm max height**

DIE SIZE BALL GRID ARRAY

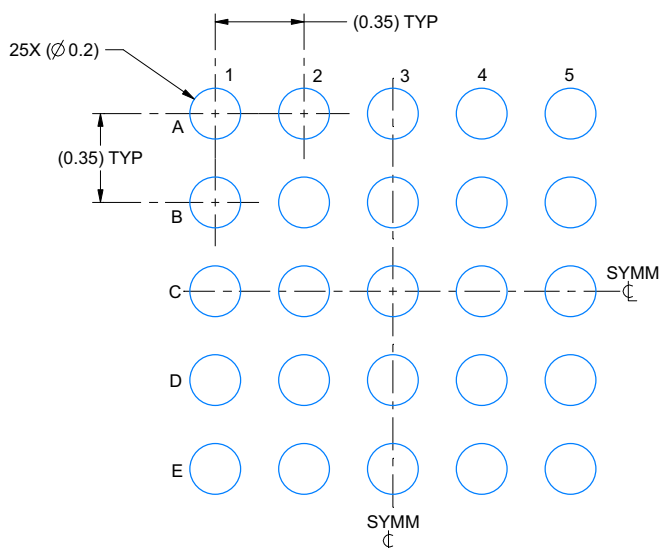

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 40X

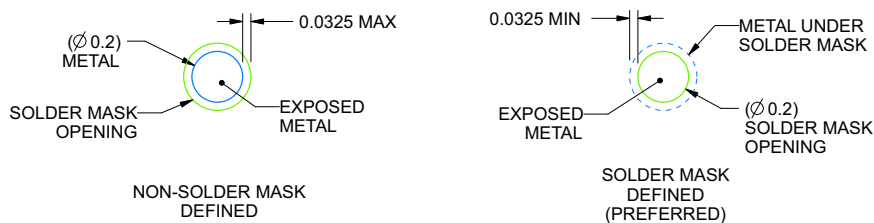

SOLDER MASK DETAILS
NOT TO SCALE

4224054/A 11/2017

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints.
See Texas Instruments Literature No. SNVA009 (www.ti.com/lit/snva009).

EXAMPLE STENCIL DESIGN

YCG0025

DSBGA - 0.5 mm max height

DIE SIZE BALL GRID ARRAY

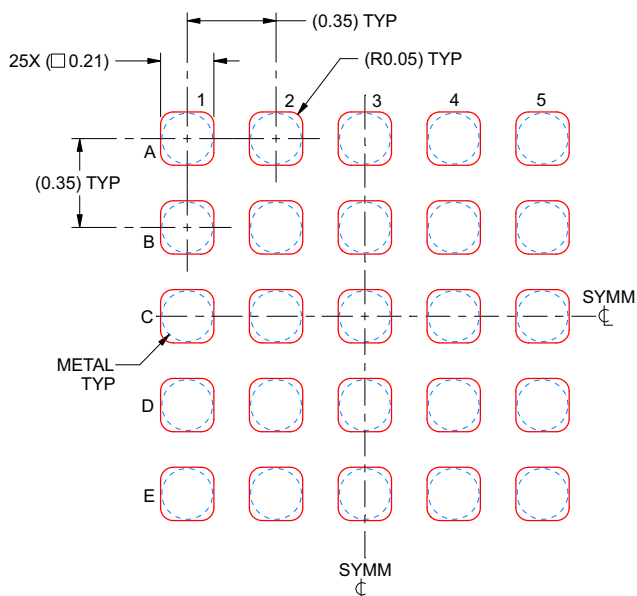

SOLDER PASTE EXAMPLE
BASED ON 0.075 mm THICK STENCIL
SCALE: 40X

4224054/A 11/2017

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TUSB2E22RZAR	Active	Production	VQFN-FCRLF (RZA) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-20 to 85	2E22
TUSB2E22RZAR.A	Active	Production	VQFN-FCRLF (RZA) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-20 to 85	2E22
TUSB2E22RZAT	Active	Production	VQFN-FCRLF (RZA) 20	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-20 to 85	2E22
TUSB2E22RZAT.A	Active	Production	VQFN-FCRLF (RZA) 20	250 SMALL T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-20 to 85	2E22
TUSB2E22YCGR	Active	Production	DSBGA (YCG) 25	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-20 to 85	T2E2
TUSB2E22YCGR.A	Active	Production	DSBGA (YCG) 25	3000 LARGE T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-20 to 85	T2E2
TUSB2E22YCGT	Active	Production	DSBGA (YCG) 25	250 SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-20 to 85	T2E2
TUSB2E22YCGT.A	Active	Production	DSBGA (YCG) 25	250 SMALL T&R	Yes	SNAGCU	Level-1-260C-UNLIM	-20 to 85	T2E2

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TUSB2E22RZAR	VQFN-FCRLF	RZA	20	3000	330.0	12.4	3.75	3.75	1.15	8.0	12.0	Q1
TUSB2E22RZAT	VQFN-FCRLF	RZA	20	250	180.0	12.4	3.75	3.75	1.15	8.0	12.0	Q1
TUSB2E22YCGR	DSBGA	YCG	25	3000	180.0	8.4	2.14	2.14	0.7	4.0	8.0	Q1
TUSB2E22YCGT	DSBGA	YCG	25	250	180.0	8.4	2.14	2.14	0.7	4.0	8.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TUSB2E22RZAR	VQFN-FCRLF	RZA	20	3000	367.0	367.0	35.0
TUSB2E22RZAT	VQFN-FCRLF	RZA	20	250	210.0	185.0	35.0
TUSB2E22YCGR	DSBGA	YCG	25	3000	182.0	182.0	20.0
TUSB2E22YCGT	DSBGA	YCG	25	250	182.0	182.0	20.0

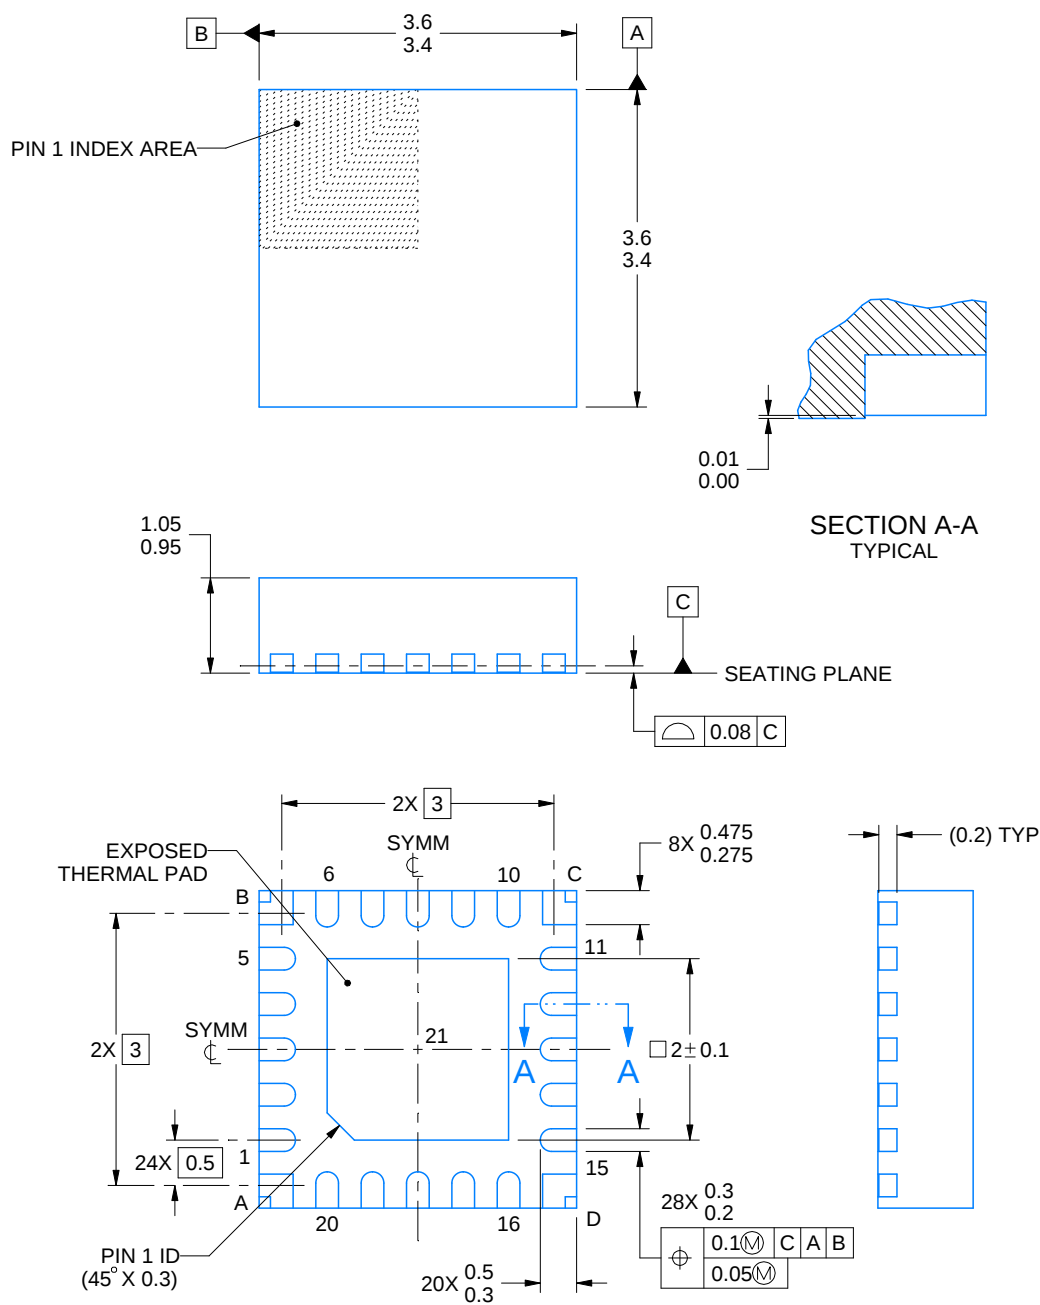

4226858/A 06/2021


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

RZA0020A

VQFN - 1.05 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

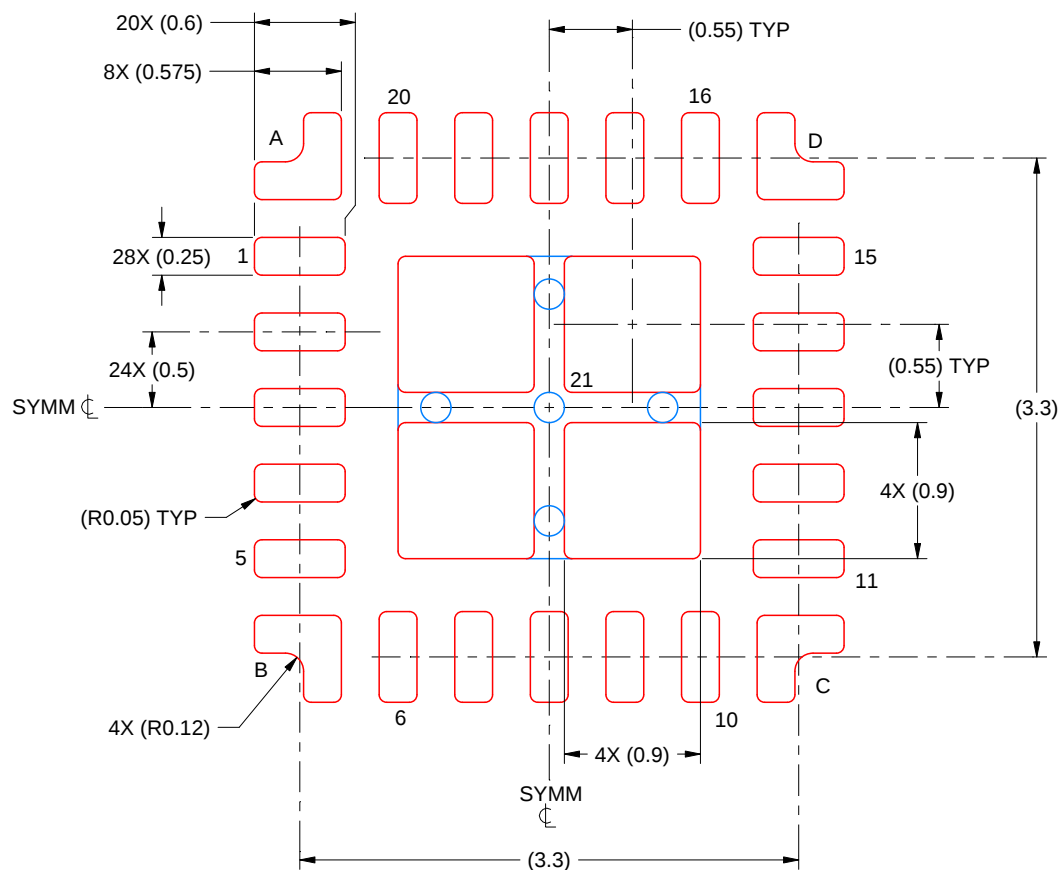

SOLDER PASTE EXAMPLE
BASED ON 0.125 MM THICK STENCIL
SCALE: 20X

EXPOSED PAD 21
81% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4226858/A 06/2021

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月