

带有 T/R 开关和片上波束成形器的 TX7516 五级 16 通道发送器

1 特性

- 发送器支持：
 - 16 通道五级脉冲发生器和有源发送/接收 (T/R) 开关
- 五级脉冲发生器：
 - 输出电压最大值： $\pm 100\text{V}$
 - 输出电压最小值： $\pm 1\text{V}$
 - 输出电流最大值：2A
 - 支持 4A 输出电流模式。
 - 真正归零以将输出电压对地放电
 - 第二谐波在 5 MHz 频率下为 -45 dBc
 - 3 dB 带宽， $1\text{ k}\Omega \parallel 240\text{ pF}$ 负载
 - 20 MHz (针对 $\pm 100\text{V}$ 电源)
 - 25 MHz (针对 $\pm 70\text{V}$ 电源)
 - 35 MHz (针对 4A 模式下的 $\pm 100\text{V}$ 电源)
 - 集成抖动：频率为 100 Hz 至 20 kHz 时的测量值为 100 fs
 - CW 模式近端相位噪声：5 MHz 信号 (1 kHz 偏移) 时为 -154 dBc/Hz
 - 接收功率极低：1mW/ch
- 有源发送/接收 (T/R) 开关，具有：
 - 8 Ω 导通电阻
 - 导通和关断时间：100 ns
 - 瞬态干扰：10 mV_{pp}
- 片上波束形成器，具有：
 - 基于通道的 T/R 开关控制
 - 延迟分辨率：半个波束形成器时钟周期，不低于 2 ns
 - 最大延迟： 2^{14} 个波束形成器时钟周期
 - 波束形成器时钟速度最大值：320 MHz
 - 每通道模式控制，具有 2K 不同级别。
 - 全局和局部重复模式，为横波成像启用长持续时间模式
 - 支持 120 个延迟分布
- 高速 (最大值：400 MHz) 双通道 LVDS 串行编程接口。
 - 低编程时间：针对延迟用户更新，< 500 ns
 - 32 位校验和功能可检测错误的 SPI 写入
- 支持 CMOS 串行编程接口 (不高于 50 MHz)
- 内部温度传感器和自动热关断
- 无需特定电源时序
- 错误标志寄存器，用于检测故障情况
- 用于浮动电源和偏置电压的集成无源器件
- 小型封装：FC-BGA-144 (10mm × 10mm)，间距为 0.8mm

2 应用

- 超声波成像系统
- 压电式驱动器
- 探头内置超声波成像

3 说明

TX7516 是一款适用于超声成像系统的高度集成、高性能发送器解决方案。该器件共设有 16 个脉冲发生器电路、16 个发送/接收开关 (称为 T/R 或 TR 开关)，并支持片上和片外波束形成器 (TxBF)。该器件还集成片上浮动电源，可减少所需高压电源的数量。


TX7516 有一个脉冲发生器电路，可生成五级高压脉冲 (高达 $\pm 100\text{V}$)，这些脉冲用于激发超声波传感器的多个通道。该器件共支持 16 个输出。输出电流最大值为 2A。

该器件可用作许多应用的发射器解决方案，比如超声成像、无损检测、声纳、激光雷达、海洋导航系统、大脑成像系统等。

器件信息

器件型号	封装 ⁽¹⁾	封装尺寸 (标称值)
TX7516	FC-BGA (144)	10.0mm × 10.0mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

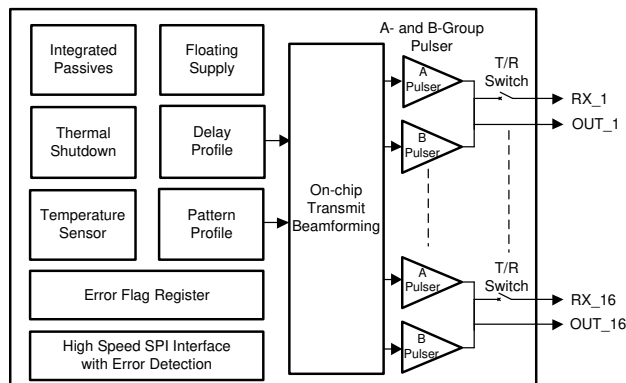

简化方框图



Table of Contents

1 特性.....	1	6.2 Receiving Notification of Documentation Updates.....	4
2 应用.....	1	6.3 支持资源.....	4
3 说明.....	1	6.4 Trademarks.....	4
4 Revision History.....	2	6.5 Electrostatic Discharge Caution.....	4
5 说明 (续).....	3	6.6 术语表.....	4
6 Device and Documentation Support.....	4	7 Mechanical, Packaging, and Orderable Information....	4
6.1 Document Support.....	4	7.1 Mechanical Data.....	5

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (June 2021) to Revision A (March 2022)	Page
• 将器件状态从 <i>预告信息</i> 更改为 <i>量产数据</i>	1

5 说明 (续)

TX7516 (在此数据表中被称为器件) 是一款用于激发超声传感器的高度集成发送器解决方案。器件集成了 16 个脉冲发生器和 16 个 T/R 开关、片上波束形成器和图形发生器。

脉冲发生器电路产生五级高压脉冲 (高达 $\pm 100\text{V}$)，输出电流最大值为 2A。当脉冲发生器发射高压脉冲时，T/R 开关关闭，保护低压接收电路不受损坏。当传感器接收回波信号时，T/R 开关导通并将传感器连接到接收器。T/R 开关的开/关操作由器件中内置的片上波束形成引擎控制。T/R 开关在导通状态下提供 8Ω 的阻抗。

超声波传输依靠定义传输方向的不同的延迟值来激发多个传感器元件。这种操作被称为传输波束形成。TX7516 支持不同通道的交错式脉冲，从而实现传输波束形成。

在片上波束形成器模式下，不同通道脉冲的延迟分布会存储在器件内。器件支持的传输波束形成器延迟分辨率为一个波束形成器时钟周期，延迟不超过 2^{14} 个波束形成器时钟周期。内部图形发生器依据分布 RAM 中的图形分布生成输出脉冲图形。每个通道都有自己的 RAM，长度为 960 字节。图形具有全局和局部重复特征。此功能可用于生成图形，并可用于横波成像。

这些图形分布和延迟分布是使用高速 (400MHz) 串行外设接口写入的。高速写入可能容易出错。因此，该器件具有校验和功能来检测 SPI 写入中的错误。

为防止器件因配置不当而损坏，内部错误标志寄存器可检测故障情况并自动将器件配置为关断模式。

该器件集成了浮动电源和内部偏置电压所需的所有去耦电容器。这显著减少了所需外部电容器数量。TX7516 采用 144 引脚 10mm × 10mm FC-BGA 封装 (ALH 封装)，额定工作温度范围为 0°C 至 70°C。

6 Device and Documentation Support

6.1 Document Support

表 6-1. Terms Commonly Used in the Data Sheet

Abbreviation	Comment
PRT	Pulse Repetition Time. Represent TR_BF_SYNC period
PRF	Pulse Repetition Frequency. Represent TR_BF_SYNC frequency
Receive Mode	Duration in which T/R switch of all the channels are in ON state
High voltage supplies	AVDDP_HV_A, AVDDP_HV_B, AVDDM_HV_A, and AVDDM_HV_B are collectively referred as high voltage supplies
High voltage supplies	AVDDP_5, AVDDM_5, and AVDDP_1P8 supplies are collectively referred as low voltage supplies
A-side supplies	AVDDP_HV_A and AVDDM_HV_A is referred as A-side supplies
B-side supplies	AVDDP_HV_A and AVDDM_HV_A is referred as B-side supplies
SPI	Serial program interface

6.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

6.3 支持资源

TI E2E™ 支持论坛是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

6.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

6.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.


6.6 术语表

TI 术语表 本术语表列出并解释了术语、首字母缩略词和定义。

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this datasheet, refer to the left-hand navigation.

7.1 Mechanical Data

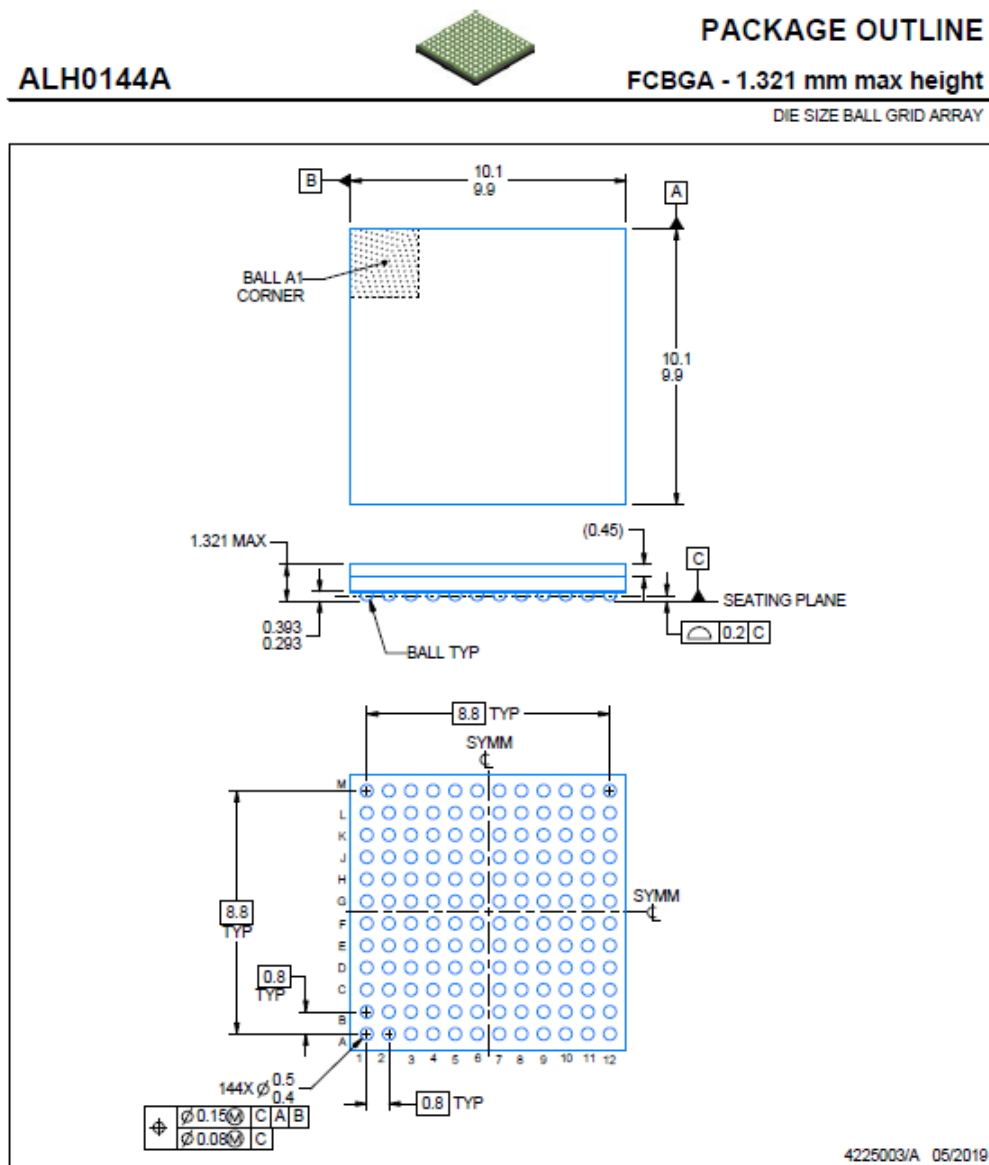


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

EXAMPLE BOARD LAYOUT**ALH0144A****FCBGA - 1.321 mm max height**

DIE SIZE BALL GRID ARRAY

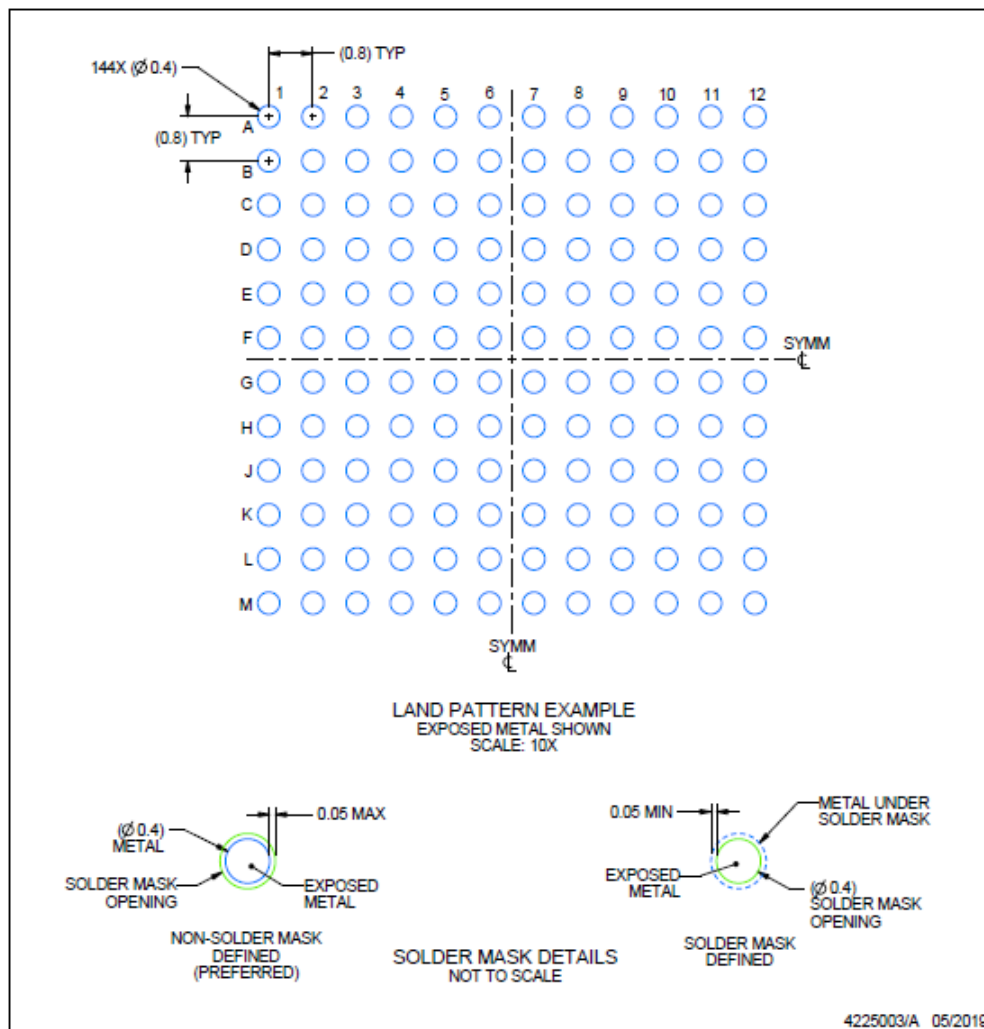

NOTES: (continued)


3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. See Texas Instruments Literature No. SPRU811 (www.ti.com/lit/spru811).

EXAMPLE STENCIL DESIGN

ALH0144A

FCBGA - 1.321 mm max height

DIE SIZE BALL GRID ARRAY

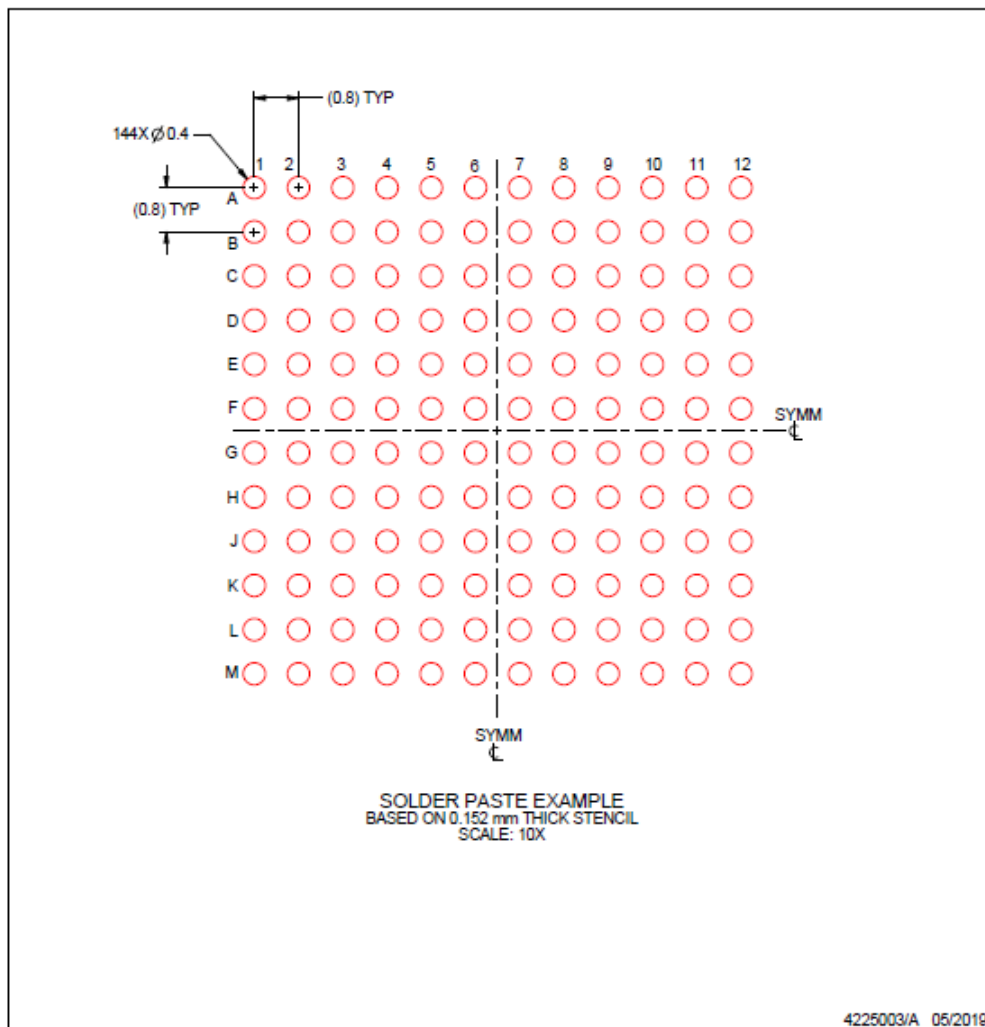

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TX7516ALH	Active	Production	FCCSP (ALH) 144	240 JEDEC TRAY (5+1)	Yes	Call TI Snagcu	Level-3-260C-168 HR	0 to 70	TX7516
TX7516ALH.B	Active	Production	FCCSP (ALH) 144	240 JEDEC TRAY (5+1)	-	Call TI	Call TI	0 to 70	

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月