

TMUX113x 5V、低リーク電流、2:1 (SPDT)、3 または 4 チャンネル高精度スイッチ

1 特長

- 単電源電圧範囲: 1.08V ~ 5.5V
- 両電源電圧範囲: $\pm 2.75V$
- 小さいリーク電流: 3pA
- 少ない電荷注入: -1pC
- 低いオン抵抗: 2Ω
- 40°C ~ +125°C の動作温度範囲
- 1.8V ロジック互換
- フェイルセーフ ロジック
- レール ツー レールの動作
- 双方向の信号パス
- ブレイク ビフォー メイクのスイッチング動作
- ESD 保護 (HBM): 2000V

2 アプリケーション

- フィールドトランスミッタ
- プログラマブル ロジック コントローラ (PLC)
- ファクトリ オートメーション / 制御
- 超音波スキャナ
- メディカル モニタと診断
- 心電図 (ECG)
- データ アクイジション システム (DAQ)
- ATE 試験装置
- バッテリー テスト機器
- 計測機器: ラボ、分析、ポータブル
- スマート メータ: 水道およびガス
- 光学ネットワーク機器
- 光学試験装置
- ポータブル POS
- リモート無線ユニット
- アクティブ アンテナ システム (mMIMIO)

3 概要

TMUX113x はマルチチャンネル対応、高精度の CMOS (相補型金属酸化膜半導体) スイッチです。TMUX1133 は 3 つのチャンネルを個別に制御する 2:1 単極双投 (SPDT) 構成で、 $\overline{EN}$ ピンにより 3 つのスイッチをそれぞれイネーブルまたはディセーブルできます。TMUX1134 では 4 つの SPDT スイッチを個別に制御できます。1.08V ~ 5.5V の広い電源電圧範囲、あるいは $\pm 2.75V$ のデュアル電源で動作するため、医療機器から産業システムまで、幅広い用途に適しています。このデバイスは、ソース (S_x) およびドレイン (D_x) ピンで、 V_{SS} から V_{DD} までの範囲の双方向アナログおよびデジタル信号をサポートします。単一電源のアプリケーションでは、 V_{SS} を GND に接続する必要があります。


すべてのロジック入力のスレッシュホールドは 1.8V ロジック互換で、有効な電源電圧範囲で動作していれば、TTL と CMOS の両方のロジックと互換性が保証されます。フェイルセーフ ロジック回路により、電源ピンよりも先に制御ピンに電圧が印加されるため、デバイスへの損傷の可能性が避けられます。

TMUX113x デバイスは、高精度スイッチおよびマルチプレクサのファミリの製品です。これらのデバイスは、オンおよびオフ時のリーク電流が非常に小さく、電荷注入も少ないため、高精度の測定用途に使用できます。消費電流が 8nA と低いため、携帯型アプリケーションで使用できます。

製品情報

部品番号	チャンネル数 ⁽¹⁾	パッケージ ⁽²⁾
TMUX1133	3 チャンネル	PW (TSSOP, 16)
TMUX1134	4 チャンネル	PW (TSSOP, 20)

- 製品比較表を参照してください。
- 詳細については、セクション 12 を参照してください。

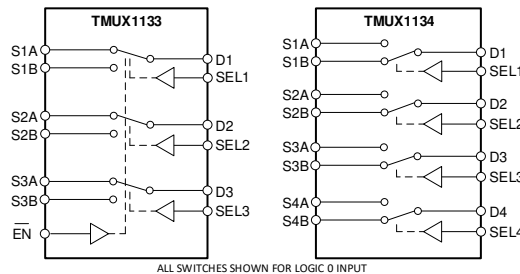

TMUX113x ブロック図



Table of Contents

1 特長	1	7.8 Off Isolation.....	20
2 アプリケーション	1	7.9 Crosstalk.....	21
3 概要	1	7.10 Bandwidth.....	22
4 Device Comparison Table	2	8 Detailed Description	23
5 Pin Configuration and Functions	3	8.1 Overview.....	23
6 Specifications	5	8.2 Functional Block Diagram.....	23
6.1 Absolute Maximum Ratings.....	5	8.3 Feature Description.....	23
6.2 ESD Ratings.....	5	8.4 Device Functional Modes.....	25
6.3 Recommended Operating Conditions.....	5	8.5 Truth Tables.....	25
6.4 Thermal Information.....	6	9 Application and Implementation	26
6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$).....	6	9.1 Application Information.....	26
6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$).....	8	9.2 Typical Application.....	26
6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$).....	9	9.3 Power Supply Recommendations.....	29
6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$).....	11	9.4 Layout.....	29
6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$).....	12	10 Device and Documentation Support	31
6.10 Typical Characteristics.....	14	10.1 Documentation Support.....	31
7 Parameter Measurement Information	17	10.2 ドキュメントの更新通知を受け取る方法.....	31
7.1 On-Resistance.....	17	10.3 サポート・リソース.....	31
7.2 Off-Leakage Current.....	17	10.4 Trademarks.....	31
7.3 On-Leakage Current.....	18	10.5 静電気放電に関する注意事項.....	31
7.4 Transition Time.....	18	10.6 用語集.....	31
7.5 Break-Before-Make.....	19	11 Revision History	31
7.6 $t_{ON(EN)}$ and $t_{OFF(EN)}$	19	12 Mechanical, Packaging, and Orderable Information	32
7.7 Charge Injection.....	20		

4 Device Comparison Table

PRODUCT	DESCRIPTION
TMUX1133	2:1 (SPDT), 3-Channel Switch
TMUX1134	2:1 (SPDT), 4-Channel Switch

5 Pin Configuration and Functions

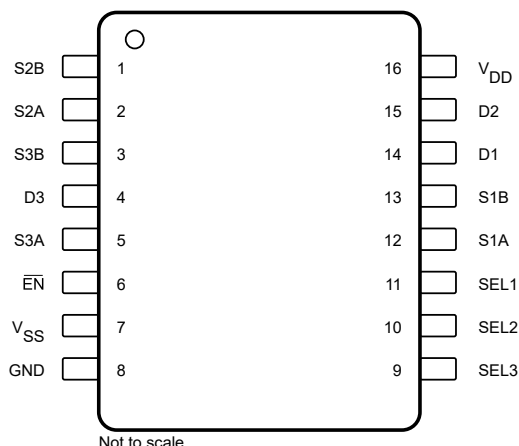


図 5-1. TMUX1133: PW Package, 16-Pin TSSOP (Top View)

表 5-1. Pin Functions TMUX1133

PIN		TYPE ⁽¹⁾	DESCRIPTION ⁽²⁾
NAME	NO.		
S2B	1	I/O	Source pin 2B. Can be an input or output.
S2A	2	I/O	Source pin 2A. Can be an input or output.
S3B	3	I/O	Source pin 3B. Can be an input or output.
D3	4	I/O	Drain pin 3. Can be an input or output.
S3A	5	I/O	Source pin 3A. Can be an input or output.
EN	6	I	Active low logic enable. When this pin is high, all switches are turned off. When this pin is low, the SELx inputs determine switch connection as listed in 表 8-1.
V _{SS}	7	P	Negative power supply. This pin is the most negative power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1μF to 10μF between V _{SS} and GND. V _{SS} must be connected to ground for single supply voltage applications.
GND	8	P	Ground (0V) reference
SEL3	9	I	Logic control select pin 3. Controls switch 3 connection as listed in 表 8-1.
SEL2	10	I	Logic control select pin 2. Controls switch 2connection as listed in 表 8-1.
SEL1	11	I	Logic control select pin 1. Controls switch 1 connection as listed in 表 8-1.
S1A	12	I/O	Source pin 1A. Can be an input or output.
S1B	13	I/O	Source pin 1B. Can be an input or output.
D1	14	I/O	Drain pin 1. Can be an input or output.
D2	15	I/O	Drain pin 2. Can be an input or output.
V _{DD}	16	P	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1μF to 10μF between V _{DD} and GND.

(1) I = input, O = output, I/O = input and output, P = power

(2) Refer to セクション 8.4 for what to do with unused pins

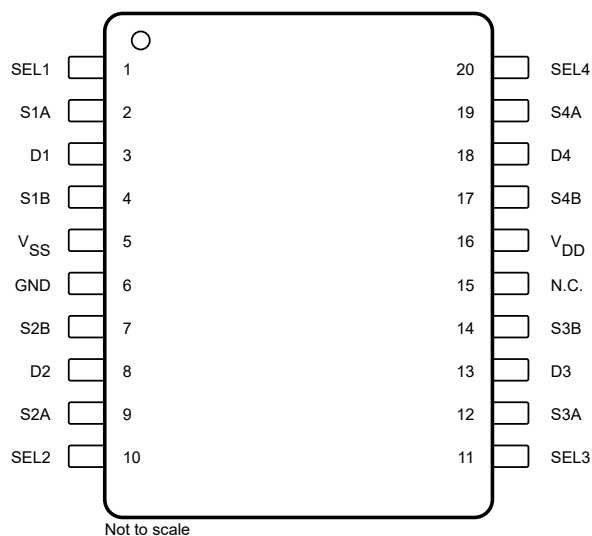


図 5-2. TMUX1134: PW Package, 20-Pin TSSOP (Top View)

表 5-2. Pin Functions TMUX1134

PIN		TYPE ⁽¹⁾	DESCRIPTION ⁽²⁾
NAME	NO.		
SEL1	1	I	Logic control select pin 1. Controls switch 1 connection as listed in 表 8-2.
S1A	2	I/O	Source pin 1A. Can be an input or output.
D1	3	I/O	Drain pin 1. Can be an input or output.
S1B	4	I/O	Source pin 1B. Can be an input or output.
V _{SS}	5	P	Negative power supply. This pin is the most negative power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1μF to 10μF between V _{SS} and GND. V _{SS} must be connected to ground for single supply voltage applications.
GND	6	P	.Ground (0V) reference.
S2B	7	I/O	Source pin 2B. Can be an input or output.
D2	8	I/O	Drain pin 2. Can be an input or output.
S2A	9	I/O	Source pin 2A. Can be an input or output.
SEL2	10	I	Logic control select pin 2. Controls switch 2 connection as listed in 表 8-2.
SEL3	11	I	Logic control select pin 3. Controls switch 3 connection as listed in 表 8-2.
S3A	12	I/O	Source pin 3A. Can be an input or output.
D3	13	I/O	Drain pin 3. Can be an input or output.
S3B	14	I/O	Source pin 3B. Can be an input or output.
N.C.	15	Not Connected	Not Connected. Can be shorted to GND or left floating.
V _{DD}	16	P	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1μF to 10μF between V _{DD} and GND.
S4B	17	I/O	Source pin 4B. Can be an input or output.
D4	18	I/O	Drain pin 4. Can be an input or output.
S4A	19	I/O	Source pin 4A. Can be an input or output.
SEL4	20	I	Logic control select pin 4. Controls switch 4 connection as listed in 表 8-2.

(1) I = input, O = output, I/O = input and output, P = power

(2) Refer to セクション 8.4 for what to do with unused pins

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)^{(1) (2) (3)}

		MIN	MAX	UNIT
$V_{DD}-V_{SS}$	Supply voltage	−0.5	6	V
V_{DD}		−0.5	6	V
V_{SS}		−3.0	0.3	V
V_{SEL} or V_{EN}	Logic control input pin voltage ($\overline{EN}$, SELx)	−0.5	6	V
I_{SEL} or I_{EN}	Logic control input pin current ($\overline{EN}$, SELx)	−30	30	mA
V_S or V_D	Source or drain voltage (SxA, SxB, Dx)	−0.5	$V_{DD} + 0.5$	V
I_S or $I_{D (CONT)}$	Source or drain continuous current (SxA, SxB, Dx)	$IDC \pm 10\%$ ⁽⁴⁾	$IDC \pm 10\%$ ⁽⁴⁾	mA
I_S or $I_{D (PEAK)}$	Source and drain peak current: (1 ms period max, 10% duty cycle maximum) (Sx, SxA, SxB, D, DA, DB)	$I_{peak} \pm 10\%$ ⁽⁴⁾	$I_{peak} \pm 10\%$ ⁽⁴⁾	mA
T_{slg}	Storage temperature	−65	150	°C
P_{tot}	Total power dissipation ^{(5) (6)}		500	mW
T_J	Junction temperature		150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The algebraic convention, whereby the most negative value is a minimum and the most positive value is a maximum.
- (3) All voltages are with respect to ground, unless otherwise specified.
- (4) Refer to Recommended Operating Conditions for IDC and I_{Peak} ratings.
- (5) For TSSOP(16)(PW) package: P_{tot} derates linearly above TA=89°C by 8.29mW/°C
- (6) For TSSOP(20)(PW) package: P_{tot} derates linearly above TA=98°C by 9.78mW/°C

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101 or ANSI/ESDA/JEDEC JS-002, all pins ⁽²⁾	±750	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_{DD}	Positive power supply voltage (single)		1.08		5.5	V
V_{SS}	Negative power supply voltage (dual)		−2.75		0	V
$V_{DD} - V_{SS}$	Supply rail voltage difference		1.08		5.5	V
V_S or V_D	Signal path input/output voltage (source or drain pin) (SxA, SxB, Dx)		V_{SS}		V_{DD}	V
V_{SEL} or V_{EN}	Logic control input pin voltage ($\overline{EN}$, SELx)		0		5.5	V
T_A	Ambient temperature		−40		125	°C
I_{DC}	Continuous current through switch	$T_J = 25^\circ\text{C}$		150		mA
		$T_J = 85^\circ\text{C}$		120		mA
		$T_J = 125^\circ\text{C}$		60		mA
		$T_J = 130^\circ\text{C}$		50		mA

6.3 Recommended Operating Conditions (続き)

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
I_{peak}	Peak current through switch(1 ms period max, 10% duty cycle maximum)	$T_J = 25^{\circ}\text{C}$		300		mA
		$T_J = 85^{\circ}\text{C}$		300		mA
		$T_J = 125^{\circ}\text{C}$		180		mA
		$T_J = 130^{\circ}\text{C}$		160		mA

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		TMUX1133	TMUX1134	UNIT
		PW (TSSOP)	PW (TSSOP)	
		16 PINS	16 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	120.6	102.2	$^{\circ}\text{C/W}$
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	51.0	43.1	$^{\circ}\text{C/W}$
$R_{\theta JB}$	Junction-to-board thermal resistance	66.8	53.6	$^{\circ}\text{C/W}$
Ψ_{JT}	Junction-to-top characterization parameter	8.7	6.6	$^{\circ}\text{C/W}$
Ψ_{JB}	Junction-to-board characterization parameter	66.2	53.1	$^{\circ}\text{C/W}$
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	N/A	$^{\circ}\text{C/W}$

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$)

At $T_A = 25^{\circ}\text{C}$, $V_{DD} = 5V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
RON	On-resistance	VS = 0V to VDD ISD = 10mA Refer to セクション 7.1	25°C		2	4	Ω
			−40°C to +85°C			4.5	Ω
			−40°C to +125°C			4.9	Ω
ΔRON	On-resistance matching between channels	VS = 0V to VDD ISD = 10mA Refer to セクション 7.1	25°C		0.18		Ω
			−40°C to +85°C			0.4	Ω
			−40°C to +125°C			0.5	Ω
RON FLAT	On-resistance flatness	VS = 0V to VDD ISD = 10mA Refer to セクション 7.1	25°C		0.85		Ω
			−40°C to +85°C			1.6	Ω
			−40°C to +125°C			1.6	Ω
IS(OFF)	Source off leakage current ⁽¹⁾	VDD = 5V Switch Off VD = 4.5V / 1.5V VS = 1.5V / 4.5V Refer to セクション 7.2	25°C	−0.08	±0.003	0.08	nA
			−40°C to +85°C	−0.3		0.3	nA
			−40°C to +125°C	−0.9		0.9	nA
ID(OFF)	Drain off leakage current ⁽¹⁾	VDD = 5V Switch Off VD = 4.5V / 1.5V VS = 1.5V / 4.5V Refer to セクション 7.2	25°C	−0.1	±0.003	0.1	nA
			−40°C to +85°C	−0.35		0.35	nA
			−40°C to +125°C	−2		2	nA
ID(ON) IS(ON)	Channel on leakage current	VDD = 5V Switch On VD = VS = 4.5V / 1.5V Refer to セクション 7.3	25°C	−0.1	±0.003	0.1	nA
			−40°C to +85°C	−0.35		0.35	nA
			−40°C to +125°C	−2		2	nA
LOGIC INPUTS (EN, SELx)							

6.5 Electrical Characteristics ($V_{DD} = 5V \pm 10\%$) (続き)

At $T_A = 25^\circ C$, $V_{DD} = 5V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
V _{IH}	Input logic high		−40°C to +125°C	1.49		5.5	V
V _{IL}	Input logic low			0		0.87	V
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C	±0.05			μA
C _{IN}	Logic input capacitance		25°C	1			pF
			−40°C to +125°C	2			pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C	0.008			μA
			−40°C to +125°C	1			μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 3V R _L = 200Ω, C _L = 15pF Refer to セクション 7.4	25°C	12			ns
			−40°C to +85°C	18			ns
			−40°C to +125°C	19			ns
t _{OPEN} (BBM)	Break before make time	V _S = 3V R _L = 200Ω, C _L = 15pF Refer to セクション 7.5	25°C	8			ns
			−40°C to +85°C	1			ns
			−40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time (TMUX1133 Only)	V _S = 3V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C	12			ns
			−40°C to +85°C	21			ns
			−40°C to +125°C	22			ns
t _{OFF(EN)}	Enable turn-off time (TMUX1133 Only)	V _S = 3V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C	6			ns
			−40°C to +85°C	11			ns
			−40°C to +125°C	12			ns
Q _C	Charge Injection	V _S = 1V R _S = 0Ω, C _L = 1nF Refer to セクション 7.7	25°C	−1			pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.8	25°C	−65			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.8	25°C	−45			dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.9	25°C	−100			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.9	25°C	−90			dB
BW	Bandwidth	R _L = 50Ω, C _L = 5pF Refer to セクション 7.10	25°C	220			MHz
C _{SOFF}	Source off capacitance	f = 1MHz	25°C	6			pF
C _{DOFF}	Drain off capacitance	f = 1MHz	25°C	17			pF
C _{SON} C _{DON}	On capacitance	f = 1MHz	25°C	20			pF

(1) When V_S is 4.5V, V_D is 1.5V or when V_S is 1.5V, V_D is 4.5V.

6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$)

At $T_A = 25^\circ C$, $V_{DD} = 3.3V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT	
ANALOG SWITCH								
R _{ON}	On-resistance	V _S = 0V to V _{DD} I _{SD} = 10mA Refer to セクション 7.1	25°C		3.7	8.8	Ω	
			−40°C to +85°C			9.5	Ω	
			−40°C to +125°C			9.8	Ω	
ΔR _{ON}	On-resistance matching between channels	V _S = 0V to V _{DD} I _{SD} = 10mA Refer to セクション 7.1	25°C		0.13		Ω	
			−40°C to +85°C			0.4	Ω	
			−40°C to +125°C			0.5	Ω	
R _{ON} FLAT	On-resistance flatness	V _S = 0V to V _{DD} I _{SD} = 10mA Refer to セクション 7.1	25°C		1.9		Ω	
			−40°C to +85°C			2	Ω	
			−40°C to +125°C			2.2	Ω	
I _{S(OFF)}	Source off leakage current ⁽¹⁾	V _{DD} = 3.3V Switch Off V _D = 3V / 1V V _S = 1V / 3V Refer to セクション 7.2	25°C	−0.05	±0.001	0.05	nA	
			−40°C to +85°C		−0.1		0.1	nA
			−40°C to +125°C		−0.7		0.7	nA
I _{D(OFF)}	Drain off leakage current ⁽¹⁾ (TMUX1133 Only)	V _{DD} = 3.3V Switch Off V _D = 3V / 1V V _S = 1V / 3V Refer to セクション 7.2	25°C	−0.1	±0.005	0.1	nA	
			−40°C to +85°C		−0.35		0.35	nA
			−40°C to +125°C		−2		2	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 3.3V Switch On V _D = V _S = 3V / 1V Refer to セクション 7.3	25°C	−0.1	±0.005	0.1	nA	
			−40°C to +85°C		−0.35		0.35	nA
			−40°C to +125°C		−2		2	nA
LOGIC INPUTS (EN, SELx)								
V _{IH}	Input logic high		−40°C to +125°C	1.35		5.5	V	
V _{IL}	Input logic low			0		0.8	V	
I _{IH} I _{IL}	Input leakage current		25°C		±0.005		μA	
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C			±0.05	μA	
C _{IN}	Logic input capacitance		25°C		1		pF	
			−40°C to +125°C			2	pF	
POWER SUPPLY								
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C		0.006		μA	
			−40°C to +125°C			1	μA	
DYNAMIC CHARACTERISTICS								
t _{TRAN}	Transition time between channels	V _S = 2V R _L = 200Ω, C _L = 15pF Refer to セクション 7.4	25°C		14		ns	
			−40°C to +85°C			22	ns	
			−40°C to +125°C			22	ns	
t _{OPEN} (BBM)	Break before make time	V _S = 2V R _L = 200Ω, C _L = 15pF Refer to セクション 7.5	25°C		9		ns	
			−40°C to +85°C		1		ns	
			−40°C to +125°C		1		ns	
t _{ON(EN)}	Enable turn-on time (TMUX1133 Only)	V _S = 2V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C		15		ns	
			−40°C to +85°C			22	ns	
			−40°C to +125°C			23	ns	

6.6 Electrical Characteristics ($V_{DD} = 3.3V \pm 10\%$) (続き)

At $T_A = 25^\circ\text{C}$, $V_{DD} = 3.3V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
$t_{OFF(EN)}$	Enable turn-off time (TMUX1133 Only)	$V_S = 2V$ $R_L = 200\Omega$, $C_L = 15pF$ Refer to セクション 7.6	25°C		8		ns
			-40°C to $+85^\circ\text{C}$			13	ns
			-40°C to $+125^\circ\text{C}$			14	ns
Q_C	Charge Injection	$V_S = 1V$ $R_S = 0\Omega$, $C_L = 1nF$ Refer to セクション 7.7	25°C		–1		pC
O_{ISO}	Off Isolation	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1\text{MHz}$ Refer to セクション 7.8	25°C		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10\text{MHz}$ Refer to セクション 7.8	25°C		–45		dB
X_{TALK}	Crosstalk	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1\text{MHz}$ Refer to セクション 7.9	25°C		–100		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10\text{MHz}$ Refer to セクション 7.9	25°C		–90		dB
BW	Bandwidth	$R_L = 50\Omega$, $C_L = 5pF$ Refer to セクション 7.10	25°C		220		MHz
C_{SOFF}	Source off capacitance	$f = 1\text{MHz}$	25°C		6		pF
C_{DOFF}	Drain off capacitance	$f = 1\text{MHz}$	25°C		17		pF
C_{SON} C_{DON}	On capacitance	$f = 1\text{MHz}$	25°C		20		pF

(1) When V_S is 3V, V_D is 1V or when V_S is 1V, V_D is 3V.

6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$)

At $T_A = 25^\circ\text{C}$, $V_{DD} = +2.5V$, $V_{SS} = -2.5V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R_{ON}	On-resistance	$V_S = V_{SS}$ to V_{DD} $I_{SD} = 10\text{mA}$ Refer to セクション 7.1	25°C		2	4	Ω
			-40°C to $+85^\circ\text{C}$			4.5	Ω
			-40°C to $+125^\circ\text{C}$			4.9	Ω
ΔR_{ON}	On-resistance matching between channels	$V_S = V_{SS}$ to V_{DD} $I_{SD} = 10\text{mA}$ Refer to セクション 7.1	25°C		0.18		Ω
			-40°C to $+85^\circ\text{C}$			0.4	Ω
			-40°C to $+125^\circ\text{C}$			0.5	Ω
R_{ON} FLAT	On-resistance flatness	$V_S = V_{SS}$ to V_{DD} $I_{SD} = 10\text{mA}$ Refer to セクション 7.1	25°C		0.85		Ω
			-40°C to $+85^\circ\text{C}$			1.6	Ω
			-40°C to $+125^\circ\text{C}$			1.6	Ω
$I_{S(OFF)}$	Source off leakage current ⁽¹⁾	$V_{DD} = +2.5V$, $V_{SS} = -2.5V$ Switch Off $V_D = +2V$ / $-1V$ $V_S = -1V$ / $+2V$ Refer to セクション 7.2	25°C	–0.08	± 0.005	0.08	nA
			-40°C to $+85^\circ\text{C}$	–0.3		0.3	nA
			-40°C to $+125^\circ\text{C}$	–0.9		0.9	nA
$I_{D(OFF)}$	Drain off leakage current ⁽¹⁾	$V_{DD} = +2.5V$, $V_{SS} = -2.5V$ Switch Off $V_D = +2V$ / $-1V$ $V_S = -1V$ / $+2V$ Refer to セクション 7.2	25°C	–0.1	± 0.01	0.1	nA
			-40°C to $+85^\circ\text{C}$	–0.35		0.35	nA
			-40°C to $+125^\circ\text{C}$	–2		2	nA

6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$) (続き)

At $T_A = 25^\circ\text{C}$, $V_{DD} = +2.5V$, $V_{SS} = -2.5V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = +2.5V, V _{SS} = −2.5V Switch On V _D = V _S = +2V / −1V Refer to セクション 7.3	25°C	−0.1	±0.01	0.1	nA
			−40°C to +85°C	−0.35		0.35	nA
			−40°C to +125°C	−2		2	nA
LOGIC INPUTS (EN, SELx)							
V _{IH}	Input logic high		−40°C to +125°C	1.2		2.75	V
V _{IL}	Input logic low			0		0.73	V
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C			±0.05	μA
C _{IN}	Logic input capacitance		25°C	1			pF
			−40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 2.75V	25°C	0.008			μA
			−40°C to +125°C			1	μA
I _{SS}	V _{SS} supply current	Logic inputs = 0V or 2.75V	25°C	0.008			μA
			−40°C to +125°C			1	μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1.5V R _L = 200Ω, C _L = 15pF Refer to セクション 7.4	25°C	12			ns
			−40°C to +85°C			20	ns
			−40°C to +125°C			21	ns
t _{OPEN} (BBM)	Break before make time	V _S = 1.5V R _L = 200Ω, C _L = 15pF Refer to セクション 7.5	25°C	8			ns
			−40°C to +85°C	1			ns
			−40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time (TMUX1133 Only)	V _S = 1.5V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C	12			ns
			−40°C to +85°C			21	ns
			−40°C to +125°C			22	ns
t _{OFF(EN)}	Enable turn-off time (TMUX1133 Only)	V _S = 1.5V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C	6			ns
			−40°C to +85°C			14	ns
			−40°C to +125°C			15	ns
Q _C	Charge Injection	V _S = −1V R _S = 0Ω, C _L = 1nF Refer to セクション 7.7	25°C	−1			pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.8	25°C	−65			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.8	25°C	−45			dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.9	25°C	−100			dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.9	25°C	−90			dB
BW	Bandwidth	R _L = 50Ω, C _L = 5pF Refer to セクション 7.10	25°C	220			MHz

6.7 Electrical Characteristics ($V_{DD} = 2.5V \pm 10\%$), ($V_{SS} = -2.5V \pm 10\%$) (続き)

At $T_A = 25^\circ\text{C}$, $V_{DD} = +2.5V$, $V_{SS} = -2.5V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
C_{SOFF}	Source off capacitance	$f = 1\text{MHz}$	25°C		6		pF
C_{DOFF}	Drain off capacitance	$f = 1\text{MHz}$	25°C		17		pF
C_{SON} C_{DON}	On capacitance	$f = 1\text{MHz}$	25°C		20		pF

(1) When V_S is positive, V_D is negative or when V_S is negative, V_D is positive.

6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$)

At $T_A = 25^\circ\text{C}$, $V_{DD} = 1.8V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R _{ON}	On-resistance	V _S = 0V to V _{DD} I _{SD} = 10mA Refer to セクション 7.1	25°C	40			Ω
			−40°C to +85°C			80	Ω
			−40°C to +125°C			80	Ω
ΔR _{ON}	On-resistance matching between channels	V _S = 0V to V _{DD} I _{SD} = 10mA Refer to セクション 7.1	25°C	0.4			Ω
			−40°C to +85°C			1.5	Ω
			−40°C to +125°C			1.5	Ω
I _{S(OFF)}	Source off leakage current ⁽¹⁾	V _{DD} = 1.98V Switch Off V _D = 1.62V / 1V V _S = 1V / 1.62V Refer to セクション 7.2	25°C	−0.05	±0.003	0.05	nA
			−40°C to +85°C	−0.1		0.1	nA
			−40°C to +125°C	−0.5		0.5	nA
I _{D(OFF)}	Drain off leakage current ⁽¹⁾	V _{DD} = 1.98V Switch Off V _D = 1.62V / 1V V _S = 1V / 1.62V Refer to セクション 7.2	25°C	−0.1	±0.005	0.1	nA
			−40°C to +85°C	−0.5		0.5	nA
			−40°C to +125°C	−2		2	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 1.98V Switch On V _D = V _S = 1.62V / 1V Refer to セクション 7.3	25°C	−0.1	±0.005	0.1	nA
			−40°C to +85°C	−0.5		0.5	nA
			−40°C to +125°C	−2		2	nA
LOGIC INPUTS ($\overline{\text{EN}}$, SELx)							
V _{IH}	Input logic high		−40°C to +125°C	1.07		5.5	V
V _{IL}	Input logic low			0		0.68	V
I _{IH} I _{IL}	Input leakage current		25°C	±0.005			μA
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C			±0.05	μA
C _{IN}	Logic input capacitance		25°C	1			pF
			−40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C	0.001			μA
			−40°C to +125°C			0.85	μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1V R _L = 200Ω, C _L = 15pF Refer to セクション 7.4	25°C	28			ns
			−40°C to +85°C			48	ns
			−40°C to +125°C			48	ns

6.8 Electrical Characteristics ($V_{DD} = 1.8V \pm 10\%$) (続き)

At $T_A = 25^\circ\text{C}$, $V_{DD} = 1.8V$ (unless otherwise noted).

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
t_{OPEN} (BBM)	Break before make time	$V_S = 1V$ $R_L = 200\Omega$, $C_L = 15pF$ Refer to セクション 7.5	25°C		16		ns
			-40°C to $+85^\circ\text{C}$	1			ns
			-40°C to $+125^\circ\text{C}$	1			ns
$t_{\text{ON(EN)}}$	Enable turn-on time (TMUX1133 Only)	$V_S = 1V$ $R_L = 200\Omega$, $C_L = 15pF$ Refer to セクション 7.6	25°C		28		ns
			-40°C to $+85^\circ\text{C}$			48	ns
			-40°C to $+125^\circ\text{C}$			48	ns
$t_{\text{OFF(EN)}}$	Enable turn-off time (TMUX1133 Only)	$V_S = 1V$ $R_L = 200\Omega$, $C_L = 15pF$ Refer to セクション 7.6	25°C		16		ns
			-40°C to $+85^\circ\text{C}$			27	ns
			-40°C to $+125^\circ\text{C}$			27	ns
Q_C	Charge Injection	$V_S = 1V$ $R_S = 0\Omega$, $C_L = 1nF$ Refer to セクション 7.7	25°C		–1		pC
O_{ISO}	Off Isolation	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1\text{MHz}$ Refer to セクション 7.8	25°C		–65		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10\text{MHz}$ Refer to セクション 7.8	25°C		–45		dB
X_{TALK}	Crosstalk	$R_L = 50\Omega$, $C_L = 5pF$ $f = 1\text{MHz}$ Refer to セクション 7.9	25°C		–100		dB
		$R_L = 50\Omega$, $C_L = 5pF$ $f = 10\text{MHz}$ Refer to セクション 7.9	25°C		–90		dB
BW	Bandwidth	$R_L = 50\Omega$, $C_L = 5pF$ Refer to セクション 7.10	25°C		220		MHz
C_{SOFF}	Source off capacitance	$f = 1\text{MHz}$	25°C		6		pF
C_{DOFF}	Drain off capacitance	$f = 1\text{MHz}$	25°C		17		pF
C_{SON} C_{DON}	On capacitance	$f = 1\text{MHz}$	25°C		20		pF

(1) When V_S is 1.62V, V_D is 1V or when V_S is 1V, V_D is 1.62V.

6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
R_{ON}	On-resistance	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$ Refer to セクション 7.1	25°C		70		Ω
			-40°C to $+85^\circ\text{C}$			105	Ω
			-40°C to $+125^\circ\text{C}$			105	Ω
ΔR_{ON}	On-resistance matching between channels	$V_S = 0V$ to V_{DD} $I_{SD} = 10\text{mA}$ Refer to セクション 7.1	25°C		0.4		Ω
			-40°C to $+85^\circ\text{C}$			1.5	Ω
			-40°C to $+125^\circ\text{C}$			1.5	Ω
$I_{S(\text{OFF})}$	Source off leakage current ⁽¹⁾	$V_{DD} = 1.32V$ Switch Off $V_D = 1V / 0.8V$ $V_S = 0.8V / 1V$ Refer to セクション 7.2	25°C	–0.05	± 0.003	0.05	nA
			-40°C to $+85^\circ\text{C}$	–0.1		0.1	nA
			-40°C to $+125^\circ\text{C}$	–0.5		0.5	nA

6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$) (続き)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
I _{D(OFF)}	Drain off leakage current ⁽¹⁾	V _{DD} = 1.32V Switch Off V _D = 1V / 0.8V V _S = 0.8V / 1V Refer to セクション 7.2	25°C	−0.1	±0.005	0.1	nA
			−40°C to +85°C	−0.5		0.5	nA
			−40°C to +125°C	−2		2	nA
I _{D(ON)} I _{S(ON)}	Channel on leakage current	V _{DD} = 1.32V Switch On V _D = V _S = 1V / 0.8V Refer to セクション 7.3	25°C	−0.1	±0.005	0.1	nA
			−40°C to +85°C	−0.5		0.5	nA
			−40°C to +125°C	−2		2	nA
LOGIC INPUTS ($\overline{EN}$, SELx)							
V _{IH}	Input logic high		−40°C to +125°C	0.96		5.5	V
V _{IL}	Input logic low			0		0.36	V
I _{IH} I _{IL}	Input leakage current		25°C		±0.005		μA
I _{IH} I _{IL}	Input leakage current		−40°C to +125°C			±0.05	μA
C _{IN}	Logic input capacitance		25°C		1		pF
			−40°C to +125°C			2	pF
POWER SUPPLY							
I _{DD}	V _{DD} supply current	Logic inputs = 0V or 5.5V	25°C		0.001		μA
			−40°C to +125°C			0.7	μA
DYNAMIC CHARACTERISTICS							
t _{TRAN}	Transition time between channels	V _S = 1V R _L = 200Ω, C _L = 15pF Refer to セクション 7.4	25°C		55		ns
			−40°C to +85°C			201	ns
			−40°C to +125°C			201	ns
t _{OPEN} (BBM)	Break before make time	V _S = 1V R _L = 200Ω, C _L = 15pF Refer to セクション 7.5	25°C		28		ns
			−40°C to +85°C	1			ns
			−40°C to +125°C	1			ns
t _{ON(EN)}	Enable turn-on time (TMUX1133 Only)	V _S = 1V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C		60		ns
			−40°C to +85°C			201	ns
			−40°C to +125°C			201	ns
t _{OFF(EN)}	Enable turn-off time (TMUX1133 Only)	V _S = 1V R _L = 200Ω, C _L = 15pF Refer to セクション 7.6	25°C		45		ns
			−40°C to +85°C			150	ns
			−40°C to +125°C			150	ns
Q _C	Charge Injection	V _S = 1V R _S = 0Ω, C _L = 1nF Refer to セクション 7.7	25°C		−1		pC
O _{ISO}	Off Isolation	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.8	25°C		−65		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.8	25°C		−45		dB
X _{TALK}	Crosstalk	R _L = 50Ω, C _L = 5pF f = 1MHz Refer to セクション 7.9	25°C		−100		dB
		R _L = 50Ω, C _L = 5pF f = 10MHz Refer to セクション 7.9	25°C		−90		dB

6.9 Electrical Characteristics ($V_{DD} = 1.2V \pm 10\%$) (続き)

PARAMETER		TEST CONDITIONS	TA	MIN	TYP	MAX	UNIT
BW	Bandwidth	$R_L = 50\Omega$, $C_L = 5pF$ Refer to セクション 7.10	25°C		220		MHz
C_{SOFF}	Source off capacitance	$f = 1MHz$	25°C		6		pF
C_{DOFF}	Drain off capacitance	$f = 1MHz$	25°C		17		pF
C_{SON} C_{DON}	On capacitance	$f = 1MHz$	25°C		20		pF

(1) When V_S is 1V, V_D is 0.8V or when V_S is 0.8V, V_D is 1V.

6.10 Typical Characteristics

at $T_A = 25^\circ C$, $V_{DD} = 5V$ (unless otherwise noted)

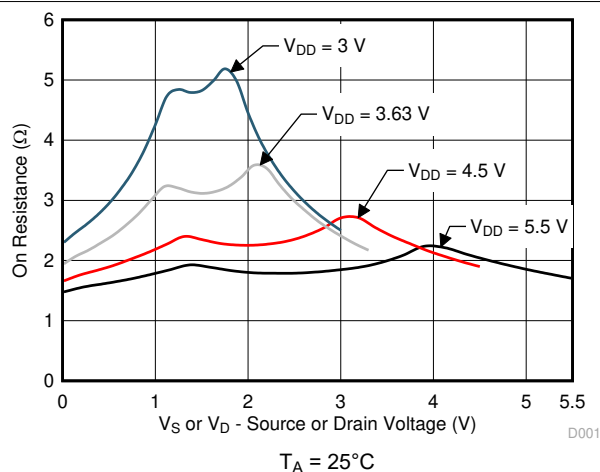


図 6-1. On-Resistance vs Source or Drain Voltage

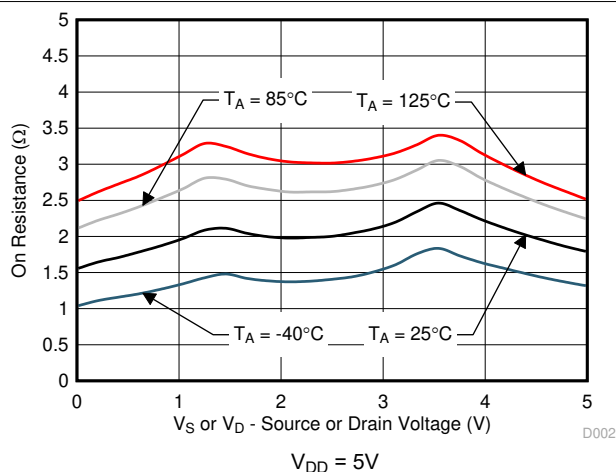


図 6-2. On-Resistance vs Temperature

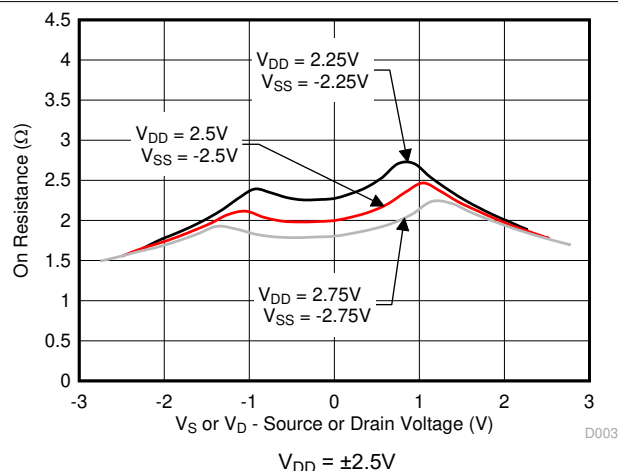


図 6-3. On-Resistance vs Temperature

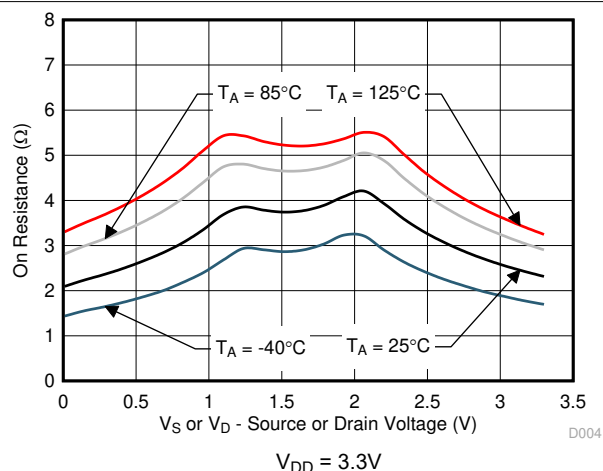


図 6-4. On-Resistance vs Temperature

6.10 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5\text{V}$ (unless otherwise noted)

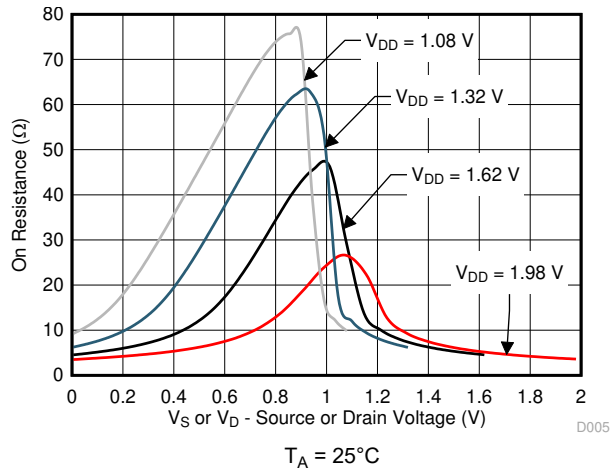


Figure 6-5. On-Resistance vs Source or Drain Voltage

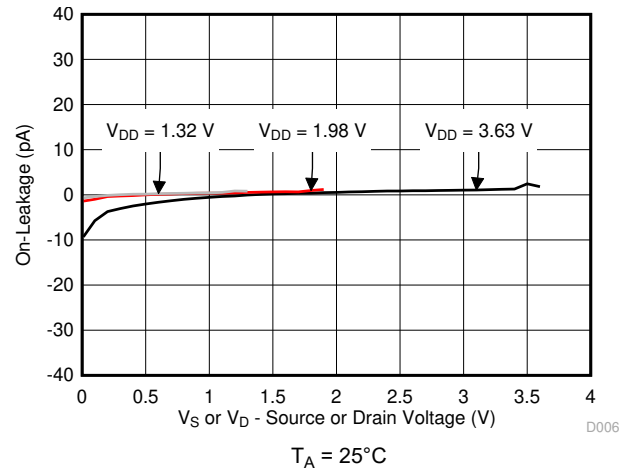


Figure 6-6. On-Leakage vs Source or Drain Voltage

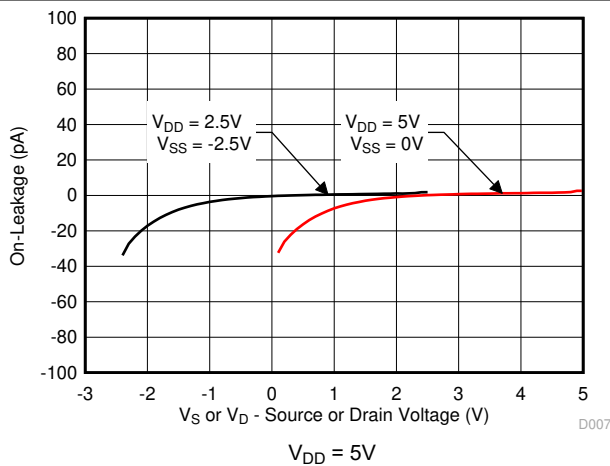


Figure 6-7. On-Leakage vs Source or Drain Voltage

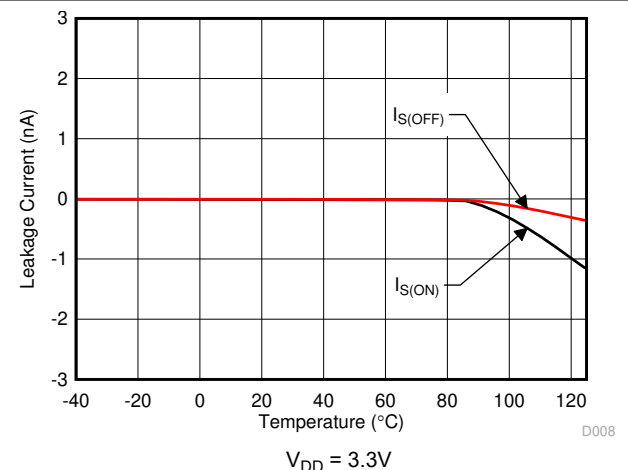


Figure 6-8. Leakage Current vs Temperature

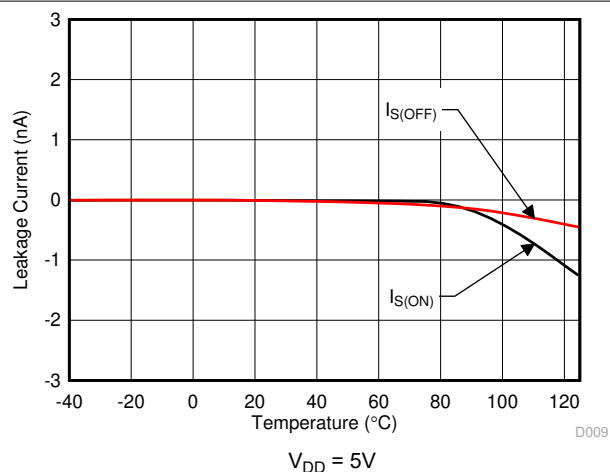


Figure 6-9. Leakage Current vs Temperature

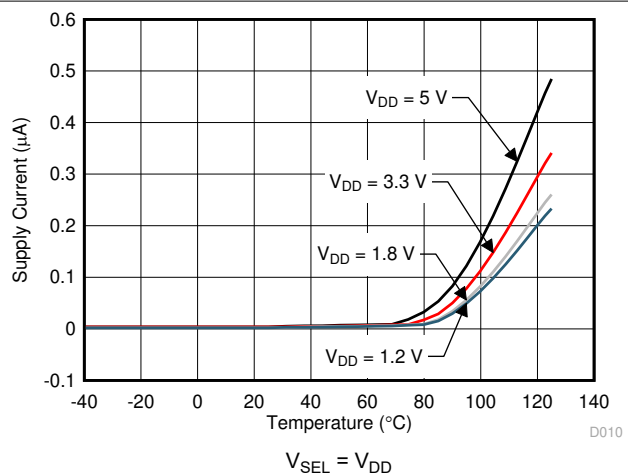


Figure 6-10. Supply Current vs Temperature

6.10 Typical Characteristics (continued)

at $T_A = 25^\circ\text{C}$, $V_{DD} = 5\text{V}$ (unless otherwise noted)

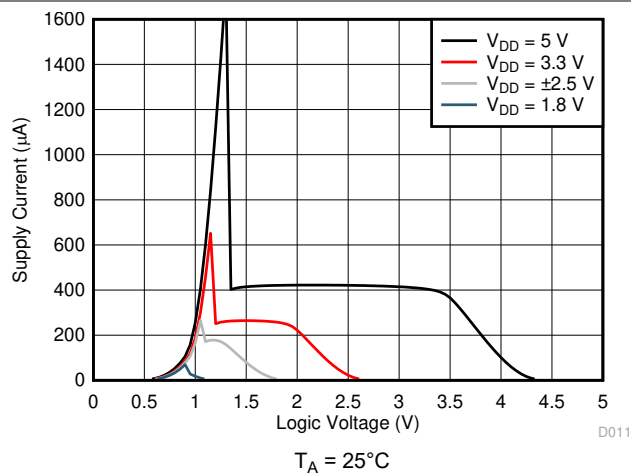


Figure 6-11. Supply Current vs Logic Voltage

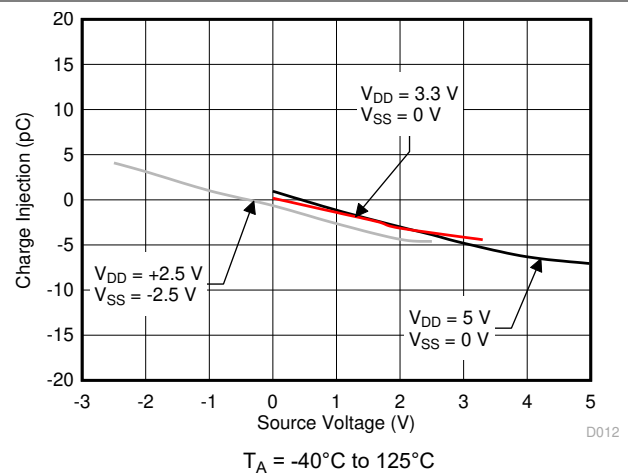


Figure 6-12. Charge Injection vs Source Voltage

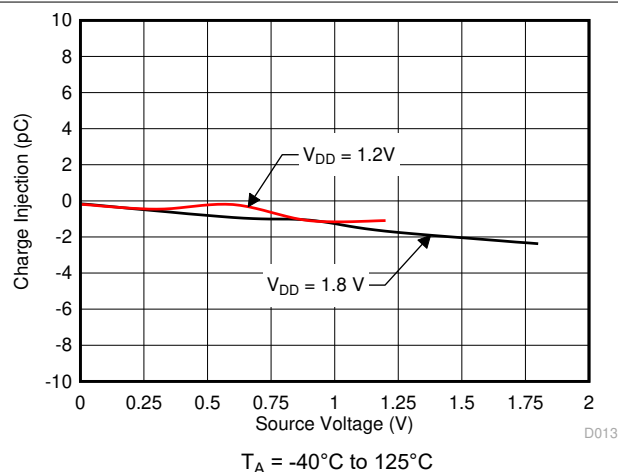


Figure 6-13. Charge Injection vs Source Voltage

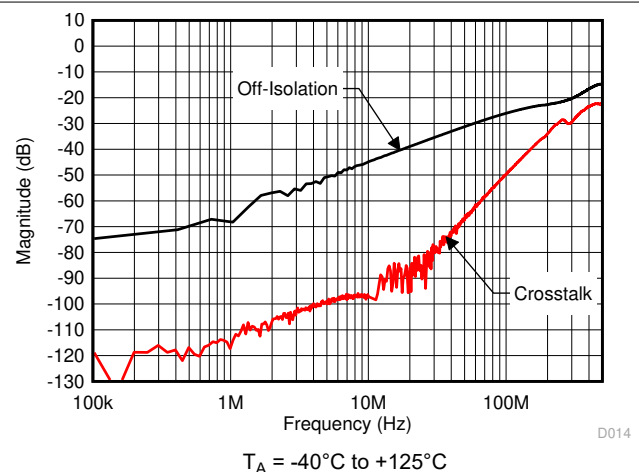


Figure 6-14. Xtalk and Off-Isolation vs Frequency


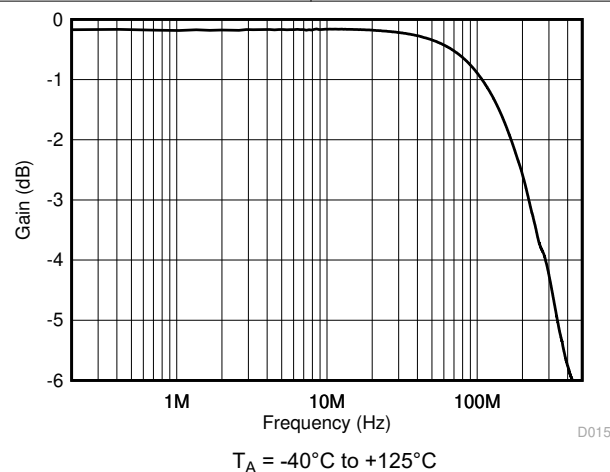


Figure 6-15. On Response vs Frequency

7 Parameter Measurement Information

7.1 On-Resistance

The on-resistance of a device is the ohmic resistance between the source (Sx) and drain (Dx) pins of the device. The on-resistance varies with input voltage and supply voltage. The symbol R_{ON} is used to denote on-resistance. The measurement setup used to measure R_{ON} is shown in 7-1. Voltage (V) and current (I_{SD}) are measured using this setup, and R_{ON} is computed with $R_{ON} = V / I_{SD}$:

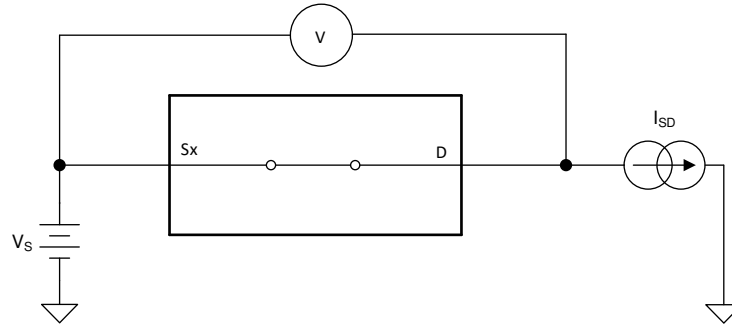

7-1. On-Resistance Measurement Setup

7.2 Off-Leakage Current


There are two types of leakage currents associated with a switch during the off state:

1. Source off-leakage current
2. Drain off-leakage current

Source leakage current is defined as the leakage current flowing into or out of the source pin when the switch is off. This current is denoted by the symbol $I_{S(OFF)}$.

Drain leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is off. This current is denoted by the symbol $I_{D(OFF)}$.

The setup used to measure both off-leakage currents is shown in 7-2.

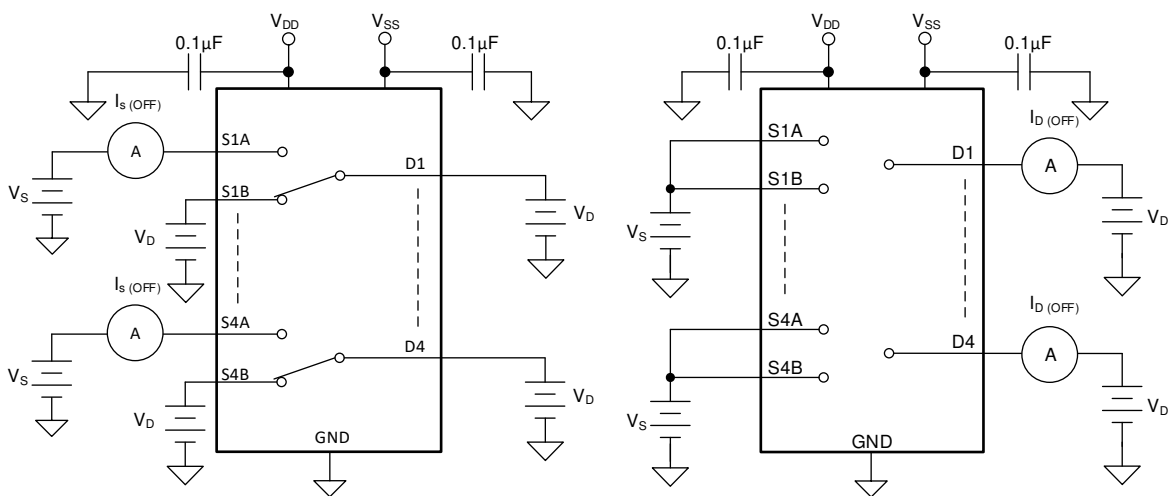


7-2. Off-Leakage Measurement Setup

7.3 On-Leakage Current

Source on-leakage current is defined as the leakage current flowing into or out of the source pin when the switch is on. This current is denoted by the symbol $I_{S(ON)}$.

Drain on-leakage current is defined as the leakage current flowing into or out of the drain pin when the switch is on. This current is denoted by the symbol $I_{D(ON)}$.


Either the source pin or drain pin is left floating during the measurement.  7-3 shows the circuit used for measuring the on-leakage current, denoted by $I_{S(ON)}$ or $I_{D(ON)}$.

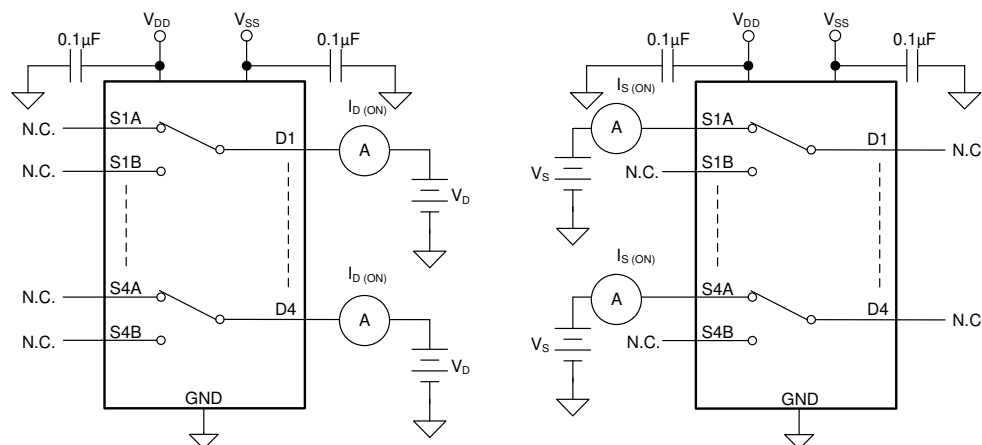

 7-3. On-Leakage Measurement Setup

7.4 Transition Time

Transition time is defined as the time taken by the output of the device to rise or fall 10% after the address signal has risen or fallen past the logic threshold. The 10% transition measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance.  7-4 shows the setup used to measure transition time, denoted by the symbol $t_{\text{TRANSITION}}$.

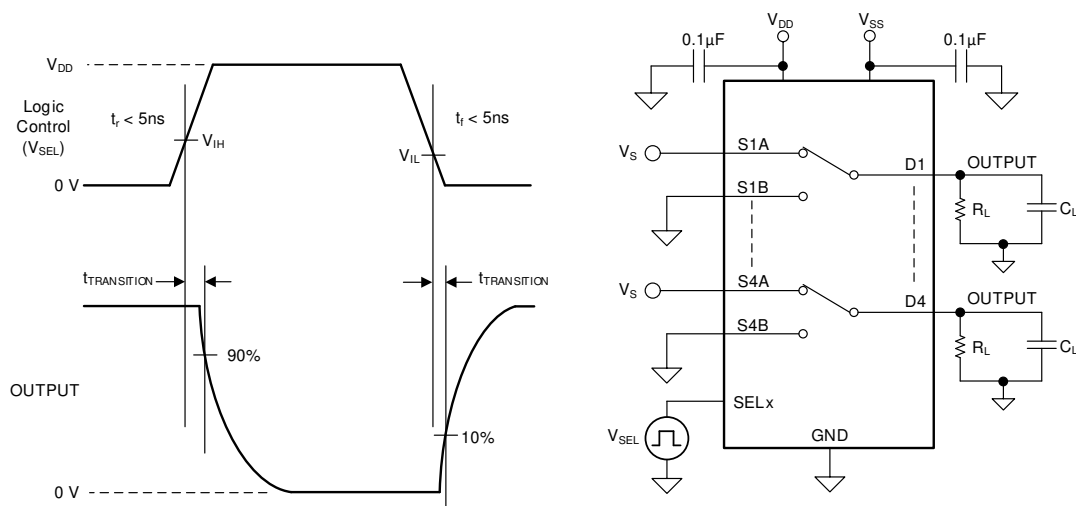

 7-4. Transition-Time Measurement Setup

7.5 Break-Before-Make

Break-before-make delay is a safety feature that prevents two inputs from connecting when the device is switching. The output first breaks from the on-state switch before making the connection with the next on-state switch. The time delay between the *break* and the *make* is known as break-before-make delay. Figure 7-5 shows the setup used to measure break-before-make delay, denoted by the symbol $t_{\text{OPEN(BBM)}}$.

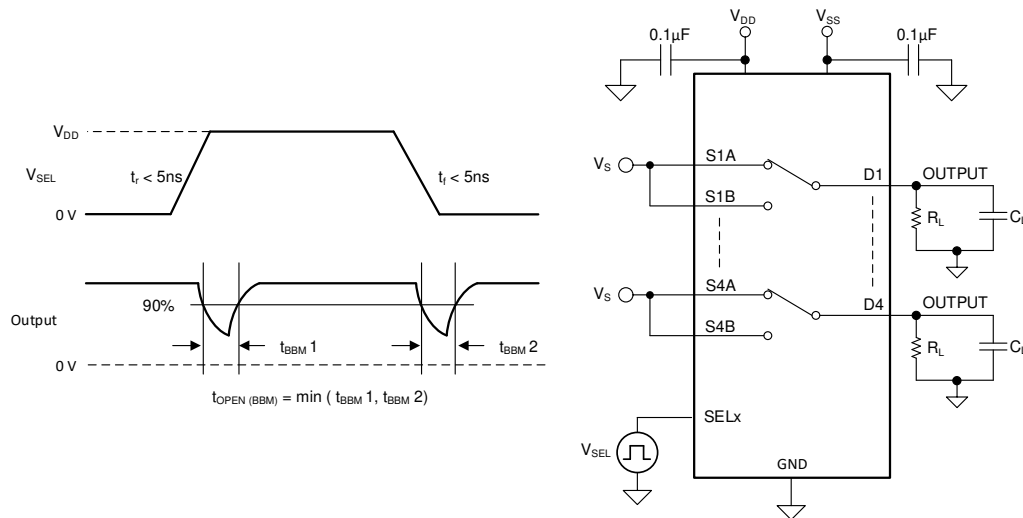


Figure 7-5. Break-Before-Make Delay Measurement Setup

7.6 $t_{\text{ON(EN)}}$ and $t_{\text{OFF(EN)}}$

Turn-on time is defined as the time taken by the output of the device to rise to 10% after the enable has risen past the logic threshold. The 10% measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-6 shows the setup used to measure turn-on time, denoted by the symbol $t_{\text{ON(EN)}}$.

Turn-off time is defined as the time taken by the output of the device to fall to 90% after the enable has fallen past the logic threshold. The 90% measurement is utilized to provide the timing of the device. System level timing can then account for the time constant added from the load resistance and load capacitance. Figure 7-6 shows the setup used to measure turn-off time, denoted by the symbol $t_{\text{OFF(EN)}}$.

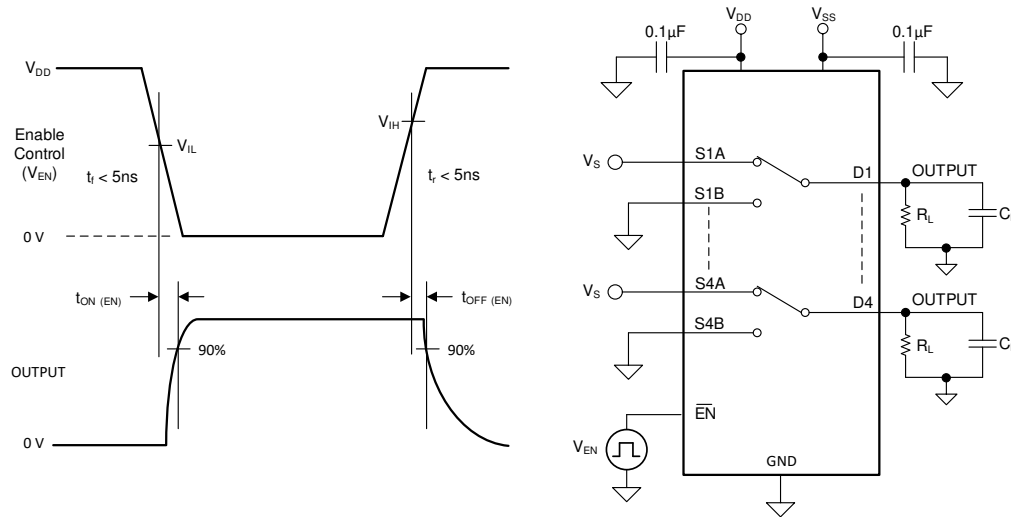


図 7-6. Turn-On and Turn-Off Time Measurement Setup

7.7 Charge Injection

The TMUX1133 has a transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source or drain of the device is known as charge injection, and is denoted by the symbol Q_C . 図 7-7 shows the setup used to measure charge injection from source (S_x) to drain (D).


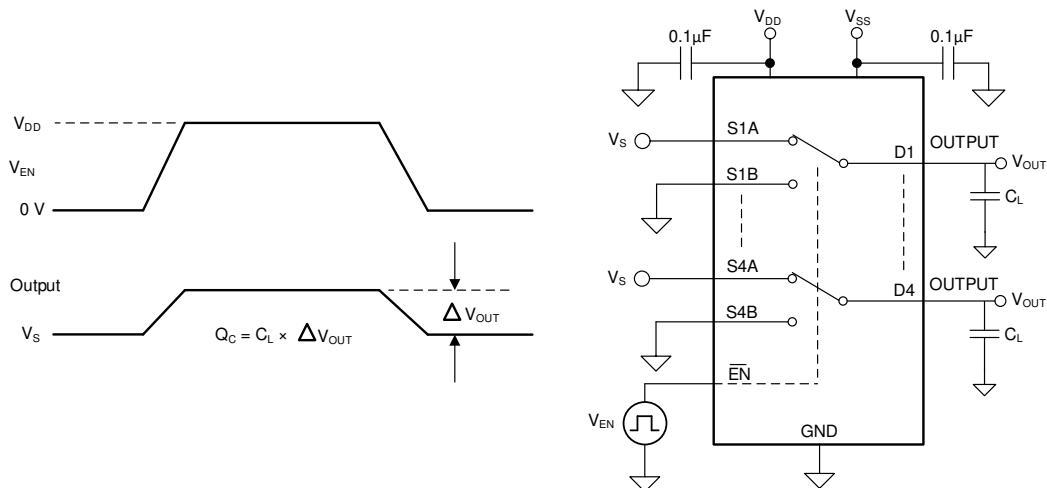


図 7-7. Charge-Injection Measurement Setup

7.8 Off Isolation

Off isolation is defined as the ratio of the signal at the drain pin (D) of the device when a signal is applied to the source pin (S_x) of an off-channel. 図 7-8 shows the setup used to measure, and the equation used to calculate off isolation.

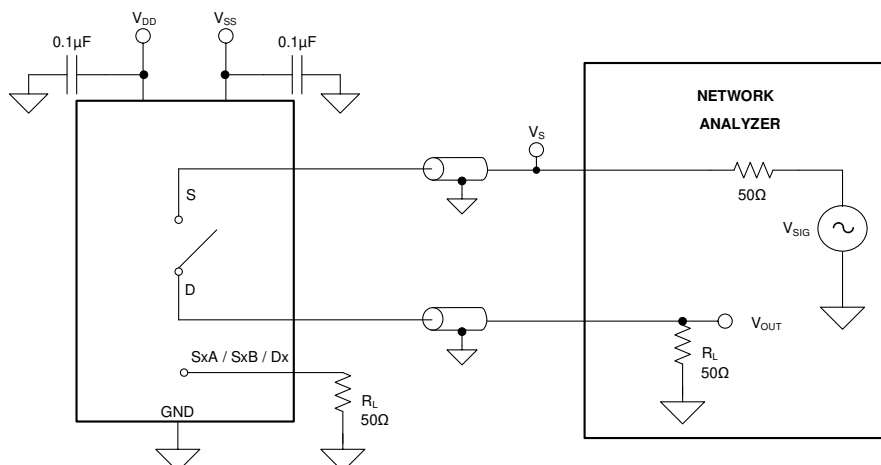


7-8. Off Isolation Measurement Setup

$$\text{Off Isolation} = 20 \cdot \log \left(\frac{V_{\text{OUT}}}{V_S} \right) \quad (1)$$

7.9 Crosstalk

Crosstalk is defined as the ratio of the signal at the drain pin (D) of a different channel, when a signal is applied at the source pin (Sx) of an on-channel. 7-9 shows the setup used to measure, and the equation used to calculate crosstalk.

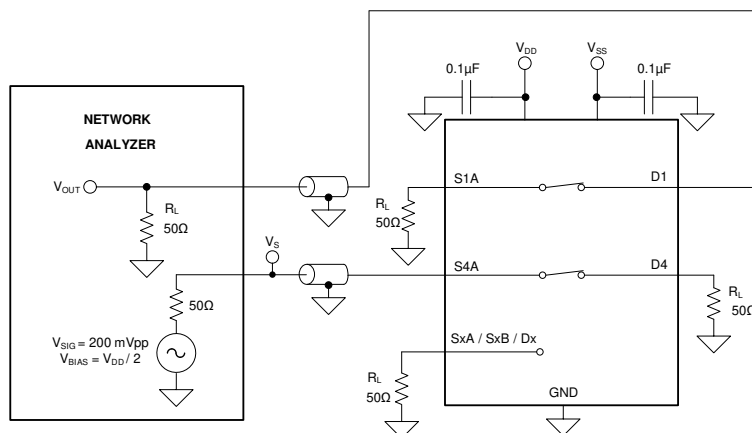

7-9. Crosstalk Measurement Setup

$$\text{Channel-to-Channel Crosstalk} = 20 \cdot \log \left(\frac{V_{\text{OUT}}}{V_S} \right) \quad (2)$$

7.10 Bandwidth

Bandwidth is defined as the range of frequencies that are attenuated by less than 3dB when the input is applied to the source pin (Sx) of an on-channel, and the output is measured at the drain pin (D) of the device. [Figure 7-10](#) shows the setup used to measure bandwidth.

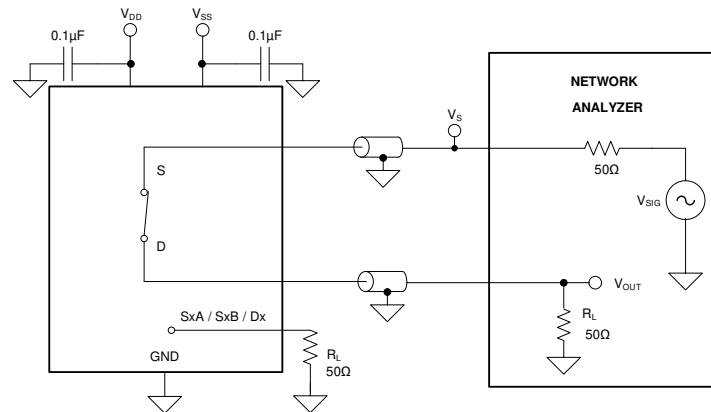



Figure 7-10. Bandwidth Measurement Setup

8 Detailed Description

8.1 Overview

The TMUX1133 contains three independently controlled single-pole double-throw (SPDT) switches and has an active low $\overline{\text{EN}}$ pin to enable or disable all three switches simultaneously. The TMUX1134 contains four independently controlled SPDT switches.

8.2 Functional Block Diagram

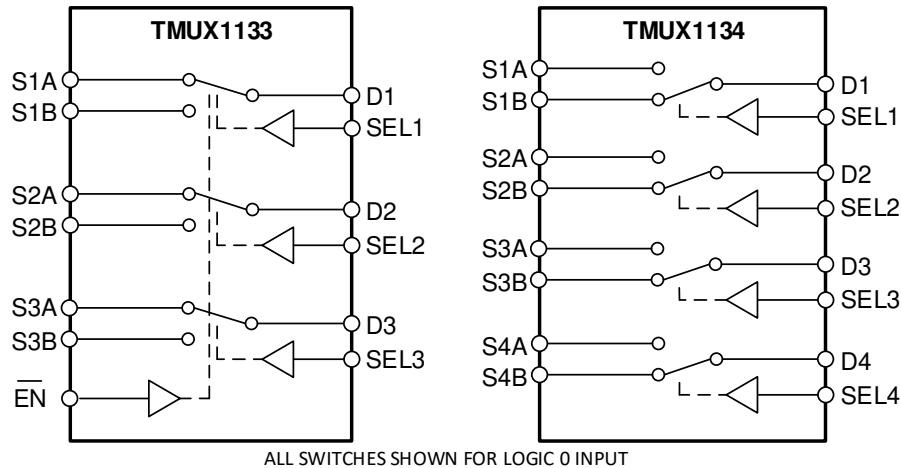

8.3 Feature Description

8.3.1 Bidirectional Operation

The TMUX113x devices conduct equally well from source (S_x) to drain (D_x) or from drain (D_x) to source (S_x). Each channel has very similar characteristics in both directions and supports both analog and digital signals.

8.3.2 Rail to Rail Operation

The valid signal path input/output voltage for TMUX113x ranges from V_{SS} to V_{DD} . For single supply applications V_{SS} can be connected to GND.

8.3.3 1.8V Logic Compatible Inputs

The TMUX113x devices have 1.8V logic compatible control for all logic control inputs. The logic input thresholds scale with supply but still provide 1.8V logic control when operating at 5.5V supply voltage. 1.8V logic level inputs allows the TMUX113x devices to interface with processors that have lower logic I/O rails and eliminates the need for an external translator, which saves both space and BOM cost. The current consumption of the TMUX113x devices increase when using 1.8V logic with higher supply voltage as shown in [Figure 6-11](#). For more information on 1.8V logic implementations refer to [Simplifying Design with 1.8V logic Muxes and Switches](#)

8.3.4 Fail-Safe Logic

The TMUX113x devices support Fail-Safe Logic on the control input pins (SEL_x and $\overline{\text{EN}}$) allowing for operation up to 5.5V, regardless of the state of the supply pins. This feature allows voltages on the control pins to be applied before the supply pins, protecting the device from potential damage. Fail-Safe Logic minimizes system complexity by removing the need for power supply sequencing on the logic control pins. For example, the Fail-Safe Logic feature allows the select pins of the TMUX113x devices to be ramped to 5.5V while $V_{DD} = 0V$. Additionally, the feature enables operation of the TMUX113x devices with $V_{DD} = 1.2V$ while allowing the select pins to interface with a logic level of another device up to 5.5V.

8.3.5 Ultra-low Leakage Current

The TMUX1133 and TMUX1134 provide extremely low on-leakage and off-leakage currents. The TMUX113x devices are capable of switching signals from high source-impedance inputs into a high input-impedance op amp with minimal offset error because of the ultra-low leakage currents. [Figure 8-1](#) shows typical leakage currents of the TMUX113x devices versus input voltage.

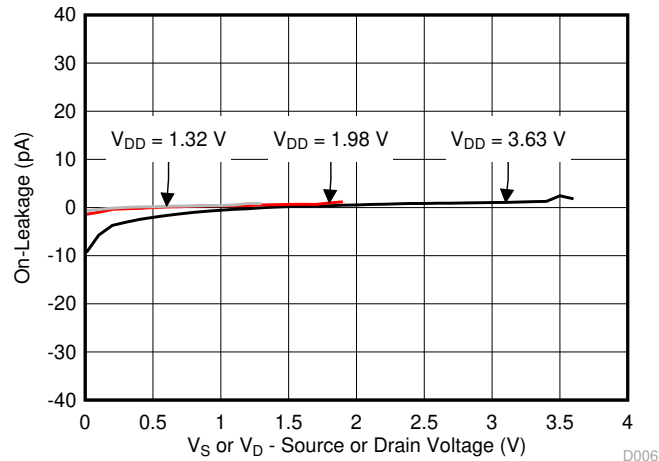


Figure 8-1. Leakage Current vs Input Voltage

8.3.6 Ultra-Low Charge Injection

The TMUX113x devices have a transmission gate topology, as shown in [Figure 8-2](#). Any mismatch in the stray capacitance associated with the NMOS and PMOS causes an output level change whenever the switch is opened or closed.

The TMUX113x devices have special charge-injection cancellation circuitry that reduces the source-to-drain charge injection to -1pC at $V_S = 1V$ as shown in [Figure 8-3](#).

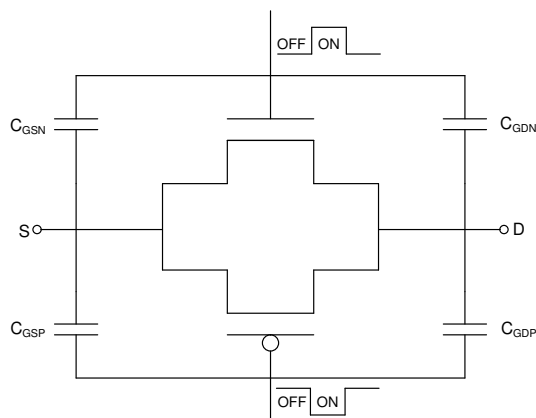


Figure 8-2. Transmission Gate Topology

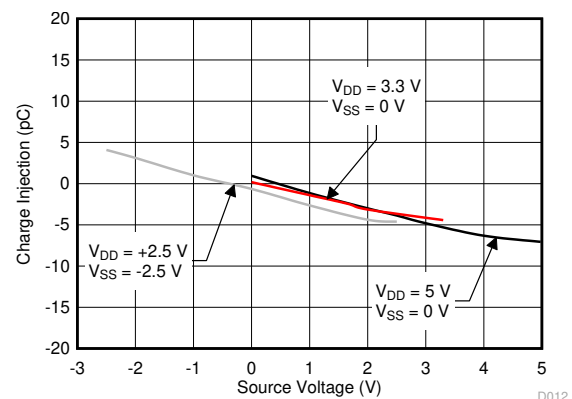


Figure 8-3. Charge Injection vs Source Voltage

8.4 Device Functional Modes

The select (SELx) pins are logic pins that control the connection between the source (SxA and SxB) and drain (Dx) pins of the TMUX113x devices. When a source pin is not selected that pin is in an open state (Hi-Z). When a source pin is selected the switch conducts to drain. The logic control pins can be as high as 5.5V.

When the $\overline{\text{EN}}$ pin of the TMUX1133 is pulled low the SELx logic control inputs determine which source input is selected. When the $\overline{\text{EN}}$ pin is pulled high, all of the switches are in an open state regardless of the state of the SELx logic control inputs. The TMUX1134 SELx logic control inputs determine which source pin is connected to the drain pin for each channel.

The TMUX113x devices can be operated without any external components except for the supply decoupling capacitors. Unused logic control pins must be tied to GND or V_{DD} so that the device does not consume additional current as highlighted in [Implications of Slow or Floating CMOS Inputs](#). Unused signal path inputs (SxA, SxB, or Dx) should be connected to GND.

8.5 Truth Tables

表 8-1 and 表 8-2 lists the truth tables for the TMUX1133 and TMUX1134 respectively.

表 8-1. TMUX1133 Truth Table

$\overline{\text{EN}}$	SEL1 ⁽¹⁾	SEL2	SEL3	Selected Source Pins Connected To Drain Pins
0	0	X	X	S1A to D1
0	1	X	X	S1B to D1
0	X	0	X	S2A to D2
0	X	1	X	S2B to D2
0	X	X	0	S3A to D3
0	X	X	1	S3B to D3
1	X	X	X	Hi-Z (OFF)

表 8-2. TMUX1134 Truth Table

SEL1	SEL2	SEL3	SEL4	Selected Source Pins Connected To Drain Pins
0	X	X	X	S1B to D1
1	X	X	X	S1A to D1
X	0	X	X	S2B to D2
X	1	X	X	S2A to D2
X	X	0	X	S3B to D3
X	X	1	X	S3A to D3
X	X	X	0	S4B to D4
X	X	X	1	S4A to D4

(1) X denotes *do not care*.

9 Application and Implementation

注

以下のアプリケーション情報は、テキサス・インスツルメンツの製品仕様に含まれるものではなく、テキサス・インスツルメンツはその正確性も完全性も保証いたしません。個々の目的に対する製品の適合性については、お客様の責任で判断していただくことになります。また、お客様は自身の設計実装を検証しテストすることで、システムの機能を確認する必要があります。

9.1 Application Information

The TMUX11xx family offers ultra-low input/output leakage currents and low charge injection. These devices operate up to 5.5V, and offer true rail-to-rail input and output switching of both analog and digital signals. The TMUX113x devices have low on-capacitance which allows faster settling time when switching between inputs in the time domain. These features make the TMUX11xx devices a family of precision, high-performance switches and multiplexers for low-voltage applications.

9.2 Typical Application

図 9-1 shows an example circuit where the TMUX1133 or TMUX1134 can be used to minimize board space by integrating various applications into a multi-channel 2:1 (SPDT) switch. The application uses a 3-channel, or 4-channel SPDT switch to optimize the tradeoffs of system flexibility and board space.

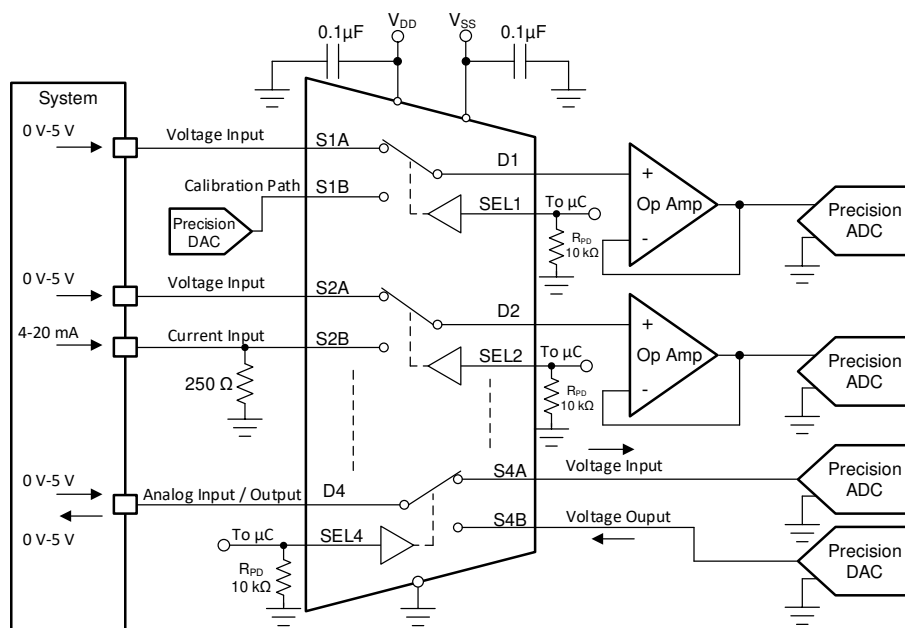


図 9-1. Multi-channel 2:1, Switching Applications

9.2.1 Design Requirements

For this design example, use the parameters listed in 表 9-1.

表 9-1. Design Parameters

PARAMETERS	VALUES
Supply (V_{DD})	5V
Input / Output Voltage range	0V to 5V
Input / Output Current range	4mA to 20mA

表 9-1. Design Parameters (続き)

PARAMETERS	VALUES
Control logic thresholds	1.8V compatible

9.2.2 Detailed Design Procedure

The TMUX113x devices can be operated without any external components except for the supply decoupling capacitors, however pull-down or pull-up resistors are recommended on the logic control inputs so that each channel is in a known state. All inputs passing through the switch must fall within the recommended operating conditions, including signal range and continuous current. For this design with a single supply of 5V the signal range can be 0V to 5V, and the maximum continuous current can be 30mA.

Industrial applications such as in factory automation and control; test and measurement benefit from using a multi-channel 2:1 switch, because it allows additional flexibility in the design.

A single 2:1 switch has numerous applications such as:

1. Switching between an analog signal path and a calibration path so that the system is calibrated across the life of a product or after installation.
2. Configuring a single channel to accept either a voltage or current input through software - allowing for system flexibility across applications where the end users input signals may differ.
3. Allowing a single channel to be configured as either an analog input or analog output. Providing additional control to a system while minimizing the number of physical connectors

Figure 9-1 shows how to configure a multi-channel analog switch to address these design implementations for additional control and flexibility in the system. The on-resistance of the TMUX113x devices is very low, 2Ω typical, and has a maximum on-leakage current of 2nA which allows the devices to be used in precision measurement applications. A system with a 4mA to 20mA signal can achieve >20bits of precision due to the extremely low leakage current of the TMUX113x devices.

9.2.3 Application Curve

The TMUX113x devices are capable of switching signals with minimal distortion because of the ultra-low leakage currents and low on-resistance. Figure 9-2 shows how the leakage current of the TMUX113x varies with different input voltages.

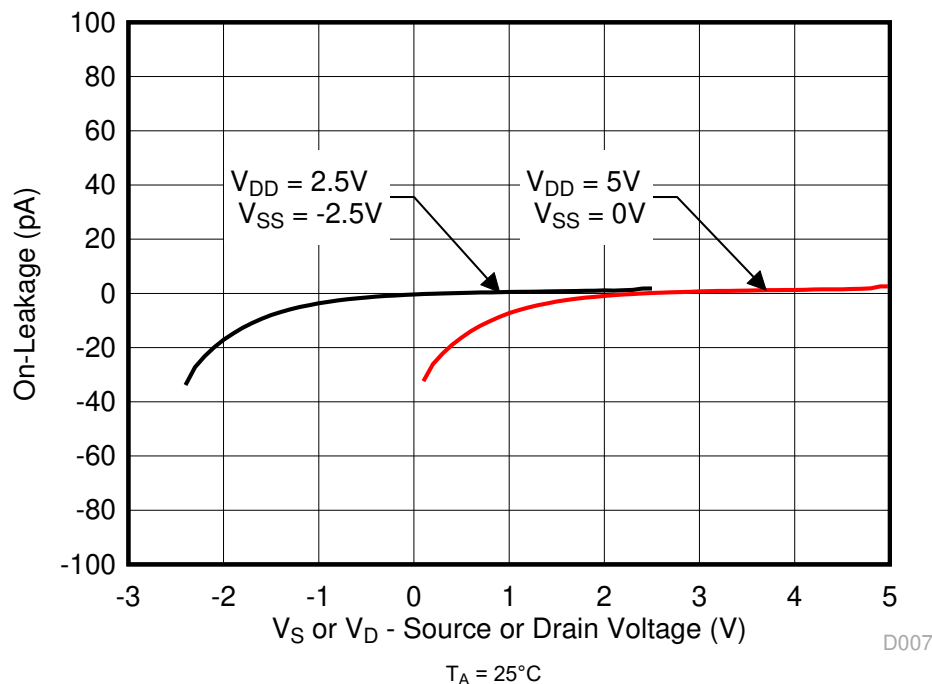


Figure 9-2. On-Leakage vs Source or Drain Voltage

9.3 Power Supply Recommendations

The TMUX113x devices operate across a wide supply range of 1.08V to 5.5V single supply, or $\pm 2.75\text{V}$ for dual supply applications. For single supply voltage applications V_{SS} must be connected to GND. Do not exceed the absolute maximum ratings because stresses beyond the listed ratings can cause permanent damage to the devices.

Power-supply bypassing improves noise margin and prevents switching noise propagation from the V_{DD} and V_{SS} supplies to other components. Good power-supply decoupling is important to achieve optimum performance. For improved supply noise immunity, use a supply decoupling capacitor ranging from 0.1 μF to 10 μF from V_{DD} and V_{SS} to ground. Place the bypass capacitors as close to the power supply pins of the device as possible using low-impedance connections. TI recommends using multi-layer ceramic chip capacitors (MLCCs) that offer low equivalent series resistance (ESR) and inductance (ESL) characteristics for power-supply decoupling purposes. For very sensitive systems, or for systems in harsh noise environments, avoiding the use of vias for connecting the capacitors to the device pins may offer superior noise immunity. The use of multiple vias in parallel lowers the overall inductance and is beneficial for connections to ground planes.

9.4 Layout

9.4.1 Layout Guidelines

When a PCB trace turns a corner at a 90° angle, a reflection can occur. A reflection occurs primarily because of the change of width of the trace. At the apex of the turn, the trace width increases to 1.414 times the width. This increase upsets the transmission-line characteristics, especially the distributed capacitance and self-inductance of the trace which results in the reflection. Not all PCB traces can be straight and therefore some traces must turn corners. [Figure 9-3](#) shows progressively better techniques of rounding corners. Only the last example (BEST) maintains constant trace width and minimizes reflections.

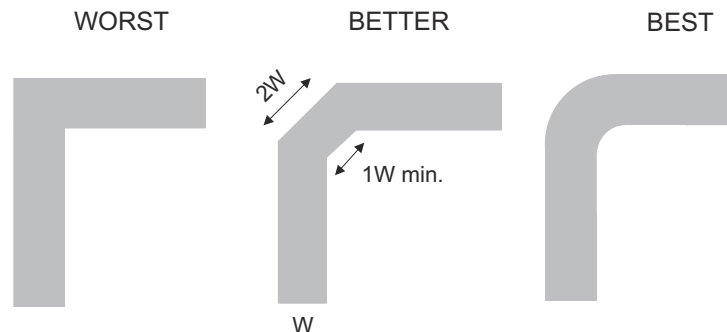


Figure 9-3. Trace Example

Route high-speed signals using a minimum of vias and corners which reduces signal reflections and impedance changes. When a via must be used, increase the clearance size around it to minimize its capacitance. Each via introduces discontinuities in the signal's transmission line and increases the chance of picking up interference from the other layers of the board. Be careful when designing test points, through-hole pins are not recommended at high frequencies.

[Figure 9-4](#) and [Figure 9-5](#) shows examples of a PCB layout with the TMUX1133 and TMUX1134 respectively. Some key considerations are:

- Decouple the V_{DD} and V_{SS} pins with a 0.1 μF capacitor, placed as close to the pin as possible. Ensure that the capacitor voltage rating is sufficient for the supply voltage.
- Keep the input lines as short as possible.
- Use a solid ground plane to help reduce electromagnetic interference (EMI) noise pickup.
- Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when necessary.

9.4.2 Layout Example

Figure 9-4 shows an example board layout for the TMUX1133.

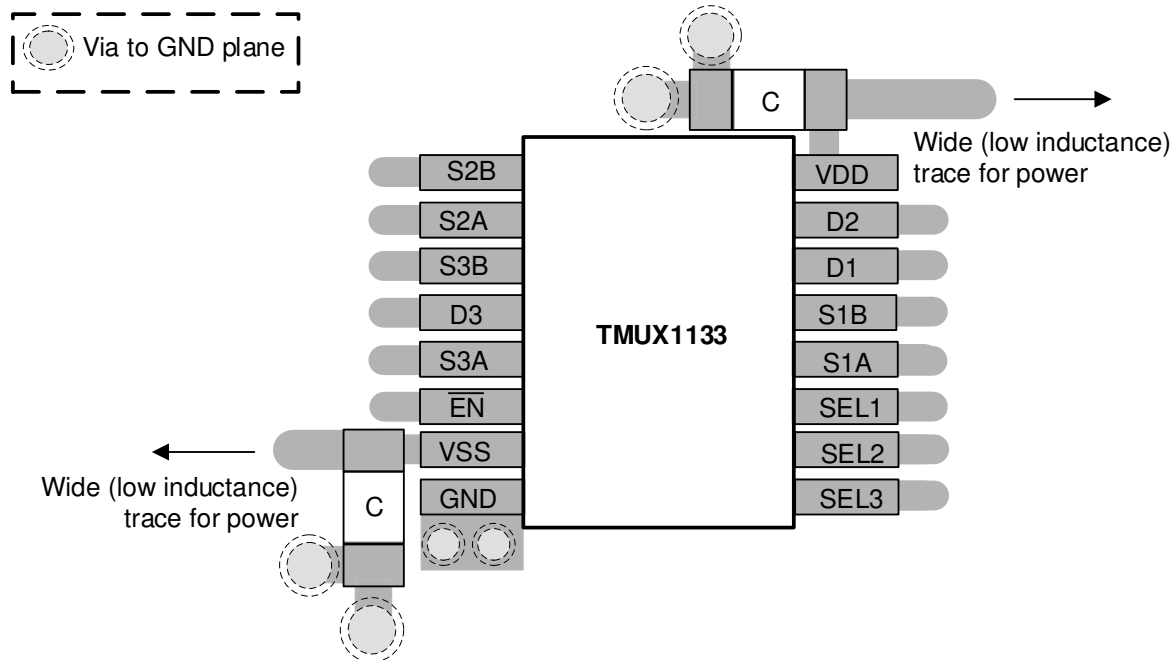


Figure 9-4. TMUX1133 Layout Example

Figure 9-5 shows an example board layout for the TMUX1134.

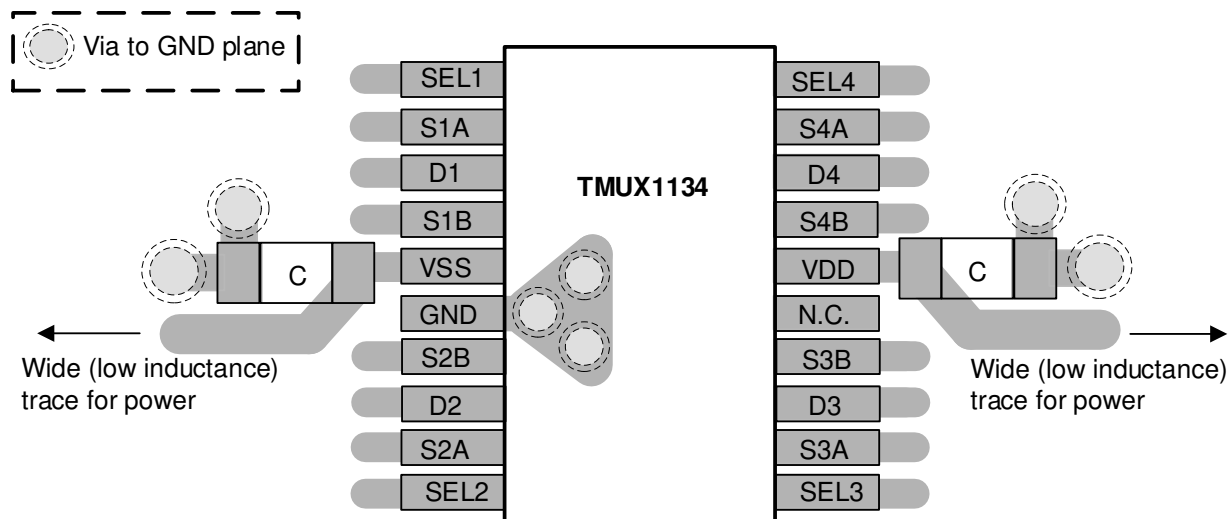


Figure 9-5. TMUX1134 Layout Example

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, [Ultrasonic Gas Meter Front-End With MSP430™ Reference Design](#).
- Texas Instruments, [True Differential, 4 x 2 MUX, Analog Front End, Simultaneous-Sampling ADC Circuit](#).
- Texas Instruments, [Improve Stability Issues with Low CON Multiplexers](#).
- Texas Instruments, [Simplifying Design with 1.8V logic Muxes and Switches](#).
- Texas Instruments, [Eliminate Power Sequencing with Powered-off Protection Signal Switches](#).
- Texas Instruments, [System-Level Protection for High-Voltage Analog Multiplexers](#).
- Texas Instruments, [QFN/SON PCB Attachment](#).
- Texas Instruments, [Quad Flatpack No-Lead Logic Packages](#).

10.2 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、www.tij.co.jp のデバイス製品フォルダを開いてください。[通知] をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取ることができます。変更の詳細については、改訂されたドキュメントに含まれている改訂履歴をご覧ください。

10.3 サポート・リソース

テキサス・インスツルメンツ E2E™ サポート・フォーラムは、エンジニアが検証済みの回答と設計に関するヒントをエキスパートから迅速かつ直接得ることができる場所です。既存の回答を検索したり、独自の質問をしたりすることで、設計に必要な支援を迅速に得ることができます。

リンクされているコンテンツは、各寄稿者により「現状のまま」提供されるものです。これらはテキサス・インスツルメンツの仕様を構成するものではなく、必ずしもテキサス・インスツルメンツの見解を反映したものではありません。テキサス・インスツルメンツの[使用条件](#)を参照してください。

10.4 Trademarks

テキサス・インスツルメンツ E2E™ is a trademark of Texas Instruments.

すべての商標は、それぞれの所有者に帰属します。

10.5 静電気放電に関する注意事項



この IC は、ESD によって破損する可能性があります。テキサス・インスツルメンツは、IC を取り扱う際には常に適切な注意を払うことを推奨します。正しい取り扱いおよび設置手順に従わない場合、デバイスを破損するおそれがあります。

ESD による破損は、わずかな性能低下からデバイスの完全な故障まで多岐にわたります。精密な IC の場合、パラメータがわずかに変化するだけで公表されている仕様から外れる可能性があるため、破損が発生しやすくなっています。

10.6 用語集

[テキサス・インスツルメンツ用語集](#) この用語集には、用語や略語の一覧および定義が記載されています。

11 Revision History

資料番号末尾の英字は改訂を表しています。その改訂履歴は英語版に準じています。

Changes from Revision A (August 2019) to Revision B (January 2024)	Page
• 「機能ブロック図」の画像を編集してロジック状態を表示.....	1
• Updated Is or Id (Continuous Current) values.....	5
• Added Ipeak values to recommended operating conditions table.....	5

Changes from Revision * (June 2019) to Revision A (August 2019)**Page**

- デバイスを事前情報から「量産データ」に変更 [1](#)

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

重要なお知らせと免責事項

テキサス・インスツルメンツは、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、テキサス・インスツルメンツ製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した テキサス・インスツルメンツ製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとします。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている テキサス・インスツルメンツ製品を使用するアプリケーションの開発の目的でのみ、テキサス・インスツルメンツはその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。テキサス・インスツルメンツや第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、テキサス・インスツルメンツおよびその代理人を完全に補償するものとし、テキサス・インスツルメンツは一切の責任を拒否します。

テキサス・インスツルメンツの製品は、[テキサス・インスツルメンツの販売条件](#)、または [ti.com](https://www.ti.com) やかかる テキサス・インスツルメンツ製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。テキサス・インスツルメンツがこれらのリソースを提供することは、適用されるテキサス・インスツルメンツの保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、テキサス・インスツルメンツはそれらに異議を唱え、拒否します。

郵送先住所: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2024, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TMUX1133PWR	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 125	TM1133
TMUX1133PWR.A	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1133
TMUX1133PWRG4	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1133
TMUX1133PWRG4.A	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1133
TMUX1134PWR	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1134
TMUX1134PWR.A	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1134
TMUX1134PWRG4	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1134
TMUX1134PWRG4.A	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	TM1134

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal



Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TMUX1133PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TMUX1133PWRG4	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TMUX1134PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
TMUX1134PWRG4	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TMUX1133PWR	TSSOP	PW	16	2000	356.0	356.0	35.0
TMUX1133PWRG4	TSSOP	PW	16	2000	353.0	353.0	32.0
TMUX1134PWR	TSSOP	PW	20	2000	353.0	353.0	32.0
TMUX1134PWRG4	TSSOP	PW	20	2000	353.0	353.0	32.0

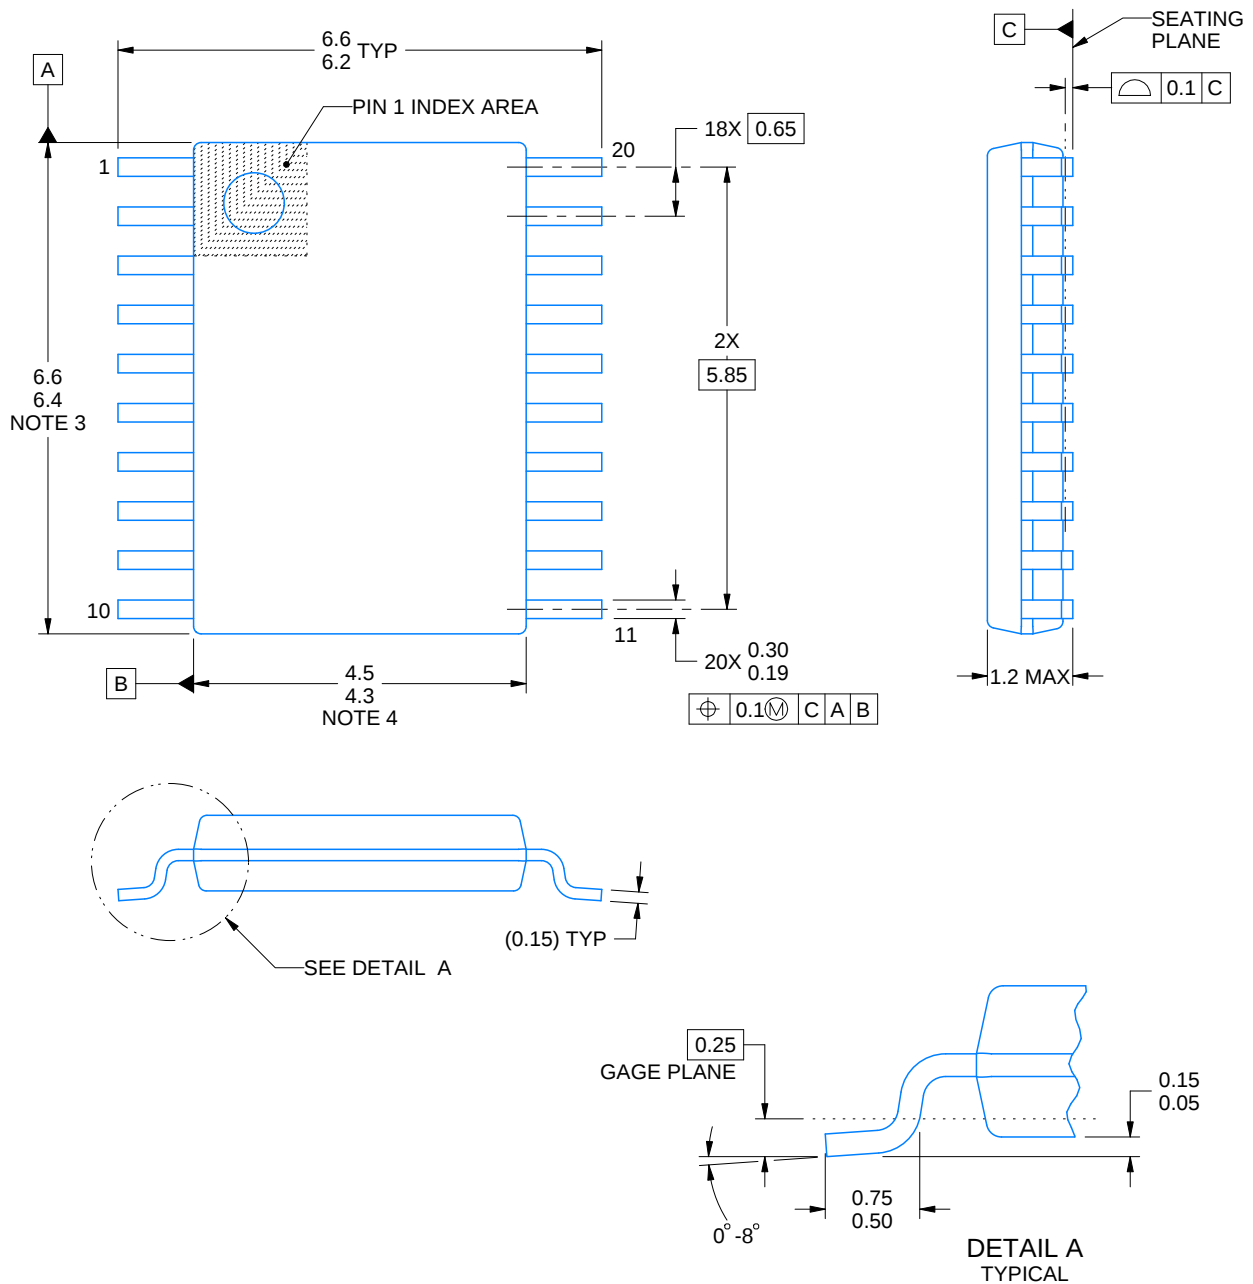

4220206/A 02/2017


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.



PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

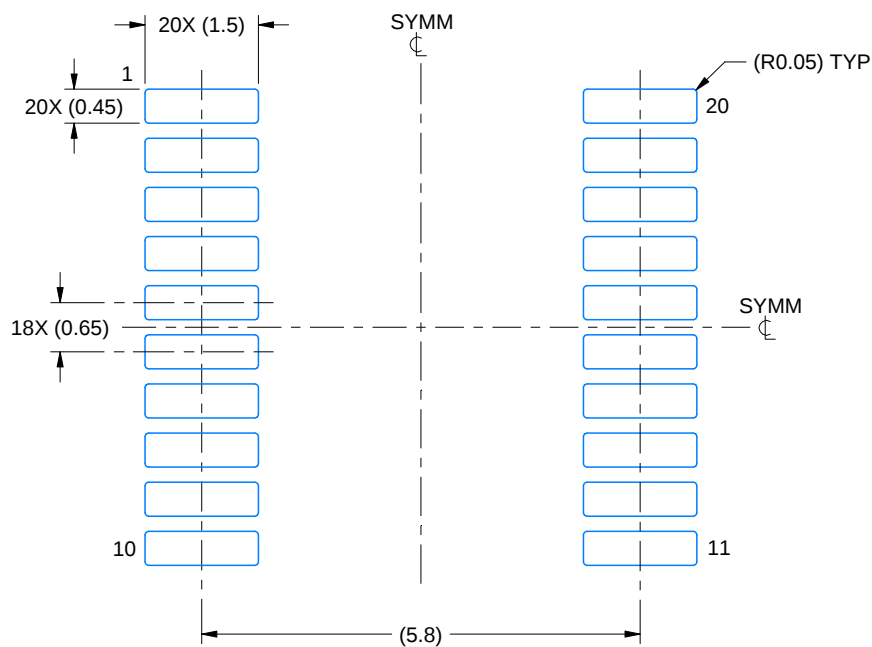

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

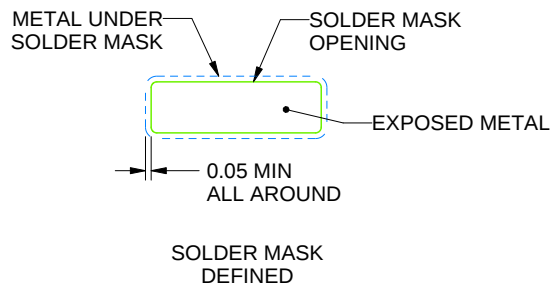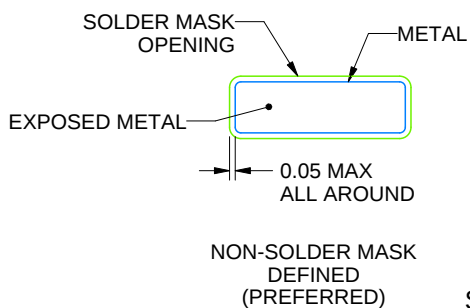

SOLDER MASK DETAILS

4220206/A 02/2017

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE


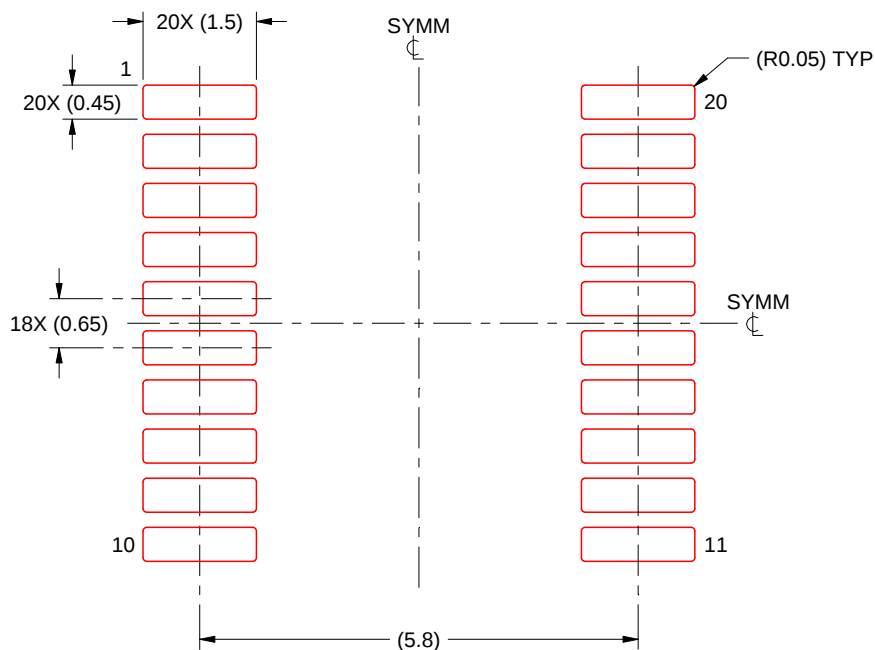


SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

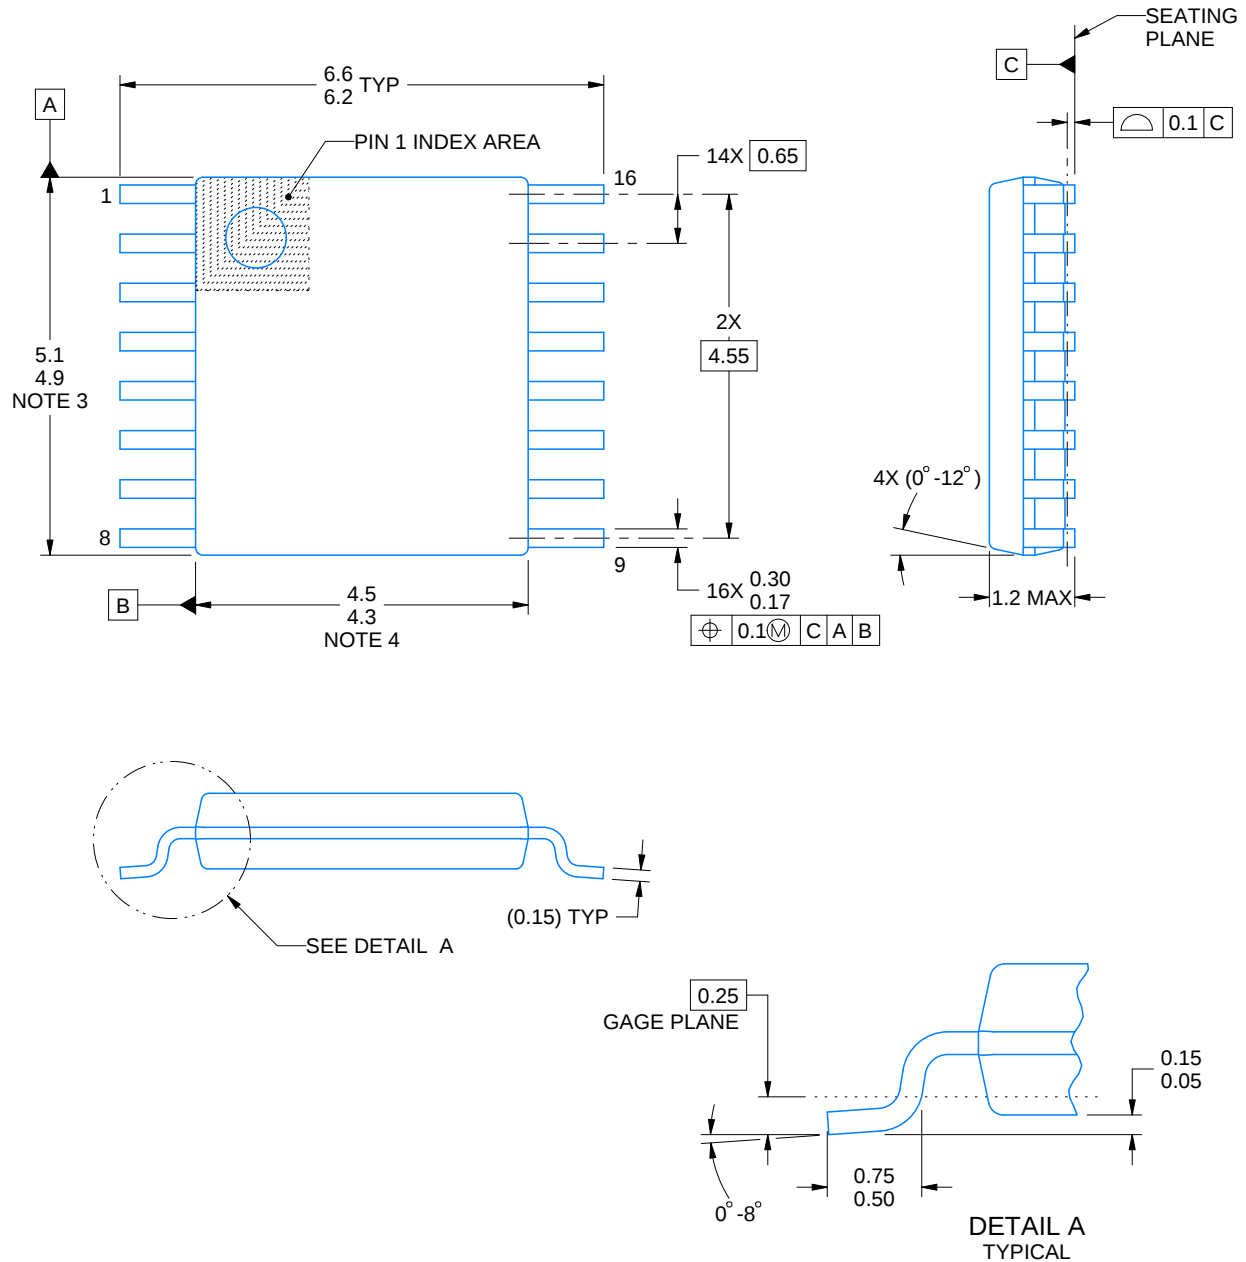

4220204/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

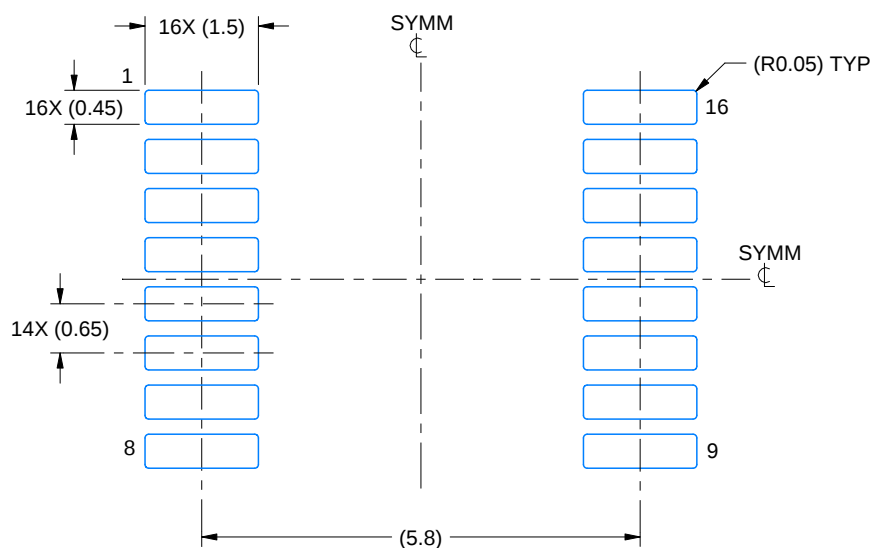

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

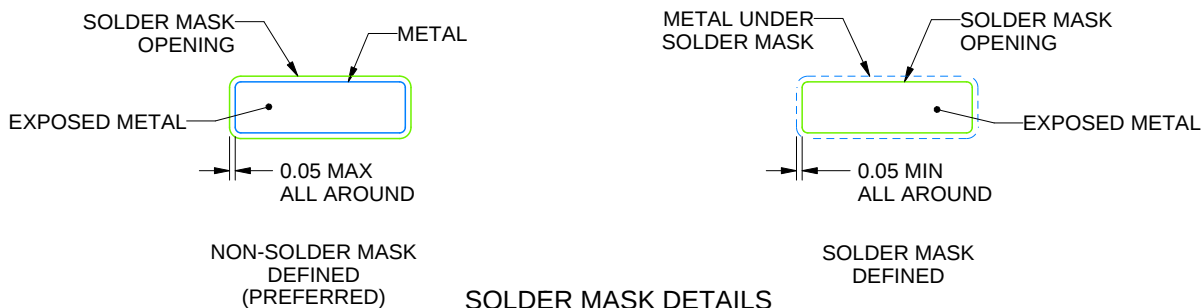

SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

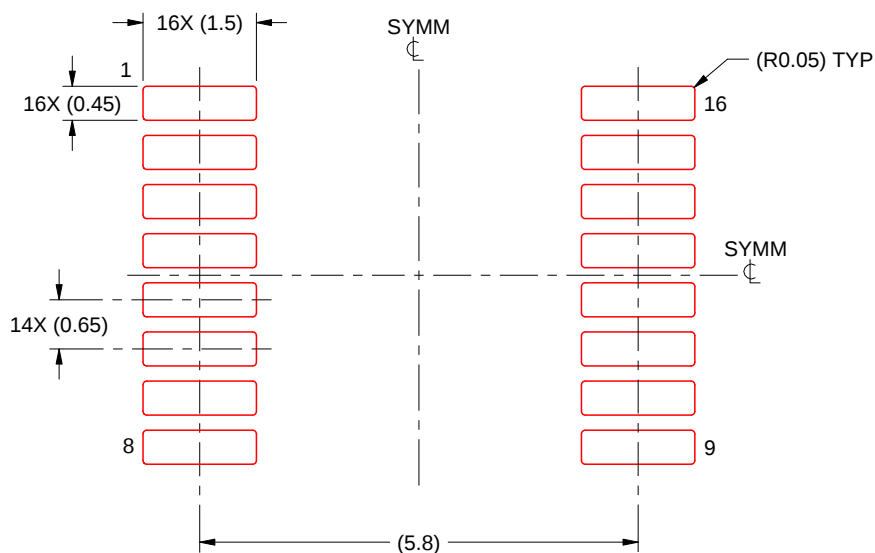

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、[TI の総合的な品質ガイドライン](#)、[ti.com](#) または TI 製品などに関連して提供される他の適用条件に従い提供されます。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。TI がカスタム、またはカスタマー仕様として明示的に指定していない限り、TI の製品は標準的なカタログに掲載される汎用機器です。

お客様がいかなる追加条項または代替条項を提案する場合も、TI はそれらに異議を唱え、拒否します。

Copyright © 2025, Texas Instruments Incorporated

最終更新日：2025 年 10 月